Technical Series RC-22



Price

RCA RECEIVING TUBE MANUAL

ALVA. DECT





RADIO CORPORATION OF AMERICA

ELECTRONIC COMPONENTS AND DEVICES • HARRISON, N. J.

Contents

| ELECTRONS, ELECTRODES, AND ELECTRON TUBES Electrons, Cathodes, Generic Tube Types, Diodes, Triodes, Tetrodes, Pentodes, Beam Power Tubes, Multi-Electrode and Multi-Unit Types, Receiving Tube Structure, Television Picture Tubes | |
|---|-----|
| ELECTRON TUBE CHARACTERISTICS | 12 |
| ELECTRON TUBE APPLICATIONS Amplification, Rectification, Detection, Automatic Volume or Gain Control, Tuning Indication with Electron-Ray Tubes, Oscillation, De- flection Circuits, Frequency Conversion, Automatic Frequency Control | |
| ELECTRON TUBE INSTALLATION Filament and Heater Power Supply, Heater-to-Cathode Connection, Plate Voltage Supply, Grid Voltage Supply, Screen-Grid Voltage Supply, Shielding, Dress of Circuit Leads, Filters, Output-Coupling Devices, High-Fidelity Systems, High-Voltage Considerations for Television Picture Tubes, Picture-Tube Safety Considerations | 58 |
| INTERPRETATION OF TUBE DATA | 69 |
| Application Guide for RCA Receiving Tubes | 75 |
| TECHNICAL DATA FOR RCA TUBE TYPES | 83 |
| PICTURE-TUBE CHARACTERISTICS CHART | 484 |
| ELECTRON TUBE TESTING | 487 |
| RESISTANCE-COUPLED AMPLIFIERS | 491 |
| Outlines | 500 |
| CIRCUITS | 504 |
| INDEX | 536 |
| READING LIST | 544 |

Information furnished by RCA is believed to be accurate and reliable. However, no responsibility is assumed by RCA for its use; nor for any infringements of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of RCA.

Copyright 1963 by Radio Corporation of America (All Rights Reserved)



Trade Mark(s) Registered Marca(s) Registrada(s) 7-63 Printed in U. S. A.


RCA

Receiving Tube Manual

THIS MANUAL, like its preceding editions, has been prepared to assist those who work or experiment with home-entertainment-type electron tubes and circuits. It will be found valuable by engineers, service technicians, educators, experimenters, radio amateurs, hobbyists, students, and many others technically interested in electron tubes.

The material in this edition has been augmented and revised to include the recent technological advances in the electronics field. Many tube types widely used in the design of new electronic equipment only a few years ago are now chiefly of interest for renewal purposes. Consequently, in the Tube Types Section, information on many older types is limited to basic essential data; information on newer and more important types is given in greater detail.

RADIO CORPORATION OF AMERICA ELECTRONIC COMPONENTS AND DEVICES HARRISON, N. J.

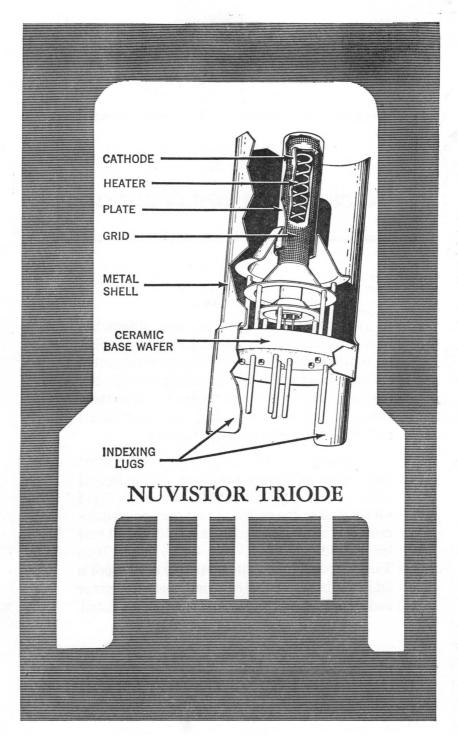

Electrons, Electrodes, and Electron Tubes

The electron tube is a marvelous device. It makes possible the performing of operations, amazing in conception, with a precision and a certainty that are astounding. It is an exceedingly sensitive and accurate instrument—the product of coordinated efforts of engineers and craftsmen. Its construction requires materials from every corner of the earth. Its use is world-wide. Its future possibilities, even in the light of present-day accomplishments, are but dimly foreseen, for each development opens new fields of design and application.

The importance of the electron tube lies in its ability to control almost instantly the flight of the millions of electrons supplied by the cathode. It accomplishes this control with a minimum of energy. Because it is almost instantaneous in its action, the electron tube can operate efficiently and accurately at electrical frequencies much higher than those attainable with rotating machines.

Electrons

All matter exists in the solid, liquid, or gaseous state. These three forms consist entirely of minute divisions known as molecules, which, in turn, are composed of atoms. Atoms have a nucleus which is a positive charge of electricity, around which revolve tiny charges of negative electricity known as electrons. Scientists have estimated that electrons weigh only 1/30-billion, billion, billion, billionths of an ounce, and that they may travel at speeds of thousands of miles per second.

Electron movement may be accelerated by the addition of energy. Heat is one form of energy which can be conveniently used to speed up the electron. For example, if the temperature of a metal is gradually raised, the electrons in the metal gain velocity. When the metal becomes hot enough, some electrons may acquire sufficient speed to break away from the surface of the metal. This action, which is accelerated when the metal is heated in a vacuum, is utilized in most electron tubes to produce the necessary electron supply.

An electron tube consists of a cathode, which supplies electrons, and one or more additional electrodes, which control and collect these electrons, mounted in an evacuated envelope. The envelope may be made of glass, metal, ceramic, or a combination of these materials.


Cathodes

A cathode is an essential part of an electron tube because it supplies the electrons necessary for tube operation. When energy in some form is applied to the cathode, electrons are released. Heat is the form of energy generally used. The method of heating the cathode may be used to distinguish between the different forms of cathodes. For example, a directly heated cathode, or filament-cathode, is a wire heated by the passage of an electric current. An indirectly heated cathode, or heater-cathode, consists of a filament, or heater, enclosed in a metal sleeve. The sleeve carries the electronemitting material on its outside surface and is heated by radiation and conduction from the heater.

A filament, or directly heated cathode, such as that shown in Fig. 1 may be further classified by identifying the filament or electron-emitting material. The materials in regular use are tungsten, thoriated tungsten, and metals which have been coated with alkalineearth oxides. Tungsten filaments are made from the pure metal. Because they must operate at high temperatures (a dazzling white) to emit sufficient electrons, a relatively large amount of filament power is required.

Thoriated-tungsten filaments are made from tungsten impregnated with thorium oxide. Due to the presence of thorium, these filaments liberate electrons at a more moderate temperature of about 1700° C (a bright yellow) and are, therefore, much more economical of filament power than are pure tungsten filaments.

Alkaline earths are usually applied as a coating on a nickel-alloy wire or ribbon. This coating, which is dried in a relatively thick layer on the filament, requires only a relatively low temperature of about 700-750°C (a dull red) to produce a copious supply of electrons. Coated filaments operate very efficiently and require relatively little filament power. However, each of these cathode materials has special advantages which determine the choice for a particular application.



Directly heated filament-cathodes require comparatively little heating power. They are used in almost all of the tube types designed for battery operation because it is, of course, desirable to impose as small a drain as possible on the batteries. Examples of battery-operated filament types are the 1R5, 1U4, 1U5, and 3V4. AC-operated types having directly heated filament-cathodes include the 2A3 and 5Y3GT.

An indirectly heated cathode, or heater-cathode, consists of a thin metal sleeve coated with electron-emitting material such as alkaline-earth oxides. The emissive surface of the cathode is maintained at the required temperature (approximately 1050°K) by resistance-heating of a tungsten or tungsten-alloy wire which is placed inside the cathode sleeve and electrically insulated from it, as shown in Fig. 2. The heater is used only for the purpose of heating the cathode sleeve and sleeve coating to an electronemitting temperature. Useful emission does not take place from the heater wire. A new dark heater insulating coating developed by RCA has better heat transfer than earlier aluminum-oxide coatings, and makes it possible to operate heaters at lower temperatures for given power inputs. Because the tensile strength of the heater wire increases at the lower operating temperatures, tubes using **dark heaters** have increased reliability, stability, and life.

The heater-cathode construction is well adapted for use in electron tubes intended for operation from ac power lines and from storage batteries. The use of separate parts for emitter and heater functions, the electrical insulation of the heater from the emitter, and the shielding effect of the sleeve may all be utilized in the design of the tube to minimize the introduction of hum from the ac heater supply and to minimize electrical interference which might enter the tube circuit through the heater-supply line. From the viewpoint of circuit design. the heater-cathode construction offers advantages in connection flexibility because of the electrical separation of the heater from the cathode.

Another advantage of the heatercathode construction is that it makes practical the design of a rectifier tube having close spacing between its cathode and plate, and of an amplifier tube having close spacing between its cathode and grid. In a close-spaced rectifier tube, the voltage drop in the tube is low, and, therefore, the regulation is improved. In an amplifier tube, the close spacing increases the gain obtainable from the tube. Because of the advantages of the heater-cathode construction, almost all present-day receiving tubes designed for ac operation have heater-cathodes.


Generic Tube Types

Electrons are of no value in an electron tube unless they can be put to work. Therefore, a tube is designed with the parts necessary to utilize electrons as well as those required to produce them. These parts consist of a cathode and one or more supplementary electrodes. The electrodes are enclosed in an evacuated envelope having the necessary connections brought out through air-tight seals. The air is removed from the envelope to allow free movement of the electrons and to prevent injury to the emitting surface of the cathode.

When the cathode is heated, electrons leave the cathode surface and form an invisible cloud in the space around it. Any positive electric potential within the evacuated envelope offers a strong attraction to the electrons (unlike electric charges attract; like charges repel). Such a positive electric potential can be supplied by an **anode** (positive electrode) located within the tube in proximity to the cathode.

Diodes


The simplest form of electron tube contains two electrodes, a cathode and an anode (plate), and is often called a diode, the family name for a two-electrode tube. In a diode, the positive potential is supplied by a suitable electrical source connected between the plate terminal and a cathode terminal, as shown in Fig. 3. Under the influence of



the positive plate potential, electrons flow from the cathode to the plate and return through the external plate-battery circuit to the cathode, thus completing the circuit. This flow of electrons is known as the plate current.

If a negative potential is applied to the plate, the free electrons in the space surrounding the cathode will be forced back to the cathode and no plate current will flow. If an alternating voltage is applied to the plate, the plate is alternately made positive and negative. Because plate current flows only during the time when the plate is positive, current flows through the tube in only one direction and is said to be rectified. Fig. 4 shows the rectified output current produced by an alternating input voltage.

Diode rectifiers are used in ac receivers to convert the ac supply voltage to dc voltage for the electrodes of the other tubes in the receiver. Rectifier tubes having only one plate and one cathode, such as the 35W4, are called half-wave rectifiers, because current can flow only during one-half of the alternating-current cycle. When two plates and one or more cathodes are



used in the same tube, current may be obtained on both halves of the ac cycle. The 6X4, 5Y3GT, and 5U4GB are examples of this type and are called full-wave rectifiers.


Not all of the electrons emitted by the cathode reach the plate. Some return to the cathode while others remain in the space between the cathode and plate for a brief period to produce an effect known as space charge. This charge has a repelling action on other electrons which leave the cathode surface and impedes their passage to the plate. The extent of this action and the amount of space charge depend on the cathode temperature, the distance between the cathode and the plate, and the plate potential. The higher the plate potential, the less is the tendency for electrons to remain in the space-charge region and repel other electrons. This effect may be noted by applying increasingly higher plate voltages to a tube operating at a fixed heater or filament voltage. Under these conditions, the maximum number of available electrons is fixed, but increasingly higher plate voltages will succeed in attracting a greater proportion of the free electrons.

Beyond a certain plate voltage, however, additional plate voltage has little effect in increasing the plate current because all of the electrons emitted

= RCA Receiving Tube Manual =

by the cathode are already being drawn to the plate. This maximum current, illustrated in Fig. 5, is called saturation current. Because it is an indication of the total number of electrons emitted, it is also known as emission current or simply emission.

Although tubes are sometimes tested by measurement of their emission current, it is generally not advisable to measure the full value of emission because this value would be sufficiently large to cause change in the tube's characteristics or even to damage the tube. Consequently, while the test value of emission current is somewhat larger than





the maximum current which will be required from the cathode in the use of the tube, it is ordinarily less than the full emission current. The emission test, therefore, is used to indicate whether the cathode can supply a sufficient number of electrons for satisfactory operation of the tube.

If space charge were not present to repel electrons coming from the cathode, the same plate current could be produced at a lower plate voltage. One way to make the effect of space charge small is to make the distance between plate and cathode small. This method is used in rectifier types having heater-cathodes, such as the 5V4GA and the 6AX5GT. In these types the radial distance between cathode and plate is only about two hundredths of an inch.

Another method of reducing spacecharge effect is utilized in mercuryvapor rectifier tubes. When such tubes are operated, a small amount of mercury contained in the tube is partially vaporized, filling the space inside the bulb with mercury atoms. These atoms are bombarded by electrons on their way to the plate. If the electrons are moving at a sufficiently high speed, the collisions tear off electrons from the mercury atoms. The mercury atom is then said to be "ionized," *i.e.*, it has lost one or more electrons and, therefore, has a positive charge. Ionization is evidenced by a bluish-green glow between the cathode and plate. When ionization occurs, the space charge is neutralized by the positive mercury atoms so that increased numbers of electrons are made available. Mercury-vapor tubes are used primarily for power rectifiers.

Ionic-heated-cathode rectifiers depend on gas ionization for their operation. These tubes are of the full-wave design and contain two anodes and a coated cathode sealed in a bubb containing a reduced pressure of inert gas. The cathode in each of these types becomes hot during tube operation, but the heating effect is caused by bombardment of the cathode by ions within the tube rather than by heater or filament current from an external source.

The internal structure of an ionicheated -cathode tube is designed so that when sufficient voltage is applied to the tube, ionization of the gas occurs between the anode which is instantaneously positive and the cathode. Under normal operating voltages, ionization does not take place between the anode that is negative and the cathode so that the requirements for rectification are satisfied. The initial small flow of current through the tube is sufficient to raise the cathode temperature quickly to incandescence whereupon the cathode emits electrons. The voltage drop in such tubes is slightly higher than that of the usual hot-cathode gas rectifiers because energy is taken from the ionization discharge to keep the cathode at operating temperature. Proper operation of these rectifiers requires a minimum flow of load current at all times in order to maintain the cathode at the temperature required to supply sufficient emission.


Triodes

When a third electrode, called the grid, is placed between the cathode and plate, the tube is known as a triode, the family name for a three-electrode tube.

The grid usually consists of relatively fine wire wound on two support rods (siderods) and extending the length of the cathode. The spacing between turns of wire is large compared with the size of the wire so that the passage of electrons from cathode to plate is practically unobstructed by the grid. In some types, a frame grid is used. The frame consists of two siderods supported by four metal straps. Extremely fine lateral wire (diameter of 0.5 mil or less) is wound under tension around the frame. This type of grid permits the use of closer spacings between grid wires and between tube electrodes, and thus improves tube performance.

The purpose of the grid is to control the flow of plate current. When a tube is used as an amplifier, a negative dc voltage is usually applied to the grid. Under this condition the grid does not draw appreciable current.

The number of electrons attracted to the plate depends on the combined effect of the grid and plate polarities, as shown in Fig. 6. When the plate is positive, as is normal, and the dc grid voltage is made more and more negative, the plate is less able to attract electrons to it and plate current decreases. When the




grid is made less and less negative (more and more positive), the plate more readily attracts electrons to it and plate current increases. Hence, when the voltage on the grid is varied in accordance with a signal, the plate current varies with the signal. Because a small voltage applied to the grid can control a comparatively large amount of plate current, the signal is amplified by the tube. Typical three-electrode tube types are the 6C4 and 6AF4A.

The grid, plate, and cathode of a triode form an electrostatic system, each

electrode acting as one plate of a small capacitor. The capacitances are those existing between grid and plate, plate and cathode, and grid and cathode. These capacitances are known as interelectrode capacitances. Generally, the capacitance between grid and plate is of the most importance. In high-gain radiofrequency amplifier circuits, this capacitance may act to produce undesired coupling between the input circuit, the circuit between grid and cathode, and the output circuit, the circuit between plate and cathode. This coupling is undesirable in an amplifier because it may cause instability and unsatisfactory performance.

Tetrodes

The capacitance between grid and plate can be made small by mounting an additional electrode, called the screen grid (grid No. 2), in the tube. With the addition of the grid No.2, the tube has four electrodes and is, accordingly, called a tetrode. The screen grid or grid No.2 is mounted between the grid No.1 (control grid) and the plate, as shown in Fig. 7, and acts as an electrostatic shield between them, thus reducing the grid-toplate capacitance. The effectiveness of



this shielding action is increased by a bypass capacitor connected between screen grid and cathode. By means of the screen grid and this bypass capacitor, the grid-plate capacitance of a tetrode is made very small. In practice, the gridplate capacitance is reduced from several picofarads (pf) for a triode to 0.01 of or less for a screen-grid tube.

The screen grid has another desirable effect in that it makes plate current practically independent of plate voltage over a certain range. The screen grid is operated at a positive voltage and,

7

RCA Receiving Tube Manual

therefore, attracts electrons from the cathode. However, because of the comparatively large space between wires of the screen grid, most of the electrons drawn to the screen grid pass through it to the plate. Hence the screen grid supplies an electrostatic force pulling electrons from the cathode to the plate. At the same time the screen grid shields the electrons between cathode and screen grid from the plate so that the plate exerts very little electrostatic force on electrons near the cathode.


So long as the plate voltage is higher than the screen-grid voltage, plate current in a screen-grid tube depends to a great degree on the screen-grid voltage and very little on the plate voltage. The fact that plate current in a screen-grid tube is largely independent of plate voltage makes it possible to obtain much higher amplification with a tetrode than with a triode. The low grid-plate capacitance makes it possible to obtain this high amplification without plate-to-grid feedback and resultant instability. In receiving-tube applications, the tetrode has been replaced to a considerable degree by the pentode.

Pentodes

In all electron tubes, electrons striking the plate may, if moving at sufficient speed, dislodge other electrons. In twoand three-electrode types, these dislodged electrons usually do not cause trouble because no positive electrode other than the plate itself is present to attract them. These electrons, therefore, are drawn back to the plate. Emission caused by bombardment of an electrode by electrons from the cathode is called **secondary emission** because the effect is **secondary to** the original cathode emis**sion**.

In the case of screen-grid tubes, the proximity of the positive screen grid to the plate offers a strong attraction to these secondary electrons and particularly so if the plate voltage swings lower than the screen-grid voltage. This effect lowers the plate current and limits the useful plate-voltage swing for tetrodes.

The effects of secondary emission are minimized when a fifth electrode is placed within the tube between the screen grid and plate. This fifth electrode is known as the suppressor grid (grid No.3) and is usually connected to the cathode, as shown in Fig. 8. Because of its negative potential with respect to the plate, the suppressor grid retards the flight of secondary electrons and diverts them back to the plate.




The family name for a five-electrode tube is "pentode". In power-output pentodes, the suppressor grid makes possible higher power output with lower grid-driving voltage; in radio-frequency amplifier pentodes the suppressor grid makes possible high voltage amplification at moderate values of plate voltage. These desirable features result from the fact that the plate-voltage swing can be made very large. In fact, the plate voltage may be as low as, or lower than, the screen-grid voltage without serious loss in signal-gain capability. Representative pentodes used for power amplification are the 3V4 and 6K6GT; representative pentodes used for voltage amplification are the 1U4, 6AU6A, 6BA6, and 5879.

Beam Power Tubes

A beam power tube is a tetrode or pentode in which directed electron beams are used to increase substantially the power-handling capability of the tube. Such a tube contains a cathode, a control grid (grid No.1), a screen grid (grid No.2), a plate, and, optionally, a suppressor grid (grid No.3). When a beam power tube is designed without an actual suppressor grid, the electrodes are so spaced that secondary emission from the plate is suppressed by space-charge effects between screen grid and plate. The space charge is produced by the slowing up of electrons traveling from a high-potential screen grid to a lowerpotential plate. In this low-velocity region, the space charge produced is sufficient to repel secondary electrons emitted from the plate and to cause them to return to the plate.

Beam power tubes of this design employ beam-confining electrodes at cathode potential to assist in producing the desired beam effects and to prevent stray electrons from the plate from returning to the screen grid outside of the beam. A feature of a beam power tube is its low screen-grid current. The screen grid and the control grid are spiral wires wound so that each turn of the screen grid is shaded from the cathode by a grid turn. This alignment of the screen grid and control grid causes the electrons to travel in sheets between the turns of the screen grid so that very few of them strike the screen grid. Because of the effective suppressor action provided by space charge and because of the low current drawn by the screen grid, the beam power tube has the advantages of high power output, high power sensitivity. and high efficiency.

Fig. 9 shows the structure of a beam power tube employing space-charge suppression and illustrates how the electrons



are confined to beams. The beam condition illustrated is that for a plate potential less than the screen-grid potential. The high-density space-charge region is indicated by the heavily dashed lines in the beam. Note that the edges of the beam-confining electrodes coincide with the dashed portion of the beam. In this way the space-charge potential region is extended beyond the beam boundaries and stray secondary electrons are prevented from returning to the screen grid outside of the beam. The space-charge effect may also be obtained by use of an actual suppressor grid. Examples of beam power tubes are 6AQ5A, 6L6GB, 6V6GT, and 50C5.

Multi-Electrode and Multi-Unit Tubes

Early in the history of tube development and application, tubes were designed for general service; that is, a single tube type—a triode—was used as a radio-frequency amplifier, an intermediate-frequency amplifier, an audiofrequency amplifier, an oscillator, or a detector. Obviously, with this diversity of application, one tube did not meet all requirements to the best advantage.

Later and present trends of tube design are the development of "specialty" types. These types are intended either to give optimum performance in a particular application or to combine in one bulb functions which formerly required two or more tubes. The first class of tubes includes such examples of specialty types as the 6CB6 and 6BY6. Types of this class generally require more than three electrodes to obtain the desired special characteristics and may be broadly classed as multi-electrode types. The 6BY6 is an especially interesting type in this class. This tube has an unusually large number of electrodes, namely seven, exclusive of the heater. Plate current in the tube is varied at two different frequencies at the same time. The tube is designed primarily for use as a combined sync separator and sync clipper in television receivers.

The second class includes multiunit tubes such as the twin-diode triodes 6BF6 and 6AV6, as well as triode-pentodes such as the 6U8A and 6X8. This class also includes class A twin triodes such as the 6CG7 and 12AX7, and types such as the 6CM7 containing dissimilar triode units used primarily as combined vertical oscillators and vertical deflection amplifiers in television receivers. Full-wave rectifiers are also multi-unit types.

A third class of tubes combines features of each of the other two classes. Typical of this third class are the pentagrid-converter types 1R5, 6BE6, and 6SA7. These tubes are similar to the multi-electrode types in that they have seven electrodes, all of which affect the electron stream; and they are similar to the multi-unit tubes in that they perform simultaneously the double function of oscillator and mixer in superheterodyne receivers.

Receiving Tube Structure

Receiving tubes generally utilize a glass or metal envelope and a base. Originally, the base was made of metal or molded phenolic material. Types having a glass envelope and a molded phenolic base include the "octal" types such as the 5U4GB and the 6SN7GTB. Types having a metal envelope and molded phenolic octal base include the 6AC7 and the 6AG7. Many modern types utilize integral glass bases. Present-day conventional tube designs utilizing glass envelopes and integral glass bases include the seven-pin and nine-pin miniature types, the nine-pin novar and neonoval types, and the twelve-pinduodecar types. Examples of the seven-pin miniature types are the 6AU6A and 6BN6. Examples of the nine-pin miniature types are the 12AU7A and 6EA8. Examples of the novar types are the 6BH3 and 7868. The nine-pin base for the novar types has a relatively large pin-circle diameter and long pins to insure firm retention of the tube in its socket.

The nuvistor concept provided a new approach to electron tube design.

Nuvistor tubes utilize a light-weight cantilever-supported cylindrical electrode structure housed in a ceramic-metal envelope (see page 2 for cutaway view). These tubes combine new materials, processes, and fabrication techniques. Examples of the nuvistor are the 2CW4 and the 6CW4.


Television Picture Tubes

The picture tube, or kinescope, is a multi-electrode tube used principally in television receivers for picture display. It consists essentially of an electron gun, a glass or metal-and-glass envelope and face-plate combination, and a fluorescent screen.

The electron gun includes a cathode for the production of free electrons, one or more control electrodes for accelerating the electrons in the beam, and, optionally, a device for "trapping" unwanted ions out of the electron beam.

Focusing of the beam is accomplished either electromagnetically by means of a focusing coil placed on the neck of the tube, or electrostatically, as shown in Fig. 10, by means of a focusing electrode (grid No. 4) within the envelope of the tube. The screen is a whitefluorescing phosphor P4 of either the silicate or the sulfide type.

Deflection of the beam is accomplished either electrostatically by means of deflecting electrodes within the envelope of the tube, or electromagnetically

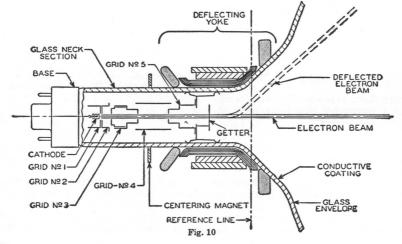

Electrons, Electrodes, and Electron Tubes —

by means of a deflecting yoke placed on the neck of the tube. Fig. 10 shows the structure of the gun section of a picture tube and illustrates how the electron beam is formed and how the beam is deflected by means of an electromagnetic deflecting yoke. In this type of tube, ions in the beam are prevented from damaging the fluorescent screen by an aluminum film on the gun side of the screen. This film not only "traps" unwanted ions, but also improves picture contrast. In many types of non-aluminized tubes, ions are separated from the electron beam by means of a tilted-gun and ion-trap-magnet arrangement.

Color television picture tubes are similar to black-and-white picture tubes. but differ in three major ways. (1) The light-emitting screen is made up of trios of phosphor dots deposited in an interlaced pattern. Each dot of a trio is capable of emitting light in one of the three primary colors (red, green, or blue). (2) A shadow mask mounted near the screen of the tube contains over 300,000 apertures, one for each of the phosphor dot trios. This mask provides color separation by shadowing two of the three phosphor dots of each trio. (3) Three closely spaced electron guns, built as a unit, provide separate beams for excitation of the three different color-phosphor-dot arrays. Thus it is possible to control the brightness of each of the three colors independently of the other two.

The three electron guns are mounted with their axes tilted toward the central axis of the envelope, and are spaced 120 degrees with respect to each other. The focusing electrodes of the three guns are interconnected internally, and their potential is adjusted to cause the separate beams to focus at the phosphor-dot screen. All three beams must be made to converge at the screen while they are simultaneously being deflected. Convergence is accomplished by the action of static and dynamic magnetic fields set up by the radial-converging magnet assembly mounted on the neck of the tube. These fields are coupled into the radial-converging pole pieces within the tube. Another pair of pole pieces in the tube is activated by the lateral-converging magnet also mounted on the neck of the tube. These pole pieces permit lateral shift in position of the blue beam in opposition to the lateral shift of the green and red beams.

A purifying magnet is used with color picture tubes to provide a magnetic field, adjustable in magnitude and direction, to effect register over the entire area of the screen. A magnetic shield is used to minimize the effects of the earth's magnetic field.

Deflection of the three beams is accomplished simultaneously by a deflecting yoke consisting of four electromagnetic coils similar to the deflecting yoke used for black-and-white picture tubes.




The term "characteristics" is used to identify the distinguishing electrical features and values of an electron tube. These values may be shown in curve form or they may be tabulated. When the characteristics values are given in curve form, the curves may be used for the determination of tube performance and the calculation of additional tube factors.

Tube characteristics are obtained from electrical measurements of a tube in various circuits under certain definite conditions of voltages. Characteristics may be further described by denoting the conditions of measurements. For example Static Characteristics are the values obtained with different dc potentials applied to the tube electrodes, while Dynamic Characteristics are the values obtained with an ac voltage on a control grid under various conditions of dc potentials on the electrodes. The dynamic characteristics, therefore, are indicative of the performance capabilities of a tube under actual working conditions.

Static characteristics may be shown by plate characteristics curves and transfer (mutual) characteristics curves. These curves present the same information. but in two different forms to increase its usefulness. The plate characteristic curve is obtained by varying plate voltage and measuring plate current for different grid bias voltages, while the transfer-characteristic curve is obtained by varying grid bias voltage and measuring plate current for different plate voltages. A plate-characteristic family of curves is illustrated by Fig. 11. Fig. 12 gives the transfer-characteristic family of curves for the same tube.

Dynamic characteristics include amplification factor, plate resistance, control-grid—plate transconductance, and certain detector characteristics, and may be shown in curve form for variations in tube operating conditions.

The amplification factor, or μ , is the ratio of the change in plate voltage to a change in control-electrode voltage in the opposite direction, under the condition that the plate current remains unchanged and that all other electrode voltages are maintained constant. For example, if, when the plate voltage is



made 1 volt more positive, the controlelectrode (grid-No.1) voltage must be made 0.1 volt more negative to hold plate current unchanged, the amplification factor is 1 divided by 0.1, or 10. In other words, a small voltage variation in the grid circuit of a tube has the same effect on the plate current as a large




plate-voltage change—the latter equal to the product of the grid-voltage change and amplification factor. The μ of a tube is often useful for calculating stage gain. This use is discussed in the ELECTRON TUBE APPLICATIONS SECTION.

Plate resistance (r_p) of an electron tube is the resistance of the path between cathode and plate to the flow of alternating current. It is the quotient of a small change in plate voltage divided by the corresponding change in plate current and is expressed in ohms, the unit of resistance. Thus, if a change of 0.1 milliampere (0.0001 ampere) is produced by a plate voltage variation of 1 volt, the plate resistance is 1 divided by 0.0001, or 10000 ohms.

Control-grid-plate transconductance, or simply transconductance (gm), is a factor which combines in one term the amplification factor and the plate resistance, and is the quotient of the first divided by the second. This term has also been known as mutual conductance. Transconductance may be more strictly defined as the quotient of a small change in plate current (amperes) divided by the small change in the controlgrid voltage producing it. under the condition that all other voltages remain unchanged. Thus, if a grid-voltage change of 0.5 volt causes a plate-current change of 1 milliampere (0.001 ampere), with all other voltages constant, the transconductance is 0.001 divided by 0.5, or 0.002 mho. A "mho" is the unit of conductance and was named by spelling ohm backwards. For convenience, a millionth of a mho, or a micromho (µmho), is used to express transconductance. Thus, in the example, 0.002 mho

is 2000 micromhos.

Conversion transconductance (gc) is a characteristic associated with the mixer (first detector) function of tubes and may be defined as the quotient of the intermediate-frequency (if) current in the primary of the if transformer divided by the applied radio-frequency (rf) voltage producing it; or more precisely, it is the limiting value of this quotient as the rf voltage and if current approach zero. When the performance of a frequency converter is determined. conversion transconductance is used in the same way as control-grid-plate transconductance is used in single-frequency amplifier computations.

The plate efficiency of a power amplifier tube is the ratio of the ac power output (P_o) to the product of the average dc plate voltage (E_b) and dc plate current (I_b) at full signal, or

 $\frac{\text{Plate efficiency}}{(\%)} = \frac{P_0 \text{ watts}}{E_b \text{ volts } \times \text{ Ib amperes}} \times 100$

The power sensitivity of a tube is the ratio of the power output to the square of the input signal voltage (E_{in}) and is expressed in mhos as follows:

Power sensitivity (mhos) = $\frac{P_0 \text{ watts}}{(Ein, rms)^2}$

Electron Tube Applications

The diversified applications of an electron receiving tube have, within the scope of this section, been treated under seven headings. These are: Amplification, Rectification, Detection, Automatic Volume or Gain Control, Oscillation, Frequency Conversion, and Automatic Frequency Control. Although these operations may take place at either radio or audio frequencies and may involve the use of different circuits and different supplemental parts, the general considerations of each kind of operation are basic.

Amplification

The amplifying action of an electron tube was mentioned under Triodes in the section on ELECTRONS, ELEC-TRODES, and ELECTRON TUBES. This action can be utilized in electronic circuits in a number of ways, depending upon the results desired. Four classes of amplifier service recognized by engineers are covered by definitions standardized by the Institute of Radio Engineers. This classification depends primarily on the fraction of input cycle during which plate current is expected to flow under rated full-load conditions. The classes are class A, class AB, class B, and class C. The term "cutoff bias" used in these definitions is the value of grid bias at which plate current is very small.

Classes of Service

A class A amplifier is an amplifier in which the grid bias and alternating grid voltages are such that plate current in a specific tube flows at all times.

A class AB amplifier is an amplifier in which the grid bias and alternating grid voltages are such that plate current in a specific tube flows for appreciably more than half but less than the entire electrical cycle.

A class B amplifier is an amplifier in which the grid bias is approximately equal to the cutoff value, so that the plate current is approximately zero when no exciting grid voltage is applied, and so that plate current in a specific tube flows for approximately one-half of each cycle when an alternating grid voltage is applied.

A class C amplifier is an amplifier in which the grid bias is appreciably greater than the cutoff value, so that the plate current in each tube is zero when no alternating grid voltage is applied, and so that plate current flows in a specific tube for appreciably less than one-half of each cycle when an alternating grid voltage is applied.


The suffix 1 may be added to the letter or letters of the class identification to denote that grid current does not flow during any part of the input cycle. The suffix 2 may be used to denote that grid current flows during part of the cycle.

For radio-frequency (rf) amplifiers which operate into a selective tuned circuit, as in radio transmitter applications. or under requirements where distortion is not an important factor, any of the above classes of amplifiers may be used. either with a single tube or a push-pull stage. For audio-frequency (af) amplifiers in which distortion is an important factor, only class A amplifiers permit single-tube operation. In this case, operating conditions are usually chosen so that distortion is kept below the conventional 5 per cent for triodes and the conventional 7 to 10 per cent for tetrodes or pentodes. Distortion can be reduced below these figures by means of special circuit arrangements such as that discussed under inverse feedback. With class A amplifiers, reduced distortion with improved power performance can be obtained by using a push-pull stage for audio service. With class AB and class B amplifiers, a balanced stage using two tubes is required for audio service.

Class A Voltage Amplifiers

As a class A voltage amplifier, an electron tube is used to reproduce gridvoltage variations across an impedance or a resistance in the plate circuit. These variations are essentially of the same form as the input signal voltage impressed on the grid, but their amplitude is increased. This increase is accomplished by operation of the tube at a suitable grid bias so that the applied grid input voltage produces plate-current variations proportional to the signal swings. Because the voltage variation obtained in the plate circuit is much larger than that required to swing the grid, amplification of the signal is obtained.

Fig. 13 gives a graphical illustration of this method of amplification and



shows, by means of the grid-voltage vs. plate-current characteristics curve, the effect of an input signal (S) applied to the grid of a tube. The output signal (O) is the resulting amplified plate-current variation.

The plate current flowing through the load resistance (R) of Fig. 14 causes a voltage drop which varies directly with the plate current. The ratio of this voltage variation produced in the load resistance to the input signal voltage is the voltage amplification, or gain, provided by the tube. The voltage amplification due to the tube is expressed by the following convenient formulas:

Voltage amplification =


 $\mu \times RL$

RL + rp

or $\frac{\text{gm} \times \text{rp} \times \text{RL}}{1000000 \times (\text{rp} + \text{RL})}$


where μ is the amplification factor of the tube, R_L is the load resistance in ohms, r_p is the plate resistance in ohms, and g_m is the transconductance in micromhos.

From the first formula, it can be seen that the gain actually obtainable



from the tube is less than the tube amplification factor but that the gain approaches the amplification factor when the load resistance is large compared to the tube plate resistance. Fig. 15 shows graphically how the gain approaches the amplification factor of the tube as the load resistance is increased. From the curve it can be seen that a high value of load resistance should be used to obtain high gain in a voltage amplifier.

In a resistance-coupled amplifier, the load resistance of the tube is approximately equal to the resistance of the plate resistor in parallel with the grid resistor of the following stage. Hence, to obtain a large value of load resistance, it is necessary to use a plate resistor and a grid resistor of large resistance. However, the plate resistor should not be too large because the flow of plate current through the plate resistor produces a voltage drop which reduces the plate resistor is too large, this drop will be too

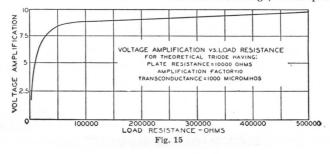

large, the plate voltage on the tube will be too small, and the voltage output of the tube will be too small. Also, the grid resistor of the following stage should not be too large, the actual maximum value being dependent on the particular tube type. This precaution is necessary because all tubes contain minute amounts of residual gas which cause a minute flow of current through the grid resistor. If the grid resistor is too large, the positive bias developed by the flow of this current through the resistor decreases the normal negative bias and produces an increase in the plate current. This increased current may overheat the tube and cause liberation of more gas which, in turn, will cause further decrease in bias. The action is cumulative and results in a runaway condition which can destroy the tube.

A higher value of grid resistance is permissible when cathode-resistor bias is used than when fixed bias is used. When cathode-resistor bias is used, a loss in bias due to gas or grid-emission effects is almost completely offset by an increase in bias due to the voltage drop across the cathode resistor. Typical values of plate resistor and grid resistor for tube types used in resistance-coupled circuits, and the values of gain obtainable, are shown in the RESISTANCE-COUPLED AMPLIFIER SECTION.

The input impedance of an electron tube (that is, the impedance between grid and cathode) consists of (1) a reactive component due to the capacitance between grid and cathode, (2) a resistive component resulting from the time of transit of electrons between cathode and grid, and (3) a resistive component developed by the part of the cathode lead inductance which is common to both the input and output circuits. Components (2) and (3) are dependent on the frequency of the incoming signal. The input impedance is very high at audio frequencies when a tube is operated with its grid biased negative. In a class A_1 or AB₁ transformer-coupled audio amplifier, therefore, the loading imposed by the grid on the input transformer is negligible. As a result, the secondary impedance of a class A1 or class AB1 input transformer can be made very high because the choice is not limited by the input impedance of the tube; however, transformer design considerations may limit the choice.


At the higher radio frequencies, the input impedance may become very low even when the grid is negative, due to the finite time of passage of electrons between cathode and grid and to the appreciable lead reactance. This impedance drops very rapidly as the frequency is raised, and increases input-circuit loading. In fact, the input impedance may become low enough at very high radio frequencies to affect appreciably the gain and selectivity of a preceding stage. Tubes such as the "acorn" and "pencil" types and the high-frequency miniatures have been developed to have low input capacitances, low electron-transit time. and low lead inductance so that their input impedance is high even at the ultra-high radio frequencies. Input admittance is the reciprocal of input impedance.

A remote-cutoff amplifier tube is a modified construction of a pentode or a tetrode type designed to reduce modulation-distortion and cross-modulation in radio-frequency stages. Cross-modulation is the effect produced in a radio or television receiver by an interfering station "riding through" on the carrier of the station to which the receiver is tuned. Modulation-distortion is a distortion of the modulated carrier and appears as audio-frequency distortion in the output. This effect is produced by a radio-frequency amplifier stage operating on an excessively curved characteristic when the grid bias has been increased to reduce volume. The offending stage for cross-modulation is usually the first radio-frequency amplifier, while for modulation-distortion the cause is usually the last intermediate-frequency stage. The characteristics of remote-cutoff types are such as to enable them to handle both large and small input signals with minimum distortion over a wide range of signal strength.

Fig. 16 illustrates the construction of the grid No.1 (control grid) in a remote-cutoff tube. The remote-cutoff action is due to the structure of the grid which provides a variation in amplification factor with change in grid bias. The grid No.1 is wound with open spacing at


Electron Tube Applications

the middle and with close spacing at the ends. When weak signals and low grid bias are applied to the tube, the effect of the non-uniform turn spacing of the grid on cathode emission and tube characteristics is essentially the same as for uniform spacing. As the grid bias is made more negative to handle larger input



signals, the electron flow from the sections of the cathode enclosed by the ends of the grid is cut off. The plate current and other tube characteristics are then dependent on the electron flow through the open section of the grid. This action changes the gain of the tube so that large signals may be handled with minimum distortion due to cross-modulation and modulation-distortion.

Fig. 17 shows a typical plate-current vs. grid-voltage curve for a remotecutoff type compared with the curve for a type having a uniformly spaced grid. It will be noted that while the curves are similar at small grid-bias voltages, the plate current of the remote-cutoff tube drops quite slowly with large values of bias voltage. This slow change makes it




possible for the tube to handle large signalssatisfactorily. Becauseremote-cutoff types can accommodate large and small signals, they are particularly suitable for use in sets having automatic volume control. Remote-cutoff tubes also are known as variable-mu types.

Class A Power Amplifiers

As a class A power amplifier, an electron tube is used in the output stage of a radio or television receiver to supply a relatively large amount of power to the loudspeaker. For this application, large power output is of more importance than high voltage amplification; therefore, gain possibilities are sacrificed in the design of power tubes to obtain power-handling capability.

Triodes, pentodes, and beam power tubes designed for power amplifier service have certain inherent features for each structure. Power tubes of the triode type for class A service are characterized by low power sensitivity, low platepower efficiency, and low distortion. Power tubes of the pentode type are characterized by high power sensitivity, high plate-power efficiency and, usually, somewhat higher distortion than class A triodes. Beam power tubes have higher




power sensitivity and efficiency than triode or conventional pentode types.

A class A power amplifier is also used as a driver to supply power to a class AB_2 or a class B stage. It is usually advisable to use a triode, rather than a pentode, in a driver stage because of the lower plate impedance of the triode.

Power tubes connected in either parallel or push-pull may be employed as class A amplifiers to obtain increased output. The parallel connection (Fig. 18) provides twice the output of a single tube with the same value of grid-signal voltage. With this connection, the effective transconductance of the stage is doubled, and the effective plate resistance and the load resistance required are halved as compared with singletube values.

The push-pull connection (Fig. 19), although it requires twice the grid-signal voltage, provides increased power and has other important advantages over single-tube operation. Distortion caused by even-order harmonics and hum caused



by plate-voltage-supply fluctuations are either eliminated or decidedly reduced through cancellation. Because distortion for push-pull operation is less than for single-tube operation, appreciably more than twice single-tube output can be obtained with triodes by decreasing the load resistance for the stage to a value approaching the load resistance for a single tube.

For either parallel or push-pull class A operation of two tubes, all electrode currents are doubled while all dc electrode voltages remain the same as for single-tube operation. If a cathode resistor is used, its value should be about one-half that for a single tube. If oscillations occur with either type of connection, they can often be eliminated by the use of a non-inductive resistor of approximately 100 ohms connected in series with each grid at the socket terminal.

Operation of power tubes so that

Power-Output Calculations

Calculation of the power output of a triode used as a class A amplifier with either an output transformer or a choke having low dc resistance can be made without serious error from the plate family of curves by assuming a resistance load. The proper plate current, grid bias, optimum load resistance, and per-cent second-harmonic distortion can also be determined. The calculations are made graphically and are illustrated in Fig. 20 for given conditions. The procedure is as follows:

(1) Locate the zero-signal bias point P by determining the zero-signal bias Ec_o from the formula:

Zero-signal bias (Eco) = $-(0.68 \times E_b)/\mu$

where E_b is the chosen value in volts of dc plate voltage at which the tube is to be operated, and μ is the amplification factor of the tube. This quantity is shown as negative to indicate that a negative bias is used.


(2) Locate the value of zero-signal plate current, $I_{\rm o}$, corresponding to point P.

(3) Locate the point $2I_o$, which is twice the value of I_o and corresponds to the value of the maximum-signal plate current I_{max} .

(4) Locate the point X on the dc bias curve at zero volts, $E_c = 0$, corresponding to the value of I_{max} .

(5) Draw a straight line XY through X and P.

Line XY is known as the load resistance line. Its slope corresponds to

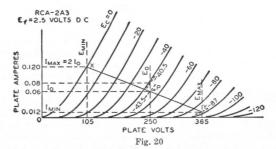

the grids run positive is inadvisable except under conditions such as those discussed in this section for class AB and class B amplifiers. the value of the load resistance. The load resistance in ohms is equal to $(E_{max}-E_{min})$ divided by $(I_{max}-I_{min})$, where E is in volts and I is in amperes.

It should be noted that in the case of filament types of tubes, the calculations are given on the basis of a dcoperated filament. When the filament is ac-operated, the calculated value of dc bias should be increased by approximately one-half the filament voltage rating of the tube.

The value of zero-signal plate current I_o should be used to determine the plate dissipation, an important factor influencing tube life. In a class A amplifier under zero-signal conditions, the plate dissipation is equal to the power input, *i.e.*, the product of the dc plate voltage E_o and the zero-signal dc plate current I_0 . If it is found that the platedissipation rating of the tube is exceeded with the zero-signal bias Ec_o calculated above, it will be necessary to increase the bias by a sufficient amount so that the actual plate dissipation does not exceed the rating before proceeding further with the remaining calculations.

For power-output calculations, it is assumed that the peak alternating grid voltage is sufficient (1) to swing the grid from the zero-signal bias value Ec_o to zero bias ($E_c = 0$) on the positive swing and (2) to swing the grid to a value twice the zero-signal bias value on the negative swing. During the negative swing, the plate voltage and plate current reach values of E_{max} and Imin; during the positive swing, they reach values of E_{min} and Imax. Because power is the product of voltage and current, the power output P_o as shown by a wattmeter is given by

 $P_0 = \frac{(I_{max} - I_{min}) \times (E_{max} - E_{min})}{8}$

where E is in volts, I is in amperes, and P_o is in watts.

In the output of power amplifier triodes, some distortion is present. This distortion is due predominantly to second harmonics in single-tube amplifiers. The percentage of second-harmonic distortion may be calculated by the following formula:

$$\% \text{ distortion} = \frac{\frac{I_{max} + I_{min}}{2} - I_0}{\frac{2}{I_{max} - I_{min}} \times 100}$$

where I_0 is the zero-signal plate current in amperes. If the distortion is excessive, the load resistance should be increased or, occasionally, decreased slightly and the calculations repeated.

Example: Determine the load resistance, power output, and distortion of a triode having an amplification factor of 4.2, a plate-dissipation rating of 15 watts, and plate characteristics curves as shown in Fig. 20. The tube is to be operated at 250 volts on the plate.

Procedure: For a first approximation, determine the operating point P from the zero-signal bias formula, $Ec_0 =$ $-(0.68 \times 250) / 4.2 = -40.5$ volts. From the curve for this voltage, it is found that the zero-signal plate current I_0 at a plate voltage of 250 volts is 0.08 ampere and, therefore, the plate-dissipation rating is exceeded $(0.08 \times 250 = 20 \text{ watts})$. Consequently, it is necessary to reduce the zero-signal plate current to 0.06 ampere at 250 volts. The grid bias is now seen to be -43.5 volts. Note that the curve was taken with a dc filament supply; if the filament is to be operated on an ac supply, the bias must be increased by about one-half the filament voltage, or to -45 volts, and the circuit returns made to the mid-point of the filament circuit.

Point X can now be determined. Point X is at the intersection of the dc bias curve at zero volts with I_{max}, where I_{max} = $2I_{\circ} = 2 \times 0.06 = 0.12$ ampere. Line XY is drawn through points P and X. E_{max}, E_{min}, and I_{min} are then found from the curves. Substituting these values in the power-output formula, we obtain

$$Po = \frac{(0.12 - 0.012) \times (365 - 105)}{8} = 3.52 \text{ watts}$$

The resistance represented by load line XY is

 $\frac{(365 - 105)}{(0.12 - 0.012)} = 2410 \text{ ohms}$

When the values from the curves are substituted in the distortion formula, we obtain

$$\frac{0.12+0.012}{2}-0.06$$

% distortion = $\frac{2}{0.12 - 0.012} \times 100 = 5.5\%$


It is customary to select the load resistance so that the distortion does not exceed five per cent. When the method shown is used to determine the slope of the load resistance line, the second-harmonic distortion generally does not exceed five per cent. In the example, however, the distortion is excessive and it is desirable, therefore, to use a slightly higher load resistance. A load resistance of 2500 ohms will give a distortion of about 4.9 per cent. The power output is reduced only slightly to 3.5 watts.

Operating conditions for triodes in push-pull depend on the type of operation desired. Under class A conditions, distortion, power output, and efficiency are all relatively low. The operating bias can be anywhere between that specified for single-tube operation and that equal to one-half the grid-bias voltage required to produce plate-current cutoff at a plate voltage of $1.4E_0$ where E_0 is the operating plate voltage. Higher bias than this value requires higher grid-signal voltage and results in class AB₁ operation which is discussed later.

The method for calculating maximum power output for triodes in pushpull class A operation is as follows: Erect a vertical line at 0.6 E_o (see Fig. 21), intersecting the $E_c=0$ curve at the

plate dissipation rating of the tube is 15 watts. Then, for class A operation, the operating bias can be equal to, but not more than, one-half the grid bias for cutoff with a plate voltage of $1.4 \times 300 = 420$ volts. (Since cutoff bias is approximately -115 volts at a plate voltage of 420 volts, one-half of this value is -57.5 volts bias.) At this bias, the plate current is found from the plate family to be 0.054 ampere and, therefore, the plate dissipation is 0.054 imes 300 or 16.2 watts. Since -57.5 volts is the limit of bias for class A operation of these tubes at a plate voltage of 300 volts, the dissipation cannot be reduced by increasing the bias and it, therefore, becomes necessary to reduce the plate voltage.

If the plate voltage is reduced to 250 volts, the bias will be found to be -43.5 volts. For this value, the plate current is 0.06 ampere, and the plate dissipation is 15 watts. Then, following the

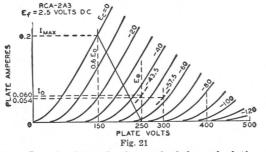

point I_{max} . Then, I_{max} is determined from the curve for use in the formula

$P_0 = (I_{max} \times E_0)/5$

If I_{max} is expressed in amperes and E_o in yolts, power output is in watts.

The method for determining the proper load resistance for triodes in push-pull is as follows: Draw a load line through I_{max} on the zero-bias curve and through the E_0 point on the zero-current axis. Four times the resistance represented by this load line is the plate-toplate load (R_{pp}) for two triodes in a class A push-pull amplifier. Expressed as a formula,

 $R_{pp} = 4 \times (E_0 - 0.6E_0)/I_{max}$

where E_0 is expressed in volts, I_{max} in amperes, and R_{pp} in ohms.

Example: Assume that the plate voltage (E_0) is to be 300 volts, and the

method for calculating power output, erect a vertical line at $0.6E_o = 150$ volts. The intersection of the line with the curve $E_c = 0$ is I_{max} or 0.2 ampere.When this value is substituted in the power formula, the power output is (0.2×250) /5 = 10 watts. The load resistance is determined from the load formula: Plateto-plate load (R_{pp}) = 4 × (250 – 150) /0.2 = 2000 ohms.

Power output for a pentode or a beam power tube as a class A amplifier can be calculated in much the same way as for triodes. The calculations can be made graphically from a special plate family of curves, as illustrated in Fig. 22.


From a point A at or just below the knee of the zero-bias curve, draw arbitrarily selected load lines to intersect the zero-plate-current axis. These lines should be on both sides of the operating

Electron Tube Applications

point P whose position is determined by the desired operating plate voltage, E_0 , and one-half the maximum-signal plate current. Along any load line, say AA₁, measure the distance AO₁. On the same line, lay off an equal distance, O₁A₁. For optimum operation, the change in bias from A to O₁ should be nearly equal to the change in bias from O₁ to A₁. If this condition can not be met with one line, % total (2nd and 3rd) harmonic distortion = $\sqrt{(\sqrt[6]{2}2nd)^2 + (\sqrt[6]{3}rd)^2}$

Conversion Factors

Operating conditions for voltage values other than those shown in the published data can be obtained by the use of the **nomograph** shown in Fig. 23 when all electrode voltages are changed simultaneously in the same ratio. The

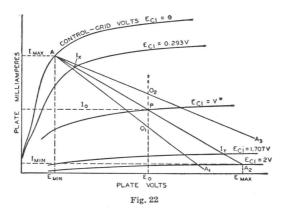

as is the case for the line first chosen, then another should be chosen. When the most satisfactory line has been selected, its resistance may be determined by the following formula:

Load resistance (R_L) = $\frac{E_{max} - E_{min}}{I_{max} - I_{min}}$

The value of RL may then be substituted in the following formula for calculating power output.

$$P_{0} = \frac{[I_{max} - I_{min} + 1.41 (I_{x} - I_{y})]^{2} R_{L}}{32}$$

In both of these formulas, I is in amperes, E is in volts, R_L is in ohms, and P_0 is in watts. I_x and I_y are the current values on the load line at bias voltages of $Ec_1 = V - 0.707V = 0.293V$ and $Ec_1 = V + 0.707V = 1.707V$, respectively.

Calculations for distortion may be made by means of the following formulas. The terms used have already been defined.


 nomograph includes conversion factors for current (F₁), power output (F_p), plate resistance or load resistance (F_r), and transconductance (F_{gm}) for voltage ratios between 0.5 and 2.0. These factors are expressed as functions of the ratio between the desired or new voltage for any electrode (E_{des}) and the published or original value of that voltage (E_{pub}). The relations shown are applicable to triodes and multigrid tubes in all classes of service.

To use the nomograph, simply place a straight-edge across the page so that it intersects the scales for E_{des} and E_{pub} at the desired values. The desired conversion factor may then be read directly or estimated at the point where the straight-edge intersects the F_{l} , F_{p} F_{r} , or F_{gm} scale.

For example, suppose it is desired to operate two 6L6GB's in class A₁pushpull, fixed bias, with a plate voltage of 200 volts. The nearest published operating conditions for this class of service are for a plate voltage of 250 volts. The operating conditions for the new plate voltage can be determined as follows:

The voltage conversion factor, Fe,

is equal to 200/250 or 0.8. The dashed lines on the nomograph of Fig. 23 indicate that for this voltage ratio F_i is approximately 0.72, F_p is approximately Because contact-potential effects become noticeable only at very small dc grid-No.1 (bias) voltages, they are generally negligible in power tubes. Secondary

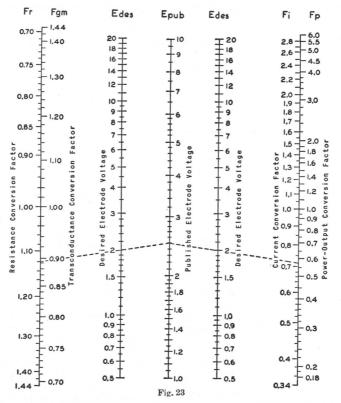

0.57, F_r is 1.12, and F_{gm} is approximately 0.892. These factors may be applied directly to operating values shown in the tube data, or to values calculated by the methods described previously.

Because this method for conversion of characteristics is necessarily an approximation, the accuracy of the nomograph decreases progressively as the ratio E_{des}/E_{pub} departs from unity. In general, results are substantially correct when the value of the ratio E_{des}/E_{pub} is between 0.7 and 1.5. Beyond these limits, the accuracy decreases rapidly, and the results obtained must be considered rough approximations.

The nomograph does not take into consideration the effects of contact potential or secondary emission in tubes. emission may occur in conventional tetrodes, however, if the plate voltage swings below the grid-No.2 voltage. Consequently, the conversion factors shown in the nomograph apply to such tubes only when the plate voltage is greater than the grid-No.2 voltage. Because secondary emission may also occur in certain beam power tubes at very low values of plate current and plate voltage, the conversion factors shown in the nomograph do not apply when these tubes are operated under such conditions.

Class AB Power Amplifiers

A class AB power amplifier employs two tubes connected in push-pull with a higher negative grid bias than is

Electron Tube Applications


used in a class A stage. With this higher negative bias, the plate and screen-grid voltages can usually be made higher than for class A amplifiers because the increased negative bias holds plate current within the limit of the tube platedissipation rating. As a result of these higher voltages, more power output can be obtained from class AB operation.

Class AB amplifiers are subdivided into class AB_1 and class AB_2 . In class AB_1 there is no flow of grid current. That is, the peak signal voltage applied to each grid is not greater than the negative grid-bias voltage. The grids therefore are not driven to a positive potential and do not draw current. In class AB_2 , the peak signal voltage is greater than the bias so that the grids are driven positive and draw current.

Because of the flow of grid current in a class AB_2 stage there is a loss of fluctuations in the voltage output of the power supply, with the result that power output is decreased and distortion is increased. To obtain satisfactory regulation it is usually advisable to use a lowdrop rectifier, such as the 5V4GA, with a choke-input filter. In all cases, the resistance of the filter choke and power transformers should be as low as possible.

Class AB₁ Power Amplifiers

In class AB_1 push-pull amplifier service using triodes, the operating conditions may be determined graphically by means of the plate family if E_0 , the desired operating plate voltage, is given. In this service, the dynamic load line does not pass through the operating point P as in the case of the single-tube amplifier, but through the point D in Fig. 24. Its position is not affected by the operating grid bias provided the

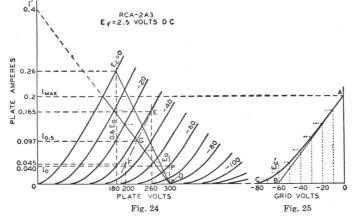

power in the grid circuit. The sum of this loss and the loss in the input transformer is the total driving power required by the grid circuit. The driver stage should be capable of a power output considerably larger than this required power in order that distortion introduced in the grid circuit be kept low. The input transformer used in a class AB_2 amplifier usually has a stepdown turns ratio.

Because of the large fluctuations of plate current in a class AB_2 stage, it is important that the plate power supply should have good regulation. Otherwise the fluctuations in plate current cause plate-to-plate load resistance remains constant.

Under these conditions, grid bias has no appreciable effect on the power output. Grid bias cannot be neglected, however, since it is used to find the zerosignal plate current and, from it, the zero-signal plate dissipation. Because the grid bias is higher in class AB_1 than in class A service for the same plate voltage, a higher signal voltage may be used without grid current being drawn and, therefore, higher power output is obtained than in class A service.

In general, for any load line through point D, Fig. 24, the plate-to-plate load resistance in ohms of a push-pull amplifier is $R_{pp}=4E_o/I'$, where I' is the plate current value in amperes at which the load line as projected intersects the plate current axis, and E_0 is in volts. This formula is another form of the one given under push-pull class A amplifiers, $R_{pp} = 4(E_o - 0.6E_o)/I_{max}$, but is more general. Power output = $(I_{max}/\sqrt{2})^2 \times$ $R_{pp}/4$, where I_{max} is the peak plate current at zero grid volts for the load chosen. This formula simplified is $(I_{max})^2 \times R_{pp}/$ 8. The maximum-signal average plate current is $2I_{max}/\pi$ or 0.636 I_{max} ; the maximum-signal average power input is $0.636 I_{max} \times E_{\bullet}$.

It is desirable to simplify these formulas for a first approximation. This simplification can be made if it is assumed that the peak plate current, I_{max} , occurs at the point of the zero-bias curve corresponding approximately to 0.6 E_o, the condition for maximum power output. The simplified formulas are:

$$P_{0} \text{ (tor two tubes)} = (I_{max} \times E_{0})/5$$
$$R_{pp} = 1.6E_{0}/I_{max}$$

where E_o is in volts, I_{max} is in amperes, R_{pp} is in ohms, and P_o is in watts.

It may be found during subsequent calculations that the distortion or the plate dissipation is excessive for this approximation; in that case, a different load resistance must be selected using the first approximation as a guide and the process repeated to obtain satisfactory operating conditions.

Example: Fig. 24 illustrates the application of this method to a pair of 2A3's operated at $E_c=300$ volts. Each tube has a plate-dissipation rating of 15 watts. The method is to erect a vertical line at $0.6E_o$, or at 180 volts, which intersects the $E_c=0$ curve at the point $I_{max}=0.26$ ampere. Using the simplified formulas, we obtain

 $R_{pp} = (1.6 \times 300)/0.26 = 1845 \text{ ohms}$ $P_0 = (0.26 \times 300)/5 = 15.6 \text{ watts}$

At this point, it is well to determine the plate dissipation and to compare it with the maximum rated value. From the average plate current formula (0.636 I_{max}) mentioned previously, the maximum-signal average plate current is 0.166 ampere. The product of this current and the operating plate voltage is 49.8 watts, the average input to the two tubes. From this value, subtract the power output of 15.6 watts to obtain the total dissipation for both tubes which is 34.2 watts. Half of this value, 17 watts, is in excess of the 15-watt rating of the tube and it is necessary, therefore, to assume another and higher load resistance so that the plate-dissipation rating will not be exceeded.

It will be found that at an operating plate voltage of 300 volts the 2A3's require a plate-to-plate load resistance of 3000 ohms. From the formula for R_{pp} , the value of I' is found to be 0.4 ampere. The load line for the 3000-ohm load resistance is then represented by a straight line from the point I'=0.4 ampere on the plate-current ordinate to the point E_0 = 300 volts on the plate-voltage abscissa. At the intersection of the load line with the zero-bias curve, the peak plate current, I_{max}, can be read at 0.2 ampere. Then $P_0 = (I_{max}/\sqrt{2})^2 \times R_{Pp}/4$

 $= (0.2/1.41)^2 \times 3000/4$ = 15 watts

Proceeding as in the first approximation, we find that the maximum-signal average plate current, $0.636I_{max}$, is 0.127ampere, and the maximum-signal average power input is 38.1 watts. This input minus the power output is 38.1 - 15=23.1 watts. This value is the dissipation for two tubes; the value per tube is 11.6watts, a value well within the rating of this tube type.

The operating bias and the zerosignal plate current may now be found by use of a curve which is derived from the plate family and the load line. Fig. 25 is a curve of instantaneous values of plate current and dc grid-bias voltages taken from Fig. 24. Values of grid bias are read from each of the grid-bias curves of Fig. 24 along the load line and are transferred to Fig. 25 to produce the curved line from A to C. A tangent to this curve, starting at A, is drawn to intersect the grid-voltage abscissa. The point of intersection, B, is the operating grid bias for fixed-bias operation. In the example, the bias is -60 volts. Refer back to the plate family at the operating conditions of plate volts=300 and grid bias = -60 volts; the zero-signal plate current per tube is seen to be 0.04 ampere.

This procedure locates the operating point for each tube at P. The plate cur-

rent must be doubled, of course, to obtain the zero-signal plate current for both tubes. Under maximum-signal conditions, the signal voltage swings from zero-signal bias voltage to zero bias for each tube on alternate half cycles. Hence, in the example, the peak af signal voltage per tube is 60 volts, or the grid-togrid value is 120 volts.

-

As in the case of the push-pull class A amplifier, the second-harmonic distortion in a class AB1 amplifier using triodes is very small and is largely canceled by virtue of the push-pull connection. Thirdharmonic distortion, however, which may be larger than permissible, can be found by means of composite characteristic curves. A complete family of curves can be plotted, but for the present purpose only the one corresponding to a grid bias of one-half the peak grid-voltage swing is needed. In the example, the peak grid voltage per tube is 60 volts, and the half value is 30 volts. The composite curve, since it is nearly a straight line, can be constructed with only two points (see Fig. 24). These two points are obtained from deviations above and below the operating grid and plate voltages.

In order to find the curve for a bias of -30 volts, we have assumed a deviation of 30 volts from the operating grid voltage of -60 volts. Next assume a deviation from the operating plate voltage of, say, 40 volts. Then at 300 - 40 = 260volts, erect a vertical line to intersect the (-60) - (-30) = -30-volt bias curve and read the plate current at this intersection, which is 0.167 ampere; likewise, at the intersection of a vertical line at 300 + 40 = 340 volts and the (-60) + (-30) = -90-volt bias curve, read the plate current. In this example, the plate current is estimated to be 0.002 ampere. The difference of 0.165 ampere between these two currents determines the point E on the 300 - 40 = 260-volt vertical. Similarly, another point F on the same composite curve is found by assuming the same grid-bias deviation but a larger plate-voltage deviation, say, 100 volts.

We now have points at 260 volts and 0.165 ampere (E), and at 200 volts and 0.045 ampere (F). A straight line through these points is the composite curve for a bias of -30 volts, shown as a long-short dash line in Fig. 24. At the intersection of the composite curve and the load line, G, the instantaneous composite plate current at the point of one-half the peak signal swing is determined. This current value, designated $I_{0.5}$ and the peak plate current, I_{max} , are used in the following formula to find peak value of the third-harmonic component of the plate current.

$Ih_3 = (2I_{0.5} - I_{max})/3$

In the example, where $I_{o\cdot i}$ is 0.097 ampere and I_{max} is 0.2 ampere, $I_{h3} = (2 \times 0.097 - 0.2)/3 = (0.194 - 0.2)/3 = -0.006/3 = -0.002$ ampere. (The fact that I_{h3} is negative indicates that the phase relation of the fundamental (first-harmonic) and third-harmonic components of the plate current is such as to result in a slightly peaked wave form. I_{h3} is positive in some cases, indicating a flattening of the wave form.)

The peak value of the fundamental or first-harmonic component of the plate current is found by the following formula:

$$h_1 = 2/3 \times (I_{max} + I_{0.5})$$

In the example, $I_{h1} = 2/3 \times (0.2 + 0.097) = 0.198$ ampere. Thus, the percentage of third-harmonic distortion is $(I_{h3}/I_{h1}) \times 100 = (0.002/0.198) \times 100 = 1$ per cent approx.

Class AB₂ Power Amplifiers

A class AB_2 amplifier employs two tubes connected in push-pull as in the case of class AB_1 amplifiers. It differs in that it is biased so that plate current flows for somewhat more than half the electrical cycle but less than the full cycle, the peak signal voltage is greater than the dc bias voltage, grid current is drawn, and consequently, power is consumed in the grid circuit. These conditions permit high power output to be obtained without excessive plate dissipation.

The sum of the power used in the grid circuit and the losses in the input transformer is the total driving power required by the grid circuit. The driver stage should be capable of a power output considerably larger than this required power in order that distortion introduced in the grid circuit be kept low. In addition, the internal impedance of the driver stage as reflected into or as effective in the grid circuit of the power stage should always be as low as possible in order that distortion may be kept low. The input transformer used in a class AB_2 stage usually has a step-down ratio adjusted for this condition.

Load resistance, plate dissipation, power output, and distortion determinations are similar to those for class AB₁. These quantities are interdependent with peak grid-voltage swing and driving power; a satisfactory set of operating conditions involves a series of approximations. The load resistance and signal swing are limited by the permissible grid current and power, and the distortion. If the load resistance is too high or the signal swing is excessive, the plate-dissipation rating will be exceeded, distortion will be high, and the driving power will be unnecessarily high.

Class B Power Amplifiers

A class B amplifier employs two tubes connected in push-pull, so biased that plate current is almost zero when no signal voltage is applied to the grids. Because of this low value of no-signal plate current, class B amplification has the same advantage as class AB_2 , *i.e.*, large power output can be obtained without excessive plate dissipation. Class B operation differs from class AB_2 in that plate current is cut off for a larger portion of the negative grid swing, and the signal swing is usually larger than in class AB_2 operation.

Because certain triodes used as class B amplifiers are designed to operate very close to zero bias, the grid of each tube is at a positive potential during all or most of the positive half-cycle of its signal swing. In this type of triode operation, considerable grid current is drawn and there is a loss of power in the grid circuit. This condition imposes the same requirement in the driver stage as in a class AB_2 stage; i.e., the driver should be capable of delivering considerably more power output than the power required for the grid circuit of the class B amplifier so that distortion will be low. Similarly, the interstage transformer between the driver and the class B stage usually has a step-down turns ratio. Because of the high dissipations involved in class B operation at zero bias, it is not

feasible to use tetrodes or pentodes in this type of class B operation.

Determination of load resistance, plate dissipation, power output, and distortion is similar to that for a class AB₁ stage.

Power amplifier tubes designed for class A operation can be used in class AB₁ and class B service under suitable operating conditions. There are several tube types designed especially for class B service. The characteristic common to all of these types is a high amplification factor. With a high amplification factor. plate current is small even when the grid bias is zero. These tubes, therefore, can be operated in class B service at a bias of zero volts so that no bias supply is required. A number of class B amplifier tubes consist of two triode units mounted in one tube. The two units can be connected in push-pull so that only one tube is required for a class B stage. An example of a twin triode used in class B service is the 6N7.

High-Fidelity Amplifiers

Several high-fidelity amplifiers are shown in the CIRCUITS SECTION. The performance capabilities of such amplifiers are usually given in terms of frequency response, total harmonic distortion, maximum power output, and noise level.

To provide high-fidelity reproduction of audio program material, an amplifier should have a frequency response which does not vary more than 1db over the entire audio spectrum. General practice is to design the amplifier so that its frequency response is flat within 1 db from a frequency below the lowest to be reproduced to one well above the upper limit of the audible region.

Harmonic distortion and intermodulation distortion produce changes in program material which may have adverse effects on the quality of the reproduced sound. Harmonic distortion causes a change in the character of an individual tone by the introduction of harmonics which were not originally present in the program material. For high-fidelity reproduction, total harmonic distortion (expressed as a percentage of the output power) should not be greater than about 1 per cent at the desired listening level. Types such as the 6973, 7027A and 7868 are designed to provide extremely low harmonic distortion in suitably designed push-pull amplifier circuits.

Intermodulation distortion is a change in the waveform of an individual tone as a result of interaction with another tone present at the same time in the program material. This type of distortion not only alters the character of the modulated tone, but may also result in the generation of spurious signals at frequencies equal to the sum and difference of the interacting frequencies. Intermodulation distortion should be less than 2 per cent at the desired listening level. In general, any amplifier which has low intermodulation distortion will have very low harmonic distortion.

The maximum power output which a high-fidelity amplifier should deliver depends upon a complex relation of several factors, including the size and acoustical characteristics of the listening area, the desired listening level, and the efficiency of the loudspeaker system. Practically, however, it is possible to determine amplifier requirements in terms of room size and loudspeaker efficiency.


The acoustic power required to reproduce the loudest passages of orchestral music at concert-hall level in the average-size living room is about 0.4 watt. Because high-fidelity loudspeakers of the type generally available for home use have an efficiency of only about 5 per cent, the output stage of the amplifier should therefore be able to deliver a power output of at least 8 watts. Because many wide-range loudspeaker systems, particularly those using frequencydivider networks, have efficiencies of less than 5 per cent, output tubes used with such systems must have correspondingly larger power outputs. The 6973, 7027A, 7189, and 7868 can provide ample output for most systems when used in suitable push-pull circuits.

The noise level of a high-fidelity amplifier determines the range of volume the amplifier is able to reproduce, i.e., the difference (usually expressed in decibels) between the loudest and softest sounds in program material. Because the greatest volume range utilized in electrical program material at the present time is about 60 db, the noise level of a high-fidelity amplifier should be at least 60 db below the signal level at the desired listening level.

Cathode-Drive Circuits

The preceding text has discussed the use of tubes in the conventional grid-drive type of amplifier—that is, where the cathode is common to both the input and output circuits. Tubes may also be employed as amplifiers in circuit arrangements which utilize the grid or plate as the common terminal. Probably the most important of these amplifiers are the cathode-drive circuit, which is discussed below, and the cathode-follower circuit, which will be discussed later in connection with inverse feedback.

A typical **cathode-drive** circuit is shown in Fig. 26. The load is placed in



the plate circuit and the output voltage is taken off between the plate and ground as in the grid-drive method of operation. The grid is grounded, and the input voltage is applied across an appropriate impedance in the cathode circuit. The cathode-drive circuit is particularly useful for vhf and uhf applications, in which it is necessary to obtain the low-noise performance usually associated with a triode, but where a conventional griddrive circuit would be unstable because of feedback through the grid-to-plate capacitance of the tube. In the cathodedrive circuit, the grounded grid serves as a capacitive shield between plate and cathode and permits stable operation at frequencies higher than those in which conventional circuits can be used.


The input impedance of a cathodedrive circuit is approximately equal to $1/g_m$ when the load resistance is small compared to the r_p of the tube. A certain amount of power is required, therefore, to drive such a circuit. However, in the type of service in which cathode-drive circuits are normally used, the advantages of the grounded-grid connection usually outweigh this disadvantage.

Inverse Feedback

An inverse-feedback circuit, sometimes called a degenerative circuit, is one in which a portion of the output voltage of a tube is applied to the input of the same or a preceding tube in opposite phase to the signal applied to the tube. Two important advantages of feedback are: (1) reduced distortion from each stage included in the feedback circuit and (2) reduction in the variations in gain due to changes in line voltage, possible differences between tubes of the same type, or variations in the values of circuit constants included in the feedback circuit.


Inverse feedback is used in audio amplifiers to reduce distortion in the output stage where the load impedance on the tube is a loudspeaker. Because the impedance of a loudspeaker is not constant for all audio frequencies, the load impedance on the output tube varies with frequency. When the output tube is a pentode or beam power tube having high plate resistance, this variation in plate load impedance can, if not corrected, produce considerable frequency distortion. Such frequency distortion can be reduced by means of inverse feedback. Inverse-feedback circuits are of the constant-voltage type and the constant-current type.

The application of the constantvoltage type of inverse feedback to a power output stage using a single beam power tube is illustrated by Fig. 27. In this circuit, R₁, R₂, and C are connected as a voltage divider across the output of



the tube. The secondary of the gridinput transformer is returned to a point on this voltage divider. Capacitor C blocks the dc plate voltage from the grid. However, a portion of the tube's af output voltage, approximately equal to the output voltage multiplied by the fraction $R_2/(R_1 + R_2)$, is applied to the grid. This voltage lowers the source impedance of the circuit and a decrease in distortion results which is explained in the curves of Fig. 28.

Consider first the amplifier without the use of inverse feedback. Suppose that when a signal voltage e_s is applied to the grid the af plate current i'_p has an irregularity in its positive half-cycle. This irregularity represents a departure from the waveform of the input signal and is, therefore, distortion. For this plate-current waveform, the af plate

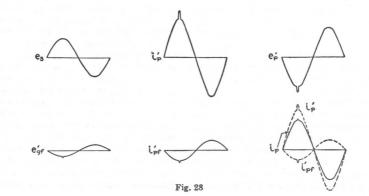

Electron Tube Applications

voltage has a waveform shown by e'_p . The plate-voltage waveform is inverted compared to the plate-current waveform because a plate-current increase produces an increase in the drop across the plate load. The voltage at the plate is the difference between the drop across the load and the supply voltage; thus, when plate current goes up, plate voltage goes down; when plate current goes down, plate voltage goes up.


Now suppose that inverse feedback is applied to the amplifier. The voltage fed back to the grid has the same waveform and phase as the plate voltage, but is smaller in magnitude. Hence, with a plate voltage of waveform shown by e'_{p} , the feedback voltage appearing on the grid is as shown by e'_{gf} . This voltage applied to the grid produces a component of plate current i'_{pf} . It is evident that the irregularity in the waveform of this component of plate current would act to cancel the original irregularity and thus reduce distortion.

After inverse feedback has been applied, the relations are as shown in the curve for i_p. The dotted curve shown by i'pf is the component of plate current due to the feedback voltage on the grid. The dotted curve shown by i'p is the component of plate current due to the signal voltage on the grid. The algebraic sum of these two components gives the resultant plate current shown by the solid curve of ip. Since i'p is the plate current that would flow without inverse feedback, it can be seen that the application of inverse feedback has reduced the irregularity in the output current. In this manner inverse feedback acts to correct any component of plate current that does not correspond to the input signal voltage, and thus reduces distortion.

From the curve for i_p , it can be seen that, besides reducing distortion, inverse feedback also reduces the amplitude of the output current. Consequently, when inverse feedback is applied to an amplifier there is a decrease in gain or power sensitivity as well as a decrease in distortion. Hence, the application of inverse feedback to an amplifier requires that more driving voltage be applied to obtain full power output, but this output is obtained with less distortion.

Inverse feedback may also be applied to resistance-coupled stages as shown in Fig. 29. The circuit is conventional except that a feedback resistor. R_3 , is connected between the plates of tubes T_1 and T_2 . The output signal voltage of T_1 and a portion of the output signal voltage of T_2 appears across R_2 . Because the distortion generated in the plate circuit of T₂ is applied to its grid out of phase with the input signal, the distortion in the output of T_2 is comparatively low. With sufficient inverse feedback of the constant-voltage type in a power-output stage, it is not necessary to employ a network of resistance and capacitance in the output circuit to reduce response at high audio frequencies. Inverse-feedback circuits can also be applied to push-pull class A and class AB₁ amplifiers.

Constant-current inverse feedback is usually obtained by omitting the bypass capacitor across a cathode resistor.




This method decreases the gain and the distortion but increases the source impedance of the circuit. Consequently, the output voltage rises at the resonant frequency of the loudspeaker and accentuates hangover effects.

Inverse feedback is not generally applied to a triode power amplifier, such as the 2A3, because the variation in speaker impedance with frequency does not produce much distortion in a triode stage having low plate resistance. It is sometimes applied in a pentode stage but is not always convenient. As has been shown, when inverse feedback is used in an amplifier, the driving voltage must be increased in order to give full power output. When inverse feedback is used with a pentode, the total driving voltage required for full power output may be inconveniently large, although still less than that required for a triode. Because a beam power tube gives full

power output on a comparatively small driving voltage, inverse feedback is especially applicable to beam power tubes. By means of inverse feedback, the high efficiency and high power output of beam power tubes can be combined with freedom from the effects of varying speaker impedance.

Cathode-Follower Circuits

Another important application of inverse feedback is in the cathode-follower circuit, an example of which is given in Fig. 30. In this application, the load has been transferred from the plate circuit to the cathode circuit of the tube.



The input voltage is applied between the grid and ground and the output voltage is obtained between the cathode and ground. The voltage amplification (V.A.) of this circuit is always less than unity and may be expressed by the following convenient formulas.

For a triode:

V. A. =
$$\frac{\mu \times R_L}{r_p + [R_L \times (\mu + 1)]}$$

For a pentode:

V. A. =
$$\frac{\text{gm} \times \text{R}_{\text{L}}}{1 + (\text{gm} \times \text{R}_{\text{L}})}$$

In these formulas, μ is the amplification factor, RL is the load resistance in ohms, r_p is the plate resistance in ohms, and g_m is the transconductance in mhos.

The use of the cathode follower permits the design of circuits which have high input resistance and high output voltage. The output impedance is quite low and very low distortion may be obtained. Cathode-follower circuits may be used for power amplifiers or as impedance transformers designed either to match a transmission line or to produce a relatively high output voltage at a low impedance level.

In a power amplifier which is transformer coupled to the load, the same output power can be obtained from the tube as would be obtained in a conventional grid-drive type of amplifier. The output impedance is very low and provides excellent damping to the load, with the result that very low distortion can be obtained. The peak-to-peak signal voltage, however, approaches $1\frac{1}{2}$ times the plate supply voltage if maximum power output is required from the tube. Some problems may be encountered, therefore, in the design of an adequate driver stage for a cathode-follower output system.

When a cathode-follower circuit is used as an impedance transformer, the load is usually a simple resistance in the cathode circuit of the tube. With relatively low values of cathode resistor, the circuit may be designed to supply significant amounts of power and to match the impedance of the device to a transmission line. With somewhat higher values of cathode resistor, the circuit may be used to lower the output impedance sufficiently to permit the transmission of audio signals along a line in which appreciable capacitance is present.

The cathode follower may also be used as an isolation device to provide extremely high input resistance and low input capacitance as might be required in the probe of an oscilloscope or vacuum-tube voltmeter. Such circuits can be designed to provide effective impedance transformation with no significant loss of voltage.

Selection of a suitable tube and its operating conditions for use in a cathode-follower circuit having a specified output impedance (Z_0) can be made, in most practical cases, by the use of the following formula to determine the approximate value of the required tube transconductance.

Required gm (μ mhos) = $\frac{1,000,000}{Z_0 \text{ (ohms)}}$

Once the required transconductance is obtained, a suitable tube and its operating conditions may be determined from the technical data given in the TUBE TYPES SECTION. The tube selected should have a value of transconductance slightly lower than that obtained from the above expression to allow for the shunting effect of the cathode load resistance. The conversion nomograph given in Fig. 23 may be used for calculation of operating conditions for values of transconductance not included in the tabulated data. After the operating conditions have been determined, the approximate value of the required cathode load resistance may be calculated from the following formulas. *For triode:*

Cathode R_L=
$$\frac{Z_0 \times r_p}{r_p - [Z_0 \times (1+\mu)]}$$


For pentode:

Cathode $R_L = \frac{Z_0}{1 - (gm \times Z_0)}$

Resistance and impedance values are in ohms; transconductance values are in mhos.

If the value of the cathode load resistance calculated to give the required output impedance does not give the required operating bias, the basic cathodefollower circuit can be modified in a number of ways. Two of the more common modifications are given in Figs. 31 and 32.

In Fig. 31 the bias is increased by adding a bypassed resistance between the cathode and the unbypassed load resistance and returning the grid to the low end of the load resistance. In Fig. 32 the bias is reduced by adding a bypassed resistance between the cathode and the unbypassed load resistance but, in this case, the grid is returned to the junction of the two cathode resistors so that the bias voltage is only the dc voltage drop across the added resistance. The size of




the bypass capacitor should be large enough so that it has negligible reactance at the lowest frequency to be handled. In both cases the B-supply should be increased to make up for the voltage taken for biasing.

Example: Select a suitable tube

and determine the operating conditions and circuit components for a cathodefollower circuit having an output impedance that will match a 500-ohm transmission line. **Procedure:** First, determine the approximate transconductance required.

Required gm = $\frac{1,000,000}{500}$ = 2000 µmhos

A survey of the tubes that have a transconductance in this order of magnitude shows that type 12AX7 is among



the tubes to be considered. Referring to the characteristics given in the technical data section for one triode unit of highmu twin triode 12AX7, we find that for a plate voltage of 250 volts and a bias of -2 volts, the transconductance is 1600 micromhos, the plate resistance is 62500 ohms, the amplification factor is 100, and the plate current is 0.0012 ampere. When these values are used in the expression for determining the cathode load resistance, we obtain

Cathode R_L=
$$\frac{500 \times 62500}{62500 - 500 \times (100 + 1)} = 2600$$
 ohms

The voltage across this resistor for a plate current of 0.0012 ampere is $2600 \times 0.0012 = 3.12$ volts. Because the required bias voltage is only -2 volts. the circuit arrangement given in Fig. 32 is employed. The bias is furnished by a resistance that will have a voltage drop of 2 volts when it carries a current of 0.0012 ampere. The required bias resistance, therefore, is 2/0.0012 = 1670ohms. If 60 cycles per second is the lowest frequency to be passed, 20 microfarads is a suitable value for the bypass capacitor. The B-supply, of course, is increased by the voltage drop across the cathode resistance which, in this example, is approximately 5 volts. The Bsupply, therefore, is 250 + 5 = 255 volts.

Because it is desirable to eliminate. if possible, the bias resistor and bypass capacitor, it is worthwhile to try other tubes and other operating conditions to obtain a value of cathode load resistance which will also provide the required bias. If the triode section of twin diodehigh-mu triode 6AT6 is operated under the conditions given in the technical data section with a plate voltage of 100 volts and a bias of -1 volt, it will have an amplification factor of 70, a plate resistance of 54000 ohms, a transconductance of 1300 micromhos, and a plate current of 0.0008 ampere. Then,

Cathode $R_L = \frac{500 \times 54000}{54000 - 500 \times (70 + 1)} = 1460$ ohms

The bias voltage obtained across this resistance is $1460 \times 0.0008 = 1.17$ volts. Since this value is for all practical purposes close enough to the required bias, no additional bias resistance will be required and the grid may be returned directly to ground. There is no need to adjust the B-supply voltage to make up for the drop in the cathode resistor. The voltage amplification (V.A.) for the cathode-follower circuit utilizing the triode section of type 6AT6 is

V.A. =
$$\frac{70 \times 1460}{54000 + 1460 \times (70 + 1)} = 0.65$$

For applications in which the cathode follower is used to isolate two circuits-for example, when it is used between a circuit being tested and the input stage of an oscilloscope or a vacuum-tube voltmeter-voltage output and not impedance matching is the primary consideration. In such applications it is desirable to use a relatively high value of cathode load resistance, such as 50,000 ohms, in order to get the maximum voltage output. In order to obtain proper bias, a circuit such as that of Fig. 32 should be used. With a high value of cathode resistance, the voltage amplification will approximate unity.

Corrective Filters

A corrective filter can be used to improve the frequency characteristic of an output stage using a beam power tube or a pentode when inverse feedback is not applicable. The filter consists of a resistor and a capacitor connected in series across the primary of the output transformer. Connected in this way, the filter is in parallel with the plate load impedance reflected from the voice-coil by the output transformer. The magnitude of this reflected impedance increases with increasing frequency in the middle and upper audio range. The impedance of the filter, however, decreases with increasing frequency. It follows that by use of the proper values for the resistance and the capacitance in the filter. the effective load impedance on the output tubes can be made practically constant for all frequencies in the middle and upper audio range. The result is an improvement in the frequency characteristic of the output stage.

The resistance to be used in the filter for a push-pull stage is 1.3 times the recommended plate-to-plate load resistance; or, for a single-tube stage, is 1.3 times the recommended plate load resistance. The capacitance in the filter should have a value such that the voltage gain of the output stage at a frequency of 1000 cycles or higher is equal to the voltage gain at 400 cycles.


A method of determining the proper value of capacitance for the filter is to make two measurements of the output voltage across the primary of the output transformer: first, when a 400-cycle signal is applied to the input, and second, when a 1000-cycle signal of the same voltage as the 400-cycle signal is applied to the input. The correct value of capacitance is the one which gives equal output voltages for the two signal inputs. In practice, this value is usually found to be in the order of 0.05 microfarad.

Volume Compressors and Expanders

Volume compression and expansion are used in FM transmitters and receivers and in recording devices and amplifiers to make more natural the reproduction of music which has a very large volume range. For example, in the music of a symphony orchestra the sound intensity of the soft passages is very much lower than that of the loud passages. When this low volume level is raised above the background noise for transmitting or recording, the peak level of the program material may be raised to an excessively high volume level. It is often necessary, therefore, to compress the volume range of the program content within the maximum capabilities of the FM transmitter or the recording device. Exceeding a maximum peak volume level for FM modulation corresponds to exceeding the allowed bandwidth for transmission. In some recording devices, excessive peak volume levels may cause overloading and distortion.

Volume compression may be accomplished by either manual or automatic control. The types of compression used include peak limiters, volume limiters, and volume compressors. A peak limiter limits the peak power to some predetermined level. A volume limiter provides gain reduction based on an average signal level above a predetermined level. A volume compressor provides gain reduction for only the sustained loud portions of the sound level. Only volume compressors can be correctly compensated for with volume expanders.

For faithful reproduction of the original sound, the volume expander used in the FM receiver or audio amplifier should have the reverse characteristic of the volume compressor used in the FM transmitter or recording device. In general, the basic requirements for either a volume compressor or expander are shown in the block diagram of Fig. 33.



In a volume compressor, the variablegain amplifier V_1 has greater gain for a low-amplitude signal than for a highamplitude signal; therefore, soft passages are amplified more than loud ones. In an expander, the gain is greater for highamplitude signals than for low-amplitude signals; therefore, loud passages are amplified more than soft ones and the original amplitude ratio is restored.

In the diagram shown in Fig. 33, the

signal to be amplified is applied to V_1 , and a portion of the signal is also applied to V_2 . The amplified output from V_2 is then rectified by V_3 , and applied as a negative (for compressors) or positive (for expanders) bias voltage to V_1 . As this bias voltage varies with variations in signal amplitude, the gain of V_1 also varies to produce the desired compression or expansion of the signal.

Tubes having a large dynamic range provide the best results in volume compressor or expander applications. Examples of such types are the 6BJ6 and 6BE6. Push-pull operation is generally desired for the variable-gain amplifier to prevent high distortion and other undesirable effects which may occur in volume compressors and expanders.

Phase Inverters

A phase inverter is a circuit used to provide resistance coupling between the output of a signal-tube stage and the input of a push-pull stage. The necessity for a phase inverter arises because the signal-voltage inputs to the grids of a push-pull stage must be 180 degrees out of phase and approximately equal in amplitude with respect to each other. Thus, when the signal voltage input to a push-pull stage swings the grid of one tube in a positive direction, it should swing the grid of the other tube in a negative direction by a similar amount. With transformer coupling between stages, the out-of-phase input voltage to the push-pull stage is supplied by means of the center-tapped secondary. With resistance coupling, the out-of-phase input voltage is obtained by means of the inverter action of a tube.




Fig. 34 shows a push-pull power amplifier, resistance-coupled by means

of a phase-inverter circuit to a singlestage triode T_1 . Phase inversion in this circuit is provided by triode T_2 . The output voltage of T_1 is applied to the grid of triode T_3 . A portion of the output voltage of T_1 is also applied through the resistors R_3 and R_5 to the grid of T_2 . The output voltage of T_2 is applied to the grid of triode T_4 .


When the output voltage of T_1 swings in the positive direction, the plate current of T_2 increases. This action increases the voltage drop across the plate resistor R_2 and swings the plate of T_2 in the negative direction. Thus, when the output voltage of T_1 swings positive, the output voltage of T_2 swings negative and is, therefore, 180° out of phase with the output voltage of T_1 .

In order to obtain equal voltages at E_a and E_b , $(R_3+R_5)/R_5$ should equal the voltage gain of T₂. Under the conditions where a twin-type tube or two tubes having the same characteristics are used at T_1 and T_2 , R_4 should be equal to the sum of R_3 and R_5 . The ratio of R_3+R_5 to R_5 should be the same as the voltage gain ratio of T_2 in order to apply the correct value of signal voltage to T_2 . The value of R₅ is, therefore, equal to R₄ divided by the voltage gain of T_2 ; R_3 is equal to R_4 minus R_5 . Values of R_1 , R_2 , R_3 plus R_5 , and R_4 may be taken from the chart in the RESISTANCE-COU-PLED AMPLIFIER SECTION. In the practical application of this circuit, it is convenient to use a twin-triode tube combining T_1 and T_2 .


Tone Controls

A tone control is a variable filter (or one in which at least one element is adjustable) by means of which the user may vary the frequency response of an amplifier to suit his own taste. In radio receivers and home amplifiers, the tone control usually consists of a resistancecapacitance network in which the resistance is the variable element.


The simplest form of tone control is a fixed tone-compensating or "equalizing" network such as that shown in Fig. 35. This type of network is often used to equalize the low- and high-frequency response of a crystal phonograph pickup. At low frequencies the attenuation of this network is 20.8 db. As the frequency is increased, the 100-micromicrofarad capacitor serves as a bypass for the 5-megohm resistor, and the combined impedance of the resistor-capacitor network is lowered. Thus, more



of the crystal output appears across the 0.5-megohm resistor at high frequencies than at low frequencies, and the frequency response at the grid is reasonably flat over a wide frequency range. Fig. 36 shows a comparison between the output of the crystal (curve A) and the output of the equalizing network (curve B). Theresponse curve can be "flattened" still more if the attenuation at low frequencies is increased by changing the 0.5-megohm resistor to 0.125 megohm.



The tone-control network shown in Fig. 37 has two stages with completely separate bass and treble controls. Fig. 38 shows simplified representations of the bass control of this circuit when the potentiometer is turned to its extreme variations (usually labeled "Boost" and "Cut"). In this network, as in the crystalequalizing network shown in Fig. 35, the parallel RC combination is the controlling factor. For bass "boost", the capacitor C₂ bypasses resistor R₃ so that less impedance is placed across the output to grid B at high frequencies than at low frequencies. For bass "cut." the parallel combination is shifted so that C₁ bypasses R₃, causing more high-frequency than low-frequency output. Essentially, the network is a variable-frequency voltage divider. With proper Electron Tube Applications

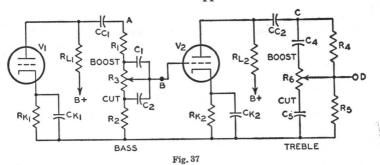

values for the components, it may be made to respond to changes in the R_8 potentiometer setting for only low frequencies (below 1000 cycles).





Fig. 39 shows extreme positions of the treble control. The attenuation of the two circuits is approximately the same at 1000 cycles. The treble "boost" circuit is similar to the crystal-equalizing network shown in Fig. 35. In the treble "cut" circuit, the parallel RC elements serve to attenuate the signal voltage further because the capacitor bypasses the resistance across the output.



The effect of the capacitor is negligible at low frequencies; beyond 1000 cycles, the signal voltage is attenuated at a maximum rate of 6 db per octave.

The location of a tone-control network is of considerable importance. In a typical radio receiver, it may be inserted

in the plate circuit of the power tube, the coupling circuit between the first af amplifier tube and the power tube, or the grid circuit of the first tube. In an amplifier using a beam power tube or pentode power amplifier without negative feedback, it is desirable to connect a resistance-capacitance filter across the primary of the output transformer. This filter may be fixed, with a supplementary tone control elsewhere, or it may form the tone control itself. If the amplifier incorporates negative feedback, the tone control may be inserted in the feedback network or else should be connected to a part of the amplifier which is external to the feedback loop. The over-all gain of a well designed tone-control network should be approximately unity.

Phonograph and Tape Preamplifiers

The frequency range and dynamic rangewhich can be recorded on a phonograph record or on magnetic tape depend on several factors, including the composition, mechanical characteristics, and speed of the record or tape, and the electrical and mechanical characteristics of the recording equipment. To achieve wide frequency and dynamic ranges, manufacturers of commercial recordings use equipment which introduces a nonuniform relationship between amplitude and frequency. This relationship is known as a "recording characteristic." To assure proper reproduction of a highfidelity recording, therefore, some part of the reproducing system must have a frequency-response characteristic which is the inverse of the recording characteristic. Most manufacturers of high-fidelity recordings use the RCA "New Orthophonic" (RIAA) characteristic for discs and the NARTB characteristic for magnetic tape.

Some typical preamplifier stages are shown in the CIRCUITS SECTION. The location of the frequency-compensating network or "equalizer" in the reproducing system will depend on the types of recordings which are to be reproduced and on the pickup devices used.

A ceramic high-fidelity phonograph pickup is usually designed to provide proper compensation for the RIAA recording characteristic when the pickup is operated into the load resistance specified by its manufacturer. Because this type of pickup also has relatively high output (0.5 to 1.5 volts), it does not require the use of either an equalizer network or a preamplifier, and can be connected directly to the input of a tonecontrol amplifier and/or power amplifier.

A magnetic high-fidelity phonograph pickup, on the other hand, usually has an essentially flat frequency-response characteristic and very low output (1 to 10 millivolts). Because a pickup of this type merely reproduces the recording characteristic, it must be followed by an equalizer network, as well as by a preamplifier having sufficient voltage gain to provide the input voltage required by the tone-control amplifier and/or power amplifier. Many designs include both the equalizing and amplifying circuits in a single unit.

A high-fidelity magnetic-tape pickup head, like a magnetic phonograph pickup, reproduces the recording characteristic and has an output of only a few millivolts. This type of pickup device, therefore, must also be followed by an equalizing network and preamplifier, or by a preamplifier which provides "built-in" equalization for the NARTB characteristic.

Limiters

An amplifier may also be used as a limiter. One use of a limiter is in receivers designed for the reception of frequency-modulated signals. The limiter in FM receivers has the function of eliminating amplitude variations from the input to the detector. Because in an FM system amplitude variations are primarily the result of noise disturbances, the use of a limiter prevents such disturbances from being reproduced in the audio output. The limiter usually follows the last if stage so that it can minimize the effects of disturbances coming in on the rf carrier and those produced locally.

The limiter is essentially an if voltage amplifier designed for saturated operation. Saturated operation means that an increase in signal voltage above a certain value produces very little increase in plate current. A signal voltage which is never less than sufficient to cause saturation of the limiter, even on weak signals, is supplied to the limiter input by the preceding stages. Any change in amplitude, therefore, such as might be produced by noise voltage fluctuation, is not reproduced in the limiter output. The limiting action, of course, does not interfere with the reproduction of frequency variations.

Plate-current saturation of the limiter may be obtained by the use of grid-No.1-resistor-and-capacitor bias with plate and grid-No.2 voltages which are low compared with customary if-amplifier operating conditions.

As a result of these design features, the limiter is able to maintain its output voltage at a constant amplitude over a wide range of input-signal voltage variations. The output of the limiter is frequency-modulated if voltage, the mean frequency of which is that of the if amplifier. This voltage is impressed on the input of the detector.

The reception of FM signals without serious distortion requires that the response of the receiver be such that satisfactory amplification of the signal is provided over the entire range of frequency deviation from the mean frequency. Since the frequency at any instant depends on the modulation at that instant, it follows that excessive attenuation toward the edges of the band, in the rf or if stages, will cause distortion. In a high-fidelity receiver, therefore, the amplifiers must be capable of amplifying, for the maximum permissible frequency deviation of 75 kilocycles, a band 150 kilocycles wide. Suitable tubes for this purpose are the 6BA6 and 6BJ6.

Television RF Amplifiers

In a radio or television receiver, noise generated in the first amplifier stage is often the controlling factor in determining the over-all sensitivity of the receiver. The "front end" of a receiver, therefore, is designed with special attention to both gain and noise characteristics.

The input circuit of an amplifier inherently contains some thermal noise contributed by the resistive elements in the input device. When an input signal is amplified, therefore, the thermal noise generated in the input circuit is also amplified. If the ratio of signal power to noise power (signal-to-noise ratio, S/N) is the same in the output circuit as in the input circuit, the amplifier is considered to be "noiseless" and is said to have a noise figure of unity, or zero db.

In practical circuits, however, all amplifier stages generate a certain amount of noise as a result of thermal agitation of electrons in resistors and other components, minute variations in the cathode emission of tubes (shot effect), and minute grid currents in the amplifier tubes. As a result, the ratio of signal power to noise power is inevitably impaired during amplification. A measure of the degree of impairment is called the noise figure (NF) of the amplifier. and is expressed as the ratio of signal power to noise power at the input (S_i/N_i) divided by the ratio of signal power to noise power at the output (S_0/N_0) , as follows:

$$NF = \frac{(Si/Ni)}{(So/So)}$$

The noise figure in db is equal to ten times the logarithm of this power ratio. For example, an amplifier having a one-db noise figure decreases the signalto-noise ratio by a factor of 1.26, a 3-db noise figure by a factor of 2, a 10-db noise figure by a factor of 10, and a 20-db noise figure by a factor of 100.

Tuner input circuits of vhf television receivers use either a triode or a pentode in the rf amplifier stage. Such stages are required to amplify signals ranging from 55 to 216 Mc and having a bandwidth of 4.5 Mc, although the tuner is usually aligned for a bandwidth of 6 Mc to assure complete coverage of the band. In the early rf tuners, pentodes rather than triodes were used because the grid-plate capacitance of triodes created stability problems. The use of twin triodes in direct-coupled cathode-drive circuits makes it possible to obtain stable operation along with the low-noise characteristics of triodes.

Pentodes or tetrodes do not provide the sensitivity of triodes because of the "partition noise" introduced by the screen grid. The direct-coupled cathodedrive circuit provides both the gain and the stability capabilities of the pentode and a low-noise triode input stage. Because the cathode-drive stage provides a low-impedance load to the groundedcathode stage, its gain is very low and there is no necessity for neutralizing the grid-plate capacitance. An interstage impedance, usually an inductance in series with the plate of the first stage and the cathode of the second stage, is often used at higher frequencies to provide a degree of impedance matching between the units. The cathode-drive portion of the circuit is matched to the input network and provides most of the stage gain. Because the feedback path of the cathode-drive circuit is the platecathode capacitance, which in most cases is very small, excellent isolation is provided between the antenna and the local oscillator.

Development of single triodes having low grid-plate capacitance has made possible the design of a neutralized triode rf circuit. The 6BN4 has been used commercially in neutralized triode circuits. Tubes such as the 6GK5 and 6CW4. now in common usage, were specially designed to minimize grid-plate capacitance to permit easier neutralization of a grounded-cathode circuit over the wide frequency band. The bridge-neutralized rf amplifier circuit has become widely used in television tuners. In this arrangement, a portion of the output signal is returned to the grid out of phase with the feedback signal from the grid-plate capacitance. This circuit provides excellent gain and noise performance with stable operation across the band.


Video Amplifiers

The video amplifier stage in a television receiver usually employs a pentode-type tube specially designed to amplify the wide band of frequencies contained in the video signal and, at the same time, to provide high gain per stage. Pentodes are more useful than triodes in such stages because they have high transconductance (to provide high gain) together with low input and output interelectrode capacitances (to permit the broadband requirements to be satisfied). An approximate "figure of merit" for a particular tube for this application can be determined from the ratio of its transconductance, gm, to the sum of its input and output capacitances, C_{in} and C_{out}, as follows:

Figure of Merit =
$$\frac{gm}{Cin + Cout}$$


Typical values for this figure are in the order of 500×10^6 or greater.

A typical video amplifier stage, such as that shown in Fig. 40, is connected between the second detector of the television receiver and the picture



tube. The contrast control, R₁, in this circuit controls the gain of the video amplifier tube. The inductance, L_2 , in series with the load resistor, R_L, maintains the plate load impedance at a relatively constant value with increasing frequency. The inductance L₁ isolates the output capacitance of the tube so that only stray capacitance is placed across the load. As a result, a highervalue load resistor is used to provide higher gain without affecting frequency response or phase relations. The decoupling circuit, C_1R_2 , is used to improve the low-frequency response. Tubes used as video amplifiers include types 6CL6 and 12BY7A, or the pentode sections of types 6AW8A and 6AN8.

The luminance amplifier in a colortelevision receiver is a conventional video amplifier having a bandwidth of approximately 3.5 Mc. In a color receiver, the portion of the output of the second detector which lies within the frequency band from approximately 2.4 to 4.5 Mc is fed to a bandpass amplifier, as shown in the block diagram in Fig. 41. The color



synchronizing signal, or "burst," contained in this signal may then be fed to a "burst-keyer" tube. At the same time, a delayed horizontal pulse may be applied to the keyer tube. The output of the keyer tube is applied to the burst amplifier tube and the signal is then fed to the 3.58-Mc oscillator and to the "color-killer" stage.

The color killer applies a bias voltage to the bandpass amplifier in the absence of burst so that the color section, or chrominance channel, of the receiver remains inoperative during black-andwhite broadcasts. A threshold control varies the bias and controls the burst level at which the killer stage operates.


The output of the 3.58-Mc oscillator and the output of the bandpass amplifier are fed into phase and amplitude demodulator circuits. The output of each demodulator circuit is an electrical representation of a color-difference signal, *i.e.*, an actual color signal minus the black-and-white, or luminance, signal. The two color-difference signals are combined to produce the third colordifference signal; each of the three signals then represents one of the primary colors.

The three color-difference signals are usually applied to the grids of the three electron guns of the color picture tube, in which case the black-and-white signal from the luminance amplifier may be applied simultaneously to the cathodes. The chrominance and luminance signals then combine to produce the color picture. In the absence of transmitted color information, the chrominance channel is cut off by the color killer, as described above, and only the luminance signal is applied to the picture tube, producing a black-and-white picture.

Television Sync Circuits

In addition to picture information, the composite video signal supplied to a television receiver contains information to assure that the picture produced on the receiver is synchronized with the picture being viewed by the camera or pickup tube. The "sync" pulses, which have a greater amplitude than the video signal, trigger the scanning generators of the receiver when the electron beam of the pickup tube ends each trace.


The sync pulses in the composite video signal may be separated from the video information in the output of the second or video detector by means of the triode circuit shown in Fig. 42. In this circuit, the time constant of the network



 R_1C_1 is long with respect to the interval between pulses. During each pulse, the grid is driven positive and draws current, thereby charging capacitor C_1 . Consequently, the grid develops a bias which is slightly greater than the cutoff voltage of the tube. Because plate current flows only during the sync-pulse period, only the amplified pulse appears in the output. This sync-separator stage discriminates against the video information. Because the bias developed on the grid is proportional to the strength of the incoming signal, the circuit also has the advantage of being relatively independent of signal fluctuations.

Because the electron beam scans the face of the picture tube at different rates in the vertical and horizontal directions, the receiver incorporates two different scanning generators. The repetition rate of the vertical generator is 60 cycles per second, and the rate of the horizontal generator is approximately 15,750 cycles per second. The composite video signal includes information which enables each generator to derive its correct triggering. One horizontal sync pulse is supplied at the end of each horizontal line scan. At the end of each frame, several pulses of longer duration than the horizontal sync pulses are supplied to actuate the vertical generator. The vertical information is separated from the horizontal information by differentiating and integrating circuits.

In fringe areas, two conditions complicate the process of sync separation. First, the incoming signal available at the antenna is weak and susceptible to fading and other variations; second, the receiver is operating at or near maximum gain which makes it extremely susceptible to interference from pulse-type noise generated by certain types of electrical equipment, ignition systems, switches, or the like. Some type of noiseimmunity provision is almost essential for acceptable performance. Noise may be reduced or eliminated from the sync and agc circuits by gating or by a combination of gating, inversion, and cancellation. An example, of the latter method is shown in Fig. 43. In this circuit the 6GY6, which has two independent control grids, serves the dual function of agc amplifier and noise inverter.




Because the sync tips of the video signal at grid No.1 of the 6GY6 drive the tube near its cutoff region, any noise signal extending above the tip level will appear inverted across the grid-No.2 load resistor R. This inverted noise signal is re-combined with the video signal and fed to the sync separator at point "A" Fig. 43 where noise cancellation takes place. This process leaves the sync pulses relatively free of disturbing noise and results in a stable picture. To prevent reduction of receiver gain due to the effect of noise on the agc amplifier, a portion of the inverted noise signal is fed to the second control grid, grid No.3, of the 6GY6 to cut off or gate the AGC amplifier when a noise pulse occurs.


Rectification

The rectifying action of a diode finds important applications in supplying a receiver with dc power from an ac line and in supplying high dc voltage from a high-voltage pulse. A typical arrangement for converting act to dc includes a rectifier tube, a filter, and a voltage divider. The rectifying action of the tube is explained briefly under *Diodes*, in the ELECTRONS, ELEC-TRODES, AND ELECTRON TUBE SECTION. High-voltage pulse rectification is described later under *Horizontal Output Circuits*.

The function of a filter is to smooth out the ripple of the tube output, as indicated in Fig. 44, and to increase rectifier efficiency. The action of the filter is



explained in ELECTRON TUBE IN-STALLATION SECTION under *Filters*. The voltage divider is used to cut down the output voltage to the values required by the plates and the other electrodes of the tubes in the receiver. A half-wave rectifier and a fullwave rectifier circuit are shown in Fig. 45. In the half-wave circuit, current flows through the rectifier tube to the filter on every other half-cycle of the ac input voltage when the plate is positive with respect to the cathode. In the fullwave circuit, current flows to the filter on every half-cycle, through plate No. 1 on one half-cycle when plate No. 1 is

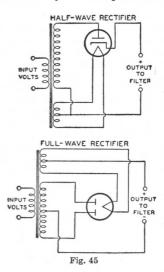

positive with respect to the cathode, and through plate No. 2 on the next halfcycle when plate No. 2 is positive with respect to the cathode.


Because the current flow to the filter is more uniform in the full-wave circuit than in the half-wave circuit, the output of the full-wave circuit requires less filtering. Rectifier operating information and circuits are given under each rectifier tube type and in the CIRCUIT SECTION, respectively.

Parallel operation of rectifier tubes furnishes an output current greater than that obtainable with the use of one tube. For example, when two full-wave rectifier tubes are connected in parallel, the plates of each tube are connected together and each tube acts as a half-wave rectifier. The allowable voltage and load conditions per tube are the same as for full-wave service but the total loadhandling capability of the complete rectifier is approximately doubled.

Electron Tube Applications


When mercury-vapor rectifier tubes are connected in parallel, a stabilizing resistor of 50 to 100 ohms should be connected in series with each plate lead in order that each tube will carry an equal share of the load. The value of the resistor to be used will depend on the amount of plate current that passes through the rectifier. Low plate current requires a high value; high plate current, a low value. When the plates of mercury-vapor rectifier tubes are connected in parallel, the corresponding filament leads should be similarly connected. Otherwise, the tube drops will be considerably unbalanced and larger stabilizing resistors will be required.

Two or more vacuum rectifier tubes can also be connected in parallel to give correspondingly higher output current and, as a result of paralleling their internal resistances, give somewhat increased voltage output. With vacuum types, stabilizing resistors may or may not be necessary depending on the tube type and the circuit.



A voltage-doubler circuit of simple form is shown in Fig. 46. The circuit derives its name from the fact that its dc voltage output can be as high as twice the peak value of ac input. Basically, a voltage doubler is a rectifier circuit arranged so that the output voltages of two half-wave rectifiers are in series.

The action of a voltage doubler can be described briefly as follows. On the






positive half-cycle of the ac input, that is, when the upper side of the ac input line is positive with respect to the lower side, the upper diode passes current and feeds a positive charge into the upper capacitor. As positive charge accumulates on the upper plate of the capacitor, a positive voltage builds up across the capacitor. On the next half-cycle of the ac input, when the upper side of the line is negative with respect to the lower side, the lower diode passes current so that a negative voltage builds up across the lower capacitor.

So long as no current is drawn at the output terminals from the capacitor, each capacitor can charge up to a voltage of magnitude E, the peak value of the ac input. It can be seen from the diagram that with a voltage of +E on one capacitor and -E on the other, the total voltage across the capacitors is 2E. Thus the voltage doubler supplies a noload dc output voltage twice as large as the peak ac input voltage. When current is drawn at the output terminals by the load, the output voltage drops below 2E by an amount that depends on the magnitude of the load current and the capacitance of the capacitors. The arrangement shown in Fig. 46 is called a fullwave voltage doubler because each rectifier passes current to the load on each half of the ac input cycle.

Two rectifier types especially designed for use as voltage doublers are the 25Z6GT and 117Z6GT. These tubes combine two separate diodes in one tube. As voltage doublers, the tubes are used in "transformerless" receivers. In these receivers, the heaters of all tubes in the set are connected in series with a voltage-dropping resistor across the line. The connections for the heater supply and the voltage-doubling circuit are shown in Fig. 47.






With the full-wave voltage-doubler circuit in Fig. 47, it will be noted that the dc load circuit can not be connected to ground or to one side of the ac supply line. This circuit presents certain disadvantages when the heaters of all the

AM Detection

The effect of amplitude modulation on the waveform of the rf wave is shown in Fig. 48. There are three different basic circuits used for the detection of amplitude-modulated waves: the di-

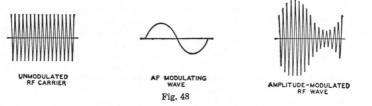

tubes in the set are connected in series with a resistance across the ac line. Such a circuit arrangement may cause hum because of the high ac potential between the heaters and cathodes of the tubes.


The half-wave voltage-doubler circuit in Fig. 47 overcomes this difficulty by making one side of the ac line common with the negative side of the dc load circuit. In this circuit, one half of the tube is used to charge a capacitor which, on the following half cycle, discharges in series with the line voltage through the other half of the tube. This circuit is called a half-wave voltage doubler because rectified current flows to the load only on alternate halves of the ac input cycle. The voltage regulation of this arrangement is somewhat poorer than that of the full-wave voltage doubler.

Detection

When speech, music, or video information is transmitted from a radio or television station, the station radiates a radio-frequency (rf) wave which is of either of two general types. In one type, the wave is said to be amplitude modulated when its frequency remains constant and the amplitude is varied. In the other type, the wave is said to be frequency modulated when its amplitude remains essentially constant but its frequency is varied.

The function of the receiver is to reproduce the original modulating wave from the modulated rf wave. The receiver stage in which this function is performed is called the demodulator or detector stage. ode detector, the grid-bias detector, and the grid-resistor detector. These circuits are alike in that they eliminate, either partially or completely, alternate halfcycles of the rf wave. With alternate half-cycles removed, the audio variations of the other half-cycles can be amplified to drive headphones or a loudspeaker.

A diode-detector circuit is shown in Fig. 49. The action of this circuit



when a modulated rf wave is applied is illustrated by Fig. 50. The rf voltage applied to the circuit is shown in light line; the output voltage across capacitor C is shown in heavy line.



Between points (a) and (b) on the first positive half-cycle of the applied rf voltage, capacitor C charges up to the peak value of the rf voltage. Then as the applied rf voltage falls away from its peak value, the capacitor holds the cathode at a potential more positive than the voltage applied to the anode. The capacitor thus temporarily cuts off current through the diode. While the diode current is cut off, the capacitor discharges from (b) to (c) through the diode load resistor R.


When the rf voltage on the anode rises high enough to exceed the potential at which the capacitor holds the cathode, current flows again and the capacitor charges up to the peak value of the second positive half-cycle at (d). In this way, the voltage across the capacitor follows the peak value of the applied rf voltage and reproduces the af modulation.

The curve for voltage across the capacitor, as drawn in Fig. 50, is somewhat jagged. However, this jaggedness, which represents an rf component in the voltage across the capacitor, is exaggerated in the drawing. In an actual circuit the rf component of the voltage across the capacitor is negligible. Hence, when the voltage across the capacitor is amplified, the output of the amplifier reproduces the speech or music originating at the transmitting station.

Another way to describe the action of a diode detector is to consider the circuit as a half-wave rectifier. When the rf signal on the plate swings positive, the tube conducts and the rectified current flows through the load resistance R. Because the dc output voltage of a rectifier depends on the voltage of the ac input, the dc voltage across C varies in accordance with the amplitude of the rf carrier and thus reproduces the af signal. Capacitor C should be large enough to smooth out rf or if variations but should not be so large as to affect the audio variations. Two diodes can be connected in a circuit similar to a full-wave rectifier to give full-wave detection. However, in practice, the advantages of this connection generally do not justify the extra circuit complication.

The diode method of detection produces less distortion than other methods because the dynamic characteristics of a diode can be made more linear than those of other detectors. The disadvantages of a diode are that it does not amplify the signal, and that it draws current from the input circuit and therefore reduces the selectivity of the input circuit. However, because the diode method of detection produces less distortion and because it permits the use of simple avc circuits without the necessity for an additional voltage supply, the diode method of detection is most widely used in broadcast receivers.


A typical diode-detector circuit using a twin-diode triode tube is shown in Fig. 51. Both diodes are connected together. R_1 is the diode load resistor. A portion of the af voltage developed across this resistor is applied to the triode grid through the volume control R_3 . In a typical circuit, resistor R_1 may be tapped



so that five-sixths of the total af voltage across R_1 is applied to the volume control. This tapped connection reduces the af voltage output of the detector circuit slightly but it reduces audio distortion and improves the rf filtering.

DC bias for the triode section is provided by the cathode-bias resistor R_2 and the audio bypass capacitor C_3 . The function of capacitor C_2 is to block the dc bias of the cathode from the grid. The function of capacitor C_4 is to bypass and rf voltage on the grid to cathode. A twin-diode pentode may also be used in this circuit. With a pentode, the af output should be resistance-coupled rather than transformer-coupled.

Another diode-detector circuit, called a diode-biased circuit, is shown in Fig. 52. In this circuit, the triode grid is



connected directly to a tap on the diode load resistor. When an rf signal voltage is applied to the diode, the dc voltage at the tap supplies bias to the triode grid. When the rf signal is modulated, the af voltage at the tap is applied to the grid and is amplified by the triode.


The advantage of the circuit shown in Fig. 52 over the self-biased arrangement shown in Fig. 51 is that the diodebiased circuit does not employ a capacitor between the grid and the diode load resistor, and consequently does not produce as much distortion of a signal having a high percentage of modulation.

However, there are restrictions on the use of the diode-biased circuit. Because the bias voltage on the triode depends on the average amplitude of the rf voltage applied to the diode, the average amplitude of the voltage applied to the diode should be constant for all values of signal strength at the antenna. Otherwise there will be different values of bias on the triode grid for different signal strengths and the triode will produce distortion. Because there is no bias applied to the diode-biased triode when no rf voltage is applied to the diode. sufficient resistance should be included in the plate circuit of the triode to limit its zero-bias plate current to a safe value.

These restrictions mean, in practice, that the receiver should have a separatechannel automatic-volume-control (avc) system. With such an avc system, the average amplitude of the signal voltage applied to the diode can be held within very close limits for all values of signal strength at the antenna.


The tube used in a diode-biased circuit should be one which operates at a fairly large value of bias voltage. The variations in bias voltage are then a small percentage of the total bias and hence produce small distortion. Tubes taking a fairly large bias voltage are types such as the 6BF6 or 6SR7 having a medium-mu triode. Tube types having a high-mu triode or a pentode should not be used in a diode-biased circuit.

A grid-bias detector circuit is shown in Fig. 53. In this circuit, the grid is biased almost to cutoff, *i.e.*, operated so that the plate current with zero signal is practically zero. The bias voltage can be obtained from a cathode-bias resistor, a C-battery, or a bleeder tap. Because of the high negative bias, only the positive half-cycles of the rf signal are amplified by the tube. The signal is, therefore, detected in the plate circuit. The advantages of this method of detection are that it amplifies the signal, besides detecting it, and that it does not draw



current from the input circuit and therefore does not lower the selectivity of the input circuit.

The grid - resistor - and - capacitor method, illustrated by Fig. 54, is somewhat more sensitive than the grid-bias method and gives its best results on weak signals. In this circuit, there is no negative dc bias voltage applied to the grid. Hence, on the positive half-cycles of the rf signal, current flows from grid to cathode. The grid and cathode thus act as a diode detector, with the grid resistor as the diode load resistor and the grid capacitor as the rf bypass capacitor. The voltage across the capacitor then reproduces the af modulation in the same manner as has been explained for the diode detector. This voltage appears between the grid and cathode and is therefore amplified in the plate circuit.




The output voltage thus reproduces the original af signal.

In this detector circuit, the use of a high-resistance grid resistor increases selectivity and sensitivity. However, improved af response and stability are obtained with lower values of grid-circuit resistance. This detector circuit amplifies the signal, but draws current from the input circuit and therefore lowers the selectivity of the input circuit.

FM Detection


The effect of frequency modulation on the waveform of the rf wave is shown in Fig. 55. In this type of transmission,




the frequency of the rf wave deviates from a mean value, at an rf rate depending on the modulation, by an amount that is determined in the transmitter and is proportional to the amplitude of the af modulation signal.

For this type of modulation, a detector is required to discriminate between deviations above and below the mean frequency and to translate those deviations into a voltage whose amplitude varies at audio frequencies. Since the deviations occur at an audio frequency, the process is one of demodulation, and the degree of frequency deviation determines the amplitude of the demodulated (af) voltage.

A simple circuit for converting frequency variations to amplitude variations is a circuit which is tuned so that the mean radio frequency is on one slope of its resonance characteristic, as at A of Fig. 56. With modulation, the frequency swings between B and C, and the voltage developed across the circuit varies at the modulating rate. In order that no distortion will be introduced in this circuit, the frequency swing must be restricted to the portion of the slope which is effectively straight. Since this portion is very short, the voltage developed is low. Because of these limitations, this circuit is not commonly used but it serves to illustrate the principle.




The faults of the simple circuit are overcome in a push-pull arrangement, sometimes called a **discriminator circuit**, such as that shown in Fig. 57. Because of the phase relationships between the primary and each half of the secondary of the input transformer (each half of the secondary is connected in series with the primary through capacitor C_2), the rf voltages applied to the diodes become unequal as the rf signal swings



from the resonant frequency in each direction.

Since the swing occurs at audio frequencies (determined by the af modulation), the voltage developed across the diode load resistors, R_1 and R_2 connected in series, varies at audio frequencies. The output voltage depends on the difference in amplitude of the voltages developed across R_1 and R_2 . These voltages are equal and of opposite sign when the rf carrier is not modulated and the output is, therefore, zero. When modulation is applied, the output voltage varies as indicated in Fig. 58.

Because this type of FM detector is sensitive to amplitude variations in the rf carrier, a limiter stage is frequently used to remove most of the amplitude modulation from the carrier. (See *Limiters* under Amplification.)




Another form of detector for frequency-modulated waves is called **aratio detector**. This FM detector, unlike the previous one which responds to a difference in voltage, responds only to changes in the ratio of the voltage across two diodes and is, therefore, insensitive to changes in the differences in the voltages due to amplitude modulation of the rf carrier.

The basic ratio detector is given in Fig. 59. The plate load for the final if amplifier stage is the parallel resonant even at the lowest audio frequencies to be reproduced.

The rectified voltage across C_3 is proportional to the voltage across diode 1, and the rectified voltage across C_4 is proportional to the voltage across diode 2. Since the voltages across the two diodes differ according to the instantaneous frequency of the carrier, the voltages across C_3 and C_4 differ proportionately, the voltage across C_3 being the larger of the two voltages at carrier frequencies below the intermediate frequency and the smaller at frequencies above the intermediate frequency.

These voltages across C_3 and C_4 are additive and their sum is fixed by the constant voltage across C_6 . Therefore, while the ratio of these voltages varies at an audio rate, their sum is always constant. The voltage across C_4 varies at an audio rate when a frequencymodulated rf carrier is applied to the ratio detector; this audio voltage is extracted and fed to the audio amplifier. For a complete circuit utilizing this type of detector, refer to the CIRCUIT SECTION.

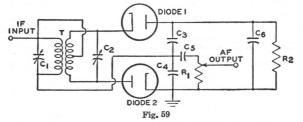


circuit consisting of C_1 and the primary transformer T. The tuning and coupling of the transformer is practically the same as in the previous circuit and therefore, the rf voltages applied to the diodes depend upon how much the rf signal swings from the resonant frequency in each direction. At this point the similarity ends.

Diode 1, R_2 , and diode 2 complete a series circuit fed by the secondary of the transformer T. The two diodes are connected in series so that they conduct on the same rf half-cycle. The rectified curtent through R_2 causes a negative voltage to appear at the plate of diode 1. Because C_3 is large, this negative voltage at the plate of diode 1 remains constant

Automatic Volume or Gain Control

The chief purposes of automatic volume control (avc) or automatic gain control (agc) in a radio or television receiver are to prevent fluctuations in loudspeaker volume or picture brightness when the audio or video signal at the antenna is fading in and out.

An automatic volume control circuit regulates the receiver rf and if gain so that this gain is less for a strong signal than for a weak signal. In this way, when the signal strength at the antenna changes, the avc circuit reduces the resultant change in the voltage output of the last if stage and consequently reduces the change in the speaker output volume. The avc circuit reduces the rf and if gain for a strong signal usually by increasing the negative bias of the rf, if, and frequency-mixer stages when the signal increases. A simple avc circuit is shown in Fig. 60. On each positive halfcycle of the signal voltage, when the diode plate is positive with respect to the cathode, the diode passes current.



Because of the flow of diode current through R_1 , there is a voltage drop across R1 which makes the left end of R1 negative with respect to ground. This voltage drop across R_1 is applied, through the filter R_2 and C, as negative bias on the grids of the preceding stages. When the signal strength at the antenna increases. therefore, the signal applied to the avc diode increases, the voltage drop across R_1 increases, the negative bias voltage applied to the rf and if stages increases, and the gain of the rf and if stages is decreased. Thus the increase in signal strength at the antenna does not produce as much increase in the output of the last if stage as it would produce without avc.


When the signal strength at the antenna decreases from a previous steady value, the avc circuit acts, of course, in the reverse direction, applying less negative bias, permitting the rf and if gain to increase, and thus reducing the decrease in the signal output of the last if stage. In this way, when the signal strength at the antenna changes, the avc circuit acts to reduce change in the output of the last if stage, and thus acts to reduce change in loudspeaker volume.

The filter, C and R_2 , prevents the avc voltage from varying at audio frequency. The filter is necessary because the voltage drop across R_1 varies with the modulation of the carrier being received. If avc voltage were taken directly from R_1 without filtering, the audio variations in avc voltage would vary the receiver gain so as to smooth out the modulation of the carrier. To avoid this effect, the avc voltage is taken from the capacitor C. Because of the resistance R_2 in series with C, the capacitor C can charge and discharge at only a comparatively slow rate. The avc voltage therefore cannot vary at frequencies as high as the audio range but can vary at frequencies high enough to compensate for most fading. Thus the filter permits the avc circuit to smooth out variations in signal due to fading, but prevents the circuit from smoothing out audio modulation.

It will be seen that an avc circuit and a diode-detector circuit are much alike. It is therefore convenient in a receiver to combine the detector and the avc diode in a single stage. Examples of how these functions are combined in receivers are shown in CIRCUIT SECTION.

In the circuit shown in Fig. 60, a certain amount of avc negative bias is applied to the preceding stages on a weak signal. Since it may be desirable to maintain the receiver rf and if gain at the maximum possible value for a weak signal, avc circuits are designed in some cases to apply no avc bias until the signal strength exceeds a certain value. These avc circuits are known as **delayed** avc or dave circuits.

A davc circuit is shown in Fig. 61. In this circuit, the diode section D_1 of the 6H6 acts as detector and avc diode.



 R_1 is the diode load resistor and R_2 and C_2 are the avc filter. Because the cathode of diode D_2 is returned through a fixed supply of -3 volts to the cathode of D_1 , a dc current flows through R_1 and R_2 in series with D_2 . The voltage drop caused by this current places the avc lead at approximately -3 volts (less the negligible drop through D_2). When the average


amplitude of the rectified signal developed across R_1 does not exceed 3 volts, the avc lead remains at -3 volts. Hence, for signals not strong enough to develop 3 volts across R_1 , the bias applied to the controlled tubes stays constant at a value giving high sensitivity.

However, when the average amplitude of rectified signal voltage across R_1 exceeds 3 volts, the plate of diode D_2 becomes more negative than the cathode of D_2 and current flow in diode D_2 ceases. The potential of the avc lead is then controlled by the voltage developed across R_1 . Therefore, with further increase in signal strength, the avc circuit applies an increasing avc bias voltage to the controlled stages. In this way, the circuit regulates the receiver gain for strong signals, but permits the gain to stay constant at a maximum value for weak signals.

It can be seen in Fig. 61 that a portion of the -3 volts delay voltage is applied to the plate of the detector diode D₁, this portion being approximately equal to $R_1/(R_1 + R_2)$ times -3 volts. Hence, with the circuit constants as shown, the detector plate is made negative with respect to its cathode by approximately one-half volt. However, this voltage does not interfere with detection because it is not large enough to prevent current flow in the tube.

Automatic gain control (agc) compensates for fluctuations in rf picture carrier amplitude. The peak carrier level rather than the average carrier level is controlled by the agc voltage because the peaks of the sync pulses are fixed when inserted on a fixed carrier level. The peak carrier level may be determined by measurement of the peaks of the sync pulses at the output of the video detector.

A conventional agc circuit, such as that shown in Fig. 62, consists of a diode



detector circuit and an RC filter. The time constant of the detector circuit is made large enough to prevent the picture content from influencing the magnitude of the agc voltage. The output voltage (agc voltage) is equal to the peak value of the incoming signal.

The diode detector receives the incoming signal from the last if stage of the television receiver through the capacitor C_1 . The resistor R_1 provides the load for the diode. The diode conducts only when its plate is driven positive with respect to its cathode. Electrons then flow from the cathode to the plate and thence into capacitor C_1 , where the negative charge is stored. Because of the low impedance offered by the diode during conduction, C_1 charges up to the value of the peak applied voltage.

During the negative excursion of the signal, the diode does not conduct, and C_1 discharges through resistor R_1 . Because of the large time constant of R_1C_1 , however, only a small percentage of the voltage across C_1 is lost during the interval between horizontal sync pulses. During succeeding positive cycles, the incoming signal must overcome the negative charge stored in C_1 before the diode conducts, and plate current flows only at the peak of each positive cycle. The voltage across C_1 , therefore, is determined by the level of the peaks of the positive cycles, or the sync pulses.


The negative voltage developed across resistor R_1 by the sync pulses is filtered by resistor R_2 and capacitor C_2 to remove the 15,750-cycle ripple of the horizontal sync pulse. The dc output is then fed to the if and rf amplifiers as an age voltage.

This agc system may be expanded to include amplification of the agc signal before detection of the peak level, or amplification of the dc output, or both. A direct-coupled amplifier must be used for amplification of the dc signal. The addition of amplification makes the system more sensitive to changes in carrier level.

A "keyed" agc system such as that shown in Fig. 63 is used to eliminate flutter and to improve noise immunity in weak signal areas. This system provides more rapid action than the conventional agc circuits because the filter circuit can employ lower capacitance and resistance values.

In the keyed agc system, the nega-

tive output of the video detector is fed directly to the grid No.1 of the first video amplifier. The positive output of the video amplifier is, in turn, fed directly to the grid No.1 of the keyed agc amplifier. The video stage increases the gain of the agc system and, in addition,




provides noise clipping. The plate voltage for the agc amplifier is a positive pulse obtained from a small winding on the horizontal output transformer which is in phase with the horizontal sync pulse obtained from the video amplifier. The polarity of this pulse is such that the plate of the agc amplifier tube is positive during the retrace time. The tube is biased so that current flows only when the grid No.1 and the plate are driven positive simultaneously. The amount of current flow depends on the grid-No.1 potential during the pulse. These pulses are smoothed out in the RC network in the plate circuit (R_1C_1) . Because the dc voltage developed across R₁ is negative. it is suitable for application to the grids of the rf and if tubes as an agc voltage.

Tuning Indication With Electron-Ray Tubes


Electron-ray tubes are designed to indicate visually by means of a fluorescent target the effects of a change in controlling voltage. One application of them is as tuning indicators in radio receivers. Types such as the 6U5, 6E5, and the 6AB5/6N5 contain two main parts: (1) a triode which operates as a dc amplifier and (2) an electron-ray indicator which is located in the bulb as shown in Fig. 64. The target is operated at a positive voltage and, therefore, attracts electrons from the cathode. When the electrons strike the target they produce a glow on the fluorescent coating of the target. Under these conditions. the target appears as a ring of light.

A ray-control electrode is mounted between the cathode and target. When the potential of this electrode is less positive than the target, electrons flowing to the target are repelled by the electrostatic field of the electrode, and do not




reach that portion of the target behind the electrode. Because the target does not glow where it is shielded from electrons, the control electrode casts a shadow on the glowing target. The extent of this shadow varies from approximately 100° of the target when the control electrode is much more negative than the target to 0° when the control electrode is at approximately the same potential as the target.

In the application of the electronray tube, the potential of the control electrode is determined by the voltage on the grid of the triode section, as can be seen in Fig. 65. The flow of the triode plate current through resistor R produces



a voltage drop which determines the potential of the control electrode. When the voltage of the triode grid changes in the positive direction, plate current increases, the potential of the control electrode goes down because of the increased drop across R, and the shadow angle widens. When the potential of the triode grid changes in the negative direction, the shadow angle narrows.

Another type of indicator tube is the 6AF6G. This tube contains only an indicator unit but employs two ray-control electrodes mounted on opposite sides of the cathode and connected to individual base pins. It employs an external dc amplifier. (See Fig. 66.) Thus, two symmetrically opposite shadow angles




may be obtained by connecting the two ray-control electrodes together; or, two unlike patterns may be obtained by individual connection of each ray-control electrode to its respective amplifier.

In radio receivers, avc voltage is applied to the grid of the dc amplifier. Because avc voltage is at maximum when the set is tuned to give maximum response to a station, the shadow angle is at minimum when the receiver is tuned to resonance with the desired station.


The choice between electron-ray tubes depends on the avc characteristic of the receiver. The 6E5 contains a sharp-cutoff triode which closes the shadow angle on a comparatively low value of avc voltage. The 6AB5/6N5 and 6U5 each have a remote-cutoff triode which closes the shadow on a larger value of avc voltage than the 6E5. The 6AF6G may be used in conjunction with dc amplifier tubes having either remote- or sharp-cutoff characteristics.

Oscillation

As an oscillator, an electron tube can be employed to generate a continuously alternating voltage. In presentday radio broadcast receivers, this application is limited practically to superheterodyne receivers for supplying the heterodyning frequency. Several circuits (represented in Figs. 67 and 68) may be utilized, but they all depend on feeding more energy from the plate circuit to the grid circuit than is required to equal the power loss in the grid circuit. Feedback may be produced by electrostatic or electromagnetic coupling between the grid and plate circuits. When sufficient energy is fed back to more than compensate for the loss in the grid circuit, the




tube will oscillate. The action consists of regular surges of power between the plate and the grid circuit at a frequency dependent on the circuit constants of inductance and capacitance. By proper choice of these values, the frequency may be adjusted over a very wide range.



Multivibrators

Relaxation oscillators, which are widely used in present-day electronic equipment, are used to produce nonsinusoidal waveshapes such as rectangular and sawtooth pulses. Probably the most common relaxation oscillator is the multivibrator, which may be considered as a two-stage resistance-coupled amplifier in which the output of each tube is coupled into the input of the other tube.

Fig. 69 is a basic multivibrator circuit of the free-running type. In this circuit, oscillations are maintained by the



alternate shifting of conduction from one tube to the other. The cycle usually starts with one tube, V_1 , at zero bias, and the other, V_2 , at cutoff or beyond. At this point, the capacitor C_1 is charged

Electron Tube Applications

sufficiently to cut off V_2 . C_1 then begins to discharge through the resistor R_4 , and the voltage on the grid of V_2 rises until V_2 begins to conduct. The voltage on the plate of V_2 then decreases, causing V_1 to conduct less and less. At the same time, the plate voltage of V_1 begins to rise, causing V_2 to conduct still more heavily. Because of the amplification, this cumulative effect builds up extremely fast, and conduction switches from V_1 to V_2 within a few microseconds, depending on the circuit components.


In this circuit, therefore, conduction switches from V_1 to V_2 over the interval during which C_1 discharges from the voltage across R_4 to the cutoff voltage for V_2 . The actual transfer of conduction does not occur until cutoff is reached. Conduction switches back to V_1 through a similar process to complete the cycle. The plate waveform is essentially rectangular in shape, and may be adjusted as to symmetry, frequency, and amplitude by proper choice of circuit constants, tubes, and voltages.

Although this type of multivibrator is free-running, it may be triggered by pulses of a given amplitude and frequency to provide a frequency-stabilized output. Multivibrator circuits may also be designed so that they are not free-running, but must be triggered externally to shift conduction from one tube to the other. Depending on the type of circuit, conduction may shift back to the first tube after a given time interval, or the second tube may continue conducting until another trigger signal is applied.


Synchroguide Circuits

The "synchroguide" is a controlled type of oscillator used in television receivers to generate and control the synchronized sawtooth voltage necessary for adequate line- or horizontal-frequency scanning. A simplified synchroguide circuit is shown in Fig. 70. This circuit provides stable, noise-free control of a blocking oscillator which generates a horizontal-frequency signal. It permits comparison of the received sync pulses and the generated sawtooth voltages so that properly locked-in horizontal scanning results.

The triode V_2 in Fig. 70 is a conventional blocking oscillator which enables a sawtooth voltage to be developed across the capacitor C_2 . A portion of this sawtooth is fed back to the grid of the control tube, V₁. The positive sync pulses



are also applied to the grid of V_1 . The waveforms shown in Fig. 71 illustrate the sawtooth and sync pulses (A and B) and their proper "in-sync" combination (C). The sync pulse occurs partly during the portion of the sawtooth voltage in which the triode V_1 draws current. Any shift in sync pulse as it is superimposed




on the sawtooth, therefore, will affect the amount of conduction of the control tube. A change in control-tube conduction ultimately affects the bias on the oscillator-tube grid by changing the voltage to which the capacitor C_1 in the cathode circuit may charge. An increase in the positive bias increases the frequency of oscillation.

For example, waveform D in Fig. 71 illustrates a condition in which the sawtooth voltage is advanced in phase with respect to the sync-pulses. The widening of the pulse which occurs at the corner of the sawtooth waveform allows the control tube to conduct more current and, consequently, allows the capacitor C_1 to charge to a higher voltage. This increased reference voltage also appears in the grid circuit of V_2 and makes the grid more positive. The increased grid voltage then speeds up the frequency of oscillations until proper synchronization results.

RCA Receiving Tube Manual

The blocking oscillator can be made more immune to changes in frequency and noise if V_2 is brought out of cutoff very sharply. This effect is obtained by sine-wave stabilization. The tuned circuit L_3 - C_3 in the plate circuit of Fig. 70 superimposes a shock-excited sine wave on the plate and grid waveforms, as shown in Fig. 72.




Deflection Circuits

Vertical Output Circuits

A modified multivibrator in which the vertical output tube is part of the oscillator circuit is used in the vertical deflection stage of many television receivers. This stage supplies the deflection energy required for vertical deflection of the picture-tube beam. A simplified combined vertical-oscillator-output stage is shown in Fig. 73. Waveshapes at critical points of the circuit are included the inductive components in the yoke and transformer. The effect of these inductive components must be taken into consideration, however, particularly during retrace. The fast rate of current change during retrace time (which is approximately 1/15 as long as trace time) causes a high-voltage pulse at the plate which could give a trapezoidal waveshape to the plate voltage and cause increased plate current, excess damping, and lengthened retrace time. However, the grid voltage is made sufficiently negative during retrace to keep the tube close to cutoff, asdescribed below.

The frequency, and the relative deviation of the positive and negative portions of each cycle, are dependent on the values of resistors R1 and R3 and the RC combination R_3C_2 , as explained previously in the section on multivibrators. The desired trapezoidal waveshape at the grid of V_2 is created by capacitor C_1 and resistor R_2 . If R_2 were equal to zero. C₁ would cause the grid-voltage waveshape to take the form shown in Fig. 74(a). When R_2 is sufficiently large, C_1 does not discharge completely when V_1 conducts. When V_1 is cut off, therefore, the voltage on the grid of V_2 immediately rises to the voltage across C_1 . The resulting waveshape is shown in Fig.

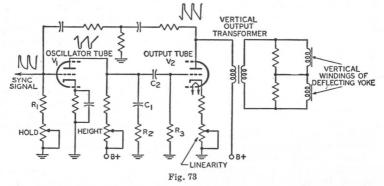

to illustrate the development of the desired current through the vertical output transformer and deflecting yoke.


The current waveform through the deflecting yoke and output transformer should be a sawtooth to provide the desired deflection. The grid and plate voltage waveforms of the output tube could also be sawtooth except for the effect of 74(b). The negative-going pulse of the grid-voltage waveshape prevents the high plate pulse from causing excess conduction, and thereby prevents overdamping.



This vertical deflection stage utilizes twin-triode tubes such as the 6DR7 and 6EM7. The 6EM7 is particularly suitable for this application because it incorporates dissimilar units to provide for the different operating requirements of the oscillator and output sections.

Horizontal Output Circuits

Fig. 75 shows a typical horizontaloutput-and-deflection circuit used in television receivers. In addition to supplying the deflection energy required for horizontal deflection of the picture-tube beam, this circuit provides the high dc



voltage required for the ultor of the picture tube and the "boosted" B voltage for other portions of the receiver. The horizontal-output tube is usually a beam power tube such as the 6DQ6B, 6CD6-GA, or 6GW6.


In this circuit, a sawtooth voltage from the horizontal-oscillator tube is applied to the grid No.1 of the horizontaloutput tube. When this voltage rises above the cutoff point of the output tube. the tube conducts a sawtooth of plate current which is fed through the autotransformer to the horizontal-deflecting yoke. At the end of the horizontal-scanning cycle, which lasts for 63.4 microseconds, the sawtooth voltage on the grid suddenly cuts off the output tube. This sudden change sets up an oscillation of about 50 to 70 Kc in the output circuit, which may be considered as an inductor shunted by the stray capacitance of the circuit. During the first half of this oscillation, a positive voltage appears across the transformer. In the second half of the cycle, the voltage swings below the plate supply voltage, and the damper diode conducts, damping out the oscillation. At the same time, the current through the deflecting yoke reverses and reaches its negative peak. As the damperdiode current decays exponentially to zero, the output tube begins to conduct again. The yoke current, therefore, is composed of current resulting from damper-diode conduction.

When the output tube is suddenly cut off, the high-voltage pulse produced by shock excitation of the load circuit is increased by means of an extra winding on the transformer. This high-voltage pulse charges a high-voltage capacitor through the high-voltage rectifier. The output of this circuit is the dc highvoltage supply for the picture tube. The high-voltage rectifier also obtains its filament power through a separate winding on the horizontal-output transformer.

Current flowing through the damper diode charges the "boost" capacitor through the damper portion of the transformer winding. The polarity of the charge on the capacitor is such that the voltage at the low end of the winding is increased above the plate supply voltage, or B+. This higher voltage or "boost" is used for the output-tube plate supply, and may also supply the deflection oscillators and the verticaloutput circuit provided the current drain is not excessive.

High-Voltage Regulator Circuit

In color-television receivers, it is very important to regulate the high-voltage supply to the picture tube. A suitable circuit using the 6BK4 for regulation of




the output of a high-voltage, high-impedance supply is shown in Fig. 76. In this circuit, the cathode is held at a fixed positive potential with respect to ground. Because the grid potential is kept slightly less positive by the voltage drop across resistor R_2 , the tube operates in the negative grid region and no grid current is drawn.

When the output voltage, e_0 , rises as a result of a decrease in load current. a small fraction of the additional voltage is applied to the grid of the tube by the voltage-divider circuit consisting of R_1 and R_2 . This increased grid voltage causes the tube to draw an increased current from the unregulated supply. The increased current, in turn, causes a voltage drop across the high internal impedance of the unregulated supply, R_s, which tends to counteract the original rise of the voltage. If desired, the grid may be connected to a variable point on the voltage divider to allow some adjustment of the output-voltage level.

The grid voltage for the 6BK4 can also be obtained from a tap on the Bboost voltage supply. The use of this lower voltage (about 375 volts) eliminates the need for costly and troublesome high-voltage resistors. In this arrangement, variations in high voltage also vary the tapped-down B-boost voltage at the regulator grid, and the resulting variations in conduction of the regulator increase or decrease the loading of the high-voltage supply so that the total load remains nearly constant.

Frequency Conversion

Frequency conversion is used in superheterodyne receivers to change the frequency of the rf signal to an intermediate frequency. To perform this change in frequency, a frequency-converting device consisting of an oscillator and a frequency mixer is employed. In such a device, shown diagrammatically in Fig. 77, two voltages of different frequency, the rf signal voltage and the voltage generated by the oscillator, are



applied to the input of the frequency mixer. These voltages beat, or heterodyne, within the mixer tube to produce a plate current having, in addition to the frequencies of the input voltages, numerous sum and difference frequencies.

The output circuit of the mixer stage is provided with a tuned circuit which is adjusted to select only one beat frequency, *i.e.*, the frequency equal to the difference between the signal frequency and the oscillator frequency. The selected output frequency is known as the intermediate frequency, or if. The output frequency of the mixer tube is kept constant for all values of signal frequency by tuning the oscillator to the proper frequency.

Important advantages gained in a receiver by the conversion of signal frequency to a fixed intermediate frequency are high selectivity with few tuning stages and a high, as well as stable, overall gain for the receiver.

Several methods of frequency conversion for superheterodyne receivers are of interest. These methods are alike in that they employ a frequency-mixer tube in which plate current is varied at a combination frequency of the signal frequency and the oscillator frequency. These variations in plate current produce across the tuned plate load a voltage of the desired intermediate frequency. The methods differ in the types of tubes employed and in the means of supply input voltages to the mixer tube.

A method widely used before the availability of tubes especially designed for frequency-conversion service and currently used in many FM, television, and standard broadcast receivers, employs as mixer tube either a triode, a tetrode, or a pentode, in which oscillator voltage and signal voltage are applied to the same grid. In this method, coupling between the oscillator and mixer circuits is obtained by means of inductance or capacitance.

A second method employs a tube having an oscillator and frequency mixer combined in the same envelope. In one form of such a tube, coupling between the two units is obtained by means of the electron stream within the tube. Because five grids are used, the tube is called a pentagrid converter.

Electron Tube Applications

Grids No. 1 and No. 2 and the cathode are connected to an external circuit to act as a triode oscillator. Grid No. 1 is the grid of the oscillator and grid No. 2 is the anode. These and the cathode can be considered as a composite cathode which supplies to the rest of the tube an electron stream that varies at the oscillator frequency.


This varying electron stream is further controlled by the rf signal voltage on grid No. 4. Thus, the variations in plate current are due to the combination of the oscillator and the signal frequencies. The purpose of grids No. 3 and No. 5, which are connected together within the tube, is to accelerate the electron stream and to shield grid No. 4 electrostatically from the other electrodes.

Pentagrid-converter tubes of this design are good frequency-converting devices at medium frequencies. However, their performance is better at the lower frequencies because the output of the oscillator drops off as the frequency is raised and because certain undesirable effects produced by interaction between oscillator and signal sections of the tube increase with frequency.

To minimize these effects, several of the pentagrid-converter tubes are designed so that no electrode functions alone as the oscillator anode. In these tubes, grid No. 1 functions as the oscillator grid, and grid No. 2 is connected within the tube to the screen grid (grid No. 4). The combined two grids, Nos. 2 and 4, shield the signal grid (grid No. 3) and act as the composite anode of the oscillator triode. Grid No. 5 acts as the suppressor grid.

Converter tubes of this type are designed so that the space charge around the cathode is unaffected by electrons from the signal grid. Furthermore, the electrostatic field of the signal grid also has little effect on the space charge. The result is that rf voltage on the signal grid produces little effect on the cathode current. There is, therefore, little detuning of the oscillator by avc bias because changes in avc bias produce little change in oscillator transconductance or in the input capacitance of grid No. 1.

Examples of the pentagrid converters discussed in the preceding paragraph are the single-ended types 1R5 and 6BE6. A schematic diagram illustrating the use of the 6BE6 with self-excitation is given in Fig. 78: the 6BE6 may also



be used with separate excitation. A complete circuit is shown in the CIRCUIT SECTION.

Another method of frequency conversion utilizes a separate oscillator having its grid connected to the No. 1 grid of a mixer hexode. The cathode, triode grid, and triode plate form the oscillator unit of the tube. The cathode, hexode mixer grid (grid No. 1) hexode screen grids (grids Nos. 2 and 4), hexode signal grid (grid No. 3), and hexode plate constitute the mixer unit. The internal shields are connected to the shell of the tube and act as a suppressor grid for the hexode unit.


The action of this tube in converting a radio-frequency signal to an intermediate frequency depends on (1) the generation of a local frequency by the triode unit, (2) the transferring of this frequency to the hexode grid No. 1, and (3) the mixing in the hexode unit of this frequency with that of the rf signal applied to the hexode grid No. 3. The tube is not critical to changes in oscillatorplate voltage or signal-grid bias and, therefore, finds important use in allwave receivers to minimize frequencyshift effects at the higher frequencies.

A further method of frequency conversion employs a tube called a pentagrid mixer. This type has two independent control grids and is used with a separate oscillator tube. RF signal voltage is applied to one of the control grids and oscillator voltage is applied to the other. It follows, therefore, that the variations in plate current are due to the combination of the oscillator and signal frequencies.

RCA Receiving Tube Manual

The tube contains a heater-cathode, five grids, and a plate. Grids Nos. 1 and 3 are control grids. The rf signal voltage is applied to grid No. 1. This grid has a remote-cutoff characteristic and is suited for control by avc bias voltage. The oscillator voltage is applied to grid No. 3. This grid has a sharp-cutoff characteristic and produces a comparatively large effect on plate current for a small amount of oscillator voltage. Grids Nos. 2 and 4 are connected together within the tube. They accelerate the electron stream and shield grid No. 3 electrostatically from the other electrodes. Grid No. 5, connected within the tube to the cathode. functions similarly to the suppressor grid in a pentode.

In the converter or mixer stage of a television receiver, stable oscillator operation is most readily obtained when separate tubes or tube sections are used for the oscillator and mixer functions. A typical television mixer-oscillator circuit is shown in Fig. 79. In such circuits, the oscillator voltage is applied to the mixer grid by inductive coupling, capacitive coupling, or a combination of the two.




Tubes containing electrically independent oscillator and mixer units in the same envelope, such as the 6U8A and 6X8, are designed especially for this application.

Automatic Frequency Control

An automatic frequency control (afc) circuit provides a means of correcting automatically the intermediate frequency of a superheterodyne receiver when, for any reason, it drifts from the frequency to which the if stages are tuned. This correction is made by adjusting the frequency of the oscillator. Such a circuit will automatically compensate for slight changes in rf carrier or oscillator frequency as well as for inaccurate manual or push-button tuning.

An afc system requires two sections: a frequency detector and a variable reactance. The detector section may be essentially the same as the FM detector illustrated in Fig. 57 and discussed under *Detection*. In the afc system, however, the output is a dc control voltage, the magnitude of which is proportional to the amount of frequency shift. This dc control voltage is used to control the grid bias of an electron tube which comprises the variable reactance section (Fig. 80).




The plate current of the reactance tube is shunted across the oscillator tank circuit. Because the plate current and plate voltage of the reactance tube are almost 90° out of phase, the control tube affects the tank circuit in the same manner as a reactance. The grid bias of the tube determines the magnitude of the effective reactance and, consequently, a control of this grid bias can be used to control the oscillator frequency.

Automatic frequency control is also used in television receivers to keep the horizontal oscillator in step with the horizontal-scanning frequency (15,750 cps) at the transmitter. A widely used horizontal afc circuit is shown in Fig. 81. This circuit, which is often referred to as a balanced-phase-detector or phasediscriminator circuit, is usually employed to control the frequency of a multivibrator-type horizontal-oscillator circuit. The 6AL5 detector supplies a dc control voltage to the grid of the horizontal-oscillator tube which counteracts changes in its operating frequency. The magnitude and polarity of the control voltages are determined by phase relationships in the afc circuit at a given moment.

The horizontal sync pulses obtained from the sync-separator circuit are fed through a single-triode phase-inverter or

Electron Tube Applications

phase-splitter circuit to the two diode units of the 6AL5. Because of the action of the phase-inverter circuit, the signals



applied to the two diode units are equal in amplitude but 180 degrees out of phase. A reference sawtooth voltage obtained from the horizontal output circuit is also applied simultaneously to both units. Any change in the oscillator frequency alters the phase relationship between the reference sawtooth and the incoming horizontal sync pulses, causing one diode unit of the 6AL5 to conduct more heavily than the other, and thus producing a correction signal. The system remains balanced at all times, therefore, because momentary changes in oscillator frequency are instantaneously corrected by the action of the control voltage.

The diode units of the 6AL5 are biased so that conduction takes place only during the tips of the sync pulses. The relative position of the sync pulses on the retrace portion of the sawtooth waveform at any given instant determines which diode unit conducts more heavily, and thereby establishes the magnitude and polarity of the control voltage. The network between the diode units and the grid of the horizontal-oscillator tube is essentially a low-pass filter which prevents the horizontal-oscillator perform affecting the horizontal-oscillator performance.



The installation of electron tubes requires care if high-quality performance is to be obtained from the associated circuits. Installation suggestions and precautions which are generally common to all types of tubes are covered in this section. Careful observance of these suggestions will do much to help the experimenter and electronic technician obtain the full performance capabilities of radio tubes and circuits. Additional pertinent information is given under each tube type and in the CIRCUIT SEC-TION.

Filament and Heater Power Supply

The design of electron tubes allows for some variation in the voltage and current supplied to the filament or heater, but most satisfactory results are obtained from operation at the rated values. When the voltage is low, the temperature of the cathode is below normal, with the result that electron emission is limited. The limited emission may cause unsatisfactory operation and reduced tube life. On the other hand, high cathode voltage may cause rapid evaporation of cathode material and shorten tube life.

To insure proper tube operation, it is important that the filament or heater voltage be checked at the socket terminals by means of a high-resistance voltmeter while the equipment is in operation. In the case of series operation of heaters or filaments, correct adjustment can be checked by means of an ammeter in the heater or filament circuit.

The filament or heater voltage supply may be a direct-current source (a battery or a dc power line) or an alternating-current power line, depending on the type of service and type of tube. Frequently, a resistor (either variable or fixed) is used with a dc supply to permit compensation for battery voltage variations or to adjust the tube voltage at the socket terminals to the correct value. Ordinarily, a step-down transformer is used with an ac supply to provide the proper filament or heater voltage. Receivers intended for operation on both dc and ac power lines have the heaters connected in series with a suitable resistor and supplied directly from the power line.

DC filament or heater operation should be considered on the basis of the source of power. In the case of the battery supply for the 1.4-volt filament tubes, it is unnecessary to use a voltagedropping resistor in series with the filament and a single dry-cell; the filaments of these tubes are designed to operate satisfactorily over the range of voltage variations that normally occur during the life of a dry-cell. Likewise, no series resistor is required when the 1.25-volt filament subminiatures are operated from a single 1.5-volt flashlight-type dry-cell. when the 2-volt filament type tubes are operated from a single storage cell, or when the 6.3-volt series are operated from a 6-volt storage battery.

In the case of dry-battery supply for 2-volt filament tubes, a variable resistor in series with the filament and the battery is required to compensate for battery variations. Turning the set on and off by means of the rheostat is advised to prevent over-voltage conditions after an off-period because the voltage of dry-cells rises during off-periods.

In the case of storage-battery supply, air-cell-battery supply, or dc power supply, a non-adjustable resistor of suitable value may be used. It is well to check initial operating conditions, and thus the resistor value, by means of a voltmeter or ammeter.

AC filament or heater operation should be considered on the basis of either a parallel or a series arrangement of filaments and/or heaters. In the case of the parallel arrangement, a step-down transformer is employed. Precautions should be taken to see that the line voltage is the same as that for which the primary of the transformer is designed. The line voltage may be determined by measurement with an ac voltmeter (0-150 volts).

If the line voltage measures in excess of that for which the transformer is designed, a resistor should be placed in series with the primary to reduce the line voltage to the rated value of the transformer primary.Unless this is done, the excess input voltage will cause proportionally excessive voltage to be applied to the tubes. Any electron tube may be damaged or made inoperative by excessive operating voltages.

If the line voltage is consistently below that for which the primary of the transformer is designed, it may be necessary to install a booster transformer between the acoutlet and the transformer primary. Before such a transformer is installed, the acline fluctuations should be very carefully noted. Some radio sets are equipped with a line-voltage switch which permits adjustment of the power transformer primary to the line voltage. When this switch is properly adjusted, the series-resistor or booster-transformer method of controlling line voltage is seldom required.

In the case of the series arrangements of filaments and/or heaters, a voltage-dropping resistance in series with the heaters and the supply line is usually required. This resistance should be of such value that, for normal line voltage, tubes will operate at their rated heater or filament current. The method for calculating the resistor value is given below.

When the filaments of battery-type tubes are connected in series, the total filament current is the sum of the current due to the filament supply and the plate and grid-No.2 currents (cathode current) returning to B(-) through the tube filaments. Consequently, in a series filament string it is necessary to add shunt resistors across each filament section to bypass this cathode current in order to maintain the filament voltage at its rated value.

The filament or heater resistor required when filaments and/or heaters are operated in parallel can be determined easily by a simple formula derived from Ohm's law.

Required resistance (ohms) =

supply volts - rated volts of tube type total rated filament current (amperes) Thus, if a receiver using two IT4's, one IR5, one IU5, and one 3V4 is to be operated from a storage battery, the series resistor is equal to 2 volts (the voltage from a single storage cell) minus 1.4 volts (voltage rating for these tubes) divided by 0.3 ampere (the sum of 4×0.05 ampere $+ 1 \times 0.1$ ampere), *i.e.*, approximately 2 ohms. Since this resistor should be variable to allow adjustment for battery depreciation, it is advisable to obtain the next larger commercial size, although any value between 2 and 3 ohms will be quite satisfactory.

Where much power is dissipated in the resistor, the wattage rating should be sufficiently large to prevent overheating. The power dissipation in watts is equal to the voltage drop in the resistor multiplied by the total filament current in amperes. Thus, for the example above, $0.6 \times 0.3 = 0.18$ watt. In this case, the value is so small that any commercial rheostat with suitable resistance will be adequate.

For the case where the heaters and/ or filaments of several tubes are operated in series, the resistor value is calculated by the following formula, also derived from Ohm's law.

Required resistance (ohms) = <u>supply volts - total rated volts of tubes</u> rated amperes of tubes


Thus, if a receiver having one 6BE6, one 6BA6, one 6AT6, one 25L6GT, and one 25Z6GT is to be operated from a 117volt power line, the series resistor is equal to 117 volts (the supply voltage) minus 68.9 volts (the sum of 3×6.3 volts $+ 2 \times 25$ volts) divided by 0.3 ampere (current rating of these tubes), *i.e.*, approximately 160 ohms. The wattage dissipation in the resistor will be 117 volts minus 68.9 volts times 0.3 ampere, or approximately 14.4 watts. A resistor having a wattage rating in excess of this value should be chosen.

When the series-heater connection is used in ac/dc receivers, it is usually advisable to arrange the heaters in the circuit so that the tubes most sensitive to hum disturbances are at or near the ground potential of the circuit. This arrangement reduces the amount of ac

RCA Receiving Tube Manual

voltage between the heaters and cathodes of these tubes and minimizes the hum output of the receiver. The order of heater connection, by tube function, from chassis to the rectifier-cathode side of the ac line is shown in Fig. 82.

The balanced arrangement described above also minimizes heater-grid hum. High grid-circuit impedances should be avoided, if possible. High heater voltages should also be avoided because heater-cathode hum rises sharply when

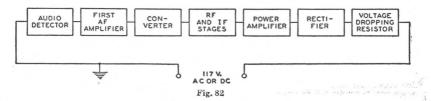

Heater-to-Cathode Connection

When heater-type tubes are operated from ac, their cathodes may be returned (through resistors, capacitors, or other components) to the mid-tap on the heater supply winding, to the midtap of a small resistor (about 50 ohms) connected across the winding, or to one end of the heater supply winding, depending on circuit requirements. In all circuits, it is important to keep the heater-cathode voltage within the maximum ratings specified for the tube.

Heater-typetubes may produce hum as a result of conduction between heater and cathode or between heater and control grid, or by modulation of the electron stream by the alternating magnetic field surrounding the heater. When a large resistor is used between heater and cathode (as in series-connected heater strings), or when one side of the heater is grounded, even a minute pulsating leakage current between heater and cathode can develop a small voltage across the cathode-circuit impedance and cause objectionable hum. The use of a large cathode bypass capacitor is recommended to minimize this source of hum.

Much lower hum levels can be achieved when heaters are connected in parallel systems in which the center-tap of the heater supply is grounded or, preferably, connected to a positive bias source of 15 to 80 volts dc to reduce the flow of alternating current. The heater leads of the tubes should be twisted and kept away from high-impedance circuits. The balanced ac supply provides almost complete cancellation of the alternating-current components. the heater voltage is increased above the published value.

Certain tube types are designed especially to minimize hum in high-quality, high-fidelity audio equipment. Examples are the 5879, 7025, and 7199.

Plate Voltage Supply

The plate voltage for electron tubes is obtained from batteries, rectifiers, direct-current power lines, and small local generators. The maximum platevoltage value for any tube type should not be exceeded if most satisfactory performance is to be obtained. Plate voltage should not be applied to a tube unless the corresponding recommended voltage is also supplied to the grid.

It is recommended that the primary circuit of the power transformer be fused to protect the rectifier tube(s), the power transformer, filter capacitor, and chokes in case a rectifier tube fails.

Grid Voltage Supply

The recommended grid voltages for different operating conditions have been carefully determined to give the most satisfactory performance. Grid voltage may be obtained from a fixed source such as a separate C-battery or a tap on the voltage divider of the high-voltage dc supply, from the voltage drop across a resistor in the cathode circuit, or from the voltage drop across a resistor in the grid circuit. The first method is called "fixed bias"; the second is called "cathode bias" or "self bias"; the third is called "grid-resistor bias" and is sometimes incorrectly referred to in receivingtube practice as "zero-bias operation.


In any case, the object is to make

the grid negative with respect to the cathode by the specified voltage. When a C-battery is used, the negative terminal is connected to the grid return and the positive terminal is connected to the negative filament socket terminal, or to the cathode terminal if the tube is of the heater-cathode type. If the filament is supplied with alternating current, this connection is usually made to the center-tap of a low resistance (20-50 ohms) shunted across the filament terminals. This method reduces hum disturbances caused by the ac supply. If bias voltages are obtained from the voltage divider of a high-voltage dc supply, the grid return is connected to a more negative tap than the cathode.

The cathode-biasing method utilizes the voltage drop produced by the cathode current flowing through a resistor connected between the cathode and the negative terminal of the B-supply. (See Fig. 83.) The cathode current is, of course, equal to the plate current in the case of a triode, or to the sum of the plate and grid-No.2 currents in the case of a tetrode, pentode, or beam power tube. Because the voltage drop along the resistance is increasingly negative with respect to the cathode, the required negative grid-bias voltage can be 1000/3 = 3000 ohms. If the cathode current of more than one tube passes through the resistor, or if the tube or tubes employ more than three electrodes, the total current determines the size of the resistor.

Bypassing of the cathode-bias resistor depends on circuit-design requirements. In rf circuits the cathode resistor usually is bypassed. In af circuits the use of an unbypassed resistor will reduce distortion by introducing degeneration into the circuit. However, the use of an unbypassed resistor decreases gain and power sensitivity. When bypassing is used, it is important that the bypass capacitor be sufficiently large to have negligible reactance at the lowest frequency to be amplified.

In the case of power-output tubes having high transconductance such as the beam power tubes, it may be necessary to shunt the bias resistor with a small mica capacitor (approximately 0.001μ f) in order to prevent oscillations. The usual af bypass may or may not be used, depending on whether or not degeneration is desired. In tubes having high values of transconductance, such as the 6BA6, 6CB6, and 6AC7, input capacitance and input conductance change appreciably with plate current.

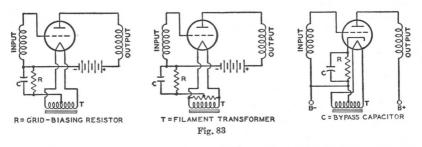

obtained by connecting the grid return to the negative end of the resistance.

The value of the resistance for cathode-biasing a single tube can be determined from the following formula:

Resistance (ohms) =

desired grid-bias voltage \times 1000 rated cathode current in milliamperes

Thus, the resistance required to produce 9 volts bias for a triode which operates at 3 milliamperes plate current is $9 \times$

When such a tube having a separate suppressor-grid connection is used as an rf amplifier, these changes may be minimized by leaving a certain portion of the cathode-bias resistor unbypassed. In order to minimize feedback when this method is used, the external grid-No.1to-plate (wiring) capacitances should be kept to a minimum, the grid No.2 should be bypassed to ac ground, and the grid No.3 should be connected to ac ground.

The use of a cathode resistor to


obtain bias voltage is not recommended for amplifiers in which there is appreciable shift of electrode currents with the application of a signal. In such amplifiers, a separate fixed supply is recommended.

The grid-resistor biasing method is also a self-bias method because it utilizes the voltage drop across the grid resistor produced by small amounts of grid current flowing in the grid-cathode circuit. This current is due to (1) an electromotive potential difference between the materials comprising the grid and cathode and (2) grid rectification when the grid is driven positive. A large value of resistance is required in order to limit this current to a very small value and to avoid undesirable loading effects on the preceding stage.

Examples of this method of bias are given in circuits 22-1 and 22-4 in the CIRCUIT SECTION. In both of these circuits, the audio amplifier type 1U5 or 12AV6 has a 10-megohm resistor between the grid and the negative filament or cathode to furnish the required bias which is usually less than 1 volt. This method of biasing is used principally in the early voltage amplifier stages (usually employing high-mu triodes) of audio amplifier circuits, where the tube dissipation will not be excessive under zerosignal conditions.


A grid resistor is also used in many oscillator circuits for obtaining the required bias. In these circuits, the grid voltage is relatively constant and its magnitude is usually in the order of 5 volts or more. Consequently, the bias voltage is obtained only through grid rectification. A relatively low value of resistor, 0.1 megohm or less, is used. Oscillator circuits employing this method of bias are given in circuits 22-1 and 22-4 in the CIRCUIT SECTION.

Grid-bias variation for the rf and if amplifier stages is a convenient and frequently used method for controlling receiver volume. The variable voltage supplied to the grid may be obtained: (1) from a variable cathode resistor as shown in Figs. 84 and 85; (2) from a bleeder circuit by means of a potentiometer as shown in Fig. 86; or (3) from a bleeder circuit in which the bleeder current is varied by a tube used for auto-




matic volume control. The latter circuit is shown in Fig. 60.

In all cases it is important that the control be arranged so that at no time will the bias be less than the recommended minimum grid-bias voltage for the particular tubes used. This requirement can be met by providing a fixed stop on the potentiometer, by connecting



a fixed resistance in series with the variable resistance, or by connecting a fixed cathode resistance in series with the variable resistance used for regulation. Where receiver gain is controlled by grid-bias variation, it is advisable to have the control voltages extend over a wide range in order to minimize crossmodulation and modulation-distortion.




A remote-cutoff type of tube should, therefore, be used in the controlled stages.

In most tubes employing a unipotential cathode, a positive grid current begins to flow when the grid is slightly negative and increases rapidly as the

Electron Tube Installation

grid is made more positive, as shown in Fig. 87. The value of grid voltage at which the grid-current curve intercepts the horizontal axis is determined by several different physical processes, including an electrothermal effect due to the differences in temperature and in material composition of the grid and the cathode, and by the positive grid current. For values of grid potentials which



are larger than this intercept, the direction of the grid current is positive (i.e., from the grid to the cathode). At smaller values of grid potential, the direction of the grid current is negative (i.e., from the cathode to the grid).


Positive grid current consists of electrons emitted from the cathode which are intercepted by the control grid. Negative grid current, which becomes appreciable only when the grid potential is more negative than the value of the intercept, is a result of the emission of electrons from the heated control grid to the cathode, the effect of gas molecules in the tube, and the influence of leakage currents between the grid and cathode and the grid and the plate.

The value of grid potential at the intercept of the grid-current curve on the horizontal axis (often mistakenly called contact potential) may be as high as $1\frac{1}{2}$ volts. If the operating bias of the tube is less than this intercept, it is found that two effects are present. Direct current flows in the grid circuit, and the dynamic input resistance of the tube may be relatively low. It is generally desirable to supply the tube with a value of bias sufficiently high so that the operating point of the tube is not near the value of this intercept. If the value of the operating bias is near the value of the intercept, care should be taken to avoid undesirable effects in the grid circuit due to grid current or low input resistance.

Screen-Grid Voltage Supply

The positive voltage for the screen grid (grid No.2) of screen-grid tubes may be obtained from a tap on a voltage divider, from a potentiometer, or from a series resistor connected to a high-voltage source, depending on the particular tube type and its application. The screengrid voltage for tetrodes should be obtained from a voltage divider or a potentiometer rather than through a series resistor from a high-voltage source because of the characteristic screen-grid current variations of tetrodes. Fig. 88 shows a tetrode with its screen-grid voltage obtained from a potentiometer.


When pentodes or beam power tubes are operated under conditions where a large shift of plate and screen-grid currents does not take place with the application of the signal, the screen-grid voltage may be obtained through a series resistor from a high-voltage source. This method of supply is possible because of



the high uniformity of the screen-grid current characteristic in pentodes and beam power tubes. Because the screengrid voltage rises with increase in bias and resulting decrease in screen-grid current, the cutoff characteristic of a pentode is extended by this method of supply.

This method is sometimes used to increase the range of signals which can be handled by a pentode. When used in resistance-coupled amplifier circuits employing pentodes in combination with the cathode-biasing method, it minimizes the need for circuit adjustments. Fig. 89 shows a pentode with its screengrid voltage supplied through a series resistor.

When power pentodes and beam power tubes are operated under conditions such that there is a large change in plate and screen-grid currents with the application of signal, the seriesresistor method of obtaining screen-grid voltage should not be used. A change in screen-grid current appears as a change



in the voltage drop across the series resistor in the screen-grid circuit; the result is a change in the power output and an increase in distortion. The screengrid voltage should be obtained from a point in the plate-voltage-supply filter system having the correct voltage, or from a separate source.

It is important to note that the plate voltage of tetrodes, pentodes, and beam power tubes should be applied before or simultaneously with the screengrid voltage. Otherwise, with voltage on the screen grid only, the screen-grid current may rise high enough to cause excessive screen-grid dissipation.

Screen-grid voltage variation for the rf amplifier stages has sometimes been used for volume control in oldertype receivers. Reduced screen-grid voltage lowers the transconductance of the tube and results in reduced gain per stage. The voltage variation is obtained by means of a potentiometer shunted across the screen-grid voltage supply. (See Fig. 88.) When the screen-grid voltage is varied, it must never exceed the rating of the tube. This requirement can be met by providing a fixed stop on the potentiometer.

Shielding

In high-frequency stages having high gain, the output circuit of each stage must be shielded from the input circuit of that stage. Each high-frequency stage also must be shielded from the other high-frequency stages. Unless shielding is employed, undesired feedback may occur and may produce many harmful effects on receiver performance.

To prevent this feedback, it is a desirable practice to shield separately each unit of the high-frequency stages. For instance, in a superheterodyne receiver, each if and rf coil may be mounted in a separate shield can. Baffle plates may be mounted on the ganged tuning capacitor to shield each section of the capacitor from the other section. The oscillator coil may be especially well shielded by being mounted under the chassis.

The shielding precautions required in a receiver depend on the design of the receiver and the layout of the parts. In all receivers having high-gain high-frequency stages, it is necessary to shield separately each tube in high-frequency stages. When metal tubes, and in particular the single-ended types, are used, complete shielding of each tube is provided by the metal shell which is grounded through its grounding pin as the socket terminal. The grounding connection should be short and sturdy. Many modern tubes of glass construction have internal shields, usually connected to the cathode: where present. these shields are indicated in the socket diagram.

Dress of Circuit Leads


At high frequencies such as are encountered in FM and television receivers, lead dress, that is, the location and arrangement of the leads used for connections in the receiver, is very important. Because even a short lead provides a large impedance at high frequencies, it is necessary to keep all high-frequency leads as short as possible. This precaution is especially important for ground connections and for all connections to bypass capacitors and high-frequency filter capacitors. The ground connections of plate and screen-grid bypass capacitors of each tube should be kept short and made directly to cathode ground.

Particular care should be taken with the lead dress of the input and output circuits of high-frequency stages so that the possibility of stray coupling is minimized. Unshielded leads connected to shielded components should be dressed close to the chassis. As the frequency increases, the need for careful lead dress becomes increasingly important.

In high-gain audio amplifiers, these same precautions should be taken to minimize the possibility of self-oscillation.

Filters

Feedback effects also are caused in radio or television receivers by coupling between stages through common voltage-supply circuits. Filters find an important use in minimizing such effects. They should be placed in voltage-supply leads to each tube in order to return the signal current through a low-impedance path direct to the tube cathode rather than by way of the voltage-supply circuit. Fig. 90 illustrates several forms of filter circuits. Capacitor C forms the



low-impedance path, while the choke or resistor assists in diverting the signal through the capacitor by offering a high impedance to the power-supply circuit.

The choice between a resistor and a choke depends chiefly upon the permissible dc voltage drop through the filter. In circuits where the current is small (a few milliamperes), resistors are practical; where the current is large or regulation important, chokes are more suitable.


The minimum practical size of the capacitors may be estimated in most cases by the following rule: The impedance of the capacitor at the lowest frequency amplified should not be more than one-fifth of the impedance of the filter choke or resistor at that frequency. Better results will be obtained in special cases if the ratio is not more than onetenth.

Radio-frequency circuits, particularly at high frequencies, require highquality capacitors. Mica or ceramic capacitors are preferable. Where stage shields are employed, filters should be placed within the shield.

Another important application of filters is to smooth the output of a rectifier tube. See Rectification. A smoothing filter usually consists of capacitors and iron-core chokes. In any filter-design problem, the load impedance must be considered as an integral part of the filter because the load is an important factor in filter performance. Smoothing effect is obtained from the chokes because they are in series with the load and offer a high impedance to the ripple voltage. Smoothing effect is obtained from the capacitors because they are in parallel with the load and store energy on the voltage peaks; this energy is released on the voltage dips and serves to maintain the voltage at the load substantially constant. Smoothing filters are classified as choke-input or capacitor-input according to whether a choke or capacitor is placed next to the rectifier tube. See Fig. 91.

The CIRCUIT SECTION gives a number of examples of rectifier circuits with recommended filter constants.


If an input capacitor is used, consideration must be given to the instan-

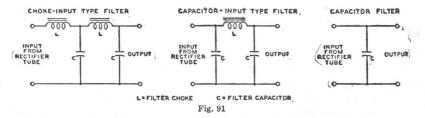

taneous peak value of the ac input voltage. This peak value is about 1.4 times the rms value as measured by an ac voltmeter. Filter capacitors, therefore, especially the input capacitor, should have a rating high enough to withstand the instantaneous peak value if breakdown is to be avoided. When the inputchoke method is used, the available dc output voltage will be somewhat lower than with the input-capacitor method for a given ac plate voltage. However, improved regulation together with lower peak current will be obtained.

Mercury-vapor and gas-filled rectifier tubes occasionally produce a form of local interference in radio receivers through direct radiation or through the power line. This interference is generally identified in the receiver as a broadly tunable 120-cycle buzz (100 cycles for 50-cycle supply line, etc.). It is usually caused by the formation of a steep wave front when plate current within the tube begins to flow on the positive half of each cycle of the ac supply voltage.

There are several ways of eliminating this type of interference. One is to shield the tube. Another is to insert an rf choke having an inductance of one millihenry or more between each plate and transformer winding and to connect high-voltage, rf bypass capacitors between the outside ends of the transformer winding and the center tap. (See Fig. 92.) The rf chokes should be placed within the shielding of the tube. The rf bypass



capacitors should have a voltage rating high enough to withstand the peak voltage of each half of the secondary, which is approximately 1.4 times the rms value.


Transformers having electrostatic shielding between primary and secondary are not likely to transmit rf disturbances to the line. Often the interference may be eliminated simply by making the plate leads of the rectifier extremely short. In general, the particular method of interference elimination must be selected by experiment for each installation.

Output-Coupling Devices

An output-coupling device is used in the plate circuit of a power output tube to keep the comparatively high dc plate current from the winding of an electromagnetic speaker and, also, to transfer power efficiently from the output stage to a loudspeaker of either the electromagnetic or dynamic type.

Output-coupling devices are of two types, (1) choke-capacitor and (2) transformer. The choke-capacitor type includes an iron-core choke having an inductance of not less than 10 henries which is placed in series with the plate and B-supply. The choke offers a very low resistance to the dc plate current component of the signal voltage but opposes the flow of the fluctuating component. A bypass capacitor of 2 to 6 microfarads supplies a path to the speaker winding for the signal voltage. The choke-coil output coupling device, however, is now only of historical interest.

The transformer type is constructed with two separate windings, a primary and a secondary wound on an iron core. This construction permits designing each winding to meet the requirements of its position in the circuit. Typical arrangements of each type of coupling device are shown in Fig. 93. Examples of transformers for push-pull stages are shown



in several of the circuits given in the CIRCUIT SECTION.

High-Fidelity Systems

The results achieved from any high-

fidelity amplifier system depend to a large degree upon the skill and care with which the system is constructed. Improper placement of transformers, other components, and wiring, and attempts to achieve excessive compactness, can only result in instability, oscillation, hum, and other operating difficulties, as well as in damage to components by overheating. It is important, therefore, that construction of high-fidelity amplifier systems be undertaken only by persons who have had some experience in the layout, mechanical construction, and wiring of audio equipment.

-

It is impractical to give specific construction data for various amplifiers and supplementary units because the best arrangement for each unit or combination of units will depend on the requirements of the user. It is possible, however, to list some general considerations which should be observed in the construction of any high-fidelity amplifier system.

Any amplifier having two or more stages should be constructed with a straight-line layout so that maximum separation is provided between the signal input and output circuits and terminals. Power-supply connections, particularly those carrying ac, should be isolated as far as possible from signal connections, especially from the input connection. Signal-carrying conductors, even when shielded, should not be cabled together with power-supply conductors. Internal wiring for ac-operated tube heaters, switches, pilot-light sockets, and other devices, should be twisted and placed flat against the chassis. All connections to the ground side of the circuit in each unit should be made to a common bus of heavy wire. This bus should be connected to the chassis only at the point of minimum signal voltage, i.e., at the signal-input terminal of the unit.

All internal wiring that carries signal voltages should be as short as possible, and as far as possible above the chassis, to minimize losses at the higher audio frequencies due to stray shunt capacitance. All connections between units should be made with shielded cable having a capacitance of not more than 30 picofarads per foot, such as Alpha Type 1249 or 1704, Belden Type 8401 or 8410, or equivalent cable.

Because power amplifiers and power-supply units of high-fidelity systems normally dissipate large amounts of heat, they should be constructed and installed in such a manner as to assure adequate ventilation for the tubes and other components. A beam power tube or rectifier tube should be separated from any other tube or component on the same side of the chassis by at least $1\frac{1}{2}$ tube diameters.

Power amplifiers and power-supply units which are to be installed horizontally (i.e., with the tubes vertical) in cabinets or on shelves should be provided with mounting feet, perforated bottom covers, and a number of small holes around each tube socket to permit relatively cool air to enter from below and provide ventilation for the under side of the chassis and tubes.

If a power amplifier, tone-control amplifier, and one or more preamplifiers are to be constructed on the same chassis. the mechanical layout should be planned so that the circuits operating at the lowest signal levels are farthest from the output stage and power supply. Amplifier units which normally operate at comparable signal levels but are not used simultaneously (such as preamplifiers for tape pickup heads and magnetic phonograph pickups) may be installed side by side on the same chassis without danger of interaction. Units which operate simultaneously, however (such as the channels of a stereophonic system), should not be installed side by side on the same chassis without careful consideration to placement of components and wiring, and the possible use of shielding to prevent interaction.

When an amplifier, preamplifier, mixer, or other unit requiring heater power is located more than five or six feet from its power-supply unit, the heater-current conductors in the powersupply cable must be large enough to assure that each tube receives its rated heater voltage. In cases where very large heater currents or very long power-supply cables are involved, it may be desirable to install a heater-supply transformer on or near the amplifier unit. If such a transformer is installed on or near a preamplifier for a magnetic-tape pickup head, a magnetic phonograph pickup, or a dynamic microphone, the transformer should be completely shielded and positioned to prevent its field from inducing hum in the pickup device.

High-Voltage Considerations for Television Picture Tubes

Like other high-voltage devices, television picture tubes require that certain precautions be observed to minimize the possibility of failure caused by humidity, dust, and corona.

Humidity Considerations. When humidity is high, a continuous film of moisture may form on the glass bulb immediately surrounding the ultor cavity cap of all-glass picture tubes or on the glass part of the envelope of metal picture tubes. This film may permit sparking to take place over the glass surface to the external conductive coating or to the metal shell. Such sparking may introduce noise into the receiver. To prevent such a possibility, the uncoated bulb surface around the cap and the glass part of the envelope of metal picture tubes should be kept clean and dry.

Dust Considerations. The accumulation of dust on the uncoated area of the bulb around the ultor cap of all-glass picture tubes or on the glass part of the envelope or insulating supports for metal picture tubes will decrease the insulating qualities of these parts. The dust usually consists of fibrous materials and may contain soluble salts. The fibers absorb and retain moisture; the soluble salts provide electrical leakage paths that increase in conductivity as the humidity increases. The resulting high leakage currents may overload the high-voltage power supply.

It is recommended, therefore, that the uncoated bulb surface of all-glass picture tubes and the coated glass surface and insulating supports for metal picture tubes be kept clean and free from dust or other contamination such as finger-prints. The frosted Filterglass faceplate of the metal picture tubes may be cleaned with a soapless detergent, such as Dreft, then rinsed with clean water, and immediately dried.

Corona Considerations. A highvoltage system may be subject to corona, especially when the humidity is high, unless suitable precautions are taken. Corona, which is an electrical discharge appearing on the surface of a conductor when the voltage gradient exceeds the breakdown value of air, causes deterioration of organic insulating materials through formation of ozone, and induces arc-over at points and sharp edges. Sharp points or other irregularities on any part of the high-voltage system may increase the possibility of corona and should be avoided.

In the metal-shell picture tubes, the metal lip at the maximum diameter has rounded edges to prevent corona. Adequate spacing between the lip and any grounded element in the receiver, or between the small end of the metal shell and any grounded element, should be provided to preclude the possibility of corona. Such spacing should not be less than 1 inch of air. Similarly, an air space of 1 inch. or equivalent, should be provided around the body of the metal shell. As a further precaution to prevent corona, the deflecting-yoke surface on the end adjacent to the shell should present a smooth electrical surface with respect to the small end of the metal shell or the ultor terminal of all-glass tubes.

Picture-Tube Safety Considerations

Tube Handling. Breakage of picture tubes, which contain a high vacuum, may result in injury from flying glass. Do not strike or scratch the tube or subject it to more than moderate pressure when installing it in or removing it from electronic equipment.

High-Voltage Precautions. In picture-tube circuits, high voltages may appear at normally low-potential points in the circuit because of capacitor breakdown or incorrect circuit connections. Therefore, before any part of the circuit is touched the power-supply switch should be turned off, the power plug disconnected, and both terminals of any capacitors grounded.

X-Ray Radiation Precautions. All types of picture tubes may be operated at voltages (if ratings permit) up to 16 kilovolts without producing harmful x-ray radiation or danger of personal injury on prolonged exposure at close range. Above 16 kilovolts, special x-ray shielding precautions may be necessary.

Interpretation of Tube Data

The tube data given in the following TUBE TYPES SECTION include ratings, typical operation values, characteristics, and characteristic curves.

The values for grid-bias voltages, other electrode voltages, and electrode supply voltages are given with reference to a specified datum point as follows: For types having filaments heated with dc, the negative filament terminal is taken as the datum point to which other electrode voltages are referred. For types having filaments heated with ac, the mid-point (i.e., the center tap on the filament-transformer secondary, or the midpoint on a resistor shunting the filament) is taken as the datum point. For types having unipotential cathodes indirectly heated, the cathode is taken as the datum point.

Ratings are established on electron tube types to help equipment designers utilize the performance and service capabilities of each tube type to best advantage. Ratings are given for those characteristics which careful study and experience indicate must be kept within certain limits to insure satisfactory performance.

Three rating systems are in use by the electron-tube industry. The oldest is known as the Absolute Maximum system, the next as the Design Center system, and the latest and newest as the Design Maximum system. Definitions of these systems have been formulated by the Joint Electron Tube Engineering Council (JETEC)* and standardized by the National Electrical Manufacturers Association (NEMA) and the Electronic Industries Association (EIA) as follows:

Absolute Maximum ratings are limiting values which should not be exceeded with any tube of the specified type under any condition of operation. These ratings are used only in rare instances for receiving types, but are gen-


*Now identified as the Joint Electron Device Engineering Council (JEDEC). erally used for transmitting and industrial types.

Design Center ratings are limiting values which should not be exceeded with a tube of the specified type having characteristics equal to the published values under normal operating conditions. These ratings, which include allowances for normal variations in both tube characteristics and operating conditions, were used for most receiving tubes prior to 1957. Unless specified otherwise, ratings given in the TUBE TYPES SECTION are based on the Design Center System.

Design Maximum ratings are limiting values which should not be exceeded with a tube of the specified type having characteristics equal to the published values under any conditions of operation. These ratings include allowances for normal variations in tube characteristics, but do not provide for variations in operating conditions. Design Maximum ratings were adopted for receiving tubes in 1957.

Electrode voltage and current ratings are in general self-explanatory, but a brief explanation of other ratings will aid in the understanding and interpretation of tube data.

Heater warm-up time is defined as the time required for the voltage across the heater to reach 80 per cent of the rated value in the circuit shown in Fig. 94. The heater is placed in series with a




resistance having a value 3 times the nominal heater operating resistance (R = 3 E_t/I_t), and a voltage having a value 4 times the rated heater voltage (V = 4 E_t) is then applied. The warm-up time is determined when E = 0.8 E_t .

Plate dissipation is the power dissipated in the form of heat by the plate as a result of electron bombardment. It is the difference between the power supplied to the plate of the tube and the power delivered by the tube to the load.

Grid-No.2 (Screen-grid) Input is the power applied to the grid-No. 2 electrode and consists essentially of the power dissipated in the form of heat by grid No.2 as a result of electron bombardment. With tetrodes and pentodes, the power dissipated in the screen-grid circuit is added to the power in the plate circuit to obtain the total B-supply input power.

When the screen-grid voltage is supplied through a series voltage-dropping resistor, the maximum screen-grid voltage rating may be exceeded, provided the maximum screen-grid dissipation rating is not exceeded at any signal condition, and the maximum screen-grid voltage rating is not exceeded at the maximum-signal condition. Provided these conditions are fulfilled, the screengrid supply voltage may be as high as, but not above, the maximum plate voltage rating.

For certain voltage amplifier types. as listed in the data section, the maximum permissible screen-grid (grid-No.2) input varies with the screen-grid voltage. as shown in Fig. 95. (This curve cannot be assumed to apply to types other than those for which it is specified in the data section.) Full rated screen-grid input is permissible at screen-grid voltages up to 50 per cent of the maximum rated screengrid supply voltage. From the 50-percent point to the full rated value of supply voltage, the screen-grid input must be decreased. The decrease in allowable screen-grid input follows a curve of the parabolic form. This rating chart is useful for applications utilizing either a fixed screen-grid voltage or a series screengrid voltage-dropping resistor. When a fixed voltage is used, it is necessary only to determine that the screen-grid input is within the boundary of the operating area on the chart at the selected value of screen-grid voltage to be used. When a voltage-dropping resistor is used, the

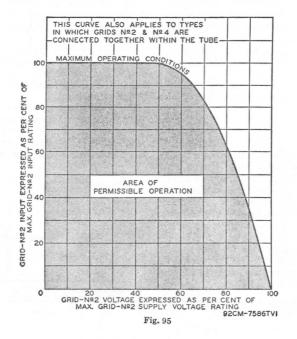

minimum value of resistor that will assure tube operation within the boundary of the curve can be determined from the following relation:

$$R_{g_2} \geq \frac{E_{c_2} (E_{cc_2} - E_{c_2})}{P_{c_2}}$$

where R_{g2} is the minimum value for the voltage-dropping resistor in ohms, E_{c2} is the selected screen-grid voltage in volts, E_{cc2} is the screen-grid supply voltage in volts, and P_{c2} is the screen-grid input in watts corresponding to E_{c2} .


Peak heater-cathode voltage is the highest instantaneous value of voltage that a tube can safely stand between its heater and cathode. This rating is applied to tubes having a separate cathode terminal and used in applications where excessive voltage may be introduced between heater and cathode.

Maximum dc output current is the highest average plate current which can be handled continuously by a rectifier tube. Its value for any rectifier tube type is based on the permissible plate dissipation of that type. Under operating conditions involving a rapidly repeating duty cycle (steady load), the average plate current may be measured with a dc meter.

The nomograph shown in Fig. 96 can be used to determine tube voltage drop or plate current for any diode unit when values for a single plate-voltage, plate-current condition are available from the data. It can also be used to compare the relative perveance $(G = I_b/E_b^{3/2})$ of several diodes. Perveance can be considered a figure of merit for diodes; high-perveance units have lower voltage drop at a fixed current level.

Tube voltage drop or plate current for a specific diode unit can be determined as follows: First, convenient values are selected for the plate-voltage and plate-current scales of the nomograph. The published plate-current and platevoltage values are then located on the scales and connected with a straight edge. The intersection of the connecting line with the perveance scale is then used as a pivot point to determine the value of tube voltage drop corresponding to a desired current value, or the value of plate current corresponding to a desired tube voltage drop. Because the pivot point for a specific diode unit represents its perveance, the pivot points for several units (plotted to the same scales) can be used to compare their relative perveance.

For example, type 5U4GB has a tube voltage drop (per plate) of 44 volts at a plate current of 225 milliamperes.

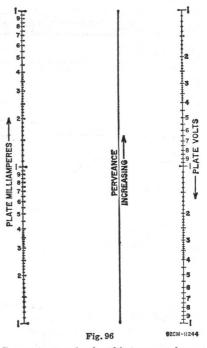

Convenient scales for this type are from 1 to 100 volts for plate voltage and from 10 to 1000 milliamperes for plate current. The points 44 volts and 225 milliamperes are then connected with a straight line to determine the pivot point. Using this pivot point, it is easy to determine such values as a plate current of 150 milliamperes at a tube voltage drop of 33 volts, or a voltage drop of 25 for a current of 100 milliamperes.


For readings in the order of one volt and/or one milliampere, the nomograph is not accurate because of the effects of contact potential and initial electron velocity.

Maximum peak plate current is the highest instantaneous plate current that a tube can safely carry recurrently in the direction of normal current flow. The safe value of this peak current in hot-cathode types of rectifier tubes is a function of the electron emission available and the duration of the pulsating current flow from the rectifier tube in each half-cycle.

The value of peak plate current in a given rectifier circuit is largely determined by filter constants. If a large choke is used at the filter input, the peak plate current is not much greater than the load current; but if a large capacitor is used as the filter input, the peak current may be many times the load current. In order to determine accurately the peak plate current in any rectifier circuit, measure it with a peak-indicating meter or use an oscillograph.

Maximum peak inverse plate voltage is the highest instantaneous plate voltage which the tube can withstand recurrently in the direction opposite to that in which it is designed to pass current. For mercury-vapor tubes and gasfilled tubes, it is the safe top value to prevent arc-back in the tube operating within the specified temperature range.

Referring to Fig. 97, when plate A of a full-wave rectifier tube is positive, current flows from A to C, but not from B to C, because B is negative. At the instant plate A is positive, the filament is positive (at high voltage) with respect to plate B. The voltage between the positive filament and the negative plate B is





in inverse relation to that causing current flow. The peak value of this voltage is limited by the resistance and nature of the path between plate B and filament. The maximum value of this voltage at which there is no danger of breakdown of the tube is known as maximum peak inverse voltage.

The relations between peak inverse voltage, rms value of ac input voltage, and dc output voltage depend largely on the individual characteristics of the rectifier circuit and the power supply. The presence of line surges or any other transient, or wave-form distortion, may raise the actual peak voltage to a value higher than that calculated for sine-wave voltages. Therefore, the **actual** inverse voltage, and not the calculated value, should be such as not to exceed the rated maximum peak inverse voltage for the rectifier tube. A calibrated cathode-ray oscillograph or a peak-indicating electronic voltmeter is useful in determining the actual peak inverse voltage.

In single-phase, full-wave circuits with sine-wave input and with no capacitor across the output, the peak inverse voltage on a rectifier tube is approximately 1.4 times the rms value of the plate voltage applied to the tube. In single-phase, half-wave circuits with sine-wave input and with capacitor input to the filter, the peak inverse voltage may be as high as 2.8 times the rms value of the applied plate voltage. In polyphase circuits, mathematical determination of peak inverse voltage requires the use of vectors.

The Rating Chart for full-wave rectifiers presents graphically the relationships between maximum ac voltage input and maximum dc output current derived from the fundamental ratings for conditions of capacitor-input and choke-input filters. This graphical presentation provides for considerable latitude in choice of operating conditions.

The Operation Characteristics for a full-wave rectifier with capacitorinput filter show by means of boundary line the limiting current and voltage relationships presented in the Rating Chart.

The **Operation** Characteristics for a full-wave rectifier with choke-input filter not only show by means of boundary line the limiting current and voltage relationships presented in the Rating Chart, but also give some information as to the effect on regulation of various sizes of chokes. The solid-line curves show the dc voltage outputs which would be obtained if the filter chokes had infinite inductance. The long-dash lines radiating from the zero position are boundary lines for various sizes of chokes as indicated. The intersection of one of these lines with a solid-line curve indicates the point on the curve at which the choke no longer behaves as though it had infinite inductance. To the left of the choke boundary line, the regulation curves depart from the solid-line curves as shown by the representative shortdash regulation curves.

Typical Operation Values. Values for typical operation are given for many types in the TUBE TYPES SECTION. These typical operating values are given to show concisely some guiding information for the use of each type. These values should not be confused with ratings, because a tube can be used under any suitable conditions within its maximum ratings, according to the application.

The power output value for any operating condition is an approximate tube output—that is, plate input minus plate loss. Circuit losses must be subtracted from tube output in order to determine the useful output.


Characteristics are covered in the ELECTRON TUBE CHARACTER-ISTICS SECTION and such data should be interpreted in accordance with the definitions given in that section. Characteristic curves represent the characteristics of an average tube. Individual tubes, like any manufactured product, may have characteristics that range above or below the values given in the characteristic curves.

Although some curves are extended well beyond the maximum ratings of the tube, this extension has been made only for convenience in calculations. Do NOT operate a tube outside of its maximum ratings.

Interelectrode capacitances are direct capacitances measured between specified elements or groups of elements in electron tubes. Unless otherwise indicated in the data, all capacitances are measured with filament or heater cold, with no direct voltages present, and with no external shields. All electrodes other than those between which capacitance is being measured are grounded. In twin or multi-unit types, inactive units are also grounded.

The capacitance between the input electrode and all other electrodes, except the output electrode, connected together is commonly known as the input capacitance. The capacitance between the output electrode and all other electrodes, except the input electrode, connected together is known as the output capacitance.


Hum and noise characteristics of high-fidelity audio amplifier tube types such as the 7025 and the 7199 are tested in an amplifier circuit such as that shown in Fig. 98. The output of the test circuit is fed into a low-noise amplifier. The




bandwidth of this amplifier depends on the characteristic being measured. If hum alone is being tested, a relatively narrow bandwidth is used to include both the line frequency and the major harmonics generated by the tube under test. In noise or combination hum-and-noise measurements, the bandwidth is defined in the registration of the tube type.

The amplifier gain is calibrated so that the vacuum-tube voltmeter measures hum and noise in microvolts referenced to the grid of the tube under test. A pentode can also be evaluated in this manner by the addition of a screen-grid supply adequately bypassed at the tube screen-grid pin connection. Power-supply ripple at the plate of the tube under test must be negligible compared to its hum and noise output. Extraordinary shielding of both the test socket and the associated operating circuit is required to minimize capacitances between heater leads and high-impedance connections.

The test-circuit components are determined by the tube type being tested and the type of hum to be controlled. Heater-cathode hum can be eliminated from the measurement by closing S_1 . The circuit can also be made more or less sensitive to heater-grid hum by increasing or decreasing the grid resistance R_g . No circuit changes affect the component of magnetic hum generated by the tube.

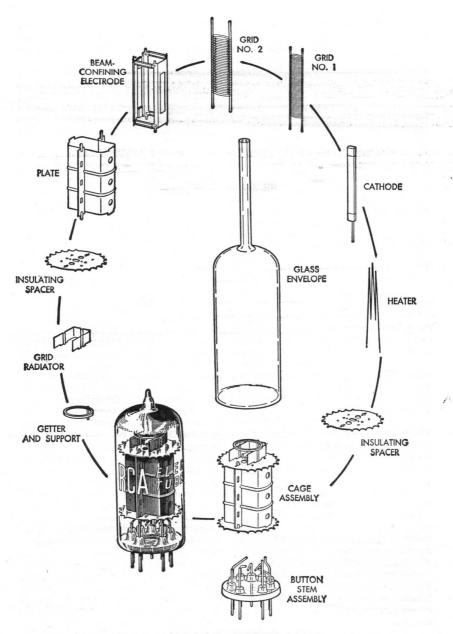

Parts of a Novar Tube



In the Application Guide on the following pages, RCA receiving tubes are classified in two ways: (a) by function, and (b) by structure (diode, triode, etc.). The functional classification covers 38 principal types of application, as listed below.

Tube types are grouped by structure under each classification; they are also keved to indicate miniature. octal. nuvistor, and novar types.

Triodes are designated as low-, medium-, or high-mu types on the following basis: low, less than 10; medium, 10 or more, but less than 50; high, 50 or more.

Where applicable, tubes are designated as sharp-, semiremote, or remote-cutoff on the basis of the ratio, in per cent, of the negative control-grid voltage to the screen-grid voltage (or, for triodes, the plate voltage) as given in the characteristics or typical operation values. These terms are defined as follows: sharp, less than 10 per cent; semiremote, 10 or more, but less than 20 per cent; remote, 20 per cent or more.

For more complete data on these types, refer to the TECHNICAL DATA FOR RCA RECEIVING TUBES starting on page 83.

1. Audio-Frequency Amplifiers

- 2. Automatic Gain Control (AGC and AVC) Circuits
- 3. Burst Amplifiers
- 4. Cathode-Drive RF Amplifiers (Grounded-Grid)
- 5. Color Killers
- 6. Color Matrixing Circuits
- 7. Complex-Wave
- Generators 8. Converters
- 9. Dampers
- 10. Demodulators (Color TV)
- **11.** Detectors
- **12. DC Restorers**

APPLICATIONS:

- **13.** Discriminators
- **14. Frequency Dividers**
- **15. FM Detectors**
- 16. Gated Noise, AGC, and Sync Amplifiers
- **17. Harmonic Generators**
- 18. Horizontal-Deflection Circuits
- **19. Intermediate-Frequency** Amplifiers
- 20. Limiters
- 21. Mixers-RF
- 22. Mixer-Oscillators-RF
- 23. Multivibrators
 - 24. Noise Inverters
- **25.** Oscillators

- **26.** Phase Inverters
- **27. Phase Splitters**
- 28. Radio-Frequency Amplifiers
- **29. Reactance Circuits**
- **30. Rectifiers**
- **31.** Regulators
- **32. Relay Control Circuits**
- **33. Sync Amplifiers**
- **34. Sync Clippers**
- **35. Sync Separators**
- **36.** Tuning Indicators
- **37. Vertical-Deflection**
- Circuits **38. Video Amplifiers**

| 1. AUDIO-F AMPLIF | REQUENCY | | High-Mu Trio o 12SF5 | de | |
|----------------------|----------------|---------------|-------------------------|-----------------|-----------------|
| ANIT LIL | 112105 | | High-Mu Trio | de with Twin D | liode |
| Voltage Amp | lifiers | | • 3AV6 | • 6CN7 | o 12SQ7 |
| 1 0110800 111117 | | | • 4AV6 | o 6SQ7 | o 12SQ7GT |
| Medium-Mu T | riode with Twi | n Diode | • 6AT6 | o 6SQ7GT | • 14GT8 |
| • 6BF6 | • 12BF6 | o 12SR7 | • 6AV6 | • 12AT6 | • 18FY6 |
| 0 6SR7 | | | • 6BN8 | • 12AV6 | • 18FY6A |
| Medium-Mu T | riode-Sharp-O | ntoff Pentode | High-Mu Trie | ode with Triple | Diode |
| • 7199 † | rioue—sharp-e | anon remote | • 5T8 | • 6T8A | • 19 T 8 |
| | | | High-Mu Twi | n Triode | |
| Medium-Mu T | win Triode | | • 6EU7 † | • 12AZ7 | o 12SL7GT |
| • 5J6 | • 7AU7 | o 12SN7GTA | o 6SL7GT | • 12AZ7A | • 20EZ7 |
| • 6J6A | • 9AU7 | • 19J6 | • 12AX7 † | • 12BZ7 | • 7025 † |
| o 6SN7GTB | • 12AU7A | | • 12AX7A† | | |

Novar

 Miniature o Octal ▷ Nuvistor

+ For high-fidelity equipment.

| | | | 1 | | |
|--------------------------|--------------------|-----------------------|-----------------------|----------------------------|---------------|
| Sharp-Cutoff P | entode | | Sharp-Cutoff | Twin Pentode | |
| • 3DT6A* | • 6DT6A* | • 5879 † | • 3BU8 | • 4BU8 | • 6BU8 |
| • 4DT6A* | • 6GX6* | • 7543 † | • 3GS8 | • 4GS8 | • 6HS8 |
| • 5GX6* | • 6HZ6* | | | | |
| Remote-Cutoff • 12CR6 | Pentode with Die | ode | 3. BURST | AMPLIFIERS | 5 |
| D 4 7 | | | Medium-Mu | Triode-Sharp-Co | utoff Pentode |
| Power Ampli | ifie rs | | • 5EA8 | • 6EA8 | • 6GH8A |
| Power Triode 2A3 | | | • 5GH8 High-Mu Tri | • 6GH8 ode with Twin Di | iodes |
| Beam Power T | ube | | • 6BN8 | | |
| • 5AQ5 | o 6L6GC† | • 25F5A | | | |
| • 5CZ5 | o 6V6 | • 34GD5 | | DE-DRIVE RI | AMDIT |
| o 5V6GT | o 6V6GTA | • 34GD5A | | | |
| • 6AQ5A | 0 6W6GT | • 35B5 | FIERS | (GROUNDED- | GRID) |
| • 6AS5 | 0 6Y6G | • 35C5 | | | |
| • 6CM6 | • 12AB5 | o 35L6GT | Medium-Mu | Triode | |
| • 6CU5 | • 12AQ5 | • 50B5 | • 6BC4 | | |
| • 6CZ5 | • 12CA5 | • 50C5 | Medium-Mu | Twin Triode | |
| • 6DG6GT | • 12CU5/12C5 | o 50FE5 | • 4BC8 | • 5BK7A | • 6B07A |
| • 6DS5 | 0 12L6GT | o 50L6GT | • 4B07A | • 5B07A | • 6BS8 |
| ▶ 6GC5 | 0 12V6GT | • 6973 † • 7027A † | • 4BS8 | • 6BC8 | • 6BZ7 |
| 0 6FE5 | o 12W6GT ● 25C5 | o 7408 † | • 4BZ7 | • 6BK7A | • 6FW8 |
| o 6L6 o 6L6GB † | • 2363 | 0 / 400 | | | |
| | | | High-Mu Tri | | |
| Power Pentode | | | ⊳2CW4 | • 6AB4 | ⊳ 6DS4 |
| • 6BQ5 | • 8BQ5 | • 50FK5 | ⊳2DS4 | ⊳6CW4 | |
| • 6EH5 | • 12EH5 | • 60FX5 | High-Mu Tw | in Triode | |
| o 6F6 | • 25EH5 | •7189† | • 6DT8 | • 12AZ7 | • 12DT8 |
| • 6GK6 • 6K6GT | • 35EH5 • 50EH5 | ▶ 7868 † | • 12AT7 | • 12AZ7A | |
| OOROGI | • JOEHJ | | | | |
| 2. AUTOMA | TIC GAIN CO | NTROL | 5 COLOR | KILLERS | |
| | S (AGC & AVC | | J. COLOR | KILLERS | |
| diffeoti | o (nou a nit | ., | Quadruple D | liode | |
| Diode-Sharp- | Cutoff Pentode | | • 6JU8 | | |
| • 6KL8 | • 12KL8 | | | | |
| Diode-Remot | e-Cutoff Pentode | | 6 COLOR | MATRIXING | CIRCUITS |
| • 6EQ7 | • 12EQ7 | • 20EQ7 | | | cincorre |
| Twin Diode-I | Medium Mu Triod | le | Medium-Mu | | |
| • 6BF6 | • 12BF6 | o 12SR7 | • 6CG7 | • 6GU7 | • 8FQ7 |
| o 6SR7 | | | • 6FQ7 | • 8CG7 | • 12BH7A |
| Twin Diode—I | High-Mu Triode | | | | |
| • 3AV6 | o 6SQ7 | o 12SQ7 | 7. COMPL | EX-WAVE GE | NERA- |
| • 4AV6 | 0 6SQ7GT | o 12SQ7GT | TORS | | |
| • 6AT6 | • 12AT6 | • 18FY6 | 10100 | | |
| • 6AV6 | • 12AV6 | • 18FY6A | High-Mu Tw | in Double-Plate T | Triode |
| Medium-Mn Ti | riode—Sharp-Cut | off Pentode | • 12FQ8 | | |
| • 5AN8 | • 6BA8A | • 6CU8 | a. a. a | | 1 D: 1 |
| • 5GH8 | • 6BH8 | • 6GH8 | | Twin-Plate Tetro | de-Diode |
| • 6AN8A | • 6CH8 | • 6GH8A | • 6FA7 | | |
| • 6AZ8 | | | | Three-Plate Tetre | ode—Diode |
| High-Mu Triod | le—Sharp-Cutoff | Pentode | • 6KM8 | | |
| • 6AW8A | • 8AW8A | • 8JV8 | Three-Plate | Tetrode—Medium | 1-Mu Triode |
| • 6JV8 | | | • 6FH8 | | |
| | | | | | |

● Miniature ○ Octal ▷ Nuvistor ▶ Novar * Dual-control grids † For high-fidelity equipment

Application Guide

8. CONVERTERS

| | | | I | | |
|------------------|--|---------------------|------------------------|----------------------------|---------------|
| 8. CONVER | | | Twin Diode—I • 6BF6 | Medium-Mu Triod • 12BF6 | e 0 12SR7 |
| Medium-Mu T | riode-Sharp-Cuto | off Pentode | o 65R7 | | |
| • 5EA8 | • 5X8 | • 6KE8 | Twin Diode_1 | High-Mu Triode | |
| • 5GH8 | • 6EA8 | • 6U8A | • 3AV6 | • 6CN7 | o 12SQ7 |
| • 5KE8 | • 6GH8 | • 6X8 | • 4AV6 | o 6SQ7 | o 12SQ7G7 |
| • 5U8 | • 6GH8A | • 19X8 | • 6AT6 | • 6SQ7GT | • 14GT8 |
| High-Mu Twin | Triode | | • 6AV6 | • 12AT6 | • 18FY6 |
| • 6DT8 | • 12AZ7 | • 12DT8 | • 6BN8 | • 12AV6 | • 18FY6A |
| • 12AT7 | • 12AZ7A | | | | |
| G1 G m F | | - | Triple Diode | | |
| Sharp-Cutoff F | | | • 6BJ7 | | |
| • 6AU6 | • 12AU6 | • 18GD6A | Triple Diode- | -High-Mu Triode | |
| Pentagrid | | | • 5T8 | • 6T8A | • 19T8 |
| • 6BA7 | • 12BA7 | o 12SA7GT | | | |
| • 6BE6 | • 12BE6 | • 18FX6 | Quadruple Dio | ode | |
| 0 6SA7 | o 12SA7 | • 18FX6A | • 6JU8 | | |
| o 6SA7GT | | | Sharp-Cutoff P | ontodo | |
| | | | • 3DT6A* | • 5GX6* | • 6GX6* |
| 9. DAMPER | 25 | | • 4DT6A* | • 6DT6A* | • 6HZ6* |
| 9. DAMI LI | 1.5 | | • 4DIOA | • ODIOA+ | • OHZO- |
| Half-Wave (Di | , | | 12. DC RES | TORERS | |
| o 6AU4GTA | • 6W4GT | ▶ 17BS3 | Diodo Shann | Cutoff Pentode | |
| o 6AX4GT | o 12AX4GTA | o 17D4 | • 5AM8 | • 6AM8A | • 6AS8 |
| o 6AX4GTB | o 12AX4GTB | o 17DE4 | • 5AS8 | • OAMOA | • UASO |
| ▶ 6AY3 ▶ 6BA3 | ▶ 12AY3 ▶ 12BS3 | o 17DM4 | • JASO | | |
| ▶ 6BH3 | • 12B55 • 12D4 | o 19AU4 o 19AU4- | Triple Diode | | |
| ▶ 6BS3 | o 12D4 | GTA | • 6BJ7 | | |
| o 6CO4 | o 17AX4GT | ©1A ▶ 22BH3 | | | |
| o 6DA4 | 0 17AX4GT | • 22DE4 | 13. DISCRIM | MINATORS | |
| o 6DE4 | ▶ 17AY3 | o 25AX4- | 7774 | | |
| o 6DM4 | ▶ 17BH3 | GT | FM | | |
| ▶ 6DW4 | , TIDHO | 01 | Twin Diode | | |
| | | | • 3AL5 | • 6AL5 | • 12AL5 |
| 10 DEMOD | ULATORS (CC | | 70 · D· I · T | | |
| TO. DEMOD | ULATURS (UL | LUK IV) | | ligh-Mu Triode | |
| Medium-Mu T | win Triode | | • 6BN8 | • 14GT8 | |
| • 12BH7A | | | Triple Diode- | High-Mu Triode | |
| | | | • 5T8 | • 6T8A | • 19T8 |
| High-Mu Twin | | | D (7) 1 | | |
| • 12AZ7 | • 12AZ7A | | Beam Tube | 1771 | (1) |
| Sharp-Cutoff P | entode | | • 3BN6 | • 4BN6 | • 6BN6 |
| • 6GY6 | | | FM Quadrati | ure-Grid | |
| | 110 | | - | | |
| Pentagrid Am | plifier | | Sharp-Cutoff P | | - (0) |
| • 6BY6 | | | • 3DT6A* | • 5GY6* | • 6GY6* |
| | TODO | | • 4DT6A* | • 6DT6A* | • 6HZ6* |
| 11. DETEC | TORS | | • 5GX6* | • 6GX6* | |
| D: 1. 61 | C. C. C. D. C. T | | Beam Tube | | |
| | Cutoff Pentode | | • 3BN6 | • 4BN6 | • 6BN6 |
| • 5AM8 • 5AS8 | • 6AM8A • 6AS8 | • 6KL8 | | | |
| • JAS8 | • 0A58 | • 12KL8 | Horizontal A | FC | |
| Diode-Remot | e-Cutoff Pentode | | Twin Diode-H | ligh-Mu Triode | |
| • 6EQ7 | • 12EQ7 | • 20EQ7 | • 6BN8 | • 6CN7 | |
| • 12CR6 | | | | | |
| Twin Diode | | | 14. FREQU | ENCY DIVIDE | RS |
| • 3AL5 | 0 6H6 | o 12H6 | High-Mn Twin | Double-Plate Trie | ode |
| • 6AL5 | • 12AL5 | 012110 | • 12FQ8 | Double-1 mie 110 | |
| | | | - 141 (0 | | |
| . M | 0.1 | | | 4.0 | |

* Dual-control grids

= RCA Receiving Tube Manual ===

| 15. FM DEI | TECTORS | 1 | High-Mu Tric | ode-Sharp-Cuto | off Pentode |
|--------------------|--------------------------|--|-------------------|-----------------------------|-------------|
| (See 13. I | DISCRIMINATO | RS) | • 6AW8A | • 6KV8 | • 8JV8 |
| | | | • 6GN8 | • 8AW8A | • 10HF8 |
| | NOISE, AGC | AND | • 6HF8 • 6JV8 | • 8GN8 | • 11KV8 |
| SYNC AN | IPLIFIERS | | Sharp-Cutoff | Pentode | |
| High Mr. Takad | | | • 3AU6 | • 5EW6 | • 6DC6 |
| • 6KA8 | le-Sharp-Cutoff | Pentode | • 3CB5 | 0 6AB7 | • 6DE6 |
| • OKA8 | • 8KA8 | | • 3CB6 | 0 6AC7 | • 6DK6 |
| Sharp-Cutoff P | entode | 1. | • 3CF6 | • 6AG5 | • 6EJ7 |
| • 6GY6* | | | • 3DK6 | • 6AH6 | • 6EW6 |
| | | 1. | • 3JC6 | • 6AK5 | • 6HS6 |
| Pentagrid Amp | | | • 3JD6" | • 6AU6 | • 6JC6 |
| | • 6BY6 | • 6CS6 | • 4AU6 | • 6AU6A | • 6JD6* |
| • 3CS6 | | | • 4CB6 | • 6BC5 | • 12AU6 |
| | | | • 4EW6 | • 6CB6 | • 12AW6 |
| 17 HARMO | NIC GENERA | TOPS | • 4JC6 | • 6CB6A | • 18GD6A |
| | | | • 4JD6* | • 6CF6 | • 19HS6 |
| (See 7. COMI | PLEX-WAVE GE | NERATORS) | | | |
| | | · · · · · · · · · · · · · · · · · · · | | Pentode with Di | ode |
| 10 1100170 | NTAL-DEFL | ECTION | • 5AM8 | • 6AM8A | • 6KL8 |
| | | ECTION | • 5AS8 | • 6AS8 | • 12KL8 |
| CIRCUIT | ſS | | Semiremote-C | utoff Pentode | |
| 0 '11 ' | | | • 3BZ6 | • 6EH7 | • 6JH6 |
| Oscillators | | | • 4BZ6 | • 6GM6 | • 12BZ6 |
| Medium-Mu Tr | riode-Sharp-Cu | toff Pentode | • 5GM6 | • 6HR6 | • 19HR6 |
| • 5GH8 | • 6GH8 | • 6GH8A | • 6BZ6 | | |
| Medium-Mu Ty | win Triode | | Remote-Cutof | f Pentode | |
| • 6CG7 | • 8CG7 | • 12AU7 | • 6BA6 | • 12BA6 | • 18FW6 |
| • 6FQ7 | • 8FQ7 | • 12BH7A | o 65K7 | o 12SK7 | • 18FW6A |
| o 6SN7GTB | • 9AU7 | o 12SN7- | o 6SK7GT | o 12SK7GT | |
| • 7AU7 | | GTA | Densets Control | | 0.1 |
| Amplifiers | | ~ | • 6EQ7 | f Pentode with 1 • 12EQ7 | • 20EQ7 |
| Beam Power T | ube | Sec. 1. 1. 1. | 20. LIMITH | TRS | |
| o 6AU5GT | 0 6GW6 | o 17BO6- | | | |
| o 6AV5GA | ▶ 6JB6 | GTB | Beam Tube | 4 | |
| o 6BG6A | ▶ 6JE6 | o 17DQ6B | • 3BN6 | • 4BN6 | • 6BN6 |
| o 6BQ6GTB/ | o 12AV5GA | ▶ 17GJ5 | Sharp-Cutoff I | Dontodo | |
| 6CU6 | o 12BO6GTB/ | ▶ 17GT5 | • 3AU6 | • 6GX6 | • 12AU6 |
| o 6CB5A | 12CU6 | 017GW6 | • 4AU | • 6HS6 | o 12SH7 |
| o 6CD6GA | o 12DQ6A | ▶ 17JB6 | • 5GX6 | • 6HZ6 | • 19HS6 |
| o 6DN6 | o 12D06B | ▶ 22JG6 | | 0 6SH7 | • 191150 |
| o 6DQ5 | ▶ 12GJ5 | o 25AV5GA | • 6AU6A | 00511 | |
| o 6DQ6B | ▶ 12GT5 | o 25BQ6- | Sharp-Cutoff I | Pentode with Di | ode |
| 0 6EX6 | o 12GW6 | GTB/25CU6 | • 6KL8 | • 12KL8 | |
| ▶ 6GJ5 | ▶ 12JB6 | • 25CD6GB | - OILLO | | |
| ▶ 6GT5 | | o 25DN6 | 21. MIXER | S-RF | |
| | | | Medium-Mu T | win Triode | |
| 10 INTERM | EDIATE-FRI | EQUENCY | • 5.16 | • 12AV7 | • 19J6 |
| | | Quinting | • 6J6A | | |
| AMPLIF | IERS | | San Street Street | | |
| NO 11 NO 10 | 1 61 6 | of The second second | High-Mu Trio | | |
| • 5CO8 | iode—Sharp-Cut • 6CO8 | on letrode | ⊳2CW4 | • 6AB4 | ⊳6CW4 |
| - | | off Donte la | 22. MIXER | -OSCILLATO | RS-RF |
| | iode-Sharp-Cut | | | riode-Sharp-C | |
| • 5AN8 | • 6AZ8 | • 6CU8 | • 5CL8A | • 6CL8A | |
| | • 6BH8 | • 6CX8 | | . OLLOA | . orfo |
| • 6AN8A • 6AU8A | • 6CH8 | • 8CX8 | • 5CQ8 | | |

● Miniature o Octal ▷ Nuvist
 * Dual-control grids

Approaches semiremote-cutoff characteristic; used in first-if amplifier applications

= Application Guide ===

| Medium-Mu T | 'riode—Sharp-C | utoff Pentode | High-Mu Twir | | |
|---------------------|-----------------|---------------|--------------------|-----------------|------------------|
| • 5AT8 | • 5U8 | • 6FG7 | • 12AX7 | • 12AX7A | |
| • 5B8 | • 5X8 | • 6KE8 | | | |
| • 5BR8 | • 6AT8A | • 6U8A | OF DUACE | INVERTERS | |
| • 5CG8 | • 6BR8A | • 6X8 | 26. PHASE | INVERTERS | , |
| • 5EA8 | • 6CG8A | • 19EA8 | Medium-Mu T | riode—High-Mu | Triode |
| • 5KE8 | • 6EA8 | • 19X8 | • 12DW7 | noue-mgn-me | . Inouc |
| High-Mu Twir | n Triode | | N 1' M T | | |
| • 6DT8 | • 12AT7 | • 12DT8 | Medium-Mu T | • 7AU7 | o 125N7- |
| | | Aller . | • 6CG7 | | GTA |
| Triode-Hexod | e | | • 6GU7 | • 9AU7 | GIA |
| o 6K8 | o 12K8 | | o 6SN7GTB | • 12AU7A | |
| oo MIII TT | VIDDATODS | | High-Mu Trio | de-Sharp-Cutof | f Pentode |
| 23. MULII | VIBRATORS | | • 6AW8A | • 6HF8 | • 8GN8 |
| Medium-Mu T | riode_Sharp-C | utoff Pentode | • 6EB8 | • 8AW8A | • 10HF8 |
| • 5GH8 | • 6GH8 | • 6GH8A | • 6GN8 | • 8EB8 | |
| Medium-Mu T | win Triode | | High-Mu Twi | n Triode | |
| • 6CG7 | • 7AU7 | o 12SN7- | 0 6SC7 | • 12AX7A | o 12SL7GT |
| • 6GU7 | • 9AU7 | GTA | o 6SL7GT | o 12SC7 | • 7025 |
| o 6SN7GTB | • 12AU7A | 01 | • 12AX7 | | |
| High-Mu Twi | Triada | | | | |
| • 12AX7 | • 12AX7A | | 97 DUASE | SPLITTERS | |
| | | | 27. FHASE | SFLITIERS | |
| 24. NOISE | INVERTERS | 5 | Medium-Mu T | Triode-Sharp-Co | utoff Tetrode |
| High-Mu Trio | de-Sharp-Cuto | ff Pentode | • 5CQ8 | • 6CQ8 | |
| • 6KA8 | • 8KA8 | i chiouc | Medium-Mu 7 | riode_Sharp-C | utoff Pentode |
| | | | • 5AN8 | • 6BA8A | • 6CU8 |
| Sharp-Cutoff] | Pentode | | • 6AN8 | • 6CH8 | • 7199 |
| • 6GY6* | | | • 6AZ8 | • OCHO | • (199 |
| 25. OSCILI | LATORS | | | de-Sharp-Cuto | ff Pentode |
| Radio Freau | ency-UHF | | • 6AW8A | • 8AW8A | |
| | | | | | |
| Medium-Mu T | | | 90 PADIO | EDEOUENC | v |
| • 2AF4B | • 3AF4A | • 6AF4A | | -FREQUENC | 1 |
| ⊳2DV4 | • 3DZ4 | ⊳6DV4 | AMPLI | FIERS | |
| • 2DZ4 | • 6AF4 | • 6DZ4 | | | |
| Radio Frequ | ency–VHF | | Medium-Mu 7 | | CDNAA |
| Medium-Mu T | Twin Triode | | • 2BN4A • 3BN4A | • 6BC4 | • 6BN4A |
| • 5J6 | • 12AV7 | • 19J6 | • 3BN4A | | |
| • 6J6A | • 124 4 | • 1930 | Medium-Mu 7 | Friode-Sharp-C | utoff Tetrode |
| • OJOA | | | • 5CQ8 | • 6CQ8 | |
| High-Mu Trio | ode | | Medium-Mu 7 | | |
| • 6AB4 | | | • 4BC8 | • 5J6 | • 6BZ7 |
| Power Triode | | | • 4BC8 • 4BQ7A | • 5J6 • 6BC8 | • 6BZ7 • 6FW8 |
| • 6C4 (Class (| | | • 4BQ7A • 4BS8 | • 6BK7B | • 6J6A |
| | | | • 4B50 • 4BZ7 | • 6B07A | • 12AV7 |
| Low Freque | ncy, Sweep Ty | pe | • 4627 • 58K7A | • 6BS8 | • 19J6 |
| Medium-Mn 7 | Friode-Sharp-C | utoff Pentode | • 5B07A | | - 2790 |
| • 5AN8 | • 6BA8A | • 6CU8 | | - | |
| • 6AN8A | • 6BH8 | • 6CX8 | High-Mu Trio | | |
| • 6AU8A | • 6CH8 | • 8CX8 | ▷2CW4 | • 6AB4 | • 6FH5 |
| • 6AZ8 | | | ▷ 2DS4 | ⊳6CW4 | • 6FQ5A |
| Ttal Mar Tr | 1 | N- 1- | • 2FH5 | ▷ 6DS4 | • 6GK5 |
| 0 | ode with Twin I | node | • 3GK5 | • 6ER5 | ▷13CW4 |
| • 6BN8 | • 6CN7 | | High-Mu Twi | n Triode | |
| High-Mu Tric | ode-Sharp-Cuto | off Pentode | • 6DT8 | • 12AZ7A | • 12DT8 |
| • 6AW8A | • 8AW8A | | • 12AZ7 | | |
| | | | 1 | | |
| • Miniature | o Octal | Nuvistor | ► Nova | r * Dual | control grids |


| Power Triode • 6C4 (Class C) | | | 0 0 | e Types (For rf- rent applications) | |
|---------------------------------|--------------------|---------------------------------------|-------------------|--|--------------|
| Sharp-Cutoff To | etrode | | | | |
| • 2CY5 | • 6CY5 | • 6FV6 | Half-Wave (D | | - 240 |
| • 3CY5 | · · · · · · | | o 1B3GT | o 1K3 | • 3A2 |
| | | | • 1G3GT/ | • 1V2 | o 3A3 |
| Sharp-Cutoff P | entode | | 1 B3GT | • 1X2B | o 3B2 |
| • 3AU6 | • 6AK5 | • 6DE6 | o 1J3 | | |
| • 3BC5 | • 6AU6A | 0 6SH7 | | | |
| • 3CB6 | • 6BC5 | o 6SJ7 | 31. REGUI | ATORS | |
| • 3CF6 | • 6BH6 | • 12AU6 | 51. REGUI | AIUNS | |
| • 4AU6 | • 6CB6 | • 12AU6 | TT: al Walter | T | |
| • 4CB6 | • 6CB6A | o 12SH7 | Hign-Vollag | e, Low Current | |
| • 4CB0 | • 6CF6 | o 12SJ7 | Sharp-Cutoff | Beam Triode | |
| 0 6AC7 | • 6DC6 | • 18GD6A | o 6BK4 | | |
| • 6AG5 | • ODCO | • IOGDUA | 0 ODICE | | |
| • OAG5 | | | | | |
| CI C . C D | · 1 ··1 D | 1. | 32. RELAY | CONTROL C | IRCUITS |
| Sharp-Cutoff P | | oae | | | |
| • 6KL8 | • 12KL8 | | Medium-Mu 7 | Twin Triode | |
| | | | • 12FV7 | | |
| Semiremote-Cu | | | | | |
| 0 6SG7 | o 12SG7 | | High-Mu Twi | n Triode | |
| - | _ | | • 6EV7 | | |
| Remote-Cutoff | | | | | |
| • 3BA6 | o 6SK7GT | o 12SK7GT | an anna | AND ADDRESS | |
| • 6BA6 | • 12BA6 | • 18FW6 | 33. SYNC A | MPLIFIERS | |
| • 6BJ6 | o 12SK7 | • 18FW6A | | | |
| 0 6SK7 | | | | Triode—Sharp-Cu | |
| | | | • 6AU8A | • 6CX8 | • 8CX8 |
| Remote-Cutoff | | | • 6AZ8 | | |
| • 6EQ7 | • 12EQ7 | • 20EQ7 | M. J | Contra Trata Ja | |
| | | | Medium-Mu 7 | • 7AU7 | • 12AU7A |
| OO BELOT | NOT OTDO | | • 6CG7 | • 7AU7 | • 12AU7A |
| 29. REACTA | NCE CIRCU | IIIS | High-Mn Trio | de with Twin Die | ode |
| | | | • 6CN7 | | |
| Medium-Mu Tr | riode—Sharp-Ci | utoff Pentode | - o arri | | |
| • 5AN8 | • 6AZ8 | • 6CH8 | High-Mu Trio | de-Sharp-Cutof | f Pentode |
| • 6AN8A | • 6BA8A | • 6CU8 | • 6AW8A | • 8AW8A | • 8JV8 |
| | | | • 6JV8 | | |
| High-Mu Triod | e with Twin Di | iodes | | | |
| • 6CN7 | | | High-Mu Twi | n Triode | |
| | | | • 12BZ7 | | |
| High-Mu Triod | e-Sharp-Cuto | ff Pentode | | | |
| • 6AW8A | • 8AW8A | | OL CENTO (| TIDDEDC | |
| | | | 34. SYNC (| LIPPERS | |
| | | · · · · · · · · · · · · · · · · · · · | 75 74 75 7 | | |
| 30. RECTIF | IERS | | | Triode-Sharp-Cu | toff Tetrode |
| | | | • 5CQ8 | • 6CQ8 | |
| Power-Supply | y Types—Vac | cuum | Medium-Mu 7 | riode—Sharp-Cu | toff Pentode |
| | | | • 5AN8 | • 6AZ8 | • 6CX8 |
| Half-Wave (Dic | | | • 6AN8A | • 6CH8 | • 8CX8 |
| • 35W4 | • 36AM3A | • 50DC4 | • 6AU8A | • 6CU8 | |
| o 35Z5GT | • 36AM3B | | • OAUGA | | |
| | | | High-Mu Trio | de-Sharp-Cutof | f Pentode |
| Full-Wave (Tw | | | • 6AW8A | • 6JV8 | • 8GN8 |
| o 3DG4 | 0 5V3A | o 5Z4 | • 6EB8 | • 8AW8A | • 8JV8 |
| o 5AS4A | o 5VG4 | o 6AX5GT | • 6GW8 | • 8EB8 | • 10HF8 |
| ▶ 5BC3 | o 5V4GA | • 6CA4 | • 6HF8 | | |
| 2010 Barriel 10 | o 5XG4 | • 6X4 | | | |
| o 5DJ4 | | | Link Mr. Tree | "I'minda | |
| o 5DJ4 o 5U4G | 0 5Y3GT | 0 6X5GT | High-Mu Twi | n I Floue | |
| | o 5Y3GT o 5Y4GT | ∘ 6X5GT • 12X4 | • 12BZ7 | n Triode | |

1

= Application Guide ====

| Sharp-Cutoff Ty | win Pentode | | Medium-Mu Du | | |
|-----------------------|-----------------|------------------|-------------------------|------------------|------------|
| • 3BU8 | • 4BU8 | • 6BU8 | • 6CM7 | • 6CS7 | • 8CM7 |
| • 3GS8 | • 4GS8 | • 6HS8 | | | |
| D | 140 | | High-Mu Triod | e-Low-Mu Triod | e |
| Pentagrid Amp | | | • 6CY7 | ▶ 6GF7 | ▶ 10GF7 |
| • 3BY6 | • 6BY6 | • 6CS6 | • 6DR7 | 0 6GL7 | o 13EM7 |
| • 3CS6 | | | • 6EA7 | • 10DR7 | ▶ 13FD7 |
| | | | 0 6EM7 | 0 10EM7 | ▶ 13GF7 |
| 35. SYNC SE | PARATORS | | ▶ 6FD7 | | |
| | | | | | |
| | iode-Sharp-Cut | off Tetrode | 0 | e-Beam Power 7 | lube |
| • 5CQ8 | • 6CQ8 | | ▶ 15KY8 | | |
| Medium-Mu Tr | iode-Sharp-Cut | off Pentode | 4 7.0 | | |
| • 5AN8 | • 6AZ8 | • 6GH8 | Amplifiers | | |
| • 5GH8 | • 6CH8 | • 6GH8A | Low-Mu Triode | | |
| • 6AN8A | • 6CU8 | • 8CX8 | • 12B4A | | |
| • 6AU8A | • 6CX8 | | • 12DTA | | |
| Medium-Mu Tw | · | | Medium-Mu Tri | iode | |
| • 6CG7 | • 7AU7 | • 12AU7A | • 6S4A | loue | |
| · OCG1 | • /AU/ | • 12AU7A | | | |
| 0 | e with Twin Dio | le | Beam Power Tu | ıbe | |
| • 6CN7 | | | • 5AO5 | • 6A05A | • 6EM5 |
| High Mr. Taiad | e-Sharp-Cutoff | Doute Je | • 5CZ5 | • 6CM6 | • 8EM5 |
| • 6AW8A | • 6KA8 | | • 5V6GT | • 6CZ5 | |
| • 6EB8 | • 6KV8 | • 8JV8 • 8KA8 | | | |
| • 6GN8 | • 8AW8A | • 10HF8 | Power Pentode | | |
| • 6HF8 | • 8EB8 | • 11KV8 | 0 6K6GT | | |
| • 6JV8 | • 8GN8 | • 11E 40 | | | |
| • 0] • 0 | • ogno | | | | |
| High-Mu Twin | Triode | | 38. VIDEO | AMPLIFIERS | |
| • 12BZ7 | | | | | |
| Sharp-Cutoff T | win Pontodo | | Medium-Mu Tr | iode-Sharp-Cuto | ff Pentode |
| • 3BU8 | • 4BU8 | - CDUO | • 5AN8 | • 6BA8A | • 6CU8 |
| • 3GS8 | • 4608 | • 6BU8 • 6HS8 | • 6AN8A | • 6BH8 | • 6CX8 |
| 03630 | 4650 | 01150 | • 6AU8A | • 6CH8 | • 8CX8 |
| Pentagrid Amp | lifier | | • 6AZ8 | | |
| • 3BY6 | • 6BY6 | • 6CS6 | | | |
| • 3CS6 | | | High-Mu Triod | e-Sharp-Cutoff] | Pentode |
| | | | • 6AW8A | • 6JV8 | • 8GN8 |
| 26 TUNING | INDICATOR | e | • 6EB8 | • 6KV8 | • 8JV8 |
| 50. I UNIING | INDICATOR | 3 | • 6GN8 | • 8AW8A | • 10HF8 |
| Indicator with | Triode Unit | | • 6HF8 | • 8EB8 | • 11KV8 |
| 6E5 | 6U5 | | | | |
| | | | Sharp-Cutoff P | entode | |
| Twin Indicator | Units | | • 12BY7A | | |
| o 6AF6G | | | | | |
| | | | | entode with Diod | |
| 37. VERTIC | AL-DEFLECT | TION | • 5AM8 | • 6AM8A | • 6AS8 |
| CIRCUI | | | • 5AS8 | | |
| CIRCUI | 15 | | | | |
| Oscillators an | d Amplifiers (| Combined) | Beam Power T • 25BK5 | ube | |
| | iode-Low-Mu T | , | - aobho | | |
| • 6DE7 | • 10DE7 | • 13DE7 | Power Pentode | | |
| • 6EW7 | | | o 6AG7 | • 6CL6 | • 6GK6 |
| | | | | - 5010 | - 0010 |
| • Miniature | o O | ctal | ▷ Nuvistor | ► N | ovar |
| | | | | | |

For information on picture tubes, refer to the RCA PICTURE TUBE CHAR-ACTERISTICS CHART at the end of the TECHNICAL DATA section.

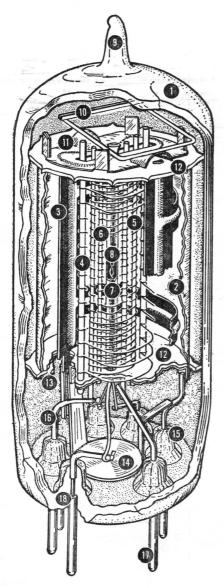

1-Glass Envelope 2-Internal Shield 3-Plate 4-Grid No. 3 (Suppressor) 5-Grid No. 2 (Screen) 6-Grid No. 1 (Control Grid) 7—Cathode 8-Heater 9—Exhaust Tip 10-Getter 11-Spacer Shield Header 12-Insulating Spacer 13-Spacer Shield 14-Inter-Pin Shield 15-Glass Button-Stem Seal 16-Lead Wire 17-Base Pin 18-Glass-to-Metal Seal

Structure of a Miniature Tube

Technical Data for RCA Tube Types

This section contains technical descriptions of RCA tubes used in standard broadcast, FM, and television receivers, in audio amplifiers, and in many other diverse applications. It includes data on current types, as well as information on those RCA discontinued types in which there may still be some interest. Unless otherwise specified, the ratings given are based on the **Design Center** system. Information on picture tubes is shown at the end of this section.

In choosing tube types for the design of new electronic equipment, the designer should refer to the APPLICATION GUIDE FOR RCA RECEIVING TUBES on pages 75 to 81.

Tube types are listed in this section according to the numerical-alphabeticalnumerical sequence of their type designations. For Key: Basing Diagrams, see inside back cover.

DIODE

Miniature type used as detector tube in portable FM receivers and in portable high frequency measuring equipment. Outline 7B, OUTLINES SECTION. Tube requires miniature seven-contact socket. Heater volts (ac/ dc), 1.4; amperes, 0.15. Maximum ratings for half-wave rectifier service: peak inverse plate volts, 330 max; peak plate ma, 5 max; dc output ma., 0.5 max; peak heater-cathode volts, 140 max. This type is used principally for renewal purposes.


REMOTE-CUTOFF PENTODE

Glass type used in battery-operated receivers as rf or if amplifier. This type is similar electrically to type 1D5-GP. Outline 24B, OUT-LINES SECTION. Tube requires four-contact socket. Filament volts (de), 2.0; amperes, 0.06. Type 1A4-P is a DISCONTINUED type listed for reference only.

1A4P

1A5G1

IA3



POWER PENTODE

Glass octal type used in output stage of battery-operated receivers. Outline 14C, OUT-LINES SECTION. This type may be supplied with pin No.1 omitted. Tube requires octal socket and may be mounted in any position. For filament considerations, refer to type 1U4. Filament volts (dc), 1.4; amperes, 0.05. Typical operation as class A_1 amplifier: plate and grid-No.2 volte, 90 (110 maz); grid-No.1 volts, -4.5; peak af grid-


No.1 volts, 4.5; plate ma., 4.0; grid-No.2 ma., 1.1; plate resistance (approx.), 0.3 megohm; transconductance, 850 μ mhos; load resistance, 25000 ohms; power output, 115 milliwatts. Type 1A5-GT is used principally for renewal purposes.


PENTAGRID CONVERTER

Glass type used in battery-operated receivers. This type is identical electrically with type 1D7-G, except for interelectrode capacitances. Outline 24B, OUTLINES SECTION. Tube requires six-contact socket. Filament volts (dc), 2.0; amperes, 0.06. Type 1A6 is a DISCON-TINUED type listed for reference only.

PENTAGRID CONVERTER

Glass octal type used in superheterodyne circuits having battery power supplies. Outline 15A, OUTLINES SECTION. Tube requires octal socket and may be mounted in any position. Filament volts (dc), 1.4; amperes, 0.05. Typical operation as converter: plate and grid-No.2 volts, 90 (110 max); grids-No.3-and-No.5 supply volts, 110 max; grids-No.3-and-No.5 volts, 45 (60 max); grid-No.4 volts, 0; grid-No.1 resistor, 0.2 meg-






'ohm; plate resistance (approx.), 0.6 megohm; plate ma., 0.6; grids-No.3-and-No.5 ma., 0.7; grid-No.2 ma., 1.2; grid-No.1 ma., 0.035; total cathode ma., 2.5 (4 max); conversion transconductance, 250 umbos. This type is used principally for renewal purposes.

POWER PENTODE


small, compact, battery-operated receivers for the standard AM broadcast band. Maximum dimensions: over-all length, 1.75 inches; seated height, 1.5 inches; diameter, 0.4 inch. Tube requires subminiature eight-contact socket. Filament volts (dc), 1.25; amperes, 0.04. Filament voltage should never exceed 1.6 volts. Typical operation as Class A1 amplifier: plate and grid-



No.2 volts, 67.5 max; grid-No.1 volts, -4.5; peak af grid-No.1 volts, 4.5; zero-signal plate ma., 2; zerosignal grid-No.2 ma., 0.4; cathode ma., 4 max; plate resistance, 0.15 megohm; transconductance,750 μ mhos; load resistance, 25000 ohms; total harmonic distortion, 10 per cent; maximum-signal power output, 50 milliwatts. This is a DISCONTINUED type listed for reference only.

HALF-WAVE VACUUM RECTIFIER

Duodecar type used to supply power to the anode of the picture tube in television receivers. Outline 16A, OUTLINES SECTION. Tube requires duodecar twelve-contact socket



and may be mounted in any position. Socket terminals 4 and 10 may be used as tie points for components at or near filament potential. Filament volts (ac/dc). 1.25; amperes, 0.2.

PULSED RECTIFIER

For operation in a 525-line, 30-frame system

| Maximum Ratings, (Design-Maximum Values): | | |
|---|-----------|-------|
| PEAK INVERSE PLATE VOLTAGE# | 26000 max | volts |
| PEAK PLATE CURRENT | 50 max | ma |
| Average Plate Current | 0.5 max | ma |
| Channel and the last and an and Malue | | |

Characteristics, Instantaneous Value:

Tube Voltage Drop for plate current of 7 ma..... 225 volts # The duration of the voltage pulse must not exceed 15 per cent of one horizontal scanning cycle. In a 525-line, 30-frame system, 15 per cent of one horizontal scanning cycle is 10 microseconds.

The dc component must not exceed 22000 volts.

1A6


1A7GT

1AC5

1AD2

= Technical Data =

SHARP-CUTOFF PENTODE



Subminiature type used as f or if amplifier in stages not controlled by ave in small, compact, battery-operated receivers for the standard AM broadcast band. Maximum dimensions: over-all length, 1.75 inches; seated height, 1.5 inches; diameter, 0.4 inch. Tube requires subminiature eight-contact socket. Filament voltage should never exceed 1.6 volts. Characteristics

as class A₁ amplifier: plate and grid-No.2 volts, 67.5 max; grid-No.1 volts, 0; plate resistance, 0.7 megohm; transconductance, 735 μmhos; total cathode ma., 4 max; plate ma., 1.85; grid-No.2 ma., 0.75. This is a DISCONTINUED type listed for reference only.

HALF-WAVE VACUUM RECTIFIER


 $\begin{array}{c} F_{15} \\ F_{15} \\ C_{3} \\ F_{15} \\ F_{15$

Miniature type used as rectifier of highvoltage pulses produced in the scanning systems of television receivers. Outline 9A, OUTLINES SECTION. Tube requires miniature nine-contact socket. Socket terminals 3 and 7 may be connected to the filament, or used as tie points for the filament-dropping resistor; otherwise they should not be used. Filament volts (ac), 1.4; amperes, 0.65. Maximum ratings as pulsed rec-

1AX2

1AD5

tifier in 525-line, 30-frame system: peak inverse plate volts (*absolute maximum*), 25000 max (dc 20000 max); peak plate ma., 11 max; average plate ma., 1 max. For filament and high-voltage considerations, refer to type 1B3-GT. Type 1AX2 is used principally for renewal purposes.



FILAMENT VOLTAGE (AC/DC)

HALF-WAVE VACUUM RECTIFIER

Glass octal type used in high-voltage, low-current applications such as the rectifier in a high-voltage, rf-operated power supply or as a rectifier of highvoltage pulses produced in television scanning systems.

1B3GT

Trolta

1 25*

| FILAMENT VOLTAGE (AC/DC) FILAMENT CURRENT. DIRECT INTERELECTRODE CAPACITANCE (Approx.): | 0.2 | ampere |
|--|--|-------------------------|
| Plate to Filament and Internal Shield | 1.3 | pf |
| * Under no circumstances should the filament voltage be less than 1.05 volts or | greater than 1.4 | 15 volts. |
| PULSED RECTIFIER For operation in a 525-line, 30-frame system | | |
| Maximum Ratings, (Design-Maximum Values): | | |
| Peak Inverse Plate Voltage* Peak Plate Current | 26000 max 50 max | volts ma |
| AVERAGE PLATE CURRENT | 0.5 max | ma |
| Characteristics, Instantaneous Value: | | |
| Tube Voltage Drop for plate current of 7 ma | 100 | volts |
| RADIO-FREQUENCY RECTIFIER | | |
| Maximum Ratings, (Design-Maximum Values): | | |
| PEAK INVERSE PLATE VOLTAGE PEAK PLATE CURRENT AVERAGE PLATE CURRENT FREQUENCY RANGE OF SUPPLY VOLTAGE. | 83000 max 35 max 1.1 max 1.5 to 100 | volts ma Ma Kc |
| * The duration of the voltage pulse must not exceed 15 per cent of one horizon 525-line, 30-frame system, 15 per cent of one horizontal scanning cycle is 10 m * The dc component must not exceed 22000 volts. | tal scanning cy icroseconds. | cle. In a |
| | | |

INSTALLATION AND APPLICATION

Type 1B3-GT requires an octal socket and may be mounted in any position. Plate connection is cap at top of bulb. Socket terminals 1, 3, 4, 5, 6, and 8 may be connected to socket terminal 7 or to a corona shield which is connected to socket terminal 7. Socket terminals 4 and 6 may be used as tie points for components at or near filament potential. This type may be supplied with pins 1, 4, and/or 6 omitted. Outline 15D, OUTLINES SECTION. The high voltages at which the 1B3-GT is operated are very dangerous. Great care should be taken to prevent coming in contact with these high voltages. In those circuits where the filament circuit is not grounded, the filament circuit operates at dc potentials which can cause fatal shock. Extreme precautions must be taken when the filament voltage is measured. These precautions must include safeguards which definitely eliminate all hazards to personnel. The filament transformer, whether it is of the iron-core or the air-core type, must be sufficiently insulated.

The voltages employed in some television receivers and other high-voltage equipment may be sufficiently high to cause high-voltage rectifier tubes such as the 1B3-GT to produce soft X-rays which can constitute a health hazard unless the tubes are adequately shielded. Relatively simple shielding should prove adequate, but the need for this precaution should be considered.


SHARP-CUTOFF PENTODE

Glass type used as rf amplifier or detector in battery-operated receivers. Outline 24B, OUT-LINES SECTION. Tube requires four-contact socket. For typical operating conditions and maximum ratings as a class A_1 amplifier, refer to type 1E5-GP. Filament volts (dc), 2.0; amperes, 0.06. Type 1B4-P is a DISCONTINUED type listed for reference only.

TWIN DIODE - MEDIUM-MU TRIODE

Glass type used as combined detector, amplifier, and avc tube in battery-operated receivers. Maximum dimensions: over-all length, 4-3/16 inches; seated height, 3-9/16 inches; diameter, 1-9/16 inches. Tube requires six-contact socket. Filament volts (dc), 2.0; amperes, 0.06. Typical operation as class A₁ amplifier: plate volts, 135 max; grid volts, -3; plate ma., 0.8; plate resistance. 35000 ohms: amplification fac-





tor, 20; transconductance, 575 μ mhos. This is a DISCONTINUED type listed for reference only.

PENTAGRID CONVERTER

Glass octal type used in superheterodyne circuits having battery power supply. Outline 15A, OUTLINES SECTION. Filament volts (dc), 1.4; amperes, 0.1. This is a DISCONTINUED type listed for reference only. The 1B7-GT may be replaced by the 1A7-GT if circuit adjustment is made for lower filament current of type 1A7-GT.

POWER PENTODE

Glass octal type used in output stage of battery-operated receivers. Outline 14C, OUT-LINES SECTION. This type may be supplied with pin No.1 omitted. Tube requires octal socket. Filament volts (dc), 1.4; amperes, 0.1. Typical operation as class A₁ amplifier: plate and grid-No.2 volts, 90 (110 max); grid-No.1 volts, -7.5; peak af grid-No.1 volts, 7.5; plate ma., 7.8; grid-No.2 ma., 3.5; plate resistance





(approx.), 115000 ohms; transconductance, 1550 µmhos; load resistance, 8000 ohms; power output, 240 milliwatts. Type 1C5-GT is used principally for renewal purposes.

PENTAGRID CONVERTER

Glass type used in battery-operated receivers. Similar electrically to type 1C7-G except for interelectrode capacitances. Outline 24B, OUTLINES SECTION. Tube requires six-contact socket. Filament volts (dc), 2.0; amperes, 0.12. Type 1C6 is a DISCONTINUED type listed for reference only.



1B7GT

1**B**4**P**

1B5/25S

1C5GT

1C6

= Technical Data =



PENTAGRID CONVERTER

Glass octal type used in battery-operated receivers. Outline 23, OUTLINES SECTION. Tube requires octal socket. Filament volts (dc), 2.0; amperes, 0.12. Typical operation as converter: plate volts, 180 max; grids-No.3-and-No.5 (screen-grid) volts, 67.5 max; grid-No.2 (anodegrid) supply volts, 180 (applied through 20000ohm dropping resistor bypassed by $0.01-\mu f$

1C7G

capacitor); grid-No.4 (control-grid) volts, -3; grid-No.1 (oscillator-grid) resistor, 50000 ohms; plate ma., 1.5; grids-No.3-and-No.5 ma., 2; grid-No.2 ma., 4; grid-No.1 ma., 0.2. This is a DISCONTINUED type listed for reference only.

REMOTE-CUTOFF PENTODE


Glass octal type used in battery-operated receivers as rf or if amplifier. Outline 23, OUT-LINES SECTION.-Tube requires octal socket. Filament volts (de), 2.0; amperes, 0.06. Typical operation as class A₁ amplifier: plate volts, 180 max; grid-No.2 (screen-grid) volts, 67.5 max; grid-No.1 volts, -3 min; plate man, 2.3; grid-No.2 ma., 0.8; plate resistance (approx.), 1.0 megohm; transconductance, 750 µmhos; transconductance at bias of -15 volts, 15 µmhos. This is a DIS-CONTINUED type listed for reference only.

REMOTE-CUTOFF TETRODE

Glass octal type used in battery-operated receivers as rf or if amplifier. Outline 23, OUT-LINES SECTION. Filament volts (dc), 2.0; amperes, 0.06. This is a DISCONTINUED type listed for reference only. It is similar electrically to type 1D5-GP.

PENTAGRID CONVERTER

Glass octal type used in battery-operated receivers. Outline 23, OUTLINES SECTION. Tube requires octal socket. Filament volts (dc), 2.0; amperes, 0.06. Typical operation as converter; plate volts, grids-No.3-and-No.5 volts, grid-No.2 supply volts, grids-No.3-and-No.5 volts, and grid-No.1 resistor are same as for type 1C7-G; plate ma., 1.3; grids-No.3-and-No.5 ma., 2.4; grid-No.2 ma., 2.3; grid-No.1 ma., 0.2. This is a DISCON-TINUED type listed for reference only.



DIODE—TRIODE—POWER PENTODE

Glass octal type used in compact batteryoperated receivers. Diode unit is used as detector or ave tube, triode as first audio amplifier, and pentode as power output tube. Outline 15A, OUTLINES SECTION. Tube requires octal socket. Filament volts (dc), 1.4; amperes, 0.1. Typical operation of pentode unit as class A_1 amplifier: plate and grid-No.2 volts, 90 (110 max); grid-No.1 volts, -9; plate ma., 5; grid-No.2 ma.,

1; transconductance, 925 µmhos; load resistance, 12000 ohms; total harmonic distortion, 10 per cent; power output, 200 milliwatts. Characteristics of triode unit as class A₁ amplifier: plate volts, 90 (110 max); grid volts, 0; amplification factor, 25; plate resistance (approx.), 43500 ohms; transconductance, 576 µmhos; plate ma., 1.1. This is a DISCONTINUED type listed for reference only.







1D5GT

1D7G

1D8GT

87

G21 (3 +(2

RCA Receiving Tube Manual =

DIODE— SEMIREMOTE-CUTOFF PENTODE

Miniature type used in battery-operated portable radio receivers as combined AM detector and af voltage amplifier. Outline TB, OUTLINES SECTION. Tube requires miniature seven-contact socket and may be mounted in any position. Filament volts (dc), 1.4; amperes, 0.05. Characteristics of pentode unit as class A_1 amplifier: plate and grid-No.2 (screen grid) volts, 67.5 (90 max); grid-No.1 volts, 0;



5

plate resistance (approx.), 0.6 megohm; transconductance, 630 µmhos; plate ma., 2.1; grid-No.2 ma.; 0.55. Maximum diode rating: plate ma., 0.25 max. This type is used principally for renewal purposes.

SHARP-CUTOFF PENTODE

Glass octal type used as rf amplifier or detector in battery-operated receivers. Outline 23, OUTLINES SECTION. Tube requires octal socket. Filament volts (dc), 2.0; amperes, 0.06. Characteristics as class A₁ amplifier: plate volts, 180 max; grid-No.2 volts, 67.5 max; grid-No.1 volts, -3; plate ma., 1.7; grid-No.2 ma., 0.6; plate resistance, 1.5 megohms; transconductance, 650 µmhos. This is a DISCONTINUED type listed for reference only.

TWIN POWER PENTODE

Glass octal type used in push-pull output stage of battery-operated receivers. Outline 14C, OUTLINES SECTION. Tube requires octal socket. Filament volts (dc), 2.0; amperes, 0.24. Typical operation as push-pull class A₁ amplifier: plate and grid-No.2 volts, 135 maz; grid-No.1 volts, -7.5; plate ma., 10.5; grid-No.2 max, 3.5; output watts, 0.575. This is a DISCOM. TINUED type listed for reference only.

PENTAGRID CONVERTER

Subminiature type used in small, compact, battery-operated receivers for the standard A M broadcast band. Maximum dimensions: over-all length, 1.75 inches; seated height, 1.5 inches; diameter, 0.4 inch. Tube requires subminiature eight-contact socket. Filament volts (dc), 1.25; amperes, 0.04. Typical operation as converter: plate volts and grids-No.2-and-No.4 supply volts, 67.5 max; grids-No.2-and-No.4.



20000 ohms; grid-No.3 volts, 0; grid-No.1 resistor, 0.1 megohm; plate resistance (approx.), 0.4 megohm; conversion transconductance, 150 μmhos; total cathode ma., 2.5 (4 max); plate ma., 1; grids-No.2-and-No.4 ma., 1.5; grid-No.1 μa., 70. This is a DISCONTINUED type listed for reference only.

POWER PENTODE

Glass type used in output stage of batteryoperated receivers. Outline 27, OUTLINES SECTION. Tube requires five-contact socket. Filament volts (dc), 2.0; amperes, 0.12. Type 1F4 is a DISCONTINUED type listed for reference only.

POWER PENTODE

Glass octal type used in output stage of battery-operated receivers. Outline 26, OUT-LINES SECTION. Tube requires octal socket. Filament volts (de), 2.0; amperes, 0.12. Typical operation as class A₁ amplifier: plate and grid-No.2 (screen-grid) volts, 135 (180 max); grid-No.1 volts, -4.5; plate ma., 8; grid-No.2 ma., 2.4; cathode resistor, 432 ohms; output watts, 0.31. This is a DISCONTINUED type listed for reference only.





1E5GP

1DN5


1E7GT

1E8

1F4

1F5G

— Technical Data =



TWIN DIODE— SHARP-CUTOFF PENTODE

Glass type used as combined detector, amplifier, and avc tube in battery-operated receivers. Outline 23, OUTLINES SECTION. Tube requires six-contact socket. Filament volts (dc), 2.0; amperes, 0.06. Typical operation of pentode unit as class A₁ amplifier: plate volts, 180 max; grid-No.2 (acreen-grid) volts, 67.5 max; grid-No.1 volts, -1.5; plate ma., 2.2; grid-No.2 ma., 0.7. This is a DISCONTINUED type listed for reference only.

TWIN DIODE— SHARP-CUTOFF PENTODE

Glass octal type used as combined detector, amplifier, and avc tube in battery-operated receivers. Outline 23, OUTLINES SECTION. Tube requires octal socket. Filament volts (dc), 2.0; amperes, 0.06. Similar electrically to type 1F6 except for interelectrode capacitances. Type 1F7G is a DISCONTINUED type listed for reference only.

HALF-WAVE VACUUM RECTIFIER


Glass octal type used in highvoltage, low-current applications such as the rectifier in a high-voltage, rf-operated power supply or as a rectifier of high-voltage pulses produced in tele-

vision scanning systems. Outline 15B, OUTLINES SECTION. This type may be supplied with pins 1, 4, and/or 6 omitted. Tube requires octal socket and may be mounted in any position. Except for physical dimensions, this type is identical with glass octal type 1B3-GT.

MEDIUM-MU TRIODE

Glass octal type used in battery-operated receivers as detector or voltage amplifier. Outline 14C, OUTLINES SECTION. Tube requires octal socket. Filament volts (dc), 1.4; amperes, 0.05. Typical operation and characteristics as class A₁ amplifier: plate volts, 90 (100 max); grid volts, -6; plate ma., 2.3; plate resistance, 10700 ohms; amplification factor, 8.8; transconductance, 825 μ mhos. This is a DISCON-TINUED type listed for reference only.

1G4GT



8

POWER PENTODE


Glass octal type used in output stage of battery-operated receivers. Outline 26, OUT-LINES SECTION. Tube requires octal socket. Filament volts (dc), 2.0; amperes, 0.12. Typical operation as class A_1 amplifier: plate and grid-No.2 (screen-grid) volts, 135 max; grid-No.1 volts, -13.5; plate ma., 9.7; output watts, 0.55. This is a DISCONTINUED type listed for reference only.

1G5G

1F7G

IG3GT/

1B3GT



89

HIGH-MU TWIN POWER TRIODE

Glass octal type used in output stage of battery-operated receivers. Outline 14C, OUT-LINES SECTION. Tube requires octal socket. Filament volts (dc), 1.4; amperes, 0.1. Typical operation as class B amplifier: plate volts, 90 (110 max); dc grid volts, 0; peak af grid-to-grid volts, 48; effective grid-circuit impedance per unit, 2530 ohms; plate ma. (zero signal), 2, (maximum signal), 11; peak grid ma. per unit, 6; output watts (approx.), 0.35. This is a DISCON-TINUED type listed for reference only.

MEDIUM-MU TRIODE

Glass octal type used as detector or voltage amplifier in battery-operated receivers. Outline 22, OUTLINES SECTION. Tube requires octal socket. Filament volts (dc), 2.0; amperes, 0.06. Typical operation as class A1 amplifier: plate volts, 180 max; grid volts, -13.5; amplification factor, 9.3; plate resistance, 10300 ohms; transconductance, 900 µmhos; plate ma., 3.1. This is a DISCONTINUED type listed for reference only.

DIODE—HIGH-MU TRIODE

Glass octal type used as combined detector and amplifier in battery-operated receivers. Out-line 15A, OUTLINES SECTION. Tube requires octal socket. Filament volts (dc), 1.4; amperes, 0.05. Characteristics of triode unit as class A1 amplifier: plate volts, 90 (110 max); grid volts, 0; plate ma., 0.15; plate resistance (approx.), 240000 ohms; amplification factor, 65; transconductance, 275 umhos. Diode is located at negative end of filament. This type is used principally for renewal purposes.

TWIN DIODE-MEDIUM-MU TRIODE


Glass octal type used as combined detector. amplifier, and avc tube in battery-operated receivers. Outline 22, OUTLINES SECTION. Tube requires octal socket. Filament volts (dc) 2.0; amperes, 0.06. Type 1H6-G is similar electrically to type 1B5/25S. Type 1H6G is a DISCONTINUED type listed for reference only.

HALF-WAVE VACUUM RECTIFIER

Glass octal type used as a rectifier of high-voltage pulses produced in the scanning systems of black-andwhite television receivers. Outline 15D. OUTLINES SECTION. Except for physical dimensions, this type is identical with glass octal type 1K3.


POWER PENTODE


Glass octal type used in output stage of battery-operated receivers. Outline 26, OUT-LINES SECTION. Tube requires octal socket. Filament volts (dc), 2.0; amperes, 0.12. Typical operation as class A1 amplifier: plate and grid-No.2(screen-grid) volts, 135 max; grid-No.1 volts, -16.5; plate ma., 7.0; grid-No.2 ma., 2.0; plate resistance, 105000 ohms; load resistance, 13500 ohms; output watts, 0.45. This is a DISCON-TINUED type listed for reference only.














IH4G


1G6GT

1H5GT

1H6G

1.13

1J5G




HIGH-MU TWIN POWER TRIODE

Glass octal types used in output stage of battery-operated receivers. Type 1J6-G, Outline 22; type 1J6GT, Outline 14E, OUTLINES SECTION. Tubes require octal socket. Filament volts (dc), 2.0; amperes, 0.24. Typical operation as class B power amplifier: plate volts, 135 max; peak plate ma. per plate, 50 max; grid volts, 0; zero-signal plate ma. per plate, 5; effective plate-to-plate load resistance, 10000

1J6G 1J6GT

ohms; average input watts, 0.17; output watts, 2.1. These are DISCONTINUED types listed for reference only.



HALF-WAVE VACUUM RECTIFIER

Glass octal type used as a rectifier of high-voltage pulses produced in the scanning systems of black-andwhite television receivers. Type 1K3 requires an octal socket and may be 1K3

mounted in any position. Plate connection is cap at top of bulb. Socket terminals 1, 3, 4, 5, 6, and 8 may be connected to socket terminal 7 or to a corona shield which is connected to socket terminal 7. Socket terminals 4 and 6 may be used as tie points for components at or near filament potential. Outline 15B, OUTLINES SECTION. For high-voltage considerations, see type 1B3-GT.

| FILAMENT VOLTAGE (AC/DC) FILAMENT CURRENT | 1.25* 0.2 | volts ampere |
|--|--------------|-----------------|
| DIRECT INTERELECTRODE CAPACITANCE (Approx.): | 1.0 | - 1 |
| Plate to Filament and Internal Shield | 1.6 | pr |

* Under no circumstances should the filament voltage be less than 1.05 volts or greater than 1.45 volts.

PULSED RECTIFIER

For operation in a 525-line, 30-frame system

| Maximum Ratings, (Design-Maximum Values): | | |
|---|-----------|-------|
| PEAK INVERSE PLATE VOLTAGE* | 26000 max | volts |
| PEAK PLATE CURRENT. | 50 max | ma |
| Average Plate Current | 0.5 max | ma |
| Characteristics, Instantaneous Value: | | |
| Tube Voltage Drop for plate current of 7 ma | 225 | volts |
| | | 1. T |

*The duration of the voltage pulse must not exceed 15 per cent of one horizontal scanning cycle. In a 525-line, 30-frame system, 15 per cent of one horizontal scanning cycle is 10 microseconds. • The dc component must not exceed 22000 volts.



PENTAGRID CONVERTER

Miniature type used in low-drain batteryoperated receivers. Outline 7B, OUTLINES SECTION. Tube requires miniature seven-contact socket and may be mounted in any position. Filament volts (de), 1.4; amperes, 0.05. Typical operation as converter: plate and grid-No.2 volts, 90 (110 max); grids-No.3-and-No.5 supply volts, 110 max; grids-No.3-and-No.5 volts, 45 (65 max); grid-No.4 volts, 0; grid-No.1

1L6

resistor, 0.2 megohm; plate resistance (approx.), 0.65 megohm; plate ma., 0.5; grids-No.3-and-No.5 ma., 0.6; grid-No.2 ma., 1.2; grid-No.1 ma., 0.035; total cathode ma., 2.35 (4 max); conversion transconductance, 300 µmhos. This type is used principally for renewal purposes.



POWER PENTODE

Glass lock-in type used in output stage of battery-operated receivers. Outline 18A, OUT-LINESSECTION. Tube requires lock-in socket. Filament volts (dc), 1.4; amperes, 0.05. For electrical characteristics and typical operation, refer to glass-octal type 1A5-GT. Type 1LA4 is a DISCONTINUED type listed for reference only.

1LA4

= RCA Receiving Tube Manual =

PENTAGRID CONVERTER

Glass lock-in type used in battery-operated receivers. Outline 13A, OUTLINES SECTION. Tube requires lock-in socket. Filament volts (dc), 1.4; amperes, 0.05. Typical operation as converter is the same as for type 1A7-GT except that grid-No.2 volts is 55 max, total cathode ma. is 4.0 max, plate resistance is 0.75 megohm, and conversion transconductance for a grid-No.4 bias of -3 volts is 10 µmhos. This type is used principally for renewal purposes.

POWER PENTODE

Glass lock-in type used in output stage of battery-operated receivers. Outline 13A, OUT-LINESSECTION. Tube requires lock-in socket. Filament volts (dc), 1.4; amperes, 0.05. For electrical characteristics, refer to pentode unit of glass-octal type 1D8-GT. Type 1LB4 is used principally for renewal purposes.

SHARP-CUTOFF PENTODE

Glass lock-in type used as rf or if amplifier in battery-operated receivers. Outline 13A, OUT-LINESSECTION. Tube requires lock-in socket. Filament volts (dc), 1.4; amperes, 0.05. Typical operation as class A₁ amplifier: plate volts, 90 (110 max); grid-No.2 (screen-grid) volts, 45 max; grid-No.1 volts, 0; plate resistance (approx.), greater than 1 megohm; transconductance, 775 μ mhos; plate ma., 1.15; grid-No.2 ma., 0.3. This is a DISCONTINUED type listed for reference only.

PENTAGRID CONVERTER

Glass lock-in type used in battery-operated receivers. Outline 13A, OUTLINES SECTION. Tube requires lock-in socket. Filament volts (dc), 1.4; amperes, 0.05. Typical operation as converter: plate volts, 90 (110 max); grids-No.3and-No.5 volts, 35 (45 max); grid-No.2 volts, 45; grid-No.1 volts, 0; plate resistance, 0.65 megohm; plate ma., 0.75; grids-No.3-and-No.5 ma., 0.70; grid-No.2 ma., 1.4; total cathode ma., 2.9; 






conversion transconductance (zero bias), 275 µmhos. This type is used principally for renewal purposes.

DIODE—SHARP-CUTOFF PENTODE

Glass lock-in type used as combined detector and af voltage amplifier in battery-operated receivers. Outline 13A, OUTLINES SECTION. Tube requires lock-in socket. Filament volts (dc), 1.4; amperes, 0.05. Characteristics of pentode unit: plate volts, 90 (110 max); grid-No.2 volts, 45; grid-No.1 volts, 0; plate ma., 0.6; grid-No.2 ma., 0.1; plate resistance, 0.75 megohm; transconductance, 575 µmhos. This is a DISCONTINUED type listed for reference only.

MEDIUM-MU TRIODE

Glass lock-in type used as detector or voltage amplifier in battery-operated receivers. Outline 13A, OUTLINESSECTION. Tube requires lock-in socket. Filament volts (dc), 1.4; amperes, 0.05. Typical operation as class A1 amplifier: plate volts, 90 (110 max); grid volts, -3; plate ma., 1.4; plate resistance, 19000 ohms; transconductance, 760 µmhos; amplification factor, 14.5. This type is used principally for renewal purposes.





1LC6

1LA6

1LB4

1LC5

1LD5

1LE3

92

= Technical Data =





Lock-in type used as rf or if amplifier in battery-operated receivers. Outline 13A, OUT-LINES SECTION. Tuberequires lock-in socket. Filament volts (dc), 1.4; amperes, 0.05. Typical operation as class A₁ amplifier: plate volts, 90 (110 max); grid-No.2 volts, 45 (110 max); grid-No.1 volts, 0; plate resistance (approx.), greater than 1 megohm; transconductance, 800 µmhos; plate ma., 1.7; grid-No.2 ma., 0.4. This type is used principally for renewal purposes.


DIODE-HIGH-MU TRIODE

Glass lock-in type used as combined detector and amplifier in battery-operated receivers. Outline 13A, OUTLINES SECTION. Tube requires lock-in socket. Filament volts (dc), 1.4; amperes, 0.05. For electrical characteristics, refer to glass-octal type 1H5GT. Type 1LH4 is used principally for renewal purposes.

SHARP-CUTOFF PENTODE

Glass lock-in type used as rf or if amplifier in battery-operated receivers. Outline 13A, OUT-LINESSECTION. Tube requires lock-in socket. Filament volts (dc), 1.4; amperes, 0.05. Typical operation as class A₁ amplifier: plate and grid-No.2(screen-grid) volts, 90 (110 max); grid-No.1 volts, 0; plate ma., 1.6; grid-No.2 ma., 0.35; plate resistance (approx.), 1.1 megohms; transconductance, 800 µmhos. This type is used principally for renewal purposes.

HALF-WAVE VACUUM RECTIFIER




requires octal socket and may be operated in any position. For installation and application considerations, refer to type 1B3GT.

| FILAMENT VOLTAGE (AC) FILAMENT CURRENT | 1.25* 0.2 | volts ampere |
|---|----------------|-----------------|
| DIRECT INTERELECTRODE CAPACITANCE: Plate to Filament and Internal Shield | 1.4 | þţ |
| PULSED RECTIFIER | | |
| For operation in a 525-line, 30-frame system | | |
| Maximum Ratings, (Design-Maximum Values): | | |
| Peak Inverse Plate Voltage ^{om} | 28000 max | volta |
| PEAK PLATE CURRENT | 50 max | m a |
| Average Plate Current | 0.5 max | ma |
| Characteristics, Instantaneous Value: | | |
| Tube Voltage Drop for plate current of 7 ma | 100 | volta |
| * Under no circumstances should the filament voltage be less than 1.05 volts or ° The duration of the voltage pulse must not exceed 15 per cent of one horizon | tal scanning c | |

525-line, 30-frame system, 15 per cent of one horizontal scanning cycle is 10 microseconds. The dc component must not exceed 24000 volts.

PO4 5NC





(8)

1LG5

1I H4

1LN5

1N2A

SHARP-CUTOFF PENTODE

Glass octal type used as rf or if amplifier in battery-operated receivers. Outline 15A, OUT-LINES SECTION. Tube requires octal socket. Filament volts (dc), 1.4; amperes, 0.05. Characteristics as class A₁ amplifier: plate and grid-No.2 volts, 90 (110 max); grid-No.1 volts, 0; plate resistance (approx.), 1.5 megohms; transconductance, 750 μ mhos; plate ma., 1.2; grid-No.2 ma., 0.3. This type is used principally for renewal purposes.



DIODE—POWER PENTODE

Glass octal type used as combined detector and power output tube in battery-operated receivers. Maximum over-all length, 4 inches; maximum diameter, 1-8/16 inches. Filament volts (dc), 1.4; amperes, 0.05. Typical operation of pentode unit as class A₁ amplifier: plate and grid-No.2 (screen-grid) volts, 90 (110 max); grid-No.1 volts, -4.5; plate max, 3.1; grid-No.2 ma. (zero-signal), 0.6; plate resistance (approx.),



0.8 megohm; transconductance, 800 µmhos; load resistance, 25000 ohms; output watts, 0.1. This is a DISCONTINUED type listed for reference only.

REMOTE-CUTOFF PENTODE

Glass octal type used as rf or if amplifier in battery-operated receivers. Outline 15A, OUT-LINES SECTION. Tube requires octal socket, Filament volts (dc), 1.4; amperes, 0.05. Typical operation as class A₁ amplifier: plate volts, 90 (110 max); grid-No.2 (screen-grid) volts, 90 (110 max); grid-No.1 volts, 0; plate resistance (approx.), 0.8 megohm; transconductance, 750 μ mhos; plate ma., 2.3; grid-No.2 ma., 0.7. This is a DISCONTINUED type listed for reference only.



BEAM POWER TUBE

Glass octal type used in the output stage of battery-operated receivers. Outline 14C, OUT-LINES SECTION. Tube requires octal socket. Filament volts (dc), 1.4; amperes, 0.1. For electrical characteristics and ratings, refer to type 8Q5-GT with parallel filament arrangement. Type 1Q5-GT is a DISCONTINUED type for reference only.

PENTAGRID CONVERTER

Miniature type used in lightweight, portable, compact, battery-operated receivers. Outline 7B, OUTLINES SECTION. Tube requires miniature seven-contact socket. Characteristics as converter with separate excitation: plate volts, 67.5 (90 max); grids-No.2 and No.4 volts, 67.5 max; grid-No.3 volts, 0; rms grid-No.1 volts, 25; grid-No.1 resistor, 0.1 megohm; plate resistance (approx.), 0.4 megohm; conversion



transconductance, 280 μmhos; plate ma., 1.4; grids-No.2 and No.4 ma., 3.5; grid-No.1 μa, 250; total cathode ma., 5.2. This type is used principally for renewal purposes.

1N6G

1N5GT

-

1P5GT

1Q5GT

1R5

= Technical Data =



Gip

6

POWER PENTODE

Miniature type used in output stage of lightweight, compact, portable, battery-operated equipment. Types 1S4 and 3S4 are identical except for filament arrangement. Outline 7B, OUTLINES SECTION. Type 1S4 requires miniature seven-contact socket and may be mounted in any position. For ratings and typical operation, refer to type 3S4 with parallel filament arrangement. Filament volts (dc), 1.4; amperes, 0.1. This type is used principally for renewal purposes.

DIODE-SHARP-CUTOFF PENTODE

Miniature type used in lightweight, portable, compact, battery-operated receivers as combined detector and af voltage amplifier. Outline 7B, OUTLINES SECTION. Tube requires miniature seven-contact socket. Filament volts (dc), 1.4; amperes, 0.05. For electrical characteristics, refer to type 1U5. Type 1S5 is used principally for renewal purposes.


REMOTE-CUTOFF PENTODE

Miniature type used in lightweight, portable, compact, battery-operated receivers as rf or if amplifier. Outline 7B, OUTLINES SEC-TION. Tube requires miniature seven-contact socket. Filament volts (dc), 1.4; amperes, 0.05. Characteristics as class A1 amplifier: plate and grid-No.2 volts, 67.5 (90 max); grid-No.1 volts, 0; plate resistance (approx.), 0.25 megohm; transconductance, 875 µmhos; plate ma., 3.4; grid-No.2 ma., 1.5. This type is used principally for renewal purposes.

BEAM POWER TUBE

Glass octal type used in output stage of battery-operated receivers. Outline 14C, OUT-LINES SECTION. Tube requires octal socket. Filament volts (dc), 1.4; amperes, 0.05. Typical operation as class A1 amplifier: plate and grid-No.2 volts, 90 (110 max); grid-No.1 volts, -6; 10.2 voite, 50 (110 muz), grue No.1 voits, -0; peak af grid-No.1 volts, 6; plate ma., 6.5; grid-No.2 ma. (zero-signal), 0.8; grid-No.2 ma. (maximum signal), 1.5; plate resistance, 0.25 megohm; transconductance, 1150 µmhos; load resistance, 14000 ohms; total harmonic distortion, 7.5

per cent; output watts, 0.17. This is a DISCONTINUED type listed for reference only.



6.2

(2

DIODE-SHARP-CUTOFF PENTODE

Subminiature type used as combined detector and audio amplifier in small, compact, battery-operated receivers for the standard AM broadcast band. Maximum dimensions: over-all length, 1.75 inches; seated height, 1.5 inches; diameter, 0.4 inch. Tube requires subminiature eight-contact socket. Filament volts (dc), 1.25; amperes, 0.04. Filament voltage should never exceed 1.6 volts. Typical operation of pentode

unit as class A1 amplifier: plate and grid-No.2 volts, 67.5 max; grid-No.1 volts, 0; plate resistance (approx.), 0.4 megohm; transconductance, 600 µmhos; plate ma., 1.6; grid-No.2 ma., 0.4; total cathode ma., 2.0 max. Maximum diode plate ma., 0.25. This is a DISCONTINUED type listed for reference only.

154

1S5


174

1T5GT

1T6

SHARP-CUTOFF PENTODE


Miniature type used as rf or if amplifier in stages not controlled by avc in lightweight, compact, portable, battery-operated equipment. Outline 7B, OUTLINES SECTION. Tube requires miniature seven-contact socket. Filament volts (dc), 1.4; amperes, 0.05. Characteristics as class A_1 amplifier: plate and grid-No. 2 volts, 90 (120 max); grid-No.1 volts, 0; plate resistance (approx.), 1 megohm; transconduct-



ance, 900 µmhos; plate ma., 1.6; grid-No.2 ma., 0.5. This type is used principally for renewal purposes.

DIODE—SHARP-CUTOFF PENTODE

Miniature type used in lightweight, compact, portable, battery-operated receivers as combined detector and af voltage amplifier. Outline 7B, OUTLINES SECTION. Tube requires miniature seven-contact socket. Filament volts (dc), 1.4; amperes, 0.05. Characteristics of pentode unit as class A_1 amplifier: plate and grid-No.2 volts, 67.5 (100 max); grid-No.1 volts 0: plate resistance (approx). 0.6 megohm:



0; plate resistance (approx.), 0.6 megohm; transconductance, $625 \ \mu$ mhos; plate ma., 1.6; grid-No.2 ma., 0.4. Maximum diode plate ma., 0.28 max. This type is used principally for renewal purposes.

HALF-WAVE VACUUM RECTIFIER

Glass type used in ac/dc or automobile receivers. Maximum dimensions: over-all length, 4-3/16 inches; seated height, 3-9/16 inches; diameter, 1-9/16 inches. Tube requires four-contact socket. Heater volts (ac/dc), 6.3; amperes, 0.3. Maximum ratings as half-wave rectifier: peak inverse plate volts, 1000; peak plate ma., 270; peak heater-cathode volts, 500; dc output ma., 45. This type is used principally for renewal purposes.

HALF-WAVE VACUUM RECTIFIER

Miniature type used in high-voltage, low-current applications such as the rectifier in high-voltage, pulse-operated voltage-doubling power supplies for kinescopes. The very low power





required by the filament permits the use of a rectifier transformer having small size and light weight.

| FILAMENT VOLTAGE (AC) | | volt ampere |
|---|--------------|----------------|
| DIRECT INTERELECTRODE CAPACITANCE: Plate to Filament (Approx.) | 0.8 | pf |
| Under no circumstances should the filament voltage be less than 0.525 volt or greater than 0.525 volt | eater than (| 725 volt. |

PULSED RECTIFIER

For operation in a 525-line, 30-frame system

| Maximum Ratings, (Design-Maximum Values): | | |
|--|---------------|-------|
| PEAK INVERSE PLATE VOLTAGE* | 8250 • max | volts |
| PEAK PLATE CURRENT. | 11 max | ma |
| Average Plate Current | 0.6 max | ma |
| * The duration of the voltage pulse must not exceed 15 per cent of one horizon | | |
| a 525-line 30-frame system, 15 per cent of one horizontal scanning cycle is 10 | microseconds. | |
| • The de component must not exceed 7000 volta | | |

The dc component must not exceed 7000 volts.

1U5

1v

1V2

= Technical Data =

INSTALLATION AND APPLICATION

Type 1V2 requires a miniature nine-contact socket and may be mounted in any position. The socket should be made of material having low leakage and should have adequate insulation between its filament and plate terminals to withstand the maximum peak inverse plate voltage. To provide the required insulation in miniature nine-contact sockets designed with a cylindrical center shield, it is necessary to remove the center shield. In addition, socket terminals 2, 3, 7, and 8 shall not be used. Socket terminal 6 may be used as a tie point for components at or near filament potential. Outline 8D, OUTLINES SECTION.

The filament is of the coated type and is designed for operation at 0.625 volt. The filament windings on the pulse transformer should be adjusted to provide the rated voltage under average line-voltage conditions. When the filament voltage is measured, it is recommended that an rms voltmeter of the thermal type be used. The meter and its leads must be insulated to withstand 15000 volts and the stray capacitances to ground should be minimized.

The high voltages at which the 1V2 is operated are very dangerous. Great care should be taken to prevent coming in contact with these high voltages. Particular care against fatal shock should be taken in measuring the filament voltage in those circuits where the filament is not grounded. Precautions must include safeguards which definitely eliminate all hazards to personnel.

HALF-WAVE VACUUM RECTIFIER

Miniature types used in high-voltage, low-current applications such as the rectifier in a high-voltage, rf-operated power supply, or as the rectifier of

1X2B high-voltage pulses produced in tele-19 vision scanning systems. Outline 9A, OUTLINES SECTION. Tubes require miniature nine-contact socket and may be mounted in any position. Socket terminals 3 and 7 may be used as tie points for components at or near filament potential. For high-voltage considerations, refer to type 1B3-GT. Type 1X2-A is used principally

| FILAMENT VOLTAGE (AC) | 1.25* 0.2 | volts ampere |
|---|--------------|-----------------|
| DIRECT INTERELECTRODE CAPACITANCE: Plate to Filament and Internal Shield (Approx.) | 1.0 | \mathbf{pf} |
| * Under no circumstances should the filament voltage be less than 1.05 volts or gr | reater than | 1.45 volts. |

PULSED RECTIFIER

| For operation | in a | 525-line. | 30-frame | system | |
|---------------|------|-----------|----------|--------|---|
| | | | | 1X2-A | |
| | | | - | · 0 / | D |

| | Design-Center | Design-IVI | aximu | m |
|--|---------------|------------|-------|-------|
| Maximum Ratings: | Values# | Values | | |
| PEAK INVERSE PLATE VOLTAGE | 20000†max | 22000 | max | volts |
| PEAK PLATE CURRENT. | 45 max | | max | ma |
| AVERAGE PLATE CURRENT | 0.5 max | 0.5 | max | ma |
| Characteristics, Instantaneous Value: | | | | |
| Tube Voltage Drop for plate current of 7 ma | | 100 | | volts |
| † Absolute Maximum. Under no circumstances should this a | | eded. | | |

Except as noted. The dc component must not exceed 16000 volts for 1X2-A, 18000 volts for 1X2-B.



LC

8)

for renewal purposes.

POWER TRIODE

Glass type used in output stage of radio receivers and amplifiers. Outline 28, OUTLINES SECTION. Tube requires four-contact socket. Filament volts (ac/dc), 2.5; amperes, 2.5. Typical operation as class A1 amplifier: plate volts, 250 (300 max); grid volts, -45; plate ma., 60; amplification factor, 4.2; load resistance, 800 ohms; transconductance, 5250 µmhos; plate dissipation, 15 max watts; load resistance, 2500



1X2-B

1X2A

RCA Receiving Tube Manual =

ohms; power output, 3.5 watts. Typical operation as push-pull class AB₁ amplifier (values are for two tubes): plate supply volts, 300; cathode-bias resistor, 780 ohms; peak af grid-to-grid volts, 156; zerosignal plate ma., 80; maximum-signal plate ma., 100; effective load resistance (plate-to-plate), 5000 ohms; power output, 10 watts. This type is used principally for renewal purposes.

POWER PENTODE

Glass type used in output stage of ac-operated receivers. Outline 27, OUTLINES SEC-TION. Tube requires six-contact socket. Except for its heater rating (2.5 volts ac/dc; 1.75 amperes), the 2A5 has electrical characteristics identical with type 6F6. Type 2A5 is a DIS-CONTINUED type listed for reference only.

TWIN DIODE—HIGH-MU TRIODE

Glass type used in ac-operated receivers chiefly as a combined detector, amplifier, and ave tube. Outline 24B, OUTLINES SECTION. Tube requires six-contact socket. Except for its heater rating (2.5 volts ac/dc; 0.8 ampere), and within its 250-volt maximum plate rating, the 2A6 has electrical characteristics identical with type 6SQ7. Type 2A6 is a DISCONTIN-UED type listed for reference only.

PENTAGRID CONVERTER

Glass type used in ac-operated receivers. Outline 24B, OUTLINES SECTION. Tube requires small seven-contact (0.75-inch, pin-circle diameter) socket. Except for its heater rating (2.5 volts ac/dc; 0.8 ampere) and its interelectrode capacitances, the 2A7 has electrical characteristics identical with type 6A8. Complete shielding of this tube is generally necessary. Type 2A7 is a DISCONTINUED type listed for reference only.

MEDIUM-MU TRIODE

Miniature types used as local oscillator in uhf television receivers employing series-connected heater strings. Outline 7A, OUTLINES SECTION. Heater volts (ac/dc), 2.35; amperes,

0.6; warm-up time (average), 11 seconds. Type 2AF4-B only, maximum rating (design maximum), peak heater-cathode volts, 180 max. When the heater is positive with respect to the cathode, the dc component of the heater-cathode voltage must not exceed 100 volts. Typical operation of 2AF4-B as oscillator at 1000 Mc: plate ma., 17.5; grid μ a (approx.), 700. Except for heater ratings noted, these types are identical with miniature type 6AF4-A. Type 2AF4-A is a DISCONTINUED type listed for reference only.

HALF-WAVE VACUUM RECTIFIER

Duodecar type used to supply high voltage to the anode of picture tubes in television receivers. Outline 16A, OUTLINESSECTION. Tube requires 12-contact socket and may be IC 3 IC 2 IC 4 IC 4 IC 6 IC 1C IC 1C IC 9 IC 9 IC 9 IC 9 IC 9 IC 1C IC 1C

quires 12-contact socket and may be mounted in any position. Socket terminals 2, 3, 5, 6, 7, 8, 9, and 11 should not be used as tie points; terminals 4 and 10 may be used as tie points for components at or near cathode potential. For high-voltage and X-ray safety considerations, refer to type 1B3-GT. Heater volts (ac/dc), 2.5; amperes, 0.3.




2AH2

2A5

2A6

2A7



1

G

5) K





| Technical Data | | |
|---|---|-------------------|
| PULSED RECTIFIER For operation in a 525-line, 30-frame system | | |
| Maximum Ratings, (Design-Maximum Values): Peak Inverse Plate Voltage [®] . Peak Plate Current. Average Plate Current. | 80000 [•] max 80 max 1.5 max | volts ma ma |
| Characteristics, Instantaneous Value: Tube Voltage Drop for plate current of 7 ma | 100 | volts |

The duration of the voltage pulse must not exceed 15 per cent of one horizontal scanning cycle. In a 525-line, 30-frame system, 15 per cent of one horizontal scanning cycle is 10 microseconds. The dc component must not exceed 24000 volts.



HALF-WAVE VACUUM RECTIFIER

Duodecar type used to supply high voltage to the anode of picture tubes in television receivers. Outline 16B, OUTLINES SECTION. Tube requires duodecar twelve-contact

2AS2

socket and may be mounted in any position. Socket terminals 4, 7, and 10 may be used as tie points for components at or near heater potential. For high-voltage and X-ray safety considerations, refer to type 1B3-GT. Heater volts (ac/dc), 2.5; amperes, 0.33.

PULSED RECTIFIER

For operation in a 525-line, 30-frame system

| Maximum Ratings, (Design-Maximum Values): | | |
|---|------------------------|-------|
| Peak Inverse Plate Voltage ^D | 30000 [•] max | volts |
| Peak Plate Current | 80 max | ma |
| AVERAGE PLATE CURRENT | 1.5 max | ma |
| | | |

Characteristics, Instantaneous Value:



TWIN DIODE— REMOTE-CUTOFF PENTODE

Glass type used as combined detector, ave tube, and amplifier. Outline 24B, OUTLINES SECTION. Tube requires small seven-contact (0.75-inch, pin-circle diameter) socket. Except for its heater rating (2.5 volts ac /dc; 0.8 ampere) and its interelectrode capacitances, the 2B7 has electrical characteristics identical with type 6B8-G. Type 2B7 is a DISCONTINUED type listed for reference only.

MEDIUM-MU TRIODE

Miniature types used as rf amplifier in vhf television tuners employing series-connected heater strings. Outline 7B, OUTLINES SEC-TION. Heater volts (ac /dc), 2BN4:2.3, 2BN4-A: 2.35: amperes, 0.6; warm-up time (average), 11 seconds. Except for heater rating, these types are identical with miniature types 6BN4 and 6BN4A, respectively. Type 2BN4 is a DIS-CONTINUED type listed for reference only. Type 2BN4-A is used principally for renewal purposes. **2B7**



99

RCA Receiving Tube Manual

HIGH-MU TRIODE

Nuvistor type used as a groundedcathode, neutralized rf amplifier in vhf tuners of television and FM receivers employing series-connected heater strings. Outline 1, OUTLINES SEC-TION. Heater volts (ac/dc), 2.1; amperes, 0.45; warm-up time (average), 8 seconds. Except for heater ratings, this

(2) 8

INDEX=LARGE LUG = PIN CUT OFF

'(3

is(2

G2

6

type is identical with nuvistor type 6CW4.

SHARP-CUTOFF TETRODE

Miniature type used as rf amplifier in vhf tuners of television receivers employing series-connected heater strings. Outline 7B, OUTLINES SEC-TION. Heater volts (ac/dc), 2.4; am-

peres, 0.6; warm-up time (average), 11 seconds. Except for heater ratings, this type is identical with miniature type 6CY5.

HIGH-MU TRIODE

Related type: 6DS4

2 D V 4

Related type:

6DV4

2074

Related types:

3DZ4, 6DZ4

Related types:

3CY5, 4CY5, 6CY5

Nuvistor type used as groundedcathode, neutralized rf amplifier in vhf tuners of television and FM receivers employing series-connected heater strings. Because of its cutoff characteristics, the 2DS4 is used in circuits to reduce cross-modulation distortion. Outline 1, OUTLINES SECTION.



. SHORT PIN; IC-DO NOT USE

(2 98

INDEX=LARGE LUG

(4

5

0 (12

(8

H(3

G(2

Heater volts (ac/dc), 2.1; amperes, 0.45; warm-up time (average), 8 seconds. Except for heater ratings, this type is identical with nuvistor type 6DS4.


MEDIUM-MU TRIODE

Nuvistor type used at frequencies up to 1000 megacycles in uhf oscillator stages of television receivers employing series-connected heater strings. Outline 1, OUTLINES SECTION. Heater volts (ac/dc), 2.1; amperes, 0.45; warm-up time (average), 8 seconds. Except for heater ratings, this type is identical with nuvistor type .short PIN; IC-DO NOT USE 6DV4.

MEDIUM-MU TRIODE


Miniature type used as a localoscillator tube in uhf television receivers covering the frequency range from 470 to 890 megacycles and employing series-connected heater strings.

Outline 7A, OUTLINES SECTION. Heater volts (ac/dc), 2.35; amperes, 0.6; warm-up time (average), 11 seconds. Peak heater-cathode volts, 180 max (the dc component must not exceed 100 volts when heater is positive with respect to cathode). Except for heater and heater-cathode ratings, this type is identical with miniature type 6DZ4.





===== Technical Data =



15

6

ELECTRON-RAY TUBE

Glass type with triode unit used to indicate visually by means of a fluorescent target the effects of a change in a controlling voltage. It is used as a convenient means of indicating accurate radio receiver tuning. Maximum dimensions: overall length, 4-3/16 inches; seated height, 3-9/16 inches: diameter, 1-9/16 inches. Tuberequiressixcontact socket. Except for its heater rating (2.5 volts ac/dc; 0.8 ampere), the 2E5 has electrical

2E5 **Related type:** 6F5

characteristics identical with type 6E5. Type 2E5 is a DISCONTINUED typelisted for reference only.

TWIN DIODE

Miniature type used as a horizontal phase detector in television receivers. Outline 7B, OUTLINES SECTION. Tube requires miniature seven-contact socket and may be mounted in any position. Heater volts (ac/dc), 2.1; amperes, 0.45; warm-up time (average), 11 seconds. Maximum ratings (design maximum) as halfwave rectifier: dc output ma. per plate, 5 max; peak heater-cathode volts, 200 max. When the

2EN5

heater is positive with respect to cathode, the dc component of the heater-cathode voltage must not exceed 100 volts. Type 2EN5 is used principally for renewal purposes.



PD



SHARP-CUTOFF TRIODE

Miniature type with frame grid used in vhf tuners of television receivers. Outline 7B, OUTLINES SECTION. Heater volts (ac/dc), 2.3: amperes, 0.6. Except for heater ratings, this type is identical with miniature type 6ER5.

SHARP-CUTOFF TRIODE

Miniature type used as an rf amplifier in vhf tuners of television receivers employing series-connected heater strings. Outline 7B, OUTLINES SEC-TION. Heater volts (ac/dc), 2.35; am-

pes: 3ER5, 6ER5

Related types: 3FH5, 6FH5

peres, 0.6; warm-up time (average), 11 seconds. Except for heater ratings, this type is identical with miniature type 6FH5.



BEAM HEXODE

Miniature type used as rf-amplifier tube in vhf television receivers employing series-connected heater strings. Outline 7B, OUTLINES SEC-TION. Heater volts (ac/dc), 2.4; am-

peres, 0.6; warm-up time (average), 11 seconds. Except for heater ratings, this type is identical with miniature type 6FS5.



HIGH-MU TRIODE

Miniature type with frame grid used as grounded-cathode rf-amplifier tube in vhf tuners of television receivers employing series-connected heaterstrings. Outline 7B, OUTLINES **Related types:**

SECTION. Heater volts (ac/dc), 2.3; amperes, 0.6; warm-up time (average), 11 seconds. Except for heater ratings, this type is identical with miniature type 6GK5.



Related type: 6FS5

= RCA Receiving Tube Manual =

HALF-WAVE VACUUM RECTIFIER

Miniature type used as rectifier of high-voltage pulses produced in scanning systems of colortelevision receivers. Outline 9A, OUTLINES SECTION. Tube requires miniature 9-contact socket and may be mounted in any position. Socket terminals 3 and 7 may be connected to the heater. Heater volts (ac), 3.15; amperes, 0.22. Maximum ratings as pulsed rectifier in 525line, 30-frame system: peak inverse plate volts.



18000 max; peak plate ma., 80 max; average plate ma., 1.5 max. For high-voltage considerations, see type 1B3-GT. Type 8A2 is used principally for renewal purposes.

HALF-WAVE VACUUM RECTIFIER

3A3

3A2

Glass octal type used as rectifier of high-voltage pulses produced in the scanning systems of color television receivers. Outline 15D, OUTLINES SECTION. Tube requires octal socket



and may be mounted in any position. Socket terminals 1, 3 4, 5, 6, and 8 may be connected to socket terminal 7. Socket terminals 4 and 6 may be used as tie points for components at or near heater potential. For high-voltage considerations, see type 1B3-GT.

| HEATER VOLTAGE (AC) | 8.15* | volts |
|--|--------------------|------------|
| HEATER CURRENT DIRECT INTERELECTRODE CAPACITANCE (Approx.): | 0.22 | ampere |
| Plate to Heater, Cathode, and Internal Shield | 1.5 | DÍ |
| | | T |
| * Under no circumstances should the heater voltage be less than 2.65 volts | or greater than 3. | .65 volts. |

PULSED RECTIFIER

For operation in a 525-line, 30-frame system

| Maximum Ratings, (Design-Maximum Values): | | |
|---|------------------|----------|
| PEAK INVERSE PLATE VOLTAGE | 30000 max | volts |
| PEAK PLATE CURRENT | 88 max | ma |
| AVERAGE PLATE CURRENT. | 1.7 max | ma |
| The duration of the voltage pulse must not exceed 15 per cent of one horizont | al scanning cyc | le. In a |

525-line, 30-frame system, 15 per cent of one horizontal scanning cycle is 10 microseconds.

DIODE—TRIODE—PENTODE

3A8GT

Glass octal type used as combined detector, af amplifier, and rf amplifier in battery-operated receivers. Maximum over-all length, 3-7/16 inches; maximum diameter, 1-5/16 inches. Filament volts, 1.4 (parallel), 2.8 (series); amperes, 0.1 (parallel), 0.05 (series). Typical operation as class A_1amplifier: triode unit—plate volts, 90(110 max); grid volts, 0; amplification factor, 60; plate resistance, 0.2 megohm; transconductance,



825 μmhos; plate ma., 0.2; pentode unit—plate and grid-No.2 volts, 90 (110 max); grid-No.1 volts, 0; plate resistance, 0.8 megohm; transconductance, 750 μmhos; plate ma., 1.5; grid-No.2 ma., 0.5. This is a DISCONTINUED type listed for reference only.

3AF4A Related types: 2AF4B, 6AF4A

MEDIUM-MU TRIODE

Miniature type used as local oscillator in uhf television receivers covering the frequency range of 470 to 890 megacycles per second and employing series-connected heater strings. Out-



line 7A, OUTLINES SECTION. Heater volts (ac/dc), 3.15; amperes, 0.45; warmup time (average), 11 seconds. Except for heater ratings, this type is identical with miniature type 6AF4-A.

TWIN DIODE

Miniature type having high-perveance used as detector in television receivers employing series-connected heaterstrings. Outline 7A, OUTLINES SECTION. Heater volts (ac/dc), 3.15;

SAL5 Related types: 6AL5, 12AL5

amperes, 0.6; warm-up time (average), 11 seconds. Except for heater ratings, this type is identical with miniature type 6AL5.

HALF-WAVE VACUUM RECTIFIER.

Duodecar type used to supply high voltage to the anode of picture tubes in television receivers. Outline 16B, OUTLINES SECTION. Tube requires duodecar twelve-contact **3AT2**


socket and may be mounted in any position. For high-voltage and X-ray safety considerations, refer to type 1B3-GT. Heater volts (ac/dc), 3.15; amperes, 0.22.

PULSED RECTIFIER

For operation in a 525-line, 30-frame system

| Maximum Ratings, (Design-Maximum Values): | | | |
|--|----------|---------|-----------|
| PEAK INVERSE PLATE VOLTAGE [®] | 80000 | max | volts |
| PEAK PLATE CURRENT | 88 | max | ma |
| Average Plate Current | 1.7 | max | ma |
| The duration of the voltage pulse must not exceed 15 per cent of one horizon | tal scan | ning cy | cle. In a |

525-line, 30-frame system, 15 per cent of one horizontal scanning cycle is 10 microseconds.



SHARP-CUTOFF PENTODE

Miniature type used as rf amplifier in television receivers employing series-connected heater strings. Outline 7B, OUTLINES SECTION. Heater volts (ac/dc), 3.15; amperes,



4AU6, 6AU6A, 12AU6

0.6; warm-up time (average), 11 seconds. Peak heater-cathode volts, 200 max. When the heater is positive with respect to the cathode, the dc component of the heatercathode voltage must not exceed 100 volts. Except for heater and heater-cathode ratings, this type is identical with miniature type 6AU6.



TWIN DIODE—HIGH-MU TRIODE

Miniature type used as combined detector, amplifier, and avc tube in television receivers employing seriesconnected heater strings. Outline 7B, OUTLINES SECTION. Heater volts

SAV6 Related types 4AV6, 6AV6, 12AV6

(ac/dc), 3.15; amperes, 0.6; warm-up time (average), 11 seconds. Peak heatercathode volts, 200 max. When the heater is positive with respect to the cathode, the dc component of the heater-cathode voltage must not exceed 100 volts. Except for heater and heater-cathode ratings, this type is identical with miniature type 6AV6.

HALF-WAVE VACUUM RECTIFIER

Glass octal type used as rectifier of high-voltage pulses produced in the scanning system of television receivers. Outline 15B, OUTLINES SECTION. Tube requires octal socket and may be mounted in any position. Heater volts (ac/dc), 3.15: amperes, 0.22.



PULSED RECTIFIER

For operation in a 525-line, 30-frame system

| Maximum Ratings, (Design-Maximum Values): | | | |
|---|----------|------|-----------|
| Peak Inverse Plate Voltage* | 30000 | max | volts |
| Peak Plate Current | | max | ma |
| AVERAGE PLATE CURRENT | 1.7 | max | ma |
| * The duration of the voltage pulse must not exceed 15 per cent of one horizon | | | cle. In a |
| 525-line, 30-frame system, 15 per cent of one horizontal scanning cycle is 10 m | icroseco | nds. | |

HALF-WAVE VACUUM RECTIFIER

3B2

Related types:

6BA6, 12BA6

Related types:

4BC5, 6BC5

3AW3

Glass octal type used as rectifier of highvoltage pulses produced in the scanning system of television receivers. Outline 25B, OUTLINES SECTION. Tube requires octal socket and may be mounted in any position. Low-potential circuits should not be connected to any of thesocket terminals. Any or all of the following socketterminal conna reduction: socket terminas 1, 3, add in corona reduction: socket terminas 1, 3,



5, and 7 may be connected together; socket terminals 2, 6, and 8 may be connected together; socket terminal 4 may be connected to socket terminals 2 or 7, or may be used as a tie point for a heater-voltage dropping resistor. Heater volts (ac/dc), 3.15; amperes, 0.22. Maximum ratings as pulsed rectifier in 525-line, 30-frame system; peak inverse plate volts (*absolute maximum*), 35000 max (dc 25000 max); peak plate ma., 80 max; average plate ma., 1.1 max. For high-voltage considerations, see type 1183-GT. Type 3B2 is used principally for renewal purposes.

REMOTE-CUTOFF PENTODE

Miniature type used as rf amplifier in standard broadcast and FM receivers, as well as in wide-band, highfrequency applications; for use in equipment employing series-connected



heater strings. Outline 7B, OUTLINES SECTION. Heater volts (ac/dc), 3.15; amperes, 0.6; warm-up time (average), 11 seconds. Except for heater ratings, this type is identical with miniature type 6BA6.


SHARP-CUTOFF PENTODE

Miniature type used as rf or if amplifier in television receivers employing series-connected heater strings. Outline 7B, OUTLINES SECTION. Heater volts (ac/dc), 3.15; amperes,



0.6; warm-up time (average), 11 seconds. Peak heater-cathode volts, 200 max. When the heater is positive with respect to the cathode, the dc component of the heater-cathode voltage must not exceed 100 volts. Except for heater and heater-cathode ratings, this type is identical with miniature type 6BC5.

= Technical Data =



PENTAGRID CONVERTER

Miniature type used as converter in superheterodyne circuits in both the standard broadcast and FM bands in equipment employing series-connected heater strings.Outline 7B, OUTLINES



SECTION. Heater volts (ac/dc), 3.15; amperes, 0.6; warm-up time (average), 11 seconds. Except for heater ratings, this type is identical with miniature type 6BE6.



MEDIUM-MU TRIODE

Miniature types used as rf amplifier in grid-drive circuits of vhf television tuners. The double base-pin connections for both cathode and grid reduce effective lead inductance and



lead resistance with consequent reduction in input conductance. In addition, the basing arrangement facilitates isolation of input and output circuits and permits short, direct connections to base-pin terminals. Outline 7B,OUTLINES SECTION. Heater volts (ac/dc), 3; amperes, 0.45; warm-up time (average), 11 seconds. Except for heater ratings, the 3BN4 and 3BN4-A are identical with miniature types 6BN4 and 6BN4-A, respectively. Type 3BN4 is a DISCONTINUED type listed for reference only.



BEAM TUBE

Miniature type used as combined limiter, discriminator, and af voltage amplifier in intercarrier television and FM receivers employing series-connected heater strings. Outline 7C.



OUTLINES SECTION. Heater volts (ac/dc), 3.15; amperes, 0.6; warm-up time (average), 11 seconds. Except for heater ratings, this type is identical with miniature type 6BN6.



SHARP-CUTOFF TWIN PENTODE

Miniature type used as combined sync separator, sync clipper, and agc amplifier tube in television receivers employing series-connected heater strings. Outline 8D, OUTLINES SEC-

3BU8 Related types: 4BU8, 6BU8

TION. Heater volts (ac/dc), 3.15; amperes, 0.6; warm-up time (average), 11 seconds. Except for heater ratings, this type is identical with miniature type 6BU8.



PENTAGRID AMPLIFIER

Miniature type used as gated amplifier in television receivers employing series-connected heater strings. Outline 7B, OUTLINES SECTION. Heater volts (ac/dc), 3.15; amperes,

3BY6 Related type: 6BY6

0.6; warm-up time (average), 11 seconds. Except for heater ratings, this type is identical with miniature type 6BY6.

SEMIREMOTE-CUTOFF PENTODE

Miniature type used in gain-controlled video if stages of television receivers employing series-connected heaterstrings. Outline 7B, OUTLINES SECTION. Heater volts (ac/dc), 3.15:

amperes. 0.6: warm-up time (average), 11 seconds. Peak heater-cathode volts when heater is negative with respect to cathode, 300 max (the dc component must not exceed 200 volts). Except for heater and heater-cathode ratings, this type is identical with miniature type 6BZ6.

SHARP-CUTOFF PENTODE

Miniature type used as rf or if amplifier in television receivers employing series-connected heater strings. Outline 7B, OUTLINES SECTION. Heater volts (ac/dc), 3.15; amperes,

0.6; warm-up time (average), 11 seconds. Peak heater-cathode volts: heater negative with respect to cathode, 300 max; heater positive with respect to cathode, 200 max (the dc component must not exceed 100 volts). Except for heater and heatercathode ratings, this type is identical with miniature types 6CB6 and 6CB6-A.

SHARP-CUTOFF PENTODE

Miniature type used as rf and if amplifier in vhf television receivers employing series-connected heater strings. Outline 7B, OUTLINES SECTION. Heater volts, 3.15; amperes, 0.6; heater

warm-up time (average), 11 seconds. Except for heater ratings, this type is identical with miniature type 6CE5.

SHARP-CUTOFF PENTODE

Miniature type used as rf or if amplifier in television receivers employing series-connected heater strings. Outline 7B, OUTLINES SECTION. Heater volts (ac/dc), 3.15; amperes,

0.6; warm-up time (average), 11 seconds. Peak heater-cathode volts: heater negative with respect to cathode, 300 max; heater positive with respect to cathode, 200 max (the dc component must not exceed 100 volts). Except for heater and heatercathode ratings, this type is identical with miniature type 6CF6.

PENTAGRID AMPLIFIER

Miniature type used as gated amplifier in television receivers employing series-connected heater strings. Outline 7B, OUTLINES SECTION. Heater volts (ac/dc), 3.15; amperes,

0.6; warm-up time (average), 11 seconds. Except for heater ratings, this type is identical with miniature type 6CS6.



G3(2

×(2



Related types:

4BZ6, 6BZ6, 12BZ6

Related types:

4CB6, 6CB6, 6CB6A

6CE5

Related type: 6CF6

Related types:

4CS6, 6CS6



6)G2

6)G2





H(3

H(3

×(2



PDI

F(3

10(2

SHARP-CUTOFF TETRODE

Miniature type used as rf amplifier in vhf tuners of television receivers employing series-connected heater strings. Outline 7B, OUTLINES SEC-TION. Heater volts (ac/dc), 2.9; am-

3CY5 Related types: 2CY5, 4CY5, 6CY5

3DG4

peres, 0.45; warm-up time (average), 11 seconds. Except for heater ratings, this type is identical with miniature type 6CY5.


FULL-WAVE VACUUM RECTIFIER

Glass octal type used as power supply in television receivers and other equipment having high dc requirements. Outline 19D, OUTLINESSEC-TION. Tube requires octal socket and

may be operated in any position. It is especially important that this tube, like other power-handling tubes, be adequately ventilated. For discussion of Rating Chart, refer to INTERPRETATION OF TUBE DATA. Filament volts (ac/dc), 3.3: amperes. 3.8.

FULL-WAVE RECTIFIER

| Maximum Ratings, (Design-Maximum Values): | |
|---|------------------|
| PEAK INVERSE PLATE VOLTAGE | 1050 max volts |
| PEAK PLATE CURRENT (Per Plate) | 1.2 max amperes |
| HOT-SWITCHING TRANSIENT PLATE CURRENT (Per Plate) | 6.5 max amperes |
| AC PLATE SUPPLY VOLTAGE (Per Plate, rms) | See Rating Chart |
| DC OUTPUT CURRENT (Per Plate) | See Rating Chart |
| BULB TEMPERATURE (at hottest point on bulb surface) | 200 max °C |



RATING CHART

Typical Operation with Capacitor Input to Filter:

| AC Plate-to-Plate Supply Voltage (rms) | 550 40 | volts µf |
|---|-----------|-------------|
| Effective Plate-Supply Impedance per Plate DC Output Voltage at Input to Filter (Approx.): | 32 | ohms |
| At full-load current of 350 ma | 800 | volts |

Characteristics:

SHARP-CUTOFF PENTODE

Miniature types used as intermediate-frequency amplifier in television receivers. Outline 7B, OUTLINES SECTION. Heater volts (ac/dc), 3.15, amperes. 0.6; warm-up time (average), 602

G3

6

11 seconds, Peak heater-cathode volts: heater negative with respect to cathode, 300 max; heater positive with respect to cathode, 200 max (the dc component must not exceed 100 volts). Except for heater and heater-cathode ratings, this type is identical with miniature type 6DK6.



3DK6

Related types: 6DK6, 12DK6

SHARP-CUTOFF PENTODE

Miniature types used as FM detector in television receivers employing series-connected heater strings. Outline 7B, OUTLINES SECTION. Heater volts (ac/dc), 3.15; amperes, 0.6;

warm-up time (average), 11 seconds. Except for heater ratings, these types are identical with miniature types 6DT6 and 6DT6-A, respectively. Type 3DT6 is a DISCONTINUED type listed for reference only.

MEDIUM-MU TRIODE

3DZ4 Related types: 2DZ4, 6DZ4 Miniature type used as a localoscillator tube in uhf television receivers covering the frequency range from 470 to 890 megacycles and employing series-connected heater strings.

Outline 7A, OUTLINES SECTION. Heater volts (ac/dc), 3.2; amperes, 0.45; warm-up time (average), 11 seconds. Peak heater-cathode volts, 180 max (the dc component must not exceed 100 volts when heater is positive with respect to cathode). Except for heater and heater-cathode ratings, this type is identical with miniature type 6DZ4.

SHARP-CUTOFF PENTODE

Miniature type used as rf amplifier in vhf tuners of television receivers having series-connected heater strings. Outline 7B, OUTLINES SECTION. Heater volts (ac/dc) 2.9; amperes,



3

6⁽²


0.45; warm-up time (average), 11 seconds. Except for heater ratings, this type is identical with miniature type 6EA5.

SEMIREMOTE-CUTOFF PENTODE

Miniature type used as if-amplifier tube in television receivers. Outline8C,OUTLINESSECTION.Heater volts (ac/dc), 3.4; amperes, 0.6; Except for heater ratings, this type is identical with miniature type 6EH7.

SHARP-CUTOFF PENTODE

Miniature type used as if-amplifier tube in television receivers.Outline 8C, OUTLINES SECTION. Heater volts (ac/dc), 3.4; amperes, 0.6. Except for heater ratings, this type is identical with miniature type 6EJ7.






3EH7 Related types: 4EH7, 6EH7

Related type:

6EA5





HIGH-MU TRIODE


Miniature type with frame grid used in vhf tuners of television receivers. Outline 7B, OUTLINES SEC-TION. Heater volts (ac/dc), 2.8; amperes, 0.45. Except for heater ratings, this type is identical with miniature type 6ER5.

HIGH-MU TRIODE

Miniature type used as rf-amplifier tube in vhf tuners of television receivers employing series-connected heaterstrings.Outline7B,OUTLINES SECTION. Heater volts (ac/dc), 3; 3ER5 Related types: 2ER5, 6ER5

3FH5 Related types: 2FH5, 6FH5

amperes, 0.45; warm-up time (average), 11 seconds. Except for heater ratings, this type is identical with miniature type 6FH5.




HIGH-MU TRIODE

Miniature type with frame grid used as grounded-cathode rf-amplifier tube in vhf tuners of television receivers employing series-connected heaterstrings.Outline 7B, OUTLINES

3GK5 Related type: 2GK5.6GK5

SECTION. Heater volts (ac/dc), 2.8; amperes, 0.45; warm-up time (average), 11 seconds. Except for heater ratings, this type is identical with miniature type 6GK5.




SHARP-CUTOFF TWIN PENTODE

Miniature type used as combined sync separator, sync clipper, and agc amplifier tube in television receivers employing series-connected heater strings. Outline 8D, OUTLINES SEC- 3GS8/ 3BU8 Related type:

4GS8/4BU8

TION. Heater volts (ac/dc), 3.15; amperes, 0.6. Except for heater ratings, this type is identical with miniature type 4GS8/4BU8.



PP2(3

G3P2

G3PI

PGI

8)PP



Miniature type used as rf-amplifier tube in vhf television tuners. Outline 7A, OUTLINES SECTION. Heater volts (ac/dc), 2.7; amperes, 0.45. Except for heater ratings, this type is identical with miniature type 6HA5.

SHARP-CUTOFF TWIN PENTODE

Miniature type used in agc amplifier, sync, and noise-limiting circuits of television receivers employing series-connected heater strings. One pentode unit is used as a combined



3HS8 Related types: 4HS8, 6HS8

sync separator and sync clipper; the other pentode unit is used as the agc amplifier.

= RCA Receiving Tube Manual =

Outline 8D, OUTLINES SECTION. Heater volts (ac/dc), 3.15; amperes, 0.6; warm-up time (average), 11 seconds. Except for heater ratings, this type is identical with miniature type 6HS8.

SHARP-CUTOFF PENTODE

Miniature type with frame grid used in if-amplifier stages of television receivers utilizing intermediate frequencies in the order of 40 megacycles and employing series-connected heater

strings. Outline 8B, OUTLINES SECTION. Heater volts (ac/dc), 3.5; amperes, 0.6; heater warm-up time (average), 11 seconds. Except for heater ratings, this type is identical with miniature type 6JC6.

SHARP-CUTOFF PENTODE

Miniature type used as if-amplifier tube in television receivers utilizing intermediate frequencies in the order of 40 megacycles and employing series-connected heater strings. Out-

line 8B. OUTLINES SECTION. Heater volts (ac/dc), 3.5; amperes, 0.6; warm-up time (average), 11 seconds. Except for heater ratings, this type is identical with miniature type 6JD6.

BEAM POWER TUBE

Glass lock-in type used in output stage of ac/dc/battery portable receivers. Outline 13A, **OUTLINES SECTION.** Tube requires lock-in socket. Filament volts (dc), 1.4 (parallel), 2.8 (series); amperes, 0.1 (parallel), 0.05 (series). For electrical characteristics, refer to glass-octal type 3Q5-GT. Type 3LF4 is used principally for renewal purposes.


POWER PENTODE

Miniature type used in output stage of lightweight, compact, portable battery-operated equipment. Outline 7B, OUTLINESSECTION. Except for terminal connections, types 3Q4 and 3V4 are identical. Refer to type 3V4 for ratings and typical operation. Type 3Q4 is used principally for renewal purposes.

BEAM POWER TUBE

Glass octal type used in output stage of ac /dc battery portable receivers. Outline 14C. OUTLINES SECTION. This type may be supplied with pin 1 omitted. Filament volts (dc), 2.8 in series filament arrangement and 1.4 in parallel arrangement; amperes. 0.05 (series), 0.1 (parallel). Typical operation as Class A1 amplifier: plate and grid-No.2 volts, 110 max; grid-No.1 volts, -6.6; peak af grid-No.1 volts,

5.1 (series), 5.4 (parallel); plate ma., 8.5 (series), 10 (parallel); grid-No.2 ma., 1.1 (series), 1.4 (parallel); total cathode ma., 6 max for each 1.4-volt filament section; plate resistance (approx.), 0.11 megohm (series), 0.1 megohm (paralle!); transconductance, 2000 µmhos (series), 2200 µmhos (paralle!); load resistance, 8000 ohms; total harmonic distortion, 8.5 per cent (series), 6 per cent (parallel); max.-signal power output, 330 mw (series), 400 mw (parallel). This type is used principally or renewal purposes.



61 (2







8

G3.19

6

G3

Ga





3LF4

3JC6

Related types:

4JC6, 6JC6


3.JD6

Related types:

4JD6, 6JD6



3**Q**5**G**T



53

62(3

POWER PENTODE

Miniature type used in output stage of lightweight, compact, portable, battery-operated equipment. Outline 7B, OUTLINES SEC-TION. Tube requires miniature seven-contact socket. Filament volts (dc), 2.8 (series), 1.4 (parallel); amperes, 0.05 (series); 0.1 (parallel). Typical operation as class A; amplifier: plate and grid-No.2 volts, 67.5 (90 maz); grid-No.1 volts, -7; peak af grid-No.1 volts, 7; zero-Signal

3S4


plate ma., 6 (series) 7.2 (parallel); zero-signal grid-No.2 ma., 1.2 (series), 1.5 (parallel); plate resistance (approx.); 0.1 megohm; transconductance, 1400 μ mhos (series), 1550 μ mhos (parallel); load resistance, 5000 ohms; maximum-signal power output, 160 milliwatts (series), 180 milliwatts (parallel). This type is used principally for renewal purposes.

POWER PENTODE

Miniature type used in output stage of lightweight, compact, portable, battery-operated equipment. Outline 7B, OUTLINES SEC-TION. Tube requires miniature seven-contact socket. Filament volts (dc), 2.8 (series), 1.4 (parallel); amperes, 0.05 (series), 0.1 (parallel), Typical operation as class A_1 amplifier; plate and grid-No.2 volts, 90 (100 max); grid-No.1 volts. -4.5; peak af grid-No.1 volts 4.5; zero-

3V4

signal plate ma., 7.7 (series), 9.5 (parallel); grid-No.2 ma., zero-signal, 1.7 (series), 2.1 (parallel); plate resistance (approx.), 0.12 megohm (series), .1 megohm (parallel); transconductance, 2000 μ mhos (series), 2150 μ mhos (parallel); load resistance, 10000 ohms; maximum-signal power output, 240 milliwatts (series), 270 milliwatts (parallel). This type is used principally for renewal purposes.



SHARP-CUTOFF PENTODE

Miniature type used as rf amplifier in television receivers employing series-connected heater strings.Outline 7B, OUTLINES SECTION. Heater volts (ac/dc), 4.2; amperes, 0.45:

4AU6 Related types: 3AU6, 6AU6A, 12AU6

warm-up time (average), 11 seconds. Peak heater-cathode volts: heater negative with respect to cathode, 200 max; heater positive with respect to cathode, 200 max (the dc component must not exceed 100 volts). Except for heater and heater-cathode ratings, this type is identical with miniature type 6AU6.



TWIN DIODE—HIGH-MU TRIODE

Miniature type used as combined detector, amplifier, and avc tube in automobile and ac-operated radio receivers employing series-connected heater strings.Outline 7B,OUTLINES



SECTION. Heater volts (ac/dc), 4.2; amperes, 0.45; warm-up time (average), 11 seconds. Except for heater ratings, this type is identical with miniature type 6AV6.



SHARP-CUTOFF PENTODE

Miniature type used in compact radio equipment as an rf or if amplifier at frequencies up to 400 megacycles per second. Outline 7B, OUTLINES SECTION. Heater volts (ac/dc), 4.2;



Miniature type used in directcoupled cathode-drive rf amplifier circuits of vhf television tuners employing series-connected heater strings.

Outline 8B, OUTLINES SECTION. Heater volts (ac/dc), 4.2; amperes, 0.6; warm-up time (average), 11 seconds. Except for heater rating, this type is identical with miniature type 6BC8.

MEDIUM-MU TRIODE SHARP-CUTOFF PENTODE

Miniature type used in frequencychanger service in television receivers. Outline 8B, OUTLINES SECTION. Heater volts (ac/dc), 4.6; amperes, 0.6 Except for heater ratings, this type is identical with miniature type 6BL8.

BEAM TUBE

Miniature type used as combined limiter, discriminator, and audio-voltage amplifier in intercarrier television and FM receivers employing seriesconnected heater strings. Outline 7C,

OUTLINES SECTION. Heater volts (ac/dc), 4.2; amperes, 0.45; warm-up time (average), 11 seconds. Peak heater-cathode volts, 200 max. When the heater is positive with respect to the cathode, the dc component of the heater-cathode voltage must not exceed 100 volts. Except for heater and heater-cathode ratings, this type is identical with miniature type 6BN6.

MEDIUM-MU TWIN TRIODE

Miniature type used in directcoupled cathode-drive rf amplifier circuits of vhf television tuners employing series-connected heater strings. Outline 8B, OUTLINES SECTION.

Heater volts (ac/dc), 4.2; amperes, 0.6; warm-up time (average), 11 seconds. Except for heater ratings, this type is identical with miniature type 6BQ7-A.

MEDIUM-MU TWIN TRIODE

Miniature type used in directcoupled cathode-drive rf amplifier circuits of vhf television tuners employing series-connected heater strings. **Outline 8B. OUTLINES SECTION.**

Heater volts (ac/dc), 4.5; amperes, 0.6; warm-up time (average), 11 seconds. Except for heater ratings, this type is identical with miniature type 6BS8.

RCA Receiving Tube Manual =

amperes, 0.45; warm-up time (average), 11 seconds. Peak heater-cathode volts: heater negative with respect to cathode, 200 max; heater positive with respect to cathode, 200 max (the dc component must not exceed 100 volts). Except for heater and heater-cathode ratings, this type is identical with miniature type 6BC5.

MEDIUM-MU TWIN TRIODE


6 G (2

Ko

G3p

IS


KT



(5

KT

KT2







Related type:

6BS8



 $\mathbf{A}\mathbf{B}\mathbf{I}$

Related type:


6BL8

4BN6

Related types:

3BN6, 6BN6





6)G2

H(3

K(2

SHARP-CUTOFF TWIN PENTODE

Miniature type used as combined sync separator, sync clipper, and agc amplifier tube in television receivers employing series-connected heater strings. Outline 8D, OUTLINES SEC-




TION. Heater volts (ac/dc), 4.2; amperes, 0.45; warm-up time(average), 11 seconds. Except for heater ratings, this type is identical with miniature type 6BU8.

SEMIREMOTE-CUTOFF PENTODE

Miniature type used in gain-controlled video if stages of television receivers employing series-connected heater strings. Outline 7B, OUT-LINES SECTION. Heater volts

4BZ6 Related types: 3BZ6, 6BZ6, 12BZ6

(ac/dc), 4.2; amperes, 0.45; warm-up time (average), 11 seconds. Except for heater ratings, this type is identical with miniature type 6BZ6.



MEDIUM-MU TWIN TRIODE

Miniature type used in directcoupled cathode-drive rf amplifier circuits of vhf television tuners employing series-connected heater strings. Outline 8B, OUTLINES SECTION.



Related types:

3CB6, 6CB6, 6CB6A

Heater volts (ac/dc), 4.2 amperes, 0.6; warm-up time (average), 11 seconds. Except for heater ratings, this type is identical with miniature type 6BZ7.



SHARP-CUTOFF PENTODE

Miniature type used as if and as rf amplifier in television receivers employing series-connected heater strings. Outline 7B, OUTLINES SECTION. Heater volts (ac/dc), 4.2; amperes,

0.45; warm-up time (average), 11 seconds. Peak heater-cathode volts: heater negative with respect to cathode, 300 max (the dc component must not exceed 200 volts); heater positive with respect to cathode, 200 max (the dc component must not exceed 100 volts). Except for heater and heater-cathode ratings, this type is identical with miniature types 6CB6 and 6CB6-A.



PENTAGRID AMPLIFIER

Miniature type used as a gated amplifier in television receivers. In such service, it may be used as a combined sync separator and sync clipper. Outline 7B, OUTLINES SECTION.



Heater volts (ac/dc), 4.2; amperes, 0.45; warm-up time (average), 11 seconds. Except for heater ratings, this type is identical with miniature type 6CS6.



SHARP-CUTOFF TETRODE

Miniature type used as rf amplifier in vhf tuners of television receivers employing series-connected heater strings. Outline 7B, OUTLINES SEC-TION. Heater volts (ac/dc), 4.5; am-



peres, 0.3; warm-up time (average), 11 seconds. Except for heater ratings, this type is identical with miniature type 6CY5.

113



SHARP-CUTOFF PENTODE

Miniature type used in the gaincontrolled picture if stages of television receivers utilizing an intermediate frequency in the order of 40 megacycles per second. Also used as an rf amplifier

4 DE6 Related type: 6DE6

4DT6

4DT6A

Related types:

3DT6A, 6DT6A


in vhf television tuners. Outline 7B, OUTLINES SECTION. Heater volts (ac/dc), 4.2; amperes, 0.45; warm-up time (average), 11 seconds. Except for heater ratings, this tube is identical with miniature type 6DE6.




SHARP-CUTOFF PENTODE

Miniature types used as FM detector in television receivers employing series-connected heater strings. Outline 7B, OUTLINES SECTION. Heater volts (ac/dc), 4.2; amperes, 0.45;

warm-up time (average), 11 seconds. Except for heater ratings, these types are identical with miniature types 6DT6 and 6DT6-A, respectively. Type 4DT6 is a DISCONTINUED type listed for reference only.







SEMI REMOTE-CUTOFF PENTODE

Miniature type used as if-amplifier tube in television receivers. Outline 8C, OUTLINES SECTION. Heater volts (ac/dc), 4.4; amperes, 0.45; Except for heater ratings, this type is identical with miniature type 6EH7.

SHARP-CUTOFF PENTODE

Miniature type used as if-amplifier tube in television receivers. Outline 8C, OUTLINES SECTION. Heater volts (ac/dc), 4.4; amperes, 0.45. Except for heater ratings, this type is identical with miniature type 6EJ7.


VARIABLE-MU TWIN TRIODE

Miniature type used in directcoupled cathode-drive rf amplifier circuits of television receivers employing series-connected heater strings. Outline 8B, OUTLINES SECTION. 4EH7 Related types: 3EH7, 6EH7

Related types: 3EJ7, 6EJ7

Related type: 6ES8

Heater volts (ac/dc), 4; amperes, 0.6; warm-up time (average), 11 seconds. Except for heater ratings, this type is identical with miniature type 6ES8.




SHARP-CUTOFF PENTODE

Miniature type used in the gaincontrolled picture-if stages of vhf television receivers operating at an intermediate frequency in the order of 40 megacycles per second. Outline 7B,

4EW6 Related types: 5EW6, 6EW6

OUTLINES SECTION. Heater volts (ac/dc), 4.2; amperes, 0.6; warm-up time (average), 11 seconds. Except for heater ratings, this type is identical with miniature type 6EW6.



SHARP-CUTOFF TWIN PENTODE

Miniature type used as combined sync separator, sync clipper, and agc amplifier tube in television receivers employing series-connected heater strings. Outline 8D. OUTLINES SEC-

Related type: 3GS8/3BU8

4GS8

TION. Tube requires miniature nine-contact socket and may be mounted in any position.

| Heater Voltage (ac/dc) Heater Current. Heater Warm-Up Time (Average) | $\begin{smallmatrix}4.2\\0.45\\11\end{smallmatrix}$ | volts ampere seconds |
|---|---|----------------------------|
| DIRECT INTERELECTRODE CAPACITANCES: Grid No.3 to Plate (Each Unit). Grid No.1 to All Other Electrodes. Grid No.3 to All Other Electrodes (Each Unit). Plate to All Other Electrodes (Each Unit). Grid No.3 of Unit No.1 to Grid No.3 of Unit No.2. | 2 6 3.8 3.2 0.015 max | pf pf pf pf |

CLASS A1 AMPLIFIER

Maximum Ratings, (Design-Maximum Values): PLATE VOLTAGE (Each Unit). £00 max volts GRID-NO.3 (SUPPRESSOR-GRID) VOLTAGE (Each Unit): Peak positive value..... 50 max volta DC negative value. DC positive value. GRID-NO.2 (scREEN-GRID) VOLTAGE. GRID-NO.1 (CONTROL-GRID) VOLTAGE, Negative bias value. -50 maxvolts 3 max volts 150 mar volta -50 max volta 12 maxCATHODE CURRENT..... ma 0.75 max GRID-NO.2 INPUT watt PLATE DISSIPATION (Each Unit).... PEAK HEATER-CATHODE VOLTAGE: 1.1 max watts Heater negative with respect to cathode..... 200 mar volts 200° max volts Heater positive with respect to cathode..... Characteristics: With Both Units Operating 100 100 volts Plate Voltage (Each Unit)... Grid-No.2 Voltage (Each Unit). Grid-No.2 Voltage. Grid-No.1 Voltage. -10 0 volts 67.5 67.5 volts volts Plate Current (Each Unit)..... 2 ma $3.6 \\ 7.7$ Grid-No.2 Current. ma 6.1 Cathode Current..... ma With One Unit Opera.ing Plate Voltage. Grid-No.3 Voltage. Grid-No.2 Voltage. Grid-No.1 Voltage. Grid-No.3 Transconductance. Grid-No.1 Transconductance. 100 100 volts 0 volta 67.5 67.5 volts volts 270 umhos 1200 umhos Grid-No.3 Voltage (Approx.) for plate current of 100 µa..... ma 3.7 volta Grid-No.1 Voltage (Approx.) for plate current of 100 µa..... volts Maximum Circuit Values: Grid-No.3-Circuit Resistance (Each Unit)..... 0.5 maxmegohm Grid-No.1-Circuit Resistance..... 0.5 maxmegohm [°]The dc component must not exceed 100 volts.

Adjusted to give a dc grid-No.1 current of 100 microamperes. • With plate and grid No.3 of the other unit connected to ground.



POWER PENTODE

Miniature type used in audio output stages of radio and television receivers employing series-connected heaterstrings. Outline 7B, OUTLINES SECTION. Tube requires miniature

4GZ5

seven-contact socket and may be mounted in any position. Heater volts (ac/dc), 4: amperes, 0.6; warm-up time (average), 11 seconds.

CLASS A1 AMPLIFIER

Maximum Ratings, (Design-Maximum Values):

| PLATE VOLTAGE | | 300 max | volts |
|---|-------|----------------------|---------------|
| GRID-NO.2 (SCREEN-GRID) VOLTAGE | | 300 max | volts |
| GRID-NO.1 (CONTROL-GRID) VOLTAGE, Positive-bias value | | 0 max | volts |
| AVERAGE CATHODE CURRENT | | 30 max | ma |
| PLATE DISSIPATION | | 4.8 max | watts |
| GRID-NO.2 INPUT. | | 1.1 max | watts |
| PEAK HEATER-CATHODE VOLTAGE: | | | |
| Heater negative with respect to cathode | | 200 max | volts |
| Heater positive with respect to cathode | | 200 ^m max | volts |
| BULB TEMPERATURE (At hottest point) | | 200 max | °C |
| | | | |
| Typical Operation: | | | |
| Plate Supply Voltage | 250 | 250 | volts |
| Grid-No.2 Supply Voltage | 250 | 250 | volts |
| Cathode-Bias Resistor | 270 | 270 | ohms |
| Peak AF Grid-No.1 Voltage | 9.8 | 2 | volts |
| Zero-Signal Plate Current. | 16 | 16 | ma |
| Maximum-Signal Plate Current | 16 | 16 | ma |
| Zero-Signal Grid-No.2 Current | 2.7 | 2.7 | ma |
| Maximum-Signal Grid-No.2 Current | 5 | 5 | ma |
| Plate Resistance (Approx.) | - | 0.15 | megohm |
| Transconductance | - | 8400 | <i>µ</i> mhos |
| Load Resistance | 15000 | 15000 | ohms |
| Total Harmonic Distortion | 10 | 10 | per cent |
| Maximum-Signal Power Output | 1.8 | 1.1 | watts |
| | | | |

Maximum Circuit Values:

| Grid-No.1-Circuit Resistance: | | |
|---|---------|--------|
| For fixed-bias operation | 0.5 max | megohm |
| For cathode-bias operation | 1 max | megohm |
| The dc component must not exceed 100 volts. | | |
| • Bypassed. | | |

SHARP-CUTOFF PENTODE



Miniature type with frame grid used in the if-amplifier stages of television receivers employing series-connected heaterstrings.Outline 8B,OUT-LINES SECTION. Tube requires min-



iature nine-contact socket and may be mounted in any position. Heater volts (ac/dc), 4.2; amperes, 0.45; warm-up time (average), 11 seconds.

CLASS A1 AMPLIFIER

| Maximum Ratings, (Design-Maximum Values). | | |
|---|----------------|------------|
| PLATE VOLTAGE. | 250 max | volts |
| GRID-NO.2 (SCREEN-GRID) SUPPLY VOLTAGE | 250 max | volts |
| GRID-NO.2 VOLTAGE. | See curv | e page 70 |
| GRID-NO.1 (CONTROL-GRID) VOLTAGE, Negative-bias value | -50 max | volts |
| CATHODE CURRENT. | 25 max | ma |
| PLATE DISSIPATION | 2.5 max | watts |
| GRID-NO.2 INPUT: | | |
| For grid-No.2 voltages up to 125 volts | 0.6 max | watt |
| For grid-No.2 voltages between 125 and 150 volts | See curv | e page 70 |
| PEAK HEATER-CATHODE VOLTAGE: | | |
| Heater negative with respect to cathode | 200 max | volts |
| Heater positive with respect to cathode | 200 max | volts |
| | | |
| Characteristics: | | |
| Plate Supply Voltage | 125 | volts |
| Grid No.3 (Suppressor Grid) Connec | ted to cathode | at socket |
| Grid-No.2 Supply Voltage | 125 | volts |
| Cathode-Bias Resistor | 56 | ohms |
| Plate Resistance (Approx.) | 0.156 | megohm |
| Transconductance | 15000 | μ mhos |
| Plate Current | 13 | ma |
| Grid-No.2 Current | 3.2 | ma |
| Grid-No.1 Voltage (Approx.) for transconductance of 100 µmhos | -3 | volts |
| | | |

— Technical Data —

Maximum Circuit Values:

Grid-No.1-Circuit Resistance:

The dc component must not exceed 100 volts.



SHARP-CUTOFF TWIN PENTODE

Miniature type used in agc amplifier, sync, and noise-limiting circuits of television receivers employing seriesconnected heater strings. One pentode unit is used as a combined sync sepa-

4HS8 Related types: 3HS8, 6HS8

rator and sync clipper; the other pentode unit is used as the agc amplifier. Outline 8D, OUTLINES SECTION. Heater volts (ac/dc), 4.2; amperes, 0.45; warm-up time (average), 11 seconds. Except for heater ratings, this type is identical with miniature type 6HS8.



SEMIREMOTE-CUTOFF PENTODE

Miniature type with frame grid used in the if-amplifier stages of television receivers employing series-connected heater strings.Outline 8B,OUT-LINESSECTION. Tuber equires min-

4HT6

iature nine-contact socket and may be mounted in any position. Heater volts (ac/dc), 4.2; amperes, 0.45; warm-up time (average), 11 seconds.

CLASS A1 AMPLIFIER

| Maximum Ratings, (Design-Maximum Values): | | |
|---|---|---|
| PLATE VOLTAGE. GRID-NO.2 (SCREEN-GRID) SUPPLY VOLTAGE. GRID-NO.2 VOLTAGE. GRID-NO.1 (CONTROL-GRID) VOLTAGE, Negative-bias value. CATHODE CURRENT. PLATE DISSIPATION. GRID-NO.2 INPIT: | 250 max 250 max See curv -50 max 25 max 2.5 max | volts volts e page 70 volts ma watts |
| For grid-No.2 voltages up to 125 volts For grid-No.2 voltages between 125 and 250 volts Pack HartBR-CATHODE VOLTAGE: | 0.6 max See curv | watt e page 70 |
| Heater negative with respect to cathode | 200 max 200∎max | volts volts |
| Characteristics: | | |
| Plate Supply Voltage. Grid-No.3 (Suppressor Grid). Connected Grid-No.2 Supply Voltage. Cathode-Bias Resistor. Plate Resistance (Approx.) Transconductance. Plate Current. Grid-No.2 Current. Grid-No.1 Voltage (Approx.) for transconductance of 100 µmhos | 125 d to cathode 125 56 0.143 14000 15 4 -4.5 | volts at socket volts megohm µmhos ma ma volts |
| Maximum Circuit Values: | | |

The dc component must not exceed 100 volts.



SHARP-CUTOFF PENTODE

Miniature type with frame grid used in if-amplifier stages of television receivers utilizing intermediate frequencies in the order of 40 megacycles and employing series-connected heater

4JC6 Related types: 3JC6, 6JC6

strings. Outline 8B, OUTLINES SECTION. Heater volts (ac/dc), 4.5; amperes, 0.45; warm-up time (average), 11 seconds. Except for heater ratings, this type is identical with miniature type 6JC6.

SHARP-CUTOFF PENTODE

Miniature type used as if-amplifier tube in television receivers utilizing intermediate frequencies in the order of 40 megacycles and employing series-connected heater strings. Out-



line 8B, OUTLINES SECTION. Heater volts (ac/dc), 4.5; amperes, 0.45; warm-up time (average), 11 seconds. Except for heater ratings, this type is identical with miniature type 6JD6.

DIODE—SHARP-CUTOFF PENTODE

Miniature type used in diversified applications in television receivers employing series-connected heater strings. The pentode unit is used as an amplifier and the high-perveance diode as a

G₂P₃ G₁P₂ G₁

detector or dc restorer. Outline 8B, OUTLINES SECTION. Heater volts (ac/dc), 4.7; amperes, 0.6; warm-up time (average), 11 seconds. Except for heater ratings, this type is identical with miniature type 6AM8-A.

MEDIUM-MU TRIODE— SHARP-CUTOFF PENTODE

5AN8 Related type: 6AN8A


Related types: 3JD6, 6JD6

5AM8

Related type:

6AM8A

Miniature type used in a wide variety of applications in television receivers employing series-connected heater strings. The pentode unit is used as an amplifier and the triode unit is



used in oscillator or sync circuits. Outline 8B, OUTLINES SECTION. Heater volts (ac/dc), 4.7; amperes, 0.6; warm-up time (average), 11 seconds. Except for heater ratings, this type is identical with miniature type 6AN8.

BEAM POWER TUBE

Miniature type used as audio amplifier in television receivers employing series-connected heater strings. Outline 7C, OUTLINES SECTION. Heater volts (ac/dc), 4.7; amperes, 0.6;



warm-up time (average), 11 seconds. Except for heater ratings, this type is identical with miniature type 6AQ5-A.

5AS4 5AS4A

Related types:


6AQ5A, 12AQ5

FULL-WAVE VACUUM RECTIFIER

Glass octal types used in power supply of television receivers having high dc requirements. Type 5AS4-A, Outline 19C, OUTLINES SECTION. Type 5AS4 maximum dimensions:



over-all length, 5-1/8 inches; seated height, 4-9/16 inches; diameter, 2-1/16 inches. Type 5AS4-A may be supplied with pins 3, 5, and 7 omitted. Tubes require octal socket. Vertical mounting is preferred, but horizontal mounting is permissible if pins 1 and 4 are in vertical plane. It is especially important that these tubes, like other power-handling tubes, be adequately ventilated. Heater volts (ac), 5.0; amperes, 3.0. For maximum ratings, typical operation, and curves, refer to type 5U4-GB. Type 5AS4 is a DISCONTINUED type listed for reference only.



DIODE—SHARP-CUTOFF PENTODE

Miniature type used in diversified applications in television receivers employing series-connected heater strings. The pentode unit is used as an amplifier and the high-perveance diode as a

5AS8 Related type: 6AS8

detector or dc restorer. Outline 8B, OUTLINES SECTION. Heater volts (ac/dc), 4.7; amperes, 0.6; warm-up time (average), 11 seconds. Except for heater ratings, this type is identical with miniature type 6AS8.




MEDIUM-MU TRIODE— SHARP-CUTOFF PENTODE

Miniature type used as combined oscillator and mixer tube in television receivers employing series-connected heaterstrings.Outline 8B, OUTLINES SECTION. Heater volts (ac/dc), 4.7;

5AT8 Related type: 6AT8A

amperes, 0.6; warm-up time (average), 11 seconds. Except for heater ratings, this type is identical with miniature type 6AT8-A.



FULL-WAVE VACUUM RECTIFIER

Glass octal type used as power supply in television receivers and other equipment having high dc requirements. Maximum dimensions: over-all length, 4-3/4 inches; seated height,

5AU4

4-3/16 inches; diameter, 1-11/16 inches. Tube requires octal socket and must be used in vertical position; horizontal operation is permissible only if pins 2 and 4 are in vertical plane. It is especially important that this tube, like other power-handling tubes, be adequately ventilated. Filament volts (ac/dc), 5; amperes, 3.75. For discussion of Rating Chart, refer to INTERPRETATION OF TUBE DATA.

FULL-WAVE RECTIFIER

| Maximum Ratings, (Design-Center Values): | | |
|--|----------|-----------|
| PEAK INVERSE PLATE VOLTAGE | 1400 max | volts |
| PEAK PLATE CURRENT (Per Plate) | 1075 max | ma |
| HOT-SWITCHING TRANSIENT PLATE CURRENT | | |
| (Per Plate), maximum duration 0.2 second | 5.25 max | |
| AC PLATE SUPPLY VOLTAGE (Per Plate, rms) | | ing Chart |
| DC OUTPUT CURRENT (Per Plate) | See Rati | ing Chart |
| RATING CHART | | |

TYPE 5AU4 OUTPUT MILLIAMPERES PER PLATE AC AC MAXIMUM OPERATING VALUES WITH CHOKE-INPUT FILTER 250 200 162.5 150 104 100 50 20 58 ¢ 300 400 500 AC PLATE SUPPLY VOLTS (RMS) PER PLATE (WITHOUT LOAD)

119

Typical Operation:


| Filter Input | Cap | acitor | Choke | |
|--|-----|--------|-------|---------|
| AC Plate-to-Plate Supply Voltage (rms) | | | 1000 | volts |
| Filter-Input Capacitor | 40 | 40 | - | μf |
| Effective Plate Supply Impedance per Plate | 30 | 50 | - | ohms |
| Filter-Input Choke | - | - | 10 | henries |
| DC Output Current | 350 | 325 | 325 | ma |
| DC Output Voltage at Input to Filter (Approx.) | 275 | 395 | 395 | volts |
| Characteristics, Instantaneous Value: | | | | |

Tube Voltage Drop for plate current of 350 ma (per plate).....

MEDIUM-MU TRIODE— SHARP-CUTOFF PENTODE

5AV8

Miniature type used in a wide variety of applications in television re-^{PT} ceivers employing series-connected heater strings. Outline 8B, OUTLINES GT SECTION. Tube requires miniature nine-contact socket and may be mounted in any position.



50

volts

| HEATER VOLTAGE (AC/DC) HEATER CURRENT HEATER WARM-UP TIME (Average) DIRECT INTERELECTRODE CAPACITANCES: | 4.7 0.6 11 | volts ampere seconds |
|--|--|----------------------------|
| Triode Unit: Grid to Plate Grid to Cathode and Heater Plate to Cathode and Heater | 1.5 2 0.34 | pf pf pf |
| Pentode Unit: Grid No.1 to Plate Grid No.1 to Cathode, Heater, Grid No.2, Grid No.3, and Internal Shield Plate to Cathode, Heater, Grid No.2, Grid No.3, and Internal Shield Triode Grid to Pentode Plate. | $\begin{array}{c} 0.04 \ max \\ 7 \\ 3 \\ 0.005 \end{array}$ | pf pf pf pf |
| Pentode Grid No.1 to Triode Plate. | 0.006 | pf pf |

CLASS A1 AMPLIFIER

| Maximum Ratings, (Design-Center Values): | Triode Unit | Pentode Un | it |
|--|------------------|------------------|-----------|
| PLATE VOLTAGE | 300 max | 300 max | volts |
| GRID NO.2 SUPPLY VOLTAGE | - | 300 max | volts |
| GRID -NO. 2 (SCREEN-GRID) VOLTAGE | - | See curv | e page 70 |
| GRID-NO.1 (CONTROL-GRID) VOLTAGE, Positive-bias value | 0 max | 0 max | volts |
| PLATE DISSIPATION | 2.5 max | 2 max | watts |
| GRID-NO.2 INPUT: | | | |
| For grid-No.2 voltages up to 150 volts | - | 0.5 max | watt |
| For grid-No.2 voltages between 150 and 300 volts | - | See curv | e page 70 |
| PEAK HEATER-CATHODE VOLTAGE: | | | |
| Heater negative with respect to cathode | 200 max | 200 max | volts |
| Heater positive with respect to cathode | $200^{\circ}max$ | $200^{\circ}max$ | volts |
| Characteristics: | | | |
| Plate Supply Voltage | 200 | 200 | volts |
| Grid-No.2 Supply Voltage | _ | 150 | volts |
| Grid-No.1 Voltage | -6 | - | volta |
| Cathode-Bias Resistor | | 180 | ohms |
| Amplification Factor | 19 | - | ohms |
| Plate Resistance (Approx.) | 5750 | 300000 | ohms |
| Transconductance | 3300 | 6200 | µmhos |
| Grid-No.1 Voltage (Approx.) for plate current of 10 µa | -19 | -8 | volts |
| Plate Current | 13 | 9.5 | ma |
| Grid-No.2 Current | - | 2.8 | ma |
| Grid-No.1-Circuit Resistance:* | | | |
| For fixed-bias operation | 0.5 max | 0.25 max | megohm |
| For cathode-bias operation | 1.0 max | 1.0 max | megohm |
| | | | |

° The dc component must not exceed 100 volts.

* If either unit is operating at maximum rated conditions, grid-No.1-circuit resistance for both units should not exceed the stated values.



FULL-WAVE VACUUM RECTIFIER

Glass octal type used in power supplies of radio and television receivers having high dc requirements. Maximumdimensions:over-all length, 5-3/16 inches; seated length, 4-5/8 inches; 5AW4

diameter, 1-9/16 inches. Tube requires octal socket and may be operated in any position. It is especially important that this tube, like other power-handling tubes, be adequately ventilated. Filament volts (ac/dc), 5; amperes, 3.7. For discussion of Rating Chart, refer to INTERPRETATION OF TUBE DATA.


FULL-WAVE RECTIFIER

| Maximum Katings, (Design-Center Values): | | | |
|--|------------------------------|----------------|----------------------|
| PEAK INVERSE PLATE VOLTAGE | | 1550 max | volts |
| PEAK PLATE CURRENT (Per Plate) | | 750 max | ma |
| HOT-SWITCHING TRANSIENT PLATE CURRENT | | | |
| (Per Plate) maximum duration 0.2 second | | 4 max | amperes |
| AC PLATE SUPPLY VOLTAGE (Per Plate, rms) | | | ing Chart |
| DC OUTPUT CURRENT | | See Rat | ing Chart |
| Typical Operation: | | | |
| | | | |
| Filter Input | Capacitor | Choke | |
| Filter Input AC Plate-to-Plate Supply Voltage (rms) | Capacitor 900 | Choke 1100 | volts |
| | | 0 | $volts$ μf |
| AC Plate-to-Plate Supply Voltage (rms) Filter-Input Capacitor Effective Plate Supply Impedance per Plate | 900 | 0 | |
| AC Plate-to-Plate Supply Voltage (rms) Filter-Input Capacitor Effective Plate Supply Impedance per Plate Filter-Input Choke | 900 10 153 | 0 | μf |
| AC Plate-to-Plate Supply Voltage (rms) Filter-Input Capacitor. Effective Plate Supply Impedance per Plate Filter-Input Choke. DC Output Current. | 900 10 153 - 250 | 1100 | μf ohms |
| AC Plate-to-Plate Supply Voltage (rms) Filter-Input Capacitor Effective Plate Supply Impedance per Plate Filter-Input Choke | 900 10 153 | 1100 10 | μf ohms henries |

Characteristics, Instantaneous Value:

Maximum Patings (Design Conton Values).

Tube Voltage Drop for plate current of 250 ma (per plate)... 50




92CS-H205T

FULL-WAVE VACUUM RECTIFIER

Lock-in type used in power supply of radio equipment having moderate dc requirements. Outline 13B, OUTLINES SECTION. Tube re-quires lock-in socket. Filament volts (ac), 5.0; amperes, 2.0. Maximum ratings as full-wave rectifier: peak inverse plate volts, 1400 maz; peak plate ma. (per plate), 375 maz; dc output ma., 125 maz. This type is used principally for renewal purposes.

5AZ4

volts



| Filter Input AC Plate-to-Plate Supply Voltage (rms) Filter-Input Capacitor. Total Effective Plate-Supply Impedance Per Plate† Filter-Input Choke. | Capacitor 700 4 50 | Choke 1000 5 | velts µf chmas henries |
|---|-----------------------------|--------------------|---------------------------------|
| | | | 121 |

RCA Receiving Tube Manual


| Filter Input DC Output Current DC Output Voltage at Input to Filter (Approx.): | Capacitor 125 | Choke 125 | ma |
|--|------------------|--------------|-------|
| At half-load current (62.5 ma.) | 392.5 | 405 | volts |
| At full-load current (125 ma.) | 340 | 382 | volts |
| Voltage Regulation (Approx.): | | | |
| Half-load to full-load current | 52.5 | 23 | volts |

 \dagger When a filter-input capacitor larger than 40 μ_i is used, it may be necessary to use more plate-supply impedance than the value shown in order to limit the peak plate current to the rated value.

5B8

MEDIUM-MU TRIODE— SHARP-CUTOFF PENTODE

Miniature type used as combined vhf oscillator and mixer in television receivers employing series-connected heater strings. Outline 8B,OUTLINES SECTION. Tube requires miniature



nine-contact socket and may be mounted in any position. Heater volts (ac/dc), 4.7; amperes, 0.6; warm-up time (average), 11 seconds. CLASS A1 AMPLIFIER

| Maximum Ratings, (Design-Center Values): | Triode Unit | Pentode Unit | |
|--|----------------|-----------------|---------------|
| PLATE VOLTAGE | 300 max | 3 00 max | volts |
| GRID NO.2 (SCREEN-GRID) SUPPLY VOLTAGE. | - | 300 max | volts |
| GRID-NO.2 VOLTAGE | - | See curv | e page 70 |
| GRID-No.1 (CONTROL-GRID) VOLTAGE, Positive-bias value | 0 max | 0 max | volts |
| PLATE DISSIPATION. | 2.5 max | 2 max | watts |
| GRID NO.2 INPUT: | | | |
| For grid-No.2 voltages up to 150 volts | - | 0.5 max | watt |
| For grid-No.2 voltages between 150 and 300 volts | - | See curv | e page 70 |
| PEAK HEATER-CATHODE VOLTAGE: | | | |
| Heater negative with respect to cathode | 200 max | 2 00 max | volts |
| Heater positive with respect to cathode. | 200 max | 200 max | volts |
| Characteristics: | | | |
| Plate Supply Voltage | 200 | 200 | volts |
| Grid-No.2 Supply Voltage | - | 150 | volts |
| Grid Voltage | -6 | - | volts |
| Cathode-Bias Resistor | - | 180 | ohms |
| Amplification Factor | 19 | - | |
| Plate Resistance (Approx.) | 5750 | 800000 | ohms |
| Transconductance | 3300 | 6200 | <i>µ</i> mhos |
| Plate Current | 13 | 9.5 | ma |
| Grid-No.2 Current | - | 2.8 | ma |
| Grid-No.1 Voltage (Approx.) for plate current of 10 µa | -19 | -8 | volts |
| Maximum Circuit Values: | | | |
| Grid-No.1-Circuit Resistance*: | | | |
| For fixed-bias operation | 0.5 max | 0.25 max | megohm |
| For cathode-bias operation | 1.0 max | 1.0 max | megohm |
| | | | Bomm |

The dc component must not exceed 100 volts.

* If either unit is operated at maximum rated conditions, grid-No.1-circuit resistance for both units should not exceed the stated values.

FULL-WAVE VACUUM RECTIFIER

5BC3

Novar type used in power supplies of radio equipment and television receivers having high dc requirements. Outline 17B, OUTLINES SECTION. Tube requires novar nine-contact R_{4}^{PD2} R_{7}^{PD2} R_{7}^{PD2}


socket. Vertical operation is preferred, but tube may be operated in horizontal position if pins 2 and 7 are in vertical plane. It is especially important that this tube, like other power-handling tubes, be adequately ventilated. Filament volts (ac), 5; amperes, 3.


FULL-WAVE RECTIFIER

| Maximum Ratings, (Design-Maximum Values): | | | | |
|---|-----|-----|----------|------------|
| PEAK INVERSE PLATE VOLTAGE | | | 1700 max | volts |
| PEAK PLATE CURRENT (Per Plate) | | | 1 max | ampere |
| HOT-SWITCHING TRANSIENT PLATE CURRENT (Per Plate | | | 5 max | amperes |
| AC PLATE-SUPPLY VOLTAGE (Per Plate, rms) | | | See Ra | ting Chart |
| DC OUTPUT CURRENT (Per Plate) | | | See Ra | ting Chart |
| | | | | |
| Typical Operation with Capacitor Input to Filter: | | | | |
| AC Plate-to-Plate Supply Voltage (rms) | 600 | 900 | 1100 | volts |
| Filter-Input Capacitor [®] | 40 | 40 | 40 | μf |
| Total Effective Plate-Supply Impedance per Plate | 21 | 67 | 97 | ohms |
| DC Output Voltage at Input to Filter (Approx.): | | | | |
| At load current of: 300 ma | 290 | - | - | volts |
| 275 ma | - | 460 | - | volts |
| 162 ma | - | - | 630 | volts |
| 150 ma | 335 | - | - | volts |
| 137.5 ma | - | 520 | - | volts |
| 81 ma | - | - | 680 | volts |
| | | | | |
| Typical Operation with Choke Input to Filter: | | | | |
| AC Plate-to-Plate Supply Voltage (rms) | | 900 | 1100 | volts |
| Filter-Input Choke | | 10 | 10 | henries |
| DC Output Voltage at Input to Filter (Approx.): | | | | |
| At load current of: 348 ma | | 840 | - | volts |
| 275 ma | | - | 440 | volts |
| 174 ma | | 355 | - | volts |
| 137.5 ma | | - | 455 | volts |

^o If hot switching is regularly required in operation, the use of choke-input circuits is recommended. Such circuits limit the hot-switching current to a value no higher than that of the peak plate current, When capacitor-input circuits are used, a maximum peak current value per plate of 5 amperes during the initial cycles of the hot-switching transient should not be exceeded.

Higher values of capacitance than indicated may be used, but the effective plate-supply impedance may have to be increased to prevent exceeding the maximum rating for peak plate current.





MEDIUM-MU TRIODE— SHARP-CUTOFF PENTODE

Miniature type used as combined vhf mixer and oscillator tube in television receivers employing series-connected heater strings. Outline 8B, OUTLINESSECTION. Tube requires miniature nine-contact socket. Heater volts (ac /dc), 4.7; amperes, 0.6; warm-up time (average), 11 **5BE8**

seconds. Characteristics of triode unit as class A₁ amplifier: plate supply volts, 150 (300 max); cathodebias resistor, 56 ohms; amplification factor, 40; plate resistance (approx.), 5000 ohms; transconductance, 8500 µmhos; plate ma., 18; plate dissipation, 2.5 max watts. Pentode unit: plate supply volts, 250 (300 max); grid-No.2 supply volts, 110 (300 max); cathode-bias resistor, 68 ohms; plate resistance (approx.), 0.4 megohm; transconductance, 5200 µmhos; plate ma., 10; grid-No.2 ma., 3.5; plate dissipation, 2.8 max watts; grid-No.2 input, 0.5 max watt. This type is used principally for renewal purposes.

MEDIUM-MU TWIN TRIODE


Miniature type used in directcoupled cathode-drive rf amplifier circuits of vhf television tuners utilizing series-connected heater strings. Outline 8B, OUTLINES SECTION.



Heater volts (ac/dc), 4.7; amperes, 0.6; warm-up time (average), 11 seconds. Except for heater ratings, this type is identical with miniature type 6BK7-B.

MEDIUM-MU TWIN TRIODE


Miniature type used in directcoupled cathode-drive rf amplifier circuits of vhf television tuners employing series-connected heater strings. Outline 8B, OUTLINES SECTION.



Heater volts (ac/dc), 5.6; amperes, 0.45; warm-up time (average), 11 seconds. Except for heater ratings, this type is identical with miniature type 6BQ7-A.

MEDIUM-MU TRIODE— SHARP-CUTOFF PENTODE

Miniature type used in a wide variety of applications in color and black-and-white television receivers employing series-connected heater strings. Outline 8B, OUTLINES SEC-



TION. Heater volts (ac/dc), 4.7; amperes, 0.6; warm-up time (average), 11 seconds. Except for heater ratings, this type is identical with miniature type 6BR8-A.

TWIN DIODE— SHARP-CUTOFF PENTODE

5BT8

58K7A

Related type: 6BK7B

5BQ7A

Related types: 4BQ7A, 6BQ7A

5BR

Related type:

6RR8A

Miniature type used in a variety of applications in television receivers employing series- $\kappa_{D_1 a D}$ connected heater strings. The pentode unit is used as an if amplifier, video amplifier, age amplifier, or reactance tube. The diode unit is used in automatic-frequency-control and detector circuits. Outline 8B, OUTLINESSECTION. Heater volts (ac/dc), 4.7; amperes, 0.6; warmup time (average), 11 seconds. Tube requires



miniature nine-contact socket. Characteristics of pentode unit as class A_1 amplifier: plate supply volts, 200 (300 max); grid-No.2 supply volts, 150 (300 max); cathode-bias resistor, 180 ohms; plate resistance (approx.), 0.8 megohm; transconductance, 6200 μ mhos; plate ma., 9.5; grid-No.2 ma., 2.8; plate dissipation, 2 max watts; grid-No.2 input, 0.5 max watt. Maximum diode plate ma. (each unit), 1 max. This type is used principally for renewal purposes.

5BW8 Related type: 6BW8


TWIN DIODE— SHARP-CUTOFF PENTODE Miniature type used in television

heater strings. The pentode unit is Kor used as a sound if amplifier, sound limiter, and agc keyer. The diodes are

 $\begin{array}{c} H \\ P_{D_{1}} \\ S_{D_{2}} \\ S_{D_{2}} \\ P_{D_{2}} \\ P_{D_{2}} \\ \end{array} \begin{array}{c} H \\ S_{D_{1}} \\ S_{D_{1}} \\ S_{D_{2}} \\ S_{D_{2}$

used as horizontal phase detectors. Outline 8B, OUTLINES SECTION. Heater volts (ac/dc), 4.7; amperes, 0.6; warm-up time (average), 11 seconds. Except for heater ratings, this type is identical with miniature type 6BW8.

124



MEDIUM-MU TRIODE— SHARP-CUTOFF PENTODE

Miniature type used as combined oscillator and mixer tube in television receivers employing series-connected heater strings. Outline 8B, OUT-LINES SECTION. Heater volts (ac/

5CG8 Related type: 6CG8


dc), 4.7; amperes, 0.6; warm-up time (average), 11 seconds. Except for heater ratings, this type is identical with miniature type 6CG8-A.



MEDIUM-MU TRIODE— SHARP-CUTOFF TETRODE

^{G2}TR Miniature types used as combined vhf oscillator and mixer in television ^{KTR} receivers employing series-connected heaterstrings. Outline 8B, OUTLINES R SECTION. Heater volts (ac/dc), 4.7: 5CL8 5CL8A Related types: 6CL8A, 19CL8A

amperes, 0.6; warm-up time (average), 11 seconds. Except for heater ratings, types 5CL8 and 5CL8-A are identical with miniature types 6CL8 and 6CL8-A, respectively. Type 5CL8 is a DISCONTINUED type listed for reference only.




HIGH-MU TRIODE— SHARP-CUTOFF PENTODE

Miniature type used in television receivers employing series-connected heater strings. The pentode unit is used as an intermediate-frequency amplifier, a video amplifier, an agc amplifier, or as

5CM8 Related type: 6CM8

a reactance tube. The triode unit is used in sweep-oscillator, sync-separator, syncclipper, and phase-splitter circuits. Outline 8B, OUTLINES SECTION. Heater volts (ac/dc), 4.7; amperes, 0.6. Except for heater ratings, this type is identical with miniature type 6CM8.



MEDIUM-MU TRIODE— SHARP-CUTOFF TETRODE

Miniature type used in a wide variety of applications in color and black-and-white television receivers employing series-connected heater strings. The tetrode unit is used as a

5CQ8 Related type: 6CO8

mixer or amplifier and the triode unit is used in oscillator and rf amplifier circuits. Outline 8B, OUTLINES SECTION. Heater volts (ac/dc), 4.7; amperes, 0.6; warm-up time (average), 11 seconds. Except for heater ratings, this type is identical with miniature type 6CQ8.



BEAM POWER TUBE

Miniature type used as vertical deflection amplifier and as audio output tube in television and radio receivers employing series-connected heater strings. Outline 8E, OUTLINES SEC-


5CZ5 Related type: 6CZ5

TION. Heater volts (ac/dc), 4.7; amperes, 0.6; warm-up time (average), 11 seconds. Except for heater ratings, this type is identical with miniature type 6CZ5.

HIGH-MU TRIODE— SHARP-CUTOFF PENTODE

5DH8

Miniature type used in television ${}^{\text{C3p,IS}}(3)$ receivers having series-connected heater strings. Pentode used as video or audio if amplifier; triode used as sync amplifier, sync clipper, sync sep-



arator, or vertical oscillator. Outline 8B, OUTLINES SECTION. Tube requires miniature nine-contact socket and may be operated in any position. Heater volts (ac/dc), 5.2; amperes, 0.6; heater warm-up time (average), 11 seconds.

CLASS A, AMPLIFIER

| Maximum Ratings, (Design-Maximum Values): | Triode Unit | Pentode U | nit |
|--|--------------------|--------------|------------|
| PLATE VOLTAGE | 300 max | 300 max | volts |
| GRID-NO.2 (SCREEN-GRID) SUPPLY VOLTAGE. | - | 300 max | volts |
| GRID-NO.2 VOLTAGE. | _ | | re page 70 |
| GRID-NO.1 (CONTROL-GRID) VOLTAGE, Positive-bias value | 0 max | 0 max | volts |
| PLATE DISSIPATION GRID-NO.2 INPUT | 2.0 max | 2.2 max | watts |
| For grid-No.2 voltages up to 150 volts | - | 0.55 max | watt |
| For grid-No.2 voltages between 150 and 300 volts PEAK HEATER-CATHODE VOLTAGE: | - | | ve page 70 |
| Heater negative with respect to cathode | 200 max | 200 max | volta |
| Heater positive with respect to cathode | $200\ ^{\circ}max$ | 200 °max | volts |
| Characteristics: | Triode Unit | Pentode Unit | |
| Plate Supply Voltage | 250 | 125 | volts |
| Grid-No.2 Supply Voltage. | 200 | 125 | volts |
| Cathode-Bias Resistor. | 390 | 56 | ohms |
| Plate Current | 7.3 | 13.5 | ma |
| Grid-No.2 Current. | - | 3.8 | ma |
| Amplification Factor | 53 | - | 1116 |
| Plate Resistance (Approx.) | 0.012 | 0.15 | megohm |
| Transconductance | 4400 | 8600 | µmhos |
| For plate current of 10 μ a | -10 | - | volts |
| For plate current of 20 µa | - | -6 | volts |
| Maximum Circuit Values: | | | |
| Grid-No.1-Circuit Resistance: | | | |
| The first bis states | 0 5 | 0.05 | |

| Grid-No.1-Circuit Resistance: | | | |
|-------------------------------|---------|----------|--------|
| For fixed-bias operation | 0.5 max | 0.25 max | megohm |
| For cathode-bias operation | 0.1 max | 1.0 max | megohm |

VERTICAL DEFLECTION OSCILLATOR

For operation in a 525-line, 30-frame system

| Ma | ximum Ratings, (Design-Maximum Values): | Triode Unit | |
|-----|---|-------------------|-------|
| | PLATE VOLTAGE | 300 max | volts |
| | AK NEGATIVE-PULSE GRID VOLTAGE | 400 max | volts |
| | AK CATHODE CURRENT | 35 max | ma |
| | ERAGE CATHODE CURRENT | 12 max | ma |
| | ATE DISSIPATION | 1 max | watt |
| PE. | AK HEATER-CATHODE VOLTAGE: | | |
| | Heater negative with respect to cathode | 200 max | volts |
| | Heater positive with respect to cathode | $200^{\circ} max$ | volts |
| Ma | ximum Circuit Values: | | |
| Gri | d Circuit Resistance: | | |

For fixed-bias, cathode-bias, or

5DJ4

grid-resistor-bias operation.....

° The dc component must not exceed 100 volts.

FULL-WAVE VACUUM RECTIFIER

Glass octal type used in power supply of radio and television receivers having high dc requirements. Outline 19D, OUTLINES SECTION, Tube requires octal socket; operation in ver-



2.2 max megohms

tical position is preferred, but horizontal operation is permissible if pins 2 and 4 126

are in vertical plane. It is especially important that this tube, like other powerhandling tubes, be adequately ventilated. Filament volts (ac/dc), 5; amperes, 3.


FULL-WAVE RECTIFIER

Maximum Ratings, (Design-Maximum Values):


| PEAK INVERSE PLATE VOLTAGE. | 1700 max volts |
|--|------------------|
| PEAK PLATE CURRENT (Per Plate) | 1 max ampere |
| HOT-SWITCHING TRANSIENT PLATE CURRENT (Per Plate) | 5 max amperes |
| AC PLATE-SUPPLY VOLTAGE (Per Plate, rms, without load) | See Rating Chart |
| DC OUTPUT CURRENT (Per Plate) | See Rating Chart |
| Typical Operation: | |

| Filter Input Co | apacitor | Choke | |
|---|----------|-------|---------|
| AC Plate-to-Plate Supply Voltage (rms, without load) 60 | 00 900 | 1100 | volts |
| Filter-Input Capacitor ^o | 40 40 | - | μf |
| Filter-Input Choke | | 10 | henries |
| Effective Plate-Supply Impedance per Plate | 21 67 | - | ohms |
| DC Output Voltage at Input to Filter (Approx.) | 90 460 | 420 | volts |
| DC Output Current | 00 275 | 275 | ma |

° When capacitor values greater than 40 μ f are used, the effective plate-supply impedance should be increased so that the maximum rating for peak plate current is not exceeded. RATING CHART



AC PLATE SUPPLY VOLTS (RMS) PER PLATE (WITHOUT LOAD)




MEDIUM-MU TRIODE SHARP-CUTOFF PENTODE

Miniature type used as combined oscillator and mixer in television receivers employing series-connected heater strings and operating at intermediate frequencies in the order of 40

Related types: 5EA8, 19EA8

megacycles. Outline 8B, OUTLINES SECTION. Heater volts (ac/dc), 4.7; amperes, 0.6; warm-up time (average), 11 seconds. Except for heater ratings, this type is identical with miniature type 6EA8.



MEDIUM-MU TRIODE SHARP-CUTOFF PENTODE

Miniature type used as combined oscillator and mixer in television re-Kp,G3p,IS ceivers employing series-connected heaterstrings. Outline 8B, OUTLINES SECTION. Heater volts (ac/dc), 4.7;

Related type: 6EU8


amperes, 0.6; warm-up time (average), 11 seconds. Cathode warm-up time (time required for the transconductance to reach 6500 μ mhos when the tube is operated from a cold start with dc plate volts=100, grid volts=0, and heater amperes=0.560), 35 seconds. Except for heater ratings and cathode warm-up characteristic, this type is identical with miniature type 6EU8.

SHARP-CUTOFF PENTODE

Miniature type used in the gaincontrolled picture-if stages of vhf television receivers operating at an intermediate frequency in the order of 40 megacycles per second. Outline 7B. OUTLINES SECTION. Heater volts (ac/dc), 5.6; amperes, 0.45; warm-up time (average), 11 seconds. Except for heater ratings, this type is identical with miniature type 6EW6.

MEDIUM-MU TRIODE— SHARP-CUTOFF PENTODE

Miniature type used as combined oscillator and mixer tube in vhf television receivers employing series-connected heaterstrings. Outline 8B, OUT-LINES SECTION. Heater volts (ac/




dc), 4.7; amperes, 0.6; warm-up time (average), 11 seconds. Except for heater ratings, this type is identical with miniature type 6FG7.

MEDIUM-MU TRIODE— SHARP-CUTOFF PENTODE

Miniature type used as combined vertical deflection oscillator and general-purpose or if amplifier in television receivers employing series-connected heaterstrings, Outline8B, OUTLINES SECTION. Heater volts (ac/dc), 4.7; amperes, 0.6; warm-up time (average), 11 seconds. Except for heater ratings, this type is identical with miniature type 6FV8.

MEDIUM-MU TRIODE— SHARP-CUTOFF PENTODE

Miniature type used in multivibrator-type horizontal-deflection circuits in television receivers employing aseries heater-string arrangement. Also used for agc-amplifier or sync-separa-



tor applications in such receivers. Outline 8B, OUTLINES SECTION. Heater volts (ac/dc), 4.7; amperes, 0.6; warm-up time (average), 11 seconds. Except for heater ratings, this type is identical with miniature type 6GH8.

SEMIREMOTE-CUTOFF PENTODE

Miniature type used in gain-controlled picture-if stages of television receivers employing series-connected heater strings and operating at intermediate frequencies in the order of 40



megacycles. Outline 7B, OUTLINES SECTION. Heater volts (ac/dc), 5.6; amperes, 0.5; warm-up time (average), 11 seconds. Except for heater ratings, this type is identical with miniature type 6GM6.



Related type:

6FV8

Related type:

6GH8

Related type:

6GM6

5EW6

Related types:

4EW6, 6EW6



SHARP-CUTOFF PENTODE

Miniature type used for FM sounddetector service in locked-oscillator, quadrature-grid FM detector circuits, as combined detector, limiter, and audio-voltage driver. Tube has two

5GX6 Related type: 6GX6

independent control grids, and has controlled heater warm-up time for use in receivers employing series-connected heater strings. Outline 7B, OUTLINES SEC-TION. Heater volts (ac/dc), 4.7; amperes, 0.6; warm-up time (average), 11 seconds. Except for heater ratings, this type is identical with miniature type 6GX6.




MEDIUM-MU TWIN TRIODE

Miniature type used as combined rf power amplifier and oscillator in television receivers employing series-connected heaterstrings. Outline 7B, OUT-LINES SECTION. Heater volts

5J6 Related types: 6J6, 19J6

(ac/dc), 4.7; amperes, 0.6; warm-up time (average), 11 seconds. Except for heater ratings, this type is identical with miniature type 6J6.



MEDIUM-MU TRIODE— SHARP-CUTOFF PENTODE

Miniature type with frame-grid pentode unit used as combined oscillator-mixer tube in television receivers using an intermediate frequency in the order of 40 megacycles and employing



series-connected heater strings. Outline 8B, OUTLINES SECTION. Heater volts (ac/dc), 5.6; amperes, 0.45; warm-up time (average), 11 seconds. Except for heater ratings, this type is identical with miniature type 6KE8.

FULL-WAVE VACUUM RECTIFIER

Metal type used in power supply of radio equipment having large de requirements. Outline 6, OUTLINES SECTION. Tube requires octal socket. Vertical tube mounting is preferred but horizontal mounting is permissible if pins 2 and 4 are in vertical plane. Filament volts (ac), 5.0; amperes, 2.0. Maximum ratings as full-wave rectifier: peak inverse plate volts, 1550 max; peak plate ma. (per plate), 675 max; dc output ma., 225 max. This type is used principally for renewal purposes.

5**T**4

| Typical | Oper | ation: |
|---------|------|--------|
|---------|------|--------|

PD

6

| Filter Input | Capacitor | Choke | |
|---|-----------|-------|---------|
| AC Plate-to-Plate Supply Voltage (rms) | . 900 | 1100 | volts |
| Filter-Input Capacitor | . 4 | - | μf |
| Total Effective Plate-Supply Impedance Per Platet | | - | ohms |
| Filter-Input Choke | | 10 | henries |
| DC Output Current | . 225 | 225 | ma |
| DC Output Voltage at Input to Filter (Approx.): | | | |
| At half-load current (112.5 ma.) | . 539 | 465 | volts |
| At full-load current (225 ma.) | . 480 | 450 | volts |
| Voltage Regulation (Approx.): | | | |
| Half-load to full-load current | 59 | 15 | volts |

 \dagger When a filter-input capacitor larger than 40 μ f is used, it may be necessary to use more plate-supply impedance than the value shown in order to limit the peak plate current to the rated value.

TRIPLE DIODE—HIGH-MU TRIODE

5T8 Related types: 6T8A, 19T8

5U4G

5U4GB


Miniature type used as combined $_{\text{SD2}}$ AM detector, FM detector, and af $^{\text{SD2}}$ voltage amplifier in radio and television receivers employing series-con- $_{\text{PD2}}^{\text{PD2}}$ nected heater strings. Outline 8B, $_{\text{PD}}$



OUTLINES SECTION. Heater volts (ac/dc), 4.7; amperes, 0.6; warm-up time (average), 11 seconds. Peak heater-cathode volts, 200 max. When the heater is positive with respect to the cathode, the dc component of the heater-cathode voltage must not exceed 100 volts. Except for heater and heater-cathode ratings, this type is identical with miniature type 6T8-A.

FULL-WAVE VACUUM RECTIFIER

Glass octal types used in power supplies of radio and television receivers having high dc requirements. Type 5U4-GB, Outline 19D, OUTLINES SECTION. Type 5U4-G maximum




dimensions: over-all length, 5-5/16 inches; seated height, 4-3/4 inches; diameter, 2-1/16 inches. Tubes require octal socket. Either type may be supplied with pins 3, 5, and 7 omitted. Vertical mounting is preferred but horizontal mounting is permissible if pins 1 and 4 are in vertical plane. The coated filament is designed to operate from the ac line through a step-down transformer. The voltage at the filament terminals should be 5.0 volts at an average line voltage of 117 volts. It is especially important that these tubes, like other power-handling tubes, be adequately ventilated. For discussion of Rating Chart and Operation Characteristics, refer to INTERPRETATION OF TUBE DATA. Maximum ratings for type 5U4-G as full-wave rectifier: peak inverse plate volts, 1550 max; peak plate amperes per plate, 0.8 max (transient, 4.0 max). Type 5U4-G is used principally for renewal purposes. Filament volts (ac), 5; amperes, 3.

FULL-WAVE RECTIFIER

| Maximum Ratings, (Design-Center Values): |
|---|
| PEAK INVERSE PLATE VOLTAGE |
| PEAK PLATE CURRENT (Per Plate) |
| HOT-SWITCHING TRANSIENT PLATE CURRENT (Per Plate) |
| AC PLATE SUPPLY VOLTAGE (Per Plate, rms) |
| DC OUTPUT CURRENT (Per Plate) |

5U4-GB 1550 max volts 1.0 max ampere # See Rating Chart

See Rating Chart




Typical Operation of 5U4-GB with Capacitor Input to Filter:


| AC Plate-to-Plate Supply Voltage (rms) | 600 | 900 | 1100 | volts |
|--|-----|-----|------|-------|
| Filter-Input Capacitor* | 40 | 40 | 40 | µf |
| Total Effective Plate-Supply Impedance per Plate | 21 | 67 | 97 | ohms |

| DC Output Voltage at Input to Filter (Approx.): | | | |
|---|-----|------|---------|
| (150 ma | - | - | volts |
| At half-load current of 137.5 ma – | 520 | - | volts |
| 81 ma – | - | 680 | volts |
| (300 ma | - | - | volts |
| At full-load current of 275 ma | 460 | - | volts |
| (162 ma – | - | 630 | volts |
| Voltage Regulation (Approx.): | | | |
| Half-load to full-load current 45 | 60 | 50 | volts |
| Typical Operation of 5U4-GB with Choke Input to Filter: | | | |
| AC Plate-to-Plate Supply Voltage (rms) | 900 | 1100 | volts |
| Filter-Input Choke | 10 | 10 | henries |
| DC Output Voltage at Input to Filter (Approx.): | | | |
| At half-load current of { 174 ma | | - | volts |
| (137.5 ma | | 455 | volts |
| At full-load current of 348 ma. | | - | volts |
| 275 ma | | 440 | volts |
| Voltage Regulation (Approx.): Half-load to full-load current | 15 | 15 | volts |
| | | | |

#If hot switching is regularly required in operation, the use of choke-input circuits is recommended. Such circuits limit the hot-switching current to a value no higher than that of the peak plate current. When capacitor-input circuits are used, a maximum peak current value per plate of 4.6 amperes during the initial cycles of the hot-switching transient should not be exceeded.

*Higher values of capacitance than indicated may be used, but the effective plate-supply impedance may have to be increased to prevent exceeding the maximum rating for peak plate current.

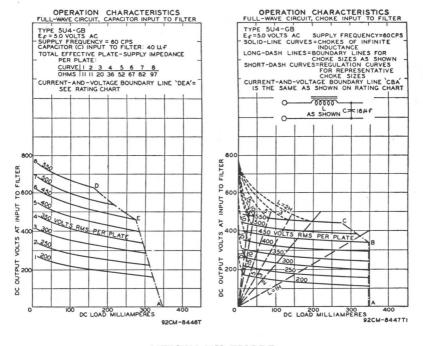



Miniature type used as combined oscillator and mixer tube in AM/FM receivers and television receivers employing series-connected heater strings. Outline 8B, OUTLINES SECTION.

5U8 Related types: 6U8A, 9U8A

Heater volts (ac/dc), 4.7; amperes, 0.6; warm-up time (average), 11 seconds. Except for heater ratings, this type is identical with miniature type 6U8-A.

5V3

5V3A

FULL-WAVE VACUUM RECTIFIER

Glass octal types used as power supply in color television receivers and other equipment having high dc requirements. Outline 19D, OUTLINES SECTION. Tubes require octal socket.




Vertical mounting is preferred, but horizontal mounting is permissible if pins 2 and 4 are in vertical plane. It is especially important that these tubes, like other power-handling tubes, be adequately ventilated. For discussion of Rating Chart, refer to INTERPRETATION OF TUBE DATA. Type 5V3 is a DISCONTINUED type listed for reference only. Filament volts (ac/dc), 5; amperes, 3.8 (5V3), 3(5V3-A).

FULL-WAVE RECTIFIER

| | 5VS | 5V3-A | |
|--|-----------------|------------------|---------|
| Maximum Ratings: | Design- | Design- | |
| Maximum karings: | Center Values | Maximum Va | lues |
| PEAK INVERSE PLATE VOLTAGE. | 1400 mag | 1550 max | volts |
| PEAK PLATE CURRENT (Per Plate) | 1.2 mas | 1.4 max | amperes |
| HOT-SWITCHING TRANSIENT PLATE CURRENT (Per Plate) | 5.5 mas | 6.6 max | amperes |
| AC PLATE-SUPPLY VOLTAGE (Per Plate, rms, without load) | See Rating | 550 max | volts |
| DC OUTPUT CURRENT (Per Plate) | Chart | $415^{\circ}max$ | ma |
| ° With capacitor-input filter for ac plate-supply voits (rms, pe | r plate, withou | t load) = 470. | |
| ······································ | | , | |
| Typical Operation: | 5 V 3 | 5V3-A | |
| Filter Input Capa | citor Choke | Capacitor Choke | |
| AC Plate-to-Plate Supply Voltage (rms) | 850 1000 | 850 1000 | volts |
| Filter-Input Capacitor | 40 - | 40 - | μf |
| Effective Plate-Supply Impedance per Plate | 56 - | 50 - | ohms |
| Minimum Filter-Input Choke | - 10 | - 10 | henries |
| DC Output Current | 350 350 | 350 350 | ma |
| DC Output at Input to Filter (Approx.) | 430 385 | 440 390 | volts |
| Characteristics: | 5V3 | 5V 3 -A | |
| | | 070-11 | |

Tube Voltage Drop for plate current of 350 ma (per plate)... 47 42 volts • When capacitor values greater than 40 μ f are used, the effective plate-supply impedance should be increased so that the maximum rating for peak plate current is not exceeded.

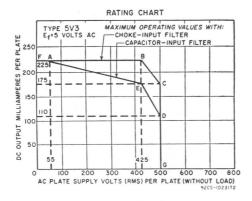

5V4G 5V4GA

FULL-WAVE VACUUM RECTIFIER

Glass octal types used in full-wave power supplies having high dc requirements. Outlines 26 and 19A, respectively, OUTLINES SECTION. Tubes require octal socket and may be



mounted in any position. The heater is designed to operate from the ac line through a step-down transformer. The voltage at the heater terminals should be 5.0 volts

under operating conditions at an average line voltage of 117 volts. It is especially important that these tubes, like other power-handling tubes, be adequately ventilated. Heater volts (ac/dc), 5; amperes, 2.

FULL-WAVE RECTIFIER


Maximum Ratings, (Design-Center Values):

| PEAK INVERSE PLATE VOLTAGE | 1400 max | volts |
|---|----------|-------|
| AC PLATE-SUPPLY VOLTAGE (Per Plate, rms): | | |
| With capacitor-input filter | 375 max | volts |
| With choke-input filter | 500 max | volts |
| PEAK PLATE CURRENT (Per Plate) | 525 max | ma |
| DC OUTPUT CURRENT | 175 max | ma |
| | | |

Typical Operation:

| Filter Input | Capacitor | Choke | |
|--|-----------|-------|---------|
| AC Plate-to-Plate Supply Voltage (rms) | 750 | 1000 | volts |
| Filter-Input Capacitor* | | - | μſ |
| Total Effective Plate-Supply Impedance per Plate | 100 | - | ohms |
| Filter-Input Choke | - | 4 | henries |
| DC Output Voltage at Input to Filter (Approx.) for dc output | | | |
| current of 175 ma | 410 | 410 | volts |

*Higher values of capacitance than indicated may be used, but the effective plate-supply impedance may have to be increased to prevent exceeding the maximum rating for peak plate current.

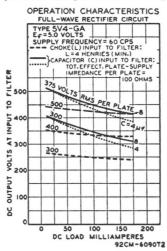




BEAM POWER TUBE

Glass octal type used as output amplifier in television receivers employing series-connected heater strings. Outline 14C, OUTLINES SECTION. This type may be supplied with pin

SV6GT Related types: 6V6GT, 12V6GT

No.1 omitted. Heater volts (ac/dc), 4.7; amperes, 0.6; warm-up time (average), 11 seconds. Except for heater ratings, this type is identical with glass octal type 6V6-GT.



FULL-WAVE VACUUM RECTIFIER

Metal type 5W4 and glass-octal type 5W4 GT are used in power supply of radio equipment having low dc requirements. Outlines 5 and 14D, respectively, OUTLINES SECTION. Both types require octal socket. Filament volts (ac), 5.0; amperes, 1.5. Maximum ratings: peak inverse plate volts, 1400 max; peak plate ma., 300 max; dc output ma., 100 max. These are DIS-CONTINUED types listed for reference only.

5W4 5W4GT


RCA Receiving Tube Manual =

FULL-WAVE VACUUM RECTIFIER

Glass octal type used in power supply of radio equipment having large dc requirements. Maximum dimensions: over-all length, 5-5/16 inches; seated height, 4-3/4 inches; diameter, 2-1/16 inches. Filament volts, 5.0; amperes, 3.0. Tube requires octal socket. Maximum ratings as full-wave rectifier: peak inverse plate volts, 1550 max; peak plate amperes per plate, 675 max. Type 5X4-G is used principally for renewal purposes.

MEDIUM-MU TRIODE— SHARP-CUTOFF PENTODE

Miniature type used as combined oscillator and mixer in AM/FM receivers and television receivers employing series-connected heater strings. Outline 8B, OUTLINES SECTION.





F (2

6)PDI

Heater volts (ac/dc), 4.7; amperes, 0.6; warm-up time (average), 11 seconds. Except for heater rating, this type is identical with miniature type 6X8.

FULL-WAVE VACUUM RECTIFIER

5Y3G 5Y3GT

Related types:

6X8, 19X8


5X4G

Glass octal types used in power supply of radio equipment having moderate dc requirements. Type 5Y3-G, Outline 26, type 5Y3-GT, Outline 14D, OUTLINES SECTION. Tubes require

octal socket. Vertical tube mounting is preferred, but horizontal mounting is permissible if pins 2 and 8 are in horizontal plane. It is especially important that these tubes, like other power-handling tubes, be adequately ventilated. For discussion of Rating Chart and Operation Characteristics, refer to INTERPRETATION OF TUBE DATA. Maximum ratings for type 5Y3-G as full-wave rectifier: peak inverse plate volts, 1400 max; peak plate ma. per plate, 375 max. Type 5Y3-G is a DISCONTINUED type listed for reference only. Filament volts (ac), 5; amperes, 2.

FULL-WAVE RECTIFIER

| Maximum Ratings, (Design-Center Values): | 5 Y 3- GT |
|---|------------------|
| PEAK INVERSE PLATE VOLTAGE | 1400 max volts |
| PEAK PLATE CURRENT (Per Plate) | 440 max ma |
| HOT-SWITCHING TRANSIENT PLATE CURRENT (Per Plate) | 2.5 max amperes |
| AC PLATE SUPPLY VOLTAGE (Per Plate, rms) | See Rating Chart |
| DC OUTPUT CURRENT (Per Plate) | See Rating Chart |
| | |




EVO


134


| Typical Operation of 5Y3-GT with Capacitor Input to Filter: | | | |
|--|-------------|------|---------|
| AC Plate-to-Plate Supply Voltage (rms) | 700 | 1000 | volts |
| Filter Input Capacitor* | 20 | 10 | μſ |
| Effective Plate-Supply Impedance per Plate | 50 | 140 | ohms |
| DC Output Voltage at Input to Filter (Approx.): | | | |
| At half-load current of } 62.5 ma | 39 0 | - | volts |
|) 42 ma | - | 610 | volts |
| At full-load current of 125 ma | 360 | - | volts |
| § 84 ma | - | 560 | volts |
| Voltage Regulation (Approx.): | | | |
| Half-load to full-load current | 40 | 50 | volts |
| Typical Operation of 5Y3-GT with Choke Input to Filter: | | | |
| AC Plate-to-Plate Supply Voltage (rms) | 700 | 1000 | volta |
| Filter Input Choke# | 10 | 10 | henries |
| DC Output Voltage at Input to Filter (Approx.): | | | |
| At half-load current of } 75 ma | 270 | - | volts |
| 62.5 ma | - | 405 | volts |
| At full-load current of 150 ma | 245 | - | volta |
| 125 ma | - | 380 | volts |
| Voltage Regulation (Approx.): Half-load to full-load current | 25 | 15 | volts |

* Higher values of capacitance than indicated may be used but the effective plate supply impedance may have to be increased to prevent exceeding the maximum rating for hot-switching transient plate current.

This value is adequate to maintain optimum regulation in the region to the right of line L=10H on curve OPERATION CHARACTERISTICS with Choke Input to Filter, provided the load currents are not less than 35 ma., and 50 ma., respectively, for Plate-to-Plate supply voltages of 700 and 1000 volts (rms).

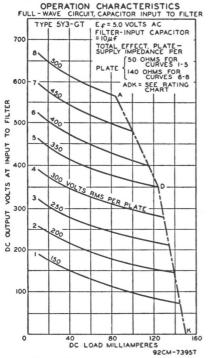

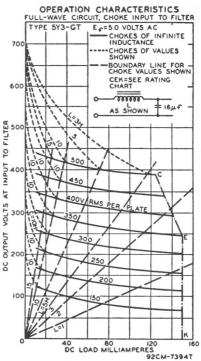



FULL-WAVE VACUUM RECTIFIER

Glass octal types used in power supplies of radio equipment having moderate DC requirements. Outlines 26, 14D, and 19D, respectively, OUT-LINES SECTION. Tubes require octal socket. Type 5Y4GT is supplied ^{5Y4G} 5Y4GA 5Y4GT

= RCA Receiving Tube Manual

with pins 4 and 6 missing. Vertical tube mounting is preferred, but horizontal mounting is permissible: if pins 2 and 7 are in horizontal plane (5Y4-G); if pins 1 and 4 are in vertical plane (5Y4-GA); if pins 2 and 3 are in vertical plane (5Y4-GT). It is especially important that these tubes, like other power handling tubes, be adequately ventilated. For discussion of Rating Chart, refer to INTERPRETATION OF TUBE DATA. Maximum ratings for type 5Y4-G as full-wave rectifier: peak inverse plate volts, 1400 max; peak plate ma. per plate, 375 max (transient amperes, 2.2 max). Type 5Y4-G is a DISCONTINUED type listed for reference only. Filament volts (ac/dc), 5; amperes, 2.

| FULL-WAVE RECTIFIER Maximum Ratings, (Design-Center Value): PEAK INVERSE PLATE VOLTAGE PEAK PLATE CURRENT (Per Plate) HOT-SWITCHING TRANSIENT PLATE CURRENT AC PLATE SUPPLY VOLTAGE (Per Plate, rms). DC OUTPUT CURRENT (Per Plate) | | | volts ma amperes ing Chart ing Chart |
|---|-----------|-------|--|
| Typical Operation of 5Y4-GA & 5Y4-GT: | | | |
| Filter Input | Capacitor | Choke | |
| AC Plate-to-Plate Supply Voltage (rms) | 700 | 1000 | volts |
| Filter-Input Capacitor [°] | 10 | - | μſ |
| Total Effective Plate-Supply Impedance per Plate | 50 | - | ohms |
| Filter-Input Choke | - | 10 | henries |

At full-load current (125 ma.) Characteristics, Instantaneous Value:

DC Output Current DC Output Voltage at Input to Filter (Approx.):


Tube Voltage Drop for plate current of 125 ma (per plate)... 60 volts ° Values of capacitance greater than 20 μ f may be used, provided the plate-supply impedance is increased to prevent exceeding the maximum peak-plate-current rating.

125

350

125

390



9205-1047372

FULL-WAVE VACUUM RECTIFIER

Glass type used in power supply of radio equipment having large dc requirements. Outline 28, OUTLINES SECTION. Tube requires four-contact socket. Vertical mounting is preferred but horizontal mounting is permissible if pins 1 and 4 are in horizontal plane. Filament volts (ac), 5.0; amperes, 3.0. Maximum ratings as fullwave rectifier: peak inverse plate volts, 1550 max; peak plate ma. per plate, 675 max. Type 5Z3 is used principally for renewal purposes.

FULL-WAVE VACUUM RECTIFIER

Metal type used in power supply of radio equipment having moderate dc requirements. Outline 5, OUT-LINES SECTION. Tube requires octal socket and may be mounted in



ma

volts



5Z3

5**Z**4

any position. Heater volts (ac), 5.0; amperes, 2.0. Maximum ratings: peak inverse plate volts, 1400 max; peak plate ma. per plate, 375 max. Typical operation as fullwave rectifier with capacitor-input filter: ac plate-to-plate supply volts (rms), 700: total effective plate-supply impedance per plate, 50 ohms; dc output ma., 125. Typical operation with choke-input filter: ac plate-to-plate supply volts, 1000; minimum filter-input choke, 5 henries; dc output ma., 125.







POWER TRIODE

Glass type used in output stage of radio receivers. Outline 28, OUTLINES SECTION. Tube requires four-contact socket. Filament volts (ac/dc), 6.3; amperes, 1.0. This type is identical electrically with type 6B4-G. Type 6A3 is a DISCONTINUED type listed for reference only.

HIGH-MU TWIN POWER TRIODE

Glass type used in output stage of ac-operated receivers as a class B power amplifier or with units in parallel as a class A1 amplifier to drive a 6A6 as class B amplifier. Outline 27, **OUTLINES SECTION.** Tube requires medium seven-contact (0.855-inch, pin-circle diameter) socket. Filament volts (ac/dc), 6.3; amperes, 0.8. This type is electrically identical with type 6N7. Type 6A6 is a DISCONTINUED type listed for reference only.

PENTAGRID CONVERTER


Glass types used in superheterodyne circuits. Outline 24B, OUTLINES SECTION. These types require the small seven-contact (0.75-inch, pin-circle diameter) socket. Except for interelectrode capacitances, the 6A7 is identical electrically with type 6A8. Type 6A7S, now DISCONTINUED, has the external shield connected to cathode. In general, its electrical characteristics are similar to those of the 6A7, but

6A3

6A6

6A7 6**A**7S

the two types are usually not directly interchangeable. Type 6A7 is used principally for renewal purposes.



PENTAGRID CONVERTER

Metal type 6A8 and glass octal types 6A8-G and 6A8-GT used in superheterodyne circuits. 6A8 Outline 3, 6A8-G Outline 23, 6A8-GT Outline 15A, OUTLINES SECTION. Tubes require octal socket. Heater volts (ac/dc), 6.3; amperes, 0.3. Characteristics as coverter: plate and grid-No.2-supply volts, 250 (300 max); grids-No.3-and-No.5 (screen-grid) volts, 100 max; grid-No.4 (control-grid) volts, -3 (0 max);



grid-No.2 (anode-grid) resistor, 20000 ohms (bypassed by 0.1-µf capacitor); grid-No.1 (oscillator-grid) resistor, 50000 ohms; plate resistance (approx.), 0.36 megohm; conversion transconductance, 550 µmhos; plate ma., 3.5; grids-No.3-and-No.5 ma., 2.7; grid-No.2 ma., 4; grid-No.1 ma., 0.4; total cathode ma., 10.6 (14 max); plate dissipation, 1 max watt; grids-No.3-and-No.5 input, 0.3 max watt; grid-No.2 input, 0.75 max watt; peak heater-cathode volts, 90 max. These types are used principally for renewal purposes.



HIGH-MU TRIODE

Miniature type used as cathodedrive amplifier, frequency converter. or oscillator at frequencies up to about 300 megacycles per second particularly in television and FM receivers. Outline




7B,OUTLINES SECTION. Tube requires miniature seven-contact socket and may be mounted in any position. Heater volts (ac/dc), 6.3; amperes, 0.15. For maximum ratings, characteristics, and curves, refer to type 12AT7.

137

ELECTRON-RAY TUBE

Glass type with triode unit used to indicate visually by means of a fluorescent target the effects of a change in a controlling voltage. It is used as a convenient means of indicating accurate radio-receiver tuning. Maximum dimensions: over-all length, 4-3/16 inches; seated height, 3-9/16 inches; diameter, 1-3/16 inches. Tube requires six-contact socket. Heater volts (ac/dc), 6.3; amperes, 0.15. Maximum ratings



in indicator service: triode-plate supply volts, 180 max; fluorescent-target volts, 180 max, 125 min. This type is used principally for renewal purposes.

SHARP-CUTOFF PENTODE

Metal type used in rf and if stages of picture amplifier of television receivers particularly those employing automatic-gain control. Outline 2, OUTLINES SECTION. Tube requires octal socket. Heater volts (ac/dc), 6.3; amperes, 0.45. Maximum ratings as class A₁ amplifier: plate and grid-No.2 supply volts, 300 max; grid No.3, connect to cathode at socket; grid



No.2 volts, 200 max; plate dissipation, 3.75 max watts; grid No.2 input, 0.65 max watt. Typical operation: plate and grid-No.2 supply volts, 300; grid-No.3 volts, 0; grid-No.2 series resistor, 30000 ohms; grid-No.1 volts, -3; plate resistance (approx.), 0.7 megohm; transconductance, 5000 μ mhos; grid-No.1 volts for transconductance of 50 μ mhos, -22.5; plate ma., 12.5; grid-No.2 ma., 3.2. This type is used principally for renewal purposes.

HIGH-MU POWER TRIODE


Glass octal type used in single-ended or push-pull audio-frequency power amplifiers of the direct-coupled type in which a driver tube develops positive grid bias for the 6AC5-GT output stage. Outline 14C, OUTLINES SEC-TION. This type may be supplied with pin No. 1 omitted. Tube requires octal socket. Heater



volts (ac/dc), 6.3; amperes, 0.4. Maximum ratings as push-pull class B power amplifier: plate volts, 250 max; peak plate ma., 110 max; average plate dissipation, 10 max watts. This type is used principally for renewal purposes.

SHARP-CUTOFF PENTODE

Metal type used as video amplifier tube in television receivers, and as a mixer or oscillator tube in low-frequency applications. Outline 2, OUTLINES SECTION. Tube requires octal socket. Heater volts (ac/dc), 6.3; amperes, 0.45. Characteristics as class A₁ amplifier: plate and grid-No.2 supply volts, 300 max; grid No.3 connected to cathode at socket; grid-No.2 series resistor, 60000 ohms; cathode-bias resistor, 160



ohms; plate resistance (approx.), 1 megohm; transconductance, 9000 µmhos; plate ma., 10; grid-No.2 ma., 2.5; plate dissipation, 3 max watts; peak heater-cathode volts, 90 max. This type is used principally for renewal purposes.

ELECTRON-RAY TUBE

Glass octal type used to indicate visually, by means of two shadows on the fluorescent target, the effects of changes in the controlling voltages. It is a twin-indicator type and is used as a convenient means of indicating accurate radio-receiver tuning. Maximum over-all length, 2-7/8 inches; maximum diameter, 1-5/16 inches. Heater volts (ac/dc), 6.3; amperes, 0.15. Maximum target volts, 150. This is a DISCON-TINUED type listed for reference only.



6AB7

6AB5/

6N5



6AC7

6AD6G

LOW-MU TRIODE - POWER PENTODE

G2F (2

Glass octal type used in a push-pull amplifier circuit in conjunction with type 6F6-G. Triode unit serves as phase inverter. Outline 26, OUTLINES SECTION. Tube requires octal socket. Heater volts (ac/dc), 6.3; amperes, 0.85. For typical operation of pentode unit, refer to type 6F6-G. Maximum ratings of pentode unit as class A1 or push-pull class AB1 amplifier: plate volts, 375 max; grid-No. 2 volts, 285 max; plate



dissipation, 8.5 max watts; grid-No.2 input, 2.7 max watts. Maximum ratings of triode unit as classA amplifier: plate volts, 285 max: plate dissipation, 1.0 max watt. This type is used principally for renewal purposes.











LOW-MU TRIODE

Glass octal type used as class A1 amplifier in ac/dc radio receivers. Outline 14C, OUT-LINES SECTION. Heater volts (ac/dc), 6.3; amperes, 0.3. Maximum ratings as class A1 amplifier: plate volts, 300 max; plate dissipation, 2.5 max watts. This is a DISCONTINUED type listed for reference only.

TWIN-PLATE CONTROL TUBE

Glass octal type used as a control tube for twin-indicator type electron-ray tubes. Outline 22, OUTLINES SECTION. Contains two triodes with different cutoff characteristics. If avc voltage is applied to the common control grid in suitable circuit, one triode section operates on weak signals while the other operates on strong signals. Heater voltage (ac/dc), 6.3; amperes, 0.15. This is a DISCONTINUED type listed for reference only.

TWIN-INPUT TRIODE

Glass octal type used as a voltage amplifier or as a driver for two type 6AC5-GT tubes in dynamic-coupled, push-pull amplifiers. In the latter service, type 6AE7-GT replaces two tubes ordinarily required as drivers. Outline14C, OUT-LINES SECTION. Heater volts (ac/dc), 6.3; amperes, 0.5. This is a DISCONTINUED type listed for reference only.

HALF-WAVE VACUUM RECTIFIER

Miniature type used as a damper tube in horizontal deflection circuits of television receivers. Outline 9B, OUT-LINES SECTION. Tube requires miniature nine-contact socket and may be 6AE5GT

6AE6G

6AE7GT

6AF3 Related type: 12AF3

mounted in any position. Socket terminals 1, 2, 3, 6, 7, and 8 should not be used as tie points. It is especially important that this tube, like other power-handling tubes, be adequately ventilated. Heater volts (ac/dc), 6.3; amperes, 1.2.

| DAMPER SERVICE | | |
|--|------------------|----------|
| For operation in a 525-line, 30-frame system | | |
| Maximum Ratings, (Design-Maximum Values): | | |
| PEAK INVERSE PLATE VOLTAGE# | 4500 max | volts |
| PEAK PLATE CURRENT | 750 max | ma |
| AVERAGE PLATE CURRENT | 185 max | ma |
| PEAK HEATER CATHODE VOLTAGE: | | |
| Heater negative with respect to cathode | 4500* max | volts |
| Heater positive with respect to cathode | 300 ■ max | volts |
| BULB TEMPERATURE (At hottest point) | 210 max | °C |
| # The duration of the voltage pulse must not exceed 15 per cent of one horizont 525-line, 30-frame system, 15 per cent of one horizontal scanning cycle is 10 mi | | le. In a |

^{*} The dc component must not exceed 1000 volts.

The dc component must not exceed 100 volts.




MEDIUM-MU TRIODE

Miniature types used as local oscillators in uhf television receivers covering the frequency range of 470 to 890 megacycles per second. 6AF4 Outline 7B, 6AF4-A Outline 7A, OUT-



LINES SECTION. Tubes requires miniature seven-contact socket and may be mounted in any position.

| mounted in any position. | | | | |
|--|-----------------|---------|--|-------------------------------------|
| HEATER VOLTAGE (AC/DC) HEATER CURRENT. DIRECT INTERELECTRODE CAPACIT. Grid to Plate Plate to Cathode and Heater. Heater to Cathode and Heater. Heater to Cathode ark. * With external shield connected ** With external shield connected | ANCES:* | | . 0.225 . 1.9 . 2.2 . 1.4 | volts ampere pf pf pf |
| Characteristics: | CLASS A1 AM | PLIFIER | | |
| Plate Supply Voltage Cathode-Bias Resistor Amplification Factor Plate Resistance (Approx.) Transconductance Plate Current. | | | . 150 . 13.5 . 2100 . 6500 | volts ohms µmhos ma |
| | UHF OSCILLA | TOR | | |
| Maximum Ratings, (Design-Maxim PLATE VolTAGE. GRID VOLTAGE, Negative-bias valu GRID CURRENT. PLATE DISSIPATION. DC CATHODE CURRENT. PEAK HEATER-CATHODE VOLTAGE: | ie | | 50 max 2 max 2.5 max . 24 max | volts volts ma watts ma |
| Heater negative with respect to Heater positive with respect to | | | | volts |
| Typical Operation as Oscillator of Plate Supply Voltage. Plate Resistor. Grid Resistor. Plate Current. Grid Current (Approx.). | | | . 220 . 10000 | volts ohms ohms ma µa |
| Maximum Circuit Values: Grid-Circuit Resistance: For fixed-bias operation For cathode-bias operation "The dc component must not excee | | | | ommended megohm |
| | VERAGE PLATE CH | | | |
| | | | | _ |
| | | | | |

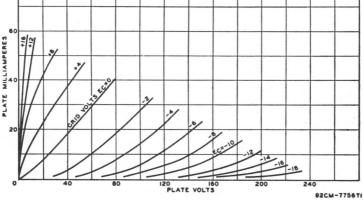




ELECTRON-RAY TUBE

Glass octal used to indicate visually, by means of two shadows on the fluorescent target, the effects of changes in the controlling voltages. It is a twin-indicator type and is used as a convenient means of indicating accurate radio-receiver tuning. Maximum over-all length, 2-5/16inches; maximum diameter, 1-5/16inches. This type may be supplied with pin No.1

6AF6G

omitted. Tube requires octal socket. Heater volts (ac/dc), 6.3; amperes, 0.15. Maximum ratings in indicator service; fluorescent-target volts, 250 max, 125 min; ray-control-electrode supply volts, 250 max; peak heater-cathode volts, 90 max. Typical operation: fluorescent-target volts, 250; fluorescent-target ma., 3.75; ray-contact-electrode volts (approx. for 0° shadow angle), 155; ray-control-electrode volts (approx. for 100° shadow angle), 0.



DUAL TRIODE— SHARP-CUTOFF PENTODE

Duodecar type used in a variety of applications in television receivers. The high-mu triode unit is used for agc keyer service, the medium-mu triode unit for sync separator service, and

6AF11 Related type: 15AF11

the pentode unit for video amplifier service. Outline 12C, OUTLINES SECTION. Tube requires duodecar twelve-contact socket and may be mounted in any position. Heater volts (ac/dc), 6.3; amperes, 1.05.

CLASS A1 AMPLIFIER

| | Triode | Triode | Pentode | |
|--|--------------------|--------------------|--------------------|---------|
| Maximum Ratings, (Design-Maximum Values): | Unit No.1 | Unit No.2 | Unit | |
| PLATE VOLTAGE | 330 max | 330 max | 330 max | volts |
| GRID-NO.2 (SCREEN-GRID SUPPLY VOLTAGE | - | | 330 max | volts |
| GRID-NO.2 VOLTAGE | | | See curve | page 70 |
| GRID-NO.1 (CONTROL-GRID) VOLTAGE, Positive- | | | | |
| bias value | 0 max | 0 max | 0 max | volts |
| PLATE DISSIPATION | 1.1 max | 2 max | 5 max | watts |
| GRID-NO.2 INPUT: | | | | |
| For grid-No.2 voltages up to 165 volts | | - | 1.25 max | watts |
| For grid-No.2 voltages between 165 and 330 | | | ~ | |
| volts PEAK HEATER-CATHODE VOLTAGE: | | - | See curve | page 70 |
| | 200 max | 200 max | 200 max | |
| Heater negative with respect to cathode Heater positive with respect to cathode | 200 max 200 max | 200 max 200 max | 200 max 200 max | volts |
| meater positive with respect to cathode | 200-max | 200- <i>max</i> | 200-max | VOIUS |
| Characteristics: | | | | |
| Plate Supply Voltage | 200 | 200 | 250 | volts |
| Grid-No.2 Supply Voltage | _ | | 150 | volts |
| Grid-No.1 Voltage | $^{-2}$ | - | _ | volts |
| Cathode-Bias Resistor | _ | 220 | 100 | ohms |
| Amplification Factor | 68 | 41 | - | |
| Plate Resistance (Approx) | 12400 · | 9400 | 68000 | ohms |
| Transconductance | 5500 | 4400 | 11000 | μmhos |
| Plate Current | 7 | 9.2 | 24 | ma |
| Grid-No.2 Current. | - | - | 4.8 | ma |
| Grid-No.1 Voltage (Approx.) for plate current | | | | |
| of 100 µa | - | -6.5 | -10 | volts |
| Maximum Circuit Values: | | | | |
| Grid-No.1-Current Resistance: | | | | |
| For fixed-bias operation. | 0.5 max | 0.5 max | 0.25 max | megohm |
| For cathode-bias operation | 1 max | 1 max | 1 max 1 | |
| The de component must not even d 100 milts | | | 2 11111 | |

"The dc component must not exceed 100 volts.



SHARP-CUTOFF PENTODE

Miniature type used in compact radio equipment as an rf or if amplifier up to 400 megacycles per second. Outline 7B, OUTLINES SECTION. Tube requires miniature seven-con-



tact socket and may be mounted in any position. Except for slightly different

characteristics, this type is similar electrically to miniature type 6BC5. Heater volts (ac/dc), 6.3; amperes, 0.3. For typical operation as a resistance-coupled amplifier, refer to RESISTANCE-COUPLED AMPLIFIER SECTION.

POWER PENTODE

Metal type used in output stage of video amplifier of television receivers. Outline 5, OUTLINES SECTION. Tube requires octal socket. Heater volts (ac/dc), 6.3; amperes, 0.65. Typi-

Tube requires octal socket. Heater volts (ac/dc), 6.3; amperes, 0.65. Typid operation as class A₁ amplifier: plate volts, 300 max; grid No.3 connected to eathode at socket; grid-No.2 volts, 150 (300 max); grid-No.1 volts, -3 (0 max); peak af grid-No.1 volts, 3; plate ma., 30 (zero signal), 30.5 (maximum signal); grid-No.2 ma., 7 (zero signal); 9 (maximum signal); plate resistance (approx.), 0.13 megohm; transconductance, 11000 µmhos; load resistance, 10000 ohms; maximum-signal power output, 3 watts; plate dissipation. 9 max watts; grid-No.2 input, 1.5 max watts.

LOW-MU TRIODE

Glass octal type having high perveance used as vertical deflection amplifier in television receivers. Outline 14C, OUTLINES SECTION. Tube requires octal socket and may be mounted in any position. Heater volts (ac/dc), 6.3; amperes, 0.75. Characteristics as class A; amplifier: plate volts, 250; grid volts, -23; amplification factor, 8; plate resistance (approx.), 1780 ohms; transconductance, 4500 µmhos; plate ma., 30. NC

н(2

G2

Maximum ratings as vertical-deflection amplifier (for operation in 525-line, 30-frame system); dc plate volts, 500 max; peak positive-pulse plate volts, 2000 max; peak negative-pulse grid volts, -200 max; peak cathode ma., 180 max; average cathode ma., 60 max; plate dissipation, 7.5 max watts; peak heater-cathode volts, 200 max (the dc component must not exceed 100 volts). This type is used principally for renewal purposes.

SHARP-CUTOFF PENTODE


Minature type used as if amplifier in video stages of television receivers. Outline 7B, OUT-LINES SECTION. Tube requires miniature seven-contact socket. Heater volts (ac/dc), 6.3; amperes, 0.45. Characteristics as class A₁ amplifier: plate supply volts, 300 max; grid No.3 connected to cathode at socket; grid-No.2 supply volts, 150 (300 max); cathode-bias resistor.



160 ohms; plate resistance (approx.), 0.5 megohm; transconductance, 9000 μ mhos; plate ma., 10; grid-No.2 ma., 2.5; plate dissipation, 3.2 max watts; peak heater-cathode volts, 90 max. This type is used principally for renewal purposes.

SHARP-CUTOFF PENTODE

Miniature type used as an rf or if amplifier especially in high-frequency wide-band applications. It is useful as an amplifier at frequencies up to 400 megacycles per second. Outline 7A.



OUTLINES SECTION. Tube requires miniature seven-contact socket and may be mounted in any position.

| HEATER VOLTAGE (AC/DC) | | volts ampere |
|---|----------|-----------------|
| DIRECT INTERELECTRODE CAPACITANCES (Approx.): | | |
| Grid No.1 to Plate | 0.02 max | pf |
| Grid No.1 to Cathode, Heater, Grid No.2, Grid No.3, and Internal Shield | 4.0 | pf |
| Plate to Cathode, Heater, Grid No.2, Grid No.3, and Internal Shield | 2.8 | pf |

6AH4GT

6AG7

6AH6

6AK5

= Technical Data =

CLASS A1 AMPLIFIER

Maximum Ratings, (Design-Center Values):

| PLATE VOLTAGE. GRID-NO.2 (SCREEN-GRID) VOLTAGE. GRID-NO.2 SUPPLY VOLTAGE. GRID-NO.1 VOLTAGE, Positive-bias value PLATE DISSIPATION. GRID-NO.2 INPUT: | 180 maxvoltsSee curve page 70180 max0 maxvolts1.7 maxwatts |
|---|--|
| For grid-No.2 voltages up to 90 volts For grid-No.2 voltages between 90 and 180 volts | 0.5 max watt See curve page 70 |
| CATHODE CURRENT | 18 max ma |
| PEAK HEATER-CATHODE VOLTAGE: Heater negative with respect to cathode | 90 max volts |
| Heater positive with respect to cathode | 90 max volts |
| Characteristics: | |
| Plate Supply Voltage 120 | 180 volts |
| Grid-No.2 Supply Voltage 120 | 120 volts |
| Cathode-Bias Resistor | 180 ohms |
| Plate Resistance (Approx.) | 0.5 megohm |
| Transconductance | 5100 μ mhos |
| Grid-No.1 Voltage for plate current of 10 μa | -8.5 volts |
| Plate Current | 7.7 ma |
| Grid-No.2 Current | 2.4 ma |
| With outcomel shield composed to ming 9 on 7 | |

With external shield connected to pins 2 or 7.



HALF-WAVE VACUUM RECTIFIER

Miniature type used as damper tube in horizontal-deflection circuits of television receivers. Outline 9C, OUT-LINES SECTION. Tube requires miniature nine-contact socket and may

6AL3

be mounted in any position. Socket terminals 1, 2, 3, 6, 7, and 8 should not be used as tie points. It is especially important that this tube, like other power-handling tubes, be adequately ventilated. Heater volts (ac/dc), 6.3; amperes, 1.55.

DAMPER SERVICE

For operation in 525-line, 30-frame system

| Maximum Ratings, (Design-Center Values): | | |
|--|-------------------|-------|
| PEAK INVERSE PLATE VOLTAGE [®] (Absolute maximum) | $7500^{\circ}max$ | volts |
| PEAK PLATE CURRENT | 550 max | ma |
| DC PLATE CURRENT | 220 max | ma |
| PLATE DISSIPATION | 5 max | watts |
| PEAK HEATER-CATHODE VOLTAGE | 6600 max | volts |

° Under no circumstances should this absolute value be exceeded.

The duration of the voltage pulse must not exceed 15 per cent of one horizontal scanning cycle. In a 525-line, 30-frame system, 15 per cent of one horizontal scanning cycle is 10 microseconds.



TWIN DIODE

Miniature, high-perveance type used as detector in FM and television circuits. It is especially useful as a ratio detector in ac-operated FM receivers. Each diode section can be used



independently of the other, or the two sections can be combined in parallel or fullwave arrangement. Resonant frequency of each unit is approximately 700 megacycles per second. Outline 7A, OUTLINES SECTION. Tube requires miniature seven-contact socket and may be mounted in any position.


| Heater Voltage (ac/dc), | 6.3 | volts |
|---|-----------|--------|
| HEATER CURRENT. | 0.3 | ampere |
| DIRECT INTERELECTRODE CAPACITANCES: | | |
| Plate No.1 to Cathode No.1, Heater, and Internal Shield | 2.5 | pf |
| Plate No.2 to Cathode No.2, Heater, and Internal Shield | 2.5 | pf |
| Cathode No.1 to Plate No.1. Heater, and Internal Shield | 3.4 | pf |
| Cathode No.2 to Plate No.2, Heater, and Internal Shield | 3.4 | pf |
| Plate No.1 to Plate No.2. | 0.068 max | pf |
| | | |

143

RCA Receiving Tube Manual =

HALF-WAVE RECTIFIER

| Maximum Ratings, (Design-Center Values): | | |
|---|---------|-------|
| PEAK INVERSE PLATE VOLTAGE | 330 max | volts |
| PEAK PLATE CURRENT (Per Plate) | 54 max | ma |
| DC OUTPUT CURRENT (Per Plate) | 9 max | ma |
| PEAK HEATER-CATHODE VOLTAGE: | | |
| Heater negative with respect to cathode | 330 max | volts |
| Heater positive with respect to cathode | 330 max | volts |
| Typical Operation: | | |
| AC Plate Voltage per Plate (rms) | 117 | volts |
| Min. Total Effective Plate-Supply Impedance per Plate | 300 | ohms |
| DC Output Current per Plate | 9 | ma |
| | | |

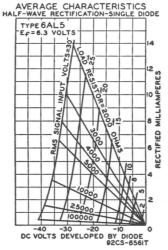

ELECTRON-RAY TUBE




6AL11

Related type:

12AL11


Glass octal type used to indicate visually on a pair of rectangular fluorescent patterns the effects of changes in voltages applied to its grid and three deflecting electrodes. It is especially useful in meeting the requirements for accurate tuning in FM receivers. Maximum dimensions: over-all length, 3-1/16 inches; seated height, 2-1/2 inches; diameter, 1-9/32 inches. Tube requires octal socket and may be mounted in any



position. Heater volts (ac/dc), 6.3; amperes, 0.15. Maximum ratings in indicator service: fluorescenttarget volts, 365 max, 220 min; peak heater-cathode volts, 90 max. Typical operation in indicator service: fluorescent-target volts, 315; deflecting electrodes Nos.1, 2, and 3 volts, 0; cathode resistor (approx.), 3300 ohms; deflection sensitivity (approx), 1 mm/volt; grid volts for fluorescence cutoff, -7. This type is used principally for renewal purposes.

BEAM POWER TUBE— SHARP-CUTOFF PENTODE

Duodecar type used as FM detector and audio-frequency output amplifier in television receivers. Outline 12B,OUTLINES SECTION. Tube requires duodecar twelve-contact socket



and may be mounted in any position. Heater volts (ac/dc), 6.3; amperes, 0.9.

BEAM POWER UNIT AS CLASS AI AMPLIFIER

| Maximum Ratings, (Design-Maximum Values): | | | |
|--|-----|-------------------|-------------------------|
| PLATE VOLTAGE. GRID-NO.2 (SCREEN-GRID) VOLTAGE. PLATE DISSIPATION. | 275 | max max max | volts volts watts |
| GRID-NO.2 INPUT. | | max | watts |

= Technical Data ==

| PEAK HEATER-CATHODE VOLTAGE: Heater negative with respect to cathode Heater positive with respect to cathode | 200 max 200¶max | volts volts |
|--|---------------------|----------------|
| Typical Operation: | | |
| Plate Voltage | 250 | volts |
| Grid-No.2 Voltage | 250 | volts |
| Grid-No.1 (Control-Grid) Voltage | -8 | volts |
| Peak AF Grid-No.1 Voltage | 8 | volts |
| Zero-Signal Plate Current | 35 | ma |
| Maximum-Signal Plate Current | 39 | ma |
| Zero-Signal Grid-No.2 Current. | 2.5 | ma |
| Maximum-Signal Grid-No.2 Current | 7 | ma |
| Plate Resistance (Approx.) | 0.1 | megohm |
| Transconductance | 6500 | μmhos |
| Load Resistance | 5000 | ohms |
| Total Harmonic Distortion | 10 | per cent |
| Maximum-Signal Power Output | 4.2 | watts |
| Maximum Circuit Values: | | |
| Grid-No.1-Circuit Resistance: | | |
| For fixed-bias operation | 0.25 max | megohm |
| For cathode-bias operation. | 0.25 max 0.5 max | |
| For camode-bias operation. | 0.0 max | megohm |

The dc component must not exceed 100 volts.

PENTODE UNIT AS CLASS A1 AMPLIFIER

Characteristics:

| Plate Supply Voltage | 150 | volts |
|--|------|--------|
| Grid-No.3 (Suppressor-Grid) Voltage | 0 | volts |
| Grid-No.2 (Screen-Grid) Supply Voltage | 100 | volts |
| Cathode-Bias Resistor | 560 | ohms |
| Plate Resistance (Approx.) | 0.15 | megohm |
| Transconductance, Grid No.1 to Plate | 1000 | μmhos |
| Transconductance, Grid No.3 to Plate | 400 | µmhos |
| Plate Current | 1.3 | ma |
| Grid-No.2 Current | 2.1 | ma |
| Grid-No.1 Voltage (Approx.) for plate current of 30 µa | -4.5 | volts |
| Grid-No.3 Voltage (Approx.) for plate current of 50 µa | -4.5 | volts |

PENTODE UNIT AS FM DETECTOR

| Maximum Ratings, (Design-Maximum Values): | |
|---|-------------------|
| PLATE VOLTAGE | 330 max volts |
| GRID-NO.3 VOLTAGE. | 28 max volts |
| GRID-NO.2 SUPPLY VOLTAGE | 330 max volts |
| GRID-NO.2 VOLTAGE | See curve page 70 |
| GRID-NO.1 (CONTROL-GRID) VOLTAGE, Positive-bias value | 0 max volts |
| PLATE DISSIPATION | 1.7 max watts |
| GRID-NO.2 INPUT: | |
| For grid-No.2 voltages up to 165 volts | 1.1 max watts |
| For grid-No.2 voltages between 165 and 330 volts | See curve page 70 |
| PEAK HEATER-CATHODE VOLTAGE: | |
| Heater negative with respect to cathode | 200 max volts |
| Heater positive with respect to cathode | 200 max volts |
| The dc component must not exceed 100 volts | |

The dc component must not exceed 100 volts.



HIGH-MU TRIODE


Miniature type used as mixer and rf amplifier in cathode-drive circuits of uhf television receivers. Outline 8A, OUTLINES SECTION. Tube requires miniature nine-contact socket and may be mounted in any position. Heater volts (ac/dc), 6.3; amperes, 0.225. Characteristics as class A₁ amplifier: plate-supply volts, 200 max; cathode-bias resistor, 100 ohms; amplification factor, 85; plate resistance (approx.),



8700 ohms; transconductance, 9800 µmhos; plate ma., 10; plate dissipation, 2 max watts; peak heatercathode volts, 80 max. This type is used principally for renewal purposes.

DIODE—SHARP-CUTOFF PENTODE

Miniature types used in diversified applications in television receivers. Type 6AM8-A has a controlled heater warm-up time for use in receivers employing series-connected heater strings.



The pentode unit is used as an if amplifier, video amplifier, or agc amplifier. The high-perveance diode is used as an audio detector, video detector, or dc restorer. Outline 8B, OUTLINES SECTION. Tubes require miniature nine-contact socket and may be mounted in any position. Type 6AM8 is a DISCONTINUED type listed for reference only.

| HEATER VOLTAGE (AC/DC). HEATER CURRENT. HEATER WARM-UP TIME (Average) for 6AM8-A. DIRECT INTERELECTRODE CAPACITANCES: Diode Unit: | $\begin{array}{r} 6.3\\ 0.45\\ 11 \end{array}$ | volts ampere seconds |
|---|---|----------------------------|
| Plate to Cathode and Heater Cathode to Plate and Heater Pentode Unit: | $1.8\\3$ | pf $ pf$ |
| Grid No.1 to Plate Grid No.1 to Plate Grid No.1 to Cathode, Heater, Grid No.2, No.3 and Internal Shield Plate to Cathode, Heater, Grid No.2, Grid No.3, and Internal Shield Pentode Grid No.1 to Diode Plate Pentode Plate to Diode Cathode Pentode Plate to Diode Plate. | 0.015 max 6.5 2.6 0.006 max 0.15 max 0.1 max | pf pf pf pf pf |

PENTODE UNIT AS CLASS A1 AMPLIFIER

Maximum Ratings, (Design-Maximum Values):


6AM8

6AM8A

Related type: 5AM8

| PLATE VOLTAGE. | 330 max | volts |
|---|-------------------|---------|
| GRID-NO.3 (SUPPRESSOR-GRID) VOLTAGE, Positive value | 0 max | volts |
| GRID-NO.2 (SCREEN-GRID) SUPPLY VOLTAGE | 330 max | volts |
| GRID-NO.2 VOLTAGE. | See curve | page 70 |
| GRID-NO.1 (CONTROL-GRID) VOLTAGE, Positive-bias value | 0 max | volts |
| PLATE DISSIPATION | 3.2 max | watts |
| GRID-NO.2 INPUT: | | |
| For grid-No.2 voltages up to 165 volts | 0.55 max | watt |
| For grid-No.2 voltages between 165 and 330 volts | See curve | page 70 |
| PEAK HEATER-CATHODE VOLTAGE: | | |
| Heater negative with respect to cathode | 200 max | volts |
| Heater positive with respect to cathode | $200^{\circ} max$ | volts |
| Characteristics: | | |
| Plate Supply Voltage | 125 | volts |
| Grid No.3 Connected | to cathode a | |
| | | |

AVERAGE CHARACTERISTICS

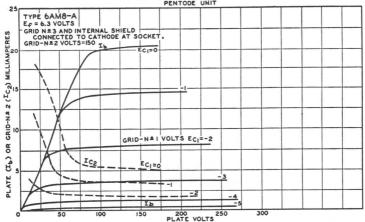

Technical Data =

| 56 0.3 7800 -6 | ohms megohm µmhos volts |
|---|---|
| $\begin{array}{r} -3\\12.5\\3.2\end{array}$ | volts ma ma |
| | |
| 0.25 max 1.0 max | megohm megohm |
| | |
| | |
| 5 max | ma |
| 200 max 200° max | volts volts |
| | 0 3 7800 -6 -3 12.5 3.2 0.25 max 1.0 max 5 max 200 max |

°The dc component must not exceed 100 volts.



HIGH-MU TRIODE

Miniature type used as mixer or rf amplifier in cathode-drive circuits of uhf television tuners covering the frequency range of 470 to 890 megacycles per second. Outline 7A, OUT-

6AN4

LINES SECTION. Tube requires miniature seven-contact socket and may be mounted in any position. Heater volts (ac/dc), 6.3; amperes, 0.225.

CLASS A1 AMPLIFIER

| Maximum Ratings, (Design-Center Values): | | |
|--|--------------------|------------------|
| PLATE VOLTAGE | 300 max | volts |
| PLATE DISSIPATION | 4 max | watts |
| CATHODE CURRENT. | 30 max | ma |
| PEAK HEATER-CATHODE VOLTAGE: | 000 | 14 |
| Heater negative with respect to cathode | 200 max | volts |
| Heater positive with respect to cathode | 200 max | volts |
| Characteristics: Plate-Supply Voltage. Cathode-Bias Resistor | 200 100 | volts |
| Amplification Factor | 70 10000 | mhan |
| Transconductance | 13 | $\mu mhos ma$ |
| Plate Current . Grid Voltage (Approx.) for plate current of 20 μa | -7 | volts |
| Maximum Circuit Values: | | |
| Grid-Circuit Resistance: For fixed-bias operation For cathode-bias operation | 0.1 max 0.5 max | megohm megohm |
| The decomponent must not exceed 100 walts | | |

The dc component must not exceed 100 volts.



MEDIUM-MU TRIODE— SHARP-CUTOFF PENTODE

Miniature types used in a wide variety of applications in color television receivers. The 6AN8-A has a controlled heater warm-up time for use in receivers employing series-connected



heater strings. The pentode unit is used as an intermediate-frequency amplifier, a video amplifier, an agc amplifier, or as a reactance tube. The triode unit is used in low-frequency oscillator, sync-separator, sync-clipper, and phase-splitter circuits. Outline 8B, OUTLINES SECTION. Tubes require miniature nine-contact socket and may be mounted in any position. Type 6AN8 is a DISCONTINUED type listed for reference only.

| HEATER VOLTAGE (AC/DC) | 6.3 | volts |
|--------------------------------------|------|---------|
| HEATER CURRENT | 0.45 | ampere |
| HEATER WARM-UP TIME (Average) 6AN8-A | 11 | seconds |

| DIRECT INTERELECTRODE CAPACITANCES: | |
|---|----|
| Triode Unit: | |
| Grid to Plate 1.5 | pf |
| Grid to Cathode and Heater 2.0 | pf |
| Plate to Cathode and Heater | pf |
| Pentode Unit: | |
| Grid No.1 to Plate | pf |
| Grid No.1 to Cathode, Heater, Grid No.2, Grid No.3, and Internal Shield 7 | pf |
| Plate to Cathode, Heater, Grid No.2, Grid No.3, and Internal Shield 2.4 | pf |
| Triode Grid to Pentode Plate | pf |
| Pentode Grid No.1 to Triode Plate0.02 | pf |
| Pentode Plate to Triode Plate0.15 | pf |

CLASS A1 AMPLIFIER

| Maximum Ratings, (Design-Maximum Values): | Triode Unit | Pentode Unit | |
|---|-------------|--------------|------------|
| PLATE VOLTAGE | 330 max | 330 max | volts |
| GRID-NO.2 SUPPLY VOLTAGE | - | 330 max | volts |
| GRID-NO.2 (SCREEN-GRID) VOLTAGE | - | | ve page 70 |
| GRID-NO.1 (CONTROL-GRID) VOLTAGE, Positive-bias value | 0 max | 0 max | volts |
| PLATE DISSIPATION. | 2.8 max | 2.3 max | watts |
| GRID-NO.2 INPUT: | a.o maa | a. o mar | Walls |
| For grid-No.2 voltages up to 165 volts | - | 0.55 max | watt |
| For grid-No.2 voltages between 165 and 330 volts | _ | | re page 70 |
| PEAK HEATER-CATHODE VOLTAGE: | | See cui | e page 10 |
| Heater negative with respect to cathode | 200 max | 200 max | volts |
| Heater positive with respect to cathode | 200° max | 200°max | volts |
| Acader positive with respect to cathode | 200 11000 | a00 ///da | 10105 |
| Channelstin | | | |
| Characteristics: | Triode Unit | Pentode Unit | |
| Plate Supply Voltage | 150 | 125 | volts |
| Grid-No.2 Supply Voltage. | | 125 | volts |
| Grid-No.1 Voltage | -3 | - | volts |
| Cathode-Bias Resistor | - | 56 | ohms |
| Amplification Factor | 21 | - | |
| Plate Resistance (Approx.) | 4700 | 170000 | ohms |
| Transconductance | 4500 | 7800 | μmhos |
| Grid-No.1 Voltage (Approx.) for plate current of 20µa | -17 | -6 | volts |
| Grid-No.1 Voltage (Approx.) for plate current of 1.6 ma and | | | |
| cathode-bias resistor of 0 ohms | - | -3 | volts |
| Plate Current | 15 | 12 | ma |
| Grid-No.2 Current | _ | 3.8 | ma |
| | | | |
| Maximum Circuit Values: | | | |
| Grid-No.1-Circuit Resistance:* | | | |
| | 0 5 | 0.05 | |
| For fixed-bias operation. | 0.5 max | 0.25 max | megohm |
| For cathode-bias operation | 1.0 max | 1.0 max | megohm |

°The dc component must not exceed 100 volts.

*If either unit is operating at maximum rated conditions, grid-No.1-circuit resistance for both units should not exceed the stated values.



BEAM POWER TUBE

Miniature types used as output amplifiers primarily in automobile receivers and in ac-operated receivers and, triode-connected, as vertical deflection amplifiers in television receiv-




ers. Type 6AQ5-A has a controlled heater warm-up time for use in television receivers employing series-connected heater strings. Outline 7C, OUTLINES SEC-TION. Tubes require miniature seven-contact socket and may be mounted in any position. Within their maximum ratings, the performance of these types is equivalent to that of larger types 6V6 and 6V6-GTA. Type 6AQ5 is a DISCONTINUED type listed for reference only.

| Heater Voltage (ac/dc) | 6.3 0.45 | volts, |
|--|--------------|--------------|
| HEATER WARM-UP TIME (Average) for 6AQ5-A | 11 | seconds |
| DIRECT INTERELECTRODE CAPACITANCES (Approx.): | | |
| Grid No.1 to Plate | 0.4 | pf |
| Grid No.1 to Cathode, Heater, Grid No.2, and Grid No.3, | 8 | pf |
| Plate to Cathode, Heater, Grid No.2, and Grid No.3 | 8.5 | pf |
| AMPLIFICATION FACTOR* | 9.5 | |
| PLATE RESISTANCE (Approx.)* | 1970 | ohms |
| TRANSCONDUCTANCE* | 4800 | µmhos |
| GRID-NO.1 VOLTAGE (Approx.) for plate current of 0.5 ma. | -37 | volts |
| * Grid No.2 connected to plate; plate and grid-No.2 volts, 250; grid-No.1 volts, | -12.5; plate | e ma., 49.5. |

= Technical Data =

AVERAGE CHARACTERISTICS

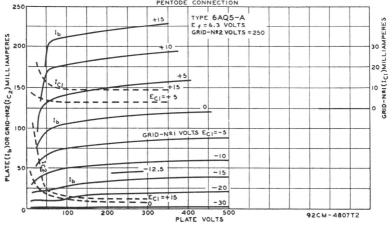

CLASS A1 AMPLIFIER

Maximum Ratings, (Design-Maximum Values):

| PLATE VOLTAGE | 275 max | volts |
|---|---------|-------|
| GRID-NO.2 (SCREEN-GRID) VOLTAGE | 275 max | volts |
| PLATE DISSIPATION | 12 max | watts |
| GRID-NO.2 INPUT. | 2 max | watts |
| PEAK HEATER-CATHODE VOLTAGE: | | |
| Heater negative with respect to cathode | 200 max | volts |
| Heater positive with respect to cathode | 200 max | volts |
| BULB TEMPERATURE (At hottest point) | 250 max | °C |
| | | |


The dc component must not exceed 100 volts.

Typical Operation:

Same as for type 6V6-GTA within the limitations of the maximum ratings.

Maximum Circuit Values:

| Grid-No.1-Circuit Resistance: | | |
|-------------------------------|---------|--------|
| For fixed-bias operation | 0.1 max | |
| For cathode-bias operation | 0.5 max | megohm |

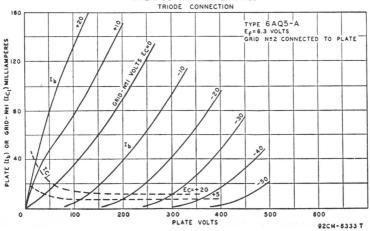

AVERAGE CHARACTERISTICS TRIODE CONNECTION

= RCA Receiving Tube Manual =

VERTICAL DEFLECTION AMPLIFIER (Triode Connection)°

For operation in a 525-line, 30-frame system

Maximum Ratings, (Design-Maximum Values):

| DC PLATE VOLTAGE | 275 max | volts |
|---|----------|---------|
| Peak Positive-Pulse Plate Voltage [†] | 1100 max | volts |
| PEAK NEGATIVE-PULSE GRID-NO.1 (CONTROL-GRID) VOLTAGE | -275 max | volts |
| PEAK CATHODE CURRENT | 115 max | ma |
| AVERAGE CATHODE CURRENT | 40 max | ma |
| PLATE DISSIPATION | 10 max | watts |
| PEAK HEATER-CATHODE VOLTAGE: | | |
| Heater negative with respect to cathode | 200 max | volts |
| Heater positive with respect to cathode | 200 max | volta |
| BULB TEMPERATURE (At hottest point) | 250 max | °C |
| Maximum Circuit Value: | | |
| Grid-No.1-Circuit Resistance: For cathode-bias operation | 2.2 max | megohms |

° Grid No.2 connected to plate.

6AQ6

6AQ7GT

† The duration of the voltage pulse must not exceed 15 per cent of one vertical scanning cycle. In a 525line, 30-frame system, 15 per cent of one vertical scanning cycle is 2.5 milliseconds.

The dc component must not exceed 100 volts.

TWIN DIODE—HIGH-MU TRIODE

Miniature type used as combined detector, amplifier, and ave tube in compact radio receivers. Outline 7B, OUTLINES SECTION. Tube requires miniature seven-contact socket. Heater volts (ac/dc), 6.3; amperes, 0.15. Characteristics of triode unit as class A_1 amplifier: plate volts, 250 (300 max); grid volts, -3; amplification factor, 70; plate resistance (approx.), 58000 ohms; transconductance, 1200 µmhos;




plate ma., 1; peak heater-cathode volts, 90 max. This type is used principally for renewal purposes.

TWIN DIODE—HIGH-MU TRIODE

Glass octal type used as FM detector and audio amplifier in circuits which require diode and triode units with separate cathodes. Outline 14C, OUTLINES SECTION. Tube requires octal socket. Heater volts (ac/dc), 6.3; amperes, 0.3. Ratings and characteristics of triode unit as class A₁ amplifier: plate volts, 250 max; grid volts, -2; amplification factor, 70; plate resistance (approx.), 44000 ohms; transconductance,

1600 µmhos; plate ma., 2.3. This type is used principally for renewal purposes.

6AQ8

Miniature type used as rf amplifier and self-oscillating mixer in FM/AM radio receivers. Outline 8B, OUTLINESSECTION. Tube requires nine-contact socket and may be oper-

HIGH-MU TWIN TRIODE



ated in any position. Heater volts (ac/dc), 6.3; amperes, 0.435. With plate volts of 250 and grid volts of -2.3, class A₁ characteristics of each unit are: plate ma, 10; plate resistance (approx.), 9700 ohms; transconductance, 5900 μ mhos; amplification factor, 57.

| Maximum Ratings, (Design-Center Values, Each Unit): | | |
|---|----------|-------|
| PLATE VOLTAGE with plate ma = 0 | 550 max | volts |
| PLATE VOLTAGE | 300 max | volts |
| GRID VOLTAGE, Negative-bias value | -100 max | volts |
| PLATE DISSIPATION: | | |
| For either plate | 2.5 max | watts |
| For both plates with both units operating | 4.5 max | watts |
| CATHODE CURRENT. | 15 max | ma |
| PEAK HEATER-CATHODE VOLTAGE: | | |
| Heater negative with respect to cathode | 90 max | volts |
| Heater positive with respect to cathode | 90 max | volts |
| | | |


I detector and require diode athodes. Out-Tube requires 6.3: amores K012D2

— Technical Data =

| | RF | | |
|--|-----------|-----------|--------|
| Typical Operation, (Each Unit): | Amplifier | Converter | |
| Plate Supply Voltage | 250 | 250 | volts |
| Plate Voltage | 230 | - | volts |
| Plate Resistor | 1800 | 12000 | ohms |
| Grid Resistor | | 1 | megohm |
| Grid Voltage | -2 | - | volts |
| RMS Oscillator Voltage | - | 3 | volts |
| Cathode Resistor | 200 | - | ohms |
| Plate Resistance (Approx.) | 9700 | 22000 | ohms |
| Transconductance | 6000 | - | μmhos |
| Conversion Transconductance | - | 2300 | µmhos |
| Input Resistance at frequency $(Mc) = 100$ | 6000 | 15000 | ohms |
| Plate Current | 10 | 5.2 | ma |
| Equivalent Noise Resistance | 500 | - | ohms |
| | | | |

Maximum Circuit Values, (Each Unit):

| Grid-Circuit Resistance | 1 max | megohm |
|---------------------------------------|-----------|--------|
| Resistance between Cathode and Heater | 20000 max | ohms |




POWER PENTODE

Miniature type used as output tube primarily in automobile receivers and ac-operated receivers. Outline 7C, OUTLINES SECTION. Tube requires miniature seven-contact socket and may be mounted in any position. Heater volts (ac/dc), 6.3; amperes, 0.4. Maximum ratings as class A_1 amplifier: plate and grid-No.2 (screen-grid) volts, 250 max; plate dissipation, 8.5 max watts; grid-No.2 input, 2.5 max watts;



peak heater-cathode volts, 90 max. Within its maximum ratings, type 6AR5 is equivalent in performance to glass-octal type 6K6-GT. Type 6AR5 is used principally for renewal purposes.



SEMIREMOTE-CUTOFF TWIN PENTODE

Duodecar type used as if-amplifier tube in television receivers. Outline 12A, OUTLINES SECTION. Tube requires duodecar twelve-contact-socket and may be mounted in



any position. Heater volts (ac/dc), 6.3; amperes, 0.8.

CLASS A1 AMPLIFIER

Values for each unit


| Maximum Kalings, (Design-Maximum Values): | | |
|--|------------------|------------|
| PLATE VOLTAGE | 330 max | volts |
| GRID-No.3 (SUPPRESSOR-GRID) Voltage, Positive value | 0 max | volts |
| GRID-NO.2 (SCREEN-GRID) SUPPLY VOLTAGE | 330 max | volts |
| GRID-NO.2 VOLTAGE. | See curv | re page 70 |
| GRID-NO.1 (CONTROL-GRID) VOLTAGE, Positive-bias value | 0 max | volts |
| GRID-NO.2 INPUT: | | |
| For grid-No.2 voltages up to 165 volts | 0.65 max | watt |
| For grid-No.2 voltages between 165 and 330 volts | See curv | re page 70 |
| PLATE DISSIPATION | 3.1 max | watts |
| PEAK HEATER-CATHODE VOLTAGE: | | |
| Heater negative with respect to cathode | 200 max | volts |
| Heater positive with respect to cathode | $200^{\circ}max$ | volts |
| Characteristics, (Each Unit): | | |
| | | |
| Plate Supply Voltage | 125 | volts |
| Grid No.3Connect | | |
| Grid-No.2 Supply Voltage | 125 | volts |
| Cathode-Bias Resistor | 56 | ohms |
| Plate Resistance (Approx.) | 0.2 | megohm |
| Transconductance | 10500 | μ mhos |
| Plate Current | 11 | ma |
| Grid-No.2 Current | 3.5 | ma |
| Grid-No.1 Voltage (Approx.) for transconductance of 50 µmhos | -15 | volts |
| ° The dc component must not exceed 100 volts. | | |
| | | |

RCA Receiving Tube Manual =

BEAM POWER TUBE

Miniature type used as output amplifier primarily in automobile and in ac-operated receivers. Outline 7C, OUTLINES SECTION. Tube requires miniature seven-contact socket and may be mounted in any position. For curves of average plate characteristics, refer to type 35C5.

6AS5




| HEATER VOLTAGE (AC/DC). HEATER CURRENT. DIRECT INTERELECTRODE CAPACITANCES (Approx.): | 6.3 0.8 0.6 | volts ampere |
|---|--|---|
| Grid No.1 to Plate. Grid No.1 to Cathode, Heater, Grid No.2, and Grid No.3. Plate to Cathode, Heater, Grid No.2, and Grid No.3. | 12 9.0 | pf pf pf |
| CLASS A1 AMPLIFIER | | |
| Maximum Ratings, (Design-Center Values): | | |
| PLATE VOLTAGE. GRID-NO.2 (SCREEN-GRID) VOLTAGE. PLATE DISSIPATION. GRID-NO.2 INPUT PEAK HEATER-CATHODE VOLTAGE: | 150 max 117 max 5.5 max 1.0 max | volts volts watts watt |
| Heater negative with respect to cathode Heater positive with respect to cathode BULB TEMPERATURE (At hottest point) | 100 max 100 max 250 max | volts volts °C |
| Typical Operation: | | |
| Plate Voltage. Grid-No.2 Voltage Grid-No.1 (Control-Grid) Voltage Peak AF Grid-No.1 Voltage. Zero-Signal Plate Current. Zero-Signal Plate Current (Approx.). Maximum-Signal Grid-No.2 Current (Approx.). Transconductance. Load Resistance. Total Harmonic Distortion. Maximum-Signal Power Output. | $150 \\ 110 \\ -8.5 \\ 8.5 \\ 35 \\ 36 \\ 2 \\ 6.5 \\ 5600 \\ 4500 \\ 10 \\ 2.2$ | volts volts volts ma ma µmhos ohms per cent watts |
| Maximum Circuit Values: | | |
| Grid-No.1-Circuit Resistance: For fixed-bias operation For cathode-bias operation | 0.1 max 0.5 max | megohm megohm |

DIODE—

SHARP-CUTOFF PENTODE

Miniature type used in diversified applications in television and radio receivers. The pentode unit is used as an if amplifier, video amplifier, or agc amplifier. The high-perveance diode is



used as an audio detector, video detector, or dc restorer. Outline 8B, OUTLINES SECTION. Tube requires miniature nine-contact socket and may be mounted in any position.

| Heater Voltage (ac/dc) Heater Current. Direct Interelectrode Capacitances: | $\begin{array}{c} 6.3 \\ 0.45 \end{array}$ | volts |
|---|---|----------|
| Diode Unit: Plate to Cathode, Heater, Pentode Grid No.3, and Internal Shield Pentode Unit: | 3.0 | pf |
| Grid No.1 to Plate Grid No.1 to Cathode, Heater, Grid No.2, Grid No.3, and Internal Shield | 0.03 max | pf pf |
| Plate to Cathode, Heater, Grid No.2, Grid No.3, and Internal Shield Pentode Grid No.1 to Diode Plate | $\begin{array}{c} 2.4\\ 0.005 max \end{array}$ | pf pf |
| Pentode Plate to Diode Cathode Pentode Plate to Diode Plate | $\begin{array}{c} 0.15 \ max \\ 0.10 \ max \end{array}$ | pf pf |

Related type: 5AS8


= Technical Data =

PENTODE UNIT AS CLASS A1 AMPLIFIER

| volts |
|-------|
| volts |
| volts |
| e 70 |
| volts |
| vatts |
| |
| watt |
| ge 70 |
| |
| volts |
| VOILB |
| |
| volts |
| cket |
| volts |
| hms |
| hms |
| nhos |
| volts |
| ma |
| ma |
| |
| |
| |
| ohm |
| ohm |
| |
| |
| |
| volta |
| |

| PEAK INVERSE PLATE VOLTAGE | 330 max | volts |
|--|----------|-------|
| PEAK PLATE CURRENT | 50 max | ma |
| DC PLATE CURRENT | 5 max | ma |
| PEAK HEATER-CATHODE VOLTAGE: | | |
| Heater negative with respect to cathode | 200 max | volts |
| Heater positive with respect to cathode | 200° max | volts |
| ^o The decomponent must not exceed 100 volta | | |

The dc component must not exceed 100 volts.



DUAL TRIODE— SHARP-CUTOFF PENTODE

Duodecar type used in television receivers. High-mu triode is used in audio if-amplifier service; mediummu triode is used in sync-separator service; nentode is used in video am-

6AS11

H H service; pentode is used in video amplifier service. Outline 12B, OUTLINES SECTION. Tube requires 12-contact socket and may be mounted in any position. Heater voltage (ac/dc), 6.3; amperes, 1.05.

| Maximum Ratings, (Design-Maximum Values): | Triode Un No.1 No | | |
|--|----------------------------|-----------|------------------------------|
| PLATE VOLTAGE GRID-NO.2 (SCREEN-GRID) SUPPLY VOLTAGE GRID-NO.2 VOLTAGE | 330 max 330 | - 330 max | volts volts re page 70 |
| GRID-NO.1 (CONTROL-GRID) VOLTAGE, Positive-bias value GRID-NO.2 INPUT: | 0 max 0 | max 0 max | volts |
| For grid-No.2 voltages up to 165 volts For grid-No.2 voltages between 165 and 330 volts | | - 1.1 max | watts e page 70 |
| PLATE DISSIPATION. PLATE DISSIPATION. PEAK HEATER-CATHODE VOLTAGE: | 1.5 max 2 | max 5 max | watts |
| Heater negative with respect to cathode Heater positive with respect to cathode | 200 max 200 200°max 200 | | volts |
| Characteristics: | | | |
| Plate Supply Voltage | 200 200 | | volts |
| Grid-No.2 Supply Voltage | | 125 | volts |
| Grid Voltage | -2 - | | volts |
| Cathode-Bias Resistor | - 220 | | ohms |
| Amplification Factor Plate Resistance (Approx.) | 68 41 12400 9400 | | ohms |

CLASS A1 AMPLIFIER

RCA Receiving Tube Manual

| Transconductance Plate Current. Grid-No.2 Current. Grid-No.1 Voltage (Approx.): | 5500 7 - | 4400 9.2 | $\begin{array}{c}10500\\24\\5,2\end{array}$ | µmhos ma ma |
|--|----------------|--------------------------|---|-------------------|
| For plate current of 10 µa | -5.5 | - | - | volts |
| For plate current of 100 µa | - | -6.5 | -8 | volts |
| Maximum Circuit Values, (Each Unit): | | | | |
| Grid-No.1-Circuit Resistance: For fixed-bias operation | 0 5 | max 0.5 max | 0.05 | |
| For cathode-bias operation | | max 0.5 max max 1 max | | megohm megohm |
| 8 m | | | | |

° The dc component must not exceed 100 volts.


6AT

Related type:

12AT6

TWIN DIODE—HIGH-MU TRIODE

Miniature type used as a combined detector, amplifier, and avc tube in automobile and ac-operated radio receivers. Outline 7B, OUTLINES SECTION. Tube requires miniature



seven-contact socket and may be mounted in any position. For typical operation as resistance-coupled amplifier, refer to RESISTANCE-COUPLED AMPLIFIER SECTION.

| HEATER VOLTAGE (AC/DC) | 6.3 | volts |
|---|-------------|--------|
| HEATER CURRENT. | 0.3 | ampere |
| DIRECT INTERELECTRODE CAPACITANCES: | | |
| Triode Grid to Triode Plate | 2.0 | pf |
| Triode Grid to Cathode and Heater | 2.2 | pf |
| Triode Plate to Cathode and Heater | 0.8 | nf |
| Plate of Diode Unit No.2 to Triode Grid | 0 04 max | pf |
| | o, or mould | pi |

TRIODE UNIT AS CLASS A1 AMPLIFIER

| Maximum Ratings, (Design-Center Values): | | |
|--|-----------|-------|
| PLATE VOLTAGE | . 300 max | volts |
| PLATE DISSIPATION. | . 0.5 max | watt |
| GRID VOLTAGE, Positive-bias value | . 0 max | volts |
| PEAK HEATER-CATHODE VOLTAGE: | | |
| Heater negative with respect to cathode | . 90 max | volts |
| Heater positive with respect to cathode | . 90 max | volts |
| Characteristics: | | |
| Plate Voltage | 250 | volts |
| Grid Voltage | -3 | volts |
| Amplification Factor | 70 | |
| Plate Resistance | 58000 | ohms |
| Transconductance | 1200 | μmhos |
| Plate Current | 1.0 | ma |
| | | |

DIODE UNITS

Maximum Rating, (Design-Center Value):

 PLATE CURRENT (Each Unit)
 1.0 max
 ma

 The two diode plates are placed around a cathode, the sleeve of which is common to the triode unit.
 Each diode plate has its own base pin. For diode operation curves, refer to type 6AV6.



MEDIUM-MU TRIODE— SHARP-CUTOFF PENTODE

Miniature types used as combined oscillator and mixer tubes in television receivers utilizing an intermediate frequency in the order of 40 megacycles per second. Type 6AT8-A has a con-



trolled heater warm-up time for use in receivers employing series-connected heater strings. Outline 8B,OUTLINES SECTION. Except for interelectrode capacitances and basing arrangement, these types are identical with miniature type 6X8. The basing arrangement of the 6AT8 and 6AT8-A is particularly suitable for connection to the coils of certain designs of turret tuners. Type 6AT8 is a DISCONTINUED type listed for reference only.

| HEATER VOLTAGE (AC/DC) | 6.3 | volts |
|--|------|---------|
| HEATER CURRENT | 0.45 | ampere |
| HEATER WARM-UP TIME (Average) for 6AT8-A | 11 | seconds |

= Technical Data =

| DIRECT INTERELECTRODE CAPACITANCES: Triode Unit: | Without External Shield | With External Shield | |
|---|-------------------------------|----------------------------|----|
| Grid to Plate | 1.5 | 1 5 | pf |
| Grid to Cathode and Heater | 2.0 | 2.4 | pf |
| Plate to Cathode and Heater | 0.5 | 1.0 | pf |
| Pentode Unit: | | | - |
| Grid No.1 to Plate | 0.06 max | 0.03 max | pf |
| Grid No.1 to Cathode, Heater, Grid No.2, and Grid No.3 | 4.6 | 4.8 | pf |
| Plate to Cathode, Heater, Grid No.2, and Grid No.3 | 0.9 | 1.6 | pf |
| Pentode Grid No.1 to Triode Plate | 0.05 max | 0.04 max | pf |
| Pentode Plate to Triode Plate | 0.05 max | 0.008 max | pf |
| Heater to Cathode | 6.0 | 6.0† | pf |
| With owtownol shield commented to eath do emperation with d | | | |

With external shield connected to cathode except as noted. With external shield connected to plate.



HALF-WAVE VACUUM RECTIFIER

Glass octal types used as damper tubes in horizontal-deflection circuits of color television receivers and of television receivers utilizing picture tubes having wide-angle deflection. Outline

6AU4GT 6AU4GTA

14F, OUTLINES SECTION. Tubes require octal socket and may be mounted in any position. These types may be supplied with pin No.1 omitted. Socket terminals 1, 2, 4, and 6 should not be used as tie points. It is especially important that these tubes, like other power-handling tubes, be adequately ventilated. Type 6AU4-GT is a DISCONTINUED type listed for reference only.

| HEATER VOLTAGE (AC/DC) | 6.3 | volts |
|---|------|---------|
| HEATER CURRENT | 1.8 | amperes |
| DIRECT INTERELECTRODE CAPACITANCES (Approx.): | | |
| Plate to Heater and Cathode | 8.5 | pf |
| Cathode to Heater and Plate | 11.5 | pf |
| Heater to Cathode | 4.0 | pf |

DAMPER SERVICE

For operation in a 525-line, 30-frame system

| | 6AU4-GT | 6AU4-GTA |
|---|---------------|-----------------|
| | Design-Center | Design-Maximum |
| Maximum Ratings: | | Values |
| PEAK INVERSE PLATE VOLTAGE | . 4500° max | 4500 max volts |
| PEAK PLATE CURRENT. | 1050 max | 1300 max ma |
| DC PLATE CURRENT. | 175 max | 210 max ma |
| PLATE DISSIPATION. | 6 max | 6.5 max watts |
| PEAK HEATER-CATHODE VOLTAGE: | | |
| Heater negative with respect to cathode | 4500°*max | 4500* max volts |
| Heater positive with respect to cathode | 300# max | 300# max volts |
| | | |

Except as noted. The duration of the voltage pulse must not exceed 15 per cent of one horizontal scanning cycle. In a 525-line, 30-frame system, 15 per cent of one horizontal scanning cycle is 10 microseconds.

Absolute Maximum. Under no circumstances should this absolute value be exceeded.

* The dc component must not exceed 900 volts. # The dc component must not exceed 100 volts.



BEAM POWER TUBE

Glass octal type used as horizontal deflection amplifier in low-cost, highefficiency deflection circuits of television receivers employing either transformer coupling or direct coupling to

6AU5GT

the deflecting yoke. Outline 14C, OUTLINES SECTION. Tube requires octal socket and may be mounted in any position.

| HEATER VOLTAGE (AC/DC) | 6.3 | volts |
|--|------|---------|
| HEATER CURRENT | 1.25 | amperes |
| DIRECT INTERELECTRODE CAPACITANCES (Approx.): | | |
| Grid No.1 to Plate | 0.5 | pf |
| Grid No.1 to Cathode, Heater, Grid No.2, and Grid No.3 | 11.3 | pf |
| Plate to Cathode, Heater, Grid No.2, and Grid No.3 | 7.0 | pf |
| TRANSCONDUCTANCE# | 5600 | μmhos |
| MU-FACTOR, Grid No.2 to Grid No.1 [†] | 5.9 | |
| # For plate volts, 115; grid-No.2 volts, 175; grid-No.1 volts, -20. | | |
| † For plate volts, 100; grid-No.2 volts, 100; grid-No.1 volts, -4.5. | | |

HORIZONTAL DEFLECTION AMPLIFIER

For operation in a 525-line, 30-frame system

| Maximum Ratings, (Design-Center Values): | | |
|---|-----------|-------|
| DC PLATE VOLTAGE | 550 max | volts |
| PEAK POSITIVE-PULSE PLATE VOLTAGE* (Absolute Maximum) | 5500° max | volts |
| PEAK NEGATIVE-PULSE PLATE VOLTAGE | -1250 max | volts |
| DC GRID-NO.2 (SCREEN-GRID) VOLTAGE* | 200 max | volts |
| PEAK NEGATIVE-PULSE GRID-NO.1 (CONTROL-GRID) VOLTAGE | -300 max | volts |
| PEAK CATHODE CURRENT. | 400 max | ma |
| AVERAGE CATHODE CURRENT. | 110 max | ma |
| GRID-NO.2 INPUT | 2.5 max | watts |
| PLATE DISSIPATION # | 10 max | watts |
| PEAK HEATER-CATHODE VOLTAGE: | | |
| Heater negative with respect to cathode | 200 max | volts |
| Heater positive with respect to cathode | 200=max | volts |
| BULB TEMPERATURE (At hottest point) | 210 max | °C |
| | | |

Maximum Circuit Value:

* Obtained through a series dropping resistor of sufficient magnitude to limit the grid-No.2 input to the rated maximum value.

††An adequate bias resistor or other means is required to protect the tube in the absence of excitation.
The dc component must not exceed 100 volts.



Miniature types used in compact radio equipment as rf amplifier especially in high-frequency, wide-band applications; also used as limiter tube in FM equipment. Type 6AU6-A has a



6AU6A Related types: 3AU6, 4AU6, 12AU6

6AU6

controlled heater warm-up time for use in applications employing series-connected heater strings. Outline 7B, OUTLINES SECTION. Tubes require miniature sevencontact socket and may be operated in any position. For a discussion of limiters, refer to ELECTRON TUBE APPLICATIONS SECTION. For typical operation as resistance-coupled amplifier, refer to RESISTANCE-COUPLED AM-PLIFIER SECTION. Type 6AU6 is a DISCONTINUED type listed for reference only.

| HEATER VOLTAGE (AC/DC) HEATER CURRENT HEATER WARM-UP TIME (Average) for 6AU6-A | | 6.3 0.3 11 | volts ampere seconds |
|--|-------------------------------|----------------------------|----------------------------|
| DIRECT INTERELECTRODE CAPACITANCES: | Without External Shield | With External Shield | |
| Pentode Connection: | | | |
| Grid No.1 to Plate | 0.0035 max | 0.0035 max | pf |
| Grid No.1 to Cathode, Heater, Grid No.2, Grid No.3, | | | |
| and Internal Shield. | 5.5 | 5.5 | pf |
| Plate to Cathode, Heater, Grid No.2, Grid No.3, and | | | |
| Internal Shield | 5.0 | 5.0 | pf |
| Triode Connection: | 0.0 | | P - |
| Grid No.1 to Plate, Grid No.2, Grid No.3, and | | | |
| | 0.0 | 0.0 | - 6 |
| Internal Shield | 2.6 | 2.6 | pf |
| Grid No.1 to Cathode and Heater | 3.2 | 3.2 | pf |
| Plate, Grid No.2, Grid No.3, and Internal Shield to | | | |
| Cathode and Heater | 1.2 | 8.5 | pf |
| With external shield connected to cathode. | | | |
| † Grid No.2, grid No.3, and internal shield connected to plate. | | | |


| CLASS A1 AMPLIFIER Maximum Ratings, (Design-Maximum Values): | Triode† Connection | Pentode Connection | |
|---|-----------------------|-----------------------|---------|
| PLATE VOLTAGE | 275 max | 330 max | volts |
| GRID-NO.3 (SUPPRESSOR-GRID) VOLTAGE, Positive value | - | 0 max | volts |
| GRID-NO.2 (SCREEN-GRID) VOLTAGE | - | See curve | page 70 |
| GRID-NO.2 SUPPLY VOLTAGE | - | 330 max | volts |
| PLATE DISSIPATION | 3.5 max | 3.5 max | watts |

= Technical Data =


| GRID-NO.2 INPUT: For grid-No.2 voltages up to 165 volts For grid-No.2 voltages between 165 and 330 vo GRID-NO.1 (CONTROL-GRID) VOLTAGE: | lts | - | | | watt ve page 70 |
|--|-------------------------|--------|------------|--------------------|--------------------|
| Positive-bias value PEAK HEATER-CATHODE VOLTAGE: | • • • • • • • • • • • • | 0 | max | 0 max | volts |
| Heater negative with respect to cathode Heater positive with respect to cathode | | | max max | 200 max 200≜max | volts volts |
| Characteristics: | Triode† Connection | Pent | ode Con | rection | |
| Plate Supply Voltage | 250 | 100 | 250 | 250 | volts |
| Grid No.3 | - | Connec | eted to c | athode at so | |
| Grid-No.2 Supply Voltage | - | 100 | 125 | 150 | volts |
| Cathode-Bias Resistor | 330 | 150 | 100 | 68 | ohms |
| Amplification Factor | 36 | _ | _ | - | |
| Plate Resistance (Approx.) | - | 0.5 | 1.5 | 1.0 | megohms |
| Transconductance | 4800 | 3900 | 4500 | 5200 | μmhos |
| Grid-No.1 Voltage for plate current of 10 μ a | - | -4.2 | -5.5 | -6.5 | volts |
| Plate Current | 12.2 | 5.0 | 7.6 | 10.6 | ma |
| Grid-No. 2 Current | - | 2.1 | 3.0 | 4.3 | ma |


† Grid No.2, grid No.3, and internal shield connected to plate.

* The dc component must not exceed 100 volts.

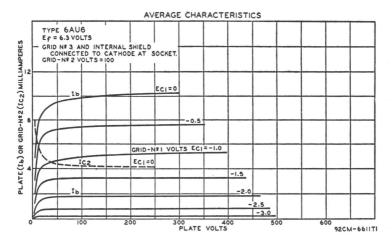

MEDIUM-MU TWIN TRIODE





Miniature type used as phase inverter or amplifier in television receivers employing seriesconnected heater strings. Outline 8B, OUT-LINES SECTION. Heater volts (ac/dc), 6.3 (series), 3.15 (parallel); amperes, 0.3 (series), 0.6 (parallel); warm-up time (average) in parallel arrangement, 11 seconds. Except for heater and heater-cathode ratings, this type is identical with miniature type 12AU7. The 6AU7 is a DISCONTINUED type listed for reference only.

MEDIUM-MU TRIODE— SHARP-CUTOFF PENTODE

Miniature types used in television receiver applications. Tubes have controlled heater warm-up time for use in series-heater strings. Pentode unit is used as video amplifier, if amplifier, 6AU8 6AU8A Related type: 8AU8

6AU7

agc amplifier. Triode unit is used in sync-amplifier, sync-separator, sync-clipper, and phase-inverter circuits. Outline 8D, OUTLINES SECTION. Tubes require nine-contact socket and may be mounted in any position. Type 6AU8 is a DIS-CONTINUED type listed for reference only.

RCA Receiving Tube Manual =

| HEATER VOLTAGE (AC/DC) HEATER CURRENT. HEATER WARM-UP TIME (Average). DIRECT INTERELECTRODE CAPACITANCES: Triode Unit: | $\begin{array}{c} 6.3\\ 0.6\\ 11 \end{array}$ | volts ampere seconds |
|--|--|----------------------------|
| Grid to Plate. Grid to Cathode and Heater. Plate to Cathode and Heater. | $\begin{array}{c} 2.2\\ 2.6\\ 0.34\end{array}$ | pf pf pf |
| Pentode Unit: Grid No.1 to Plate Grid No.1 to Cathode, Heater, Grid No.2, Grid No.3, and Internal Shield Plate to Cathode, Heater, Grid No.2, Grid No.3, and Internal Shield Triode Grid to Pentode Plate. Pentode Grid No.1 to Triode Plate. Pentode Plate to Triode Plate. | 0.06 7.5 3.4 0.022 max 0.006 max 0.12 max | pf pf pf pf pf |

| Maximum | Ratings, | (Design-Maximum | Va | lues). | : |
|---------|----------|-----------------|----|--------|---|
|---------|----------|-----------------|----|--------|---|

| | | x 01110 010 C 1111 | |
|---|---------|--------------------|---------|
| PLATE VOLTAGE | 330 max | 330 max | volts |
| GRID-NO.2 (SCREEN-GRID) SUPPLY VOLTAGE | - | 330 max | volts |
| GRID-NO.2 VOLTAGE. | - | See curve | page 70 |
| GRID-NO.1 (CONTROL-GRID) VOLTAGE, Positive-bias value | 0 max | 0 max | volts |
| PLATE DISSIPATION. | 2.8 max | 3.3 max | watts |
| GRID-NO.2 INPUT | | | |
| For grid-No.2 voltages up to 165 volts | - | 1 max | watt |
| For grid-No.2 voltages between 165 and 330 volts | - | See curve | page 70 |
| PEAK HEATER-CATHODE VOLTAGE: | | | |
| Heater negative with respect to cathode | 200 max | 200 max | volts |
| Heater positive with respect to cathode | 200 max | 200 max | volts |
| | | | |

| Characteristics: | Triode Unit | Pentode Unit | |
|---|-------------|--------------|-------|
| Plate Supply Voltage | 150 | 200 | volts |
| Grid-No.2 Supply Voltage | - | 125 | volts |
| Cathode-Bias Resistor | 150 | 82 | ohms |
| Amplification Factor | 43 | - | |
| Plate Resistance (Approx.) | 8100 | 100000 | ohms |
| Transconductance | 5300 | 8000 | µmhos |
| Grid-No.1 Voltage (Approx.) for plate current of 100 µa | -6.5 | -7.5 | volts |
| Plate Current. | 9.5 | 17 | ma |
| Grid-No.2 Current | - | 3.4 | ma |
| | | | |

Maximum Circuit Values:

| Grid-No.1-Circuit Resistance: | |
|-------------------------------|---------|
| For fixed-bias operation | 0.5 max |
| For cathode-bias operation | 1.0 max |
| | |

The dc component must not exceed 100 volts.

6AV5GA 6AV5GT

Related types: 12AV5GA, 25AV5GA

BEAM POWER TUBE

Glass octal types used as horizontal deflection amplifiers in television receivers employing either transformer coupling or direct coupling to the deflecting yoke. 6AV5-GA



0.25 max megohm

1.0 max megohm

Triode Unit Pentode Unit

Outline 19B, 6AV5-GT Outline 14C, OUTLINES SECTION. Tubes require octal socket and may be mounted in any position. Type 6AV5-GT is a DISCONTINUED type listed for reference only.

| HEATER VOLTAGE (AC/DC) HEATER CURRENT. TRANSCONDUCTANCE*. MU FACTOR, Grid No.2 to Grid No.1** | $6.3 \\ 1.2 \\ 5900 \\ 4.3$ | volts amperes µmhos |
|--|-----------------------------|---------------------------|
| * Plate volts, 250; grid-No.2 volts, 150; grid-No.1 volts, -22.5. | | |

** Triode connected; plate and grid-No.2 volts, 150; grid-No.1 volts, -22.5.

HORIZONTAL DEFLECTION AMPLIFIER

For operation in a 525-line, 30-frame system

Maximum Ratings, (Design-Center Values):

| DC PLATE VOLTAGE | 550 max | volts |
|---|-----------|-------|
| PEAK POSITIVE-PULSE PLATE VOLTAGE [†] (Absolute Maximum) | 5500° max | volts |
| PEAK NEGATIVE-PULSE PLATE VOLTAGE | -1250 max | volts |
| DC GRID-NO.2 (SCREEN-GRID) VOLTAGE | 175 max | volts |
| PEAK NEGATIVE-PULSE GRID-NO.1 (CONTROL-GRID) VOLTAGE | -300 max | volts |
| | | |

| PEAK CATHODE CURRENT | 400 max | ma |
|--|-------------------------------|----------------------|
| AVERAGE CATHODE CURRENT. | 110 max | ma |
| GRID-NO.2 INPUT. | 2.5 max | watts |
| PLATE DISSIPATION ^{††} | 11 max | watts |
| PEAK HEATER-CATHODE VOLTAGE: Heater negative with respect to cathode. Heater positive with respect to cathode. BULB TEMPERATURE (At hottest point). | 200 max 200∎max 210 max | volts volts °C |

— Technical Data —

Maximum Circuit Value:

5)PD2

6 PDI

7

H(3

Grid-No.1 Circuit Resistance. 0.47 max megohm † The duration of the voltage pulse must not exceed 15 per cent of one horizontal scanning cycle. In a 525-line, 30-frame system, 15 per cent of one horizontal scanning cycle is 10 microseconds. ° Under no circumstances should this absolute value be exceeded.

†† An adequate bias resistor or other means is required to protect the tube in the absence of excitation.
The dc component must not exceed 100 volts.



Miniature type used as combined detector, amplifier, and avc tube in automobile and ac-operated radio receivers. The 6AV6 may be substituted directly for the 6AT6 in applications

6**AV**6 **Related types:**

3AV6, 4AV6, 12AV6


| where the | higher | amplification | of | the | 6AV6 | is | advantageous. |
|-----------|--------|---------------|----|-----|------|----|---------------|
|-----------|--------|---------------|----|-----|------|----|---------------|

| HEATER VOLTAGE (AC/DC) | | 6.3 | volts |
|--|----------|----------|--------|
| HEATER CURRENT. | | 0.3 | ampere |
| | Without | With | |
| | External | External | |
| DIRECT INTERELECTRODE CAPACITANCES: | Shield | Shield | |
| Triode Grid to Triode Plate | 2.0 | 2.0 | pf |
| Triode Grid to Cathode and Heater | 2.2 | 2.2 | pf |
| Triode Plate to Cathode and Heater | 0.8 | 1.2 | pf |
| Plate of Diode Unit No.2 to Triode Grid | 0.04 max | 0.04 max | pf |
| With external shield connected to cathode. | | | |

TRIODE UNIT AS CLASS A1 AMPLIFIER

| Maximum Rating, (Design-Maximum Value): PLATE VOLTAGE. GRID VOLTAGE, Positive-bias value. PLATE DISSIPATION PBAK HEATER-CATHODE VOLTAGE: Heater negative with respect to cathode. Heater positive with respect to cathode. | 330 max 0 max 0.55 max 200 max 200*max | volts volts watt volts volts |
|--|--|--|
| Characteristics: 100 Plate Voltage 100 Grid Voltage -1 Amplification Factor. 100 | $250 \\ -2 \\ 100$ | volts volts |

AVERAGE PLATE CHARACTERISTICS

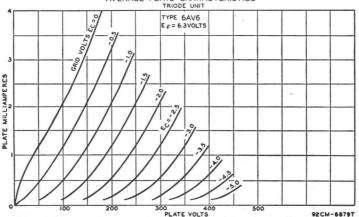

| Plate Resistance. Transconductance. Plate Current. | 80000 1250 0.50 | 62500 1600 1.2 | ohms µmhos ma |
|--|-----------------------|----------------------|---------------------|
| DIODE UNITS | | | |
| Maximum Rating, (Design-Maximum Value): | | | |
| PLATE CURRENT (Each Unit) | | 1.0 max | ma |

RCA Receiving Tube Manual =

▲ The dc component must not exceed 100 volts.

The two diode plates are placed around a cathode, the sleeve of which is common to the triode unit. Each diode plate has its own base pin. Diode biasing of the triode unit is not recommended.

INSTALLATION AND APPLICATION

Type 6AV6 requires miniature sevencontact socket and may be mounted in any position.Outline7B,OUTLINESSECTION.

The triode unit of the 6AV6 is recommended for use only in resistance-coupled circuits. Refer to the RESISTANCE-COU-PLED AMPLIFIER SECTION for typical operating conditions.


Grid bias for the triode unit of the 6AV6 may be obtained from a fixed source, such as a fixed-voltage tap on the dc power supply, or from a cathode-bias resistor. It should not be obtained by the diode-biasing method because of the probability of platecurrent cutoff, even with relatively small signal voltages applied to the diode circuit.

64W8

6AW8A

Related type:

8AW8A

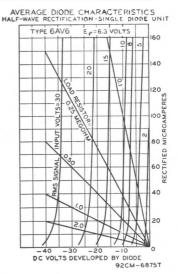

5

G3P,KP

8


Pp

G2D

GIP

HIGH-MU TRIODE— SHARP-CUTOFF PENTODE

Miniature types used in a wide variety of applications in television receivers. These types have a controlled heater warm-up time for use in receivers employing series-connected





| HEATER VOLTAGE (AC/DC) | | $\begin{smallmatrix} 6.3\\0.6\\11 \end{smallmatrix}$ | volts ampere seconds |
|--|---------------------|--|----------------------------|
| DIRECT INTERELECTRODE CAPACITANCES: | Without External | With External | |
| Triode Unit: | Shield | Shield | |
| Grid to Plate | 2.2 | 2.2 | pf |
| Grid to Cathode, Pentode Cathode, Pentode Grid No.3, Internal Shield, and Heater | 3.2 | 3.4 | pf |
| Plate to Cathode, Pentode Cathode, Pentode Grid No.3, Internal Shield, and Heater | 1.8 | 3.0 | pf |
| Pentode Unit: Grid No.1 to Plate | 0.06 max | 0.05 max | pf |
| Grid No.1 to Cathode, Heater, Grid No.2, Grid No.3, and | 0.00 max | 0.00 11022 | Pr |
| Internal Shield | 10 | 10 | pf |
| Plate to Cathode, Heater, Grid No.2, Grid No.3, and In- | | | |
| ternal Shield | 3.6 | 4.5 | pf |
| Pentode Grid No.1 to Triode Plate | 0.008 max | 0.005 max | pf |
| Pentode Plate to Triode Plate | 0.15 max | 0.025 max | pf |
| rentode Flate to Triode Plate | 0.10 max | 0.040 max | pr |
| | | | |

With external shield connected to pins 4 and 5.

160

— Technical Data =

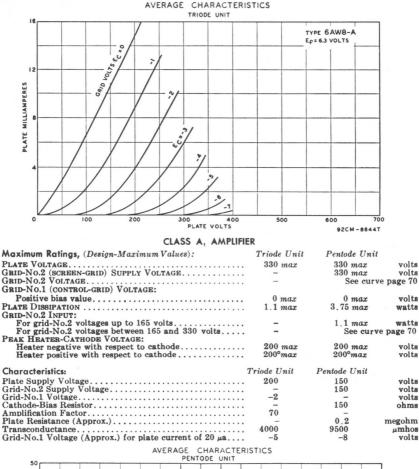

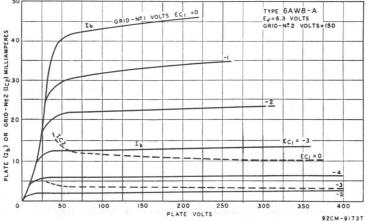

161

| Plate Current Grid-No.2 Current. | 4 | 15 3.5 | ma ma |
|--|---------|-----------|----------|
| Maximum Circuit Values: | | | |
| Grid-No.1-Circuit Resistance: | | | |
| For fixed-bias operation | 0.5 max | 0.25 max | megohm |
| For cathode-bias operation | 1.0 max | 1.0 max | megohm |
| "The dc component must not exceed 100 volts. | | | |

HALF-WAVE VACUUM RECTIFIER



Duodecar type used as damper tube in horizontal-deflection circuits of television receivers. Outline 12C, OUTLINES SECTION. Tube requires 12-contact socket and may be



mounted in any position. Socket terminals 5, 6, 8, and 9 should not be used as tie points. It is especially important that this tube, like other power-handling tubes, be adequately ventilated. Heater volts (ac/dc), 6.3; amperes, 1.2.

DAMPER SERVICE

For operation in a 525-line, 30-frame system

| Maximum Ratings, (Design-Maximum Values): | | |
|---|--------------------|-------|
| PEAK INVERSE PLATE VOLTAGE ^o | 5000 max | volts |
| PEAK PLATE CURRENT. | 1000 max | ma |
| DC PLATE CURRENT | 165 max | ma |
| PLATE DISSIPATION | 5.3 max | watts |
| PEAK HEATER-CATHODE VOLTAGE: | | |
| Heater negative with respect to cathode | 5000 max | volts |
| Heater positive with respect to cathode | $300^{\bullet}max$ | volts |
| | | |

Characteristics, Instantaneous Value:

 Tube Voltage Drop for plate current of 250 ma
 32
 volts

 ° The duration of the voltage pulse must not exceed 15 per cent of one horizontal scanning cycle. In a 525-line, 30-frame system, 15 per cent of one horizontal scanning cycle is 10 microseconds.
 10 microseconds.

The dc component must not exceed 900 volts.

• The dc component must not exceed 100 volts.



25AX4GT

HALF-WAVE VACUUM RECTIFIER

Glass octal types used as damper tube in horizontal deflection circuits of television receivers. Outline 14C, OUT-LINES SECTION. May be supplied with pin No. 1 omitted. Tubes require



octal socket and may be operated in any position. Socket terminals 1, 2, 4, and 6 should not be used as tie points. It is especially important that these tubes, like other power-handling tubes, be adequately ventilated.

| Heater Voltage (ac/dc) | 6.3 1.2 | volts |
|--|---------------|----------|
| DIRECT INTERELECTRODE CAPACITANCES (Approx.): Cathode to Plate and Heater. Plate to Cathode and Heater. Heater to Cathode | 8.5 5 4 | pf pf |

DAMPER SERVICE

For operation in a 525-line, 30-frame system

| Maximum Ratings, (Design-Maximum Values): | 6AX4-GT | 6AX4-GTB | |
|---|---|----------------------------------|-------|
| PEAK INVERSE PLATE VOLTAGE | 4400 max | 5000 max | volts |
| PEAK PLATE CURRENT. | 825 max | 1000 max | ma |
| DC PLATE CURRENT. | 137 max | 165 max | ma |
| PLATE DISSIPATION PEAK HEATER-CATHODE VOLTAGE: | 5 max | 5.3 max | watts |
| Heater negative with respect to cathode | 4400• <i>max</i> 300 ⁻ <i>max</i> | 5000•max 300 ⁻ max | volts |

Technical Data

Characteristics, Instantaneous Test Condition:

Tube Voltage Drop for plate current of 250 ma. 32 32 volts • The duration of the voltage pulse must not exceed 15 per cent of one horizontal scanning cycle. In a 525-line, 30-frame system, 15 per cent of one horizontal scanning cycle is 10 microseconds.

• The dc component must not exceed 900 volts.

^DThe dc component must not exceed 100 volts.

5

R

PD2(3

H2

FULL-WAVE VACUUM RECTIFIER


Glass octal type used in power supply of radio equipment having moderate dc requirements. Outline 14C, OUTLINES SECTION. This type may be supplied with pin No.1 omitted.

6AX5GT

Tube requires octal socket and may be mounted in any position. It is especially important that this tube, like other power-handling tubes, be adequately ventilated. Heater volts (ac), 6.3; amperes, 1.2.

FULL-WAVE RECTIFIER

| Maximum Ratings, (Design-Center Values): | | | |
|--|-----|---------------------|-----------------------------------|
| PEAK INVERSE PLATE VOLTAGE. PEAK PLATE CURRENT (Per Plate). HOT-SWITCHING TRANSIENT PLATE CURRENT | | 1250 max 375 max | volts ma |
| For duration of 0.2 second maximum AC PLATE SUPPLY VOLTAGE (Per Plate, rms) DC OUTPUT CURRENT (Per Plate, rms) PEAK HEATER-CATHODE VOLTAGE: | | | amperes ing Chart ing Chart |
| Heater negative with respect to cathode | | 450 max 450 max | volts volts |
| Typical Operation with Capacitor Input to Filter: | | | |
| AC Plate-to-Plate Supply Voltage (rms) | 700 | 900 | volts |
| Filter Input Capacitor* | 10 | 10 | μf |
| Effective Plate-Supply Impedance Per Plate | 50 | 105 | ohms |
| At helf-load current of (62.5 ma | 395 | - | volts |
| (40 ma | - | 54 0 | volts |
| At full-load current of $\begin{cases} 125 \text{ ma} \\ 80 \text{ ma} \end{cases}$ | 350 | - | volts |
| (ov ma | - | 490 | volts |
| Voltage Regulation (Approx.): Half-load to full-load current | 45 | 50 | volts |
| | | | |
| Typical Operation with Choke Input to Filter: | | | |
| AC Plate-to-Plate Supply Voltage (rms) | 700 | 900 | volts |
| Filter Input Choke | 10# | 10 # # | henries |
| DC Output Voltage at Input to Filter (Approx.): | " | | |
| (75 mg | 270 | | volts |
| At half-load current of 62.5 ma | - | 365 | volts |
| At full-load current of { 150 ma | 250 | | volts |
| At full-load current of { 125 ma | - | 350 | volts |



RATING CHART

= RCA Receiving Tube Manual =


* Higher values of capacitance than indicated may be used but the effective plate-supply impedance may have to be increased to prevent exceeding the maximum rating for hot-switching transient plate current.

This value is adequate to maintain optimum regulation provided the load current is not less than 30 ma. For load currents less than 30 ma, a larger value of inductance is required for optimum regulation.

This value is adequate to maintain optimum regulation provided the load current is not less than 35 ma. For load currents less than 35 ma, a larger value of inductance is required for optimum regulation.

MEDIUM-MU TRIODE— SEMIREMOTE-CUTOFF PENTODE

Miniature type used in televisionreceiver applications; the pentode unit is used as a video amplifier; the triode unit is used as a sync separator. Outline 8B, OUTLINES SECTION.Tube



requires miniature nine-contact socket and may be mounted in any position.

| Heater Voltage (ac/dc) | 6.3 0.45 | volts ampere |
|---|-------------|-----------------|
| DIRECT INTERELECTRODE CAPACITANCES:° | | |
| Triode Unit: | | |
| Grid to Plate | 1.8 | pf |
| Grid to Cathode and Heater | 2.5 | pf |
| Plate to Cathode and Heater | 1 | pf |
| Pentode Unit: | | |
| Grid No.1 to Plate Grid No.1 to Cathode, Heater, Grid No.2, Grid No.3, and | 0.006 max | pf |
| Internal Shield | 5 | pf |
| Plate to Cathode, Heater, Grid No.2, Grid No.3 and Internal Shield . | 3.5 | pf |
| Heater to Cathode (Each unit) | 3.5• | pf |

CLASS A1 AMPLIFIER

| Maximum Ratings, (Design-Center Values): | Triode Unit | Pentode Un | ait |
|---|-----------------|------------|-----------|
| PLATE VOLTAGE | 300 max | 300 max | volts |
| GRID-NO.2 SUPPLY VOLTAGE | - | 300 max | volts |
| GRID-NO.2 (SCREEN-GRID) VOLTAGE. | - | See curv | e page 70 |
| GRID-NO.1 (CONTROL-GRID) VOLTAGE. | 0 max | 0 max | volts |
| PLATE DISSIPATION | 2.7 max | 2.8 max | watts |
| GRID-NO.2 INPUT | | | |
| For grid-No.2 voltages up to 150 volts | - | 0.5 max | watt |
| For grid-No.2 voltages between 150 and 300 volts | - | See curv | e page 70 |
| PEAK HEATER-CATHODE VOLTAGE: | | | 1 0 |
| Heater negative with respect to cathode | 90 max | 90 max | volts |
| Heater positive with respect to cathode | 90 max | 90 max | volts |
| | | | |
| Characteristics: | | | |
| Plate Supply Voltage | 150 | 250 | volts |
| Grid-No.2 Supply Voltage. | - | 110 | volts |
| Cathode-Bias Resistor | 56 | 120 | ohms |
| Amplification Factor | 40 | - | |
| Plate Resistance (Approx.) | 0.005 | 0.4 | megohm |
| Transconductance | 8500 | 4800 | µmhos |
| Grid-No.1 Voltage (Approx.) for plate current of 10µa | -12 | -12 | volts |
| Plate Current | 18 | 10 | ma |
| Grid-No.2 Current. | - | 3.5 | ma |
| | | | |
| Maximum Circuit Values: | | | |
| Grid-No.1 Circuit Resistance: | | | |
| For fixed-bias operation | 0.1 max | 0,1 max | megohm |
| For cathode-bias operation | 0.5 max | 0.5 max | megohm |
| ° With external shield connected to cathode of unit under test ex | xcept as noted. | | |

• With external shield connected to ground.

6AX8



HALF-WAVE VACUUM RECTIFIER

Novar type used as damper tube in horizontal deflection circuits of blackand-white television receivers. Outline 17B, OUTLINES SECTION. Tube reguires novar socket and may be oper-

6AY3 Related types: 12AY3, 17AY3

ated in any position. Socket terminals 1, 3, 6, and 8 should not be used as tie points. It is especially important that this tube, like other power-handling tubes, be adequately ventilated.

| Heater Voltage (ac/dc) | 6.3 1.2 | volts amperes |
|--|-------------------|------------------|
| DIRECT INTERELECTRODE CAPACITANCES (Approx.): Plate to Cathode and Heater Cathode to Plate and Heater Heater to Cathode | 6.5 9.0 2.8 | pf pf pf |


DAMPER SERVICE

For operation in a 525-line, 30-frame system

| Maximum Ratings, (Design-Maximum Values): | | |
|--|---|--------|
| Peak Inverse Plate Voltage [®] | 5000 max | volts |
| PEAK PLATE CURRENT | 1100 max | ma |
| DC PLATE CURRENT. | 175 max | ma |
| PLATE DISSIPATION | 6.5 max | watts |
| PEAK HEATER-CATHODE VOLTAGE: | 100000000000000000000000000000000000000 | |
| Heater negative with respect to cathode | $5000 \bullet max$ | volts |
| Heater positive with respect to cathode | 300 $^{\Box}max$ | volts |
| The duration of the voltage pulse must not exceed 15 per cent of one herizonta | l scanning ev | de Ine |

The duration of the voltage pulse must not exceed 15 per cent of one horizontal scanning cycle. In a 525-line, 30-frame system, 15 per cent of one horizontal scanning cycle is 10 microseconds.
 The dc component must not exceed 900 volts.

^D The dc component must not exceed 100 volts.



MEDIUM-MU TRIODE— SHARP-CUTOFF PENTODE

Miniature type used in a wide variety of applications in television receivers. The pentode unit is used as an if amplifier, video amplifier, agc amplifier, or reactance tube. The tri-

6AZ8

ode unit is used in low-frequency oscillator, sync-separator, sync-clipper, and phasesplitter circuit. Outline 8B, OUTLINES SECTION. Tube requires miniature nine-contact socket and may be mounted in any position.

| HEATER VOLTAGE (AC/DC) | | $\begin{smallmatrix} & 6.3 \\ 0.45 \end{smallmatrix}$ | volts ampere |
|--|---------------------------------|---|-----------------|
| Triode Unit: | | | |
| Grid to Plate | | 1.7 | pf |
| Grid to Cathode, Heater, Pentode Grid No.3, and Interna | al Shield | 2 | pf |
| Plate to Cathode, Heater, Pentode Grid No.3, and Intern | | 1.7 | pf |
| Pentode Unit: | ui biileita | | pr |
| Grid No.1 to Plate | | 0.02 max | pf |
| Grid No.1 to Cathode, Heater, Grid No.2, Grid No.3, and | Internal Shield | 6.5 | pf |
| Plate to Cathode, Heater, Grid No.2, Grid No.3, and Inte | | 2.2 | pf |
| Triode Grid to Pentode Plate | | 0.027 max | pf |
| Pentode Grid No.1 to Triode Plate | | 0.020 max | pf |
| Pentode Plate to Triode Plate | · · · · · · · · · · · · · · · · | 0.045 max | pf |
| CLASS A1 AMPLIFIE | R | | |
| Maximum Ratings, (Design-Center Values): | Triode Unit | Pentode Unit | |
| PLATE VOLTAGE | 300 max | 300 max | volts |
| GRID-NO.2 (SCREEN-GRID) SUPPLY VOLTAGE | - | 300 max | volts |
| GRID-NO.2 VOLTAGE. | | See curve | page 70 |
| GRID-NO.1 (CONTROL-GRID) VOLTAGE, Positive-bias value | 0 max | 0 max | volts |
| PLATE DISSIPATION. | 2.6 max | 2 max | watts |
| GRID-NO.2 INPUT: | | | |
| For grid-No.2 voltages up to 150 volts | - | 0.5 max | watt |
| For grid-No.2 voltages between 150 and 300 volts PEAK HEATER-CATHODE VOLTAGE: | - | See curve | page 70 |
| Heater negative with respect to cathode | 200 max | | volts |
| Heater positive with respect to cathode | 200 max | A | volts |

= RCA Receiving Tube Manual =

Characteristics:

| Plate Supply Voltage | 200 | 200 | volts |
|---|------|--------|-------|
| Grid-No.2 Voltage | - | 150 | volts |
| Grid-No.1 Voltage | -6 | - | volts |
| Cathode-Bias Resistor | - | 180 | ohms |
| Amplification Factor | 19 | - | |
| Plate Resistance (Approx.) | 5750 | 300000 | ohms |
| Transconductance | 3300 | 6000 | μmhos |
| Grid-No.1 Voltage (Approx.) for plate current of 10 µa | -19 | - | volts |
| Grid-No.1 Voltage (Approx.) for transconductance of 100 | | | |
| µmhos | - | -12.5 | volts |
| Plate Current | 13 | 9.5 | ma |
| Grid-No.2 Current | - | 3 | ma |
| Maximum Circuit Values: | | | |
| Grid-No.1-Circuit Resistance:* | | | |

| For fixed-bias operation | $\begin{array}{c} 0.5 \ max \\ 1.0 \ max \end{array}$ | 0.25 max | megohm |
|----------------------------|---|----------|--------|
| For cathode-bias operation | | 1.0 max | megohm |
| | | | |

The dc component must not exceed 100 volts.


▲ The heater-cathode voltage should not exceed the value of the operating cathode bias. If the heatercathode voltage exceeds the operating cathode bias value, grid No.3 will be made negative with respect to cathode, and thus possibly cause a change in tube characteristics.

* If either unit is operating at maximum rated conditions, grid-No.1-circuit resistance for both units should not exceed the stated values.

POWER TRIODE


6**B**4**G**

Glass octal type used in output stage of radio receivers and amplifiers. Maximum dimensions: over-all length, 5-5/16 inches; seated height, 4-3/4 inches; diameter, 2-1/16 inches. Tube requires octal socket. For typical operation as a single-tube class A amplifier, refer to type 2A3. Filament volts (ac/dc), 6.3; amperes, 1.0. Maximum ratings as push-pull class AB1 amplifier: plate volts, 325; plate dissipation, 15 watts. Type 6B4-G is a DISCONTINUED type listed for reference only.



DIRECT-COUPLED POWER TRIODE

Glass type used as class A_1 power amplifier. One triode, the driver, is directly connected within the tube to the second, or output, triode. Outline 27, OUTLINES SECTION. Tube requires six-contact socket. Heater volts (ac/dc), 6.3; amperes, 0.8. Characteristics of input and output triodes as class A_1 amplifier follow. Input triode: plate volts, 300 max; grid volts, 0; plate



ma., 8. Output triode: plate volts, 300 max; plate ma., 45; plate resistance, 24000 ohms; load resistance, 7000 ohms; output watts, 4. This is a DISCONTINUED type listed for reference only.

TWIN-DIODE—HIGH-MU TRIODE

Glass octal type used as combined detector, amplifier, and ave tube. Outline 23, OUT-LINES SECTION. Tube requires octal socket. Heater volts (ac/dc), 6.3; amperes, 0.3. Within its triode maximum plate-voltage rating of 250 volts, this type is similar electrically to type 6SQ7 and curves under that type apply to the 6B6-G. This is a DISCONTINUED type listed for reference only.

TWIN-DIODE-REMOTE-CUTOFF PENTODE

Glass types used as combined detector, amplifier, and ave tubes. Outline 24B, OUTLINES SECTION. These types fit the small seven-contact (0.75-inch, pin-circle diameter) socket. Except for interelectrode capacitances, the electrical characteristics of the 6B7 are identical with those of type 6B8-G. Type 6B7S has the external shield connected to the cathode. In






general, its electrical characteristics are similar to those of the 6B7, but the two types are usually not directly interchangeable. These are DISCONTINUED types listed for reference only.

6**B**5

6**B**6**G**

6**B**7

6**B**7S




TWIN DIODE— SEMIREMOTE-CUTOFF PENTODE

Metal type 6B8 and glass octal type 6B8-G are used as combined detector, amplifier, and ave tubes. Outlines 3 and 23, respectively, OUTLINES SECTION. Type 6B8 is used principally for renewal purposes; 6B8-G is a DISCONTINUED type listed for reference only. Tubes require octal socket. Heater volts (ac/dc), 6.3; amperes, 0.3. Maximum ratings of pentode unit as class A₁ amplifier: plate volts,

6886

300 max; grid-No.2 volts, 125 max; grid-No.2 supply volts, 300 max; grid-No.1 volts, positive-bias value, 0 max; plate dissipation, 3.0 max watts (6B8), 2.25 max watts (6B8-G); grid-No.2 input, 0.3 max



TWIN DIODE— MEDIUM-MU TWIN TRIODE

Duodecar type used in television receivers; diode units are used in horizontal-phase-detector circuits, and triode units are used in horizontal-oscillator circuits.Outline 12A, OUTLINES

6B10 Related type: 8B10

SECTION. Tube requires duodecar twelve-contact socket and may be mounted in any position. Heater volts (ac/dc), 6.3; amperes, 0.6; warm-up time (average), 11 seconds.

TRIODE UNITS AS CLASS A1 AMPLIFIER

| Values | are | for | each | unit |
|--------|-----|-----|------|------|
|--------|-----|-----|------|------|

| Maximum Ratings, (Design-Maximum Values): | | |
|--|-------------------|--------|
| PLATE VOLTAGE. | 330 max | volts |
| DC CATHODE CURRENT | 20 max | ma |
| PLATE DISSIPATION | 3 max | watts |
| PEAK HEATER-CATHODE VOLTAGE: | | |
| Heater negative with respect to cathode | 200 max | volts |
| Heater positive with respect to cathode | $200^{\circ}max$ | volts |
| Characteristics: | | |
| Plate Voltage | 250 | volts |
| Grid Voltage | -8 | volts |
| Amplification Factor | 18 | VOIUS |
| Plate Resistance (Approx.) | 7200 | ohms |
| Transconductance | 2500 | µmhos |
| Plate Current. | 10 | ma |
| Grid Voltage (Approx.) for plate current of 50 μ a | -20 | volts |
| | 20 | Voits |
| Maximum Circuit Values: | | |
| Grid-Circuit Resistance: | | |
| For fixed-bias operation | 0.25 max | megohm |
| For cathode-bias operation | 1 max | megohm |
| DIODE UNITS (Each Unit) | | |
| Maximum Rating, (Design-Maximum Value): | | |
| PLATE CURRENT | 5 max | ma |
| PEAK HEATER-CATHODE VOLTAGE: | 0 11/02 | |
| Heater negative with respect to cathode | 200 max | volts |
| Heater positive with respect to cathode | $200^{\circ} max$ | volts |
| | 200 1100 | VOICS |
| Characteristics, Instantaneous Value: | - | |
| Tube Voltage Drop for plate current of 20 ma | 5 | volts |
| ° The dc component must not exceed 100 volts. | | |



HALF-WAVE VACUUM RECTIFIER

Novar type used as damper tube in horizontal-deflection circuits of television receivers. Outline 10B, OUT-LINES SECTION. Tube requires novar nine-contact socket and may be

6BA3

mounted in any position. Socket terminals 1, 3, 6, and 8 should not be used as tie

points. It is especially important that this tube, like other power-handling tubes, be adequately ventilated.

| HEATER VOLTAGE (AC /DC) | 6.3 1.2 | volts |
|--|---|----------------|
| DIRECT INTERELECTRODE CAPACITANCES, (Approx.): Plate to Cathode and Heater. Cathode to Plate and Heater. Heater to Cathode. | $\begin{array}{r} 4.4\\6\\1.8\end{array}$ | pf pf pf |

DAMPER SERVICE

For operation in a 525-line, 30-frame system

| Maximum Ratings, (Design-Maximum Values): | | |
|---|--------------------|-------|
| PEAK INVERSE PLATE VOLTAGE | 5000 = max | volts |
| PEAK PLATE CURRENT | 1000 max | ma |
| DC PLATE CURRENT | 165 max | ma |
| PLATE DISSIPATION | 5.3 max | watts |
| PEAK HEATER-CATHODE VOLTAGE: | | |
| Heater negative with respect to cathode | $5000 \bullet max$ | volts |
| Heater positive with respect to cathode | $300^{\Box}max$ | volts |


The duration of the voltage pulse must not exceed 15 per cent of one horizontal scanning cycle. In a 525-line, 30-frame system, 15 per cent of one horizontal scanning cycle is 10 microseconds.

• The dc component must not exceed 900 volts.

^D The dc component must not exceed 100 volts.

REMOTE-CUTOFF PENTODE

6BA6 Related types: 3BA6, 12BA6 Miniature type used as rf amplifier in standard broadcast and FM receivers, as well as in wide-band, highfrequency applications. This type is similar in performance to metal type



6SG7. The low value of grid-No.1-to-plate capacitance minimizes regenerative effects, while the high transconductance makes possible high signal-to-noise ratio.

| HEATER VOLTAGE (AC/DC) HEATER CURRENT | | | volts |
|--|-------------------------------|----------------------------|-------|
| Direct Interelectrode Capacitances: | Without External Shield | With External Shield | · |
| Grid No.1 to Plate | 0.0035 max | 0.0035 max | pf |
| and Internal Shield Plate to Cathode, Heater, Grid No.2, Grid No.3, and | 5.5 | 5.5 | pf |
| Internal Shield | 5.0 | 5.5 | pf |

With external shield connected to cathode.

Maximum Ratings, (Design-Maximum Values):

CLASS A1 AMPLIFIER


| PLATE VOLTAGE GRID-NO.3 (SUPPRESSOR-GRID) VOLTAGE, Positive value | 330 max volts 0 max volts |
|--|------------------------------|
| GRID-NO.2 (SCREEN-GRID) VOLTAGE | See curve page 70 |
| GRID-NO.2 SUPPLY VOLTAGE. | 330 max volts |
| PLATE DISSIPATION | 3.4 max watts |
| GRID-NO.2 INPUT: | |
| For grid-No.2 voltages up to 165 volts | 0.7 max watt |
| For grid-No.2 voltages between 165 and 330 volts | See curve page 70 |
| GRID-NO.1 (CONTROL-GRID) VOLTAGE: | |
| Negative bias value | -55 max volts |
| Positive bias value | 0 max volts |
| PEAK HEATER-CATHODE VOLTAGE: | |
| Heater negative with respect to cathode | 200 max volts |
| Heater positive with respect to cathode | 200 [▲] max volts |
| ▲ The dc component must not exceed 100 volts. | |
| Characteristics: | |
| | |

| Plate Supply Voltage | 100 | 250 | volts |
|--|-------|----------------|--------------|
| Grid No.3 and Internal Shield | Conne | ected to catho | de at socket |
| Grid-No.2 Supply Voltage | 100 | 100 | volts |
| Cathode-Bias Resistor | 68 | 68 | ohms |
| Plate Resistance (Approx.) | 0.25 | 1.0 | megohm |
| Transconductance | 4300 | 4400 | µmhos |
| Grid-No.1 Voltage (Approx.) for transconductance of 40 µmhos | -20 | -20 | volts |
| Plate Current | 10.8 | 11 | ma |
| Grid-No.2 Current. | 4.4 | 4.2 | ma |

INSTALLATION AND APPLICATION

Type 6BA6 requires miniature seven-contact socket and may be mounted in any position. Outline 7B, OUTLINES SECTION.

Control-grid bias variation will be found effective in changing the volume of the receiver. In order to obtain adequate volume control, an available grid-No.1bias voltage of approximately 50 volts will be required. The exact value will depend upon the circuit design and operating conditions. This voltage may be obtained, depending on the receiver requirements, from a potentiometer across a fixed supply voltage, from a variable cathode-bias resistor, from the avc system, or from a combination of these methods.

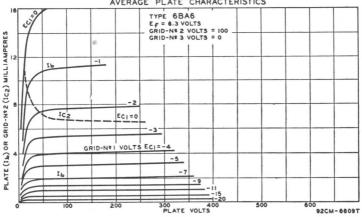




The grid-No. 2 (screen-grid) voltage may be obtained from a potentiometer or bleeder circuit across the B-supply source, or through a dropping resistor from the plate supply. The use of series resistors for obtaining satisfactory control of grid-No.2 voltage in the case of four-electrode tubes is usually impossible because of secondary-emission phenomena. In the 6BA6, however, because grid No.3 practically removes these effects, it is practical to obtain grid-No.2 voltage through a series-dropping resistor from the plate supply or from some high intermediate voltage, provided the source does not exceed the plate-supply voltage. With this method, the grid-No.2-to-cathode voltage will fall off very little from minimum to maximum value of the resistor controlling cathode bias. In some cases, it may actually rise. This rise of grid-No.2-to-cathode voltage above the normal maximum value is allowable because both the grid-No.2 current and the plate current are reduced simultaneously by a sufficient amount to prevent damage to the tube. It should be recognized that, in general, the series-resistor method of obtaining grid-No.2 voltage from a higher voltage supply necessitates the use of the variable cathode-resistor method of controlling volume in order to prevent too high a voltage on grid No.2. When grid-No.2 and control-grid voltage are obtained in this manner, the remote "cutoff" advantage of the 6BA6 can be fully realized. However, it should be noted that the use of a resistor in the grid-No.2 circuit will have an effect on the change in plate resistance with variation in grid-No.3 (suppressorgrid) voltage in case grid No.3 is utilized for control purposes.

Grid No. 3 (suppressor grid) may be connected directly to the cathode or it may be made negative with respect to the cathode. For the latter condition, the grid-No.3 voltage may be obtained from a potentiometer or bleeder circuit, or from the avc system.

PENTAGRID CONVERTER

Miniature type used as converter in superheterodyne circuits especially those for the FM broadcast band. Outline 8D, OUTLINES SECTION. Tube requires miniature nine-contact socket



and may be mounted in any position. Heater volts (ac/dc), 6.3, amperes, 0.3.

CONVERTER SERVICE

| Maximum Katings, (Design-Center Values): | | |
|--|----------|-------|
| PLATE VOLTAGE | 300 max | volts |
| GRID-NO.5-AND-INTERNAL-SHIELD VOLTAGE ⁴ | 0 max | volts |
| GRIDS-NO.2-AND-NO.4 (SCREEN-GRID) VOLTAGE. | 100 max | volts |
| GRIDS-NO.2-AND-NO.4 SUPPLY VOLTAGE | 300 max | volts |
| PLATE DISSIPATION | 2.0 max | watts |
| GRIDS-NO.2-AND-NO.4 INPUT. | 1.5 max | watts |
| TOTAL CATHODE CURRENT | 22 max | ma |
| GRID-NO.3 VOLTAGE: | | |
| Negative bias value | -100 max | volts |
| Positive bias value | 0 max | volts |
| PEAK HEATER-CATHODE VOLTAGE: | | |
| Heater negative with respect to cathode | 90 max | volts |
| Heater positive with respect to cathode | 90 max | volts |
| | | |
| Characteristics (Separate Excitation):* | | |

| Plate Voltage | 100 | 250 | volts |
|--|------|------------------|-----------|
| Grid No.5 and Internal Shield [*] | Co | nnected directly | to ground |
| Grids-No.2-and-No.4 (Screen-Grid) Voltage | 100 | 100 | volts |
| Grid-No.3 (Control-Grid) Voltage | | -1.0 | volt |
| Grid-No.1 (Oscillator-Grid) Resistor | | 20000 | ohms |
| Plate Resistance (Approx.) | 0.5 | 1.0 | megohm |
| Conversion Transconductance | 900 | 950 | μmhos |
| Conversion Transconductance (Approx.)** | | 3.5 | μmhos |
| Plate Current | 3.6 | 3.8 | ma |
| Grids-No 2-and-No.4 Current | 10.2 | 10 | ma |
| Grid-No 1 Current. | 0.35 | 0.35 | ma |
| Total Cathode Current | 14.2 | 14.2 | ma |

NOTE: The transconductance between grid No.1 and grids No.2 and No.4 connected to plate (not oscillating) is approximately 8000 μ mhos under the following conditions: signal applied to grid No.1 at zero bias; grids No.2 and No.4 and plate at 100 volts; grid No.3 grounded. Under the same conditions, the plate current is 32 milliamperes, and the amplification factor is 16.5.


* The characteristics shown with separate excitation correspond very closely with those obtained in a self-excited oscillator circuit operating with zero bias.

** With grid-No.3 bias of -20 volts.

* Internal Shield (pins No.6 and No.8) connected directly to ground.

MEDIUM-MU TRIODE — SHARP-CUTOFF PENTODE

Miniature type used in a wide variety of applications in color and black-and-white television receivers. This type has a controlled heater warm-up time for use in receivers em-



ploying series-connected heater strings. The pentode unit is used as a video amplifier, an agc amplifier, or a reactance tube. The triode unit is used in low-frequency oscillator and phase-splitter circuits. Outline 8D, OUTLINES SECTION. Tube requires miniature nine-contact socket and may be mounted in any position.

| HEATER VOLTAGE (AC/DC). HEATER CURRENT. HEATER WARM-UP TIME (Average). | | $\begin{array}{c} 6.3\\ 0.6\\ 11 \end{array}$ | volts ampere seconds |
|---|-------------------------------|--|----------------------------|
| DIRECT INTERELECTRODE CAPACITANCES (Approx.): Triode Unit: | Without External Shield | With External Shield | |
| Grid to Plate. Grid to Cathode and Heater. Plate to Cathode and Heater. | 2.2 2.5 0.4 | $ \begin{array}{c} 2 \\ 2 \\ 7 \\ 1 \\ 9 \end{array} $ | pf pf pf |
| 170 | | | |



6BA7


Related type:

12BA7

| Technical Dal | | | |
|--|---------------------------------|--------------------------------|----------------------|
| Pentode Unit: Grid No.1 to Plate | 0.06 | 0.05 | pf |
| Grid No.1 to Cathode, Heater, Grid No.2, Grid No.3, and Internal Shield | 10 | 10 | pf |
| Plate to Cathode, Heater, Grid No.2, Grid No.3, and In- | 0.0 | | |
| ternal Shield Triode Grid to Pentode Plate. Pentode Grid No.1 to Triode Plate. Pentode Plate to Triode Plate. | $3.6 \\ 0.016 \\ 0.006 \\ 0.15$ | 4.5 0.006 0.003 0.023 | pf pf pf pf |
| " With external shield connected to cathode of unit under te | st. | | |
| CLASS A1 AMPLIFIE | 2 | | |
| | Triode | Pentode | |
| Maximum Ratings, (Design-Center Values): | Unit | Unit | |
| PLATE VOLTAGE. | 300 max | 300 max | volts |
| GRID-NO.2 (SCREEN-GRID) SUPPLY VOLTAGE | - | 300 max | volts |
| GRID-NO.2 VOLTAGE | - | See curv | e p age 70 |
| Negative bias value | - | -50 max | volts |
| Positive bias value | - | 0 max | volts |
| PLATE DISSIPATION | 2 max | 3.25 max | watts |
| For grid-No.2 voltages up to 150 volts | - | 1 max | watt |
| For grid-No.2 voltages between 150 and 300 volts | - | | e page 70 |
| PEAK HEATER-CATHODE VOLTAGE: | 000 | 222 | |
| Heater negative with respect to cathode | 200 max 200 max | 200 max 200 max | volts |
| | 200 mar | 200- <i>max</i> | voits |
| Characteristics: | | | |
| Plate-Supply Voltage | 200 | 200 150 | volts |
| Grid-No.2 Supply Voltage Grid-No.1 Voltage | -8 | 150 | volts |
| Cathode-Bias Resistor | - | 180 | ohms |
| Amplification Factor | 18 | - | ommo |
| Plate Resistance (Approx.) | 6700 | 400000 | ohms |
| Transconductance | 2700 | 9000 | µmhos |
| Grid-No.1 Voltage (Approx.) for plate current of 10 µa | -16 | $^{-10}_{13}$ | volts |
| Plate Current Grid-No.2 Current | o _ | 3.5 | ma |
| Maximum Circuit Values: | | 0.0 | ma |
| Grid-No.1-Circuit Resistance: | | | |
| For fixed-bias operation | 0.5 max | 0.25 max | megohm |
| For cathode-bias operation | 1.0 max | 1.0 max | megohm |
| The decomponent must not exceed 100 welts | | | |

Technical Data =

The dc component must not exceed 100 volts.
PP1 G3P1



TRIODE—TWIN PENTODE

Duodecar type used as vertical deflection oscillator and for combined sync-agc applications in television receivers employing series-connected heater strings. Outline 12B, OUT-

6BA11

LINES SECTION. Tube requires duodecar twelve-contact socket and may be mounted in any position. Heater volts (ac/dc), 6.3; amperes, 0.6; warm-up time (average), 11 seconds. For ratings and characteristics of pentode units, refer to type 6HS8.

TRIODE UNIT AS CLASS A1 AMPLIFIER

Maximum Ratings, (Design-Center Values):

| PLATE VOLTAGE. AVERAGE CATHODE CURRENT PLATE DISSIPATION. HEATER-CATHODE VOLTAGE: Heater negative with respect to cathode. Heater positive with respect to cathode. | 300 max 20 max 1.5 max 200 max 200 max | volts ma watts volts volts |
|--|--|--|
| Characteristics: | | |
| Plate Voltage | 250 | volts |
| Grid Voltage | -11 | volts |
| Amplification Factor | 18 | |
| Transconductance | 1800 | μmhos |
| Plate Current | 5 | ma |
| Grid Voltage (Approx.) for plate current of 100 µa | -18 | volts |
| Maximum Circuit Values: | | |
| Grid-Circuit Resistance: For fixed-bias operation. For cathode-bias operation. | 0.25 max 1 max | |
| - The de component must not exceed 100 volts. | | |

= RCA Receiving Tube Manual =

MEDIUM-MU TRIODE

Miniature type used as an rf amplifier in the cathode-drive circuits of uhf television tuners covering the frequency range of 470 to 890 megacycles per second. Outline 8A, OUTLINES



SECTION. Tube requires miniature nine-contact socket and may be mounted in any position.

| HEATER VOLTAGE (AC/DC) HEATER CURRENT DIRECT INTERELECTRODE CAPACITANCES (Approx.): | $\begin{smallmatrix} & 6 \\ . & 3 \\ 0 \\ . & 225 \end{smallmatrix}$ | volts ampere |
|---|--|-----------------|
| Grid to Plate Grid to Heater and Cathode | 1.6 2.9 | pf |
| Plate to Heater and Cathode | | pi pf |
| Heater to Cathode | 2.7 | pf |

CLASS A1 AMPLIFIER

| 50 max .5 max 25 max 75 max 75 max | volts watts ma volts volts |
|--|--|
| 25 max 75 max | ma volts |
| 75 max | volts |
| | |
| | |
| 75 max | volts |
| | |
| | |
| 50 | volts |
| 00 | ohms |
| 48 | |
| 00 | ohms |
| 00 | µmhos |
| 10 | volts |
| 5 | ma |
| | 00 00 10 .5 |

Maximum Circuit Values:


6BC4

| Grid-Circuit Resistance: | | |
|----------------------------|----------|---------|
| For fixed-bias operation | Not reco | mmended |
| For cathode-bias operation | 0.5 max | megohm |

SHARP-CUTOFF PENTODE



Miniature type used in compact radio equipment as an rf or if amplifier at frequencies up to 400 megacycles per second. Outline 7B, OUTLINES SECTION. Tube requires miniature



seven-contact socket and may be mounted in any position. For typical operation as resistance-coupled amplifier, refer to RESISTANCE-COUPLED AMPLI-FIER SECTION.

| Heater Volts (ac/dc) | 6.3 | volts |
|---|-----------|--------|
| HEATER CURRENT. | 0.3 | ampere |
| DIRECT INTERELECTRODE CAPACITANCES: | | |
| Pentode Connection: | | |
| Grid No.1 to Plate | 0.030 max | pf |
| Grid No.1 to Cathode, Heater, Grid No.2, Grid No.3, and Internal Shield | 6.5 | pf |
| Plate to Cathode, Heater, Grid No.2, Grid No.3, and Internal Shield | 1.8 | pf |
| Triode Connection:* | | - |
| Grid No.1 to Plate and Grid No.2 | 2.5 | pf |
| Grid No.1 to Cathode, Heater, Grid No.3, and Internal Shield | 3.9 | pf |
| Plate and Grid No.2 to Cathode, Heater, Grid No.3, and Internal Shield. | 3.0 | pf |
| * Grid No.2 connected to plate. | | |
| | | |

Technical Data

CLASS A1 AMPLIFIER

| CLASS A1 AMPLITIER | Tri | ode | | Pen | tode | |
|--|-------|-------|------|------|--------|-------------|
| Maximum Ratings, (Design-Center Values): | Conne | | | Conn | | |
| Plate Voltage | 300 | max | | 300 | max | volts |
| GRID-NO.2 (SCREEN-GRID) SUPPLY VOLTAGE | - | | | 300 | max | volts |
| GRID-NO.2 VOLTAGE. | - | | | | See cu | rve page 70 |
| GRID-No.1 (CONTROL-GRID) VOLTAGE, Positive-bias value. | 0 | max | | 0 | max | volts |
| PLATE DISSIPATION | 2.5 | max | | 2 | max | watts |
| GRID-NO.2 INPUT: | | | | | | |
| For grid-No.2 voltages up to 150 volts | - | | | 0.5 | max | watt |
| For grid-No.2 voltages between 150 and 300 volts | - | | | 1 | See cu | rve page 70 |
| PEAK HEATER-CATHODE VOLTAGE: | 0.0 | | | | | |
| Heater negative with respect to cathode | | max | | | max | volts |
| Heater positive with respect to cathode | 90 | max | | 90 | max | volts |
| Characteristics: | | | | | | |
| Plate Supply Voltage | 180 | 250 | 100 | 125 | 250 | volts |
| Grid-No.2 Supply Voltage | - | | 100 | 125 | 150 | volts |
| Cathode-Blas Resistor | 330 | 820 | 180 | 100 | 180 | ohms |
| Amplification Factor | 42 | 40 | - | - | - | |
| Plate Resistance (Approx.) | 0.006 | 0.009 | 0.6 | 0.5 | 0.8 | megohm |
| Transconductance | 6000 | 4400 | 4900 | 6100 | 5700 | μmhos |
| Grid-No.1 Voltage (Approx.) for plate current of 10 µa | - | - | -5 | -6 | -8 | volts |
| Plate Current | 8 | 6 | 4.7 | 8 | 7.5 | ma |
| Grid-No.2 Current | - | - | 1.4 | 2.4 | 2.1 | ma |
| * Grid No 2 connected to plate | | | | | | |

* Grid No.2 connected to plate.

KDI

KD3


TRIPLE DIODE

Miniature type containing three high-perveance diode units in one envelope; used in dc restorer circuits of color television receivers. Also used in AM/FM radio receivers as a combina-

6BC7

tion FM discriminator and AM detector tube. Outline 8B, OUTLINES SECTION. Tube requires nine-contact miniature socket and may be mounted in any position.

| HEATER VOLTAGE (AC/DC) | 6.3 | volts |
|--|-----------------|--------|
| HEATER CURRENT | 0.450 | ampere |
| DIRECT INTERELECTRODE CAPACITANCES (Approx.): | | |
| Diode-No.1 Plate to Diode-No.1 Cathode, Heater, and Internal Shield. | 3.5 | pf |
| Diode-No.2 Plate to Diode-No.2 Cathode, Heater, and Internal Shield. | 5.5 | pf |
| Diode-No.3 Plate to Diode-No.3 Cathode, Heater, and Internal Shield. | 3.5 | pf |
| Maximum Ratings, (Design-Center Values, Each Diode Unit): | | |
| PEAK INVERSE PLATE VOLTAGE. | 330 max | volts |
| PEAK PLATE CURRENT*. | 54 max | ma |
| DC OUTPUT CURRENT. | 12 max | ma |
| PEAK HEATER-CATHODE VOLTAGE: | | |
| Heater negative with respect to cathode | 200 max | volts |
| Heater positive with respect to cathode | 200 max | volts |
| * In rectifier service, the minimum total effective plate-supply impedance per | plate is 560 oh | ms. |



MEDIUM-MU TWIN TRIODE

Miniature type used in directcoupled cathode-drive rf amplifier circuits of vhf television tuners. In such circuits, one triode unit is used as the direct-coupled grounded-cathode driv-



er for the other unit. This type is also used in push-pull cathode-drive rf amplifiers. Outline 8B, OUTLINES SECTION. Tube requires miniature nine-contact socket and may be mounted in any position.

| HEATER VOLTAGE (AC/DC) | | 6.3 0.4 | volts |
|--|-----------|------------|---------------|
| DIRECT INTERELECTRODE CAPACITANCES*: | Unit No.1 | Unit No.2 | umpere |
| Grid to Plate | 1.2 | 1.2 | pf |
| Grid to Cathode, Heater, and Internal Shield | 2.6 | - | pf |
| Cathode to Grid, Heater, and Internal Shield | - | 5.5 | \mathbf{pf} |
| Plate to Cathode, Heater, and Internal Shield | 1.3 | - | \mathbf{pf} |
| Plate to Grid, Heater, and Internal Shield | - | 2.4 | pf |
| Plate to Cathode | - | 0.12 | pf |
| | 2.8 | 2.8 | pf |
| Plate of Unit No.1 to Plate of Unit No.2 | | | pf |
| Plate of Unit No.2 to Plate and Grid of Unit No.1 | 0 . 04 | max | pf |
| * With external shield connected to internal shield. | | | |

RCA Receiving Tube Manual

CLASS A1 AMPLIFIER (Each Unit)

| Maximum Ratings, (Design-Maximum Values): | | |
|---|----------------------|-------|
| PLATE VOLTAGE. | 250 [*] max | volts |
| PLATE DISSIPATION. | 2.2 max | watts |
| CATHODE CURRENT. | 22 max | ma |
| PEAK HEATER-CATHODE VOLTAGE: | | |
| Heater negative with respect to cathode | 200 [*] max | volts |
| Heater positive with respect to cathode | 200 max | volts |
| Characteristics: | | |
| Plate Supply Voltage | 150 | volts |
| Cathode-Bias Resistor | 220 | ohms |
| Plate Resistance (Approx.) | 5300 | ohms |
| Amplification Factor | 35 | |
| Transconductance | 6200 | µmhos |
| Grid Voltage (Approx.) for transconductance of 50 µmhos | -13 | volts |
| Plate Current | 10 | ma |
| Maximum Circuit Value: | | |

Grid-Circuit Resistance


0.5 max megohm * This rating may be as high as 300 volts under cutoff conditions, when the tube is used as a cascode amplifier and the two units are connected in series.

The dc component must not exceed 100 volts.

SHARP-CUTOFF BEAM TRIODE

6**B**D4 6BD4A


Glass octal types used for the voltage regulation of high-voltage, low-current dc power supplies in color television receivers. Outline 25B, OUTLINES SECTION. Tubes require octal socket. Heater volts (ac/dc), 6.3; amperes, 0.6. Maximum ratings for voltage-control service: dc plate volts, 6BD4 20000 max, 6BD4-A 27000 max; unregulated dc supply volts, 6BD4 40000 max, 6BD4-A 55000 max; dc grid volts, -125



max; peak grid volts, -550 max; dc plate ma., 1.5 max; plate dissipation, 6BD4 20 max watts, 6BD4-A 25 max watts; peak heater-cathode volts, 180 max. These are DISCONTINUED types listed for reference only.

REMOTE-CUTOFF PENTODE

Miniature type used as rf or if amplifier in radio receivers. This type is similar in performance to metal type 6SK7. Outline 7B, OUT-LINES SECTION. Tube requires miniature seven-contact socket and may be mounted in any position. Heater volts (ac/dc), 6.3; amperes, 0.3. Characteristics as class A1 amplifier: plate volts, 250 (300 max); grid No.3 connected to cathode at socket; grid-No.2 volts, 100 (125



max); grid-No.1 volts, -3; plate resistance (approx.), 0.8 megohm; transconductance, 2000 µmhos; plate dissipation, 3 max watts; grid-No.2 input, 0.65 max watt; plate ma., 9; grid-No.2 ma., 3; total cathode ma., 14 max; peak heater-cathode volts, 90 max. This type is used principally for renewal purposes.


HALF-WAVE VACUUM RECTIFIER

6BE3

Related type:

12BD6

Duodecar type used as damper tube in horizontal-deflection circuits of television receivers. Outline 12D, OUTLINES SECTION. Tube requires duodecar twelve-contact socket



and may be mounted in any position. Heater volts (ac/dc), 6.3; amperes, 1.2.

DAMPER SERVICE For operation in a 525-line, 30-frame system Maximum Ratings, (Design-Maximum Values): PEAK INVERSE PLATE VOLTAGE#..... 5000 max volts PEAK PLATE CURRENT..... 1200 mar ma DC PLATE CURRENT. 200 max ma PLATE DISSIPATION..... 6.5 max watts

174

| | Technical | Data | |
|--|-----------|------|--|
|--|-----------|------|--|

| PEAK HEATER-CATHODE VOLTAGE: | | |
|---|---------------------|-------|
| Heater negative with respect to cathode | 5000 max 300 max | volts |
| meater positive with respect to cathode | 300-max | volts |

Characteristics, Instantaneous Value:

H(3

^D The dc component must not exceed 100 volts.

6)Gr

PENTAGRID CONVERTER

Miniature type used as converter in superheterodyne circuits in both the standard broadcast and FM bands. The 6BE6 is similar in performance to metal type 6SA7. For general discus-

OBEO Related types: 3BE6, 12BE6

sion of pentagrid types, see *Frequency Conversion* in ELECTRON TUBE AP-PLICATION SECTION.

| HEATER VOLTAGE (AC/DC) | Without External | 6.3 0.3 With External | volts ampere |
|--|--|---|--|
| DIRECT INTERELECTRODE CAPACITANCES: Grid No.3 to Plate Grid No.3 to Grid No.1. Grid No.3 to Grid No.1. Grid No.3 to All Other Electrodes Grid No.1 to All Other Electrodes Plate to All Other Electrodes Grid No.1 to Cathode and Grid No.5. Cathode and Grid No.5 to All Other Electrodes except Grid No.1. | Shield 0.30 max 0.15 max 0.10 max 7.0 5.5 8.0 3.0 15.0 | Shield [™] 0.25 max 0.15 max 0.05 max 7.0 5.5 13.0 3.0 20.0 | pf pf pf pf pf pf |
| CONVERTER | | | |
| Maximum Ratings, (Design-Maximum Values): | | | |
| PLATE VOLTAGE. GRIDS-NO.2-AND-NO.4 (SCREEN-GRID) VOLTAGE. GRIDS-NO.2-AND-NO.4 SUPPLY VOLTAGE. PLATE DISSIPATION. GRIDS-NO.2-AND-NO.4 INPUT. CATHODE CURRENT. GRID-NO.3 VOLTAGE: Negative bias value. Positive bias value. PAK HEATER-CATHODE VOLTAGE: Heater negative with respect to cathode. Heater positive with respect to cathode. | | 330 max 110 max 330 max 1.1 max 1.1 max 15.5 max -55 max 0 max 200 max 200*max | volts volts watts watts ma volts volts volts volts |
| Typical Operation (Separate Excitation):* Plate Voltage. Grids-No.2-and-No.4 (Screen-Grid) Voltage (ms). Grid-No.1 (Oscillator-Grid) Voltage (ms). Grid-No.3 (Control-Grid) Voltage. Grid-No.3 (Oscillator-Grid) Voltage. Grid-No.3 Voltage for conversion transconductance of 10 μmhoo Plate Current Grid-No.2-and-No.4 Current. Grid-No.1 Current Cathode Current. | $\begin{array}{c} 100\\ 10\\ 20000\\ 0.4\\ 455\\ 8 -30\\ 2.6\\ 7.0\\ 0.5\\ 10.1\\ \end{array}$ | $\begin{array}{c} 250\\ 100\\ 10\\ -1.5\\ 20000\\ 1.0\\ 475\\ -30\\ 2.9\\ 6.8\\ 0.5\\ 10.2\\ \end{array}$ | volts volts volts volts ohms megohm µmhos volts ma ma ma ma |

Note: The transconductance between grid No.1 and grids No.2 and No.4 connected to plate (not oscillating) is approximately 7250 μ mhos under the following conditions: grids No.1 and No.3 at 0 volts; grids No.2 and No.4 and plate at 100 volts. Under the same conditions, the cathode current is 25 ma, and the amplification factor is 20. Grid-No.1 voltage (Approx.) for plate current of 10 μ a is -11 volts.

The dc component must not exceed 100 volts.

* The characteristics shown with separate excitation correspond very closely with those obtained in a self-excited oscillator circuit operating with zero bias.

INSTALLATION AND APPLICATION

Type 6BE6 requires miniature seven-contact socket and may be mounted in any position. Outline 7B, OUTLINES SECTION.


Because of the special structural arrangement of the 6BE6, a change in signal-

RCA Receiving Tube Manual

grid voltage produces little change in cathode current. Consequently, an rf voltage on the signal grid produces little modulation of the electron current flowing in the cathode circuit. This feature is important because it is desirable that the impedance in the cathode circuit should produce little degeneration or regeneration of the signal-frequency input and intermediate-frequency output. Another important feature is that, because signal-grid voltage has very little effect on the space charge near the cathode, changes in avc bias produce little change in oscillator transconductance and in the input capacitance of grid No.1. There is, therefore, little detuning of the oscillator by avc bias.

A typical self-excited oscillator circuit employing the 6BE6 is given in the CIRCUIT SECTION.

In the 6BE6 operation characteristics curves with self-excitation, E_k is the voltage across the oscillator-coil section between cathode and ground; E_{e} is the oscillator voltage between cathode and grid.

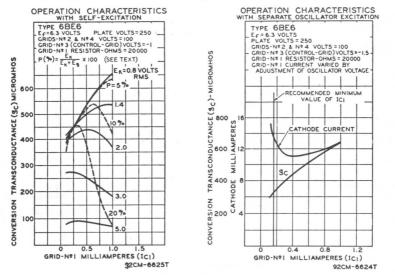

BEAM POWER TUBE

Miniature type used in audio output stage of television and radio receivers. Triode-con-**6BF5** nected, it is used as a vertical deflection amplitelevision receivers. Outline 7C, OL fier in LINES SECTION. Tube requires miniature seven-contact socket and may be mounted in any position. Heater volts (ac/dc), 6.3; am-



T-

peres, 1.2. Typical operation as class A1 ampli-fier: plate volts, 110 (250 max); grid-No.2 volts, 110 (117 max); grid-No.1 volts, -7.5; peak af grid-No.1 volts, 7.5; plate dissipation, 5.5 max watts; grid-No.2 input, 1.25 max watts; plate ma., 36 (zero-signal), 39 (maximum-signal); grid-No.2 ma., 4 (zero-signal), 10.5 (maximum-signal); plate resistance (approx), 12000 ohms; transconductance, 7500 µmhos; plate load resistance, 2500 ohms; total harmonic distortion, 10 per cent; maximum-signal power uttuit 1 = watter; peak heater acted of volts? with respect to cathode). This type is used principally for renewal purposes.

peres, 1.2. Typical operation as class A1 ampli-

TWIN DIODE_ MEDIUM-MU TRIODE

Miniature type used in compact radio equipment as combined detector. amplifier, and avc tube. The triode unit is particularly useful as a driver for impedance- or transformer-coupled



176

Related type: 12BF6

= Technical Data =

output stages in automobile receivers. It is equivalent in performance to metal type 6SR7. Outline 7B, OUTLINES SECTION. Tube requires miniature seven-contact socket and may be mounted in any position.

| HEATER VOLTAGE (AC/DC) | | 6.3 0.3 | volts ampere |
|--|------------------------|---|------------------------|
| | Without | With | |
| DIRECT INTERELECTRODE CAPACITANCES: | External Shield | External Shield | |
| Triode Grid to Triode Plate Triode Grid to Cathode and Heater Triode Plate to Cathode and Heater Plate of Diode Unit No.1 to Triode Grid Plate of Diode Unit No.2 to Triode Grid | 1.8 0.7 0.07 max | 1.9 1.9 1.2 0.06 max 0.05 max | pf pf pf pf |
| With external shield connected to cathode. | | | |
| TRIODE UNIT AS CL | ASS A1 AMPLIFIER | | |
| Maximum Ratings, (Design-Center Values): | | | |
| PLATE VOLTAGE. PLATE DISSIPATION PEAK HEATER-CATHODE VOLTAGE: | | 300 max 2.5 max | volts watts |
| Heater negative with respect to cathode | | 90 max 90 max | volts volts |
| Typical Operation: | | | |
| Plate Voltage Grid Voltage Amplification Factor | | 250 -9 16 | volts volts |
| Plate Resistance (Approx.) Transconductance | | 8500 1900 | ohms µmhos |
| Plate Current | | 9.5 | ma |
| Load Resistance Total Harmonic Distortion Power Output | | 10000 6.5 300 | ohms per cent mw |
| Maximum Rating: DIODE | | | |

Maximum Rating:

DIODE UNITS

PLATE CURRENT (Each Unit)...... 1.0 max ma The two diode plates and the triode unit have a common cathode. Diode biasing of the triode unit of the 6BF6 is not suitable. For diode operation curves, refer to type 6AV6.



BEAM POWER TUBE

Glass octal types used as output amplifier in horizontal-deflection circuits of television equipment and other applications where high pulse voltages occur during short duty cycles. Type



6BG6-GA, Outline 25A, OUTLINES SECTION. Type 6BG6-G maximum dimensions: over-all length, 5-11/16 inches; seated height, 5-1/8 inches; diameter, 2-1/16 inches. Tubes require octal socket. They may be supplied with pins 4 and 6 or with pins 1, 4, and 6 omitted. Vertical tube mounting is preferred but horizontal operation is permissible if pins No.2 and 7 are in vertical plane. Type 6BG6-G is used principally for renewal purposes.

| HEATER VOLTAGE (AC/DC) HEATER CURRENT. DIRECT INTERELECTRODE CAPACITANCES: 6BG6-G Grid No.1 to Plate. 0.34 Grid No.1 to Cathode, Heater, Grid No.2, and Grid No.3. 12 Plate to Cathode, Heater, Grid No.2, and Grid No.3. 6.5 TRANSCONDUCTANCES 6.5 | 6.3 0.9 6BG6-GA 0.8 11 6 6000 | volts ampere pf pf µmhos |
|---|---|--------------------------------------|
| Mu-Factor, Grid No.2 to Grid No.1° | 8.0 | |
| °For plate and grid-No.2 volts, 250; grid-No.1 volts, -15. | | |
| HORIZONTAL DEFLECTION AMPLIFIER | | |
| For operation in a 525-line, 30-frame system | | |
| Maximum Ratings, (Design-Center Values): | | |
| DC PLATE VOLTAGE | 700 max | volts |
| PEAK POSITIVE-PULSE PLATE VOLTAGE* (Absolute Maximum) | 6600 [*] max | volts |
| PEAK NEGATIVE-PULSE PLATE VOLTAGE | -1500 max | volts |
| DC GRID-NO.2 (SCREEN-GRID) VOLTAGE. | 350 max | volts |
| PEAK NEGATIVE-PULSE GRID-NO.1 (CONTROL-GRID) VOLTAGE | -300 max | volts |
| PEAK CATHODE CURRENT. | 400 max | ma |
| AVERAGE CATHODE CURRENT | 110 max | ma |
| PLATE DISSIPATION ^{††} | 20 max | watts |
| GRID-NO.2 INPUT. | 3.2 max | watts |
| | | |

= RCA Receiving Tube Manual =

| PEAK HEATER-CATHODE VOLTAGE: Heater negative with respect to cathode | 200 max 200 = max | volts |
|---|-----------------------------|-------|
| BULB TEMPERATURE (At hottest point) | 210 max | °C |
| | | |

Maximum Circuit Value:

• Under no circumstances should this absolute value be exceeded.

†† An adequate bias resistor or other means is required to protect the tube in the absence of excitation.
The dc component must not exceed 100 volts.

HALF-WAVE VACUUM RECTIFIER

6BH3 Related types: 17BH3, 22BH3 Novar type used as damper tube in horizontal deflection circuits of blackand-white television receivers. Outline 17A, OUTLINES SECTION. Tube requires novar socket and may be oper-



ated in any position. Socket terminals 1, 3, 6, and 8 should not be used as tie points. It is especially important that this tube, like other power-handling tubes, be adequately ventilated.

| Heater Voltage (ac/dc) | $6.3 \\ 1.6$ | volts |
|---|--------------|-------|
| DIRECT INTERELECTRODE CAPACITANCES (ADDrox.): | | |
| Plate to Cathode and Heater | 6.5 | pf |
| Cathode to Plate and Heater | 9.0 | pf |
| Heater to Cathode | 2.8 | pf |

DAMPER SERVICE

** *

For operation in a 525-line, 30-frame system

| Maximum Katings, (Design-Maximum Values): | | |
|---|--------------------|-------|
| PEAK INVERSE PLATE VOLTAGE | 5500 max | volts |
| PEAK PLATE CURRENT. | 1100 max | ma |
| DC PLATE CURRENT | 180 max | ma |
| PLATE DISSIPATION. | 6.5 max | watts |
| PEAK HEATER-CATHODE VOLTAGE: | | |
| Heater negative with respect to cathode | 5500 •max | volts |
| Heater positive with respect to cathode | $300 \square max$ | volts |

The duration of the voltage pulse must not exceed 15 per cent of one horizontal scanning cycle. In a 525-line, 30-frame system, 15 per cent of one horizontal scanning cycle is 10 microseconds.
 The dc component must not exceed 900 volts.

SHARP-CUTOFF PENTODE

6BH6

Miniature type used as rf amplifier particularly in ac/dc receivers and in mobile equipment where low heatercurrent drain is important. It is particularly useful in high-frequency,



wide-band applications. Outline 7B, OUTLINES SECTION. Tube requires miniature seven-contact socket and may be mounted in any position.


| HEATER VOLTAGE (AC/DC) | | | 6.3 | volts |
|-----------------------------|--------------------------|---------------------|------|----------|
| HEATER CURRENT | | | 0.15 | ampere |
| DIRECT INTERELECTRODE CAN | ACITANCES: | | | |
| Grid No.1 to Plate | | | | pf |
| Grid No.1 to Cathode, He | | | | pf pf |
| Plate to Cathode, Heater, | Grid No.2, Grid No.3, | and Internal Shield | 4.4 | pf |
| Without external shield, or | with external shield con | nnected to cathode. | | |

CLASS A1 AMPLIFIER

| Maximum Ratings, (Design-Center Values): | |
|--|-------------------|
| PLATE VOLTAGE | 300 max volts |
| GRID-NO.2 (SCREEN-GRID) VOLTAGE | See curve page 70 |
| GRID-NO.2 SUPPLY VOLTAGE. | 300 max volts |
| PLATE DISSIPATION | 3 max watts |
| GRID-NO.2 INPUT: | |
| For grid-No.2 voltages up to 150 volts | 0.5 max watt |
| For grid-No.2 voltages between 150 and 300 volts | See curve page 70 |
| GRID-NO.1 (CONTROL-GRID) VOLTAGE: | |
| Negative-bias value | -50 max volts |
| Positive-bias value | 0 max volts |

Technical Data

| PEAK HEATER-CATHODE VOLTAGE: Heater negative with respect to cathode | | 90 max 90 max | volts volts |
|---|-----------|------------------|----------------|
| Characteristics: | | | |
| Plate Voltage | 100 | 250 | volts |
| Grid No.3 and Internal Shield | Connected | to cathode | at socket |
| Grid-No.2 Voltage | 100 | 150 | volts |
| Grid-No.1 Voltage | -1 | -1 | volt |
| Plate Resistance (Approx.) | 0.7 | 1.4 | megohms |
| Transconductance | | 4600 | μmhos |
| Grid-No.1 Voltage (Approx.) for plate current of 10 μ a | | -7.7 | volts |
| Plate Current | | 7.4 | ma |
| Grid-No.2 Current. | 1.4 | 2.9 | ma |



MEDIUM-MU TRIODE— SHARP-CUTOFF PENTODE

Miniature type used in a wide variety of applications in television receivers. This type has a controlled heater warm-up time for use in receivers employing series-connected

6BH8 Related type: 8BH8

heater strings. The pentode unit is used as an if amplifier, a video amplifier, or an agc amplifier. The triode unit is used in low-frequency oscillator circuits. Outline 8D, OUTLINES SECTION. Tube requires miniature nine-contact socket and may be mounted in any position.

| HEATER VOLTAGE (AC/DC) HEATER CURRENT. HEATER WARM-UP TIME (Average) DIRECT_INTERELECTRODE CAPACITANCES (Approx.): | $\begin{array}{c} 6.3\\ 0.6\\ 11 \end{array}$ | volts ampere seconds |
|---|---|----------------------------|
| Triode Unit: | | |
| Grid to Plate | 2.4 | pf |
| Grid to Cathode and Heater | 2.6 | pf |
| Plate to Cathode and Heater | 0.38 | pf |
| Pentode Unit: | | |
| Grid No.1 to Plate | 0.046 | pf |
| Grid No.1 to Cathode, Heater, Grid No.2, Grid No.3, and Internal Shield | 7 | pf |
| Plate to Cathode, Heater, Grid No.2, Grid No.3, and Internal Shield | 2.4 | pf |
| Triode Grid to Pentode Plate | 0.016 | pf |
| Pentode Grid No.1 to Triode Plate | 0.004 | pf |
| Pentode Plate to Triode Plate | 0.095 | pf |

CLASS A1 AMPLIFIER


| Maximum Ratings, (Design-Center Values): | Triode Unit | Pentode Unit | t |
|---|-------------|--------------|------------|
| PLATE VOLTAGE | 300 max | 300 max | volts |
| GRID-NO.2 (SCREEN-GRID) SUPPLY VOLTAGE | - | 300 max | volts |
| GRID-NO.2 VOLTAGE. | - | | e page 70 |
| GRID-No.1 (CONTROL-GRID) VOLTAGE, Positive-bias value | 0 max | 0 max | volts |
| PLATE DISSIPATION. | 2.5 max | 3 max | watts |
| GRID-NO.2 INPUT: | | | |
| For grid-No.2 voltages up to 150 volts | - | 1 max | watt |
| For grid-No.2 voltages between 150 and 300 volts | - | See curv | e page 70 |
| PEAK HEATER-CATHODE VOLTAGE: | | | |
| Heater negative with respect to cathode | 200 max | 200 max | volts |
| Heater positive with respect to cathode | 200 max | 200 max | volts |
| | | | |
| Characteristics: | | | |
| Plate Supply Voltage | 150 | 200 | volts |
| Grid-No.2 Supply Voltage | - | 125 | volts |
| Grid-No.1 Voltage | -5 | - | volts |
| Cathode-Bias Resistor | - | 82 | ohms |
| Amplification Factor | 17 | - | |
| Plate Resistance (Approx.) | 5150 | 150000 | ohms |
| Transconductance | 3300 | 7000 | μ mhos |
| Grid-No.1 Voltage (Approx.) for plate current of 100 µa | -14 | -8 | volts |
| Plate Current. | 9.5 | 15 | ma |
| Grid-No.2 Current | - | 3.4 | ma |
| Maximum Circuit Values: | | | |
| Grid-No.1-Circuit Resistance: | | | |
| For fixed-bias operation | 0.5 max | 0.25 max | megohm |
| For cathode-bias operation | 1.0 max | 1.0 max | megohm |

The dc component must not exceed 100 volts.

6BJ6

REMOTE-CUTOFF PENTODE

Miniature type used as rf amplifier in high-frequency and wide-band applications. Features high transconductance and low grid-to-plate capacitance. Outline 7B, OUTLINES SEC-



TION. Tube requires miniature seven-contact socket and may be mounted in any position.

| HEATER VOLTAGE (AC/DC) | 6.3 | volts |
|---|------------|--------|
| HEATER CURRENT. | 0.15 | ampere |
| DIRECT INTERELECTRODE CAPACITANCES: | | |
| Grid No.1 to Plate | 0.0035 max | pf |
| Grid No.1 to Cathode, Heater, Grid No. 2, Grid No. 3, and Internal Shield | 4.5 | pf |
| Plate to Cathode, Heater, Grid No. 2, Grid No. 3, and Internal Shield | 5.5 | pf |
| Without external shield, or with external shield connected to cathode. | | |

CLASS A1 AMPLIFIER

| Maximum Ratings, (Design-Center Values): | | |
|--|-------------------|---------|
| PLATE VOLTAGE | 300 max | volts |
| GRID-NO.2 (SCREEN-GRID) VOLTAGE | See curve | page 70 |
| GRID-NO.2 SUPPLY VOLTAGE. | 300 max | volts |
| PLATE DISSIPATION. | 3 max | watts |
| GRID-NO.2 INPUT: | | |
| For grid-No.2 voltages up to 150 volts | 0.6 max | watt |
| For grid-No.2 voltages between 150 and 300 volts | See curve page 70 | |
| GRID-NO.1 (CONTROL-GRID) VOLTAGE: | | |
| Negative bias value | -50 max | volts |
| Positive bias value | 0 max | volts |
| PEAK HEATER-CATHODE VOLTAGE: | | |
| Heater negative with respect to cathode | 90 max | volts |
| Heater positive with respect to cathode | 90 max | volts |
| | | |


Characteristics:

6BJ7

| Plate Voltage | 100 | 250 | volts |
|--|-------|---------------|--------------|
| Grid No.3 | Conne | cted to catho | de at socket |
| Grid-No.2 Voltage | 100 | 100 | volts |
| Grid-No.1 Voltage | -1.0 | -1.0 | volt |
| Plate Resistance (Approx.) | 0.25 | 1.3 | megohms |
| Transconductance | 3650 | 3600 | μmhos |
| Grid-No.1 Voltage (Approx.) for transconductance of 10 µmhos | -20 | -20 | volts |
| Plate Current | 9.0 | 9.2 | ma |
| Grid-No.2 Current | 3.5 | 3.3 | ma |

TRIPLE DIODE


Miniature type used as a dc-restorer tube in each of the three signal channels of color-television receivers. Each diode has a separate cathode. Outline 8B, OUTLINES SECTION.



Tube requires miniature nine-contact socket and may be mounted in any position. Heater volts, 6.3; amperes, 0.45.

DC RESTORER SERVICE

| Maximum Ratings, (Design-Center Values, Each Diode Unit): | | |
|---|---------|-------|
| PEAK INVERSE PLATE VOLTAGE | 330 max | volts |
| PEAK PLATE CURRENT | 10 max | ma |
| DC OUTPUT CURRENT | 1 max | ma |
| PEAK HEATER-CATHODE VOLTAGE: | | |
| Heater negative with respect to cathode | 330 max | volts |
| Heater positive with respect to cathode | 100 max | volts |



Miniature type used in a wide variety of applications in black-andwhite and color television receivers. The diode units are used in phasedetector, phase-comparator, ratio-de-

6BJ8

tector or discriminator, and horizontal afc discriminator circuits. The triode unit is used in phase-splitter, audio-frequency amplifier, and low-frequency oscillator applications; it may also be used as a vertical-deflection amplifier in compact portable television receivers. This type has a controlled heater warm-up time for use in receivers employing series-connected heater strings. Each of the three units has its own cathode with individual base-pin terminal to provide for flexibility of circuit connections. Outline 8D, OUTLINES SECTION. Tube requires miniature ninecontact socket and may be mounted in any position.


| HEATER VOLTS (AC/DC) HEATER CURRENT. HEATER WARM-UP TIME (Average) DIRECT INTERELECTRODE CAPACITANCES: | 6.3 0.6 11 | volts ampere seconds |
|---|--|----------------------------------|
| Triode Unit: Grid to Plate. Grid to Cathode and Heater. Plate to Cathode and Heater. Diode Units: | $2.6 \\ 2.8 \\ 0.31$ | pf pf pf |
| Plate of Either Diode Unit to All Other Electrodes. | 1.9 4.6 0.06 max 0.07 max 0.11 max 3.0 4.8 | pf pf pf pf pf pf |

TRIODE UNIT AS CLASS A1 AMPLIFIER

Maximum Ratings, (Design-Maximum Values): PLATE VOLTAGE 330 max volts GRID VOLTAGE, Positive-bias value 0 max volts AVERAGE CATHODE CURRENT..... 22 max ma PLATE DISSIPATION 4 max watts PEAK HEATER-CATHODE VOLTAGE: Heater negative with respect to cathode..... 200 max volta 200 max Heater positive with respect to cathode volts Characteristics: Plate Valtage 90 250 volte

| Grid Voltage | 0 | -9 | volts |
|--------------|---|----|-------|
| | | | |

AVERAGE CHARACTERISTICS

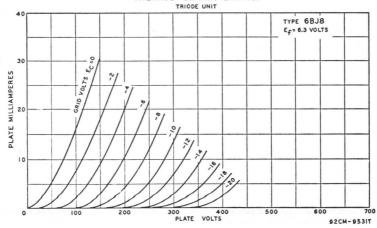

| Amplification Factor. 22 Plate Resistance (Approx.) 4700 Transconductance. 4700 Grid Voltage (Approx.) for plate current of 10 μa. -7 Plate Current. 13.5 Plate Current for grid voltage of -12.5 volts. - | $20 \\ 7150 \\ 2800 \\ -18 \\ 8 \\ 1.7$ | ohms µmhos volts ma ma |
|--|--|--|
| Maximum Circuit Value: | | |
| Grid-Circuit Resistance The dc component must not exceed 100 volts. | 1 max | megohm |
| TRIODE UNIT AS VERTICAL DEFLECTION AMPLIFIER For operation in a 525-line, 30-frame system | | |
| Maximum Ratings, (Design-Maximum Values): | | |
| DC PLATE VOLTAGE. PEAK POSITIVE-PULSE PLATE VOLTAGE †. PEAK DEGATIVE-PULSE GRID VOLTAGE. PEAK CATHODE CURRENT. AVERAGE CATHODE CURRENT. PLATE DISSIPATION. PEAK HEATER-CATHODE VOLTAGE: Heater negative with respect to cathode. Heater positive with respect to cathode. | 330 max 1200 max -275 max 77 max 22 max 4 max 200 max 200 max | volts volts volts ma watts volts volts |
| Maximum Circuit Value: | | |
| Grid-Circuit Resistance: For cathode-bias operation | 2.2 max | megohms |
| DIODE UNITS | | |
| Maximum Ratings, (Design-Maximum Values): | | |
| PLATE CURRENT (Each Unit): | - 1 | |

| Peak | 54 max 9 max | ma ma |
|---|-----------------|-----------|
| PEAK HEATER-CATHODE VOLTAGE: | | |
| Heater negative with respect to cathode | 200 max | volts |
| Heater positive with respect to cathode | 200 max | volts |
| + The duration of the voltage pulse must not exceed 15 per cent of one vertical sec | anning evela | In a 525- |

The duration of the voltage pulse must not exceed 15 per cent of one vertical scanning cycle. In a 525line, 30-frame system, 15 per cent of one vertical scanning cycle is 2.5 milliseconds.

The dc component must not exceed 100 volts.

SHARP-CUTOFF BEAM TRIODE

Glass octal type used for the voltage regulation of high-voltage, lowcurrent dc power supplies in color television receivers. Outline 25A, OUT-LINES SECTION. Tube requires octal socket and may be mounted in any position.



| HEATER VOLTAGE (AC/DC) | 6.3 | volts |
|---|------|--------|
| HEATER CURRENT. | 0.2 | ampere |
| DIRECT INTERELECTRODE CAPACITANCES (Approx.): | | |
| Grid to Plate | 0.03 | pf |
| | 2.6 | pf |
| Plate to Cathode and Heater | | pf |
| AMPLIFICATION FACTOR (Approx.) | 2000 | |

VOLTAGE-CONTROL SERVICE


Maximum Ratings, (Design-Maximum Values):

| DC PLATE VOLTAGE. UNREGULATED DC SUPPLY VOLTAGE. DC GRUD VOLTAGE. | 27000 max 60000 max -135 max | volts volts |
|---|------------------------------------|------------------|
| DC GRID VOLTAGE" | -440 max 1.6 max | volts |
| PLATE DISSIPATION. PEAK HEATER-CATHODE VOLTAGE: | | watts |
| Heater negative with respect to cathode | | volts nmended |

Maximum Circuit Value:

6BK4

Grid-Circuit Resistance:

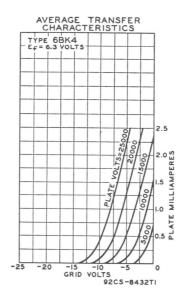


Technical Data

BEAM POWER TUBE

Miniature type used in audio output stages of television and radio receivers. Outline 8D, OUTLINES SECTION. Tube requires miniature nine-contact socket and may be mounted in any position. Heater volts (ac/dc), 6.3; amperes, 1.2. Typical operation as class A1 amplifier: plate and grid-No.2 volts, 250 max; grid-No.1 volts, -5; peak af grid-No.1 volts, 5; plate dissipation, 9 max watts; grid-No.2 input, 2.5

6BK5 Related types: 12BK5, 25BK5

max watts; plate ma., 35 (zero-signal), 37 (maximum-signal); grid-No.2 ma., 3.5 (zero-signal), 10 (maximum-signal); plate resistance (approx.), 0.1 megohm; transconductance, 8500 μ mhos; load resistance, 6500 ohms; total harmonic distortion, 7 per cent; power output, 3.5 watts; peak heater-cathode volts, 100 max. This type is used principally for renewal purposes.



NC

MEDIUM-MU TWIN TRIODE

Miniature types used in directcoupled cathode-drive rf amplifier circuits of vhf television tuners. In such circuits, one triode unit is used as the direct-coupled grounded-cathode driv6BK7A 6BK7B Related type: 5BK7A

er for the other unit. These types are also used in push-pull cathode-driver f amplifiers. Type 6BK7-B has a controlled heater warm-up time for use in receivers employing series-connected heater strings. Outline 8B, OUTLINES SECTION. Tubes require miniature nine-contact socket and may be mounted in any position. For typical operation as a resistance-coupled amplifier, refer to RESISTANCE-COUPLED AMPLIFIER SECTION. Type 6BK7-A is a DISCONTINUED type listed for reference only.

| Heater Voltage (ac/dc) | | 6.3 | volts |
|---|------------|------------|---------|
| HEATER CURRENT. | | 0.45 | ampere |
| HEATER WARM-UP TIME (Average) for 6BK7-B | | 11 | seconds |
| DIRECT INTERELECTRODE CAPACITANCES: | Unit No. 1 | Unit No. 2 | |
| Grid to Plate | 1.8 | 1.8 | pf |
| Grid to Cathode, Heater, and Internal Shield | 3 | 3 | pf |
| Plate to Cathode, Heater, and Internal Shield | 1 | 0.9 | pf |
| Cathode to Grid, Heater, and Internal Shield | 6 | 6 | pf |
| Plate to Grid, Heater, and Internal Shield | 2.4 | 2.4 | pf |
| | | | |

| Plate to Cathode. 0.22 Heater to Cathode. 2.8 Grid of Unit No.1 to Grid of Unit No.2. Plate of Unit No.1 to Plate of Unit No.2. | 0.22 3 0.004 max 0.075 max | pf pf pf |
|---|-------------------------------------|----------------|
| CLASS A, AMPLIFIER (Each Unit) | | r - |
| 1 | | |
| Maximum Ratings, (Design-Center Values): | | |
| PLATE VOLTAGE | 300 max | volts |
| GRID VOLTAGE, Negative-bias value. | -50 max | volts |
| PLATE DISSIPATION. | 2.7 max | |
| | 2.1 max | watts |
| PEAK HEATER-CATHODE VOLTAGE: | | |
| Heater negative with respect to cathode | 200*max | volts |
| Heater positive with respect to cathode | 200 max | volts |
| Characteristics: | | |
| Plate Supply Voltage | 150 | volts |
| | 56 | |
| Cathode-Bias Resistor | | ohms |
| Amplification Factor | 43 | |
| Plate Resistance (Approx.) | 4600 | ohms |
| Transconductance | 9300 | μmhos |
| Plate Current | 18 | ma |
| Grid Voltage (Approx.) for plate current of 10 µa | -11 | volts |
| | | |
| * In cathode-drive circuits with direct-coupled drive, it is permissible for this | voltage to be a | s high as |

300 volts under cutoff conditions.

The dc component must not exceed 100 volts.

HALF-WAVE VACUUM RECTIFIER


Glass octal type used as a damper tube in horizontal deflection circuits of color television receivers. Maximum dimensions: over-all length, 4-5/8 inches; seated height, 4-1/16 inches; diameter, 1-5/8 inches. Tube requires octal socket. Heater volts (ac/dc), 6.3; amperes, 3. Maximum ratings for damper service: peak inverse plate volts (absolute maximum), 4500 maz; peak plate ma., 1200 maz; dc plate ma., 200



max; plate dissipation, 8 max watts; peak heater-cathode volts, 4500 absolute max when heater is negative with respect to cathode (dc component must not exceed 900 volts); 300 max when heater is positive with respect to cathode (dc component must not exceed 100 volts). This is a DISCONTINUED type listed for reference only.

MEDIUM-MU TWIN TRIODE

Glass octal types used as combined $\[mathbb{KT_2(3)}\]$ vertical deflection amplifier and vertical deflection oscillator in television $\[mathbb{PT_2(2)}\]$ receivers. When so operated, it is recommended that unit No.1 (pins 4,



5, and 6) be used as the oscillator. Outline 14C, OUTLINES SECTION. Tubes require octal socket and may be mounted in any position. Type 6BL7-GT is a DISCONTINUED type listed for reference only.

| HEATER VOLTAGE (AC/DC) | | 6.3 | volts |
|---|------------|------------|---------|
| HEATER CURRENT | | 1.5 | amperes |
| DIRECT INTERELECTRODE CAPACITANCES (Approx.): | Unit No. 1 | Unit No. 2 | |
| Grid to Plate | 6 | 6 | pf |
| Grid to Cathode and Heater | 4.2 | 4.6 | pf |
| Plate to Cathode and Heater | 0.9 | 0.9 | pf |
| AMPLIFICATION FACTOR* | | 15 | |
| PLATE RESISTANCE (Approx.)* | | 2150 | ohms |
| TRANSCONDUCTANCE* | | 7000 | μmhos |
| * Each unit; for plate volts, 250; grid volts, -9; plate ma., 40. | | | |

VERTICAL DEFLECTION OSCILLATOR OR AMPLIFIER*

For operation in a 525-line, 30-frame system

| Maximum Ratings, (Design-Center Values): | Oscillator | Amplifier | |
|---|------------|------------|-------|
| DC PLATE VOLTAGE | 500 max | 500 max | volts |
| PEAK POSITIVE-PULSE PLATE VOLTAGE [†] (Absolute Maximum) | | 2000 * max | volts |
| PEAK NEGATIVE-PULSE GRID VOLTAGE | -400 max | -250 max | volts |
| PEAK CATHODE CURRENT | 210 max | 210 max | ma |
| AVERAGE CATHODE CURRENT | 60 max | 60 max | ma |

6BL4

6BL7GT

6BL7GTA

Technical Data =

| PLATE DISSIPATION: | | | |
|---|-----------------|------------------|---------|
| For either plate | 10 max | 10 max | watts |
| For both plates with both units operating | 12 max | 12 max | watts |
| PEAK HEATER-CATHODE VOLTAGE: | | | |
| Heater negative with respect to cathode | 200 max | 200 max | volts |
| Heater positive with respect to cathode | 200 m ax | 200 = max | volts |
| Maximum Circuit Values: | | | |
| Grid-Circuit Resistance | 4.7 max | 4.7#max | megohms |


• Unless otherwise specified, values are for each unit.

† The duration of the voltage pulse must not exceed 15 per cent of one vertical scanning cycle. In a 525-line, 30-frame system, 15 per cent of one vertical scanning cycle is 2.5 milliseconds.

^{*} Under no circumstances should this absolute value be exceeded.

The dc component must not exceed 100 volts.

For cathode-bias operation.



MEDIUM-MU TRIODE— SHARP-CUTOFF PENTODE

Miniature type used in frequencychanger service in television receivers. Outline 8B, OUTLINES SECTION. Tube requires miniature nine-contact socket and may be mounted in any

OBL8 Related type: 4BL8

position. Heater volts (ac/dc), 6.3; amperes, 0.45.

CLASS A1 AMPLIFIER

| | Triode | Pentode | |
|---|---------|----------|--------|
| Maximum Ratings, (Design-Center Values): | Unit | Unit | |
| PLATE SUPPLY VOLTAGE | 550 max | 550 max | volts |
| PLATE VOLTAGE | 250 max | 250 max | volts |
| GRID-NO.2 (SCREEN-GRID) SUPPLY VOLTAGE | - | 550 max | volts |
| GRID-NO.2 VOLTAGE: | | | |
| With cathode current of 14 ma | - | 175 max | volts |
| With cathode current less than 10 ma | - | 200 max | volts |
| CATHODE CURRENT. | 14 max | 14 max | ma |
| GRID-NO.2 INPUT: | | | |
| With plate dissipation greater than 1.2 watts | - | 0.5 max | watt |
| With plate dissipation less than 1.2 watts | - | 0.75 max | watt |
| PLATE DISSIPATION. | 1.5 max | 1.7 max | watts |
| PEAK HEATER-CATHODE VOLTAGE: | | | |
| Heater negative with respect to cathode | 100 max | 100 max | volts |
| Heater positive with respect to cathode | 100 max | 100 max | volts |
| Characteristics: | | | |
| Plate Voltage | 100 | 170 | volts |
| Grid-No.2 Voltage | - | 170 | volts |
| Grid-No.1 Voltage | -2 | -2 | volts |
| Amplification Factor | 20 | - | |
| Mu-Factor, Grid No.2 to Grid No.1 | - | 47 | |
| Plate Resistance (Approx.) | - | 0.4 | megohm |
| Transconductance | 5000 | 6200 | μmhos |
| Plate Current | 14 | 10 | ma |
| Grid-No.2 Current. | _ | 2.8 | ma |
| Input Resistance at frequency of 50 Mc | - | 0.01 | megohm |
| Equivalent Noise Resistance | - | 1500 | ohms |
| | | | |
| Maximum Circuit Values: | | | |
| Grid-No.1-Circuit Resistance: | | | |
| For fixed-bias operation | 0.5 max | 0.5 max | megohm |
| For cathode-bias operation | 0.5 max | 1 max | megohm |



MEDIUM-MU TRIODE

Miniature types used as rf amplifier tubes in grid-drive circuits of vhf television tuners. The double base-pin connections for both cathode and grid reduce effective lead inductance and 6BN4 6BN4A Related types: 2BN4A, 3BN4A

lead resistance with consequent reduction in input conductance. In addition, the basing arrangement facilitates isolation of input and output circuits and permits short, direct connections to base-pin terminals. Outline 7B, OUTLINES SECTION. Tubes require miniature seven-contact socket and may be mounted in any position. Type 6BN4 is a DISCONTINUED type listed for reference only.

| Heater Voltage (ac/dc) | $\begin{array}{c} 6.3\\ 0.2 \end{array}$ | volts ampere |
|---|--|-----------------|
| DIRECT INTERELECTRODE CAPACITANCES (Approx.):* Grid to Plate. Grid to Cathode and Heater. | 1.2 3.2 | pf |
| Plate to Cathode and Heater * With external shield connected to cathode. | 1.4 | pf |

CLASS A1 AMPLIFIER

| Maximum Ratings, (Design-Center Values): | | | |
|--|------|-----|-------|
| PLATE VOLTAGE | 275 | max | volts |
| GRID VOLTAGE, Positive-bias value | 0 | max | volts |
| PLATE DISSIPATION | 2.2 | max | watts |
| CATHODE CURRENT. | 22 | max | ma |
| PEAK HEATER-CATHODE VOLTAGE: | | | |
| Heater negative with respect to cathode | 100 | max | volts |
| Heater positive with respect to cathode | 100 | max | volts |
| Characteristics: | | | |
| Plate-Supply Voltage | 150 | | volts |
| Cathode-Bias Resistor | 220 | | ohms |
| Amplification Factor | 43 | | |
| Plate Resistance (Approx.) | 5400 | | ohms |
| Transconductance | 7700 | | μmhos |
| Grid Voltage (Approx.) for plate current of 100 µa | -6 | | volts |
| Plate Current | 9 | | ma |
| Maximum Circuit Value: | | | |

Grid-Circuit Resistance..... 0.5 max megohm



Pelated type:

8BN8

BEAM TUBE limiter, discriminator, and audio-volt-

age amplifier in intercarrier television

and FM receivers. Outline 7C, OUT-

Miniature type used as combined

Ga


LINES SECTION. Tube requires miniature seven-contact socket and may be mounted in any position. Heater volts (ac/dc), 6.3; amperes, 0.3.

LIMITER AND DISCRIMINATOR SERVICE

| Maximum Ratings, (Design-Maximum Values): | | |
|---|------------------|-------|
| PLATE-SUPPLY VOLTAGE. | 330 max | volts |
| GRID-NO.2 VOLTAGE. | 110 max | voits |
| GRID-NO.1 VOLTAGE, Positive peak value | 60 max | volts |
| CATHODE CURRENT. | 13 max | ma |
| PEAK HEATER CATHODE VOLTAGE: | | |
| Heater negative with respect to cathode | 200 max | volts |
| Heater positive with respect to cathode | $200^{\circ}max$ | volts |
| ° The dc component must not exceed 100 volts. | | |

TWIN DIODE—HIGH-MU TRIODE

Miniature type used in a wide variety of applications in color and black-and-white television receivers. This type has a controlled heater warm-up time for use in receivers em-



ploying series-connected heater strings. The triode unit is used in burst-amplifier. af amplifier, and low-frequency oscillator applications. The diode units are used in phase-detector, ratio-detector or discriminator, and horizontal AFC discriminator circuits. Outline 8D, OUTLINES SECTION. Tube requires miniature ninecontact socket and may be mounted in any position.

| | 6.3 volts |
|--|--------------------------|
| | 0.6 ampere 11 seconds |
| HEATER WARM-UP TIME (Average) DIRECT INTERELECTRODE CAPACITANCES: | 11 seconds |
| Triode Grid to Triode Plate | 2.5 pf |
| | 3.6 pf |
| | .25 pf |
| | .06 max pf |
| | 0.1 max pf |
| | .07 max pf |
| Diode Cathode to All Other Electrodes (Each Diode Unit) | 5 pf |
| | 1.9 pf |
| Diode Cathode to Diode Plate and Heater (Each Diode Unit) | 4.8 pf |
| Diode Plate to All Other Electrodes (Each Diode Unit) | 3 pf |

TRIODE UNIT AS CLASS A1 AMPLIFIER


Maximum Ratings, (Design-Maximum Values):

,

| PLATE VOLTAGE. GRID VOLTAGE. PLATE DISSIPATION PBAK HEATER-CATHODE VOLTAGE: Heater negative with respect to cathode. Heater positive with respect to cathode. | 330 max 0 max 1.7 max 200 max 200 max | volts watts volts volts |
|--|---|--|
| Characteristics: | | |
| Plate Voltage 100 Grid Voltage -1 Amplification Factor 75 Plate Resistance (Approx.) 21000 Transconductance 3500 Grid Voltage (Approx.) for plate current of 10 μa. -2.5 Plate Current 1.5 | $250 \\ -3 \\ 70 \\ 28000 \\ 2500 \\ -5.5 \\ 1.6$ | volts volts µmhos volts ma |
| Maximum Circuit Value: Grid-Circuit Resistance | 1.0 max | megohm |
| DIODE UNITS | | |
| Maximum Ratings, (Design-Maximum Values): | | |


| PLATE CURRENT (Each Unit): | | |
|---|------------------|-------|
| Peak | 54 max | ma |
| DC | 9 max | ma |
| PEAK HEATER-CATHODE VOLTAGE: | | |
| Heater negative with respect to cathode | 200 max | volts |
| Heater positive with respect to cathode | 200 = max | volts |
| The dc component must not exceed 100 volts. | | |



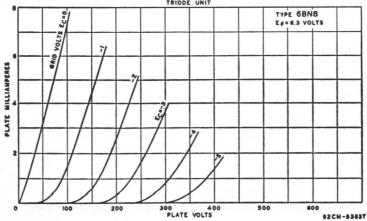

POWER PENTODE

6BQ5 Related type: 8BQ5 Miniature type used in the output stage of audio-frequency amplifiers. Outline 8E, OUTLINES SECTION. Tube requires miniature nine-contact socket and may be mounted in any position.



| HEATER VOLTAGE (AC/DC) | 6.3 | volts |
|--|----------|--------|
| HEATER CURRENT | 0.76 | ampere |
| DIRECT INTERELECTRODE CAPACITANCES: | | |
| Grid No.1 to Plate | 0.5 max | pf |
| Grid No.1 to Cathode. Heater, Grid No.2, and Grid No.3 | 10.8 | pf |
| Plate to Cathode, Heater, Grid No.2, and Grid No.3 | 6.5 | pf |
| Grid No.1 to Heater | 0.25 max | pf |


CLASS A1 AMPLIFIER

| Maximum Ratings, (Design-Center Values): | | | |
|---|------|----------------------|----------|
| PLATE VOLTAGE. | | 300 max | volts |
| GRID-No.2 (SCREEN-GRID) VOLTAGE | | 300 max | volts |
| GRID-NO.1 (CONTROL-GRID) VOLTAGE, Positive-bias value | | 0 max | volts |
| GRID-No.2 INPUT. | | 2 max | watts |
| PLATE DISSIPATION | | 12 max | watts |
| CATHODE CURRENT | | 65 max | ma |
| PEAK HEATER-CATHODE VOLTAGE: | | 65 max | ma |
| Heater negative with respect to cathode | | 100 max | volts |
| Heater positive with respect to cathode | | 100 ⁴ max | volts |
| The dc component must not exceed 100 volts. | | 100 max | VOICE |
| | | | |
| Typical Operation: | | | |
| Plate Voltage | | 250 | volts |
| Grid-No.2 Voltage | | 250 | volts |
| Grid-No.1 (Control-Grid) Voltage | | -7.3 | volts |
| Peak AF Grid-No.1 Voltage | | 6.2 | volts |
| Zero-Signal Plate Current | | 48 | ma |
| Maximum-Signal Plate Current | | 50.6 | ma |
| Zero-Signal Grid-No.2 Current. | | 5.5 | ma |
| Maximum-Signal Grid-No.2 Current | | 10 | ma |
| Plate Resistance (Approx.) | | 38000 | ohms |
| Transconductance | | 11300 | μmhos |
| Load Resistance. | | 4500 | ohms |
| Total Harmonic Distortion | | 10 | per cent |
| Maximum-Signal Power Output. | | 5.7 | watts |
| | | 0.1 | watts |
| Maximum Circuit Values: | | | |
| Grid-No.1-Circuit Resistance: | | | |
| For fixed-bias operation | | 0.3 max | megohm |
| For cathode-bias operation | | 1.0 max | megohm |
| | | | |
| PUSH-PULL CLASS AB1 AMPLIFI | ER | | |
| Maximum Ratings: (Same as for single-tube class A ₁ amplifier) | | | |
| Typical Operation, (Values are for two tubes): | | | |
| Plate Supply Voltage | 250 | 300 | volts |
| Grid-No.2 Supply Voltage | 250 | 300 | volts |
| Cathode-Bias Resistor | 130 | 130 | |
| Peak AF Grid-No.1-to-Grid-No.1 Voltage | | | ohms |
| | 22.6 | 28.3 | volts |
| Zero-Signal Plate Current | 62 | 72 | ma |
| Maximum-Signal Plate Current. | 75 | 92 | ma |
| Zero-Signal Grid-No.2 Current | 7 | 8 | ma |
| Maximum-Signal Grid-No.2 Current | 15 | 22 | ma |
| Effective Load Resistance (Plate-to-plate) | 8000 | 8000 | ohms |
| Total Harmonic Distortion | 3 | 4 | per cent |
| Maximum-Signal Power Output | 11 | 17 | watts |
| Maximum Circuit Values: | | | |
| Grid-No.1-Circuit Resistance: | | | |
| | | 0.0 | |

 For fixed-bias operation
 0.3 max
 megohm

 For cathode-bias operation
 1.0 max
 megohm

Technical Data



BEAM POWER TUBE

Glass octal types used as horizontal deflection amplifiers in television receivers. Outline 15C, OUT-LINES SECTION. Tubes require octal socket and may be mounted in any position. These types may be supplied with pin No.1 omitted. Type 6BQ6-GT is a DISCONTINUED type listed for reference only.

6BQ6GT 6BQ6GTB /6CU6

Related types: 12BQ6GTB/12CU6, 17BQ6-GTB, 25BQ6GTB/25CU6

| HEATER VOLTAGE (AC/DC) | 6.3 | volts |
|--|------|---------|
| HEATER CURRENT | 1.2 | amperes |
| DIRECT INTERELECTRODE CAPACITANCES (Approx., 6BQ6-GTB/6CU6): | | |
| Grid No.1 to Plate | 0.6 | pf |
| Grid No.1 to Cathode, Heater, Grid No.2, and Grid No.3 | 15 | pf |
| Plate to Cathode, Heater, Grid No.2, and Grid No.3 | | pf |
| TRANSCONDUCTANCE* ($6BQ6-GTB/6CU6$) | 5900 | μmhos |
| MU-FACTOR, Grid No.2 to Grid No.1** | 4.3 | |


* For plate volts, 250; grid-No.2 volts, 150; grid-No.1 volts, -22.5; plate ma., 57; grid-No.2 ma., 2.1.
** For plate and grid-No.2 volts, 150; grid-No.1 volts, -22.5.

HORIZONTAL DEFLECTION AMPLIFIER

| For operation in a 525-line, 30-fr | ame system | | |
|--|--------------------|-------------------|-------|
| Maximum Ratings, (Design-Center Values): | 6BQ6-GT | 6BQ6-GTB/6CU6 | |
| DC PLATE VOLTAGE | 550 max | 600 max | volts |
| PEAK POSITIVE-PULSE PLATE VOLTAGE (Absolute Maximum) | $5500 \dagger max$ | $6000\dagger max$ | volts |
| PEAK NEGATIVE-PULSE PLATE VOLTAGE | -1250 max | -1250 max | volts |
| DC GRID-NO.2 (SCREEN-GRID) VOLTAGE | 175 max | 200 max | volts |
| PEAK NEGATIVE-PULSE GRID-NO.1 (CONTROL-GRID) VOLTAGE | -300 max | -300 max | volts |
| PEAK CATHODE CURRENT | 400 max | 400 max | ma |
| AVERAGE CATHODE CURRENT | 110 max | 110 max | ma |
| GRID-NO.2 INPUT. | 2.5 max | 2.5 max | watts |
| PLATE DISSIPATION# | 11 max | 11 max | watts |
| PEAK HEATER-CATHODE VOLTAGE: | 000 | 200 | |
| Heater negative with respect to cathode | 200 max | 200 max | volts |
| Heater positive with respect to cathode | 200 max | 200 max | volts |
| BULB TEMPERATURE (At hottest point) | 220 max | 220 max | °C |
| Maximum Circuit Value | | | |

Maximum Circuit Value:

#An adequate bias resistor or other means is required to protect the tube in the absence of excitation. The dc component must not exceed 100 volts.



MEDIUM-MU TWIN TRIODE

Miniature types used in directcoupled cathode-drive rf amplifier circuits of vhf television tuners. In such circuits, one triode unit is used as the direct-coupled grounded-cathode driv-



megohm

er for the other unit. These types are also used in push-pull cathode-drive rf amplifiers. Outline 8B, OUTLINES SECTION. Tubes require miniature nine-contact socket and may be mounted in any position. For typical operation as a resistance-coupled amplifier, refer to RESISTANCE-COUPLED AMPLIFIER SECTION. Type 6BQ7 is a DISCONTINUED type listed for reference only.

| HEATER VOLTAGE (AC/DC) | 6.3 | volts |
|---|-----------|--------|
| HEATER CURRENT. | 0.4 | ampere |
| DIRECT INTERELECTRODE CAPACITANCES (6BQ7-A): ^o Unit No.1 | Unit No.2 | |
| Grid to Plate 1.2 | 1.2 | pf |
| Grid to Cathode, Heater, and Internal Shield 2.6 | - | pf |
| Cathode to Grid. Heater, and Internal Shield | 5.0 | pf |
| Plate to Cathode, Heater, and Internal Shield 1.2 | - | pf |
| Plate to Grid, Heater, and Internal Shield | 2.2 | pf |
| Plate to Cathode | 0.12 | pf |
| Heater to Cathode (6BQ7-A) 2.6 | 2.6 | pf |
| Plate of Unit No.1 to Plate of Unit No.2 | nax | pf |
| Plate of Unit No.2 to Plate and Grid of Unit No.1 0.024 n | | pf |


CLASS A1 AMPLIFIER (Each Unit)

| Maximum Ratings, (Design-Center Values): PLATE SUPPLY VOLTAGE. PLATE DISSIPATION. CATHODE CURRENT. PBAK HEATER-CATHODE VOLTAGE: Heater negative with respect to cathode. Heater positive with respect to cathode. | | 250*max 2 max 20 max 200*max 200 = max | volts watts ma volts |
|---|---|---|--------------------------------------|
| Plate Supply Voltage. Cathode-Bias Resistor Amplification Factor. Plate Resistance (Approx.) | 6BQ7 150 220 35 5800 6000 9 | 6BQ7-A 150 220 38 5900 6400 9 | volts ohms ohms µmhos ma |
| For plate current of $100 \ \mu a$ For plate current of $10 \ \mu a$ | -10 | -6.5 | volts |
| Maximum Circuit Value: Grid-Circuit Resistance | | 0.5 max | megohm |

° With external shield connected to internal shield.

* In cathode-drive circuits with direct-coupled drive, it is permissible for this voltage to be as high as 300 volts.


The dc component must not exceed 100 volts.

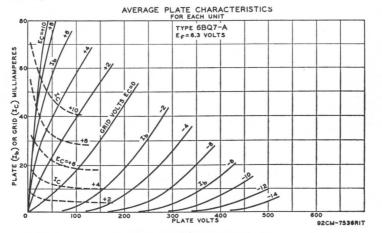

6BR8 6BR8A Related type: 5BR8

MEDIUM-MU TRIODE— SHARP-CUTOFF PENTODE

Miniature types used in a wide variety of applications in color and black-and-white television receivers. Especially useful as combined triode oscillator and pentode mixer in vhf



television tuners. Type 6BR8-A has a controlled heater warm-up time for use in receivers employing series-connected heater strings. Outline 8B, OUTLINES SECTION. Except for basing arrangement and grid-No.1-to-plate capacitance of pentode unit, these types are identical with miniature types 6U8 and 6U8-A, respectively.

HALF-WAVE VACUUM RECTIFIER

Novar type used as damper tube in horizontal-deflection circuits of black-and-white television receivers. Outline 10D, OUTLINES SECTION. Tube requires novar nine-contact sock-



Related types: 12BS3, 17BS3

= Technical Data =

et and may be mounted in any position. Socket terminals 1, 3, 6, and 8 should not be used as tie points; it is recommended that socket clips for these pins be removed to reduce the possibility of arc-over and to minimize leakage. It is especially important that this tube, like other power-handling tubes, be adequately ventilated.

| , | it and it can be a contraction of the contraction o | 10000 |
|---|--|----------------------------|
| HEATER VOLTAGE (AC /DC). HEATER CURRENT DIRECT INTERELECTRODE CAPACITANCES (Approx.): | 6.3 1.2 | volts amperes |
| Plate to Cathode and Heater. Cathode to Plate and Heater. Heater to Cathode. | 6.5 9 2.8 | pf pf |
| DAMPER SERVICE | | |
| For operation in a 525-line, 30-frame system | | |
| Maximum Ratings, (Design-Maximum Values): | | |
| PEAK INVERSE PLATE VOLTAGE [®] . PEAK PLATE CURRENT. DC PLATE CURRENT. PLATE DISSIPATION. PEAK HEATER-CATHODE VOLTAGE: | 5000 max 1100 max 200 max 6 max | volts ma ma watts |
| Heater negative with respect to cathode Heater positive with respect to cathode | 5000 • max 300 □ max | volts volts |

Characteristics, Instantaneous Value:


 Tube Voltage Drop for plate current of 140 ma
 12
 volts

 The duration of the voltage pulse must not exceed 15 per cent of one horizontal scanning cycle. In a

525-line, 30-frame system, 15 per cent of one horizontal scanning cycle is 10 microseconds. • The dc component must not exceed 900 volts.

^D The dc component must not exceed 100 volts

MEDIUM-MU TWIN TRIODE




Miniature type used in directcoupled cathode-drive rf amplifier circuits of vhf television tuners. In such circuits, one triode unit is used as the direct-coupled grounded-cathode driv6BS8 Related type: 4BS8

er for the other unit. This type is also used in push-pull cathode-drive rf amplifiers. Outline 8B, OUTLINES SECTION. Tube requires miniature nine-contact socket and may be mounted in any position. Heater volts (ac/dc), 6.3; amperes, 0.4.

CLASS A1 AMPLIFIER (Each Unit)

| Maximum Ratings, (Design-Center Values): | | |
|---|--|---------------------------------------|
| PLATE VOLTAGE. | 150 max | volts |
| PLATE DISSIPATION | 2 max | watts |
| CATHODE CURRENT. | 20 max | ma |
| PEAK HEATER-CATHODE VOLTAGE: | | |
| Heater negative with respect to cathode | 200 max | volts |
| Heater positive with respect to cathode | 200 max | volts |
| Characteristics: Plate-Supply Voltage. Cathode-Bias Resistor Amplification Factor. Plate Resistance (Approx.) Transconductance. Plate Current. Grid Voltage (Approx.) for plate current of 10 µa*. | $150 \\ 220 \\ 36 \\ 5000 \\ 7200 \\ 10 \\ -7$ | volts ohms µmhos ma volts |
| Maximum Circuit Value: | | |
| Grid-Circuit Resistance | 0.5 max | megohm |

* This value applies to unit No.2 only.



SHARP-CUTOFF TWIN PENTODE

Miniature type used as combined sync separator, sync clipper, and agc amplifier tube in television receivers. Outline 8D, OUTLINES SECTION. Tube requires miniature nine-contact socket and may be mounted in any position.




| HEATER VOLTAGE (AC/DC) | 6.3 | volts |
|--|-----------|--------|
| HEATER CURENT. | 0.3 | ampere |
| DIRECT INTERELECTRODE CAPACITANCES: | | |
| Grid No.3 to Plate (Each Unit) | 1.9 | pf |
| Grid No.1 to All Other Electrodes | 6 | pf |
| Grid No.3 to All Other Electrodes (Each Unit) | 3.6 | pf |
| Plate to All Other Electrodes (Each Unit) | 3 | pf |
| Grid No.3 of Unit No.1 to Grid No.3 of Unit No.2 | 0.015 max | pf |

CLASS A1 AMPLIFIER

| Maximum Ratings, (Design-Maximum Values): | | | |
|--|------|----------|-------|
| PLATE VOLTAGE (Each Unit) | | 300 max | volts |
| GRID-NO.3 (SUPPRESSOR-GRID) VOLTAGE (Each Unit): | | | |
| Peak positive value | | 50 max | volts |
| DC negative value | | -50 max | volts |
| DC positive value | | 3 max | volts |
| GRID-NO.2 (SCREEN-GRID) VOLTAGE | | 150 max | volts |
| GRID-NO.1 (CONTROL-GRID) VOLTAGE, Negative bias value | | -50 max | volts |
| CATHODE CURRENT | | 12 max | ma |
| GRID-NO.2 INPUT | | 0.75 max | watt |
| PLATE DISSIPATION (Each Unit). | | 1.1 max | watts |
| PEAK HEATER-CATHODE VOLTAGE: | | | |
| Heater negative with respect to cathode | | 200 max | volts |
| Heater positive with respect to cathode | | 200 max | volts |
| | | | |
| Characteristics: With Both Units Operating | | | |
| Plate Voltage (Each Unit) | 100 | 100 | volts |
| Grid-No.3 Voltage (Each Unit) | -10 | 0 | volts |
| Grid-No.2 Voltage | 67.5 | 67.5 | volts |
| Grid-No.1 Voltage | * | 0 | volts |
| Plate Current (Each Unit) | - | 2.2 | ma |
| Grid-No.2 Current | 6.5 | 3.3 | ma |
| Cathode Current | 6.6 | 7.8 | ma |
| | | | |
| With One Unit Operating [†] | | | |
| Plate Voltage | 100 | 100 | volts |
| Grid-No.3 Voltage | 0 | 0 | volts |
| Grid-No.2 Voltage | 67.5 | 67.5 | volts |
| Grid-No.1 Voltage | 0 | * | volts |
| Grid-No.3 Transconductance | - | 180 | µmhos |
| Grid-No.1 Transconductance | 1500 | - | µmhos |
| Plate Current | - | 2.2 | ma |
| Grid-No.3 Voltage (Approx.) for plate current of 100 μ a | - | -4.5 | volts |
| Grid-No.1 Voltage (Approx.) for plate current of 100 µa | - | -2.3 | volts |
| | | | |

AVERAGE CHARACTERISTICS

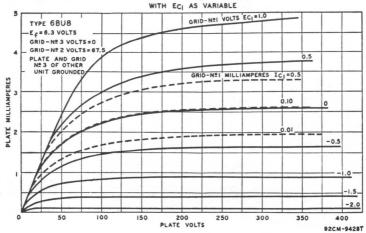


— Technical Data =


Maximum Circuit Values:

The dc component must not exceed 100 volts.

* Adjusted to give a dc grid-No.1 current of 100 microamperes.

† With plate and grid No.3 of the other unit connected to ground.

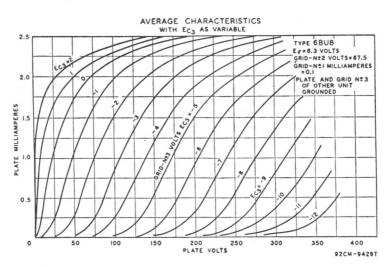



Miniature type used as combined synchronous detector and chrominance amplifier in color television receivers; also used as combined FM detector and af voltage amplifier. Tube has con-

6BV8

trolled warm-up time for use in series-connected heater strings. Outline 8B, OUT-LINES SECTION. Tube requires miniature nine-contact socket and may be operated in any position. Heater volts (ac/dc), 6.3; amperes, 0.6; warm-up time (average), 11 seconds.

TRIODE UNIT AS CLASS A1 AMPLIFIER

| Maximum Ratings, (Design-Maximum Values): | | | |
|---|----|------------------|--------|
| PLATE VOLTAGE | | 330 max | volts |
| GRID VOLTAGE, Positive-bias value | | 0 max | volts |
| PLATE DISSIPATION | | 2.7 max | watts |
| PEAK HEATER-CATHODE VOLTAGE: | | | |
| Heater negative with respect to cathode | | 200 max | volts |
| Heater positive with respect to cathode | | $200^{\circ}max$ | volts |
| Characteristics: | | | |
| Plate Voltage | 75 | 200 | volts |
| Grid Voltage | 0 | - | volts |
| Cathode Resistor | - | 330 | ohms |
| Amplification Factor | - | 33 | 011110 |
| Plate Resistance (Approx.) | - | 5900 | ohms |
| Transconductance | - | 5600 | µmhos |
| Plate Current | 14 | 11 | ma |
| Grid Voltage (Approx.) for plate current of 100 µa | - | -11 | volts |
| Maximum Circuit Values: Grid-Circuit Resistance: | | | |
| For fixed-bias operation | | 0.1 max | megohm |
| For cathode-bias operation. | | 0.5 max | megohm |
| | | | 193 |

DIODE UNITS_TWO

Values are for each unit


| Maximum Katings, (Design-Maximum Values): | | |
|--|------------------|-------|
| PLATE CURRENT | 10 max | ma |
| PEAK HEATER-CATHODE VOLTAGE: | | |
| Heater negative with respect to cathode | 200 max | volts |
| Heater positive with respect to cathode | $200^{\circ}max$ | volts |
| Characteristics, Instantaneous Test Condition: | | |
| Tube Voltage Drop for plate current of 23 ma | 5 | volts |
| ° The dc component must not exceed 100 volts. | | |

FULL-WAVE VACUUM RECTIFIER

Related type: 12BW4

> Related type: 5**BW**8

Miniature type used in full-wave power supplies having high dc output current requirements. Outline 8D, **OUTLINES SECTION. Type 6BW4** requires miniature nine-contact socket



and may be mounted in any position. It is especially important that this tube, like other power-handling tubes, be adequately ventilated. Heater volts (ac/dc), 6.3; amperes, 0.9.


| FUL | L- W A \ | /E RE | CTIF | ER |
|-----|----------|-------|------|----|
| | | | | |

| Maximum Ratings, (Design-Center Values): | | | |
|---|-----------|----------|---------|
| PEAK INVERSE PLATE VOLTAGE | | 1275 max | volts |
| AC PLATE SUPPLY VOLTAGE (Per Plate, rms) | | 450 max | volts |
| STEADY-STATE PEAK PLATE CURRENT (Per Plate) | | 350 max | ma |
| DC OUTPUT CURRENT | | 62.5 max | ma |
| TRANSIENT PEAK PLATE CURRENT (Per Plate) | | 2 max | amperes |
| DC HEATER-CATHODE VOLTAGE: | | | |
| Heater negative with respect to cathode | | 450 max | volts |
| Typical Operation: Filter Input | Capacitor | Choke | |
| AC Plate-To-Plate Supply Voltage (rms) [*] | 650 | 900 | volts |
| Filter Input Capacitor. | 40 | - | μf |
| Total Effective Plate Supply Resistance per Plate | | - | ohms |
| Filter Input Choke | | 10 | henries |
| DC Output Current. | 100 | 100 | ma |
| DC Output Voltage at Input to Filter (Approx.) AC plate supply voltage is measured without load. | 330 | 360 | volts |
| | | | |

TWIN DIODE-

SHARP-CUTOFF PENTODE

Miniature type used in television receivers; diodes are used as horizontal phase detectors; pentode is used as a KDI sound if amplifier, sound limiter, and agc keyer. Outline 8B, OUTLINES



SECTION. Heater volts (ac/dc), 6.3; amperes, 0.45. Tube requires nine-contact socket and may be operated in any position.


PENTODE UNIT AS CLASS A1 AMPLIFIER

| Maximum Ratings, (Design-Maximum Values): | | |
|--|------------------|-----------|
| PLATE VOLTAGE. | 330 max | volts |
| GRID-NO.2 (SCREEN-GRID) SUPPLY VOLTAGE | 330 max | volts |
| GRID-NO.2 VOLTAGE. | See curv | e page 70 |
| GRID-NO.1 (CONTROL-GRID) VOLTAGE: | | |
| Positive-bias value | 0 max | volts |
| Negative-bias value | -55 max | volts |
| GRID-NO.2 INPUT: | | |
| For grid-No.2 voltages up to 165 volts | 0.55 max | watt |
| For grid-No.2 voltages between 165 and 330 volts | See curve | e page 70 |
| PLATE DISSIPATION. | 3 max | watts |
| PEAK HEATER-CATHODE VOLTAGE: | | |
| Heater negative with respect to cathode | 200 max | volts |
| Heater positive with respect to cathode | $200^{\circ}max$ | volts |
| Characteristics: | | |
| Plate Voltage | 250 | volts |
| Grid-No.2 Voltage | 110 | volts |
| Cathode-Bias Resistor | 68 | ohms |
| Plate Resistance (Approx.). | 0.25 | megohm |
| | | |

— Technical Data =

| Transconductance. Grid-No.1 Voltage (Approx.) for plate current of 10µa. Plate Current. Grid-No.2 Current. | $5200 \\ -10 \\ 10 \\ 3.5$ | µmhos volts ma ma |
|---|----------------------------|----------------------------|
| Maximum Circuit Values: | | |
| Grid-No.1 Circuit Resistance: For fixed-bias operation For cathode-bias operation. | 0.1 max 0.5 max | megohm megohm |
| DIODE UNITS (Each Unit) | | |
| Maximum Ratings, (Design-Maximum Values): | | |
| PLATE CURRENT PEAK HEATER-CATHODE VOLTAGE: | 5 max | ma |
| Heater negative with respect to cathode Heater positive with respect to cathode | 200 max 200°max | volts volts |
| | | |

° The dc component must not exceed 100 volts.



MEDIUM-MU TWIN TRIODE

Glass octal type used as combined vertical deflection amplifier and vertical deflection oscillator in television receivers. When so operated, it is recommended that unit No.1 (pins 4,

5, and 6) be used as the oscillator. Outline 14C, OUTLINES SECTION. Tube requires octal socket and may be mounted in any position.

| HEATER VOLTAGE (AC/DC) | 6.3 | volts |
|-----------------------------|------|---------|
| HEATER CURRENT. | 1.5 | amperes |
| AMPLIFICATION FACTOR* | 10 | |
| PLATE RESISTANCE (Approx.)* | 1300 | ohms |
| TRANSCONDUCTANCE* | 7600 | μmhos |
| | | |

* For plate volts, 250; cathode-bias resistor, 390 ohms; plate ma., 42.

VERTICAL DEFLECTION OSCILLATOR OR AMPLIFIER (Each Unit)

For operation in a 525-line, 30-frame system

| Maximum Ratings, (Design-Center Values): | Oscillator | Amplifier | |
|---|------------|-----------------------|-------|
| DC PLATE VOLTAGE | 500 max | 500 max | volts |
| PEAK POSITIVE-PULSE PLATE VOLTAGE | | | |
| (Absolute Maximum)# | - | 2000 [*] max | volts |
| PEAK NEGATIVE-PULSE GRID VOLTAGE | -400 max | -250 max | volts |
| PEAK CATHODE CURRENT | 180 max | 180 max | ma |
| AVERAGE CATHODE CURRENT. | 60 max | 60 max | ma |
| PLATE DISSIPATION: | | | |
| For either plate | 10 max | 10 max | watts |
| For both plates with both units operating | 12 max | 12 max | watts |
| PEAK HEATER-CATHODE VOLTAGE: | | | |
| Heater negative with respect to cathode | 200 max | 200 max | volts |
| Heater positive with respect to cathode | 200° max | $200^{\circ}max$ | volts |
| | | | |

Maximum Circuit Values:

° The dc component must not exceed 100 volts.

For cathode-bias operation.

FULL-WAVE VACUUM RECTIFIER



Octal type having high perveance used as a damper tube in horizontal deflection circuits of television receivers or as a rectifier in conventional power-supply applications. Outline 19A, OUTLINES SECTION. Tube requires octal socket and may be mounted in any position. It is especially important that this tube, like other power-handling tubes, be adequately ventilated. Heater volts (ac/dc), 6.3; amperes, 1.6. Maxi-



6BX7GT

mum ratings for damper service (each unit): peak inverse plate volts (absolute maximum), 3000 max; peak plate ma., 525 max; dc plate ma., 175 max. Peak heater-cathode volts: heater negative with respect to cathode, 450 max; heater positive with respect to cathode, 100 max. This type is used principally for renewal purposes.

PENTAGRID AMPLIFIER

Miniature type used as a gated amplifier in color television receivers. In such service, it may be used as a combined sync separator and sync clipper. Outline 7B, OUTLINES SEC-



TION. Tube requires miniature seven-contact socket and may be mounted in any position.

| HEATER VOLTAGE (AC/DC) | 6.3 | volts |
|-------------------------------------|----------|---------------|
| HEATER CURRENT. | 0.3 | ampere |
| DIRECT INTERELECTRODE CAPACITANCES: | | |
| Grid No.1 to Plate | 0.08 max | \mathbf{pf} |
| Grid No.3 to Plate | 0.35 max | pf |
| Grid No.1 to Grid No.3. | 0.22 max | pf |
| Grid No.1 to All Other Electrodes | 5.4 | pf |
| Grid No.3 to All Other Electrodes | 6.9 | pf |
| Plate to All Other Electrodes | 7.6 | pf |
| Plate to All Other Electrodes | 7.6 | pf |

CLASS A1 AMPLIFIER

| Plate Voltage | 250 | volts |
|--|------|------------|
| Grids-No.2-and-No.4 Voltage | 100 | volts |
| Grid-No.3 Voltage | -2.5 | volts |
| Grid-No.1 Voltage | -2.5 | volts |
| Grid-No.3-to-Plate Transconductance | 500 | μmhos |
| Grid-No.1-to-Plate Transconductance | 1900 | μ mhos |
| Plate Current | 6.5 | ma |
| Grids-No.2-and-No.4 Current | 9 | ma |
| Grid-No.3 Volts (Approx.) for plate current of $35 \mu a$ and grid-No.1 volts = -4 | -15 | volts |
| Grid-No.1 Volts (Approx.) for plate current of $35 \mu a$ and grid-No.3 volts = 0 | -12 | volts |
| | | |

GATED AMPLIFIER

Maximum Ratings, (Design-Maximum Values):


6BY6

Related type: 3BY6

Characteristics:


| PLATE VOLTAGE | 330 max | volts |
|--|----------|------------|
| GRIDS-NO.2-AND-NO.4 VOLTAGE. | See curv | re page 70 |
| GRIDS-NO.2-AND-NO.4 SUPPLY VOLTAGE. | 330 max | volts |
| GRID-NO.3 VOLTAGE: | | |
| Negative bias value | -55 max | volts |
| Positive bias value | 0 max | volts |
| Positive peak value | 27 max | volts |
| GRID-NO.1 VOLTAGE, Negative bias value | -110 max | volts |
| PLATE DISSIPATION | 2.3 max | watts |
| GRID-NO.3 INPUT. | 0.1 max | watt |
| GRIDS-NO.2-AND-NO.4 INPUT: | | |
| For grids-No.2-and-No.4 voltages up to 165 volts | 1.1 max | watts |
| For grids-No.2-and-No.4 voltages between 165 and 330 volts | See curv | ve page 70 |

AVERAGE OPERATION CHARACTERISTICS

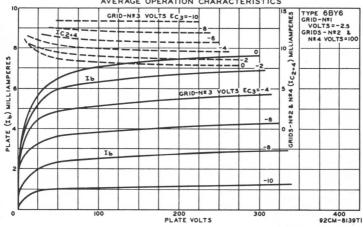

= Technical Data =

| GRID-No.1 INPUT. | 0.1 max | watt |
|--|------------------|--------|
| PEAK HEATER-CATHODE VOLTAGE: Heater negative with respect to cathode | 200 max | volts |
| Heater positive with respect to cathode | $200^{\circ}max$ | volts |
| Characteristics as Sync Separator and Sync Clipper: | | |
| Plate Voltage | 10 | volts |
| Grid-No.3 Voltage | 0 | volts |
| Grids-No.2-and-No.4 Voltage | 25 | volts |
| Grid-No.1 Voltage | 0 | volts |
| Plate Current | 1.4 | ma |
| Grids-No.2-and-No.4 Current. | 3.5 | ma |
| Grid-No.3 Volts (Approx.) for plate voltage of 25 volts, grids-No.2-and-No.4 | | |
| voltage of 25 volts, grid-No.1 voltage of 0 volts, and plate current of 50 μ a | -2.5 | volts |
| Grid-No.1 Volts (Approx.) for plate voltage of 25 volts, grids-No.2-and-No.4 | -2.3 | volts |
| voltage of 25 volts, grid-No.3 voltage of 0 volts, and plate current of 50 μ a | -2.0 | volts |
| Maximum Circuit Values: | | |
| Grid-No.1 or Grid-No.3-Circuit Resistance: | | |
| For fixed-bias operation | 0.5 max | megohm |
| For cathode-bias operation | 1.0 max | megohm |
| ° The dc component must not exceed 100 volts. | | |



The dc component must not exceed 100 volts.

DIODE— SHARP-CUTOFF PENTODE

Miniature type used in diversified applications in television receivers. The pentode unit is used as an rf amplifier and the high-perveance diode as a limiter or detector. This type has a

6BY8

controlled heater warm-up time for use in receivers employing series-connected heater strings. Outline 8D, OUTLINES SECTION. Tube requires miniature nine-contact socket and may be mounted in any position. Heater volts (ac/dc), 6.3; amperes, 0.6; warm-up time (average), 11 seconds.


PENTODE UNIT AS CLASS A1 AMPLIFIER

| Maximum Ratings, (Design-Center Values): | | |
|--|------------------|-----------|
| PLATE VOLTAGE | 300 max | volts |
| PLATE VOLTAGE. GRID-NO.3 (SUPPRESSOR-GRID) VOLTAGE, Positive value. | 0 max | volts |
| GRID-NO.2 (SCREEN GRID) SUPPLY VOLTAGE. | 300 max | volts |
| GRID-NO.2 VOLTAGE. | See curv | e page 70 |
| GRID-NO.1 (CONTROL-GRID) VOLTAGE: | | 1 0 |
| Negative bias value | -50 max | volts |
| Positive bias value. | 0 max | volts |
| PLATE DISSIPATION | 3 max | watts |
| GRID-NO-2 INPUT: | | |
| For grid-No.2 voltages up to 150 volts | 0.65 max | watt |
| For grid-No.2 voltages between 150 and 300 volts | See curv | e page 70 |
| PEAK HEATER-CATHODE VOLTAGE: | 000 | volts |
| Heater negative with respect to cathode | | volts |
| Heater positive with respect to cathode | 200- <i>max</i> | VOIUS |
| Characteristics: | | |
| Plate Supply Voltage 100 | 250 | volts |
| GRID NO.3 Cor | nnect to cathode | |
| Grid-No.2 Supply Voltage 100 | 150 | volts |
| Cathode-Bias Resistor | 68 | ohms |
| Plate Resistance (Approx.) | 1 | megohm |
| Transconductance | 5200 | µmhos |
| Grid-No.1 Voltage (Approx.) for plate current of 10 µa4.2 | -6.5 | volts |
| Plate Current | 10.6 | ma |
| Grid-No.2 Current | 4.3 | ma |
| Maximum Circuit Values: | | |
| Grid-No.1-Circuit Resistance: | | |
| For fixed-bias operation | | megohm |
| For cathode-bias operation | 1.0 max | megohm |
| The dc component must not exceed 100 volts. | | |
| DIODE UNIT | | |
| Maximum Ratings, (Design-Center Values): | | |
| PEAK INVERSE PLATE VOLTAGE | 430 max | volta |
| | | ma |
| PEAK PLATE CURRENT. | | |
| DC PLATE CURRENT. | . 40 max | ma |
| PEAK HEATER-CATHODE VOLTAGE: | 200 max | volts |
| Heater negative with respect to cathode | | volts |
| Heater positive with respect to cathode | . 200-max | VOILS |

197

SEMIREMOTE-CUTOFF PENTODE

Miniature type used in gain-controlled video if stages of television receivers. Outline 7B, OUTLINES SECTION. Tube requires miniature seven-contact socket and may be mounted in any position.



| mounted in any position. | | 0 | |
|--|-----------|-----------|------------|
| HEATER VOLTAGE (AC/DC) | | 6.3 | volts |
| HEATER CURRENT. | | 0.3 | ampere |
| | Without | With | |
| | External | External | |
| DIRECT INTERELECTRODE CAPACITANCES: | Shield | Shield | |
| Grid No.1 to Plate Grid No.1 to Cathode, Heater, Grid No.2, Grid No.3, and | 0.025 max | 0.015 max | pf |
| Internal Shield. | 7 | 7 | -6 |
| Plate to Cathode, Heater, Grid No.2, Grid No.3, and In- | 1 | 1 | pf |
| ternal Shield | 2 | 3 | pf |
| * With external shield connected to cathode. | 2 | 0 | pr |
| | | | |
| CLASS AL AMPLIFIE | ER | | |
| Maximum Ratings, (Design-Maximum Values): | | | |
| PLATE VOLTAGE. | | 330 max | volts |
| GRID NO.3 (SUPPRESSOR-GRID) VOLTAGE, Positive Value | | 0 max | volts |
| GRID-NO.2 (SCREEN-GRID) SUPPLY VOLTAGE | | 330 max | volts |
| GRID-NO.2 VOLTAGE. | | See cur | ve page 70 |
| GRID-NO.1 (CONTROL-GRID) VOLTAGE, Positive bias value | | 0 max | volts |
| PLATE DISSIPATION | | 2.3 max | watts |
| GRID-NO.2 INPUT: | | | |
| For grid-No.2 voltages up to 165 volts | | 0.55 max | watt |
| For grid-No.2 voltages between 165 and 330 volts | | See cur | ve page 70 |
| PEAK HEATER-CATHODE VOLTAGE: Heater negative with respect to cathode | | 200 max | volts |
| Heater positive with respect to cathode | | 200 max | volts |
| | | 200=1101 | VOILS |
| Characteristics: | | | |
| Plate Supply Voltage | | 125 | volts |
| Grid No.3 | Conne | | |
| Grid-No.2 Supply Voltage | | 125 | volts |
| Cathode-Bias Resistor | | 56 | ohms |
| Plate Resistance (Approx.) | | 0.26 | megohm |
| Transconductance. | | 8000 | μmhos |
| Grid-No.1 Voltage (Approx.) for transconductance of 50 μ ml Grid No.1 Voltage (Approx.) for transconductance of 700 μ m | | -19 | volts |
| cathode resistor of 0 ohms | nnos and | -4.5 | volts |
| Plate Current. | | 14 | ma |
| Grid-No.2 Current. | | 3.6 | ma |
| | | 0.0 | |
| Maximum Circuit Values: | | | |
| Grid-No.1-Circuit Resistance: | | 0.05 | |
| For fixed-bias operation | | 0.25 max | megohm |
| For cathode-bias operation | | 1.0 max | megohm |
| The de component must not exceed 100 welts | | | |


The dc component must not exceed 100 volts.

6**B**Z6


Related types:

3BZ6, 4BZ6, 12BZ6



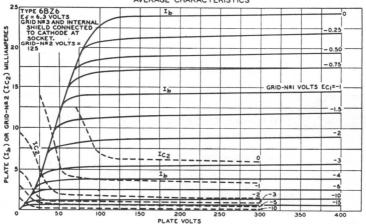

92CM-8508T3



MEDIUM-MU TWIN TRIODE

Miniature type used in directcoupled cathode-drive rf amplifier circuits of vhf television tuners. In such circuits, one triode unit is used as the direct-coupled grounded-cathode driv-



0.5 max

megohm

er for the other unit. This type is also used in push-pull cathode-drive rf amplifiers. Outline 8B, OUTLINES SECTION. Tube requires miniature nine-contact socket and may be mounted in any position. For typical operation as a resistance-coupled amplifier, refer to RESISTANCE-COUPLED AMPLIFIER SECTION. Heater volts (ac/dc), 6.3; amperes, 0.4.

CLASS A1 AMPLIFIER (Each Unit)


| Maximum Ratings, (Design-Center Values): | | |
|---|------------------------------|----------------------|
| PLATE VOLTAGE. PLATE DISSIPATION. CATHODE CURRENT. | 250*max 2.0 max 20 max | volts watts ma |
| PEAK HEATER-CATHODE VOLTAGE: Heater negative with respect to cathode | 200*max 200≡max | volts volts |
| * In cathode-drive circuits with direct-coupled drive, it is permissible for this 300 volts under cutoff conditions. ■ The dc component must not exceed 100 volts. | voltage to be as | s high as |
| Characteristics: | | |

| Plate Supply Voltage | 150 | volts |
|--|------|------------|
| Cathode-Bias Resistor | 220 | ohms |
| Amplification Factor | 36 | |
| Plate Resistance (Approx.) | 5300 | ohms |
| Transconductance | 6800 | μ mhos |
| Plate Current | 10 | ma |
| Grid Voltage (Approx.) for plate current of 100 µa | -7 | volts |
| Maximum Circuit Value: | | |


Grid-Circuit Resistance.

AVERAGE CHARACTERISTICS



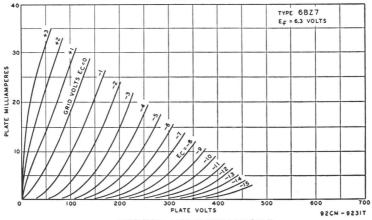

MEDIUM-MU TWIN TRIODE



Miniature type used in direct-coupled, cathode-drive, rf amplifier circuits in vhf television tuners. In such circuits, one triode unit is used as the direct-coupled, grounded-cathode driver for the other unit. Outline 8B, OUTLINES SEC-TION. Tube requires miniature nine-contact socket. Heater volts (ac/dc), 6.3; amperes, 0.4. Characteristics as class A_1 amplifier (each unit): plate supply volts, 125 (250 max); cathode-bias

6BZ8

resistor, 100 ohms; amplification factor, 45; plate resistance (approx.), 5600 ohms; transconductance, 8000 µmhos; plate ma., 10; cathode ma., 20 max; plate dissipation, 2.2 max watts; peak heater-cathode volts, 200 max. Type 6BZ8 is used principally for renewal purposes.

POWER TRIODE

Miniature type used in compact radio equipment as a local oscillator in FM and other high-frequency circuits. It may also be used as a class C rf amplifier. In such service, it delivers



a power output of 5.5 watts at moderate frequencies, and 2.5 watts at 150 megacycles per second. Outline 7B, OUTLINES SECTION. Tube requires miniature seven-contact socket and may be mounted in any position. For typical operation as a resistance-coupled amplifier, refer to RESISTANCE-COUPLED AMPLI-FIER SECTION. For additional curve of plate characteristics, refer to type 12AU7-A.

| HEATER VOLTAGE (AC/DC) | | 6.3 0.15 With | volts ampere |
|--|-----------------------------|------------------------------|------------------|
| | External | External | |
| DIRECT INTERELECTRODE CAPACITANCES (Approx.): Grid to Plate Grid to Cathode and Heater Plate to Cathode and Heater | Shield 1.6 1.8 1.3 | Shield▲ 1.4 1.8 2.5 | pf pf pf |
| * With external shield connected to cathode. | 1.0 | | Pr |
| CLASS A1 AMPLIFIER | | | |
| Maximum Ratings, (Design-Center Values): | | | |
| PLATE VOLTAGE. PLATE DISSIPATION PEAK HEATER-CATHODE VOLTAGE: | | 300 max 3.5 max | volts watts |
| Heater negative with respect to cathode | | 200 max 200∎max | volts |
| Characteristics: | | | 10110 |
| Plate Voltage | 100 | 250 | volts |
| Grid Voltage* Amplification Factor | 19.5 | -8.5 17 | volts |
| Plate Resistance (Approx.) | 6250 | 7700 | ohms |
| Transconductance | 3100 11.8 | 2200 10.5 | µmhos ma |
| Grid Voltage (Approx.) for plate current of 10 µa' | -10 | -25 | volts |
| * Transformer- or impedance-type input coupling devices are re the grid circuit. | ecommended | to minimize re | sistance in |
| Maximum Circuit Values: | | | |
| | | | |
| Grid-Circuit Resistance: | | | |
| Grid-Circuit Resistance: For fixed bias operation. For cathode-bias operation. | | 0.25 max 1.0 max | megohm megohm |
| For fixed bias operation. For cathode-bias operation. The dc component must not exceed 100 volts. | | | |
| For fixed bias operation . For cathode-bias operation . The dc component must not exceed 100 volts. AVERAGE PLATE CHARACTER | | | |
| For fixed bias operation. For cathode-bias operation. The dc component must not exceed 100 volts. | | | |
| For fixed bias operation. For cathode-bias operation. The dc component must not exceed 100 volts. AVERAGE PLATE CHARACTER | | | |
| For fixed bias operation . For cathode-bias operation . The dc component must not exceed 100 volts. AVERAGE PLATE CHARACTER 160 TYPE 6C4 Eq = 6.3 VOLTS | | | |
| For fixed bias operation . For cathode-bias operation . The dc component must not exceed 100 volts. AVERAGE PLATE CHARACTER 160 TYPE 6C4 Eq = 6.3 VOLTS | | | |
| For fixed bias operation . For cathode-bias operation . The dc component must not exceed 100 volts. AVERAGE PLATE CHARACTER 160 TYPE 6C4 Eq = 6.3 VOLTS | | | |
| For fixed bias operation . For cathode-bias operation . The dc component must not exceed 100 volts. AVERAGE PLATE CHARACTER 160 TYPE 6C4 Eq = 6.3 VOLTS | | | |
| For fixed bias operation . For cathode-bias operation . The dc component must not exceed 100 volts. AVERAGE PLATE CHARACTER 160 TYPE 6C4 Eq = 6.3 VOLTS | | | |
| For fixed bias operation . For cathode-bias operation . The dc component must not exceed 100 volts. AVERAGE PLATE CHARACTER 160 TYPE 6C4 Eq = 6.3 VOLTS | | | |
| For fixed bias operation . For cathode-bias operation . The dc component must not exceed 100 volts. AVERAGE PLATE CHARACTER 160 TYPE 6C4 Eq = 6.3 VOLTS | | | |
| For fixed bias operation . For cathode-bias operation . The dc component must not exceed 100 volts. AVERAGE PLATE CHARACTER 160 TYPE 6C4 Eq = 6.3 VOLTS | | | |
| For fixed bias operation . For cathode-bias operation . The dc component must not exceed 100 volts. AVERAGE PLATE CHARACTER 160 TYPE 6C4 Eq = 6.3 VOLTS | | | |
| For fixed bias operation . For cathode-bias operation . The dc component must not exceed 100 volts. AVERAGE PLATE CHARACTER 160 TYPE 6C4 $E_4 = 6.3$ VOLTS 120 10 10 10 10 10 10 10 10 10 1 | | | |
| For fixed bias operation . For cathode-bias operation . The dc component must not exceed 100 volts. AVERAGE PLATE CHARACTER 160 TYPE 6C4 $E_4 = 6.3$ VOLTS 120 10 10 10 10 10 10 10 10 10 1 | | | |
| For fixed bias operation . For cathode-bias operation . The dc component must not exceed 100 volts. AVERAGE PLATE CHARACTER 160 TYPE 6C4 Eq = 6.3 VOLTS | | | |
| For fixed bias operation . For cathode-bias operation . The dc component must not exceed 100 volts. AVERAGE PLATE CHARACTER 160 TYPE 6C4 $E_4 = 6.3$ VOLTS 120 10 10 10 10 10 10 10 10 10 1 | | | |
| For fixed bias operation For cathode-bias operation The dc component must not exceed 100 volts. AVERAGE PLATE CHARACTER 160 TYPE 6C4 $E_{q} = 6.3 \text{ Volts}$ 120 10 10 10 10 10 10 10 10 10 1 | | | |

200

6C4

= Technical Data =

RF POWER AMPLIFIER AND OSCILLATOR—Class C Telegraphy

| Maximum Kafings, (Design-Center Values): | |
|---|---------------|
| PLATE VOLTAGE | 300 max volts |
| | -50 max volts |
| PLATE CURRENT | 25 max ma |
| GRID CURRENT | 8 max ma |
| PLATE DISSIPATION. | 5 max watts |
| Typical Operation at frequencies up to 50 Mc: | |
| Plate Voltage | 300 volts |
| | -27 volts |
| Plate Current | 25 ma |
| Grid Current (Approx.) | 7 ma |
| | .35 watt |
| Power Output (Approx.) • | 5.5 watts |

• Approximately 2.5 watts power output can be obtained when the 6C4 is used at 150 megacycles as an oscillator with grid resistor of 10,000 ohms and with maximum rated input.



P(2

2

(1

NC

(8

KT.

A

D2 GIT

MEDIUM-MU TRIODE

Metal type 6C5 and glass octal type 6C5-GT used as audio amplifier, oscillator, or detector tubes. Outlines 3 and 24, respectively, OUT-LINES SECTION. Tubes require octal socket. Heater volts (ac/dc), 6.3; amperes, 0.3. Typical operation as class A_j amplifier: plate volts, 250 (300 max); grid volts, -8 (0 max); amplification factor, 20; plate resistance, 10000 ohms; transconductance, 2000 µmhos; plate ma., 8; plate

6C5 6C5GT

dissipation, 2.5 max watts. Type 6C5-GT is a DISCONTINUED type listed for reference only. Type 6C5 is used principally for renewal purposes.

SHARP-CUTOFF PENTODE

Glass type used as biased detector and as a high-gain amplifier in radio equipment. Outline 24A, OUTLINES SECTION. Tube requires sixcontact socket. Heater volts (ac/dc), 6.3; amperes, 0.3. For ratings and typical operation data, refer to type 6J7. Type 6C6 is used principally for renewal purposes.

Glass type used as combined detector, amplifier, and ave tube. Outline 24B, OUTLINES SECTION. Heater volts (ac/dc), 6.3; amperes, 0.3. This type is similar to, but not interchangeable with, type 85. The 6C7 is a DISCON-TINUED type listed for reference only.

MEDIUM-MU TWIN TRIODE

Glass octal type used as a voltage amplifier and phase inverter in radio equipment. Outline 23, OUTLINES SECTION. Tube requires octal socket. Heater volts (ac/dc), 6.3; amperes, 0.3. Maximum ratings for each triode unit as class A1 amplifier: plate volts, 250 max; grid volts, positive-bias value, 0 max; plate dissipation, 1.0 max watt. Typical operation: plate volts, 25; grid volts, -4.5; plate ma., 32; plate 6C6

6C7

6C8G

resistance, 22500 ohms; amplification factor, 36; transconductance, 1600 µmhos. This type is used principally for renewal purposes.



GITRI SHARP-CUTOFF DUAL TETRODE

Miniature type used as vhf rf-amplifier and autodyne mixer tube. Outline 8B, OUTLINES SECTION, except center pin is added to base. Tube requires miniature ten-contact socket



and may be mounted in any position. Heater volts (ac/dc), 6.3; amperes, 0.4.


CLASS A1 AMPLIFIER (Each Unit)

| Maximum Ratings, (Design-Maximum Values): | | |
|--|----------|-----------|
| PLATE VOLTAGE. | 250 max | volts |
| GRID-NO.2 (SCREEN-GRID) SUPPLY VOLTAGE. | 180 max | volts |
| GRID-NO.2 VOLTAGE | See curv | e page 70 |
| CATHODE CURRENT | 20 max | ma |
| PLATE DISSIPATION: | | |
| Either plate | 1.5 max | watts |
| Both plates (both units operating) | 2.5 max | watts |
| GRID-NO.2 INPUT: | | |
| For grid-No.2 voltages up to 90 volts | 0.5 max | watt |
| For grid-No.2 voltages between 90 and 180 volts | See curv | e page 70 |
| PEAK HEATER-CATHODE VOLTAGE: | | |
| Heater negative with respect to cathode | 100 max | volts |
| Heater positive with respect to cathode | 100 max | volts |
| Characteristics: | | |
| Plate Voltage | 125 | volts |
| Grid-No.2 Voltage. | 80 | volts |
| Grid-No.1 Voltage | -1 | volt |
| Plate Resistance (Approx.) | 0.1 | megohm |
| Transconductance | 8000 | µmhos |
| Plate Current. | 10 | ma |
| Grid-No.2 Current. | 1.5 | ma |
| Grid-No.1 Voltage (Approx.) for plate current of 20 µa | -6 | volts |
| ······································ | | |

FULL-WAVE VACUUM RECTIFIER




Miniature type used in powersupply of compact, audio equipment having moderate dc requirements. Outline 8E, OUTLINES SECTION. Tube requires miniature nine-contact socket



and may be mounted in any position. It is especially important that this tube, like other power-handling tubes, be adequately ventilated. Heater volts (ac/dc), 6.3; amperes, 1.

| FUL | L-W | AVE | RECT | IFIER |
|-----|-----|-----|------|-------|
| | | | | |

| Maximum Ratings, (Design-Center Values): | | |
|---|----------|-------|
| PEAK INVERSE PLATE VOLTAGE | 1000 max | volts |
| PEAK PLATE CURRENT (Per Plate) | 450 max | ma |
| AC PLATE SUPPLY VOLTAGE (Per Plate, rms) with Capacitor Input to Filter | 350 max | volts |

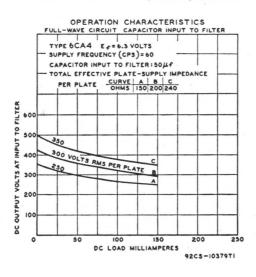

| DC OUTPUT CURRENT HOT SWITCHING TRANSIENT PLATE CURRENT (Per Plat PEAK HEATER-CATHODE VOLTAGE: Heater negative with respect to cathode | æ) | ••••• | 150 max # 500 max | ma volts |
|---|-----|-------|-------------------------|-------------|
| Typical Operation with Capacitor Input to Filter: | | | | |
| AC Plate-to-Plate Supply Voltage (rms) | 500 | 600 | 700 | volts |
| Filter-Input Capacitor | 50 | 50 | 50 | μf |
| Total Effective Plate Supply Impedance per Plate. | 150 | 200 | 240 | ohms |
| DC Output Voltage at Input to Filter (Approx.) | | | | |
| For dc output current of 150 ma | 245 | 293 | 347 | volts |

= Technical Data =

When capacitor-input circuits are used, a maximum peak current value per plate of 1 ampere during the initial cycles of the hot-switching transient should not be exceeded.

BEAM POWER TUBE



Miniature type used in af power output stage of radio and television receivers. Outline 7C, OUTLINES SECTION. Tube requires miniature seven-contact socket and may be operated in any position. Heater volts (ac/dc), 6.3; amperes, 1.2.

| 6CA5 |
|--------------------------------|
| Related types: 12CA5, 25CA5 |

CLASS A1 AMPLIFIER

| Maximum Ratings, (Design-Center Values): | | | |
|--|-------|------------------|----------|
| PLATE VOLTAGE | | 130 max | volts |
| GRID-NO.2 (SCREEN-GRID) VOLTAGE. | | 130 max | volts |
| GRID-NO.1 (CONTROL-GRID) VOLTAGE, Positive-bias value | | 0 max | volts |
| PLATE DISSIPATION | | 5 max | watts |
| GRID-NO.2 INPUT. | | 1.4 max | watts |
| PEAK HEATER-CATHODE VOLTAGE: | | | |
| Heater negative with respect to cathode | | 200 max | volts |
| Heater positive with respect to cathode | | $200^{\circ}max$ | volts |
| BULB TEMPERATURE (At hottest point) | | 180 max | °C |
| Typical Operation: | | | |
| Plate Voltage | 110 | 125 | volts |
| Grid-No.2 Voltage | 110 | 125 | volts |
| Grid-No.1 (Control-Grid) Voltage. | -4 | -4.5 | volts |
| Peak AF Grid-No.1 Voltage | 4 | 4.5 | volts |
| Zero-Signal Plate Current. | 32 | 37 | ma |
| Maximum-Signal Plate Current. | 31 | 36 | ma |
| Zero-Signal Grid-No.2 Current (Approx.) | 3.5 | 4 | ma |
| Maximum-Signal Grid-No.2 Current (Approx.) | 7.5 | 11 | ma |
| Plate Resistance (Approx.) | 16000 | 15000 | ohms |
| Transconductance | 8100 | 9200 | µmhos |
| Load Resistance | 3500 | 4500 | ohms |
| Total Harmonic Distortion | 5 | 6 | per cent |
| Maximum-Signal Power Output | 1.1 | 1.5 | watts |
| Maximum Circuit Values: Grid-No.1-Circuit Resistance: | | | |
| For fixed-bias operation | | 0.1 max | mogohm |
| For esthode-big operation | | | megohm |
| For cathode-bias operation | | 0.5 max | megohm |

° The dc component must not exceed 100 volts.



BEAM POWER TUBE

Glass octal types used as horizontal deflection amplifiers in color television receivers. Type 6CB5-A, **Outline 25A, OUTLINES SECTION.**

6CB5 6CB5A

Type 6CB5 maximum dimensions:

over-all length, 5-1/8 inches; seated height, 4-19/32 inches; diameter, 2-1/16 inches. Tubes require octal socket and may be mounted in any position. Type 6CB5 is a DISCONTINUED type listed for reference only.

| HEATER VOLTAGE (AC/DC) | 6.3 | volts |
|--|-----|---------|
| HEATER CURRENT. | 2.5 | amperes |
| DIRECT INTERELECTRODE CAPACITANCES (Approx.): | | |
| Grid No.1 to Plate | 0.4 | pf |
| Grid No.1 to Cathode, Heater, Grid No.2, and Grid No.3 | 22 | pf |
| Plate to Cathode, Heater, Grid No.2, and Grid No.3, | 10 | pf |
| | | P |

| TRANSCONDUCTANCE* | 8800 | |
|---|--------------|--|
| MU-FACTOR, Grid No.2 to Grid No.1* | 3.8 | |
| *For plate and grid-No.2 volts, 175; grid-No.1 volts, -30; plate ma., 90; grid- | No.2 ma., 6. | |

HORIZONTAL DEFLECTION AMPLIFIER

For operation in a 525-line, 30-frame system

| | 6CB5 | 6CB5-A | |
|---|---------------------|----------------|-------|
| | Design-Center | Design-Maximum | |
| Maximum Ratings: | Values [*] | Values | |
| DC PLATE VOLTAGE. | 700 max | 880 max | volts |
| PEAK POSITIVE-PULSE PLATE VOLTAGE# | 6800° max | 6800 max | volts |
| PEAK NEGATIVE-PULSE PLATE VOLTAGE. | -1500 max | -1650 max | volts |
| DC GRID-NO.2 (SCREEN-GRID) VOLTAGE. | 200 max | 220 max | volts |
| DC GRID-NO.1 (CONTROL-GRID) VOLTAGE | -50 max | -55 max | volts |
| PEAK NEGATIVE-PULSE GRID-NO.1 VOLTAGE | -200 max | -220 max | volts |
| PEAK CATHODE CURRENT | -max | 850 max | ma |
| AVERAGE CATHODE CURRENT | 200 max | 240 max | ma |
| GRID-NO.2 INPUT. | 3.6 max | 4 max | watts |
| PLATE DISSIPATION [†] | 23 max | 26 max | watts |
| PEAK HEATER-CATHODE VOLTAGE: | | | |
| Heater negative with respect to cathode | 200 max | 200 max | volts |
| Heater positive with respect to cathode | 200 max | 200 max | volts |
| BULB TEMPERATURE (At hottest point) | 210 max | 220 max | °C |
| Maximum Circuit Value: | | | |

Grid-No.1-Circuit Resistance... 0.47 max megohm Except as noted.

The duration of the voltage pulse must not exceed 15 per cent of one horizontal scanning cycle. In a 525-line, 30-frame system, 15 per cent of one horizontal scanning cycle is 10 microseconds.

^o Absolute-Maximum Value. Under no circumstances should this absolute value be exceeded.


† An adequate bias resistor or other means is required to protect the tube in the absence of excitation.

The dc component must not exceed 100 volts.



SHARP-CUTOFF PENTODE

Miniature types used in television receivers as intermediate-frequency amplifier at frequencies up to about 45 megacycles per second and as rf amplifier in vhf television tuners. Tubes



umhos

feature very high transconductance combined with low interelectrode capacitance values, and are provided with separate base pins for grid No.3 and the cathode to permit the use of an unbypassed cathode resistor to minimize the effects of regeneration. Type 6CB6-A has a controlled heater warm-up time for use in television receivers employing series-connected heater strings. Outline 7B, OUTLINES SEC-TION. Tubes require miniature seven-contact socket and may be mounted in any position. For typical operation as a resistance-coupled amplifier, refer to RESIST-ANCE-COUPLED AMPLIFIER SECTION.

| HEATER VOLTS (AC/DC) HEATER CURRENT HEATER WARM-UP TIME (Average) for 6CB6-A | | 6.3 0.3 11 | volts ampere seconds |
|--|--|--|----------------------------|
| DIRECT INTERELECTRODE CAPACITANCES: Grid No.1 to Plate | Without External Shield).025 max | With External Shield▲ 0.015 max | pf |
| Grid No.1 to Cathode, Heater, Grid No.2, Grid No.3, and Internal Shield. Plate to Cathode, Heater, Grid No.2, Grid No.3, and | 6.5 | 6.5 | pf |
| Internal Shield | 2 | 3 | pf |
| CLASS A1 AMPLIFIER | | | |
| Maximum Ratings, (Design-Maximum Values): | | | |
| PLATE VOLTAGE. GRID-NO.3 (SUPPRESSOR-GRID) VOLTAGE, Positive value. GRID-NO.2 (SCREEN-GRID) VOLTAGE. | | 330 max 0 max See curve | |
| GRID-NO.2 SUPPLY VOLTAGE. GRID-NO. 1(CONTROL-GRID) VOLTAGE, Positive-bias value PLATE DISSIPATION. | | 330 max 0 max 2.3 max | volts volts watts |
| GRID-NO.2 INPUT: For grid-No.2 voltages up to 165 volts. For grid-No.2 voltages between 165 and 330 volts | | 0.55 max See curve | watt |
| PEAK HEATER-CATHODE VOLTAGE: Heater negative with respect to cathode | | 200 max 200°max | volts |


= Technical Data

| Characteristic | CS: | | | | | | | | | | | | | | | | | | |
|---------------------------|---------|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|--|
| Plate Supply Grid No.3 | Voltage | • | • | • | • | • | • | • | • | • | • | • | • | • | • | • | • | • | |

| Trate Suppry Voltage | 120 | 10103 |
|--|------------|-----------|
| Grid No.3 Connected | to cathode | at socket |
| Grid-No.2 Supply Voltage. | 125 | volts |
| Cathode-Bias Resistor | 56 | ohms |
| Plate Resistance (Approx.) | 0.28 | megohm |
| Transconductance | 8000 | μmhos |
| Grid-No.1 Voltage (Approx.) for plate current of 20 µa | -6.5 | volts |
| Grid-No.1 Voltage (Approx.) for plate current of 2.8 ma and cathode-bias | | |
| resistor of 0 ohms | -3 | volts |
| Plate Current. | 13 | ma |
| Grid-No.2 Current | 3.7 | ma |

^o The dc component must not exceed 100 volts.

AVERAGE CHARACTERISTICS

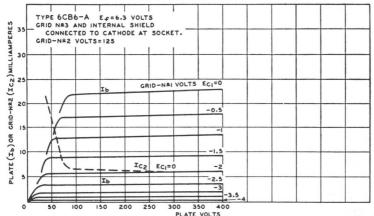

92CM-9854TI

125

volte



BEAM POWER TUBE

Glass octal types used as horizontal deflection amplifiers in high-efficiency deflection circuits of television receivers employing either transformer coupling or direct coupling to the de-



flection yoke. Type 6CD6-GA, Outline 25A, OUTLINES SECTION. Tubes require octal socket. Type 6CD6-GA may be supplied with pins 1, 4, and 6 omitted. Vertical tube mounting is preferred but horizontal operation is permissible if pins No.2 and 7 are in vertical plane. Type 6CD6-G has a maximum peak positivepulse plate-voltage rating (*Absolute Maximum*) of 6600 volts, a maximum platedissipation rating of 15 watts, and a maximum bulb-temperature rating (at hottest point) of 210°C. Type 6CD6-G is a DISCONTINUED type listed for reference only.

| HEATER VOLTAGE (AC/DC) | 6.3 | volts |
|---|-----------|---------|
| HEATER CURRENT | 2.5 | amperes |
| DIRECT INTERELECTRODE CAPACITANCES (Approx.): | | |
| Grid No.1 to Plate | 1.1 | pf |
| Grid No.1 to Cathode, Heater, Grid No.2, and Grid No.3 | 22 | pf |
| Plate to Cathode, Heater, Grid No.2, and Grid No.3 | 8.5 | pf |
| TRANSCONDUCTANCE ⁶ | 7700 | μmhos |
| PLATE RESISTANCE (Approx.) ^o | 7200 | ohms |
| MU-FACTOR, Grid No.2 to Grid No.1° | 3.9 | |
| °For plate and grid-No.2 volts, 175; grid-No.1 volts, -30; plate ma., 75; grid-No.2 | ma., 5.5. | |

HORIZONTAL DEFLECTION AMPLIFIER

For operation in a 525-line, 30-frame system

| Maximum Ratings, (Design-Center Values): | | |
|---|----------------|-------|
| DC PLATE VOLTAGE | 700 max | volts |
| PEAK POSITIVE-PULSE PLATE VOLTAGE* (Absolute Maximum) | | volts |
| PEAK NEGATIVE-PULSE PLATE VOLTAGE | | volts |
| DC GRID-NO.2 (SCREEN-GRID) VOLTAGE | | volts |
| PEAK NEGATIVE-PULSE GRID-NO.1 VOLTAGE | | volts |
| PEAK CATHODE CURRENT. | 700 max | ma |
| AVERAGE CATHODE CURRENT | 200 max | ma |

| PLATE DISSIPATION [†] | 20 max | watts |
|--|-------------------------------|----------------------|
| Grid-No.2 Input. | 3 max | watts |
| РЕАК НЕАТЕR-CATHODE VOLTAGE: Heater negative with respect to cathode. Heater positive with respect to cathode. BULB TEMPERATURE (At hottest point). | 200 max 200°max 225 max | volts volts °C |


Maximum Circuit Value:

Grid-No.1-Circuit Resistance:

0.47 max megohm For grid-resistor-bias operation. * The duration of the voltage pulse must not exceed 15 per cent of one horizontal scanning cycle. In a 525-line, 30-frame system, 15 per cent of one horizontal scanning cycle is 10 microseconds.

" Under no circumstances should this absolute value be exceeded.

† An adequate bias resistor or other means is required to protect the tube in the absence of excitation. ° The dc component must not exceed 100 volts.

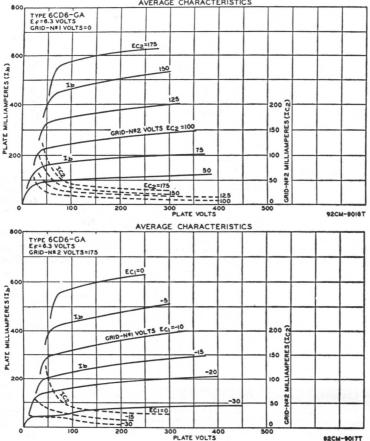


AVERAGE CHARACTERISTICS

SHARP-CUTOFF PENTODE



Miniature type used as rf and if amplifier in vhf television receivers employing series-connected heater strings. Outline 7B, OUTLINES SEC-TION. Tube requires miniature sevencontact socket and may be operated in any position.



| HEATER VOLTS (AC/DC) HEATER CURRENT. HEATER WARM-UP TIME (Average). Direct Interelectrode Capacitances: | 6.3 0.3 11 | volts ampere seconds |
|--|--|--|
| Grid No.1 to Plate | 0.03 max | pf |
| Grid No.1 to Cathode, Heater, Grid No.2, Grid No.3, and Internal Shield | 6.5 | pf |
| Plate to Cathode, Heater, Grid No.2, Grid No.3, and Internal Shield | 1.9 | pf |
| CLASS AL AMPLIFIER | | |
| Maximum Ratings, (Design-Center Values): | | |
| PLATE VOLTAGE. GRID-NO.2 (SCREEN-GRID) VOLTAGE. GRID-NO.1 (CONTROL-GRID) VOLTAGE, Positive-bias value. GRID-NO.2 INPUT. PLATE DISSIPATION. PEAK HEATER-CATHODE VOLTAGE: | 300 max 150 max 0 max 0.5 max 2 max 200 max | volts volts watt watts volts |
| Heater negative with respect to cathode | 200 max 200 ^m ax | volts |
| The dc component must not exceed 100 volts. | | |
| Characteristics: | | |
| Plate Voltage. Grid-No.2 Voltage. Grid-No.1 Supply Voltage. Grid-No.1 Resistor (Bypassed). Plate Resistance (Approx.). Transconductance. Grid-No.1 Voltage (Approx.) for plate current of 35 μa. Plate Current. Grid-No.2 Current. | $125 \\ 125 \\ -1 \\ 1 \\ 0.3 \\ 7600 \\ -5 \\ 11 \\ 2.3$ | volts volts volt megohm µmhos volts ma ma |
| | 2.0 | |

Technical Data



Characteristics:


SHARP-CUTOFF PENTODE

Miniature type used in television receivers as an intermediate-frequency amplifier at frequencies up to about 45 megacycles per second and as an rf amplifier in vhf television tuners. Be-

6CF6 Related type: 3CF6

cause of its plate-current cutoff characteristic, this type is used in gain-controlled stages of video if amplifiers. This type is electrically similar to miniature type 6CB6. Outline 7B, OUTLINES SECTION. Heater volts (ac/dc), 6.3; amperes, 0.3.

| Plate Supply Voltage | 125 volts |
|--|------------|
| Grid No.3Com | |
| Grid-No.2 Supply Voltage | |
| Cathode-Bias Resistor | 56 ohms |
| Plate Resistance (Approx.) | 0.3 megohm |
| Transconductance | |
| Grid-No 1 Voltage (Approx.) for plate current of 20 µa | 6 volts |
| Grid-No.1 Voltage (Approx.) for plate current of 2.2 ma and cathode-bias | |
| resistor of 0 ohms | |
| Plate Current | 12.5 ma |
| Grid No.2 Current | |
| | |



MEDIUM-MU TWIN TRIODE

Miniature type used as combined vertical deflection and horizontal deflection oscillator in television receivers. Also used as phase inverter, sync separator and amplifier, and re-




sistance-coupled amplifier in radio receivers. This type has a controlled heater warm-up time for use in receivers employing series-connected heater strings. Except for the common heater, each triode unit is independent of the other. Outline 8D, OUTLINES SECTION. Tube requires miniature nine-contact socket and may be mounted in any position. For typical operation as a resistance-coupled amplifier, refer to RESISTANCE-COUPLED AMPLIFIER SECTION.

| HEATER VOLTAGE (AC/DC) | 6.3 | volts ampere |
|------------------------|-----|-----------------|
| HEATER OURRENT | 0.0 | ampere |

| HEATER WARM-UP TIME (Average) DIRECT INTERELECTRODE CAPACITANCES (Each Unit, Approx.): | 11 | seconds |
|---|---------|---------|
| | 4.0 | pf |
| Grid to Plate Grid to Cathode, Heater, and Internal Shield | 2.3 | pf |
| Plate to Cathode, Heater, and Internal Shield. | 2.2 | pf |
| CLASS A AMPLIFIED (THE F. I. T. | | |
| CLASS A_1 AMPLIFIER (Each Unit) | | |
| Maximum Ratings, (Design-Maximum Values): | | |
| PLATE VOLTAGE | 330 max | volts |
| GRID VOLTAGE, Positive-bias value | 0 max | volts |
| PLATE DISSIPATION: | | |
| For either plate | 4 max | watts |
| For both plates with both units operating | 5.7 max | watts |
| CATHODE CURRENT. | 22 max | ma |
| PEAK HEATER-CATHODE VOLTAGE: | | |
| Heater negative with respect to cathode | 200 max | volts |
| Heater positive with respect to cathode | 200 max | volts |
| | | |
| Characteristics: | | |
| Plate Voltage | 250 | volts |
| Grid Voltage0 | -8 | volts |
| Amplification Factor | 20 | 10100 |
| Plate Resistance (Approx.) | 7700 | ohms |
| Transconductance | 2600 | µmhos |
| Grid Voltage (Approx.) for plate current of 10 μ a | -18 | volts |
| Plate Current for grid voltage of -12.5 volts | 1.3 | ma |
| Plate Current 10 | 9 | ma |
| Maximum Circuit Value: | | |
| Grid-Circuit Resistance: | | |
| For fixed-bias operation | 1.0 max | megohm |

The dc component must not exceed 100 volts.

AVERAGE PLATE CHARACTERISTICS

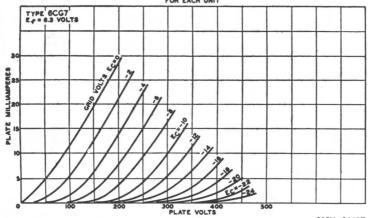


92CM - 8442T

OSCILLATOR

For operation in a 525-line, 30-frame system

| Maximum Ratings, (Design-Maximum Values, Each Unit): | Vertical Deflection Oscillator | Horizontal Deflection Oscillator | |
|--|--------------------------------------|--|---------|
| DC PLATE VOLTAGE | 330 max | 330 max | volts |
| PEAK NEGATIVE-PULSE GRID VOLTAGE. | -440 max | -660 max | volts |
| PEAK CATHODE CURRENT | 77 max | 330 max | ma |
| AVERAGE CATHODE CURRENT. | 22 max | 22 max | ma |
| PLATE DISSIPATION: | | | |
| For either plate | 4 max | 4 max | watts |
| For both plates with both units operating | 5.7 max | 5.7 max | watts |
| PEAK HEATER-CATHODE VOLTAGE: | | | |
| Heater negative with respect to cathode | 200 max | 200 max | volts |
| Heater positive with respect to cathode | 200 max | 200 max | volts |
| Maximum Circuit Value: | | | |
| Grid-Circuit Resistance | 2.2 max | 2.2 max | megohms |
| The dc component must not exceed 100 volts. | | | |

= Technical Data =



MEDIUM-MU TRIODE— SHARP-CUTOFF PENTODE

Miniature types used as combined oscillator and mixer tubes in television receivers utilizing an intermediate frequency in the order of 40 megacycles per second. When used in an AM/FM

receiver, the triode unit is used as an oscillator for both sections. In the AM section, the pentode unit is used as a high-gain pentode mixer; in the FM section, the pentode unit is used either as a pentode mixer or as a triode-connected mixer depending on signal-to-noise considerations. Type 6CG8-A has a controlled heater warm-up time for use in television receivers employing series-connected heater strings. Outline 8B, OUTLINES SECTION. Tubes require miniature nine-contact socket and may be mounted in any position. Heater volts (ac/dc), 6.3; amperes, 0.45; warm-up time (average) for 6CG8-A, 11 seconds. Maximum ratings, characteristics, and typical operating values are the same as those of miniature type 6X8. For curves of average characteristics, see type 6X8. The 6CG8 is a DISCON-TINUED type listed for reference only.

| DIRECT INTERELECTRODE CAPACITANCES: Triode Unit: | Without External Shield | With External Shield ^o | |
|---|-------------------------------|---|----------|
| Grid to Plate | 1.5 | 1.5 | pf |
| Grid to Cathode, Heater, and Pentode Grid No.3 | 2 | 2.4 | pf pf |
| Plate to Cathode, Heater, and Pentode Grid No.3 | 0.5 | 1 | pf |
| Pentode Unit: | | | |
| Grid No.1 to Plate | 0.04 max | 0.02 max | pf |
| Grid No.1 to Cathode, Heater, Grid No.2, and Grid No.3 | 4.6 | 4.8 | pf |
| Plate to Cathode, Heater, Grid No.2, and Grid No.3 | 0.9 | 1.6 | pf |
| Pentode Grid No.1 to Triode Plate | 0.05 max | 0.04 max | pf |
| Pentode Plate to Triode Plate | 0.05 max | 0.008 max | pf |
| Heater to Cathode | 6.5 | 6.5 | pf |
| With external shield connected to eathede except as noted | | | P |

° With external shield connected to cathode, except as noted.

• With external shield connected to plate.



MEDIUM-MU TRIODE— SHARP-CUTOFF PENTODE

Miniature type used in a wide variety of applications in television receivers. The pentode unit is used as an if amplifier, video amplifier, agc amplifier, or reactance tube. The triode

6CH8

6CG8

6CG8A

Related type:

5CG8

unit is used in low-frequency oscillator, sync-separator, sync-clipper, and phasesplitter circuits. Outline 8B, OUTLINES SECTION. Tube requires miniature nine-contact socket and may be mounted in any position. For curves of average plate characteristics, refer to type 6AN8. The pentode-unit curve for the 6AN8 applies for this type except that grid No.3, heater, and internal shield (pin 5) are connected to ground.

| HEATER VOLTAGE (AC/DC) HEATER CURRENT. DIRECT INTERELECTRODE CAPACITANCES: | $\begin{array}{c} 6.3 \\ 0.45 \end{array}$ | volts ampere |
|--|--|-----------------|
| Triode Unit: | | |
| Grid to Plate | 1.6 | pf |
| Grid to Cathode, Heater, Pentode Grid No.3, and Internal Shield | 1.9 | nf |
| Plate to Cathode, Heater, Pentode Grid No.3, and Internal Shield | 1.6 | pf |
| Pentode Unit: | | |
| Grid No.1 to Plate | 0.025 | pf |
| Grid No.1 to Cathode, Heater, Grid No.2, Grid No.3, and Internal Shield | 7 | pf |
| Plate to Cathode, Heater, Grid No.2, Grid No.3, and Internal Shield. | 2.25 | pf |
| Triude Grid to Pentode Plate | 0.005 | pf |
| Pentode Grid No.1 to Triode Plate | 0.02 | nf |
| Pentode Plate to Triode Plate | 0.04 | pf |

CLASS A1 AMPLIFIER

| Maximum Ratings, (Design-Center Values): | Triode Uni | t Pentode Un | it |
|---|---|---|--|
| PLATE VOLTAGE | 300 max | 300 max | volts |
| GRID-NO.3 (SUPPRESSOR-GRID) VOLTAGE, Positive value | - | 0 max | volts |
| GRID-NO.2 SUPPLY VOLTAGE. | - | 300 max | volts |
| GRID-NO.2 (SCREEN-GRID) VOLTAGE | - | See curv | e page 70 |
| GRID-NO.1 (CONTROL-GRID) VOLTAGE, Positive-bias value | 0 max | 0 max | volts |
| PLATE DISSIPATION. | 2.6 max | 2 max | watts |
| GRID-NO.2 INPUT: | | | |
| For grid-No.2 voltages up to 150 volts | - | 0.5 max | watt |
| For grid-No 2 voltages between 150 and 300 volts | - | See curv | e page 70 |
| PEAK HEATER-CATHODE VOLTAGE: | | Dec car. | - F-G |
| Heater negative with respect to cathode | 200 max | ▲ max | volts |
| Heater positive with respect to cathode | $200^{\circ}max$ | 0 max | volts |
| incuter positive with respect to eachout | a o o moute | 0 11000 | |
| Characteristics: | | | |
| Plate Supply Voltage | 200 | 200 | volts |
| | | | |
| Grid No.3 | -Conne | ected to ground | |
| Grid No.3 | - | ected to ground 150 | volts |
| Grid No.3 | -Conne -6 | 150 | volts |
| Grid No.3 Grid-No.2 Supply Voltage | -6 | 150 | volts |
| Grid No.3 | -6 -6 -9 | 150 | volts volts ohms |
| Grid No.3. Grid-No.2 Supply Voltage. Grid Voltage. Cathode-Bias Resistor. | $\begin{array}{r}-\\-6\\19\\5750\end{array}$ | 150 180 300000 | volts volts ohms |
| Grid No.3. Grid-No.2 Supply Voltage. Grid Voltage. Cathode-Bias Resistor. Amplification Factor. | $\begin{array}{r}-\\-6\\-\\19\\5750\\3300\end{array}$ | 150 | volts volts ohms umhos |
| Grid No.3. Grid-No.2 Supply Voltage. Grid Voltage. Cathode-Bias Resistor. Amplification Factor. Plate Resistance (Approx.). | -6 -9 5750 3300 -19 | 150 - 180 300000 6200 -8 | volts volts ohms |
| Grid No.3. Grid-No.2 Supply Voltage. Grid Voltage. Cathode-Bias Resistor. Amplification Factor. Plate Resistance (Approx.) Transconductance. | $\begin{array}{r}-\\-6\\-\\19\\5750\\3300\end{array}$ | 150 | volts volts ohms umhos |
| Grid No.3. Grid No.2 Supply Voltage. Grid Voltage Cathode-Bias Resistor. Amplification Factor. Plate Resistance (Approx.) Transconductance. Grid-No.1 Voltage (Approx.) for plate current of 10µa | -6 -9 5750 3300 -19 | 150 - 180 300000 6200 -8 | volts volts ohms µmhos volts |
| Grid No.3. Grid-No.2 Supply Voltage. Grid Voltage. Cathode-Bias Resistor. Amplification Factor. Plate Resistance (Approx.) Transconductance. Grid-No.1 Voltage (Approx.) for plate current of 10µa. Plate Current. | -6 19 5750 3300 -19 13 | 150 | volts volts ohms µmhos volts ma |
| Grid No.3. Grid-No.2 Supply Voltage. Grid Voltage. Cathode-Bias Resistor. Amplification Factor. Plate Resistance (Approx.) Transconductance. Grid-No.1 Voltage (Approx.) for plate current of 10µa. Plate Current. Grid-No.2 Current. Maximum Circuit Values: | -6 19 5750 3300 -19 13 | 150 | volts volts ohms µmhos volts ma |
| Grid No.3. Grid-No.2 Supply Voltage. Grid Voltage Cathode-Bias Resistor. Amplification Factor. Plate Resistance (Approx.) Transconductance. Grid-No.1 Voltage (Approx.) for plate current of 10µa. Plate Current. Grid-No.2 Current. | -6 19 5750 3300 -19 13 | 150 | volts volts ohms µmhos volts ma |

° The dc component must not exceed 100 volts.

6CK4

6CL6

The heater-cathode voltage should not exceed the value of the operating cathode bias because the voltage between the heater and cathode is also applied between the cathode and grid No.3. The net result is to make grid No.3 negative with respect to cathode with possible change in tube characteristics. * If either unit is operating at maximum rated conditions, grid No.1-circuit resistance for both units should not exceed the stated values.

LOW-MU TRIODE

Glass octal type used as a vertical-deflection-amplifier tube in television receivers. Outline 14E, OUTLINESSECTION. Tube requires octal socket. Heater volts (ac /dc), 6.3; amperes, 1.25. Characteristics as class A_1 amplifier: plate volts, 250; grid volts, -28; plate ma., 40; amplification factor, 6.6; plate resistance (approx.), 1200 ohms; transconductance, 5500 μ mhos. Maximum ratings as vertical deflection ampli-



fier (for operation in a 525-line, 30-frame system): dc plate volts, 550 max; peak positive-pulse plate volts, 2000 max; peak negative-pulse grid volts, 250 max; peak cathode ma., 350 max; average cathode ma., 100 max; plate dissipation, 12 max watts; peak heater-cathode volts, 2000 max (the dc component must not exceed 100 volts). This type is used principally for renewal purposes.

POWER PENTODE

Miniature type used in output stage of video amplifier of television receivers and as wide-band amplifier tube in industrial and laboratory equipment. Outline 8D, OUTLINES SEC-



TION. Tube requires miniature nine-contact socket and may be mounted in any position.


| HEATER VOLTAGE (AC/DC) | 6.3 | volts |
|---|------|----------------|
| HEATER CURRENT. | 0.65 | ampere |
| DIRECT INTERELECTRODE CAPACITANCES (Approx.): | | |
| Grid No.1 to Plate | 0.12 | pf |
| Grid No.1 to Cathode, Heater, Grid No.2, Grid No.3, and Internal Shield | 11 | nf |
| Plate to Cathode, Heater, Grid No.2, Grid No.3, and Internal Shield | 5.5 | pf pf pf |
| CLASS A1 AMPLIFIER | | |
| Maximum Ratings, (Design-Center Values): | | |


| PLATE VOLTAGE | 300 max | volts |
|---------------|---------|-------|
| | | |

= Technical Data =

| GRID-NO.3 (SUPPRESSOR-GRID) VOLTAGE, Positive Value | 0 max | volts |
|--|----------------|-----------|
| GRID-NO.2 (SCREEN-GRID) SUPPLY VOLTAGE. | 300 max | volta |
| GRID-NO.2 VOLTAGE | 150 max | volts |
| GRID-NO.1 (CONTROL-GRID) VOLTAGE: | | |
| Negative-bias value | -50 max | volts |
| Positive-bias value | 0 max | volts |
| PLATE DISSIPATION | 7.5 max | watts |
| GRID-NO.2 INPUT. | 1.7 max | watts |
| PEAK HEATER-CATHODE VOLTAGE: | | |
| Heater negative with respect to cathode | 100 max | volts |
| Heater positive with respect to cathode | 100 max | volta |
| BULB TEMPERATURE (At hottest point) | 200 max | °C |
| | a o o max | 0 |
| Typical Operation: | | |
| Plate Voltage | 250 | volts |
| Grid No.3 and Internal ShieldConnect | ted to cathode | at socket |
| Grid-No.2 Voltage | 150 | volta |
| Grid-No.1 Voltage. | -3 | volts |
| Peak AF Grid-No.1 Voltage | 3 | volts |
| Zero-Signal Plate Current | 30 | ma |
| Maximum-Signal Plate Current | 31 | ma |
| Zero-Signal Grid-No.2 Current | 7 | ma |
| Maximum-Signal Grid-No.2 Current | 7.2 | ma |
| Plate Resistance (Approx.). | 0.09 | megohm |
| Transconductance. | 11000 | µmhos |
| Grid-No.1 Voltage (Approx.) for plate current of 10 µa | -14 | volta |
| Load Resistance. | 7500 | ohma |
| Total Harmonic Distortion. | 8 | per cent |
| Maximum-Signal Power Output. | 2.8 | watts |
| | 4.0 | watts |
| Typical Operation in 4-Mc-Bandwidth Video Amplifier: | | |
| Plate Supply Voltage | 300 | volts |
| Grid No.3 and Internal Shield Connec | ted to cathode | at socket |
| Grid-No.2 Supply Voltage | 300 | volts |
| Grid-No.1 Bias Voltage | -2 | volts |
| Grid-No.1 Signal Voltage (Peak to Peak) | 3 | volts |
| Grid-No.2 Resistor. | 24000 | ohms |
| Grid-No.1 Resistor | 0.1 | megohm |
| Load Resistor. | 3900 | ohms |
| Zero-Signal Plate Current. | 30 | ma |
| Zero-Signal Grid-No.2 Current. | 7.0 | ma |
| Voltage Output (Peak to Peak) | 132 | volts |
| 0 | 104 | VOICS |
| Maximum Circuit Values: | | |
| Grid-No.1 Circuit Resistance: | | |
| For fixed-bias operation | 0.1 max | megohm |
| For cathode-bias operation | 0.5 max | megohm |
| | | |

AVERAGE CHARACTERISTICS

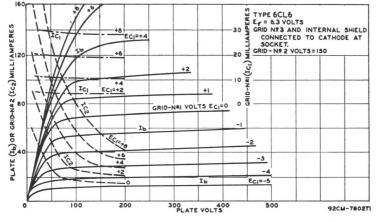



MEDIUM-MU TRIODE— SHARP-CUTOFF TETRODE

Miniature types used as combined vhf oscillator and mixer in television receivers employing series-connected heater strings. Outline 8B,OUTLINES SECTION. Tubes require miniature 6CL8 6CL8A Related types: 5CL8A, 19CL8A

nine-contact socket and may be mounted in any position. For maximum ratings as class A_1 amplifier, see type 6U8-A. Type 6CL8 is a DISCONTINUED type listed for reference only. Heater volts (ac/dc), 6.3; amperes, 0.45; warm-up time (average), 11 seconds.

CLASS A1 AMPLIFIER


| Characteristics: | Triode Unit | Tetrode Unit | |
|--|-------------|--------------|------------|
| Plate Supply Voltage | 125 | 125 | volts |
| Grid-No.2 (Screen-Grid) Voltage | - | 125 | volts |
| Grid-No.1 Voltage | -1 | $^{-1}$ | volt |
| Amplification Factor | 40 | - | |
| Plate Resistance (Approx.) | 0.005 | 0.2 | megohm |
| Transconductance | 8000 | 6500 | μ mhos |
| Grid-No.1 Voltage (Approx.) for plate current of 20 µa | -9 | -9 | volts |
| Plate Current | 14 | 12 | ma |
| Grid-No.2 Current. | - | 4 | ma |
| Maximum Circuit Values: | | | |

| For fixed-blas operation | 0.5 max 1 max | 0.25 max 1 max | megohm | |
|--------------------------|------------------|-------------------|--------|--|
| | | | | |



BEAM POWER TUBE

Miniature type used as vertical deflection amplifier in television receivers and as audio power amplifier in radio and television receivers. Outline 8D,OUTLINES SECTION. Tube



requires miniature nine-contact socket and may be mounted in any position. For typical operation and maximum circuit values as class A_1 amplifier, refer to type 6V6-GT. For curves of average plate characteristics, refer to type 6AQ5-A.

| HEATER VOLTAGE (AC/DC) | 6.3 volts |
|--|------------------------|
| HEATER CURRENT | 0.45 ampere |
| Amplification Factor* | 9.8 |
| PLATE RESISTANCE (Approx.)* | 1960 ohms |
| TRANSCONDUCTANCE* | 5000 μmhos |
| * Grid No.2 connected to plate; plate and grid-No.2 volts, 250; grid-No.1 volts, | -12.5: plate and grid- |
| No.2 ma., 49.5. | |

CLASS A, AMPLIFIER

Maximum Ratings, (Design-Center Values):

| PLATE VOLTAGE | 315 max | volts |
|---|---------|-------|
| GRID-NO.2 (SCREEN-GRID) VOLTAGE | 285 max | volts |
| GRID-NO.2 INPUT. | 2 max | watts |
| PLATE DISSIPATION | 12 max | watts |
| PEAK HEATER-CATHODE VOLTAGE: | | |
| Heater negative with respect to cathode | 200 max | volts |
| Heater positive with respect to cathode | 200 max | volts |

VERTICAL DEFLECTION AMPLIFIER


For operation in a 525-line, 30-frame system

| Maximum Ratings, (Design-Center Values): | Triode Connection° | Pentode Connection | |
|--|-----------------------|-----------------------|-------------|
| DC PLATE VOLTAGE | | 315 max | volts |
| PEAK POSITIVE-PULSE PLATE VOLTAGE [†] (Absolute Maximum) | 2000 ⁴ max | 2000 [*] max | volts |
| DC GRID-NO.2 (SCREEN-GRID) VOLTAGE. | | 285 max | volts |
| PEAK NEGATIVE-PULSE GRID-NO.1 (CONTROL-GRID) VOLTAGE . | -250 max | -250 max | volts |
| PEAK CATHODE CURRENT | 120 max | 120 max | ma |
| AVERAGE CATHODE CURRENT | 40 max | 40 max | ma |
| PLATE DISSIPATION. | 9 max | 8 max | watts |
| GRID-NO.2 INPUT | - | 1.75 max | watts |
| PEAK HEATER-CATHODE VOLTAGE: | 000 | 000 | |
| Heater negative with respect to cathode | 200 max | 200 max | volts |
| Heater positive with respect to cathode | 200 max | 200 • max | volts |
| Maximum Circuit Values: | | | |
| Grid-No.1-Circuit Resistance: For cathode-bias operation | 2.2 max | 2.2 max | megohms |
| ° Grid No.2 connected to plate. | | | |
| † The duration of the voltage pulse must not exceed 15 per cent of | | | . In a 525- |

▲ Under no circumstances should this absolute value be exceeded.

The dc component must not exceed 100 volts.

212



MEDIUM-MU DUAL TRIODE

Miniature type used as combined vertical deflection oscillator and vertical deflection amplifier in television receivers employing series-connected heater strings. Unit No.1 is used as a conven-


6CM7 Related type: 8CM7

tional blocking oscillator in vertical deflection circuits, and unit No.2 as a vertical deflection amplifier. Outline 8D, OUTLINES SECTION. Tube requires miniature nine-contact socket and may be mounted in any position.

| HEATER VOLTAGE (AC/DC) HEATER CURRENT HEATER WARM-UP TIME (Average) | | 0.6 | volts ampere seconds |
|--|---|------------------------------|----------------------------|
| DIRECT INTERELECTRODE CAPACITANCES (Approx.): Grid to Plate. Grid to Cathode and Heater. Plate to Cathode and Heater. | 2 | Unit No.2 3 3.5 0.4 | pf pf |

CLASS A1 AMPLIFIER

| Characteristics: | Unit No.1 | Unit No.2 | |
|---|-----------|-----------|-------|
| Plate Voltage | 200 | 250 | volts |
| Grid Voltage | -7 | - 8 | volts |
| Amplification Factor | 21 | 18 | |
| Plate Resistance (Approx.) | 10500 | 4100 | ohms |
| Transconductance | 2000 | 4400 | μmhos |
| Grid Voltage (Approx.) for plate current of 10 µa | | - | volts |
| Plate Current. | | 20 | ma |
| Plate Current for grid voltage of -10 volts | 1 | - | ma |

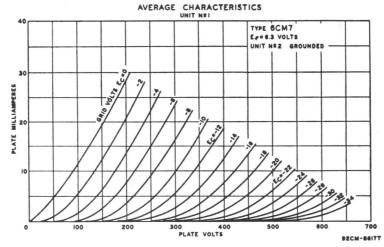

VERTICAL DEFLECTION OSCILLATOR AND AMPLIFIER For operation in a 525-line, 30-frame system


| Maximum Ratings, (Design-Maximum Values): DC PLATE VOLTAGE. PEAK POSITIVE-PULSE PLATE VOLTAGE . PEAK CATHODE CURRENT. AVERAGE CATHODE CURRENT. PLATE DISSIPATION PLATE DISSIPATION PEAK HEATER-CATHODE VOLTAGE: Heater negative with respect to cathode | Unit No.1 Oscillator 550 max -220 max 17 max 1.45 max 200 max | Unit No.2 Amplifier 550 max 2200 max -220 max 77 max 22 max 6 max 200 max | volts volts volts ma ma watts volts |
|---|---|---|---|
| Heater positive with respect to cathode | 200*max | 200 [*] max | volts |
| Maximum Circuit Values: Grid-Circuit Resistance: | | | |

 For cathode-bias operation
 2.2 max
 2.5 max
 megohms

 For grid-resistor-bias operation
 2.2 max
 megohms

 # The duration of the voltage pulse must not exceed 15 per cent of one vertical scanning cycle is 2.5 milliseconds.
 In a 525

* The dc component must not exceed 100 volts.

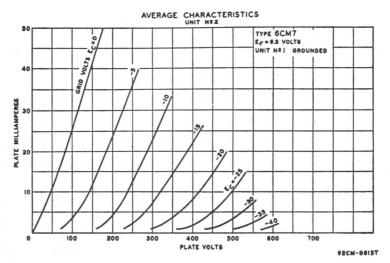

HIGH-MU TRIODE—

6CM8 Related type: 5CM8 Miniature type used in variety of applications in television receivers. The pentode unit is used as an intermediate-frequency-amplifier, a video-amplifier, an agc-amplifier, or as a react-



ance tube. The triode unit is used in sweep-oscillator, sync-separator, sync-clipper, and phase-splitter circuits. Outline 8B, GUTLINES SECTION. Tube requires miniature nine-contact socket and may be mounted in any position. Heater volts (ac/dc), 6.3; amperes, 0.45; warm-up time (average), 11 seconds.

| Maximum Ratings, (Design-Center Values): PLATE VOLTAGE. GRID-NO.2 (SCREEN-GRID) SUPPLY VOLTAGE. GRID-NO.2 VOLTAGE. GRID-NO.1 (CONTROL-GRID) VOLTAGE, Positive-bias value PLATE DISSIPATION. | Triode Unit 300 max - 0 max 1 max | Pentode Unit 300 max 300 max See curv 0 max 2 max | volts volts re page 70 volts watts |
|--|---|--|--|
| GRID-NO.2 INPUT: For grid-No.2 voltages up to 150 volts For grid-No.2 voltages between 150 and 300 volts PEAK HEATER-CATHODE VOLTAGE: | 2 | 0.5 max See curv | watt e page 70 |
| Heater negative with respect to cathode | 200 max 200 max | 200 max 200 max | volts |
| Characteristics: Plate Supply Voltage Grid-No.2 Supply Voltage. Grid Voltage. Cathode-Bias Resistor. | 250 -2 | 250 150 | volts volts volts |
| Amplification Factor. Plate Resistance (Approx.) Transconductance Grid-No.1 Voltage (Approx.) for plate current of 10 µa Plate Current. | $100 \\ 0.05 \\ 2000 \\ - \\ 1.8$ | 0.6 6200 -8 9.5 | megohm µmhos volts ma |
| Grid-No.2 Current. | | 2.8 | ma |


CLASS A1 AMPLIFIER

= Technical Data =

Maximum Circuit Values:

| Grid-No.1-Circuit Resistance: | Triode Unit | Pentode Unit | |
|--|-------------|--------------|--------|
| For fixed-bias operation For cathode-bias operation | 0.25 max | | |
| | 1 max | 1 max | megohm |

The dc component must not exceed 100 volts.



TWIN-DIODE—HIGH-MU TRIODE

Miniature type used as combined horizontal phase detector and reactance tube in television receivers employing series-connected heater strings. The triode unit is used in sync-sepa-

rator, sync-amplifier, or audio amplifier circuits. Outline 8B, OUTLINES SEC-TION. Tube requires miniature nine-contact socket and may be mounted in any position. For typical operation of triode unit as resistance-coupled amplifier, refer to RESISTANCE-COUPLED AMPLIFIER SECTION. For curve of average plate characteristics for triode unit, refer to type 6T8-A. Heater volts (ac/dc), 6.3 (series), 3.15 (parallel); amperes, 0.3 (series), 0.6 (parallel); warm-up time (average), 11 seconds.

TRIODE UNIT AS CLASS A1 AMPLIFIER

Maximum Ratings, (Design-Maximum Values):

| PLATE VOLTAGE. GRID VOLTAGE, Positive-bias value. PLATE DISSIPATION | 330 max 0 max 1.1 max | volts volts watt |
|---|-----------------------------|------------------------|
| PEAK HEATER-CATHODE VOLTAGE: Heater negative with respect to cathode | 200 max | volts |
| Heater positive with respect to cathode | 200 max | volts |
| Characteristics: | | |
| Plate Voltage | 250 | volts |
| Grid Voltage | -3 | volts |
| Amplification Factor | 70 | |
| Plate Resistance (Approx.) | 58000 | ohms |
| Transconductance | 1200 | µmhos |
| Plate Current | 1 | ma |
| DIODE UNITS | | |
| Maximum Ratings, (Design-Maximum Values): | | |
| PLATE CURRENT (Each Unit) PEAK HEATER-CATHODE VOLTAGE: | 5.5 max | ma |
| Heater reacting with represents asthede | 000 | 1. |

| Heater negative with respect to cathode | 200 max 200 ^m ax | volts volts |
|---|--------------------------------|----------------|
| The dc component must not exceed 100 volts. | | |



HALF-WAVE VACUUM RECTIFIER

Octal type used as damper tube in horizontal-deflection circuits of television receivers. Outline 14F, OUT-LINESSECTION. Tuber equires octal socket and may be mounted in any

6004

Related type:

8CN7

position. Socket terminals 1, 2, 4, and 6 should not be used as tie points. It is especially important that this tube, like other power-handling tubes, be adequately ventilated. Heater volts (ac/dc), 6.3; amperes, 1.6.

DAMPER SERVICE

For operation in a 525-line, 30-frame system

| Maximum Ratings, (Design-Maximum Values): | | |
|---|-----------------|-------|
| PEAK INVERSE PLATE CURRENT [®] | 5500 max | volts |
| PEAK PLATE CURRENT. | 1200 max | ma |
| DC PLATE CURRENT | 190 max | ma |
| PLATE DISSIPATION. | 6.5 max | watts |
| PEAK HEATER-CATHODE VOLTAGE: | | |
| Heater negative with respect to cathode | 5500•max | volts |
| Heater positive with respect to cathode | $300^{\Box}max$ | volts |

Characteristics, Instantaneous Value:


Tube Voltage Drop for plate current of 250 ma

The duration of the voltage pulse must not exceed 15 per cent of one horizontal scanning cycle. In a 525-line, 30-frame system, 15 per cent of one horizontal scanning cycle is 10 microseconds.
 The dc component must not exceed 900 volts.

^D The dc component must not exceed 100 volts.

MEDIUM-MU TRIODE— SHARP-CUTOFF TETRODE

6CQ8 Related type: 5CQ8 Miniature type used in a wide c_{2TR} variety of applications in color and black-and-white television receivers c_{1T} employing series-connected heater strings. Especially useful as combined



25

volts

vhf oscillator and mixer in tuners of television receivers utilizing an intermediate frequency in the order of 40 megacycles per second. The tetrode unit is used as a mixer, video if amplifier, or sound if amplifier tube. The triode unit is used in vhf oscillator, phase-splitter, sync-clipper, sync-separator, and rf amplifier circuits. Outline 8B, OUTLINES SECTION. Tube requires miniature nine-contact socket and may be mounted in any position.

| HEATER VOLTAGE (AC/DC) | | 6.3 0.45 11 With External | volts ampere seconds |
|---|-----------|---------------------------------------|----------------------------|
| DIRECT INTERELECTRODE CAPACITANCES: | Shield | Shield | |
| Triode Unit: | 2 | | |
| Grid to Plate | 1.8 | 1.8 | pf |
| Grid to Cathode and Heater | 2.7 | 2.7 | pf |
| Plate to Cathode and Heater | 0.4 | 1.2 | pf |
| Tetrode Unit: | | | |
| Grid No.1 to Plate | 0.019 max | 0.015 max | pf |
| Grid No.1 to Cathode, Heater, Grid No.2 and Internal | | | |
| Shield | 5.0 | 5.0 | pf |
| Plate to Cathode, Heater, Grid No.2, and Internal Shield | 2.5 | 3.3 | pf |
| Tetrode Plate to Triode Plate | 0.07 max | 0.01 max | pf |
| Heater to Cathode (Each Unit) | 3.0 | 3.0† | pf |
| With external shield connected to cathode of unit under tea | st. | | |

+ With external shield connected to ground.


with external shield connected to ground.

CLASS A, AMPLIFIER

| Maximum Ratings, (Design-Maximum Values): | Triode Unit | Tetrode Unit | 1 |
|--|----------------------|----------------------|------------------|
| PLATE VOLTAGE | 330 max | 330 max | volts |
| GRID-NO.2 (SCREEN-GRID) SUPPLY VOLTAGE | _ | 330 max | volts |
| GRID-NO.2 VOLTAGE | - | See curve | e page 70 |
| GRID-NO.1 (CONTROL-GRID) VOLTAGE, Positive-bias value. | 0 max | 0 max | volts |
| PLATE DISSIPATION | 3.1 max | 3.2 max | watts |
| GRID-NO.2 INPUT: | | | |
| For grid-No.2 voltages up to 165 volts | - | 0.7 max | watt |
| For grid-No.2 voltages between 165 and 330 volts | - | See curve | e page 70 |
| GRID INPUT. | 0.55 max | - | watt |
| PEAK HEATER-CATHODE VOLTAGE: | | | |
| Heater negative with respect to cathode | 200 max | 200 max | volts |
| Heater positive with respect to cathode | 200 [▲] max | 200 [▲] max | volts |
| Characteristics: Plate-Supply Voltage. Grid-No.2 Supply Voltage. Grid-No.1 Voltage. | 125 | 125 125 -1 | volts volts |
| Cathode-Bias Resistor | 56 | - | ohms |
| Amplification Factor | 40 | - | |
| Plate Resistance (Approx.) | 5000 | 140000 | ohms |
| Transconductance | 8000 | 5800 | μ mhos |
| Grid-No.1 Voltage (Approx.) for plate current of 100 µa | -7 | -7 | volts |
| Plate Current | 15 | 12 | ma |
| Grid-No.2 Current | - | 4.2 | ma |
| Maximum Circuit Values: Grid-No.1-Circuit Resistance: For fixed-bias operation For cathode-bias operation | 0.5 max 1.0 max | 0.25 max 1.0 max | megohm megohm |
| For cathoge-bias operation | 1.0 mai | 1.0 max | megonin |

* The dc component must not exceed 100 volts.

= Technical Data =



DIODE—REMOTE-CUTOFF PENTODE

Miniature type used as combined detector and audio amplifier in automobile and ac-operated radio receivers. The diode unit is used as an AM detector, and the pentode unit as an




automatic-volume-controlled audio amplifier. Outline 7B, OUTLINES SECTION. Tube requires miniature seven-contact socket and may be mounted in any position. Heater volts (ac/dc), 6.3; amperes, 0.3.

PENTODE UNIT AS CLASS A1 AMPLIFIER

| Maximum Ratings, (Design-Center Values): | | |
|--|----------|------------|
| PLATE VOLTAGE | 300 max | volts |
| GRID-NO.2 (SCREEN-GRID) VOLTAGE. | See curv | re page 70 |
| GRID-NO.2 SUPPLY VOLTAGE | 300 max | volts |
| GRID-No.1 (CONTROL-GRID) VOLTAGE, Positive-bias value | 0 max | volts |
| PLATE DISSIPATION | 2.5 max | watts |
| GRID-NO.2 INPUT: | | |
| For grid-No.2 voltages up to 150 volts | 0.3 max | watt |
| For grid-No.2 voltages between 150 and 300 volts | See curv | re page 70 |
| PEAK HEATER-CATHODE VOLTAGE: | | |
| Heater negative with respect to cathode | 100 max | volts |
| Heater positive with respect to cathode | 100 max | volts |
| Characteristics: | | |
| Plate Voltage | 250 | volts |
| Grid-No.2 Voltage | 100 | volts |
| Grid-No.1 Voltage | -2 | volts |
| Plate Resistance (Approx.) | 0.8 | megohm |
| Transconductance. | 2200 | μmhos |
| Plate Current. | 9.6 | ma |
| Grid-No.2 Current | 2.6 | ma |
| Grid-No.1 Voltage (Approx.) for transconductance of 10 µmhos | -32 | volts |
| Maximum Circuit Values: | | |
| Grid-No.1-Circuit Resistance: | 1.1 | |
| For fixed-bias operation | 0.25 max | megohm |
| For cathode-bias operation | 1.0 max | megohm |
| DIODE UNIT | | - |
| Maximum Rating, (Design-Center Value): | | |
| maximum numy, (Decign-Contor + arac). | | |

PLATE CURRENT.



GRIDS-NO.2-AND-NO.4 INPUT:

CATHODE CURRENT....

PENTAGRID AMPLIFIER

Miniature type used as a gated amplifier in television receivers. In such service, it may be used as a combined sync separator and sync clipper. Outline 7B, OUTLINES SECTION.



1 max

ma

watt

ma

Tube requires miniature seven-contact socket and may be mounted in any position. Heater volts (ac/dc), 6.3; amperes, 0.3. CLASS AL AMPLIFIER

| CLASS AT AMTLITE | N | | |
|---|-----------|--------------|-------------|
| Characteristics: | | | |
| Plate Voltage | 100 | 100 | volts |
| Grids-No.2-and-No.4 Voltage | 30 | 30 | volts |
| Grid-No.3 Voltage | -1 | 0 | volt |
| Grid-No.1 Voltage | 0 | -1 | volt |
| Plate Resistance (Approx.) | 0.7 | 1 | megohm |
| Grid-No.3-to-Plate Transconductance. | 1500 | - | μmhos |
| Grid-No.1-to-Plate Transconductance | 0.8 | 1100 | μmhos |
| Plate Current Grids-No.2-and-No.4 Current | 0.8 | $1.0 \\ 1.3$ | ma |
| Grid-No.3 Voltage (Approx.) for plate current of 50 μ a | -2.2 | 1.0 | ma volts |
| Grid-No.1 Voltage (Approx.) for plate current of 50 μa | _ | -2.5 | volts |
| GATED AMPLIFIER SER | VICE | | |
| Maximum Ratings, (Design-Center Values): | | | |
| PLATE VOLTAGE | | 300 max | volts |
| GRIDS-NO.2-AND-NO.4 SUPPLY VOLTAGE | | 300 max | volts |
| GRIDS-NO.2-AND-NO.4 VOLTAGE | . | | e page 70 |
| PLATE DISSIPATION | | 1 max | watt |

For grids-No.2-and-No.4 voltages up to 150 volts...... For grids-No.2-and-No.4 voltages between 150 and 300 volts.....

See curve page 70 217

1 max

14 max


| PEAK HEATER-CATHODE VOLTAGE: Heater negative with respect to cathode | 200 max 200 = max | volts |
|---|-----------------------------|---------|
| Maximum Circuit Values: | | |
| Grid-No.1-Circuit Resistance | 0.47 max 2.2 max | megohms |

The dc component must not exceed 100 volts.

MEDIUM-MU DUAL TRIODE



Miniature type used as combined vertical deflection oscillator and vertical deflection amplifier in television receivers employing series-connected heater strings. Unit No.1 is used as a



conventional blocking oscillator in vertical deflection circuits, and unit No.2 as a vertical deflection amplifier. Outline 8D, OUTLINES SECTION. Tube requires miniature nine-contact socket and may be mounted in any position. Heater volts (ac/dc), 6.3; amperes, 0.6; warm-up time (average), 11 seconds.

CLASS A1 AMPLIFIER

| Characteristics: | Unit No. 1 | Unit No. 2 | |
|---|------------|------------|------------|
| Plate Voltage | . 250 | 250 | volts |
| Grid Voltage | | -10.5 | volts |
| Amplification Factor | | 15.5 | |
| Plate Resistance (Approx.) | . 7700 | 3450 | ohms |
| Transconductance | | 4500 | μ mhos |
| Grid Voltage (Approx.) for plate current of 10 µa | | - | volts |
| Grid Voltage (Approx.) for plate current of 50 µa | | -22 | volts |
| Plate Current. | | 19 | ma |
| Plate Current for grid voltage of -16 volts | . – | 3 | ma |

VERTICAL DEFLECTION OSCILLATOR AND AMPLIFIER

For operation in a 525-line, 30-frame system

| | Unit No. 1 | Unit No. 2 | |
|---|------------|-----------------------|-------|
| Maximum Ratings, (Design-Center Values): | Oscillator | Amplifier | |
| DC PLATE VOLTAGE | 500 max | 500 max | volts |
| PEAK POSITIVE-PULSE PLATE VOLTAGET (Absolute Maximum) | - | 2200 [*] max | volts |
| PEAK NEGATIVE-PULSE GRID VOLTAGE. | -400 max | -250 max | volts |
| PEAK CATHODE CURRENT. | 70 max | 105 max | ma |
| AVERAGE CATHODE CURRENT | 20 max | 30 max | ma |
| PLATE DISSIPATION. | 1.25 max | 6.5 max | watts |
| PEAK HEATER-CATHODE VOLTAGE: | | | |
| Heater negative with respect to cathode | 200 max | 200 max | volts |
| Heater positive with respect to cathode | 200 max | 200 • max | volts |
| | | | |

Maximum Circuit Values:

Grid-Circuit Resistance..... 2.2 max2.2 max megohms t The duration of the voltage pulse must not exceed 15 per cent of one vertical scanning cycle. In a 525-line, 30-frame system, 15 per cent of one vertical scanning cycle is 2.5 milliseconds. ▲ Under no circumstances should this absolute value be exceeded.

The dc component must not exceed 100 volts.

BEAM POWER TUBE

| | BEAM POWER TUBE | H(4)_(5 | 5) ^{GI} |
|--|--|--|------------------------------------|
| 6CU5 Related types: 12CU5/12C5, 17CU5 | Miniature type used in the audio output stage of television receivers. Outline 7C, OUTLINES SECTION. Tube requires miniature seven-contact socket and may be mounted in any position. | | G _{G2} |
| DIRECT INTERELECTRODE Grid No.1 to Plate Grid No.1 to Cathode, | CAPACITANCES (Approx.): Heater, Grid No.2, and Grid No.3 ter, Grid No.2, and Grid No.3 | $ \begin{array}{r} 6.3 \\ 1.2 \\ 0.6 \\ 13 \\ 8.5 \\ \end{array} $ | volts amperes pf pf pf |
| Maximum Ratings, (Desi | CLASS A1 AMPLIFIER | 150 max | volts |


| GRID-NO.2 (SCREEN-GRID) VOLTAGE. GRID-NO.1 (CONTROL-GRID) VOLTAGE. Positive-bias value. PLATE DISSIPATION. GRID-NO.2 INPUT. PEAK HEATER-CATHODE VOLTAGE: Heater negative with respect to cathode. Heater positive with respect to cathode. BULB TEMPERATURE (At hottest point). The dc component must not exceed 100 volts. | 130 max 0 max 7 max 1.4 max 200 max 200 ^m max 220 max | volts volts watts watts volts volts °C |
|---|--|---|
| Typical Operation: | | |
| Plate Voltage. Grid-No.2 Voltage. Grid-No.1 Voltage. Peak AF Grid-No.1 Voltage. Peak AF Grid-No.1 Voltage. Zero-Signal Plate Current. Maximum-Signal Plate Current. Maximum-Signal Grid-No.2 Current. Plate Resistance (Approx.). Transconductance. Load Resistance. Total Harmonic Distortion. Maximum-Signal Power Output. Maximum-Signal Power Output. | $ \begin{array}{c} 120\\ 110\\ -8\\ 8\\ 49\\ 50\\ 4\\ 8.5\\ 10000\\ 7500\\ 2500\\ 10\\ 2.3\\ \end{array} $ | volts volts volts ma ma ma ohms umhos ohms per cent watts |
| Maximum Circuit Values: | | |
| Grid-No.1-Circuit Resistance: For fixed-bias operation. For cathode-bias operation. | 0.1 max 0.5 max | megohm megohm |

Technical Data =

Refer to type 6BQ6GTB/6CU6

6CU6

6CU8



MEDIUM-MU TRIODE— SHARP-CUTOFF PENTODE

Miniature type used in a wide variety of applications in color and black-and-white television receivers employing series-connected heater strings. The pentode unit is used as an

if amplifier, a video amplifier, an agc amplifier, and a reactance tube. The triode unit is used in low-frequency oscillator, sync-separator, sync-clipper, and phasesplitter circuits. Outline 8B, OUTLINES SECTION. Tube requires miniature nine-contact socket and may be mounted in any position. For curves of plate characteristics for pentode unit, refer to type 6AN8.

| Heater Voltage (ac/dc) | 6.3 0.45 | volts |
|---|-------------------|-------------------|
| HEATER WARM-UP TIME (Average) | 11 | ampere seconds |
| DIRECT INTERELECTRODE CAPACITANCES: | | |
| Triode Unit: Grid to Plate | 1.6 | nf |
| Grid to Cathode, Heater, Pentode Grid No.3, and Internal Shield | 1 6 1.9 | pf |
| Plate to Cathode, Heater, Pentode Grid No.3, and Internal Shield | 1.6 | pf |
| Pentode Unit: | 0 025 max | |
| Grid No.1 to Plate Grid No.1 to Cathode, Heater, Grid No.2, Grid No.3, Triode Cathode, and | 0.025 max | pf |
| Internal Shield | 7 | pf |
| Plate to Cathode, Heater, Grid No.2, Grid No.3, Triode Cathode, and In- | 0.4 | |
| ternal Shield Pentode Grid No.1 to Triode Plate | $2.4 \\ 0.03 max$ | pf pf |
| Pentode Plate to Triode Plate | 0.07 max | pf |

CLASS A1 AMPLIFIER

| Maximum Ratings, (Design-Maximum Values): | Triode Unit | Pentode Unit | |
|---|------------------|------------------|---------|
| PLATE VOLTAGE | 330 max | 330 max | volts |
| GRID-NO.2 SUPPLY VOLTAGE | | 330 max | volts |
| GRID-NO.2 (SCREEN-GRID) VOLTAGE | - | See curve p | bage 70 |
| GRID-NO.1 (CONTROL-GRID) VOLTAGE, Positive-bias value | 0 max | 0 max | volts |
| PLATE DISSIPATION | 2.8 max | 2.3 max | watts |
| GRID-NO.2 INPUT: | | | |
| For grid-No.2 voltages up to 165 volts | - | 0.55 max | watt |
| For grid-No.2 voltages between 165 and 330 volts | - | See curve p | bage 70 |
| PEAK HEATER-CATHODE VOLTAGE: | | | |
| Heater negative with respect to cathode | 200 max | 200 max | volts |
| Heater positive with respect to cathode | $200^{\circ}max$ | $200^{\circ}max$ | volts |

| Characteristics: | Triode Unit | Pentode Unit | |
|--|-------------|--|-------|
| Plate Supply Voltage | 125 | 125 | volts |
| Grid-No.2 Supply Voltage | - | 125 | volts |
| Grid-No.1 Voltage | -1 | | volts |
| Cathode-Bias Resistor | - | 56 | ohms |
| Amplification Factor | 24 | and a second | |
| Plate Resistance (Approx.) | 4100 | 170000 | ohms |
| Transconductance | 5800 | 7800 | μmhos |
| Grid-No.1 Voltage (Approx.) for plate current of 20 µa | -19 | -8 | volts |
| Plate Current | 17 | 12 | ma |
| Plate Current for grid-No.1 voltage of -3 volts and cathode- | | | |
| bias resistor of 0 ohms | - | -1.6 | ma |
| Grid-No.2 Current | - | 3.8 | ma |
| ° The dc component must not exceed 100 volts. | | | |

HIGH-MU TRIODE

Nuvistor type used as a groundedcathode, neutralized rf amplifier in vhf tuners of television and FM receivers. Outline 1, OUTLINES SECTION. Tube requires nuvistor socket and may be operated in any position.



| HEATER VOLTAGE (AC/DC) | 6.3 | volts |
|---|-------|-------|
| HEATER CURRENT. | 0.135 | amp |
| DIRECT INTERELECTRODE CAPACITANCES (Approx.): | | |
| Grid to Plate | 0.92 | pf |
| Grid to Cathode, Heater, and Shell. | 4.3 | pf |
| Plate to Cathode, Heater, and Shell | 1.8 | pf |
| Plate to Cathode | 0.18 | pf |
| Heater to Cathode | 1.6 | pf |

CLASS A1 AMPLIFIER


Maximum Ratings, (Design-Maximum Values):

6CW4

Related types:

2CW4, 13CW4

| PLATE SUPPLY VOLTAGE. PLATE VOLTAGE. GRID VOLTAGE: | 300° max 135 max | volts volts |
|--|---------------------|----------------|
| Negative-bias value. Peak positive value. | 55 max 0 max | volts |
| PLATE DISSIPATION | 1.5 max 15 max | watt |
| PEAK HEATER-CATHODE VOLTAGE: Heater negative with respect to cathode Heater positive with respect to cathode | 100 max 100 max | volts volts |

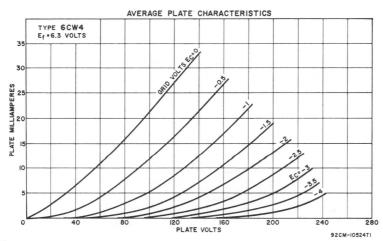

= Technical Data ==

Characteristics and Typical Operation:


| Plate Supply Voltage | 110 | 70 | volts |
|---|------|-------|-------|
| Grid Supply Voltage | 0 | 0 | volts |
| Cathode-Bias Resistor | 130 | - | ohms |
| Grid Resistor | | 47000 | ohms |
| Amplification Factor | 65 | 68 | |
| Plate Resistance (Approx.) | 6600 | 5440 | ohms |
| Transconductance | 9800 | 12500 | μmhos |
| Grid Voltage (Approx.) for plate current of 10 µa | -4 | | volts |
| Plate Current | 7 | 7.2 | ma |
| | | | |

Maximum Circuit Values:

 Grid-Circuit Resistance:
 0.5 max
 megohm

 For fixed-bias operation
 2.2 max
 megohms

° A plate supply voltage of 300 volts may be used provided that a sufficiently large resistor is used in the plate circuit to limit the plate dissipation to 1.5 watts under any condition of operation. \blacksquare For operation at metal-shell temperatures up to 135° C.



MEDIUM-MU TRIODE— SHARP-CUTOFF PENTODE

Miniature type used in television receiver applications. Pentode unit is used as video amplifier; triode unit is used in sound intermediate-frequency amplifier, sweep-oscillator, sync-sep-




arator, sync-amplifier, and sync-clipper circuits. Outline 8D, OUTLINES SEC-TION. Tube requires miniature nine-contact socket and may be mounted in any position. Heater volts (ac/dc), 6.3; amperes, 0.75.

CLASS A1 AMPLIFIER

| Maximum Ratings, (Design-Maximum Values): PLATE VOLTAGE. GRID-NO.2 (SCREEN-GRID) SUPPLY VOLTAGE. GRID-NO.2 VOLTAGE. GRID-NO.1 (CONTROL-GRID) VOLTAGE, Positive-bias value PLATE DISSIPATION. GRID-NO.2 INPUT: For grid-No.2 voltages up to 165 volts. For grid-No.2 voltages between 165 and 330 volts. PEAK HEATER-CATHODE VOLTAGE: Heater negative with respect to cathode. Heater positive with respect to cathode. | Triode Unit 330 max - 0 max 2 max - 200 max 200 max | Pentode Unit 330 max 330 max See curve 0 max 5 max 1.1 max See curve 200 max 200 ^m max | volts watts watts |
|---|--|--|-------------------------|
| Characteristics: | | | |
| Plate Supply Voltage Grid-No.2 Supply Voltage | 150 | 200 125 | volts |
| Cathode-Bias Resistor | 150 | 68 | ohms |
| Amplification Factor. Plate Resistance (Approx.). | $\begin{array}{r} 40 \\ 8700 \end{array}$ | 70000 | ohms |
| Transconductance | 4600 | 10000 | μmhos |
| Grid-No.1 Voltage (Approx.) for plate current of 100 µa Plate Current. | $^{-5}_{9.2}$ | -8.5 24 | volts |
| Grid-No.2 Current | _ | 5.2 | ma |
| Maximum Circuit Values: | | | |
| Grid-No.1-Circuit Resistance: | | | |

| For fixed-bias operation For cathode-bias operation | $\begin{array}{c} 0.5 \ max \\ 1 \ max \end{array}$ | $\begin{array}{c} 0.25 \ max \\ 1 \ max \end{array}$ | megohm megohm |
|--|---|--|------------------|
| The de component must not exceed 100 volts | | | |

The dc component must not exceed 100 volts.



SHARP-CUTOFF TETRODE

Miniature type used as rf amplifier in vhf tuners of television receivers. Outline 7B, OUTLINES SECTION. Tube requires miniature seven-contact socket and may be mounted in any position.

6CY5 Related types: 2CY5, 3CY5, 4CY5

| HEATER VOLTAGE (AC/DC) | 6.3 | volts |
|--|------|--------|
| HEATER CURRENT | 0.2 | ampere |
| DIRECT INTERELECTRODE CAPACITANCES (Approx.)°: | | |
| Grid-No.1 to Plate | 0.03 | pf |
| Grid-No.1 to Cathode, Heater, Grid No.2, and Internal Shield | 4.5 | pf |
| Plate to Cathode, Heater, Grid No.2, and Internal Shield | 3 | pf |
| ° With external shield connected to cathode. | | |

CLASS A1 AMPLIFIER


Maximum Ratings, (Design-Maximum Values):

| PLATE VOLTAGE. GRID-NO.2 (SCREEN-GRID) SUPPLY VOLTAGE. GRID-NO.2 VOLTAGE. | 180 max 180 max | |
|---|--------------------|------------|
| GRID-NO.2 VOLTAGE. GRID-NO.1 (CONTROL-GRID) VOLTAGE. Positive-bias value | 0 max | |
| CATHODE CURRENT. | 20 max | |
| GRID-NO.2 INPUT: | | |
| For grid-No.2 voltages up to 90 volts | 0.5 max | |
| For grid-No.2 voltages between 90 and 180 volts | | ve page 70 |
| PLATE DISSIPATION | 2 max | watts |
| PEAK HEATER-CATHODE VOLTAGE: | 100 | |
| Heater negative with respect to cathode | 100 max | 10100 |
| Heater positive with respect to cathode | 100 max | volts |
| Charles 1 at | | |
| Characteristics: | | |
| Plate Voltage | 125 | volts |
| Grid-No.2 Voltage | 80 | volts |
| Grid-No.1 Voltage | -1 | volt |
| Plate Resistance (Approx.) | 0.1 | megohm |
| Transconductance | 8000 | μmhos |
| Plate Current | 10 | ma |
| Grid-No.2 Current | 1.5 | ma |
| Grid-No.1 Voltage (Approx.) for plate current of 20 µa | -6 | volts |
| | | |

Maximum Circuit Value:


Grid-No.1-Circuit Resistance.....

0.5 max megohm

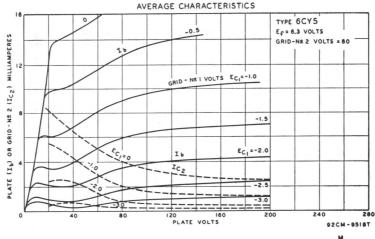

DUAL TRIODE

Miniature type used as combined vertical oscillator and vertical deflection amplifier in television receivers. Unit No.1 is a high-mu triode unit used as a blocking oscillator in



vertical deflection circuits, and unit No.2 is a low-mu triode unit used as a vertical deflection amplifier. Outline 8D, OUTLINES SECTION. Tube requires miniature nine-contact socket and may be mounted in any position. Heater volts (ac/dc), 6.3; amperes, 0.75.

6CY7

Related type:

11CY7

Technical Data =

CLASS A1 AMPLIFIER

| Characteristics: | Unit No.1 | Unit No.2 | |
|--|-----------|-----------|-------|
| Plate Supply Voltage | 250 | 150 | volts |
| Grid Voltage | -3 | - | volts |
| Cathode-Bias Resistor | - | 620 | ohms |
| Amplification Factor | 68 | 5 | |
| Plate Resistance (Approx.) | 52000 | 920 | ohms |
| Transconductance | 1300 | 5400 | µmhos |
| Grid Voltage (Approx.) for plate current of 10 μ a | -5.5 | | volts |
| Grid Voltage (Approx.) for plate current of 200 µa | - | -40 | volts |
| Plate Current | | 30 | ma |
| Plate Current for grid voltage of -30 volts | | 3.5 | ma |

VERTICAL DEFLECTION OSCILLATOR AND AMPLIFIER


For operation in a 525-line, 30-frame system

| Maximum Ratings, (Design-Maximum Values): DC PLATE VOLTAGE. PBAK POSITIVE-PULSE PLATE VOLTAGE#. PEAK NEGATIVE-PULSE GRID VOLTAGE. PEAK CATHODE CURRENT. AVERAGE CATHODE CURRENT. PLATE DISSIPATION | Unit No.1 Oscillator 350 max -400 max | Unit No.2 Amplifier 350 max 1800 max -250 max 120 max 35 max 5 5 max | volts volts volts ma ma watts |
|--|--|---|--|
| PLATE DISSIPATION. | 1 max | | watts |
| PEAK HEATER-CATHODE VOLTAGE: | I mai | 0.0 max | 14000 |
| Heater negative with respect to cathode | 200 max | 200_max | volts |
| Heater positive with respect to cathode | 200 • max | 2 00 <i>max</i> | volts |
| | | | |

Maximum Circuit Values:

Grid-Circuit Resistance . . . 2.2 max 2.2†max megohms # The duration of the voltage pulse must not exceed 15 per cent of one vertical scanning cycle. In a 525-line, 30-frame system, 15 per cent of one vertical scanning cycle is 2.5 milliseconds. The dc component must not exceed 100 volts.

† For cathode-bias operation.



BEAM POWER TUBE

Miniature type used as a vertical deflection amplifier in high-efficiency deflection circuits of television receivers utilizing picture tubes having diagonal deflection angles of 110 degrees



and operating at ultor voltages up to 18 kilovolts. Also used in the audio output stage of television and radio receivers. This type has a controlled heater warm-up time for use in receivers employing series-connected heater strings. Outline 8E, OUTLINES SECTION. Tube requires miniature nine-contact socket and may be mounted in any position.

| HEATER VOLTAGE (AC/DC) HEATER CURRENT. HEATER WARM-UP TIME (Average). | $\begin{smallmatrix} 6.3\\ 0.45\\ 11 \end{smallmatrix}$ | volts ampere seconds |
|--|---|----------------------------|
| DIRECT INTERELECTRODE CAPACITANCES: | | |
| Grid No.1 to Plate | 0.4 max | pf |
| Grid No.1 to Cathode, Heater, Grid No.2, and Grid No.3, | 9 | pf |
| Plate to Cathode, Heater, Grid No.2, and Grid No.3, | 6 | pf |
| PLATE RESISTANCE (Approx.)* | 0.073 | megohm |
| TRANSCONDUCTANCE* | 4800 | µmhos |
| * Plate and grid-No.2 volts, 250; grid-No.1 volts, -14; plate ma., 46; grid-No.2 | ma., 4.6. | |

VERTICAL DEFLECTION AMPLIFIER

For operation in a 525-line, 30-frame system

Maximum Ratings, (Design-Maximum Values):

| DC PLATE VOLTAGE. | 350 max | volts |
|--|------------------|-------|
| PEAK POSITIVE-PULSE PLATE VOLTAGE# | 22 00 max | volts |
| GRID-NO.2 (SCREEN-GRID) VOLTAGE. | 315 max | volts |
| PEAK NEGATIVE-PULSE GRID-NO.1 (CONTROL-GRID) VOLTAGE | -275 max | volts |
| PEAK CATHODE CURRENT | 155 max | ma |
| AVERAGE CATHODE CURRENT | 45 max | ma |
| PLATE DISSIPATION | 10 max | watts |
| GRID-NO.2 INPUT | 2.2 max | watts |
| PEAK HEATER-CATHODE VOLTAGE: | | |
| Heater negative with respect to cathode | 200 max | volts |
| Heater positive with respect to cathode | $200^{-}max$ | volts |
| BULB TEMPERATURE (At hottest point) | 250 max | °C |

Maximum Circuit Values:

6D6

Grid-No.1-Circuit Resistance:

0.5 maxmegohm For fixed-bias operation... 1.0 max megohm For cathode-bias operation The duration of the voltage pulse must not exceed 15 per cent of one vertical scanning cycle. In a # The duration of the voltage pulse must not vitical acanning cycle is 2.5 milliseconds. The dc component must not exceed 100 volts.

REMOTE-CUTOFF PENTODE

Glass type used in rf and if stages of radio receiversemploying avc. Outline 24A, OUTLINES SECTION. Tube requires six-contact socket. Except for interelectrode capacitances, this type is identical electrically with type 6U7-G. Refer to type 6SK7 for application information. Heater volts (ac/dc), 6.3; amperes, 0.3. This type is used principally for renewal purposes.

SHARP-CUTOFF PENTODE

Glass type used as detector or amplifier in radio receivers. Outline 24A, OUTLINES SEC-TION. Heater volts (ac/dc), 6.3; amperes, 0.3. For electrical characteristics, refer to type 6J7. Type 6D7 is a DISCONTINUED type listed for reference only.

PENTAGRID CONVERTER

Glass octal type used in superheterodyne circuits. Outline 23, OUTLINES SECTION. Tube requires octal socket. Heater volts (ac/dc), 6.3; amperes, 0.15. Except for interelectrode capacitances and heater rating, the 6D8-G is similar electrically to type 6A8-G. Type 6D8-G is a DISCONTINUED type listed for reference only.

HALF-WAVE VACUUM RECTIFIER

Glass octal type used as damper tube in horizontal-deflection circuits of television receivers. Outline 14C, OUTLINES SECTION. Tube requires octal socket and may be mounted

in any position. May be supplied with pin No.1 omitted. Socket terminals 1, 2, 4, and 6 should not be used as tie points. It is important that this tube, like other power-handling tubes, be adequately ventilated. Heater volts (ac/dc), 6.3; amperes, 1.2.

DAMPER SERVICE

For operation in a 525-line, 30-frame system

| Maximum Ratings, (Design-Maximum Values): | | |
|--|----------------------|-----------|
| PEAK INVERSE PLATE CURRENT [®] | 4400 max | volts |
| PEAK PLATE CURRENT | 900 max | ma |
| DC PLATE CURRENT | 155 max | ma |
| PLATE DISSIPATION | 5.5 max | watts |
| PEAK HEATER-CATHODE VOLTAGE: | | |
| Heater negative with respect to cathode | 4400 max | volts |
| Heater positive with respect to cathode | 300 ⁴ max | volts |
| • The duration of the voltage pulse must not exceed 15 per cent of one horizonta | al scanning cy | cle. In a |

525-line, 30-frame system, 15 per cent of one horizontal scanning cycle is 10 microseconds. The dc component must not exceed 900 volts.

* The dc component must not exceed 100 volts.

BEAM POWER TUBE

Miniature type used as verticaldeflection-amplifier tube in television receivers. Outline 8D, OUTLINES SECTION, except all vertical dimensions of this type are 1/8 inch greater.



(3

6D8G

6D7

6DA4 **Related type:**

17D4

224

6**D**B5

=== Technical Data =

Tube requires miniature nine-contact socket and may be operated in any position. Heater volts (ac/dc), 6.3; amperes, 1.2. Except for heater ratings, this type is identical with miniature type 12DB5.



SHARP-CUTOFF PENTODE

Miniature type used in the gaincontrolled picture if stages of color television receivers. It is also used as a radio-frequency amplifier in the tuners of such receivers. Outline 7B, OUT- 6DC6

LINES SECTION. Tube requires seven-contact miniature socket and may be mounted in any position.

| HEATER VOLTAGE (AC/DC). HEATER CURRENT DIRECT INTERELECTRODE CAPACITANCES: | 6.3 0.3 | volts ampere |
|--|--|--|
| Grid No.1 to Plate | 0.02 max 6.5 2 | pf pf pf |
| CLASS A1AMPLIFIER | | |
| Maximum Ratings, (Design-Center Values): | | |
| PLATE VOLTAGE. GRID-NO.3 (SUPPRESSOR-GRID) VOLTAGE, Positive value. GRID-NO.2 SUPPLY VOLTAGE. GRID-NO.2 (SCREEN-GRID) VOLTAGE. GRID-NO.1 (CONTROL-GRID) VOLTAGE, Positive-bias value. PLATE DISSIPATION. GRID-NO.2 INPUT: | 300 max 0 max 300 max See curvo 0 max 2 max | volts volts e page 70 volts watts |
| For grid-No.2 voltages up to 150 volts. For grid-No.2 voltages between 150 and 300 volts. PEAK HEATER-CATHODE VOLTAGE: Heater negative with respect to cathode. Heater positive with respect to cathode. | 0.5 max See cur 200 max 200°max | watt ve page 70 volts volts |
| Characteristics: | | |
| Plate Supply Voltage. Connect Grid No.3 Connect Grid-No.2 Supply Voltage Connect Cathode-Bias Resistor. Plate Resistance (Approx.) Transconductance. Grid-No.1 Voltage (Approx.) for transconductance of 50 µmhos. Plate Current. Grid-No.2 Current. | 200 ed to cathodo 150 180 0.5 5500 -12.5 9 3 | volts e at socket ohms megohm umhos volts ma ma |
| Maximum Circuit Values: | | |
| Grid-No.1-Circuit Resistance: For fixed-bias operation. For cathode-bias operation | 0.25 max 1.0 max | megohm megohm |
| AVERAGE PLATE CHARACTERISTICS | | |




25 TYPE 6DC6 Ef = 6.3 VOLTS GRID-Nº3 VOLTS = 0 GRID-Nº2 VOLTS = 150 0 20 GRID-NEI VOLTS ECI =-1 MILLIAMPERES PLATE | - 2 - 3 -4 -6 -10 300 350 50 100 150 200 PLATE VOLTS 250 92CM-8330TI

225

TWIN DIODE— SEMIREMOTE-CUTOFF PENTODE

Miniature type used as rf- and if-amplifier tubes in radio and television receivers. Outline 8D, OUT-LINESSECTION.Tuberequiresninecontact socket and may be mounted



in any position. Heater volts (ac/dc), 6.3; amperes, 0.3.

PENTODE UNIT AS CLASS AI AMPLIFIER

| Maximum Ratings, (Design-Center Values): | | |
|--|----------|---------|
| PLATE SUPPLY VOLTAGE. | 550 max | volts |
| PLATE VOLTAGE | 300 max | volts |
| GRID-NO.2 VOLTAGE: | | |
| With plate current greater than 8 ma | 125 max | |
| With plate current less than 4 ma | 300 maa | |
| CATHODE CURRENT. | 16.5 max | |
| GRID-NO.2 INPUT | 0.45 max | |
| PLATE DISSIPATION. | 2.25 max | watts |
| PEAK HEATER-CATHODE VOLTAGE: | | |
| Heater negative with respect to cathode | 100 maa | |
| Heater positive with respect to cathode | 100 maa | r volts |
| | | |
| | | |

Characteristics:

6DC8

| Plate Voltage | 200 | 250 | · volts |
|---|--------|--------------|--------------|
| Grid No.3 | Connec | ted to catho | de at socket |
| Grid-No.2 Voltage | 100 | 100 | volts |
| Grid-No.1 Voltage | -1.5 | -2 | volts |
| Mµ-Factor, Grid No.2 to Grid No.1 | 20 | 20 | |
| Plate Resistance (Approx.) | | 1 | megohm |
| Transconductance | 4500 | 3800 | μmhos |
| Plate Current | 11 | 9 | ma |
| Grid-No.2 Current. | 3.3 | 2.7 | ma |
| Transconductance, at grid-No.1 voltage of -20 volts | 120 | 200 | μmhos |
| | | | |

Maximum Circuit Values: Grid-No.1-Circuit Resistance.

6DF4

Related types:

17DE4, 22DE4

DIODE UNITS (Each Unit)

| Maximum Ratings, (Design-Center Values): | |
|--|---------|
| PEAK INVERSE PLATE VOLTAGE | 200 max |
| PEAK PLATE CURRENT. | 5 max |
| AVERAGE PLATE CURRENT | 0.8 max |

HALF-WAVE VACUUM RECTIFIER

Glass octal type used as damper tube in horizontal-deflection circuits of television receivers. Outline 14F, OUTLINES SECTION. Tube requires octal socket and may be oper-

ated in any position. Socket terminals 1, 2, 4, and 6 should not be used as tie points. It is important that this tube, like other power-handling tubes, be adequately ventilated.

| HEATER VOLTAGE (AC/DC) | 6.3 | volts |
|---|-----|----------|
| HEATER CURRENT DIRECT INTERELECTRODE CAPACITANCES (ADDrox.): | 1.6 | amperes |
| Plate to Cathode and Heater Cathode to Plate and Heater | 8.5 | pf |
| Heater to Cathode | 4 | pi pf |

DAMPER SERVICE

For operation in a 525-line, 30-frame system

| Maximum Ratings, (Design-Maximum Values): | | |
|---|----------|-------|
| PEAK INVERSE PLATE VOLTAGE# | 5500 max | volts |
| PEAK PLATE CURRENT | 1100 max | ma |
| DC PLATE CURRENT. | 180 max | ma |
| PLATE DISSIPATION | 6.5 max | watts |



3 max megohms

volts

ma ma

= Technical Data =

| PEAK HEATER-CATHODE VOLTAGE: Heater negative with respect to cathode Heater positive with respect to cathode | 5500 [•] max 300 [•] max | volts volts |
|--|---|----------------|
| Characteristics, Instantaneous Value: | | |
| Tube Voltage Drop for plate current of 350 ma | 34 | volts |
| # the duration of the voltage pulse must not exceed 15 per cent of one horizon | | ycle. In |

a 525-line, 30-frame system, 15 per cent of one horizontal scanning cycle is 10 microseconds. The dc component must not exceed 900 volts.

• The dc component must not exceed 100 volts.



SHARP-CUTOFF PENTODE

Miniature type used in the gaincontrolled picture if stages of television receivers utilizing an intermediate frequency in the order of 40 megacycles per second. Also used as an rf amplifier

in vhf television tuners. This tube features very high transconductance combined with low interelectrode capacitance values, and is provided with separate base pins for grid No.3 and cathode to permit the use of an unbypassed cathode resistor to minimize the effects of regeneration. Outline 7B, OUTLINES SECTION. Tube requires miniature seven-contact socket and may be mounted in any position.

| HEATER VOLTAGE (AC/DC) | roquines in | | 001011 | | | | | | ~ ~ ~ ~ | | | and b | | |
|--|--------------------|---------------------------|----------------|---------|---------|--------|---------|--------|-----------|---------|--------|-----------|-------|----------|
| DIRECT INTERELECTRODE CAPACITANCES: Grid No.1 to Plate. Grid No.1 to Cathode, Heater, Grid No.2, Grid No.3, and Internal Shield. • With external shield. • With external shield connected to cathode. CLASS A1 AMPLIFIER Maximum Ratings, (Design-Maximum Values): PLATE VOLTAGE. GRID-NO.3 (SUPPRESSOR-GRID) VOLTAGE, Positive value. GRID-NO.3 (SUPPRESSOR-GRID) VOLTAGE, Positive value. GRID-NO.3 (SUPPRESSOR-GRID) VOLTAGE, Positive value. GRID-NO.2 (SCREEN-GRID) SUPPLY VOLTAGE. GRID-NO.2 (SCREEN-GRID) VOLTAGE, Positive-bias value. GRID-NO.2 VOLTAGE. GRID-NO.2 voltages up to 165 volts. For grid-NO.2 voltages up to 165 volts. For grid-NO.2 voltages up to 165 volts. For grid-NO.2 voltages up to 165 volts. GRID-NO.2 voltages up to 165 volts. Grid NO.3 down volts Sconserver volts Connected to cathode. CONNECTE TO CATHODE VOLTAGE. GRID-NO.2 voltage: GRID-NO.2 | | | | | | | | | | | | 0.3 | | |
| DIRECT INTERELECTEODE CAPACITANCES: Grid No.1 to Cathode, Heater, Grid No.2, Grid No.3, and Internal Shield. With external shield connected to cathode. CLASS A, AMPLIFIER Maximum Rotings, (Design-Maximum Values): PLATE VOLTAGE. GRID-NO.2 (SCREEN-GRID) VOLTAGE, Positive value GRID-NO.2 (SCREEN-GRID) VOLTAGE, Positive value GRID-NO.1 (CONTROL-GRID) VOLTAGE, Positive-bias value For grid-No.2 voltages between 165 and 330 volts. For grid-No.2 voltages between 165 and 330 volts. For grid-No.2 voltages between 165 and 330 volts. Heater positive with respect to cathode. CLASC PLATE CHARACTERISTICS Type 60E5 GRID-N0.2 (SCREEN-GRID) VOLTAGE, Positive-bias value For grid-No.2 voltages between 165 and 330 volts. Connected to cathode at socket AVERAGE PLATE CHARACTERISTICS Type 60E5 GRID-N2 VOLTAGE. Type 60E5 GRID-N2 VOLTAGE. Connected TO CATHODE VOLTAGE: Type 60E5 GRID-N2 VOLTAGE: Connected TO CATHODE AT SOCKET. Type 60E5 GRID-N2 VOLTAGE: Connected TO CATHODE AT SOCKET. Type 60E5 GRID-N2 VOLTS EC:=-3 Type 60E5 Type 60E5 GRID-N2 VOLTS EC:=-3 Type 60E5 GRID-N2 VOLTS EC:=-3 Type 60E5 Type 60E5 GRID-N2 VOLTS EC:=-3 Type 60E5 GRID-N2 VOLTS EC:=-3 Type 60E5 Type 70E CONTROLE TO CATHODE AT SOCKET. Type 60E5 Type 70E 70E CATHODE AT SOCKET. Type 60E5 GRID-N2 VOLTS EC:=-3 Type 70E | | | | | | | | | | | | | | |
| and Internal Shield | DIRECT INTE | RELECTRO | DE CAP | ACITA | NCES | 3: | | | | | | | | |
| and Internal Shield | Grid No Grid No | .1 to Plate .1 to Cath | ode, He | eater. | Grid | l No.2 | . Grid | No.3 | | 0.025 n | nax | 0.015 m | ax | pf |
| With external shield connected to cathode. CLASS A, AMPLIFIER Maximum Rotings, (Design-Maximum Values): PLATE VOLTAGE. PLATE VOLTAGE. GRID-NO.3 (SUPPRESSON-GRID) VOLTAGE, Positive value 0 max volts GRID-NO.2 (SCREEN-AGID) VOLTAGE, Positive-bias value 0 max volts See curve page 70 0 max valts See curve page 70 0 max valts GRID-NO.2 VOLTAGE CONTROL-GRID) VOLTAGE, Positive-bias value 0.55 max watts GRID-NO.2 voltages between 165 and 330 volts. DEAK HEATER-CATHODE VOLTAGE: Heater negative with respect to cathode. 200 max volts Characteristics: Plate Supply Voltage. AVERAGE PLATE CHARACTERISTICS AVERAGE PLATE CHARACTERISTICS TYPE 60E6 Type 60E6 Type 60E7 GRID-N81 VOLTS Ec1=-3 0 0 0 0 0 0 0 0 0 0 0 0 0 | and Ir Plate to | nternal Shi Cathode, | eld Heater, | Grid | l No. | 2, Gri | d No. | 3, and | In- | | | | | • |
| CLASS A1 AMPLIFIER Maximum Ratings, (Design-Maximum Values): PLATE VOLTAGE | | | | | | | | | | 2 | | 3 | | pf |
| Maximum Ratings, (Design-Maximum Values): PLATE VOLTAGE | • With extern | nal shield | connect | ted to | | | | | | | | | | |
| PLATE VOLTAGE GRID-NO.2 (SCREEN-GRID) VOLTAGE, Positive value | | | | | | | | AMPLI | FIER | | | | | |
| GRID-NO.3 (SUPPRESSOR-GRID) VOLTAGE. Positive value | | | | | | | | | | | | 000 | | |
| GRID-NO.2 (SCREEN-GRID) SUPPLY VOLTAGE. GRID-NO.2 (VOLTAGE. GRID-NO.2 (VOLTAGE.) O mcz volts See curve page 70 0 mcz volts PLATE DIS:IFATION. CONTROL-GRID) VOLTAGE, Positive-bias value For grid-NO.2 voltages between 165 volts. For grid-NO.2 voltages between 165 and 330 volts. Tor grid-NO.2 voltages between 165 and 330 volts. PEAK HEATER-CATHODE VOLTAGE: Heater negative with respect to cathode. Heater positive with respect to cathode. Connected to cathode at socket AVERAGE PLATE CHARACTERISTICS TYPE 6DE6 GRID-NS 2 VOLTS = 125 VOLTS = 125 VOLTS = 125 CONNECTED TO CATHODE AT SOCKET. GRID-NS 2 VOLTS = 125 GRID-NS 2 VOLTS = 125 GRID-NS 2 VOLTS = 125 GRID-NS 2 VOLTS = 125 CONNECTED TO CATHODE AT SOCKET. GRID-NS 2 VOLTS = 125 GRID-NS 2 VOLTS = 125 GRID-NS 2 VOLTS = 125 GRID-NS 2 VOLTS = 125 CONNECTED TO CATHODE AT SOCKET. GRID-NS 2 VOLTS = 125 CONNECTED TO CATHODE AT SOCKET. GRID-NS 2 VOLTS = 125 CONNECTED TO CATHODE AT SOCKET. GRID-NS 2 VOLTS = 125 GRID-NS 2 VOLTS = 125 GRID-NS 2 VOLTS = 125 CONNECTED TO CATHODE AT SOCKET. GRID-NS 2 VOLTS = 125 CONNECTED TO CATHODE AT SOCKET. CONNECTED TO CA | CRID NO 3 (S | AGE | | Vor | TACE | Posi | ivo ve | | | | • • | | | |
| GRID-NO.2 VOLTAGE. See curve page 70 GRID-NO.1 (CONTROL-GRID) VOLTAGE, Positive-bias value 0 0 mcx volts GRID-NO.2 INPUT: 2.3 max watts GRID-NO.2 voltages up to 165 volts. 2.3 max watts GRID-NO.2 voltages up to 165 and 330 volts. 2.5 max watt Por grid-NO.2 voltages between 165 and 330 volts. 2.00 max volts Heater negative with respect to cathode. 200 max volts Heater positive with respect to cathode. 200 max volts Characteristics: Plate Supply Voltage. 125 volts GRID-N3.2 VOLTS ELS GRID -N2 VOLTS IZS VERAGE PLATE CHARACTERISTICS TYPE 6DE6 E4-63 VOLTS IZS GRID -N2 VOLTS IZS GRID -N2 VOLTS IZS 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 | | | | | | | | | | | | | | |
| PLATE DISCIPATION | GRID-NO.2 V | OLTAGE | | | | | | | | | | | | |
| GRID-No.2 INPUT: For grid-No.2 voltages up to 165 volts | | | | | | | | | | | | | | |
| For grid-No.2 voltages up to 165 volts. 0.55 max watt For grid-No.2 voltages between 165 and 330 volts. See curve page 70 PEak HEatER-CATHODE VOLTAGE: 200 max volts Heater negative with respect to cathode. 200 max volts Characteristics: 200 max volts Plate Supply Voltage. 125 volts Grid No.3 Connected to cathode at socket AVERAGE PLATE CHARACTERISTICS Type 6DE 6 E_f=6.3 volt3 GRID N#2 volt3 = 125 Image: solution of the solution of th | | | | | | | | | | | • • | 2.3 ma | x | watts |
| PEAK HEATER-CATHODE VOLTAGE: Heater negative with respect to cathode | For grid-l | No.2 volta | ges up | to 16 | 5 vol | ts | N volt | | | | | | | |
| Heater positive with respect to cathode | PEAK HEATE | R-CATHOD | E VOLT | AGE: | | | | | | | | Deel | urve | page 10 |
| Characteristics: Plate Supply Voltage. 125 volts Grid No.3. Connected to cathode at socket AVERAGE PLATE CHARACTERISTICS TYPE 6DE6 E4-6.3 VOLTS AND INTERNAL SHIELD CONNECTED TO CATHODE AT SOCKET. GRID-NE2 VOLTS = 125 $E_{C1=0}$ $E_{C1=0$ | Heater ne | gative wit | h respe | et to | cath | ode | | | | | | | | |
| Plate Supply Voltage | | | 1 respec | et to o | catho | ode | • • • • | | • • • • • | | ••• | 200∎ma | lx. | volts |
| Grid No.3. Connected to cathode at socket AVERAGE PLATE CHARACTERISTICS TYPE 6DE6 $E_{4-6,3}$ VOLTS GRID N2 3 AND INTERNAL SHIELD CONNECTED TO CATHODE AT SOCKET. GRID-N2 2 VOLTS = 125 GRID-N2 2 VOLTS = 125 GRI | Characteristi | ics: | | | | | | | | | | 105 | | 1. |
| AVERAGE PLATE CHARACTERISTICS | Plate Supply | Voltage. | • • • • • • | | • • • • | | | | | Con | | | e abo | |
| | Gild No.0 | | | | | | | | | | neetee | t to cath | oue a | t socket |
| $ \begin{array}{c ccccccccccccccccccccccccccccccccccc$ | | | | | | | | | | (131)(3 | | | | |
| GRID Nº 3 AND INTERNAL SHIELD CONNECTED TO CATHODE AT SOCKET. GRID-Nº 2 VOLTS = 125 10 $E_{C =0}$ $C_{C =0$ | | | | | | | | | | | | - | | |
| CONNECTED TO CATHODE AT SOCKET. GRID-N#2 VOLTS = 125 $E_{CI}=0$ $C_{RID}-N#1$ VOLTS $E_{CI}=-3$ $C_{CI}=-5$ $C_{CI}=$ | | | | | | | | | | | | | | |
| $ \begin{array}{c ccccccccccccccccccccccccccccccccccc$ | | CONNECTED | TO CA | THODE | AT | SOCKET | | | | | | | | |
| $ \begin{array}{c ccccccccccccccccccccccccccccccccccc$ | G | RID-Nº 2 VO | LTS = 125 | 5 | | | | | | | | | | |
| $ \begin{array}{c ccccccccccccccccccccccccccccccccccc$ | 30 | | | | | | | | | | | | | |
| $ \begin{array}{c ccccccccccccccccccccccccccccccccccc$ | 0 | | | | | | | | | | | | | |
| $ \begin{array}{c ccccccccccccccccccccccccccccccccccc$ | Ϋ́Ε | | E | C1=0 | | | | | | | | | | |
| $ \begin{array}{c ccccccccccccccccccccccccccccccccccc$ | E E | | | | | | | | | | | | | |
| $ \begin{array}{c ccccccccccccccccccccccccccccccccccc$ | AM | / | | | | | | | | | | | | |
| $ \begin{array}{c ccccccccccccccccccccccccccccccccccc$ | 120 | | | | -1- | - | | | | | | | | |
| $ \begin{array}{c ccccccccccccccccccccccccccccccccccc$ | | H | | | | | | | | | | | | |
| $ \begin{array}{c ccccccccccccccccccccccccccccccccccc$ | 2 | / | | | | | | | | | | | | |
| $ \begin{array}{c ccccccccccccccccccccccccccccccccccc$ | 2 | | | | | -2 | - | | | | | | | |
| $ \begin{array}{c ccccccccccccccccccccccccccccccccccc$ | - 1 | 1 | | | | | | | | | | | | |
| 0 200 300 400 500 PLATE VOLTS | 10 | | | GRID- | NºI Y | VOLTS | ECI=-3 | | | | | | | |
| 0 200 300 400 500 PLATE VOLTS | | H | | | | | | | | | | | | |
| 0 200 300 400 500 PLATE VOLTS | - | | | | | | | -4 | | | | | | |
| PLATE VOLTS | 1 | | | | | | | EC1=-5 | | | | | | |
| PLATE VOLTS | F | | | | | | | | -0 | | | | | |
| | 0 | 10 | 0 | 200 | 0 | 3 | PLATE | VOLTS | 00 | 500 | | | | |

92CM-8578TI

6DF6


Related type.

4DE6

| Grid-No.2 Supply Voltage Cathode-Bias Resistor Plate Resistance (Approx.) Transconductance of grid-No.1 volts of -5.5 and cathode resistor of 0 ohms Grid-No.1 Voltage (Approx.) for plate current of 20 μa. Plate Current Grid-No.2 Current. | $125 \\ 56 \\ 0.25 \\ 8000 \\ 700 \\ -9 \\ 15.5 \\ 4.2$ | volt3 ohms megohm µmhos volt2 ma ma |
|---|---|---|
| The dc component must not exceed 100 volts | 4.2 | ma |
| | | |


DUAL TRIODE

6DE7 Related types: 10DE7, 13DE7 Miniature type used as combined vertical oscillator and vertical-deflection amplifier in television receivers. Unit No.1 is a medium-mu triode unit used as a blocking oscillator in



vertical-deflection circuits, and unit No.2 is a low-mu triode unit used as a verticaldeflection amplifier. Outline 8D, OUTLINES SECTION. Tube requires miniature nine-contact socket and may be mounted in any position. For curve of average plate characteristics, Unit No.2, refer to type 6DR7.

| HEATER VOLTAGE (AC/DC) HEATER CURRENT. DIRECT INTERELECTRODE CAPACITANCES (Approx.): Grid to Plate Grid to Cathode and Heater. Plate to Cathode and Heater. | Unit No.1 4 2.2 6.52 | 6.3 0.9 Unit No.2 8.5 5.5 1 | volts ampere pf pf |
|--|-------------------------------|--|-----------------------------|
| CLASS A1 AMPLIFIER | | | |
| Characteristics. | Uni: No.1 | Unit No.2 | |
| Plate Voltage | 250 | 150 | volts |
| Grid Voltage | -11 | -17.5 | volts |
| Amplification Factor | 17.5 | 6 | |
| Plate Resistance (Approx.) | 8750 | 925 | ohms |
| Transconductance | 2000 | 6500 | μmhos |
| Plate Current | 5.5 | 35 | ma |
| Plate Current for grid voltage of -24 volts | - | 10 | ma |
| Grid Voltage (Approx.) for plate current of 10 µa | -20 | - | volts |
| Grid Voltage (Approx.) for plate current of 50 µa | - | -44 | volts |
| | | | |

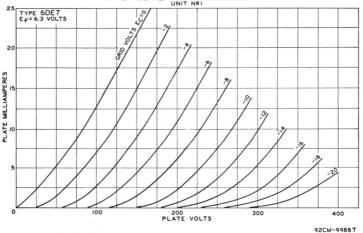

AVERAGE PLATE CHARACTERISTICS

VERTICAL-DEFLECTION OSCILLATOR AND AMPLIFIER For operation in a 525-line, \$0-frame system

| ror operation in a sub-time, bo-frame | system | | |
|--|-------------------------|------------------------|-------|
| Maximum Ratings, (Design-Maximum Values): | Unit No.1 Occillator | Unit No.2 Amplifier | |
| DC Plate Voltage Peak Positive-Pulse Plate Voltage# | 330 max | 275 max 1500 max | volts |
| PEAK NEGATIVE-PULSE GRID VOLTAGE | -400 max | -250 max | volts |
| PEAK CATHODE CURRENT. | 77 max 22 max | 175 max 50 max | ma |
| | | | |

= Technical Data =

| PLATE DISSIPATION. | 1.5 max | 7 max | watts |
|--|---------------------------------|--------------------|----------------|
| PEAK HEATER-CATHODE VOLTAGE: Heater negative with respect to cathode Heater positive with respect to cathode | 200 max 200 [∎] max | 200 max 200 max | volts volts |

Maximum Circuit Values:

Grid-Circuit Resistance:

For grid-resistor bias or cathode-bias operation..... 2 2 mar 2.2 max megohms # The duration of the voltage pulse must not exceed 15 per cent of one vertical scanning cycle. In a 525-line, 30-frame system, 15 per cent of one vertical scanning cycle is 2.5 milliseconds. The dc component must not exceed 100 volts.

BEAM POWER TUBE

Glass octal type used as output tube in audio-amplifier applications. Outline 14C, OUTLINES SECTION. Tube requires octal socket and may be mounted in any position. This type may be supplied with pin 1 omitted.


| HEATER VOLTAGE (AC/DC) | 6.3 | volts |
|--|-----|---------|
| HEATER CURRENT | 1.2 | amperes |
| DIRECT INTERELECTRODE CAPACITANCES (Approx.): | | - |
| Grid No.1 to Plate | 0.6 | pf |
| Grid No.1 to Cathode, Heater, Grid No.2, and Grid No.3 | 15 | pf |
| Plate to Cathode, Heater, Grid No.2, and Grid No.3 | 10 | pf |

CLASS A1 AUDIO-FREQUENCY POWER AMPLIFIER

Maximum Ratings, (Design-Center Values):

| PLATE VOLTAGE. GRID-NO.2 (SCREEN-GRID) VOLTAGE. PLATE DISSIPATION. GRID-NO.2 INPUT. PEAK HEATER-CATHODE VOLTAGE: Heater negative with respect to cathode. Heater positive with respect to cathode. Typical Operation: | 125 max 10 max 1.25 max 200 max | volts volts watts watts volts volts |
|---|---|---|
| Plate Supply Voltage 110 Grid-No.2 Supply Voltage 110 Grid-No.1 (Control-Grid) Supply Voltage -7.5 Peak AF Grid-No.1 Voltage -7.5 Cathode-Bias Resistor - Zero-Signal Plate Current 49 Maximum-Signal Grid-No.2 Current 4 Maximum-Signal Grid-No.2 Current 10 Plate Resistance (Approx). 13000 Transconductance 8000 Load Resistance 2000 Total Harmonic Distortion. 10 Maximum-Signal Power Output 2.1 | $\begin{array}{c} 200\\ 125\\ -\\ 8.5\\ 180\\ 46\\ 47\\ 2.2\\ 8.5\\ 28000\\ 8000\\ 4000\\ 10\\ 3.8 \end{array}$ | volts volts volts ohms ma ma ma ohms µmhos ohms per cent watts |
| Maximum Circuit Values: Grid-No.1-Circuit Resistance: For fixed-bias operation. For cathode-bias operation. | | megohm megohm |

* The dc component must not exceed 100 volts.



SHARP-CUTOFF PENTODE

Miniature type used as intermediate-frequency amplifier tube in television receivers. This tube features high transconductance at low plate and grid-No.2 voltages, combined with low



interelectrode capacitances. Outline 7B, OUTLINES SECTION. Tube requires miniature seven-contact socket and may be mounted in any position.

| HEATER VOLTAGE (AC/DC) | 6.3 0.3 | volts ampere |
|--|------------|-----------------|
| DIRECT INTERELECTRODE CAPACITANCES: Grid No.1 to Plate | 0.025 max | pf |
| Grid No.1 to Cathode, Heater, Grid No.2, Grid No.3, and Internal Shield | 6.3 | pf |
| Plate to Cathode, Heater, Grid No.2, Grid No.3, and In- | | p. |
| ternal Shield | 1.9 | pf |
| | | 229 |




6DG6GT

CLASS A1 AMPLIFIER

| Maximum Ratings, (Design-Maximum Values): | | |
|--|----------------------|------------|
| PLATE VOLTAGE | 330 max | volts |
| GRID-NO.3 (SUPPRESSOR-GRID) VOLTAGE, Positive value | 0 max | volts |
| GRID-No.2 (SCREEN-GRID) SUPPLY VOLTAGE | 330 max | volts |
| GRID-NO.2 VOLTAGE. | See curv | re page 70 |
| GRID-NO.1 (CONTROL-GRID) VOLTAGE, Positive-bias value | 0 max | volts |
| PLATE DISSIPATION | 2.3 max | watts |
| GRID-NO.2 INPUT: | | |
| For grid-No.2 voltages up to 165 volts | 0.55 max | watt |
| For grid-No.2 voltages between 165 and 330 volts | See curv | re page 70 |
| PEAK HEATER-CATHODE VOLTAGE: | | |
| Heater negative with respect to cathode | 200 max | volts |
| Heater positive with respect to cathode | 200 [■] max | volts |
| Characteristics: | | |
| Plate Supply Voltage | 125 | volts |
| Grid No.3. Connected | | |
| Grid-No.2 Supply Voltage. | 125 | volts |
| Cathode-Bias Resistor | 56 | ohms |
| Plate Resistance (Approx.) | 0.35 | megohm |
| Transconductance | 9800 | µmhos |
| Grid-No.1 Voltage (Approx.) for plate current of 20 µa | -6.5 | volts |
| Plate Current | 12 | ma |
| Grid-No 2 Current. | 3.8 | ma |
| The dc component must not exceed 100 volts. | | |

The dc component must not exceed 100 volts.

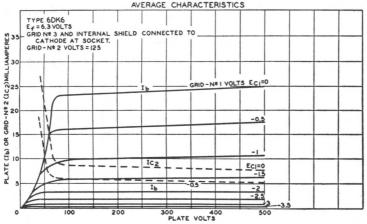

92CM- 985ITI

HALF-WAVE VACUUM RECTIFIER

Glass octal type used as damper tube in horizontal-deflection circuits of television receivers. Outline 14F, OUTLINES SECTION. Tube requires octal socket and may be oper-



ated in any position. Socket terminals 1, 2, 4, and 6 should not be used as tie points. It is important that this tube, like other power-handling tubes, be adequately ventilated.

| HEATER VOLTAGE (AC/DC) | $\begin{array}{c} 6.3\\ 1.2 \end{array}$ | volts amperes |
|---|--|------------------|
| DIRECT INTERELECTRODE CAPACITANCES (Approx.): Plate to Cathode and Heater Cathode to Plate and Heater | 8.5 | pf |
| Heater to Cathode | 4 | pf |
| | | |

DAMPER SERVICE

For operation in a 525-line, 30-frame system

| Maximum Ratings, (Design-Maximum Values): | | |
|---|----------|-------|
| PEAK INVERSE PLATE VOLTAGE ^o | 5000 max | volts |
| PEAK PLATE CURRENT | 1100 max | ma |
| DC PLATE CURRENT | 175 max | ma |

6D/

Related types: 12DM4, 17DM4

| PLATE DISSIPATION. PRAK HEATER-CATHODE VOLTAGE: | 6.5 max | watts |
|--|---------------------|----------------|
| Heater negative with respect to cathode | 5000 max 300 max | volts volts |

= Technical Data =

 $^\circ$ The duration of the voltage pulse must not exceed 15 per cent of one horizontal scanning cycle. In a 525-line, 30-frame system, 15 per cent of one horizontal scanning cycle is 10 microseconds. The dc component must not exceed 900 volts.

• The dc component must not exceed 100 volts.

NC.

6

(5)G

8

GaG


н(2

BEAM POWER TUBE

Glass octal type used as horizontal-deflection amplifier tube in television receivers having low B-supply voltages. Outline 25A, OUT-LINES SECTION. Tube requires octal socket. Vertical mounting is preferred, but horizontal mounting is permissible if pins 1 and 3 are in vertical plane. Heater volts (ac/dc), 6.3; amperes, 2.5. Except for heater ratings, this type is identical with miniature type 25DN6. Type 6DN6 is used principally for renewal purposes.

6DN6 Related type: 25DN6

6DN7



Channel and a station

MEDIUM-MU DUAL TRIODE

Glass octal type used as combined vertical-deflection-oscillator and vertical-deflection-amplifier tube in television receivers. Outline 14B, OUT-LINESSECTION. Tuberequires octal

socket and may be mounted in any position. Heater volts (ac/dc), 6.3; amperes, 0.9.

CLASS A, AMPLIFIER

| Characteristics: | Unit No.1 | Unit No.2 | |
|---|-----------|-----------|--------|
| Plate Voltage | 250 | 250 | volts |
| Grid Voltage | -8 | -9.5 | volts |
| Amplification Factor | 22.5 | 15.4 | |
| Plate Resistance (Approx.) | 9000 | 2000 | ohms |
| Transconductance | 2500 | 7700 | µmhos. |
| Plate Current | 8 | 41 | ma |
| Grid Voltage (Approx.) for plate current of 10 µa | -18 | - | volts |
| Grid Voltage (Approx.) for plate current of 50 µa | - | -23 | volts |

VERTICAL-DEFLECTION OSCILLATOR AND AMPLIFIER

For operation in a 525-line, 30-frame system

| Maximum Ratings, (Design-Maximum Values): | Unit No.1 Oscillator | Unit No.2 Amplifier | |
|---|-------------------------|------------------------|-------|
| DC PLATE VOLTAGE | 350 max | 550 max | volts |
| PEAK POSITIVE-PULSE PLATE VOLTAGE# | - | 2500 max | volts |
| PEAK NEGATIVE-PULSE GRID VOLTAGE | 400 max | 250 max | ma |
| PEAK CATHODE CURRENT | | 150 max | ma |
| AVERAGE CATHODE CURRENT | - | 50 max | ma |
| PLATE DISSIPATION | 1 max | 10 max | watts |
| PEAK HEATER-CATHODE VOLTAGE: | | | |
| Heater negative with respect to cathode | 200 max | 200 max | volts |
| Heater positive with respect to cathode | 200 max | 200 max | volts |
| a second to the probability of the second state of the second s | | | |

Maximum Circuit Values:

Grid-Circuit Resistance: For fixed-bias operation 2.2 max 2.2 max megohms 2.2 max For cathode-bias operation megohms

The duration of the voltage pulse must not exceed 15 per cent of one vertical scanning cycle. In a 525-line, 30-frame system, 15 per cent of one vertical cycle is 2.5 milliseconds. The dc component must not exceed 100 volts.



HALF-WAVE VACUUM RECTIFIER

Glass octal type used as damper tube in horizontal-deflection circuits of television receivers. Outline 14E. OUT-LINES SECTION. Tube requires octal socket and may be mounted in any

6DQ4

position. Socket terminals 1, 2, 4, and 6 should not be used as tie points. Heater volts (ac/dc), 6.3; amperes, 1.2.

DAMPER SERVICE

For operation in a 525-line, 30-frame system

| Maximum Ratings, (Design-Maximum Values): | | |
|---|-----------------|-------|
| PEAK INVERSE PLATE VOLTAGE# | 5500 max | volts |
| PEAK PLATE CURRENT | 1000 max | ma |
| DC PLATE CURRENT | 175 max | ma |
| PLATE DISSIPATION | 6 max | watts |
| PEAK HEATER-CATHODE VOLTAGE: | | |
| Heater negative with respect to cathode | 5500 max | volts |
| Heater positive with respect to cathode | $300^{\Box}max$ | volts |
| Characteristics, Instantaneous Value: | | |
| Tube Voltage Drop for plate current of 250 ma | 32 | volts |

The duration of the voltage pulse must not exceed 15 per cent of one horizontal scanning cycle. In a 525-line, 30-frame system, 15 per cent of one horizontal scanning cycle is 10 microseconds. The dc component must not exceed 900 volts.

^D The dc component must not exceed 100 volts.

BEAM POWER TUBE




Glass octal type used as horizontal deflection amplifier in color television receivers. Outline 25A, OUT-LINES SECTION. Tube requires octal socket and may be mounted in any position.



| HEATER VOLTAGE (AC/DC) | 6.3 | volts |
|--|-------|---------|
| HEATER CURRENT. | 2.5 | amperes |
| DIRECT INTERELECTRODE CAPACITANCES (Approx): | | |
| Grid No.1 to Plate | 0.5 | pf |
| Grid No.1 to Cathode, Heater, Grid No.2, and Grid No.3 | 23 | pf |
| Plate to Cathode, Heater, Grid No.2, and Grid No.3 | | pf |
| PLATE RESISTANCE (Approx.)* | 5500 | ohms |
| TRANSCONDUCTANCE* | 10500 | μmhos |
| MU-FACTOR, Grid No.2 to Grid No.1** | 3.3 | |

* For plate volts, 175; grid-No.2 volts, 125; grid-No.1 volts, -25; plate ma., 110; grid-No.2 ma., 5. ** For plate and grid-No.2 volts, 125; grid-No.1 volts, -25.

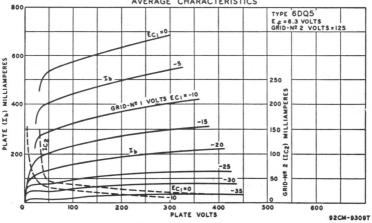

AVERAGE CHARACTERISTICS

HORIZONTAL DEFLECTION AMPLIFIER For operation in a 525-line, 30-frame system

Maximum Ratings, (Design-Maximum Values):

| DC PLATE VOLTAGE. PEAK POSITIVE-PULSE PLATE VOLTAGE† PEAK NEGATIVE-PULSE PLATE VOLTAGE DC GRID-NO.2 (SCREEN-GRID) VOLTAGE PEAK NEGATIVE-PULSE GRID-NO.1 (CONTROL-GRID) VOLTAGE. PEAK CATHODE CURRENT. AVERAGE CATHODE CURRENT. | 190 max -250 max | volts volts volts volts ma ma |
|--|---------------------|--|
| AVERAGE CATHODE CURRENT | 315 max | ma |


| Grid-No.2 Input. Plate Dissipation≢ | 3.2 max 24 max | watts watts |
|---|-------------------|----------------|
| PEAK HEATER-CATHODE VOLTAGE: | | |
| Heater negative with respect to cathode | 200 max | volts |
| Heater positive with respect to cathode | $200^{\circ}max$ | volts |
| BULB TEMPERATURE (At hottest point) | 220 max | °C |
| Maximum Circuit Value: | | |
| | | |

Grid-No.1-Circuit Resistance: For grid-resistor-bias operation.

0.47 max megohm

† The duration of the voltage pulse must not exceed 15 per cent of one horizontal scanning cycle. In a 525-line, 30-frame system, 15 per cent of one horizontal scanning cycle is 10 microseconds.

An adequate bias resistor or other means is required to protect the tube in the absence of excitation. ° The dc component must not exceed 100 volts.

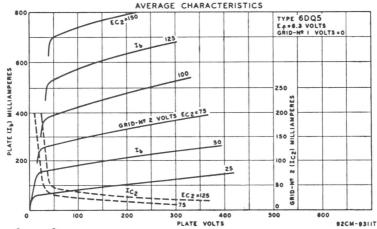



BEAM POWER TUBE

Glass octal types used as horizontal-deflection-amplifier tubes in highefficiency deflection circuits of television receivers. Outline 21, OUT-LINES SECTION. Tubes require

6DQ6A 6DQ6B Related types:

Related types: 12DQ6A, 12DQ6B, 17DQ6A, 17DQ6B

octal socket and may be mounted in any position. These types may be supplied with pin 1 omitted. Type 6DQ6-A is used principally for renewal purposes.

| HEATER VOLTAGE (AC/DC) HEATER CURRENT. DIRECT INTERELECTRODE CAPACITANCE Grid No.1 to Plate. Grid No.1 to Cathode, Heater, Gr Plate to Cathode, Heater, Grid No. | id No.2, a | x.) and Grid No.3. | · · · · · · · · · · · · · · · · · · · | $ \begin{array}{r} 6.3 \\ 1.2 \\ 0.5 \\ 15 \\ 7 \end{array} $ | volts amperes pf pf pf |
|---|--------------|-----------------------|---------------------------------------|---|------------------------------------|
| | CLASS A | AMPLIFIER | | | |
| Characteristics: | 6D | Q6-A | 6DQ | 6-B | |
| Plate Voltage | 60 | 250 | 60 | 250 | volts |
| Grid-No.2 Voltage | 150 | 150 | 150 | 150 | volts |
| Grid-No.1 Voltage | 0 | -22.5 | 0 | -22.5 | volts |
| Plate Resistance (Approx.) | — | 20000 | - | 18000 | ohms |
| Transconductance | | 6600 | - | 7300 | |
| Plate Current | 315° | 55 | 345° | 65 | ma |
| Grid-No.2 Current | 25° | 1.5 | 27° | 1.8 | ma |
| Grid-No.1 Voltage (Approx.) for | | | | | |
| grid-No.2 volts=150, plate ma=1, | | | | | |
| plate volts=250 | - | -40 | | -42 | volts |
| plate volts=5000 | - | -100 | - | -100 | volts |
| HORIZO | NTAL-DE | FLECTION AM | PLIFIER | | |

For operation in a 525-line, 30-frame system


| Maximum Ratings, (Design-Maximum Values): | 6DQ6-A | 6DQ6-B | |
|---|----------|--------------|-------|
| DC PLATE-SUPPLY VOLTAGE. | 770 max | 770 max | volts |
| PEAK POSITIVE-PULSE PLATE VOLTAGE | 6000 max | $6500 \ max$ | volts |

| PEAK NEGATIVE-PULSE PLATE VOLTAGE. DC GRID-NO.2 (SCREEN-GRID) VOLTAGE. PEAK NEGATIVE-PULSE GRID-NO.1 VOLTAGE. PEAK CATHODE CURRENT. AVERAGE CATHODE CURRENT. GRID-NO.2 INPUT. PLATE DISSIPATION [®] . PEAK HEATER-CATHODE VOLTAGE: Heater negative with respect to cathode | -1500 max 220 max -330 max 540 max 155 max 3.6 max 18 max | -1500 max 220 max -330 max 610 max 175 max 3.6 max 18 max | volts volts volts ma ma watts watts |
|---|---|---|---|
| Heater negative with respect to cathode Heater positive with respect to cathode BULB TEMPERATURE (At hottest point) | 200 max 200 max 220 max | 200 max 200 [□] max 220 max | volts volts °C |
| Maximum Circuit Values: | | | |

Grid-No.1-Circuit Resistance for grid-resistor-bias operation 1 max1 max megohm ° This value can be measured by a method involving a recurrent waveform such that the maximum ratings of the tube will not be exceeded.

The duration of the voltage pulse must not exceed 15 per cent of one horizontal scanning cycle. In a 525-line, 30-frame system, 15 per cent of one horizontal scanning cycle is 10 microseconds.

• An adequate bias resistor or other means is required to protect the tube in the absence of excitation. ^D The dc component must not exceed 100 volts.

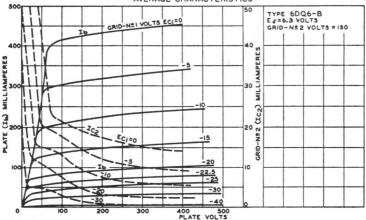

AVERAGE CHARACTERISTICS

DUAL TRIODE

Miniature type containing high-

mu and low-mu triodes; used as combined vertical-deflection-oscillator and vertical-deflection-amplifier tube in television receivers. Outline 8D, OUT-LINES SECTION. Tube requires miniature nine-contact socket and may be operated in any position.



92CM-10555T

| HEATER VOLTAGE (AC/DC) | | 6.3 0.9 | volts ampere |
|---|-----------|------------|-----------------|
| DIRECT INTERELECTRODE CAPACITANCES (Approx.): | Unit No.1 | Unit No.2 | |
| Grid to Plate | 4.5 | 8.5 | pf |
| Grid to Cathode and Heater | 2.2 | 5.5 | pf |
| Plate to Cathode and Heater | 0.34 | 1 | pf |

CLASS A, AMPLIFIER


| Characteristics: | Unit No.1 | Unit No.2 | |
|---|-----------|-----------|------------|
| Plate Voltage | 250 | 150 | volts |
| Grid Voltage | -3 | -17.5 | volts |
| Amplification Factor | 68 | 6 | |
| Plate Resistance (Approx.). | 40000 | 925 | ohms |
| Transconductance | 1600 | 6500 | μ mhos |
| Grid Voltage (Approx.) for plate current of 10 µa | -5.5 | - | volts |
| Grid Voltage (Approx.) for plate current of 50 µa | | -44 | volts |
| Plate Current | 1.4 | 35 | ma |
| Plate Current for grid voltage of -24 volts | - | 10 | ma |

6DR

Related types:

10DR7, 13DR7

——— Technical Data ——

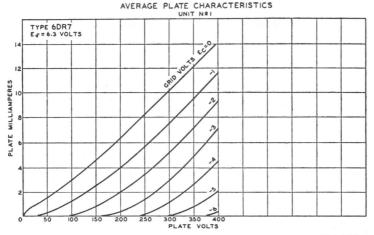

92CM-9912T

VERTICAL-DEFLECTION OSCILLATOR AND AMPLIFIER


For operation in a 525-line, 30-frame system

| Maximum Ratings, (Design-Maximum Values): DC PLATE VOLTAGE PEAK POSITIVE-PULSE PLATE VOLTAGE# PEAK NEGATIVE-PULSE GRID VOLTAGE. PEAK CATHODE CURRENT. AVERAGE CATHODE CURRENT. PLATE DISSIPATION PEAK HEATER-CATHODE VOLTAGE: | Unit No.1 Oscillator 330 max -400 max 70 max 20 max 1 max | Unit No.2 Amplifier 275 max 1500 max -250 max 175 max 50 max 7 max | volts volts ma ma watts |
|--|---|---|-------------------------------------|
| PEAK HEATER-CATHODE VOLTAGE: | 1 11000 | | |
| Heater negative with respect to cathode | 200 max 200≜max | 200 max 200≜max | volts volts |

Maximum Circuit Value:

Grid-Circuit Resistance:

For grid-resistor-bias or cathode-bias operation..... 2.2 max2.2 max megohms # The duration of the voltage pulse must not exceed 15 per cent of one vertical scanning cycle. In a 525-line, 30-frame system, 15 per cent of one vertical scanning cycle is 2.5 milliseconds. * The dc component must not exceed 100 volts.

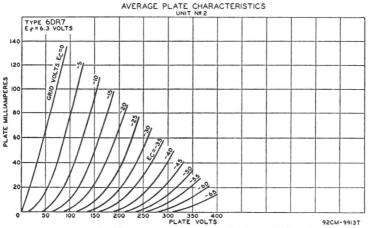

HIGH-MU TRIODE

Nuvistor type used as groundedcathode, neutralized rf amplifier in vhf tuners of television and FM receivers. Because of its cutoff characteristics, the 6DS4 is used in circuits to reduce



cross-modulation distortion. Outline 1, OUTLINES SEC-TION. Tube requires nuvistor socket and may be operated in any position.

| | CFS (Approx): | |
|--|--------------------|--|
| Grid to Plate Grid to Cathode, Heater, and Sh Plate to Cathode, Heater, and Sh Plate to Cathode | ell. | 4.3 pf 1.8 pf . 0.18 pf |
| Characteristics: | CLASS A1 AMPLIFIER | |
| Grid Supply Voltage Cathode-Bias Resistor | | . 0 volts . 130 ohms |
| Plate Resistance (Approx.) Transconductance Plate Current | rent of 100 µа | . 7000 ohms . 9000 μmhos . 6.5 ma 5 volts |


Maximum Ratings (Design Maximum Values):

6DS4

Related type:

2**D**\$4

| Maximum Kafings, (Design-Maximum Values): | | |
|---|------------------|------------|
| PLATE SUPPLY VOLTAGE | $300^{\circ}max$ | volts |
| PLATE VOLTAGE. | 135 max | volts |
| GRID VOLTAGE, Negative-bias value | 55 max | volts |
| GRID VOLTAGE, Peak positive value | 0 max | volts |
| PLATE DISSIPATION | 1.5 max | watt |
| CATHODE CURRENT. | 15 max | ma |
| PEAK HEATER-CATHODE VOLTAGE: | | |
| Heater negative with respect to cathode | 100 max | volts |
| Heater positive with respect to cathode | 100 max | volts |
| Typical Operation: | | |
| Plate Voltage | 70 | volts |
| Grid Supply Voltage | 0 | volts |
| Grid Resistor | 47000 | ohms |
| Amplification Factor | 68 | |
| Plate Resistance (Approx.) | 5440 | ohms |
| Transconductance | 12500 | μ mhos |
| Plate Current | 7 | ma |

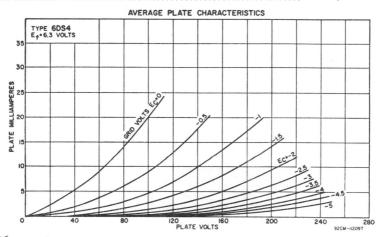

— Technical Data =

Maximum Circuit Values: Grid-Circuit Resistance:

0.5 max megohm 2.2 max megohms For fixed-bias operation. For cathode-bias operation ° A plate supply voltage of 300 volts may be used provided a sufficiently large resistor is used in the plate circuit to limit the plate dissipation to 1.5 watts under any condition of operation.

For operation at metal-shell temperatures up to 125°C.


6)62

BEAM POWER TUBE

Miniature type used in the audio output stages of television and radio receivers. Outline 7C, OUTLINES SECTION. Tube requires miniature seven-contact socket and may be mounted in any position.

| HEATER VOLTAGE (AC/DC) HEATER CURRENT DIRECT INTERELECTRODE CAPACITANCES (Approx | | | | 6.3 0.8 | volts ampere |
|---|------------|---------|-------|--|----------------------|
| Grid No.1 to Plate. Grid No.1 to Cathode, Heater, Grid No.2, an Plate to Cathode, Heater, Grid No.2, and Gr | d Grid N | 0.3 | | 0.19 9.5 6.3 | pf pf |
| CLASS A | | | | | |
| Maximum Ratings, (Design-Maximum Values): | | | | | |
| PLATE VOLTAGE GRID-NO.2 (SCREEN-GRID) VOLTAGE | | | | 275 max 275 max | volts |
| GRID-NO.1 (CONTROL-GRID) VOLTAGE, Positive b | ias value. | | | 0 max | volts |
| PLATE DISSIPATION | | | | 9 max | watts |
| GRID-NO.2 INPUT. | | | | 2.2 max | watts |
| PEAK HEATER-CATHODE VOLTAGE: Heater negative with respect to cathode Heater positive with respect to cathode BULB TEMPERATURE (At hottest point) | | | | 200 max 200 [*] max 250 max | volts volts °C |
| | Cathoo | le-Bias | Fixed | -Bias | |
| Typical Operation and Characteristics: | Oper | ation | Oper | ation | |
| Plate Supply Voltage | 200 | 250 | 200 | 250 | volts |
| Grid-No.2 Supply Voltage | 200 | 200 | 200 | 200 | volts |
| Grid-No.1 Voltage | - | - | -7.5 | -8.5 | volts |
| Cathode-Bias Resistor | 180 | 270 | | | ohms |
| Peak AF Grid-No.1 Voltage | 7.5 | 9.2 | 7.5 | 8.5 | volts |
| Zero-Signal Plate Current | 34.5 | 27 | 35 | 29 | ma |
| Maximum-Signal Plate Current | 32.5 | 25 | 36 | 32 | ma |
| Zero-Signal Grid-No.2 Current | 3.5 | 3 9 | 3 | 3 | ma |
| Maximum-Signal Grid-No.2 Current | 9 | 9 | 9 | 10 | ma |

Plate Resistance (Approx.).... 28000 28000 28000 28000 Transconductance.... 6000 5800 6000 5800 8000 6000 8000 Load Resistance 6000 Total Harmonic Distortion 10 10 3.8 10 9 ner cent Maximum-Signal Power Output . . 2.8 3.6 ž

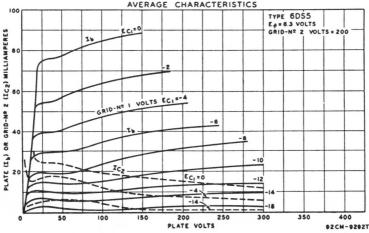

ohms

ohms

watts

*µ*mhos

6DS5

Maximum Circuit Values: Grid-No.1-Circuit Resistance:

For fixed-bias operation

For cathode-bias operation

The dc component must not exceed 100 volts.

HALF-WAVE VACUUM RECTIFIER



Glass octal type used as damper tube in horizontal-deflection circuits of color television receivers. Outline 14F. OUTLINES SECTION. Tube requires octal socket and may be

0.1 maxmegohm megohm 1.0 max

3 10

volts

ma

ma

watts

volts

volts

mounted in any position. Socket terminals 1, 2, 4, and 6 should not be used as tie points. Heater volts (ac/dc), 6.3; amperes, 1.2.

DAMPER SERVICE

For operation in a 525-line, 30-frame system

| Maximum Ratings, (Design-Maximum Values) | |
|--|---------------------|
| PEAK INVERSE PLATE VOLTAGE [•] | 5500 max |
| PEAK PLATE CURRENT. | 1450 max |
| DC PLATE CURRENT | 235 max |
| PLATE DISSIPATION. | 7.5 max |
| PEAK HEATER-CATHODE VOLTAGE: | |
| Heater negative with respect to cathode | 5500∎max 300≜max |

Characteristics, Instantaneous Value:

Tube Voltage Drop for plate current of 350 ma..... 28 volts

• The duration of the voltage pulse must not exceed 15 per cent of one horizontal scanning cycle. In a 525-line, 30-frame system, 15 per cent of one horizontal scanning cycle is 10 microseconds. The dc component must not exceed 900 volts.

* The dc component must not exceed 100 volts.

BEAM POWER TUBE



Miniature type used as a verticaldeflection-amplifier tube in television receivers employing 110-degree picture-tube systems. Outline 8D, OUT-LINES SECTION. Tube requires miniature nine-contact socket and may be operated in any position.



| HEATER VOLTAGE (AC/DC) | 6.3 | volts |
|--|-----------|---------|
| HEATER CURRENT. | 1.2 | amperes |
| TRANSCONDUCTANCE* | 6200 | µmhes |
| * For plate and grid-No.2 volts, 250; grid-No.1 volts, -16.5; plate ma., 44; grid- | No.2 ma., | 1.5. |

VERTICAL-DEFLECTION AMPLIFIER

For operation in a 525-line, 30-frame system

| Maximum Ratings, (Design-Maximum Values): | | |
|--|----------------------|------------------|
| DC PLATE VOLTAGE | 315 max | volts |
| PEAK POSITIVE-PULSE PLATE VOLTAGE# | 2200 max | volts |
| GRID-NO.2 (SCREEN-GRID) VOLTAGE | 285 max | volts |
| PEAK NEGATIVE-PULSE GRID-NO.1 (CONTROL-GRID) VOLTAGE | -250 max | volts |
| PEAK CATHODE CURRENT. | 190 max | ma |
| AVERAGE CATHODE CURRENT. | 55 max | ma |
| PLATE DISSIPATION | 9 max | watts |
| GRID-NO.2 INPUT. | 2 max | watts |
| PEAK HEATER-CATHODE VOLTAGE: | | |
| Heater negative with respect to cathode | 200 max | volts |
| Heater positive with respect to cathode | 200 [*] max | volts |
| Maximum Circuit Values: Grid-No.1-Circuit Resistance: | | |
| For fixed-bias operation. For cathode-bias operation. | | megohm megohm |
| * The duration of the voltage pulse must not exceed 15 per cent of one vertical year | nning evelo | In a 525 |

ning cycle. In a 525line, 30-frame system, 15 per cent of one vertical scanning cycle is 2.5 milliseconds. The dc component must not exceed 100 volts.

—— Technical Data =





SHARP-CUTOFF PENTODE

Miniature type used as FM detector in television receivers. Outline 7B, OUTLINES SECTION. Tube requires miniature seven-contact socket and may be mounted in any position 6DT6 6DT6A Related types: 3DT6A, 4DT6A

| $c_{i}^{(j)}$ and may | be mounted in any posit | ion. | | |
|---|--|-----------|---|-----------------------|
| Type 6DT6 is a DISCONTIN | UED type listed for refere | ence only | | |
| HEATER VOLTAGE (AC/DC) HEATER CURRENT. DIRECT INTERELECTRODE CAPACITANC | | | $\begin{smallmatrix} 6.3\\ 0.3 \end{smallmatrix}$ | volts ampere |
| Grid No.1 to Plate Grid No.1 to Cathode, Heater, Gri Grid No.3 to Plate Grid No.3 to Plate Grid No.3 to Cathode, Heater, Gri *External shield connected to cathode | d No.2, Grid No.3, and Interna d No.1, Grid No.2, and Interna | Shield | 0.02 5.8 1.4† 0.1 6.1 | pf pf pf pf |
| Characteristics: | CLASS A1 AMPLIFIER | 6DT6-A | 6DT6 | |
| Plate Supply Voltage | | 150 | 150 | volts |
| Grid No.3 (Suppressor Grid) | | Connecte | d to cathode | at socket |
| Grid-No.2 (Screen-Grid) Supply Volta | ge | 100 | 100 | volts |
| Cathode-Bias Resistor | | | 560 | ohms |
| Plate Resistance (Approx.) | | 0.15 | 0.15 800 | megohm |
| Transconductance, Grid No.1 to Plate | | | 515 | μ mhos μ mhos |
| Transconductance, Grid No.3 to Plate Plate Current | | | 1.1 | ma |
| Grid-No.2 Current. | • | 1.8 | 2.1 | ma |
| Grid-No.1 Voltage (Approx.) for plate | current of 10 up | -5 2 | -4.5 | volts |
| Grid-No.3 Voltage (Approx.) for plate | current of 10 μ a | 4.2 | -3.5 | volts |
| | FM DETECTOR | | | |
| Maximum Ratings, (Design-Maximum | Values). | | | |
| PLATE VOLTAGE. | | | 330 max | volts |
| GRID-NO.3 VOLTAGE. | | | 28 max | volts |
| GRID-NO.2 SUPPLY VOLTAGE | | | 330 max | volts |
| GRID-NO.2 VOLTAGE | | | | e page 70 |
| GRID-NO.1 (CONTROL-GRID) VOLTAGE, | Positive-bias value | | 0 max | volts |
| PLATE DISSIPATION | | | 1.7 max | watts |
| GRID-NO.2 INPUT: | - 14 - | | 1.1 max | |
| For grid-No.2 voltages up to 165 v For grid-No.2 voltages between 16 | 5 and 220 walts | | | watts ve page 70 |
| PEAK HEATER-CATHODE VOLTAGE: | 5 and 550 volts | | See curv | e page 10 |
| Heater negative with respect to ca | thode | | 200 max | volts |
| Heater positive with respect to cat | hode | | 200 max | volts |
| • | | | | |
| Maximum Circuit Values: | | | | |
| Grid-No.1-Circuit Resistance: For fixed-bias operation | | | 0.25 max | megohm |
| For anthodo bing operation | | | | megohm |

AVERAGE PLATE CHARACTERISTICS

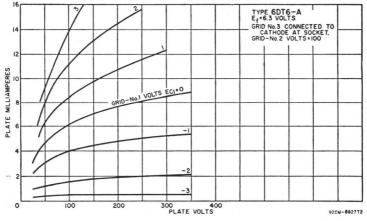


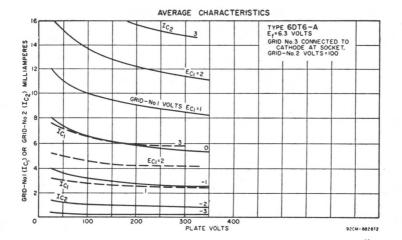

HIGH-MU TWIN TRIODE

Related type: 12DT8

Miniature type used in a wide variety of applications in radio and television receivers. Especially useful in push-pull rf amplifiers or as fre-



| DIRECT INTERELECTRODE CAPACITANCES (Approx., Each Unit Except as Noted): | | |
|--|------|----|
| Grid to Plate | 1.6* | pf |
| Grid to Cathode, Heater, and Internal Shield | 2.7* | pf |
| Plate to Cathode, Heater, and Internal Shield | 1.6* | pf |
| Heater to Cathode | 3• | pf |
| Cathode to Grid, Heater, and Internal Shield (Unit No.2) | 5.3† | pf |
| Plate to Grid, Heater, and Internal Shield (Unit No.2) | 2.8† | pf |
| * With external shield connected to esthede of unit under text | | |

With external shield connected to cathode of unit under test. .

With external shield connected to ground.

6DV4

Related type:

2DV4

† With external shield connected to grid of unit under test.

MEDIUM-MU TRIODE

Nuvistor type used at frequencies up to 1000 megacycles in uhf oscillator stages of television receivers. Outline 1, OUTLINES SECTION. Tube requires nuvistor socket and may be mounted in any position.



6

KT2

ARGE LUG . SHORT PIN; IC-DO NOT USE


| HEATER VOLTAGE (AC /DC) HEATER CURRENT. DIRECT INTERELECTRODE CAPACITANCES (Approx.): | 6.3 0.135 | volts ampere |
|---|--------------|-----------------|
| Grid to Plate Grid to Cathode. Heater, and Shell | 1.8 | pf |
| Plate to Cathode, Heater, and Shell. | | pr |
| Plate to Cathode | 0.25 | pf |
| Grid to Cathode. | $1.4 \\ 3.7$ | pf |

= Technical Data =

CLASS A1 AMPLIFIER

| CENTOD AT ANAL ENTER | | |
|---|----------------|------------|
| Maximum Ratings, (Design-Maximum Values): | | |
| PLATE SUPPLY VOLTAGE | 300 m | ax volts |
| PLATE VOLTAGE | 125 m | ax volts |
| GRID VOLTAGE: | | |
| Negative-bias value | -55 m | |
| _ Peak positive value | 2 m | |
| PLATE DISSIPATION | 1 m | |
| CATHODE CURRENT | 15 m | ax ma |
| PEAK HEATER-CATHODE VOLTAGE: | 100 | |
| Heater negative with respect to cathode | 100 m | |
| Heater positive with respect to cathode | 100 m | ax volts |
| | | |
| Characteristics: | | |
| Plate Supply Voltage | 75 | volts |
| Cathode-Bias Resistor | 100 | ohms |
| Amplification Factor. | 35 | onnib |
| Plate Resistance (Approx.) | 3100 | ohms |
| Transconductance. | 11500 | µmhos |
| Grid Voltage (Approx.) for plate current of 10 μ a | -7 | volts |
| Plate Current | 10.5 | ma |
| | 10.0 | 1110 |
| Typical Operation as Oscillator at 950 Mc: | | |
| Plate Voltage | 60 | volts |
| Grid Voltage | -2 | volts |
| Grid Resistor. | 5600 | ohms |
| Plate Current | 8 | ma |
| Grid Current | 350 | μ8. |
| | | pice |
| Maximum Circuit Values: | | |
| Grid-Circuit Resistance: ° | | |
| For fixed-bias operation. | 0.1 m | ax megohm |
| For cathode-bias operation. | 0.1 m 0.2 m | |
| | 0.4 11 | an megonin |
| ° For operation at metal-shell temperatures up to 135°C | | |

° For operation at metal-shell temperatures up to 135 °C.

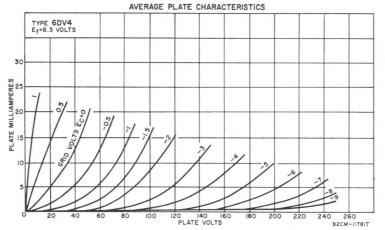



HALF-WAVE VACUUM RECTIFIER

Novar type used as damper tube in horizontal-deflection circuits of color and black-and-white television receivers. Outline 10D, OUTLINES SECTION. Tube requires novar nine-

6DW4

contact socket and may be mounted in any position. Socket terminals 1, 3, 6, and 8 should not be used as tie points; it is recommended that socket clips for these pins be removed to reduce the possibility of arc-over and to minimize leakage. It is especially important that this tube, like other power-handling tubes, be adequately ventilated.

| HEATER VOLTAGE (AC /DC) | 6.3 | volts |
|---|-----|---------|
| DIRECT INTERELECTRODE CAPACITANCES (Approx.): | 1.4 | amperes |
| Plate to Cathode and Heater | 6.5 | pf |
| Cathode to Plate and Heater | 9 | pf |
| Heater to Cathode | 2.8 | pf |

DAMPER SERVICE

For operation in a 525-line, 30-frame system

| 9 | Maximum Ratings, (Design-Maximum Values): | | |
|---|---|--------------------|-------|
| 2 | PEAK INVERSE PLATE VOLTAGE ^o | 5000 max | volts |
| | PEAK PLATE CURRENT. | 1300 max | ma |
| | DC PLATE CURRENT. | 250 max | ma |
| | PLATE DISSIPATION | 8.5 max | watts |
| | PEAK HEATER-CATHODE VOLTAGE: | | |
| | Heater negative with respect to cathode | 5000 • max | volts |
| | Heater positive with respect to cathode | $300^{\bullet}max$ | volts |
| | Characteristics, Instantaneous Value: | | |
| | Tube Voltage Drop for plate current of 350 ma | 25 | volts |

^o The duration of the voltage pulse must not exceed 15 per cent of one horizontal scanning cycle. In a 525-line, 30-frame system, 15 per cent of one horizontal scanning cycle is 10 microseconds.


The dc component must not exceed 900 volts.

• The dc component must not exceed 100 volts.

6**D**W5

BEAM POWER TUBE

Miniature type used in vertical deflection amplifier service in television receivers employing 110-degree deflection systems. Outline 8E, OUTLINES SECTION. Tube requires miniature



nine-contact socket and may be operated in any position. Heater volts (ac/dc), 6.3; amperes, 1.2.

| CLASS A1 AMPLIFIER | Pe | ntode | Triode | |
|---|-----|---------|-------------|------------|
| Characteristics: | Con | nection | Connection° | |
| Plate Voltage | 60 | 200 | 150 | volts |
| Grid-No.2 Voltage | 150 | 150 | - | volts |
| Grid-No.1 Voltage | 0 | -22.5 | -22.5 | volts |
| Amplification Factor | - | - | 4.3 | |
| Plate Resistance (Approx.) | - | 15000 | - | ohms |
| Transconductance | - | 5500 | - | μ mhos |
| | 260 | 55 | - | ma |
| Grid-No.2 Current. | 20 | 2 | - | ma |
| Grid-No.1 Voltage (Approx.) for plate current of 0.1 ma | - | -55 | _ | volts |

VERTICAL DEFLECTION AMPLIFIER

** *

For operation in a 525-line, 30-frame system


| Maximum Katings, (Design-Maximum Values): | | |
|--|----------|-------|
| DC PLATE VOLTAGE | 330 max | volts |
| PEAK POSITIVE-PULSE PLATE VOLTAGE [•] | 2200 max | volts |
| DC GRID-NO.2 (SCREEN-GRID) VOLTAGE | 220 max | volts |
| PEAK NEGATIVE-PULSE GRID-NO.1 (CONTROL-GRID) VOLTAGE | -250 max | volts |
| PEAK CATHODE CURRENT. | 225 max | ma |
| AVERAGE CATHODE CURRENT. | 65 max | ma |
| PLATE DISSIPATION | 11 max | watts |
| GRID-NO.2 INPUT | 2.5 max | watts |
| PEAK HEATER-CATHODE VOLTAGE: | - | |
| Heater negative with respect to cathode | 200 max | volts |
| Heater positive with respect to cathode | 200*max | volts |
| | | |
| Maximum Circuit Values: | | |

Grid-No.1 Circuit Resistance:

° With grid No.2 connected to plate.

This value can be measured by a method involving a recurrent waveform such that the maximum ratings of the tube will not be exceeded.

• The duration of the voltage pulse must not exceed 15 per cent of one vertical scanning cycle. In a 525-line, 30-frame system, 15 per cent of one vertical scanning cycle is 2.5 milliseconds. • The dc component must not exceed 100 volts.



HIGH-MU TRIODE— SHARP-CUTOFF PENTODE

Miniature type used in televisionreceiver applications. The triode unit is used as a sync-separator, sync-amplifier, keyed-agc, or noise-suppressor tube. The pentode unit is used as a

6DX8 Related type: 10DX8

video-output tube. Outline 8D, OUTLINES SECTION. Tube requires miniature nine-contact socket and may be mounted in any position. Heater volts (ac/dc), 6.3; amperes, 0.72.

CLASS A1 AMPLIFIER

| CLASS AI | WWL FILL | - N | | | |
|--|-----------|---------|---|----------------|-----------------|
| | | | Triode | Pentode | |
| Maximum Ratings, (Design-Center Values): | | | Unit | Unit | |
| PLATE SUPPLY VOLTAGE. PEAK PLATE VOLTAGE, with maximum plate current | | | 550 max | 550 ma | x volts |
| PEAK PLATE VOLTAGE, with maximum plate current | nt of 0.1 | ma° | 600 max | - | volts |
| PLATE VOLTAGE | | 300 max | 300 ma | x volts | |
| GRID-NO.2 (SCREEN-GRID) SUPPLY VOLTAGE | | | | 550 ma | x volts |
| GRID-NO.2 VOLTAGE. | | | - | 300 ma | x volts |
| CATHODE CURRENT. | | | 12 max | 40 ma | x ma |
| GRID-NO.2 INPUT. | | | - | 1.7 ma | |
| PLATE DISSIPATION. | | | 1 max | 4 ma | x watts |
| PEAK HEATER-CATHODE VOLTAGE: | | | 000 | 000 | 14 |
| Heater negative with respect to cathode Heater positive with respect to cathode | | | $\begin{array}{ccc} 200 & max \\ 200 & max \end{array}$ | 200 ma | |
| meater positive with respect to cathode | Triode | | 200 max | 2 00 ma | x volts |
| Characteristics: | | | D () 17 | | |
| | Unit | | Pentode U | | |
| Plate Voltage | 200 | 170 | 200 | 220 | volts |
| Grid-No.2 Voltage | | 170 | 200 | 220 | volts |
| Grid-No.1 Voltage | -1.7 | -2.1 | -2.9 | -3.4 | volts |
| Amplification Factor. $M\mu$ -Factor, Grid-No.2 to Grid-No.1 | 65 | 36 | 36 | 36 | |
| Plate Resistance (Approx.) | _ | 0.1 | 0.13 | 0.15 | |
| Transconductance | 4000 | 11000 | 10400 | 10000 | megohm µmhos |
| Plate Current. | 4000 | 18 | 10400 | 18 | ma |
| Grid-No.2 Current | - | 10 | 10 | 18 | ma |
| dire itom current. | | 0 | 0 | 0 | ma |
| Typical Operation of Pentode Unit as Video Ou | tput Tub | e: | | | |
| Plate Supply Voltage | | 170 | 200 | 220 | volts |
| Series Plate Resistor | | 000 | 3000 | 3000 | ohms |
| Grid-No.2 Voltage | | 170 | 200 | 220 | volts |
| Grid-No.1 Voltage | | -2 | -2.8 | -3.3 | volts |
| Transconductance | 10 | 400 | 10000 | 9700 | μmhos |
| Plate Current. | | 18 | 18 | 18 | ma |
| Grid-No.2 Current | | 3.2 | 3.1 | 3.1 | ma |
| Maximum Circuit Values: | | | Triode | Pento | 1. |
| Grid-No.1-Circuit Resistance: | | | Unit | Pento Unit | |
| Fcr fixed-bias operation | | | 1 max | 1 ma | |
| For cathode-bias operation. | | | 3 max | | x megohms |
| [°] With maximum duty factor of 0.18 and maximu | | | | | |

 $^\circ$ With maximum duty factor of 0.18 and maximum pulse duration of 18 microseconds.



MEDIUM-MU TRIODE

Miniature type used as a localoscillator tube in uhf television receivers covering the frequency range from 470 to 890 megacycles. Outline 7A, OUTLINES SECTION. Tube re-



quires miniature seven-contact socket and may be mounted in any position. For curve of average plate characteristics, refer to type 6AF4-A.

| HEATER VOLTAGE (AC/DC) | $\begin{array}{c} 6.3\\ 0.225 \end{array}$ | volts |
|--|--|-------|
| DIRECT INTERELECTRODE CAPACITANCES (Approx.):° | | |
| Grid to Plate | 1.8 | pf |
| Grid to Cathode and Heater. | 2.2 | pf |
| Plate to Cathode and Heater | 1.3 | pf |
| ° With external shield connected to cathode. | | |

CLASS A1 AMPLIFIER

| Characteristics: | | |
|---|--|-----------------------------------|
| Plate Supply Voltage Plate Resistor Amplification Factor. | $80 \\ 2700 \\ 14$ | volts |
| Tansconductance Plate Resistance (Approx.). Transconductance Plate Current. | 2000 6700 15 | ohms µmhos ma |
| Grid Voltage (Approx.) for plate current of 20 µa | -11 | volts |
| UHF OSCILLATOR | | |
| Maximum Ratings, (Design-Maximum Values): | | |
| PLATE VOLTAGE. GRID VOLTAGE, Negative-bias value. GRID CURRENT. | $\begin{array}{ccc} 135 & max \\ -50 & max \\ 2 & max \end{array}$ | volts volts ma |
| CATHODE CURRENT. | 20 max | ma |
| PLATE DISSIPATION PEAK HEATER-CATHODE VOLTAGE: | 2.3 max | watts |
| Heater negative with respect to cathode | 50 max 50∎max | volts |
| Typical Operation as Oscillator at 1000 Mc: | | |
| Plate Supply Voltage Plate-Circuit Resistance. Grid Resistor Plate Current. Grid Current (Approx.). | $135 \\ 2700 \\ 10000 \\ 15.5 \\ 800$ | volts ohms ohms ma µa |
| Maximum Circuit Values: | | |
| Grid-Circuit Resistance: For fixed-bias operation For cathode-bias operation | Not recor 0.5 max | |
| The decomponent must not exceed 25 yelts | | |

The dc component must not exceed 25 volts.

TWIN POWER PENTODE



Characteristics. (Each Unit):

Glass octal type used as power amplifier tube in high-fidelity audio equipment. Outline 19A, OUTLINES SECTION. Tube requires octal socket and may be operated in any position.



It is especially important that this tube, like other power-handling tubes, be adequately ventilated. Heater voltage (ac/dc), 6.3; amperes, 1.52.

CLASS A1 AMPLIFIER

| Plate Voltage | 250 | volts |
|----------------------------------|-------|-------|
| Grid-No.2 (Screen-Grid) Voltage | 250 | volts |
| Grid-No.1 (Control-Grid) Voltage | -7.3 | volts |
| Plate Resistance (Approx.). | 38000 | ohms |
| Transconductance | 11300 | umhos |
| Plate Current. | 48 | ma |
| Grid-No.2 Current | 5.5 | ma |

PUSH-PULL CLASS AB1 AMPLIFIER

Maximum Ratings, (Design-Maximum Values, Per Tube):

| PLATE VOLTAGE. GRID-NO.2 VOLTAGE. GRID-NO.2 INPUT (Total). PLATE DISSIPATION. PEAK HEATER-CATHODE VOLTAGE: | | 440 max 300 max 4 max 13.2 max | volts volts watts watts |
|--|----------------------------|---|----------------------------------|
| Heater negative with respect to cathode | Fixed | 200 max 200°max Cathode | volts volts |
| Typical Operation, (Per Tube): | Bias | Bias | |
| Plate Voltage. Grid-No.2 Voltage. Grid-No.1 Voltage. Cathode-Bias Resistor. | $400 \\ 250 \\ -11 \\ -11$ | 300 250 120 | volts volts volts ohms |

— Technical Data =

| Zero-Signal Plate Current. Maximum-Signal Plate Current. Zero-Signal Grid-No.2 Current. Maximum-Signal Grid-No.2 Current. Effective Load Resistance (Plate-to-Plate). Total Harmonic Distortion. Maximum-Signal Power Output. | $\begin{array}{c} 40 \\ 100 \\ 4 \\ 13 \\ 9000 \\ 2.5 \\ 18 \end{array}$ | | ma ma ohms per cent watts |
|---|--|----------|---------------------------------------|
| Maximum Circuit Values, (Each Unit): Grid-No.1-Circuit Resistance | | 0.27 max | megohm |

ELECTRON-RAY TUBE


Glass type used to indicate visually by means of a fluorescent target the effects of a change in a controlling voltage. It is used as a convenient means of indicating accurate radio-



receiver tuning. Maximum dimensions: over-all length, 4-3/16 inches; seated height, 3-9/16 inches; diameter, 1-3/16 inches. Tube requires six-contact socket. Heater volts (ac/dc), 6.3; amperes, 0.3. For additional considerations, refer to Tuning Indication with Electron-Ray Tubes in ELECTRON TUBE APPLICATIONS SECTION.

TUNING INDICATOR

| Maximum and Minimum Ratings, (Design-Center Values): | | |
|---|-----------|--------|
| PLATE-SUPPLY VOLTAGE | | |
| TARGET VOLTAGE | | |
| | (125 min | volts |
| Typical Operation: | | |
| Plate and Target Supply Voltage | 0 250 | volts |
| Series Triode-Plate Resistor | 1 1 | megohm |
| Target Current*† | 3 4 | ma |
| Triode-Plate Current* | 9 0.24 | ma |
| Triode-Grid Voltage (Approx.): | | |
| For shadow angle of 0°6. | 5 -8.0 | volts |
| For shadow angle of 90° | 0 0 | volts |
| * For zero triode-grid voltage. † Subject to wide variations. | | |



6

PT 2

TWIN POWER TRIODE

Glass type used as class A1 amplifier in either push-pull or parallel circuits. Outline 27, OUTLINES SECTION. Heater volts (ac/dc), 6.3; amperes, 0.6. With plate volts of 250 and grid volts of -27.5, characteristics for each unit are: plate ma., 18; plate resistance, 3500 ohms; transconductance, 1700 µmhos; amplification

factor, 6. With plate-to-plate load resistance of 14000 ohms, output for two tubes is 1.6 watts. This is a DISCONTINUED type listed for reference only.



G2 (3 6

HEATER VOLTAGE (AC/DC) ...

HEATER CURRENT. ...

REMOTE-CUTOFF PENTODE

Glass type used in rf and if stages of radio receivers employing avc. Outline 24A, OUT-LINES SECTION. Except for interelectrode capacitances, this type is identical electrically with type 6U7-G. Heater volts (ac/dc), 6.3; amperes, 0.3. This is a DISCONTINUED type listed for reference only.

SHARP-CUTOFF TETRODE

Miniature type used as rf amplifier in vhf tuners of television receivers. Outline 7B, OUTLINES SECTION. Tube requires miniature seven-contact socket and may be operated in any position.

6E7

6E6

Related type: 3EA5

 $6.3 \\ 0.2$

| | volts |
|--|--------|
| | ampere |

245


| DIRECT INTERELECTRODE CAPACITANCES: Grid No.1 to Plate Grid No.1 to Cathode, Heater, Grid No.2, and Internal Shield Plate to Cathode, Heater, Grid No.2, and Internal Shield ° With external shield connected to cathode. | Without External Shield 0.06 max 3.8 2.3 | With External Shield ^o 0.05 max 4.5 3 | pf pf pf |
|---|---|---|----------------|
| CLASS A1 AMPLIFIER | | | |
| Maximum Ratings, (Design-Maximum Values): | | | |
| PLATE VOLTAGE | | 250 max | volts |
| GRID-NO.2 (SCREEN-GRID) VOLTAGE | | 150 max | volts |
| GRID-NO.1 (CONTROL-GRID) VOLTAGE, Positive-bias value | | 0 max | volts |
| CATHODE CURRENT. | | 20 max | ma |
| GRID-NO.2 INPUT | | 0.5 max | watt |
| PLATE DISSIPATION. | | 3.25 max | watts |
| PEAK HEATER-CATHODE VOLTAGE: | | 000 | |
| Heater negative with respect to cathode | | 200 max 200 max | volts |
| neater positive with respect to cathode | | 200- <i>max</i> | VOIUS |
| Characteristics: | | | |
| Plate Voltage | | 250 | volts |
| Grid-No.2 Voltage | | 140 | volts |
| Grid-No.1 Voltage | | $^{-1}$ | volt |
| Plate Resistance (Approx.) | | 0.15 | megohm |
| Transconductance | | 8000 | μmhos |
| Plate Current | | 10 | ma |
| Grid-No.2 Current. | | 0.95 | ma |
| Grid-No.1 Voltage (Approx.) for transconductance of 100 µmhos o | rless | -6 | volts |
| The de component must not exceed 100 volta | | | |

The dc component must not exceed 100 volts.

6EA7

DUAL TRIODE

Glass octal type containing highmu triode and high-perveance, low-mu triode in same envelope. Used as a combined vertical deflection oscillator and vertical deflection amplifier in tele-



vision receivers. Outline 14B, OUTLINES SECTION. Tube requires octal socket and may be operated in any position. Heater volts (ac/dc), 6.3; amperes, 1.05.

| Characteristics: | CLASS A1 AMPLIFIER | Unit No.1 | Unit | No.2 | |
|-----------------------------|--------------------|-----------|------|------|------------|
| Plate Voltage | | 250 | 60 | 175 | volts |
| Grid Voltage | | -3 | 0 | -25 | volts |
| Amplification Factor | | 66 | | 5.5 | |
| Plate Resistance (Approx.) | | 30000 | - | 920 | ohms |
| Transconductance | , | 2200 | | 6000 | μ mhos |
| Grid Voltage (Approx.): | | | | | |
| For plate current of 20 µa | | -5.3 | - | | volts |
| For plate current of 200 µa | | _ | - | -45 | volts |
| Plate current | | 2 | 100• | 40 | ma |


VERTICAL-DEFLECTION OSCILLATOR AND AMPLIFIER

For operation in a 525-line, 30-frame system

| | Unit No.1 | Unit No.2 | |
|--|------------------|-----------------|---------|
| Maximum Ratings, (Design-Maximum Values): | Oscillator | Amplifier | |
| DC PLATE VOLTAGE | 350 max | 550 max | volts |
| PEAK POSITIVE-PULSE PLATE VOLTAGE ^o | - | 1500 max | volts |
| PEAK NEGATIVE-PULSE GRID VOLTAGE | -400 max | -250 max | volts |
| PEAK CATHODE CURRENT | -max | 175 max | ma |
| AVERAGE CATHODE CURRENT. | -max | 50 max | ma |
| PLATE DISSIPATION | 1 max | 10 max | watts |
| PEAK HEATER-CATHODE VOLTAGE: | | | |
| Heater negative with respect to cathode | 200 max | 200 max | volts |
| Heater positive with respect to cathode | 200 • max | 200 m ax | volts |
| Maximum Circuit Values: | | | |
| Grid-Circuit Resistance: | | | |
| For grid-resistor-bias operation | 1 max | 1 max | megohm |
| For cathode-bias operation. | 2.2 max | | megohms |
| ° The duration of the voltage pulse must not exceed 15 per cent of | | | |

° The duration of the voltage pulse must not exceed 15 per cent of one vertical scanning cycle. In a 525line, 30-frame system, 15 per cent of one vertical scanning cycle is 2.5 milliseconds.

The dc component must not exceed 100 volts.



MEDIUM-MU TRIODE— SHARP-CUTOFF PENTODE

^P Miniature type used as combined oscillator and mixer in television receivers utilizing an intermediate frequency in the order of 40 megacycles per second. Outline 8B, OUTLINES 6EA8 Related types: 5EA8, 19EA8

SECTION. Tube requires miniature nine-contact socket and may be mounted in any position.

| HEATER VOLTAGE (AC/DC). HEATER CURRENT. HEATER WARM-UP TIME (Average). | | $\begin{smallmatrix} & 6.3 \\ 0.45 \\ & 11 \end{smallmatrix}$ | volts ampere seconds |
|---|-------------------------------|---|----------------------------|
| DIRECT INTERELECTRODE CAPACITANCES: Triode Unit: | Without External Shield | W ith External Shield° | |
| Grid to Plate. | 1.7 | 1.7 | \mathbf{pf} |
| Grid to Cathode, Heater, Pentode Cathode, Pentode Grid No.3, and Internal Shield Plate to Cathode, Heater, Pentode Cathode, | 3 | 3.2 | \mathbf{pf} |
| Pentode Grid No.3, and Internal Shield | 1.4 | 1.9 | pf |
| Cathode to Heater | 3 | 3 | \mathbf{pf} |
| Pentode Unit: Grid No.1 to Plate Grid No.1 to Cathode, Heater, Grid No.2, Grid No.3, and | 0.02 max | 0.01 max | \mathbf{pf} |
| Internal Shield | 5 | 5 | pf |
| Plate to Cathode, Heater, Grid No.2, Grid No.3, and Internal Shield. Heater to Cathode. | 2.6 | 3.4 3 | pf pf |


° With external shield connected to cathode of unit under test except as noted.

With external shield connected to ground.

CLASS A, AMPLIFIER


| CEAGO A AMERICA | | | |
|---|-------------------|-------------------|---------|
| Maximum Ratings, (Design-Maximum Values): | Triode Unit | Pentode Unit | |
| PLATE VOLTAGE | 330 max | 330 max | volts |
| GRID-NO.2 (SCREEN-GRID) SUPPLY VOLTAGE | - | 330 max | volts |
| GRID-NO.2 VOLTAGE. | | See curve | page 70 |
| G3ID-NO.1 (CONTROL-GRID) VOLTAGE, Positive-bias value | 0 max | 0 max | volts |
| PLATE DISSIPATION | 2.5 max | 3.1 max | watts |
| GRID-NO.2 INPUT: | | | |
| For grid-No.2 voltages up to 165 volts | | 0.55 max | watt |
| For grid-No.2 voltages between 165 and 330 volts | | See curve page 70 | |
| PEAK HEATER-CATHODE VOLTAGE: | | | |
| Heater negative with respect to cathode | 200 max | 200 max | volts |
| Heater positive with respect to cathode | $200 \bullet max$ | $200 \bullet max$ | volts |
| • The de component must not exceed 100 welts | | | |

• The dc component must not exceed 100 volts.

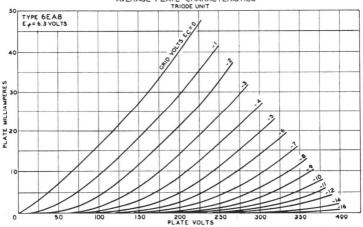

AVERAGE PLATE CHARACTERISTICS


| Characteristics: | Triode Unit | Pentode Unit | |
|--|----------------|-----------------|-------|
| Plate Supply Voltage | 150 | 125 | volts |
| Grid-No.2 Voltage | - | 125 | volts |
| Grid-No.1 Voltage | - | -1 | volt |
| Cathode-Bias Resistor | 56 | - | ohms |
| Amplification Factor | 40 | - | |
| Plate Resistance (Approx.) | 5000 | 200000 | ohms |
| Transconductance | 8500 | 6400 | μmhos |
| Plate Current | 18 | 12 | ma |
| Grid-No.2 Current | - | 4 | ma |
| Grid-No.1 Voltage for plate current of 10 µa | -12 | -9 | volts |

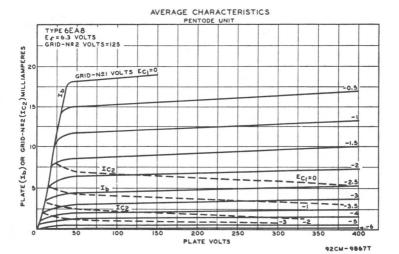

6EB8

Related type: 8EB8 HIGH-MU TRIODE— SHARP-CUTOFF PENTODE

Miniature type used in color and black-and-white television receivers. Pentode unit is used as video output amplifier; triode unit is used in syncseparator, sync-clipper, and phase-in-




verter circuits. Outline 8D, OUTLINES SECTION. Tube requires miniature ninecontact socket and may be mounted in any position.

| HEATER VOLTAGE (AC/DC) HEATER CURRENT DIRECT INTERELECTRODE CAPACITANCES: | $\begin{smallmatrix}6.3\\0.75\end{smallmatrix}$ | volts ampere |
|---|---|-----------------|
| Triode Unit: | | |
| Grid to Plate. | 4.4 | pf |
| Grid to Cathode and Heater | 2.4 | pf |
| Plate to Cathode and Heater | 0.36 | pf |
| Pentode Unit: | | |
| Grid No.1 to Plate. | 0.1 max | pf |
| Grid No.1 to Cathode, Heater, Grid No.2, Grid No.3, and Internal Shield. | 11 | pf |
| Plate to Cathode, Heater, Grid No.2, Grid No.3, and Internal Shield | 4 2 | nf |
| Triode Grid to Pentode Plate | 0.018 max | nf |
| Pentode Grid No.1 to Triode Plate. | 0.005 max | pi |
| Pencode Grid No.1 to Though Flate | | pi |
| Pentode Plate to Triode Plate | 0.17 max | pf |
| | | |

CLASS A, AMPLIFIER

| Maximum Ratings, (Design-Maximum Values): | Triode Unit | Pentode Unit | |
|---|----------------|-----------------|---------|
| PLATE VOLTAGE | 330 max | 330 max | volts |
| GRID-NO.2 (SCREEN-GRID) SUPPLY VOLTAGE | - | 330 max | volts |
| GRID-NO.2 VOLTAGE. | | See curve | page 70 |
| GRID-NO.1 (CONTROL-GRID) VOLTAGE, Positive-bias value | 0 max | 0 max | volts |
| PLATE DISSIPATION | 1 max | 5 max | watts |

——— Technical Data —

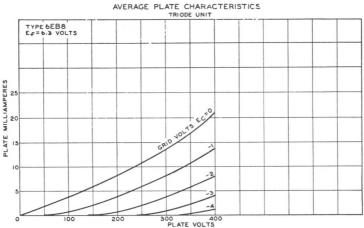



92CM-9907TI


| GRID-NO.2 INPUT: | 92CM-9907TI | | |
|--|---|----------------------|--------------------|
| For grid-No.2 voltages up to 165 volts For grid-No.2 voltages between 165 and 330 volts PEAK HEATER-CATHODE VOLTAGE: | - | 1.1 max See curve | watts e page 70 |
| Heater negative with respect to cathode Heater positive with respect to cathode ^o The dc component must not exceed 100 volts. | 200 max 200°max | 200 max 200° max | volts volts |
| Characteristics: | Triode Unit | Pentode Unit | |
| Plate Supply Voltage. Grid-No.2 Supply Voltage. | 250 | 200 125 | volts |
| Grid Voltage Cathode-Bias Resistor | -2 | 68 | volts |
| Amplification Factor Plate Resistance (Approx.). Transconductance | $\begin{array}{r}100\\37000\\2700\end{array}$ | $75000 \\ 12500$ | ohms µmhos |
| Grid Voltage (Approx.) for plate current of 20 µa Grid-No.1 Voltage (Approx.) for plate current of 100 µa | -5 | -9 | volts |
| Plate Current. | 2 | $25 \\ 7$ | ma |
| Maximum Circuit Values | | | |

Maximum Circuit Values:

Grid-No.1-Circuit Resistance: F

| For fixed-bias operation | 0.5 max | 0.25 max | megohm |
|----------------------------|---------|----------|--------|
| For cathode-bias operation | 1.0 max | 1.0 max | megohm |

AVERAGE CHARACTERISTICS

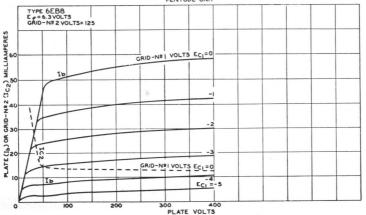

42CM-9906T

POWER PENTODE

Miniature type used in the audio output stage of radio and television receivers and in phonographs. This type has unusually high power sensitivity and is capable of providing rel-



atively high power output at low plate and screen-grid voltages with a low af grid-No.1 driving voltage. Outline 7C, OUTLINES SECTION. Tube requires miniature seven-contact socket and may be mounted in any position.

| Heater Voltage (ac/dc) | $\begin{array}{c} 6.3\\ 1.2 \end{array}$ | volts amperes |
|--|--|------------------|
| DIRECT INTERELECTRODE CAPACITANCES (Approx.): Grid No.1 to Plate. Grid No.1 to Cathode, Heater, Grid No.2, and Grid No.3. Plate to Cathode, Heater, Grid No.2, and Grid No.3. | 0.65 17 9 | pf pf |

CLASS A1 AMPLIFIER

Maximum Ratings, (Design-Maximum Values):

6EH5

Related types:

12EH5, 25EH5, 50EH5


| PLATE VOLTAGE. GRID-NO.2 (SCREEN-GRID) VOLTAGE. PLATE DISSIPATION. GRID-NO.2 INPUT. PEAK HEATER-CATHODE VOLTAGE: | 150 max 130 max 5.5 max 2 max | volts volts watts watts |
|--|--|----------------------------------|
| Heater negative with respect to cathode | 200 max 200 = max | volts |
| BULB TEMPERATURE (At hottest point) | 220 max | °C |
| Typical Operation: | | |
| Plate Supply Voltage. | 110 | volts |
| Grid-No.2 Supply Voltage Cathode-Bias Resistor | $115 \\ 62$ | volts |
| Peak AF Grid-No.1 Voltage. | 3 | volts |
| Zero-Signal Plate Current | 42 | ma |
| Maximum-Signal Plate Current | 42 | ma |
| Zero-Signal Grid-No.2 Current. | 11.5 | ma |
| Maximum-Signal Grid-No.2 Current. | 14.5 | ma |
| Plate Resistance (Approx.) | 11000 | ohms |
| Transconductance. | $14600 \\ 3000$ | µmhos ohms |
| Load Resistance Total Harmonic Distortion | 3000 | per cent |
| Maximum-Signal Power Output. | 1.4 | watts |
| | | |

Maximum Circuit Values:

| Grid-No.1-Circuit Resistance: | | |
|-------------------------------|---------|--------|
| For fixed-bias operation | 0.1 max | megohm |
| For cathode-bias operation | 0.5 max | megohm |

The dc component must not exceed 100 volts.

AVERAGE CHARACTERISTICS

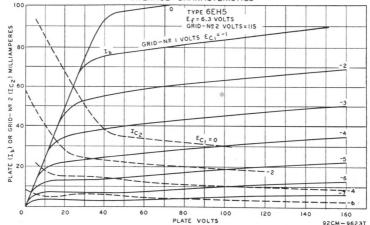

PUSH-PULL CLASS AB, AUDIO-FREQUENCY POWER AMPLIFIER

Maximum Ratings: (Same as for class A1 audio-frequency power amplifier)

| Typical Opera | tion, (Values | are for 2 | tubes): |
|---------------|---------------|-----------|---------|
|---------------|---------------|-----------|---------|

| . / Fical e Peranen/ (rando are jer a radoo). | | |
|--|-------|-------|
| Plate Supply Voltage | 140 | volts |
| Grid-No.2 Supply Voltage | 120 | olts |
| Cathode-Bias Resistor | 68 0 | hms |
| Peak AF Grid-No.1 Voltage | | olts |
| Zero-Signal Plate Current. | | ma |
| Maximum-Signal Plate Current | | ma |
| Zero-Signal Grid-No.2 Current. | 11 | ma |
| Maximum-Signal Grid-No.2 Current. | | ma |
| Effective Load Resistance (Plate-to-plate) | | hms |
| Total Harmonic Distortion | | cent |
| Maximum-Signal Power Output | 3.8 w | atts |
| Maximum Circuit Values: | | |
| Grid-No.1-Circuit Resistance: | | |

| For fixed-bias operation | 0.1 max | megohm |
|----------------------------|---------|--------|
| For cathode-bias operation | 0.5 max | megohm |



SEMIREMOTE-CUTOFF PENTODE

Miniature type used as if-amplifier tube in television receivers. Outline 8C, OUTLINES SECTION. Tube requires nine-contact socket and may be mounted in any position. Heater volts (ac/dc), 6.3; amperes, 0.3.

6EH7 Related types: 3EH7, 4EH7

CLASS A1 AMPLIFIER


| Maximum Ratings, (Design-Center Values): | | | | | | |
|---|-------|------------|----------|----------|-------|-----------|
| PLATE SUPPLY VOLTAGE | | | | 550 | max | volts |
| PLATE VOLTAGE | | | | 250 | max | volts |
| GRID-NO.3 (SUPPRESSOR-GRID) VOLTAGE, Positive v | alue | | | 0 | max | volts |
| GRID-NO.2 (SCREEN-GRID) SUPPLY VOLTAGE | | | | 550 | max | volts |
| GRID-NO.2 VOLTAGE. | | | | 250 | max | volts |
| CATHODE CURRENT. | | | | 20 | max | ma |
| GRID-NO.2 INPUT. | | | | 0.65 | max | watt |
| PLATE DISSIPATION | | | | 2.5 | max | watts |
| PEAK HEATER-CATHODE VOLTAGE: | | | | | | |
| Heater negative with respect to cathode | | | | 150 | max | volts |
| Heater positive with respect to cathode | | | | 150 | max | volts |
| | | | | | | |
| Characteristics: | | | | | | |
| Plate Voltage | | | | 200 | | volts |
| Grid No.3. | | | | ed to ca | thode | at socket |
| Grid-No.2 Voltage | | | | 90 | | volts |
| Grid-No.1 Voltage | | | | -2 | | volts |
| Plate Resistance (Approx.) | | | | 0.5 | | megohm |
| Transconductance | | | | 12500 | | μmhos |
| Plate Current | | | | 12 | | ma |
| Grid-No.2 Current. | | | | 4.5 | | ma |
| | | | | | | |
| Typical Operation: | | | | | | |
| Plate Voltage | 200 | 200 | 200 | 200 | | volts |
| Grid No.3 | Conne | cted to ca | thode at | socket | | |

| Grid No.3 | Conr | nected to a | cathode at | socket | |
|---|-------|-------------|------------|--------|------------|
| Grid-No.2 Supply Voltage | 200 | 200 | 200 | 200 | volts |
| Grid-No.2 Series Resistor | 22000 | 22000 | 22000 | 22000 | ohms |
| Grid-No.1 Voltage | 19.5 | -9.5 | -6.5 | -2 | volts |
| Transconductance | 125 | 625 | 1250 | 12500 | μ mhos |
| RMS Grid-No.1 Voltage, for cross-modulation | | | | | |
| factor of 0.01 | 450 | 160 | 100 | - | mv |
| | | | | | |

| Maximum Circuit Values: | | |
|------------------------------|-------|--------|
| Grid-No.1-Circuit Resistance | 1 max | megohm |

MEDIUM-MU TRIODE-SHARP-CUTOFF PENTODE

Miniature type used as combined oscillator and mixer tube in vhf tuners of television receivers having series-connected heater strings. Outline 8B, OUTLINES SECTION. Tube requires nine-contact socket. Heater volts (ac/dc), 6.3; amperes, 0.45; warm-up time (average), 11 seconds. Characteristics as class A1 amplifier: plate and grid-No.2 volts, 125 (300 max); grid-No.1 volts, -1(0 max); amplification factor (tri-



ode unit), 40; plate resistance (pentode unit, approx.), 0.17 megohm; transconductance, 7500 µmhos (triode unit), 6000 umhos (pentode unit); plate ma., 13.5 (triode unit), 12 (pentode unit); grid-No.2 ma. (pentode unit), 4; peak heater-cathode volts, 200 max (the dc component must not exceed 100 volts). This type is used principally for renewal purposes.

SHARP-CUTOFF PENTODE

Miniature type used as if-amplifier tube in television receivers. Outline 8C, OUTLINES SECTION. Tube requires miniature nine-contact socket and may be mounted in any position. Heater volts (ac/dc), 6.3; amperes, 0.3.



CLASS A1 AMPLIFIER

| Maximum Ratings, (Design-Center Values): | | | | |
|--|--------|-------------|-------|-----------|
| PLATE SUPPLY VOLTAGE | | 550 | max | volts |
| PLATE VOLTAGE. | | 250 | max | volts |
| GRID-NO.2 (SCREEN-GRID) SUPPLY VOLTAGE | | 550 | max | volts |
| GRID-NO.2 VOLTAGE. | | 250 | max | volts |
| CATHODE CURRENT. | | 25 | max | ma |
| GRID-NO.2 INPUT. | | 0.9 | max | watt |
| PLATE DISSIPATION | | 2.5 | max | watts |
| PEAK HEATER-CATHODE VOLTAGE: | | | | |
| Heater negative with respect to cathode | | | max | volts |
| Heater positive with respect to cathode | | 150 | max | volts |
| Characteristics: | | | | |
| Plate Voltage | 190 | 200 | | volts |
| Grid No.3 | Connec | eted to can | thode | at socket |
| Grid-No.2 Voltage | 190 | 200 | | volts |
| Grid-No.1 Voltage | -2.35 | -2.5 | | volts |
| Plate Resistance (Approx.) | 0.35 | 0.35 | | megohm |
| Transconductance | 15000 | 15000 | | μmhos |
| Plate Current | 10 | 10 | | ma |
| Grid-No.2 Current | 4.1 | 4.1 | | ma |
| Maximum Circuit Values: | | | | |

Grid-No.1-Circuit Resistance.....

6EM5

Related type:

8EM5

6EH8


6E.17

Related types:

3EJ7, 4EJ7

BEAM POWER TUBE

Miniature type used as vertical deflection amplifier in television receivers utilizing picture tubes having diagonal deflection angles of 110 degrees. Outline 8E, OUTLINES SEC-




1 max

TION. Tube requires miniature nine-contact socket and may be mounted in any position.

| HEATER VOLTAGE (AC/DC) | 6.3 | volts |
|---|-----------|--------|
| HEATER CURRENT | 0.8 | ampere |
| DIRECT INTERELECTRODE CAPACITANCES: | | |
| Grid No.1 to Plate | 0.7 max | pf |
| Grid No.1 to Cathode, Heater, Grid No.2, and Grid No.3 | 10 | pf |
| Plate to Cathode, Heater, Grid No.2, and Grid No.3 | 5.1 | pf |
| PLATE RESISTANCE (Approx.)* | 0.05 | megohm |
| TRANSCONDUCTANCE* | 5100 | µmhos |
| * For plate and grid-No.2 volts, 250; grid-No.1 volts, -18; plate ma., 40; grid-No. | 2 ma., 3. | • |

252

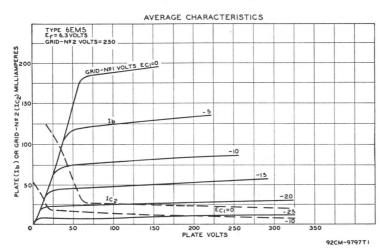

VERTICAL DEFLECTION AMPLIFIER

For operation in a 525-line, 30-frame system

Maximum Ratings, (Design-Center Values):


| PEAK POSITIVE-PULSE PLATE VOLTAGE [†] (Absolute Maximum) 2200 [*] max vol | |
|---|----|
| | te |
| GRID-NO.2 (SCREEN-GRID) VOLTAGE | US |
| PEAK NEGATIVE-PULSE GRID-NO.1 (CONTROL-GRID) VOLTAGE | ts |
| | na |
| | na |
| PLATE DISSIPATION | |
| GRID-NO.2 INPUT. 1.5 max wat | ts |
| PEAK HEATER-CATHODE VOLTAGE: | |
| Heater negative with respect to cathode | |
| Heater positive with respect to cathode | |
| BULB TEMPERATURE (At hottest point) 250 max ° | ЪС |

Maximum Circuit Values:

Grid-No.1-Circuit Resistance..... 2.2 max megohm † The duration of the voltage pulse must not exceed 15 per cent of one vertical scanning cycle. In a 525-line, 30-frame system, 15 per cent of one vertical scanning cycle is 2.5 milliseconds.

^{*} Under no circumstances should this absolute value be exceeded.


• The dc component must not exceed 100 volts.

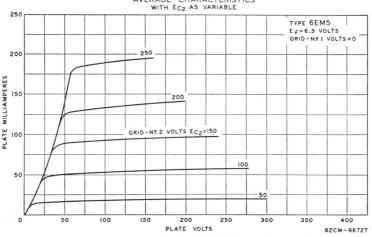

AVERAGE CHARACTERISTICS WITH EC2 AS VARIABLE

DUAL TRIODE

Glass octal type containing highmu triode and high-perveance, low-mu triode in same envelope. Used as combined vertical-deflection amplifier and vertical-deflection oscillator in tele-



vision receivers employing picture tubes having 110-degree deflection angles and high ultor voltages. Outline 14A, OUTLINES SECTION. Tube requires octal socket and may be mounted in any position. For curve of average plate characteristics, Unit No.1, refer to type 6DR7 (Unit No.1).

| HEATER VOLTAGE (AC/DC). HEATER CURRENT. DIRECT INTERELECTRODE CAPACITANCES (Approx.): Grid to Plate. Grid to Cathode and Heater. Plate to Cathode and Heater. | Unit No.1 4.8 2.2 0.6 | 6.3 0.925 Unit No.2 10 7 1.8 | volts ampere pf pf |
|--|--------------------------------|---|-----------------------------|
| CLASS A, AMPLIFIER | | | |
| Characteristics: | Unit No.1 | Unit No.2 | |
| Plate Voltage | 250 | 150 | volts |
| Grid Voltage. | -3 | -20 | volts |
| Amplification Factor | 64 | 5 4 | VOIUS |
| Plate Resistance (Approx.). | 40000 | 750 | ohms |
| Transconductance | 1600 | 7200 | μmhos |
| Grid Voltage (Approx.): | 1000 | 1200 | µ111103 |
| For plate current of $10\mu a$ | -5.5 | - | volts |
| For plate current of 100 µa | - | -45 | volts |
| Plate Current. | 1.4 | 50 | ma |
| Plate Current, for plate voltage of 60 volts and zero grid voltage | - | 95 | ma |
| Plate Current, for grid voltage of -28 volts | - | 10 | ma |
| # The duration of the voltage pulse must not exceed 15 per cent of o line, 30-frame system, 15 per cent of one vertical-scanning cycle i | | | In a 525- |

The dc component must not exceed 100 volts.

6EM7


Related types:

10EM7, 13EM7

VERTICAL-DEFLECTION OSCILLATOR AND AMPLIFIER

For operation in a 525-line, 30-frame system

| Maximum Ratings, (Design-Maximum Values): DC PLATE VOLTAGE PEAK POSITIVE-PULSE PLATE VOLTAGE# PEAK NEGATIVE-PULSE GRID VOLTAGE. PEAK CATHODE CURRENT AVERAGE CATHODE CURRENT. | Unit No.1 Oscillator 330 max -400 max 77 max 22 max | Unit No.2 Amplifier 330 max 1500 max -250 max 175 max 50 max | volts volts ma ma |
|--|--|--|----------------------------|
| PLATE DISSIPATION PEAK HEATER-CATHODE VOLTAGE: | 1.5 max | 10 max | watts |
| Heater negative with respect to cathode Heater positive with respect to cathode | 200 max 200 max | 200 max 200 max | volts volts |

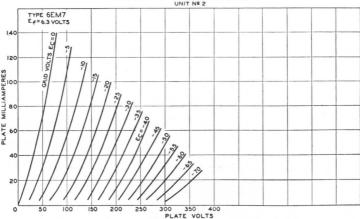

AVERAGE PLATE CHARACTERISTICS

92CM-10466T

| Maximum Circuit Values: | |
|----------------------------------|--------|
| Grid-Circuit Resistance: | Unit N |
| For grid-resistor-bias operation | 2.2 n |
| For cathode-bias operation | 2.2 m |

н

5

GIF

G3p

PLATE (Ib) OR GRID-No.2 (I C2) MIL

0

IC2

200

G2P

7

8

ís

Pr

Unit No.1 Unit No.2 2.2 max 2.2 max megohms 2.2 max 2.2 max megohms

DIODE—REMOTE-CUTOFF PENTODE

Miniature type used as combined if amplifier and AM detector in AM and AM/FM radio receivers. Outline 8D, OUTLINES SECTION. Tube requires miniature nine-contact socket and may be operated in any position.

| OE | 31 |
|---------|--------|
| Related | types: |

12EQ7, 20EQ7

| and may be operated in any position. | | |
|---|-----------------|------------------------|
| HEATER VOLTAGE (AC/DC) | $6.3 \\ 0.3$ | volts |
| DIRECT INTERELECTRODE CAPACITANCES: | | |
| Pentode Unit: | 0.000 | |
| Grid No.1 to Plate Grid No.1 to Cathode, Heater, Grid No.2, Grid No.3, and Internal Shield | 0.002 ma 5.5 | x pf pf |
| Plate to Cathode, Heater, Grid No.2, Grid No.3, and Internal Shield | 5 | pf |
| Pentode Grid No.1 to Diode Plate | 0.0015 ma | |
| Pentode Plate to Diode Plate | 0.095 | pf |
| PENTODE UNIT AS CLASS AL AMPLIFIER | | |
| Maximum Ratings, (Design-Maximum Values): | | |
| PLATE VOLTAGE. GRID-NO.3 (SUPPRESSOR-GRID) VOLTAGE: | 300 ma | x volts |
| Positive value | 300 ma | |
| Negative value. | -300 ma | |
| GRID-NO.2 (SCREEN-GRID) SUPPLY VOLTAGE | 300 ma | x volts rve page 70 |
| GRID-NO.1 (CONTROL-GRID) VOLTAGE: | | If ve page 10 |
| Positive-bias value | 0 ma | |
| Negative-bias value | -50 ma | |
| PLATE DISSIPATIONGRID-NO.3 INPUT | 3 ma 0.2 ma | |
| GRID-NO.2 INPUT: | 0.4 110 | wall |
| For grid-No.2 voltages up to 150 volts | 0.6 ma | |
| For grid-No.2 voltages between 150 and 300 volts PEAK HEATER-CATHODE VOLTAGE: | See cı | urve page 70 |
| Heater negative with respect to cathode | 200 ma | x volts |
| Heater positive with respect to cathode | 200 ma | ax volts |
| BULB TEMPERATURE (At hoftest point) | 150 ma | ıx °C |
| Characteristics: | | |
| Plate Voltage | 100 | volts |
| Grid No.3Connect | | |
| Internal ShieldConnect Grid-No.2 Voltage | ed to catho | volts |
| Grid-No.1 Supply Voltage. | 0 | volts |
| Grid-No.1 Resistor (Bypassed) | 2.2 | megohms |
| AVERAGE CHARACTERISTICS | | |
| | | |
| TYPE 6EQ7 | | |
| GRID NO.3 AND INTERNAL SHIFLD | | |
| W ¹⁴ GRID No.3 AND INTERNAL SHIELD GONNECTED TO CATHODE AT SOCKET. GRID-No.2 VOLTS-100 GRID-No.2 VOLTS-100 GRID-No.1 VOLTS En tO | | |
| GIQ EF+6.3 VOLTS BU 4 GRID N.3 AND INTERNAL SHIELD CONNECTED TO CATHODE AT SOCKET. GRID-N₀! VOLTS ECI+0 GRID-N₀! VOLTS ECI+0 GRID-N₀! VOLTS ECI+0 | | |
| | | |

| | | Іь | |
|--|--|----|--|
| | | | |

E_{CI}=0

.2

300 400 PLATE VOLTS

92CM-10680T1

-2

-4

-10


500

| Plate Resistance (Approx.). Transconductance. Plate Current. Grid-No.2 Current. Grid-No.1 Voltage (Approx.) for transconductance of 40 µmhos | $\begin{array}{c} 0.25\\ 3800\\ 9\\ 3.5\\ -20 \end{array}$ | megohm µmhos ma volts |
|--|--|--------------------------------|
| DIODE UNIT | | |
| Maximum Ratings, (Design-Maximum Values): PLATE CURRENT. | 1 max | ma |
| Characteristics, Instantaneous Value: Tube Voltage Drop for plate current of 2 ma | 10 | volts |

The dc component must not exceed 100 volts.

HIGH-MU TRIODE

Miniature type with frame grid used in vhf tuners of television receivers. Outline 7B, OUTLINES SEC-TION. Tube requires miniature sevencontact socket and may be mounted in any position. Heater volts (ac/dc), 6.3, amperes, 0.18.



1 max megohm

6)^{IS}

CLASS A1 AMPLIFIER

| Maximum Ratings, (Design-Center Values): | | |
|--|---------|-------|
| PLATE VOLTAGE | 250 max | volts |
| GRID VOLTAGE, Negative-bias value | -50 max | volts |
| CATHODE CURRENT. | 20 max | ma |
| PLATE DISSIPATION | 2.2 max | watts |
| PEAK HEATER-CATHODE VOLTAGE: | | |
| Heater negative with respect to cathode | 100 max | volts |
| Heater positive with respect to cathode | 100 max | volts |
| Characteristics: | | |
| Plate Voltage | 200 | volts |
| Grid Voltage | -1.2 | volts |
| Amplification Factor | 80 | |
| Plate Resistance (Approx.) | 8000 | ohms |
| Transconductance | 10500 | µmhos |
| Plate Current | 10 | ma |
| Grid Voltage (Approx.) for transconductance of 500 µmhos | -3.8 | volts |
| Grid Voltage (Approx.) for transconductance of 100 µmhos | -5.6 | volts |
| | | |

Maximum Circuit Value: Grid Circuit Resistance...

6ES5

6ER 5


Related types: 2ER5, 3ER5

HIGH-MU TRIODE

Miniature type used as groundedcathode rf amplifier in vhf television receivers. Outline 7B, OUTLINES SECTION. Tube requires miniature seven-contact socket and may be operated in any position. Heater volts (ac/dc), 6.3; amperes, 0.2.

CLASS A1 AMPLIFIER

| Maximum Ratings, (Design-Maximum Values): | | |
|--|---------|--------|
| PLATE VOLTAGE | 250 max | volts |
| GRID VOLTAGE, Positive-bias value | 0 max | volts |
| CATHODE CURRENT | 22 max | ma |
| PLATE DISSIPATION | 2.2 max | watts |
| PEAK HEATER-CATHODE VOLTAGE: | | |
| Heater negative with respect to cathode | 100 max | volts |
| Heater positive with respect to cathode | 100 max | volts |
| Characteristics: | | |
| Plate Voltage | 200 | volts |
| Plate Voltage Grid Voltage | -1 | volt |
| Amplification Factor | 75 | |
| Plate Resistance (Approx.) | 8000 | ohms |
| Transconductance | 9000 | μmhos |
| Plate Current | 10 | ma |
| Grid Voltage (Approx.) for plate current of 100 µa | -6 | volts |
| Maximum Circuit Values: | | |
| Grid-Circuit Resistance | 1 max | megohm |



Characteristics.

VARIABLE-MU TWIN TRIODE

Miniature type with high transconductance, variable mu, and low noise; used as cascode-type amplifier in tuners of television receivers. Outline 8B, OUTLINES SECTION. Tube



requires miniature nine-contact socket and may be operated in any position. Heater volts (ac/dc), 6.3; amperes, 0.365.

CLASS A1 AMPLIFIER (Each Unit)


| characteristics. | | |
|---|---------|--------|
| Plate Voltage | 90 | volts |
| Grid Voltage | - 9 | volts |
| Plate Resistance (Approx.) | - | ohms |
| Transconductance. 12500 625 | 125 | umhos |
| Plate Current. 15 - | _ | ma |
| | | 1110 |
| CASCODE-TYPE AMPLIFIER | | |
| Maximum Ratings, (Design-Center Values): | | |
| PLATE SUPPLY VOLTAGE with plate current of 0 ma | 550 max | volts |
| PLATE VOLTAGE (Each unit) | 130 max | volts |
| GRID VOLTAGE, Negative-bias value (Each unit) | -50 max | volts |
| CATHODE CURRENT (Each unit) | 22 max | ma |
| PLATE DISSIPATION (Each unit) | 1.8 max | watts |
| HEATER-CATHODE VOLTAGE: | | |
| Unit No.1:° | | |
| RMS voltage between cathode and heater | 50 max | volts |
| Unit No.2: | 50 | |
| RMS voltage between cathode and heater [•] | 50 max | volts |
| DC voltage between cathode and heater [®] | 130 max | volts |
| | | |
| Typical Operation: In a cascode-type circuit with the grid of the output unit connected to a voltage divider ^D | | |
| Supply Voltage | 180 | volts |
| Plate Current. | 15 | ma |
| Transconductance | 12500 | µmhos |
| Noise Figure* | 6.5 | db |
| Grid Voltage (Approx.) for transconductance of 125 µmhos | - 9 | volts |
| Input Voltage for cross-modulation factor of 0.01 and | | |
| transconductance of 125 µmhos | 500 | mv |
| | | |
| Maximum Circuit Values: | | |
| Grid-Circuit Resistance (Each unit) | 1 max | meghom |
| | 1 maa | megnom |
| ° Grounded-cathode input unit—pins 6, 7, and 8. | | |
| | | |

Grounded-grid output unit-pins 1, 2, and 3.

• Cathode positive with respect to heater.

[□] In order not to exceed the maximum-rated plate voltage when the cascode-type amplifier is controlled it is necessary to use a voltage divider for the grid of the grounded-grid output unit.

* Measured with tube operating in a television tuner.



HIGH-MU TWIN TRIODE

Miniature type used in high-gain, resistance-coupled, low-level audioamplifier applications where low-hum and non-microphonic characteristics are important considerations, such as

6EU7

in microphone amplifiers and in preamplifiers for mono- and stereophonic phonographs. Outline 8B, OUTLINES SECTION. Tube requires miniature nine-contact socket and may be mounted in any position. For typical operation as a resistancecoupled amplifier, refer to RESISTANCE-COUPLED AMPLIFIER SECTION.

| Heater Voltage (ac/dc) | $6.3 \\ 0.3$ | volts |
|--|--------------|--------|
| DIRECT INTERELECTRODE CAPACITANCES (Each Unit, Approx.): | 0.0 | umpere |
| Grid to Plate | 1.5 | pf |
| Grid to Cathode and Heater | 1.6 | pf |
| Plate to Cathode and Heater | 0.2 | pf |
| | | 0.5.5 |


EQUIVALENT NOISE AND HUM VOLTAGE (Referenced to Grid, Each Unit):

CLASS A1 AMPLIFIER (Each Unit)

Maximum Ratings, (Design-Maximum Values):

| PLATE VOLTAGE | 330 max | volts |
|---|----------------------|-------|
| GRID VOLTAGE: | | |
| Negative-bias value | \dots -55 max | volts |
| Positive-bias value | 0 max | volts |
| PLATE DISSIPATION | \dots 1.2 max | watts |
| PEAK HEATER-CATHODE VOLTAGE: | | |
| Heater negative with respect to cathode | | volts |
| Heater positive with respect to cathode | 200 [•] max | volts |
| The dc component must not exceed 100 volts. | | |
| Characteristics: | | |
| Plate Voltage | 250 | volts |
| | 0 | 14 |


| Grid Voltage | -1 | -2 | volts |
|----------------------------|-------|-------|-------|
| Amplification Factor | 100 | 100 | |
| Plate Resistance (Approx.) | 80000 | 62500 | ohms |
| Transconductance | 1250 | 1600 | µmhos |
| Plate Current | 0.5 | 1.2 | ma |

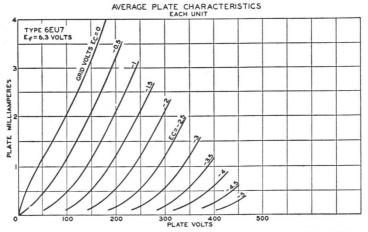

92CM-10470T

MEDIUM-MU TRIODE— SHARP-CUTOFF PENTODE

Miniature type used as combined P_T triode oscillator and pentode mixer in television receivers. Outline 8B, OUT-LINES SECTION. Tube requires miniature nine-contact socket and may be operated in any position. Heater volts



(ac/dc), 6.3; amperes, 0.45; warm-up time (average), 11 seconds.

CLASS A1 AMPLIFIER

| T | riode P | entode | |
|---|-----------|----------------|------|
| Maximum Ratings, (Design-Center Values): | Unit | Unit | |
| PLATE VOLTAGE | 30 max 33 | 30 max vo | olts |
| GRID-NO.2 (SCREEN-GRID) SUPPLY VOLTAGE | - 33 | 30 max vo | olts |
| GRID-NO.2 VOLTAGE | S | See curve page | 70 |
| GRID-NO.1 (CONTROL-GRID) VOLTAGE, Positive-bias value | 0 max | 0 max vo | olts |
| PLATE DISSIPATION | 3 max 3. | .1 max wa | atts |

258

6EU8

Related type:


5EU8

| GRID-NO.2 INPUT: For grid-No.2 voltages up to 165 volts For grid-No.2 voltages between 165 and 330 volts PAK HEATER-CATHODE VOLTAGE: Heater negative with respect to cathode | - 200 max | 0.55 max See curv 200 max | watt e page 70 volts |
|--|--------------|---------------------------------|----------------------------|
| Heater positive with respect to cathode | 200° max | $200^{\circ}max$ | volts |
| Characteristics: | | | |
| Plate Supply Voltage | 150 | 125 | volts |
| Grid-No.2 Supply Voltage | _ | 125 | volts |
| Grid-No.1 Voltage | - | -1 | volt |
| Cathode-Bias Resistor | 56 | - | ohms |
| Amplification Factor | 40 | - | |
| Plate Resistance (Approx.) | 5000 | 80000 | ohms |
| Transconductance | 8500 | 6400 | μ mhos |
| Grid-No.1 Voltage (Approx.) for plate current of 10 µa | -12 | - 9 | volts |
| Plate Current | 18 | 12 | ma |
| Grid-No.2 Current | | 4 | ma |
| Cathode Warm-up Time [®] | 35 | - | seconds |
| Maximum Circuit Values: | | | |
| Grid-No.1-Circuit Resistance | 0.1 max | 0.1 max | megohm |

The dc component must not exceed 100 volts.
The cathode warm-up time is defined as the time required for the transconductance to reach 6500

mhos when the tube is operated from a cold start with dc plate volts=100, grid volts=0, and heater volts=5.5.

SHARP-CUTOFF TETRODE



Miniature type used as rf amplifier in vhf tuners of television receivers. Outline 7B, OUTLINES SECTION. Tube requires miniature seven-contact socket and may be operated in any position. Heater volts (ac/dc), 6.3; amperes, 0.2.


6EV5

CLASS A1 AMPLIFIER

Maximum Ratings, (Design-Maximum Values):

| PLATE VOLTAGE. GRID-NO 2 (SCREEN-GRID) SUPPLY VOLTAGE. GRID-NO.2 VOLTAGE. GRID-NO.1 (CONTROL-GRID) VOLTAGE, Positive-bias value. CATHODE CURRENT. GRID-NO.2 INPUT: | 275 max 180 max See curv 0 max 20 max | volts volts e page 70 volts ma |
|---|---|--|
| For grid-No.2 voltages up to 90 volts. For grid-No.2 voltages between 90 and 180 volts. PLATE DISSIPATION. PEAK HEATER-CATHODE VOLTAGE: | 0.2 max See curv 3.25 max | watt e page 70 watts |
| Heater negative with respect to cathode Heater positive with respect to cathode | 100 max 100°max | volts volts |
| Characteristics: | 050 | 14- |
| Plate Voltage Grid-No.2 Voltage | 250 80 | volts |
| Grid-No.1 Voltage | -1 | volt |
| Plate Resistance (Approx.) | 0.15 | megohm |
| Transconductance | 8800 | μmhos |
| Plate Current | 11.5 | ma |
| Grid-No 2 Current | 0.9 | ma |
| Grid-No.1 Voltage (Approx.) for transconductance of 100 μ mhos | -4.5 | volts |
| Maximum Circuit Value: | | |
| Grid-No.1-Circuit Resistance | 0.5 max | megohm |

° The dc component must not exceed 50 volts.



HIGH-MU TWIN TRIODE


Miniature type used as a relaycontrol tube in remote-control tuning units of television receivers. It is processed specifically for operation under standby conditions. Outline 8D, OUT-

6EV7

LINES SECTION. Tube requires miniature nine-contact socket and may be mounted in any position.

| HEATER VOLTAGE (AC/DC). HEATER CURRENT. DIRECT INTERELECTRODE CAPACITANCES (Approx.): Unit No.1 Grid to Plate. 3 Grid to Cathode and Heater. 3 Plate to Cathode and Heater. 0.33 | 6.3 0.6 Unit No.2 3.4 3 0.23 | volts ampere pf pf |
|--|--|------------------------------|
| Characteristics: CLASS A1 AMPLIFIER (Each Unit) | | |
| Plate Voltage Grid Voltage Amplification Factor | $\begin{array}{c} 250 \\ -2 \\ 60 \end{array}$ | volts |
| Plate Resistance (Approx.). Transconductance. Plate Current. Grid Voltage (Approx.) for plate current of 100 µa. | $11500 \\ 5200 \\ 9.2 \\ -9$ | ohms µmhos ma volts |
| | -9 | volts |
| RELAY-CONTROL SERVICE (Each Unit) | | |
| Maximum Ratings, (Design-Maximum Values): | | |
| PLATE VOLTAGE. GRID VOLTAGE, Positive-bias value. CATHODE CURRENT. | 300 max 0 max 20 max | volts volts ma |
| PLATE DISSIPATION: When "on" time exceeds 30 seconds in any 2-minute interval When "on" time does not exceed 30 seconds in any 2-minute interval PEAK HEATER-CATHODE VOLTAGE: | 2.5 max 4.5 max | watts watts |
| Heater negative with respect to cathode Heater positive with respect to cathode The dc component must not exceed 100 volts. | 200 max 200¶max | volts volts |
| | | |
| Typical Operation with 2500-Ohm-Relay Load: 30 seconds With "on" time in any 2-minute interval: or less | More than 30 seconds | |
| Plate Supply Voltage. 250 Zero-bias Plate Current. 18.5 Grid Voltage (Approx.) for plate current of 100 µa. -9 | $\begin{array}{c}150\\10\\-5\end{array}$ | volts ma volts |
| Maximum Circuit Value: | | |
| Grid-Circuit Resistance | 3.9 max | megohms |

AVERAGE PLATE CHARACTERISTICS

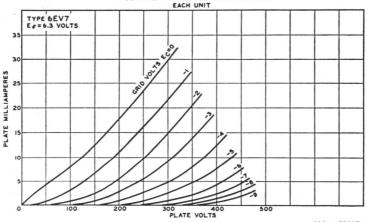

92CM-10393T

SHARP-CUTOFF PENTODE

Miniature type used in the gaincontrolled picture-if stages of vhf television receivers operating at an intermediate frequency in the order of 40 megacycles per second. This tube fea-



tures controlled plate-current cutoff and high transconductance (14000 $\mu mhos)$

6EW

Related types:

4EW6, 5EW6

6

combined with low interelectrode capacitance values. The 6EW6 is provided with separate base pins for grid No.3 and cathode to permit the use of an unbypassed cathode resistor to minimize changes in input conductance and input capacitance with bias, without causing oscillation. Outline 7B, OUTLINES SECTION. Tube requires miniature seven-contact socket and may be mounted in any position.

| HEATER VOLTAGE (AC/DC) | | 6.3 | volts |
|--|----------|----------|--------|
| HEATER CURRENT. | | 0.4 | ampere |
| | Without | With | |
| | External | External | |
| DIRECT INTERELECTRODE CAPACITANCES: | Shield | Shield* | |
| Grid No.1 to Plate | 0.04 max | 0.03 max | pf |
| Grid No.1 to Cathode, Heater, Grid No.2, Grid No.3 and | | | |
| Internal Shield | 10 | 10 | pf |
| Plate to Cathode, Heater, Grid No.2, Grid No.3, and | | | |
| Internal Shield | 2.4 | 3.4 | pf |

CLASS A1 AMPLIFIER


Maximum Ratings, (Design-Maximum Values):

| PLATE VOLTAGE | 330 max | volts |
|---|-----------------|---------|
| GRID NO.3 (SUPPRESSOR-GRID) VOLTAGE, Positive value | 0 max | volts |
| GRID-NO.2 (SCREEN-GRID) SUPPLY VOLTAGE. | 330 max | volts |
| GRID-NO.2 VOLTAGE. | See curve | |
| GRID-NO.1 (CONTROL-GRID) VOLTAGE, Positive-bias value | 0 max | volts |
| PLATE DISSIPATION | 3.1 max | watts |
| GRID-NO.2 INPUT: | | |
| For grid-No.2 voltages up to 165 volts | 0.65 max | watt |
| For grid-No.2 voltages between 165 and 330 volts | See curve | page 70 |
| PEAK HEATER-CATHODE VOLTAGE: | | |
| Heater negative with respect to cathode | 200 max | volts |
| Heater positive with respect to cathode | 200 m ax | volts |
| | | |

Characteristics:

| Plate Supply Voltage | | volts |
|--|--------------|--------------|
| Grid No.3 Connect | ted to catho | de at socket |
| Grid-No.2 Supply Voltage | 125 | volts |
| Cathode-Bias Resistor | 56 | ohms |
| Plate Resistance (Approx.) | 0.2 | megohm |
| Transconductance | 14000 | μmhos |
| Grid-No.1 Voltage (Approx.) for plate current of 20 µa | -3.5 | volts |
| Plate Current | 11 | ma |
| Grid-No.2 Current | 3.2 | ma |
| * With external shield connected to cathode. | | |

The dc component must not exceed 100 volts.

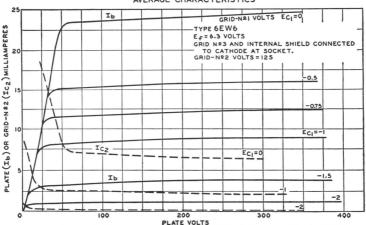


AVERAGE CHARACTERISTICS

92CM-9965TI

DUAL TRIODE

Neonoval type used as combined vertical-deflection oscillator and vertical-deflection amplifier in television receivers. Outline 11B, OUTLINES SECTION. Tube requires neonoval

6EW7



nine-contact socket and may be operated in any position. For curve of average plate characteristics, Unit No.1, refer to type 6DE7 (Unit No.1).


| HEATER VOLTAGE (AC/DC) | | 6.3 0.9 | volts ampere |
|---|--------------------------------|----------------------------|-----------------|
| DIRECT INTERELECTRODE CAPACITANCES (Approx.): Grid to Plate Grid to Cathode and Heater Plate to Cathode and Heater | Unit No.1 4.2 2.2 0.4 | Unit No.2 9 7 1.2 | pf pf pf |
| CLASS AL AMPLIFIER | | | |
| Characteristics: | Unit No.1 | | |
| Plate Voltage | 250 | 150 | volts |
| Grid Voltage | -11 | -17.5 | volts |
| Amplification Factor | 17.5 | 6 | |
| Plate Resistance (Approx.) | 8750 | 800 | ohms |
| Transconductance | 2000 | 7500 | µmhos |
| Grid Voltage (Approx.) for plate current of 10 µa | -20 | - | volts |
| Grid Voltage (Approx.) for plate current of 100 µa | - | -40 | volts |
| Plate Current | 5.5 | 45 | ma |
| Plate Current for plate voltage of 60 volts and zero grid voltage | _ | 95 | ma |
| Plate Current for grid voltage of -25 volts | - | 8 | ma |

VERTICAL-DEFLECTION OSCILLATOR AND AMPLIFIER

For operation in a 525-line, 30-frame system


| | Unit No.1 | Unit No.2 | 2 |
|---|------------|--------------------|---------|
| Maximum Ratings, (Design-Maximum Values): | Oscillator | Amplifier | |
| DC PLATE VOLTAGE. | 330 max | 330 max | volts |
| PEAK POSITIVE-PULSE PLATE VOLTAGE | - | 1500 max | volts |
| PEAK NEGATIVE-PULSE GRID VOLTAGE | -400 max | -250 max | volts |
| PEAK CATHODE CURRENT | 77 max | 175 max | ma |
| AVERAGE CATHODE CURRENT. | 22 max | 50 max | ma |
| PLATE DISSIPATION | 1.5 max | 10 max | watts |
| PEAK HEATER-CATHODE VOLTAGE: | | | |
| Heater negative with respect to cathode | 200 max | 200 max | volts |
| Heater positive with respect to cathode | 200 max | $200^{\bullet}max$ | volts |
| Maximum Circuit Values: | | | |
| Grid-Circuit Resistance: | | | |
| For esthode-bigs operation | 2 2 mar | 2 2 mar | megohms |

The duration of the voltage pulse must not exceed 15 per cent of one vertical scanning cycle. In a 525-line, 30-frame system, 15 per cent of one vertical scanning cycle is 2.5 milliseconds.
The dc component must not exceed 100 volts.

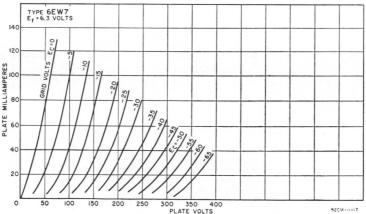

AVERAGE CHARACTERISTICS


BEAM POWER TUBE



Glass octal type used as horizontal deflection amplifier in television receivers. Outline 25A, **OUTLINES SECTION.** Tube requires octal socket and should be operated vertically (base down or up) or horizontally with pins 2 and 7 in a vertical plane. Heater volts (ac/dc) 6.3; amperes, 2.25. Characteristics as class A1 amplifier: plate and grid-No.2 volts, 175; grid-No.1 volts, -30; triode amplification factor, 4.2;



plate resistance (approx.), 8500 ohms; transconductance, 7700 µmhos; plate ma., 67; grid-No.2 ma., 3.3. Maximum ratings as horizontal-deflection amplifier: dc plate volts, 770 max; peak positive-pulse plate volts, 7000 max; peak negative-pulse plate volts, -1500 max; dc grid-No.2 volts, 195 max; peak negative-pulse grid-No.1 volts, -220 max; cathode ma., 770 max (peak), 220 max (average); plate dissipation, 22 max watts; grid-No.2 input, 3.5 max watts; peak heater-cathode volts, 200 max (the dc component must not exceed 100 volts). This type is used principally for renewal purposes.



BEAM POWER TUBE

Glass octal type used as vertical deflection amplifier in television receivers. Outline 14E, OUTLINES SECTION. Tube requires octal socket and may be operated in any position. Heatervolts (ac/dc), 6.3; amperes. 0.68.

6EY6 **Related type: 7EY6**

CLASS A1 AMPLIFIER

| Charac | terist | tics: | |
|--------|--------|-------|--|
| | | | |

| Plate Voltage | 50 | 250 | volts |
|--|------|-------|------------|
| Grid-No.2 Voltage | 250 | 250 | volts |
| Grid-No.1 Voltage | 0 | -17.5 | volts |
| Plate Resistance (Approx.) | - | 60000 | ohms |
| Transconductance | - | 4400 | μ mhos |
| Grid-No.1 Voltage (Approx.) for plate current of 100 μ a | - | -48 | volts |
| Plate Current | 153• | 44 | ma |
| Grid-No.2 Current. | 21• | 3 | ma |

VERTICAL DEFLECTION AMPLIFIER


For operation in a 525-line, 30-frame system

| Maximum | Ratings, | (Design-M | aximum | Vai | lues) | : |
|---------|----------|-----------|--------|-----|-------|---|
|---------|----------|-----------|--------|-----|-------|---|

| DC PLATE VOLTAGE | 350 max | volts |
|--|----------|--------|
| PEAK POSITIVE-PULSE PLATE VOLTAGE° | 2500 max | volts |
| GRID-NO.2 (SCREEN-GRID) VOLTAGE. | 300 max | volts |
| PEAK NEGATIVE-PULSE GRID-NO.1 (CONTROL-GRID) VOLTAGE | -250 max | volts |
| PEAK CATHODE CURRENT. | 180 max | ma |
| AVERAGE CATHODE CURRENT. | 60 max | ma |
| PLATE DISSIPATION | 11 max | watts |
| GRID-NO.2 INPUT. | 2.75 max | watts |
| PEAK HEATER-CATHODE VOLTAGE: | | |
| Heater negative with respect to cathode | 200 max | volts |
| Heater positive with respect to cathode | 200 max | volts |
| BULB TEMPERATURE (At hottest point) | 200 max | °C |
| Maximum Circuit Values: | | |
| | | |
| Grid-No.1-Circuit Resistance: | | |
| For fixed-bias operation | 1 max | megohm |

For cathode-bias operation 2.2 max megohms • This value can be measured by a method involving a recurrent waveform such that the maximum ratings of the tube will not be exceeded.

° The duration of the voltage pulse must not exceed 15 per cent of one vertical scanning cycle. In a 525-line, 30-frame system, 15 per cent of one vertical scanning cycle is 2,5 milliseconds. The dc component must not exceed 100 volts.



BEAM POWER TUBE

Glass octal type used as vertical deflection amplifier in television receivers. Outline 14E, OUTLINES SECTION. Tube requires octal socket and may be operated in any position. Heater volts (ac/dc), 6.3; amperes, 0.8.

6E75

ELASS A: AMPLIFIER

| na | raci | lei. | 131 | ICS: |
|----|------|------|-----|------|
| | | | | |

| Plate Voltage | 60 | 250 | volts |
|---|------|-------|-------|
| Grid-No.2 Voltage | 250 | 250 | volts |
| Grid-No.1 Voltage | 0 | -20 | volts |
| Plate Resistance (Approx.) | - | 50000 | ohms |
| Transconductance | - | 4100 | µmhos |
| Grid-No.1 Voltage (Approx.) for plate current of 100 µa | - | -50 | volts |
| Plate Current. | 180° | 43 | ma |
| Grid-No.2 Current | 26 • | 3.5 | ma |

VERTICAL DEFLECTION AMPLIFIER

For operation in a 525-line, 30-frame system

Maximum Ratings, (Design-Maximum Values):

| DC PLATE VOLTAGE | 350 max | volts |
|--|----------|-------|
| PEAK POSITIVE-PULSE PLATE VOLTAGE ^o | 2500 max | volts |
| GRID-NO.2 (SCREEN-GRID) VOLTAGE | 300 max | volts |
| PEAK NEGATIVE-PULSE GRID-NO.1 (CONTROL-GRID) VOLTAGE | -250 max | volts |
| PEAK CATHODE CURRENT. | 260 max | ma |
| AVERAGE CATHODE CURRENT. | 75 max | ma |
| PLATE DISSIPATION | 12 max | watts |
| GRID-NO.2 INPUT | 2.75 max | watts |
| PEAK HEATER-CATHODE VOLTAGE: | | |
| Heater negative with respect to cathode | 200 max | volts |
| Heater positive with respect to cathode | 200 max | volts |
| BULB TEMPERATURE (At hottest point) | 200 max | °C |
| | | |

Maximum Circuit Values:

6EZ8

Grid-No.1-Circuit Resistance:

| For fixed-bias operation | 1 max | megohm |
|--|----------|---------|
| For cathode-bias operation | 2.2 max | megohms |
| • This value can be measured by a method involving a recurrent waveform such | that the | maximum |


ratings of the tube will not be exceeded.

° The duration of the voltage pulse must not exceed 15 per cent of one vertical scanning cycle. In a 525-line, 30-frame system, 15 per cent of one vertical scanning cycle is 2.5 milliseconds.

The dc component must not exceed 100 volts.


HIGH-MU TRIPLE TRIODE

Miniature type used in oscillatormixer and afc service in FM receivers. P_{T_3} Outline 8B, OUTLINES SECTION. Tube requires miniature nine-contact G_{T_3} socket and may be operated in any position. Heater volts (ac/dc), 6.3; amperes, 0.45.



CLASS A1 AMPLIFIER (Each Unit Unless Otherwise Specified)


| Maximum Ratings, (Design-Maximum Values): | | |
|---|---------|-------|
| PLATE VOLTAGE | 330 max | volts |
| GRID VOLTAGE: | | |
| Negative-bias value. | -50 max | volts |
| Positive-blas value | 0 max | volts |
| PLATE DISSIPATION | 2 max | watts |
| TOTAL PLATE DISSIPATION (All plates) | 5 max | watts |
| HEATER-CATHODE VOLTAGE (Unit No.3): | | |
| Heater negative with respect to cathode | 100 max | volts |
| Heater positive with respect to cathode | 100 max | volts |
| Characteristics: | | |
| Plate Voltage | 125 | volts |
| Grid Voltage. | 1 | volt |
| Amplification Factor | 57 | |
| Plate Resistance (Approx.). | 13600 | ohms |
| Transconductance | 4200 | µmhos |
| Grid Voltage (Approx.) for plate current of 20 µa | -4 | volts |
| Plate Current. | 4.2 | ma |



HIGH-MU TRIODE

Metal type 6F5 and glass octal type 6F5-GT used in resistance-coupled amplifier circuits. Outlines 3 and 15Å, respectively, OUT-LINES SECTION. Tubes require octal socket and may be mounted in any position. Type 6F5-GT may be supplied with pin No.1 omitted. Heater volts (ac/dc), 6.3; amperes, 0.3.Typical 6F5 6F5GT Related type: 12F5GT

operation as class A_1 amplifier: plate volts, 250 (300 max); grid volts, -2; amplification factor, 100; plate resistance (approx.), 66000 ohms; transconductance, 1500 µhmos; plate ma., 0.9. Peak heatercathode volts, 90 max. Type 6F5-GT is a DISCONTINUED type listed for reference only. Type 6F5 is used principally for renewal purposes.



POWER PENTODE

Metal type 6F6 and glass octal types 6F6-G and 6F6-GT used in the audio output stage of ac receivers. Tubes are capable of large power output with relatively small input voltage. 6F6 6F6G 6F6GT

Outlines 5, 26, and $14\bar{E}$, respectively, OUTLINES SECTION. Type 6F6-GT may be supplied with pin No.1 omitted. Tubes require octal socket and may be mounted in any position. It is especially important that these tubes, like other powerhandling tubes, be adequately ventilated. Types 6F6-G and 6F6-GT are used principally for renewal purposes. Heater volts (ac/dc), 6.3; amperes, 0.7.

CLASS A1 AMPLIFIER

| Maximum Ratings, (Design-Center Values): PLATE VOLTAGE. GRID-NO.2 (SCREEN-GRID) VOLTAGE. PLATE DISSIPATION. GRID-NO.2 INPUT. PEAK HEATER-CATHODE VOLTAGE: Heater negative with respect to cathode. Heater positive with respect to cathode. | · · · · · · · · · · · · · · · · · · · | Pentode Connection 375 max 285 max 11 max 3.75 max 90 max 90 max | Triode Connection▲ 350 max 10 max - 90 max 90 max | volts volts watts watts volts |
|--|---------------------------------------|---|---|---|
| Typical Operation: | Per Conne | ntode ection | Triode Connection▲ | |
| Plate Voltage | 250 | 285 | 250 | volts |
| Grid-No.2 Voltage | 250 | 285 | - | volts |
| Grid-No.1 (Control-Grid) Voltage | -16.5 | -20 | -20 | volts |
| Peak AF Grid-No.1 Voltage | 16.5 | 20 | 20 | volts |
| Zero-Signal Plate Current | 34 | 38 | 31 | ma |
| Maximum-Signal Plate Current | 36 | 40 | 34 | ma |
| Zero-Signal Grid-No.2 Current. | 6.5 | 7 | | ma |
| Maximum-Signal Grid-No.2 Current | 10.5 | 13 | | ma |
| Amplification Factor | | | 6.8 | |
| Plate Resistance (Approx.) | 80000 | 78000 | 2600 | ohms |
| Transconductance | 2500 | 2550 | 2600 | μmhos |
| Load Resistance | 7000 | 7000 | 4000 | ohms |
| Total Harmonic Distortion | 8 | 9 | 6.5 | per cent |
| Maximum-Signal Power Output | 3.2 | 4.8 | 0.85 | watts |

PUSH-PULL CLASS A1 AMPLIFIER

Maximum Ratings: (Same as for class A1 amplifier)

Typical Operation (Values are for two tubes):

| Plate Voltage. Grid-No.2 Voltage. | $315 \\ 285$ | volts volts |
|---|--------------|----------------|
| Grid-No.1 (Control-Grid) Voltage | -24 | volts |
| Peak AF Grid-No.1-to-Grid-No.1 Voltage | 48 | volts |
| Zero-Signal Plate Current. | 62 | ma |
| Maximum-Signal Plate Current | 80 | ma |
| Zero-Signal Grid-No.2 Current. Maximum-Signal Grid-No.2 Current. | $12 \\ 19 5$ | ma |
| | 19.5 | ohms |
| Total Harmonic Distortion. | | er cent |
| Maximum-Signal Power Output. | | watts |


Maximum Circuit Values: Grid-No.1 Circuit Resistance: For fixed-bias operation. For cathode-bias operation. * Grid No.2 connected to plate.

6F7

LOW-MU TRIODE-

REMOTE-CUTOFF PENTODE

Glass type adaptable to circuit design in several ways. Outline 24B, OUTLINES SEC-TION. Heater volts (ac/dc), 6.3; amperes, 0.3. Typical operation as class A1 amplifier: pentode unit-plate volts, 250 max; grid-No.2 volts, 100; grid-No.1 volts, -3; plate resistance, 0.85 megohm; transconductance, 1100 µmhos; plate ma., 6.5; grid-No.2 ma., 1.5; triode unit-plate volts,



5

PBT

GITR

G2TD

ATR

0.1 max

0.5 max

megohm

megohm

100 max; grid volts, -3; amplification factor, 8; plate resistance, 0.016 megohm; transconductance, 500 µmhos; plate ma., 3.5. This type is used principally for renewal purposes.

MEDIUM-MU TWIN TRIODE

Glass octal type used as voltage amplifier or phase inverter in radio equipment. Outline 23, **OUTLINES SECTION.** Tube requires octal socket. Except for the heater rating of 6.3 volts (ac/dc) and 0.6 ampere and interelectrode capacitances, each triode unit is identical electrically with type 6J5. Type 6F8-G is used principally for renewal purposes.

DIODE—SHARP-CUTOFF. **TWIN-PLATE TETRODE**

6FA7

Characteristics, (Tetrode Unit):

6F8G

Miniature type used in frequencydivider and complex-wave generator circuits of electronic musical instruments. Outline 8D, OUTLINES SEC-TION. Tube requires miniature ninecontact socket and may be operated in any position.

| HEATER VOLTAGE (AC/DC) | 6.3 | volts |
|--|-----------|--------|
| HEATER CURRENT. | 0.3 | ampere |
| DIRECT INTERELECTRODE CAPACITANCES: | | |
| Tetrode Unit: | | |
| Grid No.1 to Plate A | 0.040 | pf |
| Grid No.1 to Plate B. | 0.030 max | pf |
| Grid No.1 to Cathode, Heater, Grid No.2, and Internal Shield | 5.5 | pf |
| Plate A to Cathode, Heater, Grid No. 2 | 1.8 | pf |
| Plate B to Cathode, Heater, Grid No.2, and Internal Shield | 1.8 | pf |
| Tetrode Grid No.1 to Diode Plate | 0.022 | pf |
| Tetrode Plate A to Diode Plate | 0.020 max | pf |
| Tetrode Plate B to Diode Plate | 0.055 | pf |
| | | |

CLASS A1 AMPLIFIER

| Plate A and Plate B connected together | | |
|---|--|----------------------|
| Plate Voltage | 100 vol | ts |
| Grid-No.2 Voltage | 100 vol | ts |
| Grid-No.1 Supply Voltage | 0 vol | ts |
| Grid-No.1 Resistor (Bypassed) | 2.2 megohn | ns |
| Plate Resistance (Approx.) | 90000 ohn | |
| Transconductance. | 3200 µmh | |
| Plate Current. | a a | na |
| Grid-No.2 Current | | 18 |
| Grid-No.1 Voltage (Approx.) for plate current of 20 µa | -4 vol: | |
| Grid-140.1 Voltage (Approx.) for plate current of 20 µa | | |
| | -4 001 | 00 |
| Using either Plate A or B, with unused plate grounded | | |
| Using either Plate A or B, with unused plate grounded Plate Voltage | 100 vol | ts |
| Using either Plate A or B, with unused plate grounded Plate Voltage | 100 vol 100 vol | ts ts |
| Using either Plate A or B, with unused plate grounded Grid-No.2 Voltage. Grid-No.1 Supply Voltage. | 100 vol 100 vol 0 vol | ts ts |
| Using either Plate A or B, with unused plate grounded Grid-No.2 Voltage. Grid-No.1 Supply Voltage. Grid-No.1 Resistor (Bypassed). | 100 vol 100 vol 0 vol 2.2 megohn | ts ts ts |
| Plate Voltage. Using either Plate A or B, with unused plate grounded Grid-No.2 Voltage. Grid-No.1 Supply Voltage Grid-No.1 Resistor (Bypassed) Plate Resistance (Approx.) | 100 vol 100 vol 0 vol 2.2 megohn 30000 ohn | ts ts ts ns |
| Using either Plate A or B, with unused plate grounded Grid-No.2 Voltage. Grid-No.1 Supply Voltage. Grid-No.1 Resistor (Bypassed). Plate Resistance (Approx.) Transconductance. | 100 vol 100 vol 0 vol 2.2 megohm 30000 ohm 1900 μmho | ts ts ns ns |
| Plate Voltage. Using either Plate A or B, with unused plate grounded Grid-No.2 Voltage. Grid-No.1 Supply Voltage Grid-No.1 Resistor (Bypassed) Plate Resistance (Approx.) | 100 vol 100 vol 0 vol 2.2 megohn 30000 ohn 1900 μmha 2.2 m | ts ts ts ns |

266


Technical Data


FREQUENCY DIVIDER & COMPLEX-WAVE GENERATOR

| Tetrode Unit | | |
|--|----------|-----------|
| Maximum Ratings, (Design-Maximum Values): | | |
| PLATE-A VOLTAGE | 330 max | volts |
| PLATE-B VOLTAGE | 330 max | volts |
| GRID-NO.2 (SCREEN-GRID) SUPPLY VOLTAGE | 330 max | volts |
| GRID-NO.2 VOLTAGE. | | e page 70 |
| GRID-NO.1 (CONTROL-GRID) VOLTAGE: | Dec curr | o pugo ro |
| Negative-bias value | -50 max | volts |
| Positive-bias value | 0 max | volts |
| PLATE-A DISSIPATION | 1.5 max | watts |
| PLATE-B DISSIPATION | 1.5 max | watts |
| GRID-NO.2 INPUT: | | |
| For grid-No.2 voltages up to 165 volts | 0.65 max | watt |
| For grid-No.2 voltages between 165 and 330 volts | See curv | e page 70 |
| PEAK HEATER-CATHODE VOLTAGE: | | |
| Heater negative with respect to cathode | 200 max | volts |
| Heater positive with respect to cathode | 200 max | volts |
| | | |
| Maximum Circuit Values: | | |
| Grid-No.1 Circuit Resistance: | | |
| For grid-No.1 resistor-bias operation | 2.2 max | megohms |
| Diode Unit | | |
| | | |
| Maximum Ratings, (Design-Maximum Values): | | |
| PLATE CURRENT | 1 max | ma |
| Characteristics Instantaneous Value | | |
| Characteristics, Instantaneous Value: | 10 | |
| Tube Voltage Drop for plate current of 2 ma | 10 | volts |
| The decomponent much and anotal 100 milts | | |

The dc component must not exceed 100 volts.

AVERAGE CHARACTERISTICS

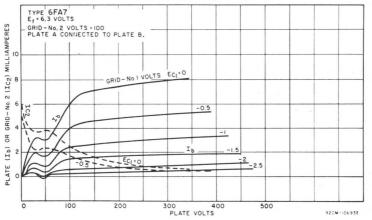



DUAL TRIODE

Glass type containing high-mu and low-mu triode units used as combined vertical-deflection oscillator and vertical-deflection amplifier in television receivers. Maximum dimensions:



over-all length, 2.9 inches; seated height, 2.62 inches; diameter, 1.188 inches. Tube requires miniature nine-contact socket and may be mounted in any position. Heater volts (ac/dc), 6.3; amperes, 0.925.

CLASS A1 AMPLIFIER

| Characteristics: | Unit No. 1 | Unit No. 2 | |
|----------------------------|------------|------------|-------|
| Plate Voltage | 250 | 60 150 | volts |
| Grid Voltage | | 0 -17.5 | volts |
| Amplification Factor | 64 | - 6 | |
| Plate Resistance (Approx.) | 40000 | - 800 | ohms |
| Transconductance | 1600 | - 7500 | μmhos |

| Plate Current Grid Voltage (Approx.): | 1.4 | 950 | 40 | ma |
|--|------|-----|-----|-------|
| For plate current of 10 µa | -5.5 | | - | volts |
| For plate current of 100 µa | - | | -40 | volts |
| Transconductance, for plate current of 1 ma | - | - | 500 | μmhos |
| Plate Current, for grid voltage of -25 volts | - | | 6 | ma |

VERTICAL-DEFLECTION OSCILLATOR AND AMPLIFIER

For operation in a 525-line, 30-frame system

| Maximum Ratings, (Design-Maximum Values): | Unit No. 1 Oscillator | Unit No. 2 Amplifier | |
|---|--------------------------|-------------------------|-------|
| DC PLATE VOLTAGE | 330 max | 330 max | volts |
| PEAK POSITIVE-PULSE PLATE VOLTAGE | - | 1500 max | volts |
| PEAK NEGATIVE-PULSE GRID VOLTAGE | -400 | -250 max | volts |
| PEAK CATHODE CURRENT. | 70 max | 175 max | ma |
| AVERAGE CATHODE CURRENT. | 20 max | 50 max | ma |
| PLATE DISSIPATION | 1.5 max | 10 max | watts |
| PEAK HEATER-CATHODE VOLTAGE: | | | |
| Heater negative with respect to cathode | 200 max | 200 max | volts |
| Heater positive with respect to cathode | $200 \bullet max$ | $200 \bullet max$ | volts |
| Manimum Circuit Values | | | |

Maximum Circuit Values:

Grid-Circuit Resistance:

Related type:


50FE5

The duration of the voltage pulse must not exceed 15 per cent of one vertical scanning cycle. In a 525-line, 30-frame system, 15 per cent of one vertical scanning cycle is 2.5 milliseconds.

• The dc component must not exceed 100 volts.

BEAM POWER TUBE

Glass octal type used in the audio output stages of compact stereophonic phonographs and in radio and television receivers. Tube has high sensitivity at very low plate and screen-





grid voltages; it can deliver relatively high power output at low values of plate load resistance. Outline 14F, OUTLINES SECTION. Tube requires octal socket and may be mounted in any position.

| HEATER VOLTAGE (AC/DC) | 6.3 | volts |
|--|------|---------|
| HEATER CURRENT | 1.2 | amperes |
| DIRECT INTERELECTRODE CAPACITANCES (Approx.): | | |
| Grid No.1 to Plate | 0.44 | pf |
| Grid No.1 to Cathode, Heater, Grid No.2, and Grid No.3 | 15 | pf |
| Plate to Cathode, Heater, Grid No.2, and Grid No.3 | 9 | pf |
| | | |

CLASS A1 AMPLIFIER Maximum Ratings, (Design-Maximum Values):

| PLATE VOLTAGE | | | | 175 max | volts |
|---|-------|------|--------|----------|-------|
| GRID-NO.2 (SCREEN-GRID) VOLTAGE | | | | 175 max | volts |
| GRID-NO.2 INPUT. | | | | 2.4 max | watts |
| PLATE DISSIPATION | | | | 14.5 max | watts |
| PEAK HEATER-CATHODE VOLTAGE: | | | | | |
| Heater negative with respect to cathode | | | | 300 max | volts |
| Heater positive with respect to cathode | | | | 200 max | volts |
| Typical Operation: | Fixed | Bias | Cathoo | le Bias | |
| Plate Supply Voltage | 130 | 145 | 130 | 145 | volts |
| Grid-No.2 Supply Voltage | 130 | 145 | 130 | 145 | volts |
| Grid-No.1 (Control-Grid) Voltage | -12.5 | -16 | - | - | volts |
| Cathode-Bias Resistor | - | - | 120 | 150 | ohms |
| Peak AF Grid-No.1 Voltage | 12.5 | 15 | 11.9 | 15.4 | volts |
| Zero-Signal Plate Current | 82 | 80 | 88 | 86 | ma |
| Maximum-Signal Plate Current | 94 | 100 | 90 | 86 | ma |
| Zero-Signal Grid-No.2 Current | 4 | 4 | 5 | 4.2 | ma |
| Maximum-Signal Grid-No.2 Current. | 15 | 18 | 9 | 17 | ma |
| Plate Resistance (Approx.) | - | - | 8000 | - | ohms |



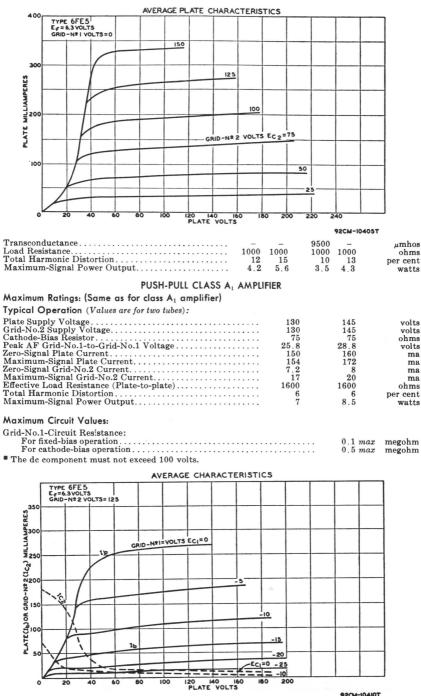

TECH-IU4H



6FG


Related type:

5FG7

Refer to type EM84/6FG5

MEDIUM-MU TRIODE-SHARP-CUTOFF PENTODE

Miniature type used as combined oscillator and mixer tube in vhf television receivers employing series-connected heaterstrings. Outline 8B, OUT-LINES SECTION. Tube requires min-



iature nine-contact socket and may be mounted in any position. Heater volts (ac/dc), 6.3; amperes, 0.45; warm-up time (average), 11 seconds. CLASS A1 AMPLIFIER

| | Tr | iode | P | entode | |
|--|--------|-------|-----|-----------------|---------|
| Maximum Ratings, (Design-Maximum Values): | L | Init | 1 | Unit | |
| PLATE VOLTAGE | . 330 | max | 33 | 0 max | volts |
| GRID-NO.2 (SCREEN-GRID) SUPPLY VOLTAGE | . – | | 33 | 0 max | volts |
| GRID-NO.2 VOLTAGE. | . – | | S | ee curve | page 70 |
| GRID-NO.1 (CONTROL-GRID) VOLTAGE, Positive-bias value | . 0 | max | | 0 max | volts |
| GRID-NO.2 INPUT: | | | | | |
| For grid-No.2 voltages up to 165 volts | | | 0.5 | 5 max | watt |
| For grid-No.2 voltages between 165 and 330 volts | | | S | ee curve | page 70 |
| PLATE DISSIPATION | . 2.5 | max | | 3 max | watts |
| PEAK HEATER-CATHODE VOLTAGE: | | | | | |
| Heater negative with respect to cathode | | max | | 0 max | volts |
| Heater positive with respect to cathode | . 200 | max ° | 20 | $0 max^{\circ}$ | volts |
| Characteristics: | | | | | |
| Plate Voltage | . 125 | | 100 | 125 | volts |
| Grid-No.2 Voltage | . – | | 100 | 125 | volts |
| Grid-No.1 Voltage | 1 | | 0 | -1 | volts |
| Amplification Factor | . 43 | | | _ | |
| Plate Resistance (Approx.) | . 5700 | | -1 | 80000 | ohms |
| Transconductance | . 7500 | 7. | 400 | 6000 | μmhos |
| Plate Current | . 13 | | | 11 | ma |
| Grid-No.2 Current | | | | 4 | ma |
| Grid-No.1 Voltage (Approx.) for plate current of 30 µa | 6.5 | | | -7.5 | volts |
| 9 The decomponent must not exceed 100 volta | | | | | |

° The dc component must not exceed 100 volts.

Related types

2FH5, 3FH5

HIGH-MU TRIODE

Miniature type used as an rf amplifier in vhf tuners of television receivers. Outline 7B, OUTLINES SECTION. Tube requires seven-contact socket and may be mounted in any position.


| (4 <u>5</u>) | |
|---------------|-----------------|
| H3/ | 6 ¹⁵ |
| 2 | |
| CC LL | Ûκ |
| ĸ | |

| HEATER VOLTAGE (AC/DC) | | 6.3 0.2 | volts ampere |
|---|-------------------------------|-----------------------------|-----------------|
| DIRECT INTERELECTRODE CAPACITANCES (Approx.): | Without External Shield | With External Shield• | |
| Grid to Plate | 0.52 | 0.52 | pf |
| Grid to Cathode, Heater, and Internal Shield | 3.2 | 3.2 | pf |
| Plate to Cathode, Heater, and Internal Shield | 3.2 | 4 | pf |
| • With external shield connected to cathode. | | | |


CLASS A, AMPLIFIER

Maximum Ratings, (Design-Maximum Values): PLATE VOLTAGE..... 150 max volts GRID VOLTAGE, Positive-bias value..... 0 maxvolts CATHODE CURRENT. 22 max ma PLATE DISSIPATION. 2.2 max watts PEAK HEATER-CATHODE VOLTAGE: Heater negative with respect to cathode..... 100 max volts Heater positive with respect to cathode..... 100 max volts

270

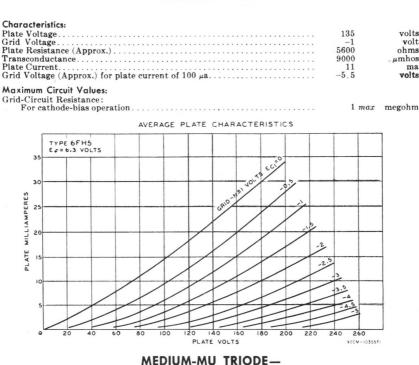

- Technical Data



MEDIUM-MU TRIODE— THREE-PLATE TETRODE

Miniature type used in complex-^{G2}TR wave generator applications. Sharpcutoff tetrode unit has pair of additional PIATR plates. Outline 8B, OUTLINES SEC-TION. Tube requires nine-contact R socket and may be mounted in any position.

| HEATER VOLTAGE (AC/DC). HEATER CURRENT. DIRECT INTERELECTRODE CAPACITANCES: ^o | $\begin{array}{c} 6.3 \\ 0.45 \end{array}$ | volts ampere |
|---|---|----------------------|
| Triode Unit: | | |
| Grid to Plate. Grid to Cathode and Heater. Plate to Cathode and Heater. | $\begin{array}{c} 1.4\\ 2.6\\ 1\end{array}$ | pf pf pf |
| Tetrode Unit: Grid No.1 to Plate No.2. Grid No.1 to Cathode, Heater, Grid No.2, Plate No.1A, and Plate No.1B Plate No.2 to Cathode, Heater, Grid No.2, Plate No.1A, and Plate No.1B Tetrode Grid No.1 to Triode Plate Tetrode Plate No.2 to Triode Plate. *With external shield connected to cathode. | 0.06 max 4.5 1.4 0.35 max 0.008 max | pf pf pf pf |

CLASS A₁ AMPLIFIER Triode Unit

Characteristics: Plate Voltage.... Grid Voltage.... 100 volts -1volt Amplification Factor... 40 Plate Resistance (Approx.) 7400 ohms Transconductance..... 5400 µmhos Plate Current.. 7.9 ma Grid Voltage (Approx.) for plate current of 100 µa..... -7 volts Tetrode Unit with Plates No. 1A and No. 1B Connected to Cathode at Socket Plate-No.2 Voltage..... 250 volts Grid-No.2 Voltage..... 250 volts

6FH8

| Grid-No.1 Voltage Plate-No.2 Resistance (Approx.). Transconductance, Grid No.1 to Plate No.2. Plate-No.2 Current. Grid-No.2 Current. Grid-No.1 Voltage (Approx.) for plate-No.2 current of 100 μa | | $\begin{array}{r} -2\\ 0.75\\ 4400\\ 7.3\\ 1.4\\ -7\end{array}$ | volts megohm µmhos ma ma volts |
|--|-------------|---|---|
| COMPLEX-WAVE GENERATO | R | 3 | |
| Maximum Ratings, (Design-Maximum Values): | Triode Unit | Tetrode Uni | t |
| PLATE VOLTAGE. | 275 mar | - | volts |
| PLATE-NO.1A VOLTAGE | - | 200 max | volts |
| PLATE-NO.1B VOLTAGE | | 200 max | volts |
| PLATE-NO.2 VOLTAGE | | 275 max | volts |
| GRID-NO.2 (SCREEN-GRID) SUPPLY VOLTAGE. | | 275 max | volts |
| GRID-NO.2 VOLTAGE. | | See curv | e page 70 |
| GRID-NO.1 (CONTROL-GRID) VOLTAGE: | | | |
| Negative-bias value | -40 max | -40 max | volts |
| Positive-bias value | 0 max | 0 max | volts |
| PLATE DISSIPATION. | 1.7 max | | watts |
| PLATE-NO.1A DISSIPATION | - | 0.3 max | watt |
| PLATE-NO.1B DISSIPATION | - | 0.3 max | watt |
| PLATE-NO.2 DISSIPATION. | - | 2.3 max | watts |
| GRID-NO.2 INPUT: | | | |
| For grid-No.2 voltages up to 137.5 volts | | 0.45 max | watt |
| For grid-No.2 voltages between 137.5 and 275 volts | | See curv | e page 70 |
| | | | |
| Typical Operation With Separate Plate Operation (Tetrode U | | | |
| Plates-No.1A, No.1B, and No.2 Voltage | | 100 | volts |
| Grid-No.2 Voltage | | 50 | volts |
| Grid-No.1 Voltage | | -1 | volt |
| Plate-No.1A Current. | | 0.04 | ma |
| Plate-No.1B Current | | 0.01 | ma |
| Plate-No.2 Current. | | 1.6 | ma |
| Grid-No.2 Current | | 0.3 | ma |
| Transconductance (Approx.): | | 50 | |
| Grid No.1 to Plate No.1A | | 70 | μ mhos |
| Grid No.1 to Plate No.1B | | 70 | μmhos |
| Grid No.1 to Plate No.2. | | 2500 | μmhos |
| Maximum Circuit Values: | | | |


Grid-No.1-Circuit Resistance: For fixed-bias operation. .

6FJ7

Triode Unit Tetrode Unit 0.5 max 0.5 max m 0.5 max megohm

MEDIUM-MU DUAL TRIODE

Duodecar type used as combined vertical-deflection-oscillator and ver- GT2 3 tical-deflection-amplifier tube in television receivers. Outline 12B, OUT-LINES SECTION. Tube requires duo-



decar twelve-contact socket and may be mounted in any position. Heater volts (ac/dc), 6.3; amperes, 0.9.

CLASS A1 AMPLIFIER

| Characteristics: | Unit No.1 | Uni | t No.2 | |
|---|-----------|-----|--------|-------|
| Plate Voltage | 250 | 150 | 250 | volts |
| Grid Voltage | -8 | 0 | -9.5 | volts |
| Amplification Factor | 22.5 | | 15.4 | |
| Plate Resistance (Approx.). | 9000 | | 2000 | ohms |
| Transconductance | 2500 | | 7700 | µmhos |
| Plate Current. | 8 | 68 | 41 | ma |
| Grid Voltage (Approx.) for plate current of 10 µa | -18 | - | - | volts |
| Grid Voltage (Approx.) for plate current of 50 µa | | - | -23 | volts |

VERTICAL-DEFLECTION OSCILLATOR AND AMPLIFIER

For operation in a 525-line, 20-frame system

| Maximum Ratings, (Design-Maximum Values): | Unit No.1 Oscillator | Unit No.2 Amplifier | |
|--|-------------------------|------------------------|-------|
| DC PLATE VOLTAGE | 350 max | 550 max | volts |
| PEAK POSITIVE-PULSE PLATE VOLTAGE [®] | | 2500 max | volts |
| PEAK NEGATIVE-PUISE GRID VOLTAGE | -400 max | -250 max | volts |
| PEAK CATHODE CURRENT. | - | 150 max | ma |
| AVERAGE CATHODE CURRENT. | - | 50 max | ma |
| PLATE DISSIPATION | 1 max | 10 max | watts |
| PEAK HEATER-CATHODE VOLTAGE: | | | |
| Heater negative with respect to cathode | 200 max | 200 max | volts |
| Heater positive with respect to cathode | 200 °max | 200 ° max | volts |

Maximum Circuit Values: Grid-Circuit Resistance:

| For fixed-bias operation For cathode-bias operation | 2.2 max megohms |
|--|---------------------|
| This value can be measured by a method involving a recurrent | 0 |
| ratings of the tube will not be exceeded. | |

• The duration of the voltage pulse must not exceed 15 per cent of one vertical scanning cycle. In a 525-line, 30-frame system, 15 per cent of one vertical scanning cycle is 2.5 milliseconds.

The dc component must not exceed 100 volts.

KT2 10 GT2 6 1 5 8 K_{TI} q 4 10 3 GT2 GTI 2 11 PTI NC 12 H

DUAL TRIODE

Duodecar type used as combined vertical-deflection oscillator and vertical-deflection amplifier in television receivers. The high-mu triode unit No.1 is used as an oscillator, and the low-

6FM7

mu triode unit No.2 is used as an amplifier. Outline 12B, OUTLINES SECTION. Tube requires duodecar twelve-contact socket and may be mounted in any position. Heater volts (ac/dc), 6.3; amperes, 1.05.

CLASS A1 AMPLIFIER


| Characteristics: | Unit No. 1 | Unit No. 2 | |
|--|------------|------------|------------|
| Plate Voltage | 250 | 175 | volts |
| Grid Voltage | -3 | -25 | volts |
| Amplification Factor | 66 | 5.5 | |
| Plate Resistance (Approx.) | 30000 | 920 | ohms |
| Transconductance | 2200 | 6000 | μ mhos |
| Grid Voltage (Approx.) for plate current of 20 µa | -5.3 | - | volts |
| Grid Voltage (Approx.) for plate current of 200 µa | - | -45 | volts |
| Plate Current | 2 | 40 | ma |

VERTICAL-DEFLECTION OSCILLATOR AND AMPLIFIER For amonghion in a EQE line QO fram

| For operation in a 525-line, 30-jrame | system | | |
|---|-----------------------|----------------------|---------|
| Maximum Ratings, (Design-Maximum Values): | Oscillator | Amplifier | |
| DC PLATE VOLTAGE. | 350 max | 550 max | volts |
| PEAK POSITIVE-PULSE PLATE VOLTAGE# | - | 1500 max | volts |
| PEAK NEGATIVE-PULSE PLATE VOLTAGE | -400 max | -250 max | volts |
| PEAK CATHODE CURRENT | - | 175 max | ma |
| AVERAGE CATHODE CURRENT. | - | 50 max | ma |
| PLATE DISSIPATION | 1 max | 10 max | watts |
| PEAK HEATER-CATHODE VOLTAGE: | | | |
| Heater negative with respect to cathode | 200 max | 200 max | volts |
| Heater positive with respect to cathode | 200 <i>max</i> | 200 [∎] max | volts |
| Maximum Circuit Values: | | | |
| Grid-Circuit Resistance: | | | |
| For fixed-bias operation | 1 max | 1 max | megohm |
| For cathode-bias operation | 2.2 max | 2.2 max | megohms |

The duration of the voltage pulse must not exceed 15 per cent of one vertical scanning cycle. In a 525-line, 30-frame system, 15 per cent of one vertical scanning cycle is 2.5 milliseconds.

† An adequate bias resistor or other means is required to protect the tube in the absence of excitation. The dc component must not exceed 100 volts.



TWIN DIODE—HIGH-MU TRIODE

Miniature type used as combined FM detector and af voltage amplifier in FM receivers. Outline 8B, OUT-LINES SECTION. Tube requires miniature nine-contact socket and may be operated in any position. Heater volts (ac/dc), 6.3; amperes, 0.45.

6FM8

TRIODE UNIT AS CLASS AL AMPLIFIER


| Maximum Ratings, (Design-Maximum Values): | | |
|---|---------|-------|
| PLATE VOLTAGE | 330 max | volts |
| GRID VOLTAGE, Positive-bias value | 0 max | volts |

| PLATE DISSIPATION. PEAK HEATER-CATHODE VOLTAGE: | 1.1 max | watts |
|--|----------|-------|
| Heater negative with respect to cathode | 200 max | volts |
| Heater positive with respect to cathode. | 200° max | volts |
| Characteristics: | | |
| Plate Voltage | 250 | volts |
| Grid Voltage. | -3 | volts |
| Amplification Factor | - 70 | VOIDS |
| Plate Resistance (Approx.) | 58000 | ohms |
| Transconductance. | 1200 | μmhos |
| Plate Current | 1 | ma |
| DIODE UNITS (Each Unit) | | |
| Maximum Ratings, (Design-Maximum Values): | | |
| PLATE CURRENT. PEAK HEATER-CATHODE VOLTAGE: | 5 max | ma |
| Heater negative with respect to cathode | 200 max | volts |
| Heater positive with respect to cathode | 200° max | volts |
| Characteristics, Instantaneous Value: | | |
| | | |

HIGH-MU TRIODE

6FQ5A

Miniature type with frame grid used as rf-amplifier tube in vhf tuners of television receivers. Outline 7B, OUTLINES SECTION. Tube requires miniature seven-contact socket



and may be mounted in any position. Heater volts (ac/ac), 6.3; amperes, 0.18.

CLASS A1 AMPLIFIER

| Maximum Ratings, (Design-Maximum Values): | | |
|---|---------|------------|
| PLATE VOLTAGE | 200 max | volts |
| GRID VOLTAGE, Negative-bias value | -50 max | volts |
| AVERAGE CATHODE CURRENT. | 22 max | ma |
| PLATE DISSIPATION | 2.5 max | watts |
| PEAK HEATER-CATHODE VOLTAGE: | | |
| Heater negative with respect to cathode | 100 max | volts |
| Heater positive with respect to cathode | 100 max | volts |
| Characteristics: | | |
| Plate Voltage | 135 | volts |
| Grid Voltage | -1.2 | volts |
| Amplification Factor | 74 | |
| Plate Resistance (Approx.) | 6300 | ohms |
| Transconductance | 12000 | μ mhos |
| Plate Current. | 8.9 | ma |
| Grid Voltage (Approx.) for plate current of $100 \ \mu a$ | -4.5 | volts |
| | | |

Maximum Circuit Values:


Related type:

8FQ7

Grid-Circuit Resistance: For cathode-bias operation....

MEDIUM-MU TWIN TRIODE

Miniature type used as combined vertical- and horizontal-deflection oscillator in television receivers. Outline 8D, OUTLINES SECTION. Tube requires miniature nine-contact socket




1 max megohm

and may be operated in any position. Except for direct interelectrode capacitances, this type is identical with miniature type 6CG7. For typical operation as a resistance-coupled amplifier, refer to RESISTANCE-COUPLED AMPLIFIER SECTION.

| HEATER VOLTAGE (AC/DC) | 6.3 | volts |
|-------------------------------|-----|---------|
| HEATER CURRENT. | 0.6 | ampere |
| HEATER WARM-UP TIME (AVERAGE) | 11 | seconds |

| DIRECT INTERELECTRODE CAPACITANCES (Approx.): Grid to Plate | 2.4 | Unit No. 2 3.8 2.4 0.26 | pf pf |
|--|-----|----------------------------------|----------|
| Plate to Cathode and Heater | | 0.26 | pf |
| Plate of Unit No.1 to Plate of Unit No.2 | | 1 | pf |



BEAM HEXODE


Miniature type used as rf-amplifier tube in vhf television receivers. In this tube, grid No.1 is the control grid. grid No.2 is a focusing grid, grid No.3 is the screen grid, and grid No.4 is the

suppressor grid. Grid No.2 is internally connected to the cathode and grid No.4, and aligned with grid No.3. Outline 7B, OUTLINES SECTION. Tube requires miniature seven-contact socket and may be mounted in any position. Heater volts (ac/dc), 6.3; amperes, 0.2,

CLASS A1 AMPLIFIER

| Maximum Ratings, (Design-Maximum Values): | | |
|---|----------|---------|
| PLATE VOLTAGE | 300 max | volts |
| GRID-NO.3 (SCREEN-GRID) VOLTAGE | 150 max | volts |
| GRID-NO.1 (CONTROL-GRID) VOLTAGE: | | |
| Negative-bias value | -50 max | volts |
| Positive-bias value | 0 max | volts |
| CATHODE CURRENT | 20 max | ma |
| GRID-NO.3 INPUT. | 0.15 max | watt |
| PLATE DISSIPATION | 3.25 max | watts |
| PEAK HEATER-CATHODE VOLTAGE: | | |
| Heater negative with respect to cathode | 200 max | volts |
| Heater positive with respect to cathode | 200 °max | volts |
| | | |
| Characteristics: | | |
| Plate Voltage | 275 | volts |
| Grid-No.3 Voltage | 135 | volts |
| Grid-No.1 Voltage | -0.2 | volt |
| Plate Resistance (Approx.) | 0.24 | megohm |
| Transconductance | 10000 | μmhos |
| Plate Current. | 9 | ma |
| Grid-No.3 Current | 0.17 | ma |
| Grid-No.1 Voltage (Approx.) for transconductance of 100 µmhos | -5 | volts |
| | | 10100 |
| Maximum Circuit Values: | | |
| Grid-No.1-Circuit Resistance, for fixed-bias operation | 0.5 max | megohm |
| ^o The decomponent must not exceed 100 volts | 0.0 max | megonin |
| | | |

° The dc component must not exceed 100 volts.



SHARP-CUTOFF TETRODE

Miniature type used as rf amplifier in vhf tuners of television receivers. Outline 7B, OUTLINES SECTION. Tube requires seven-contact socket and may be mounted in any position.

| 6 | F | V | 6 | |
|---|---|---|---|--|
| | | | | |

6F55

Related type

2F55

| HEATER VOLTAGE (AC/DC) | |
|---|------------|
| DIRECT INTERELECTRODE CAPACITANCES: ⁰ Grid No.1 to Plate | pf |
| Plate to Cathode, Heater, Grid No.2, and Internal Shield 3 Cathode to Heater 2.7 ° With external shield connected to cathode except as noted. | • pf pf |

• With external shield connected to ground.

CLASS A1 AMPLIFIER


Maximum Ratings. (Design-Maximum Values):

| PLATE VOLTAGE. GRID-NO.2 (SCREEN-GRID) SUPPLY VOLTAGE. | 275 max 180 max | volts |
|---|--------------------|-------|
| GRID-NO.2 VOLTAGE. GRID-NO.1 (CONTROL-GRID) VOLTAGE, Positive-bias value | See curve 0 max | |

| CATHODE CURRENT. GRID-NO.2 INPUT: For grid-No.2 voltages up to 90 volts. For grid-No.2 voltages between 90 and 180 volts. PLATE DISSIPATION. РЕАК НЕАТЕR-САТНОРЕ VOLTAGE: Heater negative with respect to cathode. Heater positive with respect to cathode. | 20 max 0.5 max See curv 2 max 200 max 200*max | ma watt e page 70 watts volts volts |
|--|--|--|
| Characteristics: Plate Voltage Grid-No.2 Voltage. Grid-No.1 Voltage. Plate Resistance (Approx.) Transconductance. Plate Current. Grid-No.2 Current. Grid-No.1 Voltage (Approx.) for plate current of 20 µa. | $125 \\ 80 \\ -1 \\ 0.1 \\ 8000 \\ 10 \\ 1.5 \\ -6$ | volts volts volt megohm µmhos ma ma volts |
| Maximum Circuit Value: Grid-No.1-Circuit Resistance * The dc component must not exceed 100 volts. | 0.5 max | megohm |

MEDIUM-MU TRIODE— SHARP-CUTOFF PENTODE

Miniature type used in television receivers as combined oscillator and amplifier. Triode is used as vertical deflection oscillator; pentode is used as if or general-purpose amplifier. Out-



line 8B, OUTLINES SECTION. Tube requires nine-contact socket and may be operated in any position. Heater volts (ac/dc), 6.3; amperes, 0.45; heater warm-up time (average), 11 seconds.

CLASS A1 AMPLIFIER

Pentode Unit

| Maximum Ratings, (Design-Maximum Values): | | | | |
|--|---------|---------|-------------------|------------------|
| PLATE VOLTAGE | | | 330 max | volts |
| GRID-NO.2 (SCREEN-GRID) SUPPLY VOLTAGE | | | 330 max | volts |
| GRID-NO.2 VOLTAGE. | | | See curv | e page 70 |
| GRID-NO.1 (CONTROL-GRID) VOLTAGE, Positive-bias value | e | | 0 max | volts |
| PLATE DISSIPATION | | | 2.3 max | watts |
| GRID-NO.2 INPUT: | | | | |
| For grid-No.2 voltages up to 165 volts | | | 0.55 max | watt |
| For grid-No.2 voltages between 165 and 330 volts. | | | See curv | e page 70 |
| PEAK HEATER-CATHODE VOLTAGE: | | | - 10 No. 10 | |
| Heater negative with respect to cathode | | | 200 max | volts |
| Heater positive with respect to cathode | | | $200^{\circ}max$ | volts |
| Maximum Circuit Values: Grid-No.1-Circuit Resistance: For fixed-bias operation For cathode-bias operation | | | 0.25 max 1 max | megohm megohm |
| Charles in the | Trio | de Unit | Pentode | |
| Characteristics: | 6FV8 | 6FV8A | Unit | |
| Plate Voltage | 125 | 125 | 125 | volts |
| Grid-No.2 Voltage | - | - | 125 | volts |
| Grid-No.1 Voltage | $^{-1}$ | -1 | -1 | volt |
| Amplification Factor | 40 | 45 | - | |
| Plate Resistance (Approx.) | 5000 | 5600 | 200000 | ohms |
| Transconductance | 8000 | 8000 | 6500 | μ mhos |
| Grid-No.1 Voltage (Approx.) for plate current of 20 µa | -9 | -7.5 | -9 | volts |
| Plate Current. | 14 | 12 | 12 | ma |
| Grid-No.2 Current. | | | 4 | ma |

VERTICAL-DEFLECTION OSCILLATOR-TRIODE UNIT

For operation in a 525-line, 30-frame system

| Maximum Kafings, (Design-Maximum Values): | | |
|---|----------|-------|
| DC PLATE VOLTAGE | 330 max | volts |
| Peak Negative-Pulse Grid Voltage | -250 max | volts |
| PEAK CATHODE CURRENT. | 70 max | ma |
| AVERAGE CATHODE CURRENT. | 20 max | ma |

6FV8

6FV8A

Related type: 5FV8

| PLATE DISSIPATION | 2 max | watts |
|--|--------------------|---------|
| PEAK HEATER-CATHODE VOLTAGE: Heater negative with respect to cathode Heater positive with respect to cathode | 200 max 200°max | volts |
| Maximum Circuit Values: | | |
| Grid-Circuit Resistance: For cathode-bias operation | 3 max | megohms |

The dc component must not exceed 100 volts.



BEAM POWER TUBE

Glass octal type used as horizontaldeflection amplifier in television receivers. Outline 19A, OUTLINES SECTION. Tube requires octal socket and may be mounted in any position. Heater volts (ac/dc), 6.3; amperes, 1.2.

6FW5


HORIZONTAL-DEFLECTION AMPLIFIER

For operation in a 525-line, 30-frame system

| Maximum Ratings, (Design-Maximum Values): | | |
|--|------------------|-------|
| DC PLATE VOLTAGE | 770 max | volts |
| PEAK POSITIVE-PULSE PLATE VOLTAGE [°] | 6500 max | volts |
| DC GRID-NO.2 (SCREEN-GRID) VOLTAGE | 220 max | volts |
| PEAK NEGATIVE-PULSE GRID-NO.1 VOLTAGE | -330 max | volts |
| DC GRID-NO.1 (CONTROL-GRID) VOLTAGE | -55 max | volts |
| PEAK CATHODE CURRENT | 610 max | ma |
| Average Cathode Current | 175 max | ma |
| GRID-NO.2 INPUT | 3.6 max | watts |
| PLATE DISSIPATION [•] | 18 max | watts |
| PEAK HEATER-CATHODE VOLTAGE: | | |
| Heater negative with respect to cathode | 200 max | volts |
| Heater positive with respect to cathode | 200 ■ max | volts |
| BULB TEMPERATURE (At hottest point) | 220 max | °C |
| | | |

Maximum Circuit Values:

• An adequate bias resistor or other means is required to protect the tube in the absence of excitation.




MEDIUM-MU TWIN TRIODE

Miniature type used in direct-coupled cathode-drive rf-amplifier circuits of vhf television tuners. In such circuits, one triode unit is used as the direct-coupled grounded-eathode driver for the other unit. Outline 8B, OUTLINES SECTION. Tube requires nine-contact socket. Heater volts (ac/dc), 6.3; amperes, 0.4. Characteristics as class A₁ amplifier (each unit):



plate volts, 100 (250 max); grid volts, -1.2; amplification factor, 33; plate resistance (approx.), 2500 ohms; transconductance, 13000 µmhos; plate ma., 15; cathode ma., 22 max; plate dissipation, 2.2 max watts; peak heater-cathode volts, 200 max (the dc component must not exceed 100 volts). This type is used principally for renewal purposes.



DUAL TRIODE

Duodecar type used as combined vertical-deflection oscillator and vertical-deflection amplifier in television receivers. The high-mu triode unit No.1 is used as an oscillator, and the low-



mu triode unit No.2 is used as an amplifier. Outline 12D, OUTLINES SECTION.

277

Tube requires duodecar twelve-contact socket and may be mounted in any position. Heater volts (ac/dc), 6.3; amperes, 1.05.

CLASS A1 AMPLIFIER

| Characteristics: | Unit No. 1 | Unit No. 2 | |
|---|------------|------------|------------|
| Plate Voltage | 250 | 150 | volts |
| Grid Voltage | $^{-3}$ | -17.5 | volts |
| Amplification Factor | 65 | 6 | |
| Plate Resistance (Approx.) | 40500 | 800 | ohms |
| Transconductance | 1600 | 7500 | μ mhos |
| Grid Voltage (Approx.) for plate current of 30 µa | -5.5 | - | volts |
| Grid Voltage (Approx.) for plate current of 50 µa | - | -55 | volts |
| Plate Current | 1.4 | 45 | ma |
| Plate Current (Approx.) for grid voltage of -25 volts | - | 10 | ma |

VERTICAL-DEFLECTION OSCILLATOR AND AMPLIFIER

For operation in a 525-line, 30-frame system


| Maximum Ratings, (Design-Maximum Values): | Unit No.1 Oscillator | Unit No.2 Amplifier | |
|---|-------------------------|------------------------|-------|
| DC PLATE VOLTAGE | 330 max | 275 max | volts |
| PEAK POSITIVE-PULSE PLATE VOLTAGE# | - | 2000 max | volts |
| PEAK NEGATIVE-PULSE PLATE VOLTAGE | -400 max | -250 max | volts |
| Peak Cathode Current | 70 max | 175 max | ma |
| Average Cathode Current | 20 max | 50 max | ma |
| PLATE DISSIPATION | 1 max | $7 \dagger max$ | watts |
| PEAK HEATER-CATHODE VOLTAGE: | | | |
| Heater negative with respect to cathode | 200 max | 200 max | volts |
| Heater positive with respect to cathode | 200 max | 200 max | volts |
| Maximum Circuit Values: | | | |

The duration of the voltage pulse must not exceed 15 per cent of one vertical scanning cycle. In a 525-line, 30-frame system, 15 per cent of one vertical scanning cycle is 2.5 milliseconds.

† An adequate bias resistor or other means is required to protect the tube in the absence of excitation. The dc component must not exceed 100 volts.


POWER PENTODE

Glass octal type used in output stage of radio receivers where moderate power output is required. Outline 22, OUTLINES SECTION. Tube requires octal socket. Except for interelectrode capacitances and a plate resistance of 175000 ohms, this type is electrically identical with type 6AK6. Heater volts (ac/dc), 6.3; amperes, 0.15. Type 6G6-G is used principally for renewal purposes.



BEAM POWER TUBE— SHARP-CUTOFF PENTODE

Duodecar type used as FM detector and audio-frequency output amplifier in television receivers. Outline 12B, OUTLINES SECTION. Tube requires duodecar twelve-contact socket



and may be mounted in any position. Heater volts (ac/dc), 6.3; amperes, 1.2.

BEAM POWER TUBE UNIT AS CLASS A1 AMPLIFIER

| Maximum Ratings, (Design-Maximum Values): | | |
|--|--|--|
| PLATE VOLTAGE | 150 max | volts |
| | 135 max | volts |
| | 65 max | ma |
| | 6.5 max | watts |
| | 1.8 max | watts |
| | | |
| | 200 max | volts |
| Heater positive with respect to cathode | 200 max | volts |
| GRID-NO.2 (SCREEN-GRID) VOLTAGE. AVERAGE CATHODE CURRENT. PLATE DISSIPATION. GRID-NO.2 INPUT. PEAK HEATER-CATHODE VOLTAGE: Heater negative with respect to cathode. Heater positive with respect to cathode. | 135 max 65 max 6.5 max 1.8 max 200 max | volts ma watts watts volts |



6G11

Typical Operation:

| Plate Voltage | 120 | volts |
|-----------------------------------|-------|----------|
| Grid-No.2 Voltage | 110 | volts |
| Grid-No.1 (Control-Grid) Voltage | 8 | volts |
| Peak AF Grid-No.1 Voltage | 8 | volts |
| Zero-Signal Plate Current | 49 | ma |
| Maximum-Signal Plate Current | 50 | ma |
| Zero-Signal Grid-No.2 Current. | 4 | ma |
| Maximum-Signal Grid-No.2 Current. | 8.5 | ma |
| Plate Resistance (Approx.). | 10000 | ohms |
| Transconductance | 7500 | µmhos |
| Load Resistance | 2500 | ohms |
| Total Harmonic Distortion | 10 | per cent |
| Maximum-Signal Power Output | 2.3 | watts |

PENTODE UNIT AS CLASS A1 AMPLIFIER


Characteristics:

| Plate Supply Voltage | 150 | volts |
|--|------|--------|
| Grid-No.3 (Suppressor-Grid) Voltage | 0 | volts |
| Grid-No.2 (Screen-Grid) Supply Voltage | 100 | volts |
| Cathode-Bias Resistor | 560 | ohms |
| Plate Resistance (Approx.) | 0.15 | megohm |
| Transconductance, Grid No.1 to Plate | 1000 | µmhos |
| Transconductance, Grid No.3 to Plate | 400 | µmhos |
| Plate Current | 1.3 | ma |
| Grid-No.2 Current | 2 | ma |
| Grid-No.1 Voltage (Approx.) for plate current of 10 µa | -4.5 | volts |
| Grid-No.3 Voltage (Approx.) for plate current of 10 µa | -4.5 | volts |

PENTODE UNIT AS FM DETECTOR

| Maximum Ratings, (Design-Maximum Values): | | |
|---|-------------|---------|
| PLATE VOLTAGE | 330 max | volts |
| GRID-NO.3 VOLTAGE. | 28 max | volts |
| GRID-NO.2 SUPPLY VOLTAGE | 330 max | volts |
| GRID-NO.2 VOLTAGE. | See curve p | bage 70 |
| GRID-NO.1 (CONTROL-GRID) VOLTAGE, Positive-bias value | 0 max | volts |
| PLATE DISSIPATION | 1.7 max | watts |
| GRID-NO.2 INPUT: | | |
| For grid-No.2 voltages up to 165 volts | 1.1 max | watts |
| For grid-No.2 voltages between 165 and 330 volts | See curve p | page 70 |
| PEAK HEATER-CATHODE VOLTAGE: | | |
| Heater negative with respect to cathode | 200 max | volts |
| Heater positive with respect to cathode | 200 max | volts |
| | | |

The dc component must not exceed 100 volts.



BEAM POWER TUBE


Neonoval type used as output tube in audio-amplifier applications. Outline 11C, OUTLINESSECTION. Tube requires neonoval nine-contact socket and may be mounted in any position.

| HEATER VOLTAGE (AC /DC) | $\begin{array}{c} 6 \cdot 3 \\ 1 \cdot 2 \end{array}$ | volts amperes |
|--|---|------------------|
| DIRECT INTERELECTRODE CAPACITANCES (Approx.): | | |
| Grid No.1 to Plate | 0.9 | pf |
| Grid No.1 to Cathode, Heater, Grid No.2, and Grid No.3 | 18 | pf |
| Plate to Cathode, Heater, Grid No.2, and Grid No.3 | 7 | pf |
| CLASS A: AMPLIFIER | | |

Maximum Ratings (Design-Marimum Values) .

| Maximum Kamigs, (Design-Maximum Values). | | |
|--|---------|-------|
| PLATE VOLTAGE | 220 max | volts |
| GRID-NO.2 (SCREEN-GRID) VOLTAGE | 140 max | volts |
| GRID-NO.2 INPUT. | 1.4 max | watts |
| PLATE DISSIPATION | 12 max | watts |
| PEAK HEATER-CATHODE VOLTAGE: | | |
| Heater negative with respect to cathode | 200 max | volts |
| Heater positive with respect to cathode | 200 max | volts |
| | | |


6GC5

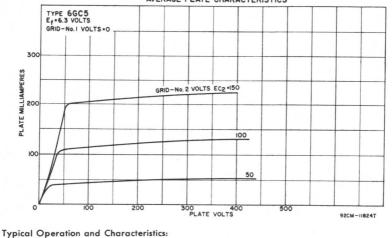


AVERAGE PLATE CHARACTERISTICS

| Typical Operation and Characteristics: | | | |
|--|-------|--------|----------|
| Plate Voltage | 110 | 200 | volts |
| Grid-No.2 Voltage | 110 | 125 | volts |
| Grid-No.1 Voltage | -7.5 | - | volts |
| Cathode-Bias Resistor | _ | 180 | ohms |
| Peak AF Grid-No.1 Voltage | 7.5 | 8.5 | volts |
| Zero-Signal Plate Current. | 49 | 46 | ma |
| Maximum-Signal Plate Current. | 50 | 47 | ma |
| Zero-Signal Grid-No.2 Current. | 4 | 2.2 | ma |
| Maximum-Signal Grid-No.2 Current. | 10 | 8.5 | ma |
| Plate Resistance (Approx.) | 13000 | 28000 | ohms |
| Transconductance | 8000 | 8000 | µmhos |
| Load Resistance | 2000 | 4000 | ohms |
| Total Harmonic Distortion | 10 | 10 | per cent |
| Maximum-Signal Power Output | 2.1 | 3.8 | watts |
| Maximum Circuit Values: | | | |
| Grid-No.1-Circuit Resistance: | | | |
| For fixed-bias operation | | 0.1 ma | x megohm |

For cathode-bias operation..... 0.5 max megohm The dc component must not exceed 100 volts.

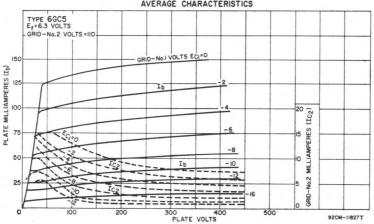

AVERAGE CHARACTERISTICS



BEAM POWER TUBE

Duodecar type used as horizontaldeflection-amplifier tube in television receivers. Outline 20, OUTLINES SECTION. Tube requires duodecar twelve-contact socket and may be

6GE5 **Related** types: 12GE5, 17GE5

mounted in any position. Heater volts (ac/dc), 6.3; amperes, 1.2.

| Characteristics: | CLASS A1 AMPLIFIER | | | |
|--------------------------------------|--------------------|-----|-------|------------|
| Plate Voltage | | 60 | 250 | volts |
| Grid-No.2 (Screen-Grid) Voltage | | 150 | 150 | volts |
| Grid-No.1 (Control-Grid) Voltage | | 0 | -22.5 | volts |
| Triode Amplification Factor* | | - | 4.4 | |
| Plate Resistance (Approx.) | | - | 18000 | ohms |
| Transconductance | | | 7300 | μ mhos |
| Plate Current | | 345 | 65 | ma |
| Grid-No.2 Current | | 27• | 1.8 | ma |
| Grid-No.1 Voltage (Approx.) for plat | te current of 1 ma | - | -42 | volts |
| | | | | |

* Triode connection (grid No.2 tied to plate); plate and grid-No.2 volts = 150.

• This value can be measured by a method involving a recurrent waveform such that the maximum ratings of the tube will not be exceeded.

HORIZONTAL-DEFLECTION AMPLIFIER

For operation in a 525-line, 30-frame system


Maximum Ratings, (Design-Maximum Values):

| DC PLATE SUPPLY VOLTAGE. | 770 max | volts |
|---|-----------|-------|
| PEAK POSITIVE-PULSE PLATE VOLTAGE# | 6500 max | volts |
| PEAK NEGATIVE-PULSE PLATE VOLTAGE | -1500 max | volts |
| DC GRID-NO.2 VOLTAGE. | 220 max | volts |
| PEAK NEGATIVE-PULSE GRID-NO.1 VOLTAGE | -330 max | volts |
| DC GRID-NO.1 VOLTAGE. | -55 max | volts |
| PEAK CATHODE CURRENT. | 550 max | ma |
| AVERAGE CATHODE CURRENT. | 175 max | ma |
| PLATE DISSIPATION | 17.5 max | watts |
| GRID-NO.2 INPUT | 3.5 max | watts |
| PEAK HEATER-CATHODE VOLTAGE: | | |
| Heater negative with respect to cathode | 200 max | volts |
| Heater positive with respect to cathode | 200 max | volts |
| BULB TEMPERATURE (At hottest point) | 200 max | °C |
| Maximum Circuit Values: | | |

Grid-No.1-Circuit Resistance..... 1 max megohm # The duration of the voltage pulse must not exceed 15 per cent of one horizontal scanning cycle. In a

525-line, 30-frame system, 15 per cent of one horizontal scanning cycle is 10 microseconds. † An adequate bias resistor or other means is required to protect the tube in the absence of excitation.

The dc component must not exceed 100 volts.



BEAM POWER TUBE

Duodecar type used as horizontaldeflection amplifier in television receivers. Outline 12D, OUTLINES SECTION. Tube requires duodecar twelve-contact socket and may be **6GF5**

mounted in any position. Heater volts (ac/dc), 6.3; amperes, 1.2.

Characteristics:

CLASS A1 AMPLIFIER

| Plate Voltage | 60 | 250 | volts |
|---|-----|-------|------------|
| Grid-No.2 (Screen-Grid) Voltage | 150 | 150 | volts |
| Grid-No.1 (Control-Grid) Voltage | 0 | -26.5 | volts |
| Triode Amplification Factor* | - | 4.2 | |
| Plate Resistance (Approx.) | - | 0.26 | megohm |
| Transconductance | - | 4700 | μ mhos |
| Plate Current | 345 | 34 | ma |
| Grid-No.2 Current | 33• | 1.6 | ma |
| Grid-No.1 Voltage (Approx.) for plate current of 1 ma | _ | -46 | volts |

HORIZONTAL-DEFLECTION AMPLIFIER

For operation in a 525-line, 30-frame system

| Maximum Ratings, (Design-Maximum Values): | | |
|---|-----------|-------|
| DC PLATE SUPPLY VOLTAGE. | 770 max | volts |
| PEAK POSITIVE-PULSE PLATE VOLTAGE# | 5000 max | volts |
| PEAK NEGATIVE-PULSE PLATE VOLTAGE | -1500 max | volts |
| DC GRID-NO.2 VOLTAGE. | 220 max | volts |
| PEAK NEGATIVE-PULSE GRID-NO.1 VOLTAGE | -330 max | volts |
| NEGATIVE DC GRID-NO.1 VOLTAGE. | -55 max | volts |
| PEAK CATHODE CURRENT | 500 max | ma |
| AVERAGE CATHODE CURRENT. | 160 max | ma |
| PLATE DISSIPATION | 9 max | watts |
| GRID-NO.2 INPUT. | 2.5 max | watts |
| PEAK HEATER-CATHODE VOLTAGE: | | |
| Heater negative with respect to cathode | 200 max | volts |
| Heater positive with respect to cathode | 200 max | volts |
| BULB TEMPERATURE (At hottest point) | 200 max | °C |
| | | |

Maximum Circuit Values:

* Triode connection (grid No.2 connected to plate); plate and grid-No.2 volts = 150.

• These values can be measured by a method involving a recurrent waveform such that the maximum ratings of the tube will not be exceeded.

The duration of the voltage pulse must not exceed 15 per cent of one horizontal scanning cycle. In a 525-line, 30-frame system, 15 per cent of one horizontal scanning cycle is 10 microseconds.

†An adequate bias resistor or other means is required to protect the tube in the absence of excitation. The dc component must not exceed 100 volts.

DUAL TRIODE



Novar type containing high-mu and high-perveance, low-mu triode units used as combined vertical-deflec-• tion oscillator and vertical-deflection amplifier in television receivers. Out-



line 10A, OUTLINES SECTION. Tube requires novar nine-contact socket and may be mounted in any position. For curves of average plate characteristics for Unit No.1 and Unit No.2, refer to types 6DR7 (Unit No.1) and 6EM7, respectively.

| HEATER VOLTAGE (AC /DC) | | 6.3 0.985 | volts ampere |
|---|-----------|--------------|-----------------|
| DIRECT INTERELECTRODE CAPACITANCES (Approx.) | Unit No.1 | Unit No.2 | umpere |
| Grid to Plate | 4.6 | 9 | pf |
| Grid to Cathode and Heater | 2.4 | 6.5 | pf |
| Plate to Cathode and Heater | 0.26 | 1.4 | pf |
| CLASS AL AMPLIFIER | | | |
| Characteristics: | Unit No.1 | Unit No.2 | |
| Plate Voltage | 250 | 150 | volts |
| Grid Voltage | -3 | -20 | volts |
| Amplification Factor | 64 | 5.4 | |
| Plate Resistance (Approx.) | 40000 | 750 | ohms |
| Transconductance | 1600 | 7200 | μmhos |
| Grid Voltage (Approx.): | | | |
| For plate current of 10 µa | -5.5 | - | volts |
| For plate current of 100 μa | - | -45 | volts |
| Plate Current | 1.4 | 50 | ma |
| For plate voltage of 60 volts and zero grid voltage | | 95 | ma |
| For grid voltage of -28 volts | - | 10 | ma |
| | | | |

VERTICAL-DEFLECTION OSCILLATOR AND AMPLIFIER

For operation in a 525-line, 30-frame system


| Maximum Ratings, (Design-Maximum Values): | Unit No.1 Oscillator | Unit No.2 Amplifier | |
|---|-------------------------|------------------------|-------------|
| DC PLATE VOLTAGE PEAK POSITIVE-PULSE PLATE VOLTAGE (Absolute Maximum)# | 330 max | 330 max 1500•max | volts |
| PEAK NEGATIVE-PULSE GRID VOLTAGE PEAK CATHODE CURRENT. | -400 max 77 max | -250 max 175 max | volts ma |
| Average Cathode Current. | 22 max | 50 max | ma |

| PLATE DISSIPATION | 1.5 max | 11 max | watts |
|--|---------|-----------|---------|
| PEAK HEATER-CATHODE VOLTAGE: | | | |
| Heater negative with respect to cathode | 200 max | 200 max | volts |
| Heater positive with respect to cathode | 200 max | 200 max | volts |
| Maximum Circuit Values: | | | |
| Grid-Circuit Resistance: | | | |
| For grid-resistor-bias or cathode-bias operation | 2.2 max | 2.2 max n | negohms |

Under no circumstances should this absolute value be exceeded.

• The duration of the voltage pulse must not exceed 15 per cent of one vertical scanning cycle. In a 525-line, 30-frame system, 15 per cent of one vertical scanning cycle is 2.5 milliseconds.

The dc component must not exceed 100 volts.




MEDIUM-MU TRIODE-SHARP-CUTOFF PENTODE

Miniature types used in multivibrator-type horizontal-deflection circuits in television receivers. Also used for agc-amplifier or sync-separator applications in such receivers. Outline 8B,

6GH8 6GH8A **Related type:** 5GH8

OUTLINES SECTION. Tubes require miniature nine-contact socket and may be mounted in any position. Type 6GH8-A is specially controlled to assure low interelectrode leakage.

| HEATER VOLTAGE (AC/DC) | | 6.3 0.45 | volts ampere |
|--|----------|-------------|-----------------|
| HEATER WARM-UP TIME (Average.) | | 11 | seconds |
| DIRECT INTERELECTRODE CAPACITANCES: | | | |
| Triode Unit: | 6GH 8 | 6GH8A | |
| Grid to Plate | 1.6 | 1.7 | pf |
| Grid to Cathode, Heater, Pentode Grid No.3, Pentode | | | |
| Cathode, and Internal Shield | 3.4 | 3 | pf |
| Plate to Cathode, Heater, Pentode Grid No.3, Pentode | | | |
| Cathode, and Internal Shield | 1.7 | 1.4 | \mathbf{pf} |
| Heater to Cathode | 3 | 3 | \mathbf{pf} |
| Pentode Unit: | | | |
| Grid No.1 to Plate | 0.02 max | 0.02 max | pf |
| Grid No.1 to Cathode, Heater, Grid No.2, Grid No.3, | | | |
| and Internal Shield | 5.5 | 5 | \mathbf{pf} |
| Plate to Cathode, Heater, Grid No.2, Grid No.3, and | | | |
| Internal Shield | 2.6 | 2.6 | pf |
| Heater to Cathode, Grid No.3, and Internal Shield | 3 | 3 | pf |

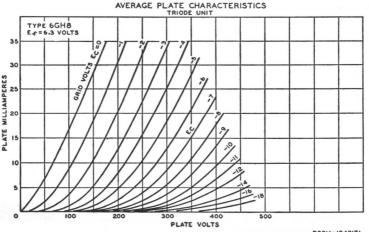

926M-10421TI

CLASS A1 AMPLIFIER

| Characteristics: | Triode Unit | Pentode Unit | |
|--|-------------|--------------|------------|
| Plate Voltage | 125 | 125 | volts |
| Grid-No.2 Voltage | - | 125 | volts |
| Grid-No.1 Voltage | -1 | -1 | volts |
| Amplification Factor | 46 | - | |
| Plate Resistance (Approx.) | 5400 | 200000 | ohms |
| Transconductance | 8500 | 7500 | μ mhos |
| Plate Current | 13.5 | 12 | ma |
| Grid-No.2 Current. | - | 4 | ma |
| Grid-No.1 Voltage (Approx.) for plate current of 10 µa | -8 | -8 | volts |


HORIZONTAL-DEFLECTION OSCILLATOR

For operation in a 525-line, 30-frame system

| Maximum Ratings, (Design-Maximum Values): | Triode Unit | Pentode Unit | |
|---|-------------|--------------|-------|
| PLATE VOLTAGE | 330 max | 350 max | volts |
| GRID-NO.2 (SCREEN-GRID) VOLTAGE | - | 330 max | volts |
| GRID-NO.1 (CONTROL-GRID) VOLTAGE: | | | |
| Positive-bias value | 0 max | 0 max | volts |
| Peak negative value | - | -175 max | volts |
| PEAK CATHODE CURRENT | - | 300 max | ma |
| Average Cathode Current | - | 20 max | ma |
| GRID-NO.2 INPUT. | - | 0.55 max | watt |
| PLATE DISSIPATION | 2.5 max | 2.5 max | watts |
| PEAK HEATER-CATHODE VOLTAGE: | | | |
| Heater negative with respect to cathode | 200 max | 200 max | volts |
| Heater positive with respect to cathode | 200 max | 200 max | volts |
| The dc component must not exceed 100 volts. | | | |
| Maximum Circuit Values: | | | |
| Grid-No.1-Circuit Resistance: | | | |

| Grid-No.1-Circuit Kesistance: | | |
|-------------------------------|---------|-----------------|
| For fixed-bias operation | 2.2 max | 2.2 max megohms |
| For cathode-bias operation | 2.2 max | 2.2 max megohms |

AVERAGE CHARACTERISTICS

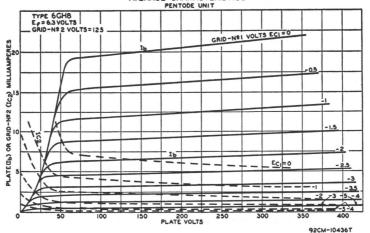

BEAM POWER TUBE

Novar type used in high-efficiency horizontal-deflection-amplifier circuits of television receivers. Outline 18A, OUTLINES SECTION. Tube requires novar nine-contact socket and may be



operated in any position. For curve of average characteristics see type 6GW6.

6GJ5

Related types:

12GJ5, 17GJ5

| Technical Data | | |
|--|--|---|
| HEATER VOLTAGE (AC/DC) HEATER CURRENT. DIRECT INTERELECTRODE CAPACITANCES (Approx.): Grid No.1 to Plate. Grid No.1 to Cathode, Heater, Grid No.2, and Grid No.3. Plate to Cathode, Heater, Grid No.2, and Grid No.3. | 6.3 1.2 0.26 15 6.5 | volts amperes pf pf pf |
| CLASS A, AMPLIFIER | | |
| Characteristics: Triode Connection Pentode (| Connection | |
| Plate Voltage 150 60 Grid-No.2 Voltage 150 150 Grid-No.1 Voltage -22.5 0 Mu-Factor, grid No.2 to grid No.1 4.4 - Plate Resistance (Approx.) - - Transconductance - - Plate Current. - 390 Grid-No.2 Current. - 32 Grid-No.1 Voltage for plate current of 1 ma - - | $250 \\ 150 \\ -22.5 \\ 15000 \\ 7100 \\ 70 \\ 2.1 \\ -42$ | volts volts volts umhos ma ma volts |
| HORIZONAL-DEFLECTION AMPLIFIER For operation in a 525-line, 30-frame system Maximum Ratings, (Design-Maximum Values): | | |
| DC PLATE SUPPLY VOLTAGE. PEAK POSITIVE-PULSE PLATE VOLTAGE* PEAK NEGATIVE-PULSE PLATE VOLTAGE. DC GRID-NO.2 VOLTAGE. DC GRID-NO.1 VOLTAGE. DE GRID-NO.1 VOLTAGE. PEAK CATHODE CURRENT. AVERAGE CATHODE CURRENT. PLATE DISSIPATION* GRID-NO.2 INPUT. PEAK HEATER-CATHODE VOLTAGE: Heater negative with respect to cathode. Heater positive with respect to cathode. Heater positive with respect to cathode. BULB TEMPERATURE (At hottest point). | 770 max 6500 max -1500 max -55 max 550 max 175 max 17.5 max 3.5 max 200 max 240 max | volts volts volts volts volts ma ma watts watts volts volts volts volts |
| Maximum Circuit Values: Grid-No.1-Circuit Resistance: | | |

For grid-resistor-bias operation ...

1 max megohm ^a This value can be measured by a method involving a recurrent waveform such that the maximum ratings of the tube will not be exceeded.

* The duration of the voltage pulse must not exceed 15 per cent of one horizontal scanning cycle. In a 525-line, 30-frame system, 15 per cent of one horizontal scanning cycle is 10 microseconds.

• An adequate bias resistor or other means is required to protect the tube in the absence of excitation.


The dc component must not exceed 100 volts.

MEDIUM-MU TRIODE-SHARP-CUTOFF PENTODE

Miniature type used as oscillator in horizontal deflection circuits of television receivers. (P,G3P Outline 8B, OUTLINES SECTION. Tube requires miniature nine-contact socket and may be operated in any position. Heater volts (ac/dc) in series: 6.3; amperes, 0.3. Heater volts in parallel: 3.15; amperes, 0.6. Heater warm-up time (average), 11 seconds. Characteristics as class A1 Amplifier, triode unit: plate volts, 125;

6GJ8

grid volts, -1; amplification factor, 40; plate resistance (approx.), 5000 ohms; transconductance, 8500 umhos; plate ma., 13.5; pentode unit: plate, grid-No.2 volts, 125; grid-No.1 volts, -1; plate resistance (approx.), 150,000 ohms; transconductance, 7500 µmhos; plate ma., 12; grid-No.2 ma., 4.5. Maximum ratings as horizontal-deflection oscillator (design-maximum values), triode unit: plate volts, 330 max; grid volts, positive-bias value, 0 max; plate dissipation, 2.5 max watts; pentode unit: plate, grid-No.2 volts, 330 max; grid No.1, positive-bias value, 0 max; grid No.1, positive-bias value, 0 max volts; plate dissipation, 2.5 max watts. This is a DISCONTINUED TYPE listed for reference purposes only.



HIGH-MU TRIODE

Miniature type with frame grid used as a grounded-cathode rf-amplifier tube in vhf tuners of television receivers. Outline 7B, OUTLINES SEC-TION. Tube requires miniature sevencontact socket and may be operated in any position.



| Heater Voltage (ac/dc) Heater Current. Direct Interelectrode Capacitances (Approx.):° | 6.3 0.18 | volts ampere |
|--|-------------------------|----------------------|
| Grid to Plate. Grid to Cathode, Heater, and Internal Shield Plate to Cathode, Heater, and Internal Shield. Heater to Cathode. | 0.52 5 3.5 2.5 | pf pf pf pf |
| | 2.0 | pr |
| CLASS A: AMPLIFIER | | |
| Maximum Ratings, (Design-Maximum Values): | | |
| PLATE VOLTAGE | 200 max | volts |
| Negative-bias value | -50 max | volts |
| Positive-bias value | 0 max | volts |
| AVERAGE CATHODE CURRENT. | 22 max | ma |
| PLATE DISSIPATION. | 2.5 max | watts |
| PEAK HEATER-CATHODE VOLTAGE: | 100 | 14 |
| Heater negative with respect to cathode | 100 max | volts |
| Heater positive with respect to cathode | 100 max | volts |
| Characteristics: | | |
| Plate Voltage | 135 | volts |
| Grid Voltage | -1 | volt |
| Amplification Factor | 78 | |
| Plate Resistance (Approx.) | 5400 | ohms |
| Transconductance | 15000 | μ mhos |
| Plate Current | 11.5 | ma |
| Grid Voltage (Approx.) for transconductance of 150 µmhos | -4.2 | volts |
| Grid Voltage (Approx.) for transconductance of 1500 µmhos | -2.5 | volts |
| Input Resistance | 275 | ohms |
| Input Capacitance [•] | 11.2 | μµf |
| Noise Figure ^D | 4.7 | db |
| Maximum Circuit Values: | | |
| Grid-Circuit Resistance: | | |
| For cathode-bias operation | 1 max | megohm |
| | | |


° With external shield connected to cathode, except as noted.

• With external shield and internal shield connected to ground.

• Measured at 200 Mc with heater volts = 6.3 and plate effectively grounded for rf voltages.

 $^{\rm o}$ For a neutralized triode amplifier at a frequency of 200 Mc with signal source impedance adjusted for minimum noise output.

AVERAGE PLATE CHARACTERISTICS

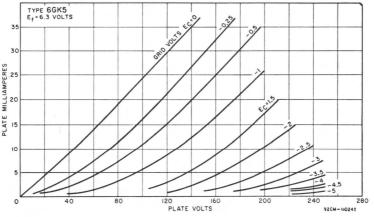

POWER PENTODE

6GK6

Miniature type used in the output stage of audio amplifying equipment and also in the video output stage of television receivers. Outline 8E, OUT-LINES SECTION. Tube requires



miniature nine-contact socket and may be operated in any position.


— Technical Data =

| HEATER VOLTAGE (AC/DC). 6.3 HEATER CURRENT. 0.76 DIRECT INTERELECTRODE CAPACITANCES: 0.14 max Grid No.1 to Plate. 0.14 max Grid No.1 to Cathode, Heater, Grid No.2, Grid No.3, and Internal Shield 10 Plate to Cathode, Heater, Grid No.2, Grid No.3, and Internal Shield 7 | volts ampere pf pf |
|---|-----------------------------|
| CLASS A1 AMPLIFIER | |
| Maximum Ratings: (Design-Maximum Values): | |
| PLATE SUPPLY VOLTAGE. 600 max | volts |
| PLATE VOLTAGE | volts |
| GRID-NO.2 SUPPLY VOLTAGE. 605 max | volts |
| GRID-NO.2 (SCREEN-GRID) VOLTAGE. 330 max | volts |
| GRID-NO.1 (CONTROL-GRID) VOLTACE, Negative-bias value | volts |
| CATHODE CURRENT | ma |
| PLATE DISSIPATION. 13.2 max | watts |
| GRID-NO.2 INPUT, Peak. 4 max | watts |
| GRID-NO.2 INPUT, Average. 2 max | watts |
| PEAK HEATER-CATHODE VOLTAGE: | |
| Heater negative with respect to cathode | volts |
| Heater positive with respect to cathode | volts |
| Characteristics and Typical Operation: | |
| | volts |
| Trate Dupply Voltage | volts |
| Gild-ito.2 Supply Voltage | ohms |
| Cathode-Dias Resistor | onms |
| Mu-ractor, Grid No.2 to Grid No.1 | ohms |
| Trate Resistance (Approx.) | μmhos |
| Transconductance | volts |
| reak Ar Gilu-No.1 Voltage | ma |
| Lero-Signal Flate Current. | ma |
| Maximum-Signal Flate Ourrent | ma |
| Zero-Signal Grid-No.2 Current. 5.5 Maximum-Signal Grid-No.2 Current. 10 | ma |
| Effective Load Resistance | ohms |
| Total Harmonic Distortion. | per cent |
| Maximum-Signal Power Output | watts |

PUSH-PULL CLASS AB1 and B AMPLIFIER

Maximum Ratings: (Same as for class A1 amplifier)

| Typical Operation, (Values are for two tubes): | Class | AB_1 | Cla | ss B | |
|---|--------------|--------------|--------------|-------------------|-------------------|
| Plate Voltage Grid-No.2 Voltage | 250 250 | $300 \\ 300$ | $250 \\ 250$ | $\frac{300}{300}$ | volts |
| Grid-No.1 Voltage. Cathode-Bias Resistor. | 130 | 130 | -11.6 | -14.7 | volts |
| Peak AF Grid-No.1-to-Grid-No.1 Voltage Zero-Signal Plate Current. | $22.4 \\ 62$ | 28 72 | $22.4 \\ 20$ | 28 15 | volts ma |
| Maximum-Signal Plate Current | 75 | 92 8 | 75 | 92 1.6 | ma |
| Zero-Signal Grid-No.2 Current. Maximum-Signal Grid-No.2 Current. Effective Load Resistance (plate to plate) | 15 8000 | 22 8000 | 15 8000 | 22 8000 | ma |
| Total Harmonic Distortion. | 3 11 | 4 17 | 3 11 | 417 | per cent watts |

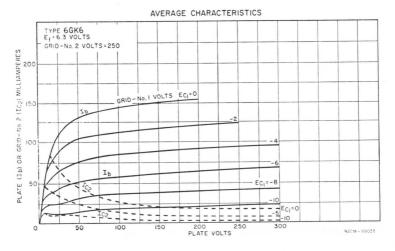

Maximum Circuit Values:


Grid-No.1-Circuit Resistance: For fixed-bias operation...

0.3 max megohm 1 max megohm

DUAL TRIODE



Glass type containing high-mu triode and high-perveance, low-mu triode in same envelope. Used as combined vertical-deflection-oscillator and vertical-deflection-amplifier tube in



television receivers. Outline 14B, OUTLINES SECTION. Tube requires octal socket and may be mounted in any position. Heater volts (ac/dc), 6.3; amperes, 1.05.

| CLASS A1 AMPLIFIER | | | |
|----------------------------------|--------------|-----------|------------|
| Characteristics: | Unit No.1 | Unit No.2 | |
| Plate Voltage | 250 | 175 | volts |
| Grid Voltage | $^{-3}$ | -25 | volts |
| Amplification Factor | 66 | 5 | |
| Plate Resistance (Approx.) | 30000 | 780 | ohms |
| Transconductance | 22 00 | 6400 | μ mhos |
| Grid Voltage (Approx.): | | | |
| For plate current of 20 µa | | - | volts |
| For plate current of 200 μ a | - | -60 | volts |
| Plate Current | 2 | 46 | ma |

VERTICAL-DEFLECTION OSCILLATOR AND AMPLIFIER For operation in a 525-line, 30-frame system

Unit No.1 Unit No.2 Oscillator Amplifier Maximum Ratings, (Design-Maximum Values): DC PLATE VOLTAGE.... PEAK POSITIVE-PULSE PLATE VOLTAGE.... PEAK NEGATIVE-PULSE GRID VOLTAGE.... PEAK CATHODE CURRENT.... 550 max 1500⁻⁻max 350 max volts volts 400 max 250 max volts 175 max - max ma mar 50 max AVERAGE CATHODE CURRENT. ma PLATE DISSIPATION. 1 max 10 maxwatts PEAK HEATER-CATHODE VOLTAGE: Heater negative with respect to cathode..... 200 max 200 max volts Heater positive with respect to cathode..... 200 max 200°max volts

Maximum Circuit Values:


| Grid-Circuit Resistance: | | |
|----------------------------|---------|-----------------|
| For fixed-bias operation | 1 max | 1 max megohm |
| For cathode-bias operation | 2.2 max | 2.2 max megohms |
| | | 0 |

[□] The duration of the voltage pulse must not exceed 15 per cent of one vertical scanning cycle. In a 525-line, 30-frame system, 15 per cent of one vertical scanning cycle is 2.5 milliseconds.

An adequate bias resistor or other means is required to protect the tube in the absence of excitation. The dc component must not exceed 100 volts.

SEMIREMOTE-CUTOFF PENTODE

Related type: 5GM6 Miniature type used in gain-controlled picture-if stages of television receivers operating at intermediate frequencies in the order of 40 megacycles. Tube features high transconductance




and relatively low capacitances. Outline 7B, OUTLINES SECTION. Tube requires seven-contact socket and may be mounted in any position.

| HEATER VOLTAGE (AC/DC) HEATER CURRENT | | $6.3 \\ 0.4$ | volts |
|--|-------------------------------|---|---------------|
| DIRECT INTERELECTRODE CAPACITANCES: | Without External Shield | With External Shield [°] | |
| Grid No.1 to Plate. Grid No.1 to Cathode, Heater, Grid No.2, Grid No.3. | 0.036 max | 0.026 max | \mathbf{pf} |
| and Internal Shield. | 10 | 10 | \mathbf{pf} |
| Plate to Cathode, Heater, Grid No.2, Grid No.3, and Internal Shield | 2.4 | 3.4 | pf |


CLASS A1 AMPLIFIER

| Maximum Ratings, (Design-Maximum Values): | | |
|--|----------|-----------|
| PLATE VOLTAGE. | 330 max | volts |
| GRID-NO.3 (SUPPRESSOR-GRID) VOLTAGE, Positive value | 0 max | volts |
| GRID-NO.2 (SCREEN-GRID) SUPPLY VOLTAGE | 330 max | volts |
| GRID-NO.2 VOLTAGE. | | e page 70 |
| GRID-NO.1 (CONTROL-GRID) VOLTAGE, Positive-bias value | 0 max | volts |
| PLATE DISSIPATION | 3.1 max | watts |
| GRID-NO.2 INPUT: | | |
| For grid-No.2 voltages up to 165 volts | 0.65 max | watt |
| For grid-No.2 voltages between 165 and 330 volts | See curv | e page 70 |
| PEAK HEATER-CATHODE VOLTAGE: | | |
| Heater negative with respect to cathode | 200 max | volts |
| Heater positive with respect to cathode | 200 max | volts |
| | | |
| Characteristics: | | |
| Plate Supply Voltage | 125 | volts |
| Grid No.3. Connect | | |
| | 125 | volts |
| Grid-No.2 Supply Voltage | 56 | ohms |
| Cathode-Bias Resistor. | 0.2 | megohm |
| Plate Resistance (Approx.) | 13000 | |
| Transconductance. | -15 | μmhos |
| Grid-No.1 Voltage (Approx.) for transconductance of 60 µmhos | | volts |
| Plate Current | 14 | ma |
| Grid-No.2 Current. | 3.4 | ma |
| ° With external shield connected to cathode. | | |
| The decomponent must not exceed 100 rolts | | |

The dc component must not exceed 100 volts.

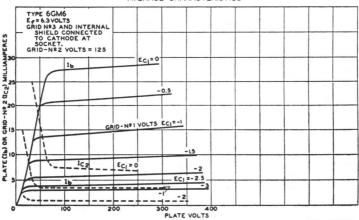

92CM-10390T1



HIGH-MU TRIODE— SHARP-CUTOFF PENTODE

Miniature type used in color and black-and-white television receivers. Triode unit is used as sync-separator, sync-clipper, phase inverter, or soundif amplifier. Pentode unit is used in



output stage of video amplifier. Outline 8D, OUTLINES SECTION. Tube requires miniature nine-contact socket and may be operated in any position. For direct interelectrode capacitances, refer to type 6EB8; curve for average plate characteristics of triode unit is same as for type 6EB8. Heater volts (ac/dc), 6.3; amperes, 0.75.


| CLASS A: AMPLIFIER | | | |
|--|----------------------------------|---|---------------------------|
| Maximum Ratings, (Design-Maximum Values): PLATE VOLTAGE. GRID-NO.2 (SCREEN-GRID) SUPPLY VOLTAGE. GRID-NO.2 VOLTAGE. | Triode Unit 330 max _ _ | Pentode Unit 330 max 330 max See curve | volts volts page 70 |

AVERAGE CHARACTERISTICS

= RCA Receiving Tube Manual =

| GRID-NO.1 (CONTROL-GRID) VOLTAGE, Positive-bias value PLATE DISSIPATION | | 0 max 1 max | 0 max 5 max | volt watts |
|---|--------|--------------------|---------------------|---------------------|
| For grid-No.2 voltages up to 165 volts For grid-No.2 voltages between 165 and 330 volts. PEAK HEATER-CATHODE VOLTAGE: | | _ | 1.1 max See curv | watts ve page 70 |
| Heater negative with respect to cathode | | 200 max 200°max | 200 max 200°max | volts |
| | Triode | Per | ntode | |
| Characteristics: | Unit | U_1 | nit | |
| Plate Supply Voltage | 250 | 60 | 200 | volts |
| Grid-No.2 Supply Voltage | - | 150 | 150 | volts |
| Grid-No.1 Voltage | -2 | 0 | - | volts |
| Cathode-Bias Resistor | - | - | 100 | ohms |
| Amplification Factor | 100 | - | - | |
| Plate Resistance (Approx.) | 37000 | - | 60000 | ohms |
| Transconductance | 2700 | - | 11500 | µmhos |
| Grid Voltage (Approx.) for plate current of 20µa | -5 | - | - | volts |
| Grid-No.1 Voltage (Approx.) for plate current of 100 µa | | | -10 | volts |
| Plate Current. | 2 | 55 | 25 | ma |
| Grid-No.2 Current | - | 18 | 5.5 | ma |
| Maximum Circuit Values: | | Triode | Pentode | |
| Grid-No.1-Circuit Resistance: | | Unit | Unit | |
| For fixed-bias operation | | 0.5 max 1 max | 0.25 max 1 max | megohm megohm |
| ° The dc component must not exceed 100 volts. | | | | |

This value can be measured by a method involving a recurrent waveform such that the maximum ratings of the tube will not be exceeded.

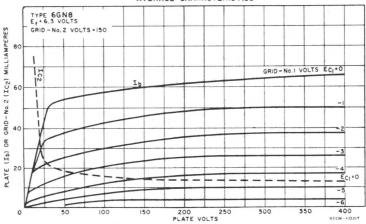

AVERAGE CHARACTERISTICS

BEAM POWER TUBE

6GT5 Releved types: 12GT5, 17GT5 Novar type used as a horizontaldeflection amplifier in television receivers. Outline 17A, OUTLINES SECTION. Tube requires novar ninecontact socket and may be mounted in any position. For curve of average characteristics, refer to type 6GW6.



| Heater Voltage (ac/dc) | 6.3 1.2 | volts amperes |
|---|-------------------|------------------|
| DIRECT INTERELECTRODE CAPACITANCES (Approx.): Grid No.1 to Plate Grid No.1 to Cathode, Heater, Grid No.2, and Grid No.3 Plate to Cathode, Heater, Grid No.2, and Grid No.3 | 0.26 15 6.5 | pf pf pf |

= Technical Data =

CLASS A1 AMPLIFIER

| Characteristics: | Triode Connection | | entode nection | |
|--|----------------------|------|-------------------|------------|
| Plate Voltage | 150 | 60 | 250 | volts |
| Grid-No.2 (Screen-Grid) Voltage | 150 | 150 | 150 | volts |
| Grid-No.1 (Control-Grid) Voltage | -22.5 | 0 | -22.5 | volts |
| Mu Factor, grid No.2 to grid No.1 | | _ | | |
| Plate Resistance (Approx.) | - | | 15000 | ohms |
| Transconductance | - | | 7100 | μ mhos |
| Plate Current. | | 390* | 70 | ma |
| Grid-No.2 Current. | | 32* | 2.1 | ma |
| Grid-No.1 Voltage (Approx.) for plate ma=1 | | - | -42 | volts |

HORIZONTAL-DEFLECTION AMPLIFIER

For operation in a 525-line, 30-frame system

Maximum Ratings, (Design-Maximum Values):


| DC PLATE SUPPLY VOLTAGE | 770 max | volts |
|---|---------------------|-------|
| PEAK POSITIVE-PULSE PLATE VOLTAGE | 6500 max | volts |
| PEAK NEGATIVE-PULSE PLATE VOLTAGE | -1500 max | volts |
| DC GRID-NO.2 VOLTAGE | 220 max | volts |
| DC GRID-NO.1 VOLTAGE | -55 max | volts |
| PEAK NEGATIVE-PULSE GRID-NO.1 VOLTAGE | -330 max | volts |
| PEAK CATHODE CURRENT. | 550 max | ma |
| AVERAGE CATHODE CURRENT | 175 max | ma |
| GRID-NO.2 INPUT | 3.5 max | watts |
| PLATE DISSIPATION [®] | 17.5 max | watts |
| PEAK HEATER-CATHODE VOLTAGE: | | |
| Heater negative with respect to cathode | 200 max | volts |
| Heater positive with respect to cathode | $200 \ \square max$ | volts |
| BULB TEMPERATURE (At hottest point) | 240 max | °C |
| | | |

Maximum Circuit Values:

Grid-No.1-Circuit Resistance:

The duration of the voltage pulse must not exceed 15 per cent of one horizontal scanning cycle. In a 525-line, 30-frame system, 15 per cent of one horizontal scanning cycle is 10 microseconds.

•An adequate bias resistor or other means is required to protect the tube in the absence of excitation. • The dc component must not exceed 100 volts.



MEDIUM-MU TWIN TRIODE

Miniature type used in the matrixing circuits of color television receivers employing series-connected heater strings. Also used in phase-inverter, multivibrator, and general-purpose am-



plifier applications. Outline 8D, OUTLINES SECTION. Tube requires miniature nine-contact socket and may be mounted in any position.

| HEATER VOLTAGE (AC /DC) HEATER CURRENT. HEATER WARM-UP TIME (Average) DIRECT INTERELECTRODE CAPACITANCES (Approx.): Grid to Plate. Grid to Cathode and Heater. | Unit No.1 Unit | 0.6 | volts ampere seconds pf |
|---|----------------|-----|----------------------------------|
| Plate to Cathode and Heater. Plate of Unit No.1 to Plate of Unit No.2. | 0.44 | | pf pf |
| CLASS A1 AMPLIFIER (Each | u Unit) | | |


Maximum Ratings, (Design-Maximum Values):

| PLATE VOLTAGE. GRID VOLTAGE, Positive-bias value. PLATE DISSIPATION. | 330 max 0 max 3 max | volts volts watts |
|--|---|-------------------------|
| PEAK HEATER-CATHODE VOLTAGE: Heater negative with respect to cathode Heater positive with respect to cathode | 200 max 200 max | volts volts |
| Characteristics: | | |
| Plate Voltage Grid Voltage | $\begin{array}{c} 250 \\ -10.5 \end{array}$ | volts volts |

= RCA Receiving Tube Manual =

| Amplification Factor | 17 | |
|---|-------|--------|
| Plate Resistance (Approx.) | 5500 | ohms |
| Transconductance | 3100 | μmhos |
| Grid Voltage (Approx.) for plate current of 50 µa | -23 | volts |
| Plate Current | 11.5 | ma |
| Plate Current for grid voltage of -14 volts | 4 | ma |
| Maximum Circuit Values: Grid-Circuit Resistance: | | |
| For fixed-bias operation | 1 max | megohm |


The dc component must not exceed 100 volts.

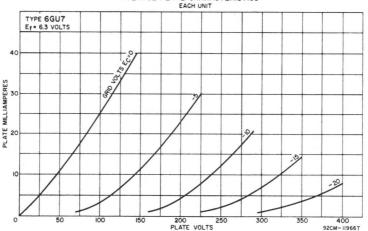

AVERAGE PLATE CHARACTERISTICS

BEAM POWER TUBE

Duodecar type used as horizontaldeflection amplifier in television receivers. Outline 16C, OUTLINES SECTION. Tube requires duodecar twelve-contact socket and may be



mounted in any position. Heater volts (ac/dc), 6.3; amperes, 1.2.

| Characteristics: | | | | |
|---|------|-----|--------|-------|
| Plate Voltage | 5000 | 60 | 250 | volts |
| Grid-No.2 (Screen-Grid) Voltage | 150 | 150 | 150 | volts |
| Grid-No.1 (Control-Grid) Voltage | | 0 | -22.5 | volts |
| Plate Resistance (Approx.) | - | - | 18000 | ohms |
| Transconductance | - | - | . 7300 | μmhos |
| Triode Amplification Factor | - | | 4.4* | |
| Plate Current | - | 345 | 65 | ma |
| Grid-No.2 Current. | - | 27 | 1.8 | ma |
| Grid-No.1 Voltage (Approx.) for plate current of 1 ma | -100 | - | -42 | volts |
| | | | | |

CLASS A, AMPLIFIER

HORIZONTAL-DEFLECTION AMPLIFIER

For operation in a 525-line, 30-frame system

| Maximum Ratings, (Design-Maximum Values): | | | |
|---|-------|-----|-------|
| DC PLATE SUPPLY VOLTAGE | 770 | max | volts |
| PEAK POSITIVE-PULSE PLATE VOLTAGE# | 6500 | max | volts |
| PEAK NEGATIVE-PULSE PLATE VOLTAGE | -1500 | max | volts |
| DC GRID-NO.2 VOLTAGE | 220 | max | volts |

4

6GV5

Related type:

17GV5

= Technical Data =


| PEAK NEGATIVE-PULSE GRID-NO.1 VOLTAGE | -330 max | volts |
|---|----------|-------|
| DC GRID-NO.1 VOLTAGE. | -55 max | volts |
| PEAK CATHODE CURRENT. | 550 max | ma |
| AVERAGE CATHODE CURRENT. | 175 max | ma |
| PLATE DISSIPATION [†] | 17.5 max | watts |
| GRID-NO.2 INPUT. | 3.5 max | watts |
| PEAK HEATER-CATHODE VOLTAGE: | | |
| Heater negative with respect to cathode | 200 max | volts |
| Heater positive with respect to cathode | 200• max | volts |
| BULB TEMPERATURE (At hottest point) | 200 max | °C |
| | | |

Maximum Circuit Values:

"This value can be measured by a method involving a recurrent waveform such that the maximum ratings of the tube will not be exceeded.

#The duration of the voltage pulse must not exceed 15 per cent of one horizontal scanning cycle. In a 525-line, 30-frame system, 15 per cent of one horizontal scanning cycle is 10 microseconds.

†An adequate bias resistor or other means is required to protect the tube in the absence of excitation. •The dc component must not exceed 100 volts.



HIGH-MU TRIODE POWER PENTODE

Miniature type used for sync-amplifier and video-output applications in television receivers. Outline 8E, OUTLINESSECTION. Tuberequires miniature nine-contact socket and may

6GV8

be mounted in any position. Heater volts (ac/dc), 6.3; amperes, 0.9.

CLASS A1 AMPLIFIER

| | Triode | Pentode | |
|--|---------------|-------------------|---|
| Maximum Ratings, (Absolute-Maximum Values): | Unit | Unit | |
| PLATE SUPPLY VOLTAGE | 550 max | 550 max volts | 3 |
| PEAK PLATE VOLTAGE [°] | - | 2000 max volts | 3 |
| DC PLATE VOLTAGE | 250 max | 250 max volts | 3 |
| GRID-NO.2 (SCREEN-GRID) SUPPLY VOLTAGE | - | 550 max volts | 3 |
| GRID-NO.2 VOLTAGE. | | 250 max volts | 3 |
| PEAK CATHODE CURRENT [®] | 200 max | - ma | L |
| AVERAGE CATHODE CURRENT | 15 max | 75 max ma | L |
| GRID-NO.2 INPUT | - | 2 max watts | 3 |
| PLATE DISSIPATION | 0.5 max | 7 max watts | 3 |
| PEAK HEATER-CATHODE VOLTAGE: | | | |
| Heater negative with respect to cathode | 220 max | 220 max volts | _ |
| Heater positive with respect to cathode | 220 max | 220 max volts | 5 |
| Characteristics: | | | |
| Plate Voltage | 100 | 50 65 170 volts | 3 |
| Grid-No.2 Voltage | - | 170 210 170 volts | 5 |
| Grid-No.1 Voltage | -0.8 | -1 -1 -15 volts | 5 |
| Amplification Factor | 50 | | |
| Mu-Factor, Grid No.1 to Grid No.2 | - 2.4 | - 7 | |
| Plate Resistance (Approx.) | 7600 | 25000 ohms | |
| Transconductance | 6500 | 7500 μmhos | 5 |
| Plate Current | 5 | 200•240• 41 ma | 1 |
| Grid-No.2 Current | - | 40• 50•2.7 ma | 1 |
| Maximum Circuit Values: | | | |
| Grid-No.1-Circuit Resistance: | | | |
| For fixed-bias operation | 1 max | 1 max megohm | 1 |
| For cathode-bias operation | 3.3 max | 2.2 max megohms | |
| ° Maximum pulse duration 5 per cent of a cycle with a maximum of | 1 millisecond | 1. | |

Maximum pulse duration 200 microseconds. If a larger flyback is required, this value may be reduced to 100 ma with a maximum pulse duration of 400 microseconds.

• This value can be measured by a method involving a recurrent waveform such that the maximum tube ratings will not be exceeded.

RCA Receiving Tube Manual =


BEAM POWER TUBE

6GW6 Related types:

12GW6, 17GW6

Characteristics:

Glass octal type used as horizontaldeflection amplifier in high-efficiency deflection circuits of television receivers. Outline 21, OUTLINES SEC-TION. Tube requires octal socket and may be operated in any position.



| HEATER VOLTAGE (AC/DC) | 6.3 12 | volts |
|--|-----------|---------|
| DIRECT INTERELECTRODE CAPACITANCES (ADDrox.): | 1.4 | amperes |
| Grid No.1 to Plate | 0.5 | pf |
| Grid No.1 to Cathode, Heater, Grid No.2, and Grid No.3 | 17 | pf |
| Plate to Cathode, Heater, Grid No.2, and Grid No.3 | 7 | pf |

CLASS AI AMPLIFIER

| Plate Voltage | 60 | 250 | volts |
|---|------|-------|------------|
| Grid-No.2 Voltage | 150 | 150 | volts |
| Grid-No.1 Voltage | 0 | -22.5 | volts |
| Plate Resistance (Approx.) | | 15000 | ohms |
| Transconductance | - | 7100 | μ mhos |
| Plate Current | 390* | 70 | ma |
| Grid-No.2 Current | 32* | 2.1 | ma |
| Grid-No.1 Voltage (Approx.) for plate current of 1 ma | - | -42 | volts |

HORIZONTAL-DEFLECTION AMPLIFIER

For operation in a 525-line, 30-frame system

Maximum Ratings, (Design-Maximum Values):


| DC PLATE SUPPLY VOLTAGE. | 770 max | volts |
|---|-------------------|-------|
| PEAK POSITIVE-PULSE PLATE VOLTAGE | 6500 max | volts |
| PEAK NEGATIVE-PULSE PLATE VOLTAGE | -1500 max | volts |
| DC GRID-NO.2 (SCREEN-GRID) VOLTAGE | 220 max | volts |
| DC GRID-NO.1 (CONTROL-GRID) VOLTAGE | -55 max | volts |
| PEAK NEGATIVE-PULSE GRID-NO.1 VOLTAGE | -330 max | volts |
| PEAK CATHODE CURRENT. | 550 max | ma |
| AVERAGE CATHODE CURRENT. | 175 max | ma |
| GRID-NO.2 INPUT | 3.5 max | watts |
| PLATE DISSIPATION [®] | 17.5 max | watts |
| PEAK HEATER-CATHODE VOLTAGE: | | |
| Heater negative with respect to cathode | 200 max | volts |
| Heater positive with respect to cathode | $200 \square max$ | volts |
| BULB TEMPERATURE (At hottest point) | 240 max | °C |
| | | |

Maximum Circuit Values:

Grid-No.1-Circuit Resistance:

For grid resistor-bias operation.....

1 max megohm

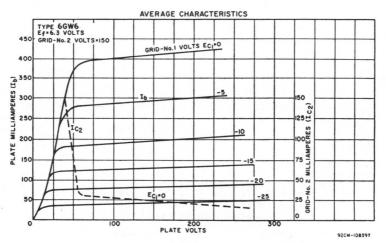

* This value can be measured by a method involving a recurrent waveform such that the maximum ratings of the tube will not be exceeded.

The duration of the voltage pulse must not exceed 15 per cent of one horizontal scanning cycle. In a 525-line, 30-frame system, 15 per cent of one horizontal scanning cycle is 10 microseconds.

• An adequate bias resistor or other means is required to protect the tube in the absence of excitation. [□] The dc component must not exceed 100 volts.

65 6)G2 H(3 (2 7 K

Maximum Ratings, (Design-Marimum Values).

SHARP-CUTOFF PENTODE

Miniature type used for FM sounddetector service in locked-oscillator, quadrature-grid FM detector circuits. as combined detector, limiter, and audio-voltage driver. Tube has two

independent control grids, and has controlled heater warm-up time for use in circuits employing series-connected heater strings. Outline 7B, OUTLINES SECTION. Tube requires miniature seven-contact socket and may be mounted in any position. HEATER VOLTAGE (AC/DC)..... 6.3 volts HEATER CURRENT. HEATER WARM-UP TIME (Average). DIRECT INTERELECTRODE CAPACITANCES (Approx.): 0.45 ampere 11 seconds Grid No.1 to Plate. 0.026 pf Grid No.1 to Cathode, Heater, Grid No.2, Grid No.3, and Internal Shield pf 8 Grid No.1 to Grid No.3.... 0 12 pf Grid No.3 to Plate. 1.6 pf Grid No.3 to Cathode, Heater, Grid No.1, Grid No.2, Plate, and Internal Shield ... 6.5 pf CLASS A1 AMPLIFIER Characteristics:

| characteristics. | | |
|---|------|--------|
| Plate Supply Voltage | 150 | volts |
| Grid-No.3 Supply Voltage. | 0 | volts |
| Grid-No.2 Supply Voltage. | 100 | volts |
| Grid-No.1 Supply Voltage. | 0 | volts |
| Cathode-Bias Resistor | 180 | ohms |
| Plate Resistance (Approx.). | 0.14 | megohm |
| Transconductance, grid No.1 to plate | 3700 | µmhos |
| Transconductance, grid No.3 to plate | 750 | μmhos |
| Plate Current | 3.7 | ma |
| Grid-No.2 Current. | 3 | ma |
| Grid-No.3 Supply Voltage (Approx.) for plate current of 20 µa | -7 | volts |
| Grid-No.1 Supply Voltage (Approx.) for plate current of 20 µa | -4.5 | volts |
| | | |

FM SOUND DETECTOR

| PLATE VOLTAGE. | 300 max | volts |
|---|--------------------|----------------|
| GRID-NO.3 (CONTROL-GRID) VOLTAGE: Negative value (dc and peak ac). Positive value (dc and peak ac). | -100 max 25 max | volts volts |

AVERAGE CHARACTERISTICS TYPE 6GX6 Ef=6.3 VOLTS GRID-No.3 VOLTS=0 GRID-No.2 VOLTS=100 MILLIAMPERES 20 (IC2) 1 It GRID-No.I VOLTS ECI=0 GRID-No.2 IC2 * 10 -0.5 20 OR .5 (1) -1 PLATE 5 ICa I -2 C 100 150 300 50 250 PLATE VOLTS 92CM-11002T

6GX6


Related type:

5GX6

RCA Receiving Tube Manual =

| GRID-NO.2 (SCREEN-GRID) SUPPLY VOLTAGE. GRID-NO.2 VOLTAGE. GRID-NO.1 (CONTROL-GRID) VOLTAGE: | 300 max See curv | volts e page 70 |
|--|---------------------|--------------------|
| Negative-bias value | -50 max | volts |
| Positive-bias value | 0 max | volts |
| PLATE DISSIPATION | 1.7 max | watts |
| GRID-NO.3 INPUT | 0.1 max | watt |
| GRID-NO.2 INPUT: | | |
| For grid-No.2 voltages up to 150 volts | 1.0 max | watt |
| For grid-No.2 voltages between 150 and 300 volts | See curv | e page 70 |
| PEAK HEATER-CATHODE VOLTAGE: | | |
| Heater negative with respect to cathode | 200 max | volts |
| Heater positive with respect to cathode | 200 max | volts |
| Martinez Circuit Malazz | | |
| Maximum Circuit Values: Grid-No.3-Circuit Resistance. Grid-No.1-Circuit Resistance: | 0.68 max | megohm |
| For fixed-bias operation | 0.22 max | megohm |
| For cathode-bias operation | 0.47 max | megohm |
| The dc component must not exceed 100 volts. | | |

AVERAGE CHARACTERISTICS

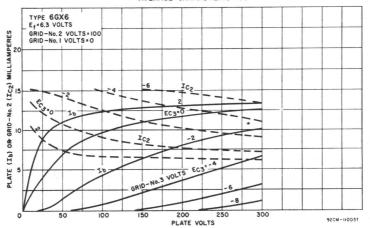

SHARP-CUTOFF PENTODE

Miniature type used in gated-agcamplifier circuits and as a noise-inverter tube in television receivers. Tube has two independent control grids, and has controlled heater warm-



up time for use in circuits employing series-connected heater strings. Outline 7B, OUTLINES SECTION. Tube requires miniature seven-contact socket and may be mounted in any position. For curves of average characteristics, refer to type 6GX6.


| HEATER CURRENT | E) | 6.3volts0.45ampere11seconds |
|---|---|---|
| Grid No.1 to Plate Grid No.1 to Cathode, Heater Grid No.1 to Grid No.3 Grid No.3 to Plate Grid No.3 to Cathode, Heate | Grid No.2, Grid No.3, and Internal Shield | 0.026 pf 8 pf 0.12 pf 1.6 pf |
| Grid No.2, and Internal Characteristics: | CLASS A, AMPLIFIER | 6.5 pf |
| Plate Supply Voltage. Grid-No.3 Supply Voltage. Grid-No.1 Supply Voltage. Grid-No.1 Supply Voltage. Cathode-Bias Resistor. Plate Resistance (Approx.). Transconductance, Grid No.1 to F | late | 150 volts 0 volts 100 volts 0 volts 180 ohms 0.14 megohm 3700 µmhos 750 µmhos |

6GY6

| Grid-No.2 Current. Grid-No.3 Supply Voltage (Approx.) for plate current of 20 μa Grid-No.1 Supply Voltage (Approx.) for plate current of 20 μa | $-\frac{3}{7}$ -4.5 | ma volts volts |
|--|------------------------|----------------------|
| GATED AGC AMPLIFIER AND NOISE INVERTER For operation in a 525-line, 30-frame system | | |
| Maximum Ratings, (Design-Maximum Values): | | |
| PLATE VOLTAGE PEAK POSITIVE-PULSE PLATE VOLTAGE [®] | 300 max 600 max | volts volts |
| GRID-NO.3 (CONTROL-GRID) VOLTAGE: Negative-bias value. Positive-bias value | -100 max 0 max | volts |
| GRID-NO.2 (SCREEN-GRID) SUPPLY VOLTAGE | 300 max See curv | volts e page 70 |
| Negative-bias value Positive-bias value | $-50 \max_{0 \max}$ | volts volts |
| PLATE DISSIPATION. GRID-NO.2 INPUT: For grid-No.2 voltages up to 150 volts. | 1.7 max 1 max | watts watt |
| For grid-No.2 voltages between 150 and 300 volts PEAK HEATER-CATHODE VOLTAGE: | See curv | e page 70 |
| Heater negative with respect to cathode Heater positive with respect to cathode | 200 max 200•max | volts |
| Maximum Circuit Values: | | |
| Grid-No.3-Circuit Resistance | 0.68 max | megohm |
| For fixed-bias operation For cathode-bias operation | 0.22 max 0.47 max | megohm megohm |
| | | |

Technical Data

The duration of the voltage pulse must not exceed 15 per cent of one horizontal scanning cycle. In a 525-line, 30-frame system, 15 per cent of one horizontal scanning cycle is 10 microseconds.
 The dc component must not exceed 100 volts.



HIGH-MU TRIPLE TRIODE

Miniature type used in rf-amplifier, mixer, and automatic-frequencycontrol service in FM radio receivers. Outline 8B, OUTLINES SECTION. Tube requires miniature nine-contact socket and may be operated in any

position. Heater volts (ac/dc), 6.3; amperes, 0.45.

| CLASS A | 1 A/ | MPLI | FIER |
|---------|------|------|------|
|---------|------|------|------|

Values are for each unit, except as noted

| Maximum Ratings, (Design-Maximum Values): | | | |
|--|-------|--------------|------------|
| PLATE VOLTAGE | | 330 max | volts |
| GRID VOLTAGE, Positive-bias value | | 0 max | volts |
| PLATE DISSIPATION | | 2 max | watts |
| TOTAL PLATE DISSIPATION (All plates) | | 5 max | watts |
| PEAK HEATER-CATHODE VOLTAGE (Units No.1 and No.2): | | | |
| Heater negative with respect to cathode | | 100 max | volts |
| Heater positive with respect to cathode | | 100 max | volts |
| | Unit | Units | |
| Characteristics: | No.1 | No.2 or No.3 | |
| Plate Supply Voltage | 125 | 125 | volts |
| Grid Voltage | - | -1 | volts |
| Cathode-Bias Resistor | 220 | | ohms |
| Amplification Factor | 63 | 63 | |
| Plate Resistance (Approx.). | 14000 | 14000 | ohms |
| Transconductance | 4500 | 4500 | μ mhos |
| Plate Current | 4.5 | 4.5 | ma |
| Grid Voltage (Approx.), for plate current of 20 µa | - | - 4 | volts |
| | | | |



TWIN DIODE

Metal type 6H6 and glass octal type 6H6-GT used as detectors, lowvoltage rectifiers, and ave tubes. Except for the common heater, the two diode units are independent of each



6GY8

other. For diode detector considerations, refer to ELECTRON TUBE APPLICA-

297

TIONS SECTION. Type 6H6-GT is a DISCONTINUED type listed for reference only. Heater volts (ac/dc), 6.3; amperes, 0.3.

| Maximum Ratings: | RECTIFIER OR DO | UBLER | | |
|--|----------------------|-----------|--------------------|-------------------|
| PEAK INVERSE PLATE VOLTAGE PEAK PLATE CURRENT (Per Plate) DC OUTPUT CURRENT (Per Plate). | | | 48 max | volts ma ma |
| PEAK HEATER-CATHODE VOLTAGE: Heater negative with respect to Heater positive with respect to c | cathode | | 330 max 330 max | volts volts |
| Typical Operation As Half-Waves | Rectifler*: | | | |
| AC Plate Voltage (Per Plate, rms). | | 117 | 150 | volts |
| Min. Total Effective Plate-Supply I | mpedance (Per Plate | ° 15 | 40 | ohms |
| DC Output Current (Per Plate) | | 8 | 8 | ma |
| Typical Operation As Voltage Do | ubler: | Half-Wave | Full-Wave | |
| AC Plate Voltage (Per Plate, rms). | | 117 | 117 | volts |
| Min. Total Effective Plate-Supply I | mpedance (Per Plate) | ° 30 | 15 | ohms |
| DC Output Current | | 8 | 8 | ma |

* In half-wave service, the two units may be used separately or in parallel.

 $^{\circ}$ When a filter-input capacitor larger than 40 μ f is used, it may be necessary to use more plate-supply impedance than the value shown to limit the peak plate current to the rated value.

INSTALLATION AND APPLICATION


Types 6H6 and 6H6-GT require an octal socket and may be mounted in any position. Type 6H6-GT may be supplied with pin No.1 omitted. Type 6H6 maximum dimensions: over-all length, 1-3/4 inches; seated height, 1-3/16 inches; diameter, 1-5/16 inches. Type 6H6-GT, Outline 14C, OUTLINES SECTION.

For detection, the diodes may be utilized in a full-wave circuit or in a halfwave circuit. In the latter case, one plate only, or the two plates in parallel, may be employed. For the same signal voltage, the use of the half-wave arrangement will provide approximately twice the rectified voltage as compared with the full-wave arrangement.

For automatic volume control, the 6H6 and 6H6-GT may be used in circuits similar to those employed for any of the twin-diode types of tubes. The only difference is that the 6H6 and 6H6-GT are more adaptable because each diode has its own separate cathode.

HIGH-MU TRIODE

Miniature type used as rf-amplifier tube in vhf television tuners. Outline 7A, OUTLINES SECTION, except vertical dimensions are 1/8 inch shorter. Tube requires miniature seven-



contact socket and may be mounted in any position. Heater volts (ac/dc), 6.3; amperes, 0.18.

| | | | | CLASS | \mathbf{A}_1 | AMPLIFIER |
|----|----------|---------|---------|--------|----------------|-----------|
| A4 | Detinger | (Deciau | Manimum | Values | | |


| maximum katings, (Design-Maximum Values): | | | | | |
|---|-------|------|-----------|------|-------|
| DC PLATE VOLTAGE | | | 220 | max | volts |
| DC PLATE SUPPLY VOLTAGE. | | | 600 | max | volts |
| GRID VOLTAGE. | | | -50 | max | volts |
| CATHODE CURRENT | | | 22 | max | ma |
| PLATE DISSIPATION. | | | 2.6 | max | watts |
| PEAK HEATER-CATHODE VOLTAGE: | | | | | |
| Heater negative with respect to cathode | | | 110 | max | volts |
| Heater positive with respect to cathode | | | 110 | max | volts |
| Characteristics and Typical Operation: | Fixed | Bias | Cathode . | Bias | |
| DC Plate Supply Voltage | 135 | 135 | 135 | 135 | volts |
| Plate-Load Resistor | - | - | 1000 | 5600 | ohms |

Related type:

3HA5

= Technical Data =

| Internal-Shield Voltage | 0 | 0 | 0 | 0 | volts |
|--|---------|------|-------|-------|------------|
| DC Grid Voltage | $^{-1}$ | -2.7 | - | - | volts |
| Cathode-Bias Resistor | - | - | 0 | 87 | ohms |
| Amplification Factor | 72 | - | 80 | 72 | |
| Transconductance | 14500 | 1500 | 20000 | 14500 | μ mhos |
| Plate Current | 11.5 | - | 19 | 11.5 | ma |
| DC Grid Current | | - | 10 | - | μa |
| Grid-No.1 Voltage for one-per-cent transconductance. | - | - | -5.3 | -8.1 | volts |



POWER PENTODE

Miniature type used as vertical deflection-amplifier tube in television receivers. Outline 8E, OUTLINES SECTION. Tube requires miniature nine-contact socket and may be 6HB6 Related type: 15HB6

mounted in any position. Heater volts (ac/dc), 6.3; amperes, 0.76.

Characteristics:

| Plate Supply Voltage | 60 | 250 | 250 | volts |
|--|------|--------|--------------|--------------|
| Grid No.3 | | Connec | ted to catho | de at socket |
| Grid-No.2 Supply Voltage | 250 | 125 | 250 | volts |
| Grid-No.1 Voltage | 0 | - | - | volts |
| Cathode-Bias Resistor | - | 33 | 100 | ohms |
| Mu-Factor, Grid No.2 to Grid No.1 | - | - | 33 | |
| Plate Resistance (Approx.) | - | 28000 | 24000 | ohms |
| Transconductance | - | 24000 | 20000 | μ mhos |
| Plate Current | 150° | 40 | 40 | ma |
| Grid-No.2 Current | 37• | 4.2 | 6.2 | ma |
| Grid-No.1Voltage(Approx.) for plate current of 100µa | - | -6.4 | -13 | volts |

VERTICAL-DEFLECTION AMPLIFIER

For operation in 525-line, 30-frame system

| Maximum Ratings, (Design-Maximum Values): | | |
|--|----------|-------|
| DC PLATE VOLTAGE | 350 max | volts |
| PEAK POSITIVE-PULSE PLATE VOLTAGE [°] | 2500 max | volts |
| DC GRID-NO.2 (SCREEN-GRID) VOLTAGE | 300 max | volts |
| DC GRID-NO.1 (CONTROL-GRID) VOLTAGE | -100 max | volts |
| GRID-NO.2 INPUT | 2 max | watts |
| PLATE DISSIPATION | 10 max | watts |
| PEAK HEATER-CATHODE VOLTAGE: | | |
| Heater negative with respect to cathode | 200 max | volts |
| Heater positive with respect to cathode | 200 max | volts |
| Maximum Circuit Values: | | |

Grid-No.1-Circuit Resistance:


 For fixed-bias operation
 1 max megohm

 For cathode-bias operation
 2.2 max megohms

 * This value can be measured by a method involving a recurrent waveform such that the maximum

This value can be measured by a method involving a recurrent waveform such that the maximum tube ratings will not be exceeded.

[°] The duration of the voltage pulse must not exceed 15 per cent of one vertical scanning cycle. In a 525-line, 30-frame system, 15 per cent of one vertical-scanning cycle is 2.5 milliseconds.
^{*} The dc component must not exceed 100 volts.



Characteristics

BEAM POWER TUBE

Duodecar type used as verticaldeflection amplifier in television receivers. Outline 12D, OUTLINES SECTION. Tube requires duodecar twelve-contact socket and may be

6HE5

mounted in any position. Heater volts (ac/dc), 6.3; amperes, 0.8.

CLASS A1 AMPLIFIER

| characteristics: | | | |
|---------------------------------|-----|-----|-------|
| Plate Voltage | 60 | 250 | volts |
| Grid-No.2 (Screen-Grid) Voltage | 250 | 250 | volts |

299

RCA Receiving Tube Manual =

| Grid-No.1 (Control-Grid) Voltage Plate Resistance (Approx.) | 0 | $-20 \\ 50000$ | volts |
|--|--------------|---------------------|--------------|
| Transconductance | - | 4100 | μ mhos |
| Plate Current | 180 | 43 | ma |
| Grid-No.2 Current | 20 | 3.5 | ma |
| Grid-No.1 Voltage (Approx.) for plate current of 100 µa | - | -50 | volts |
| VERTICAL DEFLECTION AME | PLIFIER | | |
| For operation in a 525-line, 30-fra | | | ~ ~ |
| | me system | | |
| Maximum Ratings, (Design-Maximum Values): | | 050 | volts |
| DC PLATE VOLTAGE | | 350 max | |
| PEAK POSITIVE-PULSE PLATE VOLTAGE# | | 2500 max | volts |
| GRID-NO.2 VOLTAGE. | | 300 max | volts |
| PEAK CATHODE CURRENT | | 260 mav | ma |
| AVERAGE CATHODE CURRENT | | 75 max | ma |
| PLATE DISSIPATION [†] | | 12 max | watts |
| GRID-NO.2 INPUT | | 2.75 max | watts |
| HEATER-CATHODE VOLTAGE: | | | |
| Heater negative with respect to cathode | | 200 max | volts |
| Heater positive with respect to cathode | | 200 • max | volts |
| BULB TEMPERATURE (At hottest point) | | 200 max | °C |
| | | | |
| Maximum Circuit Values: | | | |
| Grid-No.1-Circuit Resistance: | | | |
| For fixed-bias operation | | 1 max | megohm |
| For cathode-bias operation | | 2.2 max | megohms |
| This value can be measured by a method involving a recurrent | waveform | such that the n | naximum rat- |
| This value can be measured by a method involving a recurrent | wa tolorin a | such chief offer in | |

ings of the tube will not be exceeded.


6HF5

#The duration of the voltage pulse must not exceed 15 per cent of one vertical scanning cycle. In a 525line, 30-frame system, 15 per cent of one vertical scanning cycle is 2.5 milliseconds.

†An adequate bias resistor or other means is required to protect the tube in the absence of excitation. •The dc component must not exceed 100 volts.

BEAM POWER TUBE

Duodecar type used as horizontaldeflection amplifier in color television receivers. Outline 16D, OUTLINES SECTION. Tube requires duodecar twelve-contact socket and may be



mounted in any position. Heater volts (ac/dc), 6.3; amperes, 2.25.

| · · · · · · · · · · · · · · · · · · · | (, , | , , , | · / | | |
|---------------------------------------|--------------------|----------|--------|-----------------------|------------|
| Characteristics: | CLASS A1 AMP | IFIER | | | |
| Plate Voltage | | 5000 | 70 | 175 | volts |
| Grid-No.2 (Screen-Grid) Voltage | | 125 | 125 | 125 | volts |
| Grid-No.1 (Control-Grid) Voltage | | 120 | 0 | -25 | volts |
| Triado Amplifaction Factor | | | 0 | 3* | VOIUS |
| Triode Amplification Factor | | _ | _ | 5600 | ohms |
| Plate Resistance (Approx.) | | - | | 11300 | |
| Transconductance | | | - | | μ mhos |
| Plate Current | | - | 570 | 125 | ma |
| Grid-No.2 Current. | | - | 34 | 4.5 | ma |
| Grid-No.1 Voltage (Approx.) for plate | current of 1 ma | -140 | - | -54 | volts |
| HORIZO | ONTAL-DEFLECTIO | N AMP | IFIED | | |
| | | | | | |
| | ion in a 525-line, | 30-jrame | system | | |
| Maximum Ratings, (Design-Maximum | Values): | | | | |
| DC PLATE SUPPLY VOLTAGE | | | | 900 max | volts |
| PEAK POSITIVE-PULSE PLATE VOLTAGE | E# (Absolute Max | imum) | | 7500 [*] max | volts |
| PEAK NEGATIVE-PULSE PLATE VOLTAG | E | | | -1100 max | volts |
| DC GRID-NO.2 VOLTAGE | | | | 190 max | volts |
| PEAK NEGATIVE-PULSE GRID-NO.1 VO | LTAGE | | | -250 max | volts |
| PEAK CATHODE CURRENT | | | | 1100 m ax | ma |
| AVERAGE CATHODE CURRENT | | | | 315 max | ma |
| PLATE DISSIPATION [†] | | | | 28 max | watts |
| GRID-NO.2 INPUT. | | | | 5.5 max | watts |
| PEAK HEATER-CATHODE VOLTAGE: | | | | | |
| Heater negative with respect to ca | athode | | | 200 max | volts |
| Heater positive with respect to ca | | | | 200 max | volts |
| BULB TEMPERATURE (At hottest point | | | | 225 max | °C |
| | | | | | |
| Maximum Circuit Value: | | | | | |
| Grid-No.1-Circuit Resistance | | | | 1 max | megohm |


*Grid No.2 tied to plate; plate and grid-No.2 volts, 125; grid-No.1 volts, -25.

"This value can be measured by a method involving a recurrent waveform such that the maximum ratings of the tube will not be exceeded.

#The duration of the voltage pulse must not exceed 15 per cent of one horizontal scanning cycle. In a 525-line, 30-frame system, 15 per cent of one horizontal scanning cycle is 10 microseconds.

*Under no circumstances should this absolute value be exceeded.

†An adequate bias resistor or other means is required to protect the tube in the absence of excitation. •The dc component must not exceed 100 volts.



HIGH-MU TRIODE— SHARP-CUTOFF PENTODE

Miniature type used in color and black-and-white television receivers. The triode unit is used in high-gain, sound-if stages and in sync-separator, sync-clipper, and phase-inverter cir-

6HF8 Related type: 10HF8

cuits; pentode unit is used as video-output amplifier. Outline 8D, OUTLINES SECTION. Tube requires miniature nine-contact socket and may be operated in any position. For curves of average characteristics, refer to type 6AW8-A for the triode unit and to type 6EB8 for the pentode unit.

| HEATER VOLTAGE (AC/DC) HEATER CURRENT DIRECT INTERELECTRODE CAPACITANCES: Triode Unit: | 6.3 0.75 | volts ampere |
|---|-------------|-----------------|
| Grid to Plate | 3.5 | nf |
| Grid to Cathode, Heater, Pentode | 0.0 | P |
| Cathode, Grid No.3, and Internal Shield | 2.8 | pf |
| Plate to Cathode, Heater, Pentode Cathode, | | P - |
| Grid No.3, and Internal Shield | 2.6 | pf |
| Pentode Unit: | | |
| Grid No.1 to Plate | 0.1 max | pf |
| Grid No.1 to Cathode, Heater, Grid No.2, | | |
| Grid No.3, and Internal Shield | 10 | pf |
| Plate to Cathode, Heater, Grid No.2, | | |
| Grid No.3, and Internal Shield | 4.2 | pf |
| Triode Grid to Pentode Plate | 0.015 max | pf |

CLASS A1 AMPLIFIER

| Maximum Ratings, (Design-Maximum Values): | | Triode Unit | Pentode Uni | t |
|--|---|--|---|--|
| PLATE VOLTAGE | | 330 max | 330 max | volts |
| GRID-NO.2 (SCREEN-GRID) SUPPLY VOLTAGE | | _ | 330 max | volts |
| GRID-NO.2 VOLTAGE. | | | See curve | |
| GRID-NO.1 (CONTROL-GRID) VOLTAGE, Positive-bias valu | e | 0 max | 0 max | volts |
| PLATE DISSIPATION | | 1 max | 5 max | watts |
| GRID-NO.2 INPUT: | | | | |
| For grid-No.2 voltages up to 165 volts | | - | 1.1 max | watts |
| For grid-No.2 voltages between 165 and 330 volts. | | - | See curve | page 70 |
| PEAK HEATER-CATHODE VOLTAGE: | | 191010 | | |
| Heater negative with respect to cathode | | 200 max | 200 max | volts |
| Heater positive with respect to cathode | | 200 max | 200 max | volts |
| | | | | |
| Channel at the | | | | |
| Characteristics: T | riode Unit | Pentod | le Unit | |
| Plate Supply Voltage | riode Unit 200 | Pentod 45 | le Unit 200 | volts |
| Plate Supply Voltage Grid-No.2 Supply Voltage | 200 | | | volts volts |
| Plate Supply Voltage. Grid-No.2 Supply Voltage. Grid-No.1 Voltage. | | 45 | 200 125 | volts |
| Plate Supply Voltage. Grid-No.2 Supply Voltage. Grid-No.1 Voltage. Cathode-Bias Resistor. | 200 | | 200 125 - 68 | volts |
| Plate Supply Voltage Grid-No.2 Supply Voltage. Grid-No.1 Voltage. Cathode-Bias Resistor. Amplification Factor. | $200 \\ -2 \\ -70 \\ 70$ | | 200 125 | volts volts ohms |
| Plate Supply Voltage. Grid-No.2 Supply Voltage. Grid-No.1 Voltage. Cathode-Bias Resistor Amplification Factor. Plate Resistance (Approx.). | $200 \\ -2 \\ -70 \\ 17500$ | 45 125 0 | $200 \\ 125 \\ - \\ 68 \\ 75000$ | volts volts ohms |
| Plate Supply Voltage. Grid-No.2 Supply Voltage. Grid-No.1 Voltage. Cathode-Bias Resistor. Amplification Factor. Plate Resistance (Approx.). Transconductance. | $200 \\ -2 \\ -2 \\ 70 \\ 17500 \\ 4000$ | 45 125 0 - - - | $200 \\ 125 \\ - \\ 68 \\ 75000 \\ 12500$ | volts volts ohms unhos |
| Plate Supply Voltage. Grid-No.2 Supply Voltage. Grid-No.1 Voltage. Cathode-Bias Resistor. Amplification Factor. Plate Resistance (Approx.). Transconductance. Plate Current. | $ \begin{array}{r} 200 \\ -2 \\ 70 \\ 17500 \\ 4000 \\ 4 \end{array} $ | 45 125 0 - - - 40• | $200 \\ 125 \\ - \\ 68 \\ 75000 \\ 12500 \\ 25$ | volts volts ohms µmhos ma |
| Plate Supply Voltage. Grid-No.2 Supply Voltage. Grid-No.1 Voltage. Cathode-Bias Resistor Amplification Factor. Plate Resistance (Approx.) Transconductance. Plate Current. Grid-No.2 Current. | $ \begin{array}{r} 200 \\ -2 \\ -70 \\ 70 \\ 17500 \\ 4000 \\ 4 - - - - - $ | 45 125 0 - - 40• 15• | $200 \\ 125 \\ - \\ 68 \\ - \\ 75000 \\ 12500 \\ 25 \\ 7$ | volts volts ohms µmhos ma ma |
| Plate Supply Voltage Grid-No.2 Supply Voltage. Grid-No.1 Voltage. Cathode-Bias Resistor. Amplification Factor. Plate Resistance (Approx.). Transconductance. Plate Current. Grid-No.2 Current. Grid-No.1 Voltage (Approx.) for plate current of 100 μ a | $ \begin{array}{r} 200 \\ -2 \\ -70 \\ 70 \\ 17500 \\ 4000 \\ 4 \\ - \\ - \end{array} $ | 45 125 0 - - - 40• | $200 \\ 125 \\ - \\ 68 \\ 75000 \\ 12500 \\ 25$ | volts volts ohms µmhos ma ma volts |
| Plate Supply Voltage. Grid-No.2 Supply Voltage. Grid-No.1 Voltage. Cathode-Bias Resistor Amplification Factor. Plate Resistance (Approx.) Transconductance. Plate Current. Grid-No.2 Current. | $ \begin{array}{r} 200 \\ -2 \\ -70 \\ 70 \\ 17500 \\ 4000 \\ 4 - - - - - $ | 45 125 0 - - 40• 15• | $200 \\ 125 \\ - \\ 68 \\ - \\ 75000 \\ 12500 \\ 25 \\ 7$ | volts volts ohms µmhos ma ma |

 Maximum Circuit Values:
 Triode Unit
 Pentode Unit


 Grid-No.1-Circuit Resistance:
 Triode Unit
 Pentode Unit

 For fixed-bias operation
 0.5 max
 0.25 max megohm

 For cathode-bias operation
 1 max
 1 max
 megohm

• This value can be measured by a method involving a recurrent waveform such that the maximum ratings of the tube will not be exceeded.

The dc component must not exceed 100 volts.



MEDIUM-MU TRIODE— SHARP-CUTOFF PENTODE

Miniature type with frame-grid pentode unit used as combined oscillator and mixer tube in vhf television receivers. Outline 8B, OUTLINES SECTION. Tube requires miniature

6HG8

nine-contact socket and may be mounted in any position. Heater volts (ac/dc), 6.3; amperes, 0.34.


CLASS A1 AMPLIFIER

| Maximum Ratings, (Design-Maximum Values): | Triode Unit | Pentode Unit | |
|---|----------------|-----------------|--------|
| PLATE VOLTAGE | 125 max | 250 max | volts |
| GRID-NO.2 (SCREEN-GRID) VOLTAGE. | - | 150 max | volts |
| CATHODE CURRENT. | 15 max | 18 max | ma |
| PLATE DISSIPATION. | 1.5 max | 2 max | watts |
| GRID-NO.2 INPUT. | - | 0.5 max | watt |
| PEAK HEATER-CATHODE VOLTAGE: | | 0.0 max | Watt |
| Heater negative with respect to cathode | 100 max | 100 max | volts |
| Heater positive with respect to cathode | 100 max | 100 max | volts |
| | | 200 mar | · OID |
| Characteristics: | | | |
| Plate Voltage | 100 | 170 | volts |
| Grid-No.2 Voltage | - | 150 | volts |
| Grid-No.1 (Control-Grid) Voltage | -3 | -1.2 | volts |
| Amplification Factor | 17 | _ | |
| Mu-Factor, Grid No.2 to Grid No.1 | _ | 70 | |
| Plate Resistance (Approx.). | - | 0.35 | megohm |
| Transconductance | 5500 | 12000 | µmhos |
| Plate Current. | 14 | 10 | ma |
| Grid-No.2 Current | _ | 3.3 | ma |
| | | 0.0 | 11146 |
| Maximum Circuit Values: | | | |
| Grid-No.1-Circuit Resistance: | | | |
| For fixed-bias operation | - | 0.25 max | megohm |
| For cathode-bias operation | 0.5 max | 0.5 max | megohm |

DIODE— SHARP-CUTOFF PENTODE

6HJ8

Miniature type used as combined video-detector and if-amplifier tube in television receivers employing seriesconnected heater strings. Outline 8B, OUTLINES SECTION. Tube re-




quires miniature nine-contact socket and may be mounted in any position. Heater volts (ac/dc), 6.3; amperes, 0.45; warm-up time (average), 11 seconds.

PENTODE UNIT AS CLASS A1 AMPLIFIER

| Maximum Ratings, (Design-Maximum Values): | | |
|---|-------------------|-----------|
| PLATE VOLTAGE | 330 max | volts |
| GRID-NO.2 (SCREEN-GRID) SUPPLY VOLTAGE. | 330 max | volts |
| GRID-NO.2 VOLTAGE. | See curv | e page 70 |
| GRID-NO.1 (CONTROL-GRID) VOLTAGE, Positive-bias value | 0 max | volts |
| GRID-NO.2 INPUT: | | |
| For grid-No.2 voltages up to 165 volts | 0.55 max | watt |
| For grid-No.2 voltages between 165 and 330 volts | See curv | e page 70 |
| PLATE DISSIPATION. | 3.2 max | watts |
| PEAK HEATER-CATHODE VOLTAGE: | | |
| Heater negative with respect to cathode | 200 max | volts |
| Heater positive with respect to cathode | $200^{\circ} max$ | volts |
| Characteristics: | | |
| Plate Supply Voltage | 125 | volts |
| Grid No.3. Connect | ed to cathode | |
| Grid-No.2 Supply Voltage | 125 | volts |
| Cathode-Bias Resistor | 56 | ohms |
| Plate Resistance (Approx.). | 0.2 | megohm |
| Transconductance | 9300 | µmhos |
| Plate Current. | 11.5 | ma |
| Grid-No.2 Current | 3.6 | ma |
| Grid-No.1 Voltage (Approx.) for plate current of 20 µa | -6 | volta |
| Grid-No.1 Voltage (Approx.) for plate current of 2 ma and | | . 0105 |
| no cathode-bias resistor | -3 | volts |
| | | |

= Technical Data ==

| Maximum Ratings, (Design-Maximum Values): | | |
|---|-----------|-------|
| DC PLATE CURRENT | 5 max | ma |
| PEAK HEATER-CATHODE VOLTAGE: | | |
| Heater negative with respect to cathode | 200 max | volts |
| Heater positive with respect to cathode | 200 ° max | volts |
| Characteristics, Instantaneous Value : | | |
| Tube Voltage Drop for plate current of 50 ma | 10 | volts |
| ° The dc component must not exceed 100 volts. | | |



MEDIUM-MU TRIODE— SHARP-CUTOFF PENTODE

Miniature type used in a wide variety of applications in television receivers employing series-connected heater strings. The triode unit is used as a sync-separator or voltage-ampli-

6HL8

Danied


Tairda

fier tube, and the pentode unit is used as a video if-amplifier, agc-amplifier, or reactance tube. Outline 8B, OUTLINES SECTION. Tube requires miniature ninecontact socket and may be mounted in any position. Heater volts (ac/dc), 6.3; amperes, 0.6; warm-up time (average), 11 seconds.

CLASS A1 AMPLIFIER

| Manimum Batings (Design Manimum Kaluss) | Triode Unit | Pentode Unit | |
|--|----------------|-----------------|------------|
| Maximum Ratings, (Design Maximum Values): | | | |
| PLATE VOLTAGE | 330 max | 330 max | volts |
| GRID-NO.2 (SCREEN-GRID) SUPPLY VOLTAGE | - | 330 max | volts |
| GRID-NO.2 VOLTAGE | - | | re page 70 |
| GRID-NO.1 (CONTROL-GRID) VOLTAGE, Positive-bias value | 0 max | 0 max | |
| PLATE DISSIPATION | 2.5 max | 2.5 max | watts |
| GRID-NO.2 INPUT: | | | |
| For grid-No.2 voltages up to 165 volts | - | 0.55 max | watt |
| For grid-No.2 voltages between 165 and 330 volts | | See curv | e page 70 |
| PEAK HEATER-CATHODE VOLTAGE: | | | |
| Heater negative with respect to cathode | 200 max | 200 max | volts |
| Heater positive with respect to cathode | 200 max | 200 max | volts |
| | | | |
| Characteristics: | | | |
| Plate Voltage | 125 | 125 | volts |
| Grid-No.2 Voltage | - | 125 | volts |
| Grid-No.1 Voltage | $^{-1}$ | -1 | volt |
| Amplification Factor | 40 | - | |
| Plate Resistance (Approx.) | 5000 | 150000 | ohms |
| Transconductance | 7000 | 10000 | μmhos |
| Plate Current | 12.5 | 12 | ma |
| Grid-No.2 Current. | - | 4.5 | ma |
| Grid-No.1 Voltage (Approx.) for plate current of 20 µa | _ | -7 | volts |
| State of the state | | | |
| Maximum Circuit Values: | | | |
| Grid-No.1-Circuit Resistance | 1 max | - | megohm |

The dc component must not exceed 100 volts.



SEMIREMOTE-CUTOFF PENTODE

Miniature type used as if-amplifier tube in FM receivers employing series-connected heater strings. Outline 7B, OUTLINES SECTION. Tube requires miniature seven-contact socket and may be mounted in any position.

6HR6 Related type: 19HR6

| HEATER VOLTAGE (AC /DC) | volts ampere |
|-------------------------|-----------------|
| | |

= RCA Receiving Tube Manual ==


| Heater Warm-up Time (Average) Direct Interelectrode Capacitances: | 11 | seconds |
|--|------------------------------------|-----------|
| Grid No.1 to Cathode, Heater, Grid No.2, | 0.006 max | pf |
| Grid No.3, and Internal Shield. Plate to Cathode, Heater, Grid No.2, Grid | 8.8 | pf |
| No.3, and Internal Shield | 5.2 | pf |
| CLASS AI AMPLIFIER | | |
| Maximum Ratings, (Design-Maximum Values): | | |
| PLATE SUPPLY VOLTAGE | 300 max | volts |
| GRID-NO.3 (SUPPRESSOR-GRID) VOLTAGE, Positive value | 0 max | volts |
| GRID-NO.2 (SCREEN-GRID) SUPPLY VOLTAGE. | 300 max | volts |
| GRID-NO.2 VOLTAGE | See curv | e page 70 |
| GRID-NO.1 (CONTROL-GRID) VOLTAGE: | 4 | |
| Negative-bias value | -50 max | volts |
| Positive-bias value | 0 max | volts |
| PLATE DISSIPATION. | 3 max | watts |
| GRID-NO.2 INPUT: | | |
| For grid-No.2 voltages up to 150 volts. | 1 max | watt |
| For grid-No.2 voltages between 150 and 300 volts PEAK HEATER-CATHODE VOLTAGE: | See curv | e page 70 |
| Heater negative with respect to cathode | 200 max | volts |
| Heater positive with respect to cathode | 200 [•] <i>max</i> | volts |

AVERAGE CHARACTERISTICS TYPE 6HR6 Ef=6.3 VOLTS GRID No. 3 CONNECTED TO CATHODE AT SOCKET. GRID-No. 2 VOLTS = 115 PLATE (Ib) OR GRID-No.2 (IC2) MILLIAMPERES u O G O N O GRID-No. I VOLTS ECI =0 It 15 -0.5 -1 -1.5 _ ECI .O Ib . 5 -8 0 50 100 150 200 250 PLATE VOLTS 300 350 400 92CM-11530T

| Charac | terist | ILCS. |
|---------|--------|-------|
| enal ac | | |

| Plate Supply Voltage | 200 | volts |
|--|---------------|-----------|
| Grid No.3 Connect | ed to cathode | at socket |
| Grid-No.2 Supply Voltage. | 115 | volts |
| Grid-No.1 Supply Voltage. | 0 | volts |
| Cathode-Bias Resistor | 68 | ohms |
| Plate Resistance (Approx.) | 0.5 | megohm |
| Transconductance | 8500 | µmhos |
| Grid-No.1 Voltage (Approx.) for transconductance of 60 µmhos | -15 | volts |
| Plate Current | 13.2 | ma |
| Grid-No.2 Current | 4.3 | ma |
| Maximum Circuit Values: | | |
| Grid-No.1-Circuit Resistance: | | |
| For fixed-bias operation | 0.5 max | megohm |
| For cathode-bias operation | 1 max | |
| The dc component must not exceed 100 volts. | 1 max | megonin |
| - The uc component must not exceed 100 volts. | | |

——— Technical Data —




SHARP-CUTOFF PENTODE

Miniature type used as if-amplifier and limiter tube in FM receivers. Outline 7B, OUTLINES SECTION. Tube requires miniature seven-contact socket and may be mounted in any position.

6HS6 Related type: 19HS6

| tion. | | | |
|--|---------|---------------|------------|
| HEATER VOLTAGE (AC /DC) | | 6.3 | volts |
| HEATER CURRENT. | | 0.45 | ampere |
| HEATER WARM-UP TIME (AVERAGE) | | 11 | seconds |
| DIRECT INTERELECTRODE CAPACITANCES: | | | |
| Grid No.1 to Plate | | 0.006 max | pf |
| Grid No.1 to Cathode, Heater, Grid No.2, | | | |
| Grid No.3, and Internal Shield. | | 8.8 | pf |
| Plate to Cathode, Heater, Grid No.2, Grid No.3, | | | - |
| and Internal Shield | | 5.2 | pf |
| CLASS A1 AMPLIFIER | | | |
| Maximum Ratings, (Design-Maximum Values): | | | |
| PLATE SUPPLY VOLTAGE. | | 300 max | volts |
| GRID-NO.3 (SUPPRESSOR-GRID) VOLTAGE, Positive Value | | 0 max | volts |
| GRID-NO.2 (SCREEN-GRID) SUPPLY VOLTAGE | | 300 max | volts |
| GRID-NO.2 VOLTAGE. | | See curv | e page 70 |
| GRID-NO.1 (CONTROL-GRID) VOLTAGE: | | | 1.0 |
| Negative-bias value | | -50 max | volts |
| Positive-bias value | | 0 max | volts |
| PLATE DISSIPATION | | 3 max | watts |
| GRID-NO.2 INPUT: | | | |
| For grid-No.2 voltages up to 150 volts | | 1 max | watt |
| For grid-No.2 voltages between 150 and 300 volts | | See curv | e page 70 |
| PEAK HEATER-CATHODE VOLTAGE: | | | |
| Heater negative with respect to cathode | | 200 max | volts |
| Heater positive with respect to cathode | | 200 max | volts |
| Characteristics: | | | |
| Plate Supply Voltage | 75 | 150 | volts |
| Grid No.3 | Connect | ed to cathode | at socket |
| Grid-No.2 Supply Voltage | 75 | 75 | volts |
| Grid-No.1 Supply Voltage | 0 | 0 | volts |
| Cathode-Bias Resistor | 68 | 68 | ohms |
| Amplification Factor [•] | 50 | _ | |
| Plate Resistance (Approx.) | - | 0.5 | megohm |
| Transconductance | - | 9500 | μ mhos |
| Plate Current | - | 8.8 | ma |
| Grid-No.2 Current. | - | 2.8 | ma |
| Grid-No.1 Voltage (Approx.) for plate current of 20 µa | - | -4 | volts |

AVERAGE CHARACTERISTICS

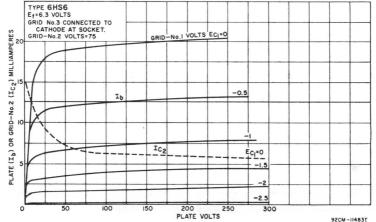

305

= RCA Receiving Tube Manual =


| Maximum Circuit Values: | | | | |
|---|-----|-----|--------|--|
| Grid-No.1-Circuit Resistance: | | | | |
| For fixed-bias operation | 0.5 | max | megohm | |
| For cathode-bias operation | 1 | max | megohm | |
| The dc component must not exceed 100 volts. | | | 475 | |
| • Triode connection (grid No.2 connected to plate). | | | | |
| | | | | |

SHARP-CUTOFF TWIN PENTODE



At my imaging Dating and

Miniature type used in agc amplifier, sync, and noise-limiting circuits of television receivers. One pentode unit is used as combined sync separator and sync clipper; second pentode




unit is used as agc amplifier. Outline 8D, OUTLINES SECTION. Tube requires miniature nine-contact socket and may be operated in any position.

| Heater Volts (ac/dc) | 6.3 | volts |
|--|-----------|--------|
| HEATER CURRENT. | 0.3 | ampere |
| DIRECT INTERELECTRODE CAPACITANCES: | | |
| Grid No.3 to Plate (Each Unit) | 2 | pf |
| Grid No.1 to All Other Electrodes | 6 | pf |
| Grid No.3 (Each Unit) to All Other Electrodes | 3.6 | pf |
| Plate (Each Unit) to All Other Electrodes | 3 | pf |
| Grid No.3 (Unit No.1) to Grid No.3 (Unit No.2) | 0.015 max | pf |
| | | - |

CLASS A1 AMPLIFIER

| Maximum Katings, (Design- | Maximum Values): | | | |
|---------------------------|-------------------------------------|-----|----------------------|-------|
| PLATE VOLTAGE (Each Unit | t) | | 300 max | volts |
| GRID-NO.3 (SUPPRESSOR-GR | ID) VOLTAGE (Each Unit): | | | |
| Peak positive value | | | 50 max | volts |
| DC negative value | | | -50 max | volts |
| DC positive value | | | 3 max | volts |
| | OLTAGE | | 150 max | volts |
| GRID-NO.1 (CONTROL-GRID) | VOLTAGE, Negative-bias value | | -50 max | volts |
| CATHODE CURRENT | | | 12 max | ma |
| PLATE DISSIPATION (Each | Unit) | | 1.1 max | watts |
| GRID-NO.2 INPUT. | | | 0.75 max | watt |
| PEAK HEATER-CATHODE VO | DLTAGE: | | | |
| Heater negative with r | espect to cathode | | 200 max | volts |
| | spect to cathode | | 200 [∎] max | volts |
| Characteristics: | With One Unit $Operating^{\bullet}$ | | | |
| Plate Voltage | | 100 | 100 | volts |
| | | 0 | 0 | volts |



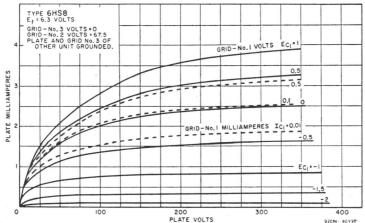


= Technical Data =

| Grid-No.2 Voltage. Grid-No.1 Voltage. Transconductance, Grid-No.3-to-Plate. Transconductance, Grid-No.1-to-Plate. Plate Current. Grid-No.3 Voltage (Approx.) for plate current of 100 μa Grid-No.1 Voltage (Approx.) for plate current of 100 μa | 67.5 0 1100 | 67.5 450 - 2 -3.5 -2.3 | volts volts µmhos µmhos ma volts volts |
|--|-----------------------|---------------------------------------|--|
| With Both Units Operating | | | |
| Plate Voltage (Each Unit) | 100 | 100 | volts |
| Grid-No.3 Voltage (Each Unit) | -10 | 0 | volts |
| Grid-No.2 Voltage | 67.5 | 67.5 | volts |
| Grid-No.1 Voltage | | | volts |
| Plate Current (Each Unit) | | 2 | ma |
| Grid-No.2 Current. | 7 | 4.4 | ma |
| Cathode Current | 7.1 | 8.5 | ma |
| Maximum Circuit Values: Grid-No.3-Circuit Resistance (Each Unit) | | 0.5 max | megohm |
| Grid-No.1-Circuit Resistance | | 0.5 max | megohm |
| | | | - |

The dc component must not exceed 100 volts.

• With plate and grid No.3 of other unit connected to ground.

^D Adjusted to give grid-No.1 current of 0.1 milliampere.

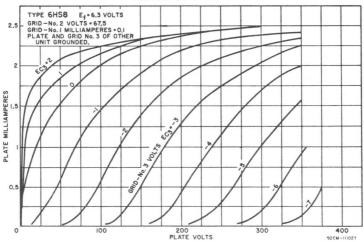

H 3 6 P C 2 C 3 C 0 C 2 C 0 C 0 C 0 C 0 C 0 C 0 C 0 C 0 C 0 C 0 C 0 C 0 C 0 C 0 C 0 C 0 C 0 C

SHARP-CUTOFF PENTODE

Miniature type used as sound-detector tube in FM and television receivers employing series-connected heater strings. Tube has two independent control grids. Outline 7B, OUT-

6HZ6

LINES SECTION. Tube requires miniature seven-contact socket and may be mounted in any position.


| HEATER VOLTAGE (AC /DC) | 6.3 | volts |
|---|-------|---------|
| HEATER CURRENT. | 0.45 | ampere |
| HEATER WARM-UP TIME (average) | 11 | seconds |
| DIRECT INTERELECTRODE CAPACITANCES (Approx.): | | |
| Grid No.1 to Plate | 0.023 | pf |
| Grid No.1 to Cathode, Heater, Grid No.2, Grid No.3, and Internal Shield | 8.2 | pf |
| Grid No.1 to Grid No.3 | 0.09 | pf |
| | | |

AVERAGE CHARACTERISTICS


| Grid No.3 to Plate Grid No.3 to Cathode, Heater, Grid No.1, Grid No.2, Plate, and | 1.6 | | pi |
|--|------|------|----------|
| Internal Shield | 7.2 | | p |
| CLASS A1 AMPLIFIER | | | |
| Characteristics: | | | |
| Plate Supply Voltage | 150 | | volt |
| Grid-No.3 Supply Voltage | 0 | | volt |
| Grid-No.2 Supply Voltage | 100 | | volt |
| Grid-No.1 Supply Voltage | 0 | | volt |
| Cathode-Bias Resistor | 180 | | ohm |
| Plate Resistance (Approx.) | 0.11 | | megohn |
| Fransconductance, Grid No.1 to Plate | 3400 | | μmho |
| Fransconductance, Grid No.3 to Plate | 600 | | μmho |
| Plate Current | 3.2 | | m |
| Grid-No.2 Current | 3.2 | | m |
| Grid-No.3 Supply Voltage (Approx.) for plate current of 20 µa | -7 | | volt |
| Grid-No.1 Supply Voltage (Approx.) for plate current of 20 μ a | -4.5 | | volt |
| FM SOUND DETECTOR | | | |
| Maximum Ratings, (Design-Maximum Values): | | | |
| PLATE VOLTAGE | 300 | max | volt |
| GRID-NO.3 (CONTROL-GRID) VOLTAGE: | | | |
| Negative value (dc and peak ac) | -100 | max | volt |
| Positive value (dc and peak ac) | 25 | max | volt |
| GRID-NO.2 (SCREEN-GRID) SUPPLY VOLTAGE | 300 | max | volt |
| GRID-NO.2 VOLTAGE | See | curv | e page 7 |
| GRID-NO.1 (CONTROL-GRID) VOLTAGE: | | | |
| Negative-bias value | -50 | max | volt |
| Posițive-bias value | 0 | max | volt |
| PLATE DISSIPATION | 1.7 | max | watt |
| GRID-NO.3 INPUT. | 0.1 | max | wat |
| GRID-NO.2 INPUT: | | | |
| For grid-No.2 voltages up to 150 volts. | 1 | max | wat |
| For grid-No.2 voltages between 150 and 300 volts | | | e page 7 |
| PEAK HEATER-CATHODE VOLTAGE: | 500 | cuiv | c page i |
| Heater negative with respect to cathode | 200 | max | volt |
| Heater positive with respect to cathode | | max | volt |
| Maximum Circuit Values: | | | |
| Grid-No.3-Circuit Resistance | 0 69 | | |
| Grid-No.3-Circuit Resistance: | 0.68 | max | megohn |
| For fixed-bias operation | 0.22 | max | megohn |
| For cathode-bias operation. | 0.47 | | megohr |
| | | | |


RCA Receiving Tube Manual

AVERAGE CHARACTERISTICS

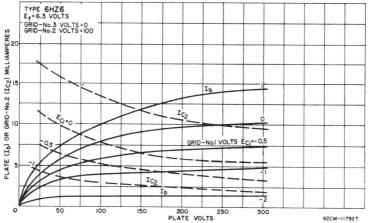

— Technical Data =

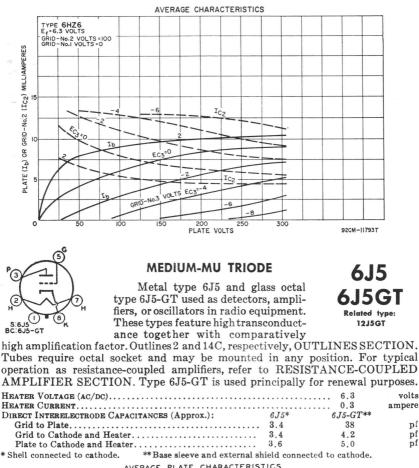

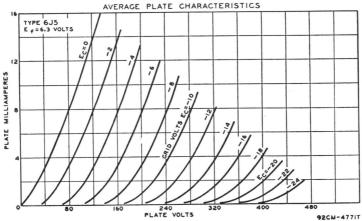

volts

pf

pf

pf

RCA Receiving Tube Manual

CLASS A1 AMPLIFIER

Maximum Ratings, (Design-Center Values):

| PLATE VOLTAGE. GRID VOLTAGE, Positive-bias value. PLATE DISSIPATION. CATHODE CURRENT. PEAK HEATER-CATHODE VOLTAGE: Heater negative with respect to cathode. Heater positive with respect to cathode. | | 0 max 2.5 max 20 max 90 max | volts volts watts ma volts volts |
|--|------|--------------------------------------|---|
| Characteristics: | | | |
| Plate Voltage | 90 | 250 | volts |
| Grid Voltage | 0 | -8 | volts |
| Amplification Factor | 20 | 20 | |
| Plate Resistance (Approx.) | 6700 | 7700 | ohms |
| Transconductance | 3000 | 2600 | μ mhos |
| Grid Voltage (Approx.) for plate current of 10 µa | | -18 | volts |
| Plate Current | 10 | 9 | ma |
| Maximum Circuit Value: | | | |

Grid-Circuit Resistance..... 1.0 max megohm




Related types:

516,1916

MEDIUM-MU TWIN TRIODE

Miniature types used as combined rf power amplifier and oscillator or as twin af amplifier. With push-pull arrangement of the grids and the plates in parallel, can also be used as a mixer



at frequencies as high as 600 megacycles per second. Outline 7B, OUTLINES SEC-TION. Tubes require miniature seven-contact socket and may be mounted in any position. Type 6J6 is a DISCONTINUED type listed for reference only.

| HEATER VOLTAGE (AC/DC) HEATER CURRENT. HEATER WARM-UP TIME (Average) for 6J6-A | | $\begin{array}{ccc} & 6.3 \\ \dots & 0.45 \\ \dots & 11 \end{array}$ | volts ampere seconds |
|---|-------------------------------|--|----------------------------|
| DIRECT INTERELECTRODE CAPACITANCES (Each Unit, Approx.): | Without External Shield | With Externa. Shie!d | |
| Grid to Plate. Grid to Cathode and Heater. Plate to Cathode and Heater (Unit No.1). | 1.6 2.2 0.4 | 1.6 2.6 1.6 | pf pf pf |
| Plate to Cathode and Heater (Unit No.2) | 0.4 | 1 | pf |

CLASS A1 AMPLIFIER (Each Unit):

| Maximum Ratings, (Design-Center Values): | | |
|--|----------------------|-------|
| PLATE VOLTAGE. | 300 max | volts |
| GRID VOLTAGE, Positive-bias value | 0 max | volts |
| PLATE DISSIPATION. | 1.5 max | watts |
| PEAK HEATER-CATHODE VOLTAGE: | | |
| Heater negative with respect to cathode | 100 max | volts |
| Heater positive with respect to cathode | 100 max | volts |
| Characteristics: Plate Voltage | 100 | volts |
| Cathode-Bias Resistor. | 50† 38 | ohms |
| Amplification Factor Plate Resistance (Approx.) | 7100 | ohms |
| Transconductance. | 5300 | umhos |
| Plate Current. | 8.5 | ma |
| Maximum Circuit Values: | | |
| Grid-Circuit Resistance: For fixed-bias operation. For cathode-bias operation. | Not recon 0.5 max | |

Value is for both units operating at the specified conditions.

RF POWER AMPLIFIER AND OSCILLATOR—Class C Telegraphy


Key-down conditions per tube without modulation

| maximum karings, (Design-Center Values, Each Unit): | | |
|---|---------|-------|
| PLATE VOLTAGE. | 300 max | volts |
| GRID VOLTAGE: | | |
| Negative-bias value | -40 max | volts |
| Positive-bias value | 0 max | volts |
| | | |

14 · D ··

= Technical Data =

| GRID CURRENT | max ma max ma max watts max watts |
|--|--|
| | max volts |
| Typical Push-Pull Operation (Both Units): Plate Voltage | |
| Grid Voltage° | |
| Plate Current | |
| Grid Current (Approx.) 16 Driving Power (Approx.) 0.35 | |
| Power Output (Approx.) | |
| ^o Obtained by grid resistor (625 ohms), cathode-bias resistor (220 ohms), or fixed supp | olv. |



SHARP-CUTOFF PENTODE

Metal type 6J7 and glass octal types 6J7-G and 6J7-GT are used as biased detectors or high gain audio amplifiers in radio receivers. Outlines 3, 23, and 15A, respectively, OUT- 6J7 6J7G 6J7GT Related type: 12J7GT

LINES SECTION. Type 6J7-GT is used principally for renewal purposes. Type 6J7-G is a DISCONTINUED type listed for reference only. All types require octal socket and may be mounted in any position. Heater volts (ac/dc), 6.3; amperes, 0.3.

| CLASS A | A, A | MP | LIF | ER |
|---------|------|----|-----|----|
|---------|------|----|-----|----|

| Maximum Ratings, (Design-Center Values): | | |
|--|----------|------------|
| PLATE VOLTAGE. | 300 max | volts |
| GRID-NO.2 (SCREEN-GRID) VOLTAGE | See curv | e page 70 |
| GRID-NO.2 SUPPLY VOLTAGE. | 300 max | volts |
| GRID-NO.1 (CONTROL-GRID) VOLTAGE, Positive-bias value | 0 max | volts |
| PLATE DISSIPATION. | 0.75 max | watt |
| GRID-NO.2 INPUT: | | |
| For grid-No.2 voltages up to 150 volts. | 0.10 max | watt |
| For grid-No.2 voltages between 150 and 300 volts | See curv | e page 70 |
| PEAK HEATER-CATHODE VOLTAGE: Heater negative with respect to cathode | 90 max | |
| Heater positive with respect to cathode | 90 max | volts |
| Heater positive with respect to cathode | 90 max | VOILS |
| Characteristics: | | |
| Plate Voltage | 250 | volts |
| Grid No.3 | | |
| Grid-No.2 Voltage | 100 | volts |
| Grid-No.1 Voltage | -3 | volts |
| Plate Resistance (Approx.) 1 | * | megohm |
| Transconductance. 1185 | 1225 | µmhos |
| Grid-No.1 Voltage (Approx.) for plate current of 10 µa7 | -7 | volts |
| Plate Current | 2 | ma |
| Grid-No.2 Current 0.5 | 0.5 | ma |
| | | |
| Maximum Circuit Value: | | |
| Grid-No.1-Circuit Resistance | 1.0 max | megohm |
| CLASS A, AMPLIFIER (Triode Connection)° | | |
| Maximum Ratings, (Design-Center Values): | | |
| PLATE VOLTAGE. | 250 max | volts |
| GRID-NO.1 VOLTAGE. Positive-bias value. | 0 max | volts |
| PLATE DISSIPATION (TOTAL). | 1.75 max | watts |
| PEAK HEATER-CATHODE VOLTAGE: | 2.10 max | THE COD |
| Heater negative with respect to cathode | 90 max | volts |
| Heater positive with respect to cathode | 90 max | volts |
| The second state and the second state of the s | | |
| Characteristics: | | |
| Plate Voltage | 250 | volts |
| Grid-No.1 Voltage | -8 | volts |
| Amplification Factor | 20 | |
| Plate Resistance (Approx.) 11000 | 10500 | ohms |
| Transconductance | 1900 | μ mhos |
| , Plate Current | 6.5 | ma |
| Maximum Circuit Value: | | |
| Grid-No.1-Circuit Resistance | 1.0 max | megohm |
| | 1.0 max | megonin |
| * Greater than 1.0 megohm. | | |
| ° Grida No.2 and No.3 connected to plate. | | |

TRIODE—HEPTODE CONVERTER

Glass octal type used as a combined triode oscillator and heptode mixer in radio receivers. Outline 23, OUTLINES SECTION. Tube requires octal socket. Heater volts (ac/dc), 6.3; amperes, 0.3. Typical operation—Heptode unit: plate volts, 250 (300 max); grids-No.2-and-No.4 volts, 100 max; grid-No.1 volts, -3; plate resistance, 1.5 megohms; conversion transconduc-

6.**J**8G

6.**J**B6

Related types:


12JB6, 17JB6



tance, 290 μ mhos; plate ma., 1.4; grids-No.2-and-No.4 ma., 2.8. Triode unit: plate volts, 250 max (applied through 20000-ohm dropping resistor); grid resistor, 50000 ohms; plate ma., 5.0. This is a DISCONTINUED type listed for reference only.

BEAM POWER TUBE

Novar type used as high-efficiency horizontal-deflection-amplifier tube in television receivers. Outline 18A, OUT-LINES SECTION. Tube requires novar nine-contact socket and may be mounted in any position.



| HEATER VOLTAGE (AC /DC) | . 3 | volts |
|--|-----|----------|
| HEATER CURRENT | .2 | amperes |
| DIRECT INTERELECTRODE CAPACITANCES (Approx.): | | - |
| |).2 | pf pf |
| Grid No.1 to Cathode, Heater, Grid No.2, and Grid No.3 | 15 | pf |
| Plate to Cathode, Heater, Grid No.2, and Grid No.3 | 6 | pf |

CLASS A1 AMPLIFIER

Triode

Pentode

770 max

volts


| Characteristics: | Connection Connection |
|---|--------------------------------|
| Plate Voltage | 150 60 150 volts |
| Grid No.3 (Suppressor Grid) | Connected to cathode at socket |
| Grid-No.2 (Screen-Grid) Voltage | 150 150 150 volts |
| Grid-No.1 (Control-Grid) Voltage | -22.5 0-22.5 volts |
| Mu-Factor, Grid No.2 to Grid No.1 | 4.4 |
| Plate Resistance (Approx.) | – – 15000 ohms |
| Transconductance | $ -$ 7100 μ mhos |
| Plate Current | - 390 ⁻ 70 ma |
| Grid-No.2 Current | $-32^{\circ}2.1$ ma |
| Grid-No.1 Voltage for plate current of 1 ma | 42 volts |

HORIZONTAL-DEFLECTION AMPLIFIER

For operation in a 525-line, 30-frame system

Maximum Ratings, (Design-Maximum Values): DC PLATE SUPPLY VOLTAGE.....

AVERAGE CHARACTERISTICS

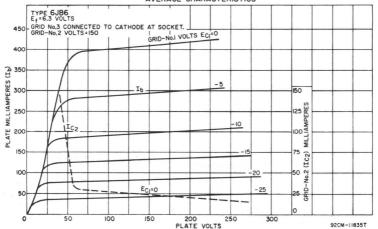

= Technical Data =

| PEAK POSITIVE-PULSE PLATE VOLTAGE# | 6500 max | volts |
|---|-----------|-------|
| PEAK NEGATIVE-PULSE PLATE VOLTAGE | -1500 max | volts |
| DC GRID-NO.3 VOLTAGE [†] | 70 max | volts |
| DC GRID-NO.2 VOLTAGE. | 220 max | volts |
| DC GRID-NO.1 VOLTAGE. | -55 max | volts |
| PEAK NEGATIVE-PULSE GRID-NO.1 VOLTAGE | -330 max | volts |
| PEAK CATHODE CURRENT. | 550 max | ma |
| Average Cathode Current | 175 max | ma |
| PLATE DISSIPATION [®] | 17.5 max | watts |
| GRID-NO.2 INPUT | 3.5 max | watts |
| PEAK HEATER-CATHODE VOLTAGE: | | |
| Heater negative with respect to cathode | 200 max | volts |
| Heater positive with respect to cathode | 200 max | volts |
| BULB TEMPERATURE (At hottest point) | 240 max | °C |
| | | |

Maximum Circuit Values:

Grid-No.1-Circuit Resistance:


For grid-resistor-bias operation..... 1 max megohm ^D This value can be measured by a method involving a recurrent waveform such that the maximum

ratings of the tube will not be exceeded.

The duration of the voltage pulse must not exceed 15 per cent of one horizontal scanning cycle. In a 525-line, 30-frame system, 15 per cent of one horizontal scanning cycle is 10 microseconds.

† For horizontal-deflection service, a positive voltage may be applied to grid No.3 to minimize "snivets" interference in both vhf and uhf television receivers. A typical value for this purpose is 30 volts.

An adequate bias resistor or other means is required to protect the tube in the absence of excitation.
The dc component must not exceed 100 volts.



SHARP-CUTOFF PENTODE

Miniature type with frame grid used in if-amplifier stages of television receivers utilizing intermediate frequences in the order of 40 megacycles. Tube features high transconductance




at low B-supply voltages. Outline 8B, OUTLINES SECTION. Tube requires miniature nine-contact socket and may be mounted in any position.

| Heater Voltage (ac /dc) Heater Current | 6.3 0.3 | volts ampere |
|---|-------------------------|-----------------|
| Grid No.1 to Plate | 0.019 max | pf |
| Grid No.1 to Cathode, Heater, Grid No.2, Grid No.3, and Internal Shield | 8.2 | pf |
| Plate to Cathode, Heater, Grid No.2, Grid No.3, and Internal Shield | 3 | pf |
| CLASS A1 AMPLIFIER | | |
| Maximum Ratings, (Design-Maximum Values): | | |
| PLATE VOLTAGE. | 330 max | volts |
| GRID-NO.3 (SUPPRESSOR-GRID) VOLTAGE, Positive value | 0 max | volts |
| GRID-NO.2 (SCREEN-GRID) SUPPLY VOLTAGE. | 330 max | volts |
| GRID-NO.2 VOLTAGE. | See curve | e page 70 |
| GRID-NO.1 (CONTROL-GRID) VOLTAGE, Positive-bias value | 0 max | volts |
| GRID-NO.2 INPUT: | | |
| For grid-No.2 voltages up to 165 volts | 0.6 max | watt |
| For grid-No.2 voltages between 165 and 330 volts | | e page 70 |
| PLATE DISSIPATION | 2.5 max | watts |
| PEAK HEATER-CATHODE VOLTAGE: | | |
| Heater negative with respect to cathode | 200 max | volts |
| Heater positive with respect to cathode | 200 • <i>max</i> | volts |
| Characteristics: | | |
| Plate Supply Voltage | 125 | volts |
| Grid No.3 Connect | ed to cathode | at socket |
| Grid-No.2 Supply Voltage | 125 | volts |
| Cathode-Bias Resistor | 56 | ohms |
| Plate Resistance (Approx.) | 0.18 | megohm |
| Transconductance | 15000 | μmhos |
| Plate Current | 13 | ma |
| Grid-No.2 Current | 3.2 | ma |
| Grid-No.1 Voltage (Approx.) for plate current of 100 µa | -3 | volts |
| | | |

Maximum Circuit Values:

- Grid-No.1-Circuit Resistance:


The dc component must not exceed 100 volts.

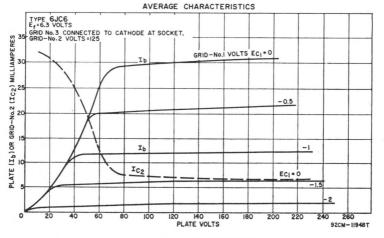

MEDIUM-MU TRIODE-SHARP-CUTOFF PENTODE

6JC8

Miniature type used as combined vhf oscillator and mixer tube in television receivers employing series-connected heaterstrings. Outline 8B, OUT-LINES SECTION. Tube requires



0.25 max

1 max

megohm

megohm

miniature nine-contact socket and may be mounted in any position. Heater volts (ac/dc), 6.3; amperes, 0.45; warm-up time (average), 11 seconds.

CLASS A1 AMPLIFIER

| | Triode | Pentode |
|--|----------|-------------------|
| Maximum Ratings, (Design-Maximum Values): | Unit | Unit |
| PLATE VOLTAGE. | 275 max | 275 max volts |
| GRID-NO.2 (SCREEN-GRID) SUPPLY VOLTAGE | _ | 275 max volts |
| GRID-NO.2 VOLTAGE. | | See curve page 70 |
| GRID-NO.1 (CONTROL-GRID) VOLTAGE, Positive-bias value | 0 max | 0 max volts |
| PLATE DISSIPATION | 1.7 max | 2.3 max watts |
| For grid-No.2 voltages up to 137.5 volts | - | 0.45 max watt |
| For grid-No.2 voltages between 137.5 and 275 volts PEAK HEATER-CATHODE VOLTAGE: | | See curve page 70 |
| Heater negative with respect to cathode | 200 max | 200 max volts |
| Heater positive with respect to cathode | 200° max | 200° max volts |
| Characteristics: | | |
| Plate Voltage | 125 | 100 125 volts |
| Grid-No.2 Voltage | | 70 125 volts |
| Grid-No.1 Voltage | -1 | 0 -1 volt |
| Amplification Factor | 40 | |
| Plate Resistance (Approx.) | 6000 | - 300000 ohms |
| Transconductance | 6500 | 5700 5500 μmhos |
| Plate Current | 12 | – 9 ma |
| Grid-No.2 Current | - | -2.2 ma |
| Grid-No.1 Voltage (Approx.) for plate current of 20 µa | -7 | - 6.5 volts |
| Maximum Circuit Values: | | |
| Grid-No.1-Circuit Resistance: | | |
| For fixed-bias operation | - | 0.1 max megohm |
| For cathode-bias operation | - | 0.5 max megohm |
| ° The dc component must not exceed 100 volts. | | |

= Technical Data =



SHARP-CUTOFF PENTODE

Miniature type used as if-amplifier tube in television receivers utilizing an intermediate frequency in the order of 40 megacycles.Outline8B,OUTLINES SECTION. Tube requires miniature


6JD6 Related types:

3JD6, 4JD6

nine-contact socket and may be mounted in any position.

| HEATER VOLTAGE (AC /DC) | $\begin{smallmatrix} 6.3\\ 0.3 \end{smallmatrix}$ | volts ampere |
|---|--|--|
| DIRECT INTERRELECTRODE CAPACITANCES: Grid No.1 to Plate Grid No.1 to Cathode, Heater, Grid No.2, Grid No.3, | 0.019 max | pf |
| and Internal Shield | 8.2 3 | pf pf |
| CLASS A1 AMPLIFIER | | |
| Maximum Ratings, (Design-Maximum Values): | | |
| PLATE VOLTAGE. GRID-NO.3 (SUPPRESSOR-GRID) VOLTAGE, Positive value. GRID-NO.2 (SCREEN-GRID) SUPPLY VOLTAGE. GRID-NO.2 VOLTAGE. GRID-NO.1 (CONTROL-GRID) VOLTAGE, Positive-bias value. GRID-NO.2 INPUT: | 330 max 0 max 330 max See cury 0 max | volts volts volts ve page 70 volts |
| For grid-No.2 voltages up to 165 volts. For grid-No.2 voltages between 165 and 330 volts. PLATE DISSIPATION. PEAK HEATER-CATHODE VOLTAGE: | 0.6 max See curv 2.5 max | watts ve page 70 watts |
| Heater negative with respect to cathode | 200 max 200 = max | |
| Characteristics: | | |
| Plate Supply Voltage Grid-No.3 Voltage Grid-No.2 Supply Voltage. | $125 \\ 0 \\ 125$ | volts volts |
| Grid-No.1 Supply Voltage. Cathode-Bias Resistor Plate Resistance (Approx.). | $ \begin{array}{r} 0 \\ 56 \\ 160000 \end{array} $ | volts ohms ohms |
| Transconductance | 14000 15 | µmhos ma |
| Grid-No.2 Current. Grid-No.1 Voltage (Approx.) for transconductance of 600 µmhos | -4.5 | ma volts |
| Maximum Circuit Values: | | |
| Grid-No.1-Circuit Resistance: For fixed-bias operation. For cathode-bias operation. | 0.25 max 1 max | |

The dc component must not exceed 100 volts.

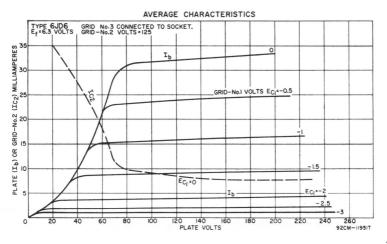

RCA Receiving Tube Manual

BEAM POWER TUBE


6JE6

vimum D.

41

(D

Novar type used as horizontal-deflection-amplifier tube in color television receivers. Outline 18B, OUT-LINES SECTION. Tube requires novar nine-contact socket and may be mounted in any position.



| HEATER VOLTAGE (AC /DC) | $\begin{array}{c} 6.3\\ 2.5 \end{array}$ | volts amperes |
|--|--|------------------|
| DIRECT INTERELECTRODE CAPACITANCES (Approx.): | | |
| Grid No.1 to Plate | 0.44 | pf |
| Grid No.1 to Cathode, Heater, Grid No.2, and Grid No.3 | 21 | pf |
| Plate to Cathode, Heater, Grid No.2, and Grid No.3 | 11 | pf |

CLASS A1 AMPLIFIER

. .


. . .

| | Triod | e r | entode | |
|---|----------|--------|----------|----------------|
| Characteristics: | Connecti | ion Co | nnection | L . |
| Plate Voltage | 125 | 70 | 175 | volts |
| Grid No.3 (Suppressor Grid) | Con | nected | to cath | node at socket |
| Grid-No.2 (Screen-Grid) Voltage | 125 | 125 | 125 | volts |
| Grid-No.1 (Control-Grid) Voltage | -25 | 0 | -25 | volts |
| Amplification Factor | 3.3 | - | - | |
| Plate Resistance (Approx.) | - | | 5500 | ohms |
| Transconductance | - | - | 10500 | μ mhos |
| Plate Current | - | 580† | 115 | ma |
| Grid-No.2 Current. | - | 40† | 5 | ma |
| Grid-No.1 Voltage (Approx.) for plate current of 1 ma | - | - | -55 | volts |

HORIZONTAL-DEFLECTION AMPLIFIER

For operation in a 525-line, 30-frame system

| Maximum Rafings, (Design-Maximum Values): | | |
|---|-----------|-------|
| DC PLATE SUPPLY VOLTAGE. | 990 max | volts |
| PEAK POSITIVE-PULSE PLATE VOLTAGE | 7000 max | volts |
| PEAK NEGATIVE-PULSE PLATE VOLTAGE | -1100 max | volts |
| DC GRID-NO.3 VOLTAGE [®] | 75 max | volts |
| DC GRID-NO.2 VOLTAGE | 190 max | volts |
| PEAK NEGATIVE-PULSE GRID-NO.1 VOLTAGE | -250 max | volts |
| PEAK CATHODE CURRENT. | 1100 max | ma |
| AVERAGE CATHODE CURRENT. | 315 max | ma |
| GRID-NO.2 INPUT. | 3.2 max | watts |
| PLATE DISSIPATION ^D | 24 max | watts |
| PEAK HEATER-CATHODE VOLTAGE: | | |
| Heater negative with respect to cathode | 200 max | volts |
| Heater positive with respect to cathode | 200*max | volts |
| BULB TEMPERATURE (At hottest point) | 240 max | °C |

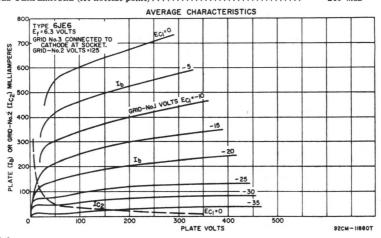

Maximum Circuit Values:

 Grid-No.1-Circuit Resistance:
 0.47 max megohm

 For grid-resistor-bias operation⁰.....
 0.47 max megohm


 For plate-pulsed operation (horizontal-deflection circuits only)......
 10 max megohms

 \dagger This value can be measured by a method involving a recurrent waveform such that the maximum ratings of the tube will not be exceeded.

The duration of the voltage pulse must not exceed 15 per cent of one horizontal scanning cycle. In a 525-line, 30-frame system, 15 per cent of one horizontal scanning cycle is 10 microseconds.

• In this service, a positive voltage may be applied to grid No.3 to minimize "snivets" interference; a typical value for this voltage is 30 volts.

^D An adequate bias resistor or other means is required to protect the tube in the absence of excitation. * The dc component must not exceed 100 volts.

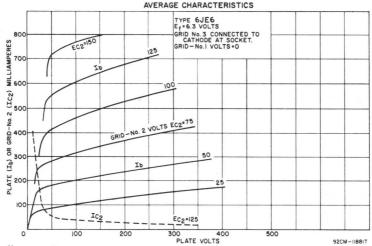



SEMIREMOTE-CUTOFF PENTODE

Miniature type used in the gaincontrolled picture if-amplifier stages of television receivers. Outline 7B, OUTLINES SECTION. Tube requires miniature seven-contact socket



and may be mounted in any position. For curves of average plate characteristics, refer to type 6BZ6.

| HEATER VOLTAGE (AC /DC) | | | | volts |
|---|-----------|-------|-----|---------------|
| HEALER OURRENT | Without | Wit | h | ampere |
| | External | Exter | | |
| DIRECT INTERELECTRODE CAPACITANCES: | Shield | Shi | eld | |
| Grid No.1 to Plate | 0,025 max | 0.015 | max | pf |
| Grid No.1 to Cathode, Heater, Grid No.2, Grid | | | | |
| No.3, and Internal Shield | 7 | 7 | | pf |
| Plate to Cathode, Heater, Grid No.2, Grid | | | | |
| No.3, and Internal Shield | 2 | 3 | | pf |
| CLASS A1 AMPLIFI | ER | | | |
| Maximum Ratings, (Design-Maximum Values): | | | | |
| PLATE VOLTAGE | | 300 | max | volts |
| GRID-No.3 (SUPPRESSOR-GRID) VOLTAGE, Positive value | | 0 | max | volts |
| GRID-No.2 (SCREEN-GRID) SUPPLY VOLTAGE | | 300 | max | volts |
| GRID-No.2 VOLTAGE. | | | See | curve page 70 |
| GRID-Nc.1 (CONTROL-GRID) VOLTAGE, Positive-bias value | | 0 | max | volts |
| GRID-NO.2 INPUT | | | | |
| For grid-No.2 voltages up to 150 volts | | 0.55 | max | watt |
| For grid-No.2 voltages between 150 and 300 volts | | | See | curve page 70 |
| | | | | |

RCA Receiving Tube Manual =


| PEAK HEATER-CATHODE VOLTAGE: | | |
|--|-----------|-------------------|
| Heater negative with respect to cathode | . 200 max | volts |
| Heater positive with respect to cathode | . 200 max | volts |
| Characteristics: | | |
| Plate Supply Voltage | | volt |
| Grid No.3 | | de at socket |
| Grid-No.2 Supply Voltage | 125 | volts |
| Cathode-Bias Resistor | | ohms |
| Plate Resistance (Approx.) | | megohm |
| Transconductance | 8000 | μ mhos |
| Transconductance Range for grid-No.1 voltage of -4.5 volts and cathode-bias resistor of 56 ohms | 400-900 | μmhos |
| Grid-No.1 Voltage (Approx.) for transconductance of | 200 000 | <i>p</i> illino b |
| 50 µmhos and no cathode-bias resistor | -19 | volts |
| Plate Current | | ma |
| Grid-No.2 Current. | 3.6 | ma |
| Maximum Circuit Values: | | |
| Grid-No.1-Circuit Resistance: | | |
| For fixed-bias operation | 0.25 max | megohm |
| For cathode-bias operation | | megohm |
| ^D With external shield connected to cathode. | | |

The dc component must not exceed 100 volts.

BEAM-DEFLECTION TUBE

6JH8

Miniature type used in color-demodulator and burst-gate circuits in color television receivers. This type has two plates and two deflecting elec-



trodes; the control grid varies beam deflection.Outline 8D,OUTLINES SECTION. Tube requires miniature nine-contact socket and may be mounted in any position. Pin 5 should be connected to cathode at socket. The 6JH8 should be so located in the equipment that it is not subjected to stray magnetic fields. Heater volts (ac/dc), 6.3; amperes, 0.3.


COLOR TV DEMODULATOR

| Maximum Ratings, (Design Maximum Values): | | | |
|---|------|-----|--------|
| PLATE VOLTAGE (EACH PLATE) | 330 | max | volts |
| PEAK DEFLECTING-ELECTRODE VOLTAGE (EACH ELECTRODE): | | | |
| Negative value | -165 | max | volts |
| Positive value | 165 | max | volts |
| GRID-NO.3 (ACCELERATING-GRID) VOLTAGE | 330 | max | volts |
| GRID-NO.1 (CONTROL-GRID) VOLTAGE, Positive-bias value | 0 | max | volts |
| CATHODE CURRENT | 33 | max | ma |
| PLATE DISSIPATION (EACH PLATE) | 3 | max | watts |
| GRID-NO.3 INPUT. | 1 | max | watt |
| Maximum Circuit Values: | | | |
| Grid-No.1 Circuit Resistance: | | | |
| For fixed-bias operation | 0.1 | max | megohm |
| For cathode-bias operation | 0.25 | max | megohm |

CLASS A1 AMPLIFIER

With both plates connected together and with both deflecting electrodes connected to cathode at socket

Characteristics: Plate-No.1 Supply Voltage..... 250 volts Plate-No.2 Supply Voltage 250 volts Grid-No.3 Voltage 250 volts Cathode-Bias Resistor..... 220 ohms Transconductance..... 4400 μmhos Total Plate Current..... 14 ma Grid-No.3 Current. . 1.5 ma Grid-No.1 Voltage (Approx.) for total plate current of 10 µa -13volts



HIGH-MU TRIODE SHARP-CUTOFF PENTODE

Miniature type with frame-grid pentode unit used in television receivers. The triode unit is used as a voltage-amplifier or sync-separator tube, and the pentode unit is used as a

6JT8

D J .

m · 1.


video-amplifier tube. Outline 11A, OUTLINES SECTION, except base is smallbutton miniature 9-pin. Tube requires miniature nine-contact socket and may be mounted in any position. Heater volts (ac/dc), 6.3; amperes, 0.725.

| | Triode | Pentode | |
|---|---------|---------------------------------|---------------------------|
| Maximum Ratings, (Design-Maximum Values): | Unit | Unit | |
| Plate Voltage | 330 max | 330 maa | volts |
| GRID-NO.2 (SCREEN-GRID) SUPPLY VOLTAGE | - | 330 maa | volts |
| GRID-NO.2 VOLTAGE | - | See curv | ve page 70 |
| GRID-NO.1 (CONTROL-GRID) VOLTAGE, Positive-bias value | 0 max | 0 maa | volts |
| PLATE DISSIPATION. | 1 max | 4 maa | watts |
| GRID-NO.2 INPUT: | | | |
| For grid-No.2 voltages up to 165 volts | - | 1.1 max | |
| For grid-No.2 voltages between 165 and 330 volts | - | See cur | ve page 70 |
| PEAK HEATER-CATHODE VOLTAGE: | 12.0012 | 10.000 | |
| Heater negative with respect to cathode | 200 max | 200 maa | |
| Heater positive with respect to cathode | 200 max | 2 00 • <i>max</i> | volts |
| | | | |
| Characteristics: | | | |
| Plate Supply Voltage | 250 | | 200 volts |
| Grid-No.2 Supply Voltage | - | 100 1 | 00 volts |
| Grid-No.1 Voltage | $^{-2}$ | 0 | volts |
| Cathode-Bias Resistor | - | - | 82 ohms |
| Amplification Factor | 100 | _ | - |
| Plate Resistance (Approx.) | 37000 | 0.0.1 | 000 ohms |
| Transconductance | 2700 | | $000 \ \mu mhos$ |
| Plate Current | 1.5 | 50• | 17 ma |
| Grid-No.2 Current | - | | 8.5 ma |
| Grid-No.1 Voltage (Approx.) for plate current of 100 µa | _ | - | -5 volts |
| Grid-No.1 Voltage (Approx.) for plate current of 20 μ a | -5.3 | | volts |
| | | | |
| Maximum Circuit Values: | | | |
| Grid-No.1-Circuit Resistance: | | | |
| For fixed-bias operation | 0.5 max | | c megohm |
| For cathode-bias operation | 1 max | 1 max | megohm |

For cathode-bias operation

"The dc component must not exceed 100 volts.

•This value can be measured by a method involving a recurrent waveform such that the maximum ratings of the tube will not be exceeded.



QUADRUPLE DIODE

Miniature type used in phase-detector and noise-immune, color-killer circuits of color television receivers: also used in bridge-matrixing circuits in FM stereo multiplex equipment.

6.IU8

Outline 8D, OUTLINES SECTION. Units 1 and 2 are shielded from units 3 and 4 to minimize coupling between the series-connected pairs of diodes. Tube requires miniature nine-contact socket and may be mounted in any position.

| HEATER VOLTAGE (AC /DC) | 6.3 | volts |
|--|------|--------|
| HEATER CURRENT. | 0.6 | ampere |
| DIRECT INTERELECTRODE CAPACITANCES (APPROX.): | | |
| Plate of Unit No.1 and Cathode of Unit No.2 to Cathode of Unit No.1. | 1.8 | pf |
| Plate of Unit No.1 and Cathode of Unit No.2 to Plate of Unit No.2 | 2.2 | pf |
| Plate of Unit No.2 to Heater and Internal Shield | 0.62 | pf |
| | | 319 |

CLASS A1 AMPLIFIER


—— RCA Receiving Tube Manual =

| Plate of Unit No.3 and Cathode of Unit No.4 to Cathode of Unit No.3. Plate of Unit No.3 and Cathode of Unit No.4 to Plate of Unit No.4 Plate of Unit No.4 to Heater and Internal Shield Cathode of Unit No.1 to Heater and Internal Shield Cathode of Unit No.3 to Heater and Internal Shield | 1.9 2.2 0.94 1.8 1.9 | | pf pf pf pf |
|---|----------------------------------|-----|----------------------|
| Maximum Ratings, (Design-Maximum Values, Each Unit): | | | |
| PEAK INVERSE PLATE VOLTAGE | 300 | max | volts |
| PEAK PLATE CURRENT. | | max | ma |
| DC OUTPUT CURRENT. | | | ma |
| PEAK HEATER-CATHODE VOLTAGE: | | | |
| Heater negative with respect to cathode | 3.00 | max | volts |
| Heater positive with respect to cathode | 300 | max | volts |
| Characteristics, Instantaneous Value, (Each Unit): | | | |
| Plate Current for plate voltage of 10 volts | 60 | | ma |

HIGH-MU TRIODE— SHARP-CUTOFF PENTODE

6JV8


Miniature type used in a wide variety of applications in television receivers, particularly those having lowvoltage "B" supplies and employing series-connected heater strings. The



triode unit is used in sound-if, keyed-agc, sync-separator, sync-amplifier, and noise-suppression circuits. The pentode unit is especially useful as a video amplifier tube. Outline 8D, OUTLINES SECTION. Tube requires miniature nine-contact socket and may be mounted in any position.

| HEATER VOLTAGE (AC/DC) HEATER CURRENT. HEATER WARM-UP TIME (AVERAGE). DIRECT INTERELECTRODE CAPACITANCES (APPROX.): | 6.3 0.6 11 | volts ampere seconds |
|--|------------------|----------------------------|
| Triode Unit: | | |
| Grid to Plate | 2.2 | pf |
| Grid to Cathode and Heater | 3 | pf |
| Plate to Cathode and Heater | 2 | pf |
| Pentode Unit: | | |
| Grid No.1 to Plate | 0.08 max | pf |
| Grid No.1 to Cathode, Heater, Grid No.2, Grid No.3, and Internal Shield | 8 | pf |
| Plate to Cathode, Heater, Grid No.2, Grid No.3, and Internal Shield | 3.2 | pf |
| Pentode Grid No.1 to Triode Plate | 0.012 max | pf |
| Pentode Plate to Triode Plate | 0.24 max | pf |

AVERAGE PLATE CHARACTERISTICS

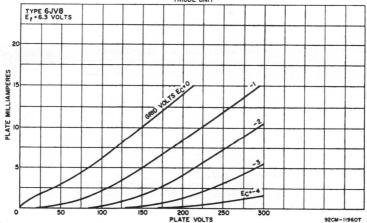


— Technical Data —

CLASS A: AMPLIFIER

| | | T | riode | Pentode | |
|---|-------------|--------------|---------|----------|----------|
| Maximum Ratings, (Design-Maximum Values): | | L | Init | Unit | |
| PLATE VOLTAGE | | 330 | max | 330 mas | volts |
| GRID-NO.2 (SCREEN-GRID) VOLTAGE | | | | 330 ma: | volts |
| GRID-NO.1 (CONTROL-GRID) VOLTAGE: | | | | | |
| Positive-bias value. | | 0 | max | 0 ma: | volts |
| Negative-bias value | | -50 |) max | -50 max | volts |
| PLATE DISSIPATION | | 1.1 | max | 4 mas | watts |
| GRID-NO.2 INPUT. | | | | 1.7 max | watts |
| PEAK HEATER-CATHODE VOLTAGE: | | | | | |
| Heater negative with respect to cathode | | 200 | max | 200 ma: | r volts |
| Heater positive with respect to cathode | | 200 | max | 200 mas | volts |
| | | | | | |
| Characteristics: | Triode Unit | Pentode Unit | | | |
| Plate Voltage | 200 | 60 | 125 | 200 | volts |
| Grid-No.2 Voltage | - | 200 | 125 | 200 | volts |
| Grid-No.1 Voltage | $^{-2}$ | 0 | $^{-1}$ | -2.9 | volts |
| Amplification Factor | 70 | - | - | - | |
| Plate Resistance (Approx.) | 0.0175 | - | 0.1 | 0.15 | megohm |
| Transconductance | 4000 | - | 11500 | 10700 | μmhos |
| Plate Current | 4 | 51. | 22 | 22 | ma |
| Grid-No.2 Current | | 14 • | 4 | 4 | ma |
| Grid-No.1 Voltage (Approx.) for plate | | | | | |
| current of 20 µa | -5 | - | -5,5 | -9 | volts |
| Maximum Circuit Values: | | | | | |
| Grid-No.1-Current Resistance: | | | | | |
| For fixed-bias operation | | 0.8 | i max | 0.25 ma: | r megohm |
| For cathode-bias operation | | 1 | max | 1 ma: | r megohm |
| | | | | | |

The dc component must not exceed 100 volts.

⁶This value can be measured by a method involving a recurrent waveform such that the maximum ratings of the tube will not be exceeded.

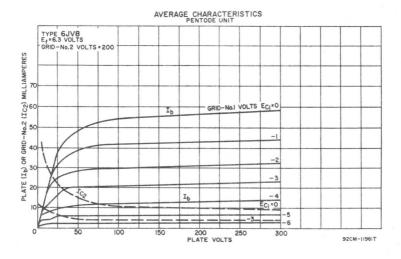

HIGH-MU TRIODE



Glass octal type used as voltage amplifier in radio equipment. Outline 15A, OUTLINES SECTION. Tube requires octal socket. Heater volts (ac/dc), 6.3; amperes, 0.3. Characteristics as class A_1 amplifier: plate volts, 250 maz; grid volts, -3; amplification factor, 70; plate resistance, 50000 ohms; transconductance, 1400 µmhos; plate ma., 1.1. This is a DISCONTIN-UED type listed for reference only.

6K5GT

POWER PENTODE

Glass octal type used in output stage of radio receivers and, triodeconnected, as a vertical deflection amplifier in television receivers. It is capable of delivering moderate power out-

6K6GT



put with relatively small input voltage. Tube may be used singly or in push-pull. This type may be supplied with pin No.1 omitted. Tube requires octal socket and may be mounted in any position. Outline 14C, OUTLINES SECTION. It is especially important that this tube, like other power-handling tubes, be adequately ventilated.

| HEATER VOLTAGE (AC/DC). HEATER CURRENT DIRECT INTERELECTRODE CAPACITANCES (Approx.): | | $6.3 \\ 0.4$ | volts ampere |
|---|----------------|-------------------------------|-------------------------|
| Grid No.1 to Plate. Grid No.1 to Cathode, Heater, Grid No.2, and Grid No.3 Plate to Cathode. Heater, Grid No.2, and Grid No.3 | | $0.5 \\ 5.5 \\ 6.0$ | pf pf |
| CLASS A, AMPLIFIER | | | |
| Maximum Ratings, (Design-Center Values): | • | | |
| PLATE VOLTAGE | | 315 max | volts |
| GRID-NO.2 (SCREEN-GRID) VOLTAGE. PLATE DISSIPATION. GRID-NO.2 INPUT PEAK HEATER-CATHODE VOLTAGE: | | 285 max 8.5 max 2.8 max | volts watts watts |
| Heater negative with respect to cathode Heater positive with respect to cathode * The dc component must not exceed 100 volts. | | 200 max 200* max | volts |
| Typical Operation: | | | |
| Plate Voltage | 250 250 | 315 250 | volts |
| Grid-No.2 Voltage | -18 | -21 | volts |
| Peak AF Grid-No.1 Voltage | 18 | 21 | volts |
| Zero-Signal Plate Current | 32 33 | 25.5 28 | ma |
| Zero-Signal Grid-No.2 Current. 1.6 | 5.5 | 4.0 | ma |
| Maximum-Signal Grid-No.2 Current | 10 | 9 | ma |
| Plate Resistance (Approx.) | 90000 2300 | 110000 2100 | ohms µmhos |
| Load Resistance 12000 | 7600 | 9000 | ohms |
| Total Harmonic Distortion | 11 | 15 | per cent |
| Maximum-Signal Power Output | 3.4 Fixed | 4.5 Cathode | watts |
| Typical Push-Pull Operation (Values are for two tubes): | Bias | Bias | |
| Plate Supply Voltage | 285 | 285 | volts |
| Grid-No.2 Supply Voltage Grid-No.1 Voltage | $285 \\ -25.5$ | 285 | volts |
| Cathode-Bias Resistor | - | 400 | ohms |
| Peak AF Grid-No.1-to-Grid-No.1 Voltage | 51 55 | 51 55 | volts |
| Zero-Signal Plate Current Maximum-Signal Plate Current | 72 | 61 | ma |
| Zero-Signal Grid-No.2 Current. | 9 | 9 | ma |
| Maximum-Signal Grid-No.2 Current Effective Load Resistance (Plate-to-plate) | 1712000 | $13 \\ 12000$ | ma ohms |
| Total Harmonic Distortion | 6 | 4 | per cent |
| Maximum-Signal Power Output | 10.5 | 9.8 | watts |
| Maximum Circuit Values: | | | |
| Grid-No.1-Circuit Resistance: For fixed-bias operation | | 0.1 max | megohm |
| For cathode-bias operation | | 0.5 max | megohm |
| Characteristics (Triode Connection)*: | | | |
| Plate Voltage | | 250 | volts |
| Grid-No.1 Voltage Plate Current | | $^{-18}_{37,5}$ | volts ma |
| Transconductance | | 2700 | µmhos |
| Amplification Factor | | $\frac{6.8}{2500}$ | ohms |
| Plate Resistance (Approx.). Grid-No.1 Voltage (Approx.) for plate current of 0.5 ma | | -48 | volts |
| * Grid-No.2 connected to plate. | | | |
| VERTICAL DEFLECTION AMPLIFIER (Triod | le Connection |)* | |
| Maximum Ratings: For operation in a 525-line, 30-frame | | | |
| DC PLATE VOLTAGE. PEAK POSITIVE-PULSE PLATE VOLTAGE† (Absolute maximum) | | 315 max 1200°max | volts volts |
| 200 | | | |

| PEAK NEGATIVE-PULSE GRID-NO.1 VOLTAGE. PEAK CATHODE CURRENT AVERAGE CATHODE CURRENT PLATE DISSIPATION PEAK HEATER-CATHODE VOLTAGE: | -250 max 75 max 25 max 7 max | volts ma ma watts |
|--|---------------------------------------|----------------------------|
| Heater negative with respect to cathode | 200 max 200 = max | volts volts |
| Maximum Circuit Value: | | |
| Grid-No.1-Circuit Resistance: For cathode-bias operation | 2.2 max | megohms |
| * Grid No.2 connected to plate. | | |

[†] The duration of the voltage pulse must not exceed 15 per cent of one vertical scanning cycle. In a 525line, 30-frame system, 15 per cent of one vertical scanning cycle is 2.5 milliseconds.

° Under no circumstances should this absolute value be exceeded.


The dc component must not exceed 100 volts.

G2 (1) GG P (1) GC H (2) GG H (2)

REMOTE-CUTOFF PENTODE

Metal type 6K7 and glass octal types 6K7-G and 6K7-GT used in rf and if stages of radio receivers, particularly in those employing avc. Outlines 3, 23, and 15A, respectively, OUT-LINES SECTION. These tubes require octal socket and may be mounted in any position. For electrode voltage supplies and application, refer to type 65K7. Heater volts (ac/dc), 6.3; 6K7 6K7G 6K7GT Relative type: 12K7GT

amperes, 0.3. Typical operation as class A_1 amplifier: plate volts 250 (300 max); grid No.3 connected to cathode at socket; grid-No.2 supply volts, 300 max; grid-No.2 volts, 125; grid-No.1 volts, -3; plate resistance, 0.6 megohm; transconductance, 1650 μ mhos; plate ma., 10.5; grid-No.2 ma., 2.6; plate dissipation, 2.75 max watts; grid-No.2 input, 0.35 max watts. Types 6K7 and 6K7-GT are used principally for renewal purposes. Type 6K7-G is a DISCONTINUED type listed for reference only.




TRIODE-HEXODE CONVERTER

Metal type 6K8 and glass octal types 6K8-G and 6K8-GT used as combined triode oscillator and hexode mixer tubes in radio receivers. Type 6K8, Outline 4; type 6K8-G, Outline 23, OUTLINES SECTION. Tubes require octal socket. Heater volts (ac/dc), 6.3; amperes. 0.3. Typical operation in converter service: hexode plate volts. 250 (300 max): hexode grids-



No.2-and-No.4 volts, 100 (150 max); hexode grid-No.3 volts, -3 (0 max); triode plate volts, 100 (125 max); triode grid resistor, 50000 ohms; hexode plate resistance (approx.), 0.6 megohm; conversion transconductance, 350μ mhos; hexode plate ma., 3.8; triode grid and hexode grid-No.1 ma., 0.15; total cathode ma., 12.5 (16 max). Types 6K8-G and 6K8-GT are DISCONTINUED types listed for reference only. Type 6K8 is used principally for renewal purposes.



THREE-UNIT TRIODE

Duodecar type containing one medium-mu and two high-mu triode units used as combined agc, sync, and noise-inverter tube in television receivers employing series-connected

6K11

heater strings. Outline 12A, OUTLINES SECTION. Tube requires duodecar 12contact socket and may be mounted in any position. Heater volts (ac/dc), 6.3; amperes, 0.6; warm-up time (average), 11 seconds.

CLASS A1 AMPLIFIER

| | Unit | Units Nos. | |
|---|----------|------------|-------|
| Maximum Ratings, (Design-Maximum Values): | No. 1 | 2 and 3 | |
| PLATE VOLTAGE | 330 max | 330 max | volts |
| GRID VOLTAGE: | | | |
| Negative-bias value | -50 max | -50 max | volts |
| Positive-bias value | 0 max | 0 max | volts |
| CATHODE CURRENT | 20 max | - | ma |
| PLATE DISSIPATION | 2.75 max | 0.3 max | watts |


= RCA Receiving Tube Manual =

| PEAK HEATER-CATHODE VOLTAGE: Heater negative with respect to cathode Heater positive with respect to cathode | 200 max 200° max | 200 max 200°max | volts volts |
|--|---------------------|--------------------|----------------|
| Characteristics: | | | |
| Plate Voltage | 250 | 250 | volts |
| Grid Voltage | -8.5 | -2 | volts |
| Amplification Factor | 17 | 100 | |
| Plate Resistance (Approx.) | 7700 | 62500 | ohms |
| Transconductance | 2200 | 1600 | μ mhos |
| Plate Current | 10.5 | 1.2 | ma |
| Grid Voltage (Approx.) for plate current of 10 µa | -24 | | volts |
| 9 The laser sector to the sector of 100 milting | | | |

° The dc component must not exceed 100 volts.

HIGH-MU TRIODE— SHARP-CUTOFF PENTODE

6KA8 Related type: 8KA8 Miniature type used in color and black-and-white television receivers employing series-connected heater strings. The triode unit is used in syncseparator circuits; the pentode unit




separator circuits; the pentode unit PT PP has two independent control grids and is used in gated-agc-amplifier and noiseinverter circuits. Outline 8D, OUTLINES SECTION. Tube requires miniature nine-contact socket and may be mounted in any position. For curves of average plate characteristics for triode unit, refer to type 6AW8-A.

| HEATER VOLTAGE (A/C) HEATER CURRENT HEATER WARM-UP TIME (AVERAGE). DIRECT INTERELECTRODE CAPACITANCES: | 6.3 0.6 11 | volts ampere seconds |
|---|------------------|----------------------------|
| Triode Unit: Grid to Plate | 2.2 | pf |
| Grid to Cathode, Heater, and Internal Shield | 2.8 | pf |
| Plate to Cathode, Heater, and Internal Shield | 2.2 | pf |
| Pentode Unit: | | |
| Grid-No.1 to Plate | 0.1 max | pf |
| Grid No.1 to Cathode, Heater, Grid No.2, Grid No.3, and Internal Shield | 9.5 | pf |
| Grid No.1 to Grid No.3. | 0.5 | pf |
| Grid No.3 to Plate | 2.2 | pf |
| Grid No.3 to All Other Electrodes, Heater, and Internal Shield | 7 | pf |
| CLASS A1 AMPLIFIER | | |
| Maximum Ratings, (Design-Maximum Values): | Triode Unit | |
| PLATE VOLTAGE. GRID VOLTAGE: | 300 max | volts |
| | | |


| Positive-bias value | 0 max | volts |
|---------------------|---------|-------|
| Negative-bias value | -50 max | volts |

AVERAGE CHARACTERISTICS

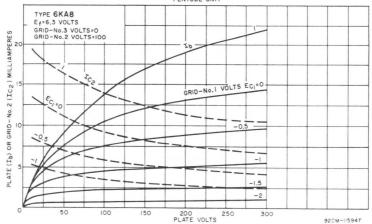

| PLATE DISSIPATION. PEAK HEATER-CATHODE VOLTAGE: | | 1.1 max | watts |
|--|----------|--|--|
| Heater negative with respect to cathode | | 200 max | volts |
| Heater positive with respect to cathode | | 200 max | volts |
| Accuser positive with respect to cathode | Triode | Pentode | VOIUS |
| Characteristics: | Unit | Unit | |
| | 200 | | |
| Plate Supply Voltage | 200 | 150 | volts |
| Grid-No.3 Supply Voltage | _ | 0 | volts |
| Grid-No.2 Supply Voltage | -2 | 0 | volts |
| Grid-No.1 Supply Voltage Cathode-Bias Resistor | -2 | 180 | ohms |
| | 70 | 180 | onms |
| Amplification Factor | 17500 | 100000 | ohms |
| Plate Resistance (Approx.). | | | |
| Transconductance, Grid No.1 to Plate | 4000 | 4400 | μmhos |
| Transconductance, Grid No.3 to Plate | | 600 | μ mhos |
| Plate Current. | 4 | 4 | ma |
| Grid-No.2 Current | | 2.8 | ma |
| Grid-No.1 Supply Voltage (Approx.): | | | |
| For plate current of 10 μ a | $^{-5}$ | - | volts |
| For plate current of 20 μ a | - | -4 | volts |
| Grid-No.3 Supply Voltage (Approx.) for plate current of 20 µa | - | -7 | volts |
| Maximum Circuit Values: | | | |
| Grid-Circuit Resistance: For fixed-bias operation For cathode-bias operation | | Triode Uni 0.25 max 1 max | - |
| For fixed-bias operation | | 0.25 max | megohm |
| For fixed-bias operation For cathode-bias operation | | 0.25 max | megohm megohm |
| For fixed-bias operation | INVERTER | 0.25 max 1 max Pentode Uni | megohm megohm |
| For fixed-bias operation. For cathode-bias operation. GATED AGC AMPLIFIER AND NOISE Maximum Ratings, (Design-Maximum Values): DC PLATE VOLTAGE. | INVERTER | 0.25 max 1 max Pentode Uni 300 max | megohm megohm it volts |
| For fixed-bias operation. For cathode-bias operation. GATED AGC AMPLIFIER AND NOISE Maximum Ratings, (Design-Maximum Values): DC PLATE VOLTAGE. PEAK POSITIVE-PULSE PLATE VOLTAGE [®] . | INVERTER | 0.25 max 1 max Pentode Uni | megohm megohm |
| For fixed-bias operation. For cathode-bias operation. GATED AGC AMPLIFIER AND NOISE Maximum Ratings, (Design-Maximum Values): DC PLATE VOLTAGE. DEAK POSITIVE-PULSE PLATE VOLTAGE. GRID-NO.3 (CONTROL-GRID) VOLTAGE: | INVERTER | 0.25 max 1 max Pentode Uni 300 max 600 max | megohm megohm it volts volts |
| For fixed-bias operation. For cathode-bias operation. GATED AGC AMPLIFIER AND NOISE Maximum Ratings, (Design-Maximum Values): DC PLATE VOLTAGE. PEAK POSITIVE-PULSE PLATE VOLTAGE [®] . GRID-NO.3 (CONTROL-GRID) VOLTAGE: Positive-bias value. | INVERTER | 0.25 max 1 max Pentode Unit 300 max 600 max 0 max | megohm megohm it volts volts volts |
| For fixed-bias operation. For cathode-bias operation. GATED AGC AMPLIFIER AND NOISE Maximum Ratings, (Design-Maximum Values): DC PLATE VOLTAGE. PEAK POSITIVE-PULSE PLATE VOLTAGE ^{III} . GRID-NO.3 (CONTROL-GRID) VOLTAGE: Positive-bias value. Negative-bias value. | | 0.25 max 1 max Pentode Uni 300 max 600 max 0 max -100 max | megohm megohm it volts volts volts volts |
| For fixed-bias operation. For cathode-bias operation. GATED AGC AMPLIFIER AND NOISE Maximum Ratings, (Design-Maximum Values): DC PLATE VOLTAGE, DC PLATE VOLTAGE, PEAK POSITIVE-PULSE PLATE VOLTAGE, GRID-N0.3 (CONTROL-GRID) VOLTAGE: Positive-bias value. Negative-bias value. GRID-N0.2 (SCREEN-GRID) SUPPLY VOLTAGE. | | 0.25 max 1 max Pentode Uni 300 max 600 max 0 max -100 max 300 max | megohm megohm it volts volts volts volts volts |
| For fixed-bias operation. For cathode-bias operation. GATED AGC AMPLIFIER AND NOISE Maximum Ratings, (Design-Maximum Values): DC PLATE VOLTAGE. PEAK POSITIVE-PULSE PLATE VOLTAGE [®] . GRID-NO.3 (CONTROL-GRID) VOLTAGE: Positive-bias value. Negative-bias value. GRID-NO.2 (SCREEN-GRID) SUPPLY VOLTAGE. GRID-NO.2 VOLTAGE. | | 0.25 max 1 max Pentode Uni 300 max 600 max 0 max -100 max | megohm megohm it volts volts volts volts volts |
| For fixed-bias operation. For cathode-bias operation. GATED AGC AMPLIFIER AND NOISE Maximum Ratings, (Design-Maximum Values): DC PLATE VOLTAGE. PEAK POSITIVE-PULSE PLATE VOLTAGE [®] . GRID-NO.3 (CONTROL-GRID) VOLTAGE: Positive-bias value. Negative-bias value. GRID-NO.2 (SCREEN-GRID) SUPPLY VOLTAGE. GRID-NO.1 (CONTROL-GRID) VOLTAGE: | INVERTER | 0.25 max 1 max Pentode Unit 300 max 600 max 0 max -100 max 300 max See curve | megohm megohm it volts volts volts volts volts e page 70 |
| For fixed-bias operation. For cathode-bias operation. GATED AGC AMPLIFIER AND NOISE Maximum Ratings, (Design-Maximum Values): DC PLATE VOLTAGE. PEAK POSITIVE-PULSE PLATE VOLTAGE [®] . GRID-N0.3 (CONTROL-GRID) VOLTAGE: Positive-bias value. GRID-N0.2 (SCREEN-GRID) SUPPLY VOLTAGE. GRID-N0.2 (CONTROL-GRID) VOLTAGE: Positive-bias value. Positive-bias value. | | 0.25 max 1 max Pentode Uni 300 max 600 max -100 max 300 max See curvo 0 max | megohm megohm it volts volts volts volts e page 70 volts |
| For fixed-bias operation. For cathode-bias operation. GATED AGC AMPLIFIER AND NOISE Maximum Ratings, (Design-Maximum Values): DC PLATE VOLTAGE. PEAK POSITIVE-PULSE PLATE VOLTAGE". GRID-NO.3 (CONTROL-GRID) VOLTAGE: Positive-bias value. GRID-NO.2 (SCREEN-GRID) SUPPLY VOLTAGE. GRID-NO.2 (SCREEN-GRID) SUPPLY VOLTAGE. GRID-NO.1 (CONTROL-GRID) VOLTAGE: Positive-bias value. Negative-bias value. | | 0.25 max 1 max Pentode Unit 300 max 600 max -100 max 300 max See curve 0 max -50 max | megohm megohm it volts volts volts volts e page 70 volts volts |
| For fixed-bias operation. For cathode-bias operation. GATED AGC AMPLIFIER AND NOISE Maximum Ratings, (Design-Maximum Values): DC PLATE VOLTAGE. PEAK POSITIVE-PULSE PLATE VOLTAGE". GRID-N0.3 (CONTROL-GRID) VOLTAGE: Positive-bias value. GRID-N0.2 (SCREEN-GRID) SUPPLY VOLTAGE. GRID-N0.2 (CONTROL-GRID) VOLTAGE: Positive-bias value. Negative-bias value. Negative-bias value. Negative-bias value. Negative-bias value. PLATE DISSIPATION. | | 0.25 max 1 max Pentode Uni 300 max 600 max -100 max 300 max See curvo 0 max | megohm megohm it volts volts volts volts e page 70 volts |
| For fixed-bias operation. For cathode-bias operation. GATED AGC AMPLIFIER AND NOISE Maximum Ratings, (Design-Maximum Values): DC PLATE VOLTAGE, PEAK POSITIVE-PULSE PLATE VOLTAGE". GRID-NO.3 (CONTROL-GRID) VOLTAGE: Positive-bias value. GRID-NO.2 (SCREEN-GRID) SUPPLY VOLTAGE. GRID-NO.2 (SCREEN-GRID) VOLTAGE: Positive-bias value. Negative-bias value. Negative-bias value. PLATE DISSIPATION. GRID-NO.2 INPUT: | INVERTER | 0.25 max 1 max Pentode Uni 300 max 600 max -100 max 300 max See curve 0 max -50 max 2 max | megohm megohm it volts volts volts volts volts volts volts volts volts volts |
| For fixed-bias operation. For cathode-bias operation. GATED AGC AMPLIFIER AND NOISE Maximum Ratings, (Design-Maximum Values): DC PLATE VOLTAGE. PEAK POSITIVE-PULSE PLATE VOLTAGE". GRID-NO.3 (CONTROL-GRID) VOLTAGE: Positive-bias value. Negative-bias value. GRID-NO.2 (SCREEN-GRID) SUPPLY VOLTAGE. GRID-NO.2 (SCREEN-GRID) VOLTAGE: Positive-bias value. Negative-bias value. Negative-bia | | 0.25 max 1 max Pentode Unit 300 max 600 max -100 max 300 max See curve 0 max -50 max 2 max 1.1 max | megohm megohm it volts volts volts volts volts volts volts volts watts watts |
| For fixed-bias operation. For cathode-bias operation. GATED AGC AMPLIFIER AND NOISE Maximum Ratings, (Design-Maximum Values): DC PLATE VOLTAGE. PEAK POSITIVE-PULSE PLATE VOLTAGE". GRID-NO.3 (CONTROL-GRID) VOLTAGE: Positive-bias value. GRID-NO.2 (SCREEN-GRID) SUPPLY VOLTAGE. GRID-NO.2 (SCREEN-GRID) VOLTAGE: Positive-bias value. Negative-bias value. Negative-bias value. Negative-bias value. PLATE DISSIPATION. GRID-NO.2 INPUT: For grid-No.2 voltages up to 150 volts. For grid-No.2 voltages between 150 and 300 volts. | | 0.25 max 1 max Pentode Unit 300 max 600 max -100 max 300 max See curve 0 max -50 max 2 max 1.1 max | megohm megohm it volts volts volts volts volts volts volts volts volts volts |
| For fixed-bias operation. For cathode-bias operation. GATED AGC AMPLIFIER AND NOISE Maximum Ratings, (Design-Maximum Values): DC PLATE VOLTAGE, DE PLATE VOLTAGE, GRID-NO.3 (CONTROL-GRID) VOLTAGE". GRID-NO.3 (CONTROL-GRID) VOLTAGE: Positive-bias value. GRID-NO.2 (SCREEN-GRID) SUPPLY VOLTAGE. GRID-NO.2 (SCREEN-GRID) VOLTAGE: Positive-bias value. Negative-bias value. Negative-bias value. PLATE DISSIPATION. GRID-NO.2 INPUT: For grid-No.2 voltages up to 150 volts. For grid-No.2 voltages between 150 and 300 volts. PLATE DISSIPATION. For grid-No.2 voltages UP to 150 and 300 volts. PLATE DISSIPATION. For grid-No.2 voltages UP to 150 and 300 volts. PLATE DISSIPATION. For grid-No.2 voltages UP to 150 and 300 volts. PLATE DISSIPATION. For grid-No.2 voltages UP to 150 and 300 volts. PLATE DISSIPATION. For grid-No.2 voltages UP to 150 and 300 volts. PLATE DISSIPATION. FOR HEATER-CATHODE VOLTAGE: | INVERTER | 0.25 max 1 max Pentode Uni 300 max 600 max -100 max 300 max See curve 0 max 2 max 1.1 max See curve | megohm megohm it volts volts volts volts volts volts volts volts watts e page 70 |
| For fixed-bias operation. For cathode-bias operation. GATED AGC AMPLIFIER AND NOISE Maximum Ratings, (Design-Maximum Values): DC PLATE VOLTAGE. PEAK POSITIVE-PULSE PLATE VOLTAGE". GRID-NO.3 (CONTROL-GRID) VOLTAGE: Positive-bias value. GRID-NO.2 (SCREEN-GRID) SUPPLY VOLTAGE. GRID-NO.2 (SCREEN-GRID) VOLTAGE: Positive-bias value. Negative-bias value. Negative-bias value. Negative-bias value. PLATE DISSIPATION. GRID-NO.2 INPUT: For grid-No.2 voltages up to 150 volts. For grid-No.2 voltages between 150 and 300 volts. | | 0.25 max 1 max Pentode Unit 300 max 600 max -100 max 300 max See curve 0 max -50 max 2 max 1.1 max | megohm megohm it volts volts volts volts volts volts volts volts watts watts |



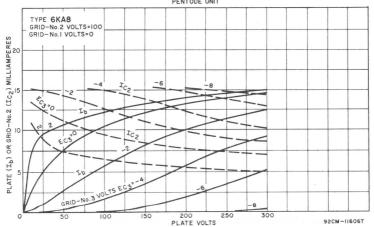

= RCA Receiving Tube Manual =

Maximum Circuit Values:


| Grid-No.3-Circuit Resistance | 0.68 max megohm |
|-------------------------------|-----------------|
| Grid-No.1-Circuit Resistance: | |
| For fixed-bias operation | 0.5 max megohm |
| For cathode-bias operation | 1 max megohm |
| | |

The duration of the voltage pulse must not exceed 15 per cent of one horizontal scanning cycle. In a 525-line, 30-frame system, 15 per cent of one horizontal scanning cycle is 10 microseconds. The dc component must not exceed 100 volts.

MEDIUM-MU TRIODE SHARP-CUTOFF PENTODE

6KD8

Miniature type used as combined vhf oscillator and mixer tube in television receivers. Outline 8B, OUT-LINES SECTION. Tube requires miniature nine-contact socket and




may be mounted in any position. Heater volts (ac/dc), 6.3; amperes, 0.4.

| | Triode | Pentode | |
|--|-------------------|-------------------|------------|
| Maximum Ratings, (Design-Maximum Values): | Unit | Unit | |
| | | | |
| PLATE VOLTAGE | 330 max | 330 max | volts |
| GRID-NO.2 (SCREEN-GRID) SUPPLY VOLTAGE | - | 330 max | volts |
| GRID-NO.2 VOLTAGE. | - | See curs | ve page 70 |
| GRID-NO.1 (CONTROL-GRID) VOLTAGE, Positive-bias value | 0 max | 0 max | volts |
| PLATE DISSIPATION | 2.5 max | 3 max | |
| GRID-NO.2 INPUT: | 2.5 max | 5 max | watts |
| | | 0 | |
| For grid-No.2 voltages up to 165 volts. | | 0.55 max | watt |
| For grid-No.2 voltages between 165 and 330 volts | | See curv | ve page 70 |
| PEAK HEATER-CATHODE VOLTAGE: | - 11 P | | |
| Heater negative with respect to cathode | 200 max | 200 max | volts |
| Heater positive with respect to cathode | $200 \bullet max$ | $200 \bullet max$ | volts |
| | | | |
| Characteristics: | | | |
| Plate Voltage | 125 | 125 | volts |
| Grid-No.2 Voltage. | - | 110 | volts |
| Grid-No.1 Voltage | -1 | -1 | volt |
| Amplification Factor | 40 | 1 | VOIC |
| Plate Resistance (Approx.) | - | 0.2 | megohm |
| | 7500 | 5000 | |
| Transconductance | | | μ mhos |
| Plate Current. | 13.5 | 9.5 | ma |
| Grid-No.2 Current | - | 3.5 | ma |
| Grid-No.1 Voltage (Approx.) for plate current of 20 µa | -9 | -8 | volts |
| | | | |
| Maximum Circuit Values: | | | |
| Grid-No.1-Circuit Resistance: | | | |
| For fixed-bias operation | 0.5 max | 0.5 max | megohm |
| For cathode-bias operation | 1 max | 1 max | megohm |
| • The dc component must not exceed 100 volts. | . maa | 1 mai | megonin |
| - The dc component must not exceed 100 volts. | | | |

MEDIUM-MU TRIODE— SHARP-CUTOFF PENTODE



Miniature type with frame-grid pentode unit used as combined oscillator-mixer tube in television receivers using an intermediate frequency in the order of 40 megacycles. Outline 8B,



OUTLINES SECTION. Tube requires miniature nine-contact socket and may be mounted in any position.

| HEATER VOLTAGE (AC /DC) | 6.3 | volts |
|--|-----|--------|
| HEATER CURRENT | 0.4 | ampere |
| DIRECT INTERELECTRODE CAPACITANCES: | | |
| Triode Unit: | | |
| Grid to Plate. | 1.3 | pí |
| Grid to Cathode, Heater, Pentode Cathode, Pentode Grid | | |
| Grid No.3. and Internal Shield | 2.4 | nf |
| Plate to Cathode, Heater, Pentode Cathode, Pentode | | F - |
| Grid No.3, and Internal Shield | 2 | nf |
| Gilu 10.0, and Internal Sineid. | 4 | pr |
| | | |


CLASS A1 AMPLIFIER

——— Technical Data ——


| PENTODE UNIT: Grid No. 1 to Plate. Grid No. 1 to Cathode, Heater, Grid No. 2, Grid No. 3, and Internal Shield. Plate to Cathode, Heater, Grid No. 2, Grid No. 3, and Internal Shield. Heaterto Triode Cathode and Pentode Cathode | | 0.015 max 5 3.4 5.5 | pf pf |
|---|----------------|------------------------------|----------|
| CLASS A1 AMPLIFIER | Triode Unit | Pentode Unit | pı |

| maximum kamigs, (Design-Maximum values). | 0 1616 | Onu | |
|---|--------------------|----------|------------|
| PLATE VOLTAGE | 280 max | 280 max | volts |
| GRID-NO.2 (SCREEN-GRID) SUPPLY VOLTAGE | | 280 max | volts |
| GRID-No.2 VOLTAGE. | | See curv | ve page 70 |
| GRID-No.1 (CONTROL-GRID) VOLTAGE, Positive-bias value | 0 max | 0 max | volts |
| CATHODE CURRENT | 20 max | 20 max | ma |
| PLATE DISSIPATION. | 2 max | 2 max | watts |
| GRID-No.2 INPUT: | | | |
| For grid-No.2 voltages up to 140 volts | | 0.5 max | watt |
| For grid-No.2 voltages between 140 and 280 volts | | See curv | ve page 70 |
| PEAK HEATER-CATHODE VOLTAGE: | 200 | 200 max | volts |
| Heater negative with respect to cathode | 200 max 200°max | 200 max | volts |
| Heater positive with respect to cathode | 200 - max | 200 max | Voits |

AVERAGE PLATE CHARACTERISTICS

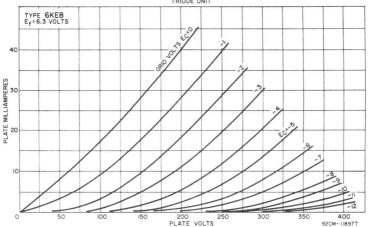

AVERAGE CHARACTERISTICS

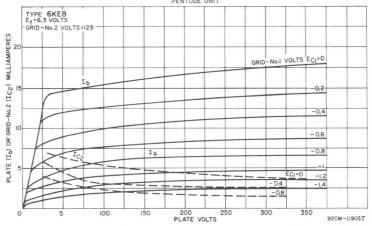

| | Triode | Pentode | |
|-----------------------------|--------|---------|-------|
| Characteristics: | Unit | Unit | |
| Plate Supply Voltage. | 125 | 125 | volts |
| Grid-No. 2 Supply Voltage | | 125 | volts |
| Grid-No.1 Supply Voltage | 0 | 0 | volts |
| Cathode-Bias Resistor. | 68 | 33 | ohms |
| Amplification Factor | 40 | | |
| Plate Resistance (Approx.) | 5000 | 125000 | ohms |
| Transconductance | 8000 | 12000 | μmhos |
| Plate Current. | 13 | 10 | ma |
| Grid-No 2 Current | | 2.8 | ma |
| Grid-No.1 Voltage (Approx.) | | | |
| For plate current 100 µa. | 5 | | volts |
| For plate current of 50 µa | | -3 | volts |
| Maximum Circuit Values | | | |

Maximum Circuit Values:

Grid-No.1-Circuit Resistance:

 For fixed-bias operation.
 0.5 max
 0.25 max

 For cathode-bias operation.
 1 max
 0.5 max

^D With external shield connected to cathode of unit under test, except as noted.


With external shield connected to ground.

• dc component must not exceed 100 watts.

Maximum Ratings. (Design-Maximum Values):

DIODE— SHARP-CUTOFF PENTODE

6KL8 Related type: 12KL8 Miniature type used in combined if-amplifier and AM-detector service in AM and AM/FM broadcast receivers. Pentode unit may also be used as an rf- or if-amplifier or limiter tube;



megohm

megohm

the diode unit may be used for avc or detection. Outline 8D, OUTLINES SEC-TION. Tube requires miniature nine-contact socket and may be mounted in any position. For curves of average plate characteristics for pentode unit, refer to type 6AU6A.

| Heater Voltage (ac/dc) Heater Current. Direct Interelectrode Capacitances: | 6.3 0.3 | volts ampere |
|--|------------|----------------------|
| Pentode Unit: Grid No.1 to Plate. Grid No.1. to Cathode, Heater, Grid No.2, Grid No.3 and Internal Shield Plate to Cathode, Heater, Grid No.2, Grid No. 3, and Internal Shield. Pentode Grid No.1 to Diode Plate. Pentode Plate to Diode Plate. | | pf pf pf pf |


PENTODE UNIT AS CLASS AI AMPLIFIER

| Maximum Kamgs, (Design-Maximum Factor). | |
|---|--------------------------|
| PLATE VOLTAGE. | 300 max volts |
| GRID-NO.3 (SUPPRESSOR-GRID) VOLTAGE: | |
| Negative value. Positive value. | -300 max volts |
| Positive value. | 300 max volts |
| GRID-NO.2 (SCREEN-GRID) SUPPLY VOLTAGE | 300 max volts |
| GRID-NO.2 VOLTAGE. | See curve page 70 |
| GRID-NO.1 (CONTROL-GRID) VOLTAGE: | |
| Positive-bias value | 0 max volts |
| Negative-bias value. | -50 max volts |
| GRID-NO.3 INPUT. | 0.2 max watt |
| GRID-NO.2 INPUT: | |
| For grid-No.2 voltages up to 150 volts. | 0.6 max watt |
| For grid-No.2 voltages between 150 and 300 volts. | See curve page 70 |
| PLATE DISSIPATION. | 3 max watts |
| PEAK HEATER-CATHODE VOLTAGE: | |
| Heater negative with respect to cathode | 200 max volts |
| Heater positive with respect to cathode | 200 ^{max} volts |
| BULB TEMPERATURE (At hottest point) | 150 max °C |
| | |

Characteristics:

| Plate Voltage | | 100 | |
|-------------------|-----------|--------------|-----------|
| Grid No.3. | Connected | to cathode a | |
| Internal Shield | Connected | to cathode a | at socket |
| Grid-No.2 Voltage | | 100 | volts |

| Grid-No.1 Supply Voltage. Grid-No.1 Resistor (Bypassed). Plate Resistance (Approx.) Transconductance. Plate Current. Grid-No.2 Current. Grid-No.1 Voltage (Approx.) for plate current of 10 µa. | 0 2.2 0.55 4300 5.5 2.2 4.2 | volts megohms megohm µmhos ma volts |
|---|---|--|
| DIODE UNIT | | |
| Maximum Ratings, (Design-Maximum Values): PLATE CURRENT. PEAK HEATER-CATHODE VOLTAGE: Heater negative with respect to cathode. Heater positive with respect to cathode. | 1 max 200 max 200 max | ma volts volts |
| Characteristics, Instantaneous Value: Tube Voltage Drop for plate current of 2 ma "The dc component must not exceed 100 volts. | 10 | volts |



DIODE----THREE-PLATE TETRODE


Miniature type used in frequencydivider and complex-wave generator circuits of electronic musical instruments. In such circuits the tetrode unit can provide three independent

6KM8

output-signal voltages; the diode unit can be used as a key in a vibrato circuit. Outline 8D, OUTLINES SECTION. Tube requires miniature nine-contact socket and may be mounted in any position.

| HEATER VOLTAGE (AC /DC) HEATER CURRENT DIRECT INTERELECTRODE CAPACITANCES: | 6.8 0.3 | volts ampere |
|--|------------|-----------------|
| Tetrode Unit: | | |
| Grid No.1 to Plate No.1A | 0.02 max | pf |
| Grid No.1 to Plate No.1B | 0.02 max | pf |
| Grid No.1 to Plate No.2 | 0.06 max | pf |
| Grid No.1 to Cathode, Heater, Grid No.2, and Internal Shield | 5.5 | pf |
| Plate No.1A to Cathode, Heater, Grid No.2, and Internal Shield | 1.2 | pf |
| Plate No.1B to Cathode, Heater, Grid No.2, and Internal Shield | 1.3 | pf |
| Plate No.2 to Cathode, Heater, Grid No.2, and Internal Shield | 1.8 | Pf |
| Tetrode Grid No.1 to Diode Plate | 0.024 max | pf |
| Tetrode Plate No.1A to Diode Plate | 0.18 | pf |
| Tetrode Plate No.1B to Diode Plate | 0.024 | pf |
| Tetrode Plate No.2 to Diode Plate | 0.013 | pf |

AVERAGE CHARACTERISTICS

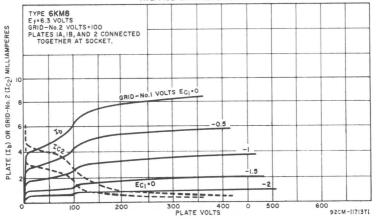

= RCA Receiving Tube Manual ===

TETRODE UNIT AS CLASS AI AMPLIFIER


Plates No. 1A, 1B, and 2 connected together

| | Plates No. 1A, 1B, | and 2 connec | ted together | | |
|---|---|--------------|--------------|---|--|
| Characteristics: | | | | | |
| Plate Voltage | | | | 100 | volts |
| Grid-No.2 Voltage | | | | 100 | volts |
| Grid-No.1 Supply Volta Grid-No.1 Resistor (Byr | | | | 0 2.2 | volts |
| Plate Resistance (Appro | | | | 30000 | megohms ohms |
| Transconductance | | | | 3400 | μmhos |
| Plate Current. | | | | 4.2 | ma |
| Grid-No.2 Current | | | | 1.7 | ma |
| Grid-No.1 Voltage (App | rox.) for plate current o | of 20 µa | | -4 | volts |
| Characteristics: | Connection–Plates No. | | | | |
| | | | | 100 | volts |
| Grid-No.1 Supply Volta | | | | 0 | volts |
| Grid-No.1 Resistor (Byp | | | | 2.2 | megohms |
| Transconductance Amplification Factor | | | | 4500 45 | μmhos |
| Plate Current | | | | 40 5.5 | ma |
| | | | | | 11126 |
| | Separate plate operation; | | | | |
| Plate | | 1A | 1B | 2 | |
| Plate Voltage | | | 100 | 100 | volts |
| Grid-No.2 Voltage | | | 100 | 100 | volts |
| Grid-No.1 Supply Volta | | | 0 | 0 | volts |
| Grid-No.1 Resistor (Byp | | | 2.2 | 2.2 | megohms |
| Transconductance | | | 2000 | 1800 | μmhos |
| Plate Resistance (Appro Plate Current | | | 0.1 2.3 | 0.12 | megohm |
| | | | | 2.1 | ma |
| Grid-No.2 Current | | . 3.8 | 3.8 | 3.3 | ma |
| Maximum Ratings, (Des PLATE VOLTAGE (Each p | late) | | | | max volts |
| GRID-NO.2 (SCREEN-GRII GRID-NO.2 VOLTAGE | | | | | max volts |
| | | | | See | curve nage 70 |
| GRID-NO.1 (CONTROL-GR | | | | See | curve page 70 |
| GRID-NO.1 (CONTROL-GR | | | | | max volts |
| GRID-NO.1 (CONTROL-GR Positive-bias value. | ID) VOLTAGE: | | | 0 | |
| GRID-NO.1 (CONTROL-GR Positive-bias value. Negative-bias value GRID-NO.2 INPUT: | ID) VOLTAGE: | | | 0 -50 | max volts max volts |
| GRID-NO.1 (CONTROL-GR Positive-bias value. Negative-bias value GRID-NO.2 INPUT: For grid-No.2 volta; | ID) VOLTAGE: | | | 0 -50 0.65 | max volts max volts max watt |
| GRID-NO.1 (CONTROL-GR Positive-bias value, Negative-bias value GRID-NO.2 INPUT: For grid-No.2 volta, For grid-No.2 volta | ID) VOLTAGE: ges up to 165 volts ges between 165 and 330 | 0 volts | | 0 -50 0.65 See | max volts max volts max watt curve page 70 |
| GRID-NO.1 (CONTROL-GR Positive-bias value. Negative-bias value GRID-NO.2 INPUT: For grid-No.2 volta, For grid-No.2 volta, PLATE DISSIPATION (East | ID) VOLTAGE: ges up to 165 volts ges between 165 and 33(ch plate) | 0 volts | | 0 -50 0.65 See | max volts max volts max watt |
| GRID-NO.1 (CONTROL-GR Positive-bias value. Negative-bias value GRID-NO.2 INPUT: For grid-NO.2 volta; For grid-NO.2 volta; PLATE DISSIPATION (Eac PEAK HEATER-CATHODE | ID) VOLTAGE: ges up to 165 volts ges between 165 and 33(th plate) | 0 volts | | 0 -50 0.65 See 1 | max volts max volts max watt curve page 70 max watt |
| GRID-NO.1 (CONTROL-GR Positive-bias value. Negative-bias value GRID-NO.2 INPUT: For grid-NO.2 volta; For grid-NO.2 volta; PLATE DISSIPATION (Ea PEAK HEATER-CATHODE Heater negative wit | ID) VOLTAGE: ges up to 165 volts ges between 165 and 330 ch plate) | 0 volts | | 0 -50 0.65 See 1 200 | max volts max volts max watt curve page 70 max watt max volts |
| GRID-NO.1 (CONTROL-GR Positive-bias value. Negative-bias value GRID-NO.2 INPUT: For grid-NO.2 volta; For grid-NO.2 volta; PLATE DISSIPATION (Ea PEAK HEATER-CATHODE Heater negative wit | ID) VOLTAGE: ges up to 165 volts ges between 165 and 33(th plate) | 0 volts | | 0 -50 0.65 See 1 200 | max volts max volts max watt curve page 70 max watt |
| GRID-NO.1 (CONTROL-GR Positive-bias value. Negative-bias value GRID-NO.2 INPUT: For grid-NO.2 volta; For grid-NO.2 volta; PLATE DISSIPATION (Ea PEAK HEATER-CATHODE Heater negative wit | ID) VOLTAGE: ges up to 165 volts ges between 165 and 33(ch plate) VOLTAGE: h respect to cathode h respect to cathode | 0 volts | | 0 -50 0.65 See 1 200 | max volts max volts max watt curve page 70 max watt max volts |
| GRID-NO.1 (CONTROL-GR Positive-bias value. Negative-bias value GRID-NO.2 INPUT: For grid-NO.2 volta; For grid-NO.2 volta; PLATE DISSIPATION (Ea PEAK HEATER-CATHODE Heater negative wit | ID) VOLTAGE: ges up to 165 volts ges between 165 and 33(ch plate) VOLTAGE: h respect to cathode h respect to cathode | 0 volts | | 0 -50 0.65 See 1 200 | max volts max volts max watt curve page 70 max watt max volts |
| GRID-NO.1 (CONTROL-GR Positive-bias value. Negative-bias value GRID-NO.2 INPUT: For grid-No.2 volta; For grid-No.2 volta; PLATE DISSIPATION (Eac PEAK HEATER-CATHODE Heater negative with Heater positive with | ID) VOLTAGE: ges up to 165 volts ges between 165 and 33(ch plate) VOLTAGE: h respect to cathode h respect to cathode | 0 volts | | 0 -50 0.65 See 1 200 | max volts max volts max watt curve page 70 max watt max volts |
| GRID-NO.1 (CONTROL-GR Positive-bias value. Negative-bias value GRID-NO.2 INPUT: For grid-NO.2 volta, For grid-NO.2 volta PLATE DISSIPATION (Ear PEAK HEATER-CATHODE Heater negative with Heater positive with TYPE 6KM8 E* 65 VOLTS | ID) VOLTAGE: ges up to 165 volts ges between 165 and 330 h plate) VOLTAGE: h respect to cathode h respect to cathode AVERAGE PL | 0 volts | | 0 -50 0.65 See 1 200 | max volts max volts max watt curve page 70 max watt max volts |
| GRID-NO.1 (CONTROL-GR Positive-bias value. Negative-bias value GRID-NO.2 INPUT: For grid-No.2 volta, For grid-No.2 volta PLATE DISSIPATION (Ear PEAK HEATER-CATHODE Heater negative with Heater positive with Heater positive with TYPE 6KM8 Et+6.3 VOLTS GRID-NO.2 CON IB AND 2 AT | ID) VOLTAGE: ges up to 165 volts ges between 165 and 33(ch plate) VOLTAGE: h respect to cathode h respect to cathode | 0 volts | | 0 -50 0.65 See 1 200 | max volts max volts max watt curve page 70 max watt max volts |
| GRID-NO.1 (CONTROL-GR Positive-bias value. Negative-bias value GRID-NO.2 INPUT: For grid-NO.2 volta, For grid-NO.2 volta PLATE DISSIPATION (Ear PEAK HEATER-CATHODE Heater negative with Heater positive with TYPE 6KM8 E* 65 VOLTS | ID) VOLTAGE: ges up to 165 volts ges between 165 and 330 h plate) VOLTAGE: h respect to cathode h respect to cathode AVERAGE PL | 0 volts | | 0 -50 0.65 See 1 200 | max volts max volts max watt curve page 70 max watt max volts |
| GRID-NO.1 (CONTROL-GR Positive-bias value. Negative-bias value GRID-NO.2 INPUT: For grid-No.2 volta, For grid-No.2 volta PLATE DISSIPATION (Ear PEAK HEATER-CATHODE Heater negative with Heater positive with Heater positive with TYPE 6KM8 Et+6.3 VOLTS GRID-NO.2 CON IB AND 2 AT | ID) VOLTAGE: ges up to 165 volts ges between 165 and 330 h plate) VOLTAGE: h respect to cathode h respect to cathode AVERAGE PL | 0 volts | | 0 -50 0.65 See 1 200 | max volts max volts max watt curve page 70 max watt max volts |
| GRID-NO.1 (CONTROL-GR Positive-bias value. Negative-bias value GRID-NO.2 INPUT: For grid-No.2 volta, For grid-No.2 volta PLATE DISSIPATION (Eac PEAK HEATER-CATHODE Heater negative with Heater positive with Heater positive with TYPE 6KM8 Et+6.3 VOLTS GRID-NO.2 CON IB AND 2 AT | ID) VOLTAGE: ges up to 165 volts ges between 165 and 330 h plate) VOLTAGE: h respect to cathode h respect to cathode AVERAGE PL NECTED TO PLATES IA, SOCKET. | 0 volts | | 0 -50 0.65 See 1 200 | max volts max volts max watt curve page 70 max watt max volts |
| GRID-NO.1 (CONTROL-GR Positive-bias value. Negative-bias value GRID-NO.2 INPUT: For grid-No.2 volta, For grid-No.2 volta PLATE DISSIPATION (Eac PEAK HEATER-CATHODE Heater negative with Heater positive with Heater positive with TYPE 6KM8 Et+6.3 VOLTS GRID-NO.2 CON IB AND 2 AT | ID) VOLTAGE: ges up to 165 volts ges between 165 and 330 h plate) VOLTAGE: h respect to cathode h respect to cathode AVERAGE PL NECTED TO PLATES IA, SOCKET. | 0 volts | | 0 -50 0.65 See 1 200 | max volts max volts max watt curve page 70 max watt max volts |
| GRID-NO.1 (CONTROL-GR Positive-bias value. Negative-bias value GRID-NO.2 INPUT: For grid-No.2 volta, For grid-No.2 volta PLATE DISSIPATION (Eac PEAK HEATER-CATHODE Heater negative with Heater positive with Heater positive with TYPE 6KM8 Et+6.3 VOLTS GRID-NO.2 CON IB AND 2 AT | ID) VOLTAGE: ges up to 165 volts ges between 165 and 330 h plate) VOLTAGE: h respect to cathode AVERAGE PL NECTED TO PLATES IA, SOCKET. | 0 volts | | 0 -50 0.65 See 1 200 | max volts max volts max watt curve page 70 max watt max volts |
| GRID-NO.1 (CONTROL-GR Positive-bias value. Negative-bias value GRID-NO.2 INPUT: For grid-No.2 volta, For grid-No.2 volta PLATE DISSIPATION (Eac PEAK HEATER-CATHODE Heater negative with Heater positive with Heater positive with TYPE 6KM8 Et+6.3 VOLTS GRID-NO.2 CON IB AND 2 AT | ID) VOLTAGE: ges up to 165 volts ges between 165 and 330 h plate) VOLTAGE: h respect to cathode AVERAGE PL NECTED TO PLATES IA, SOCKET. | 0 volts | | 0 -50 0.65 See 1 200 | max volts max volts max watt curve page 70 max watt max volts |
| GRID-NO.1 (CONTROL-GR Positive-bias value. Negative-bias value GRID-NO.2 INPUT: For grid-No.2 volta, For grid-No.2 volta PLATE DISSIPATION (Eac PEAK HEATER-CATHODE Heater negative with Heater positive with Heater positive with TYPE 6KM8 Et+6.3 VOLTS GRID-NO.2 CON IB AND 2 AT | ID) VOLTAGE: ges up to 165 volts ges between 165 and 330 h plate) VOLTAGE: h respect to cathode AVERAGE PL NECTED TO PLATES IA, SOCKET. | 0 volts | | 0 -50 0.65 See 1 200 | max volts max volts max watt curve page 70 max watt max volts |
| GRID-NO.1 (CONTROL-GR Positive-bias value. Negative-bias value GRID-NO.2 INPUT: For grid-No.2 volta, For grid-No.2 volta PLATE DISSIPATION (Eac PEAK HEATER-CATHODE Heater negative with Heater positive with Heater positive with TYPE 6KM8 Et+6.3 VOLTS GRID-NO.2 CON IB AND 2 AT | ID) VOLTAGE: ges up to 165 volts ges between 165 and 330 h plate) VOLTAGE: h respect to cathode AVERAGE PL NECTED TO PLATES IA, SOCKET. | 0 volts | | 0 -50 0.65 See 1 200 | max volts max volts max watt curve page 70 max watt max volts |
| GRID-NO.1 (CONTROL-GR Positive-bias value. Negative-bias value GRID-NO.2 INPUT: For grid-No.2 volta, For grid-No.2 volta PLATE DISSIPATION (Eac PEAK HEATER-CATHODE Heater negative with Heater positive with Heater positive with TYPE 6KM8 Et+6.3 VOLTS GRID-NO.2 CON IB AND 2 AT | ID) VOLTAGE: ges up to 165 volts ges between 165 and 330 h plate) VOLTAGE: h respect to cathode h respect to cathode AVERAGE PL NECTED TO PLATES IA, SOCKET. | 0 volts | | 0 -50 0.65 See 1 200 | max volts max volts max watt curve page 70 max watt max volts |
| GRID-NO.1 (CONTROL-GR Positive-bias value Negative-bias value GRID-NO.2 INPUT: For grid-No.2 volta For grid-No.2 volta PLATE DISSIPATION (Ead PEAK HEATER-CATHODE Heater negative with Heater positive with Heater positive with GRID-NO.2 CON IB AND 2 AT | ID) VOLTAGE: ges up to 165 volts ges between 165 and 330 h plate) VOLTAGE: h respect to cathode AVERAGE PL NECTED TO PLATES IA, SOCKET. | 0 volts | | 0 -50 0.65 See 1 200 | max volts max volts max watt curve page 70 max watt max volts |
| GRID-NO.1 (CONTROL-GR Positive-bias value. Negative-bias value GRID-NO.2 INPUT: For grid-No.2 volta, For grid-No.2 volta PLATE DISSIPATION (Eac PEAK HEATER-CATHODE Heater negative with Heater positive with Heater positive with TYPE 6KM8 Et+6.3 VOLTS GRID-NO.2 CON IB AND 2 AT | ID) VOLTAGE: ges up to 165 volts ges between 165 and 330 h plate) VOLTAGE: h respect to cathode AVERAGE PL NECTED TO PLATES IA, SOCKET. | 0 volts | | 0 -50 0.65 Seee 1 200 200 | max volts max volts max watt curve page 70 max watt max volts |
| GRID-NO.1 (CONTROL-GR Positive-bias value. Negative-bias value GRID-NO.2 INPUT: For grid-No.2 volta, For grid-No.2 volta PLATE DISSIPATION (Eac PEAK HEATER-CATHODE Heater negative with Heater positive with Heater positive with TYPE 6KM8 Et+6.3 VOLTS GRID-NO.2 CON IB AND 2 AT | ID) VOLTAGE: ges up to 165 volts ges between 165 and 330 h plate) VOLTAGE: h respect to cathode AVERAGE PL NECTED TO PLATES IA, SOCKET. | 0 volts | | 0 -50 0.65 See 1 200 | max volts max volts max watt curve page 70 max watt max volts |
| GRID-NO.1 (CONTROL-GR Positive-bias value. Negative-bias value GRID-NO.2 INPUT: For grid-No.2 volta, For grid-No.2 volta PLATE DISSIPATION (Eac PEAK HEATER-CATHODE Heater negative with Heater positive with Heater positive with TYPE 6KM8 Et+6.3 VOLTS GRID-NO.2 CON IB AND 2 AT | ID) VOLTAGE: ges up to 165 volts ges between 165 and 330 h plate) VOLTAGE: h respect to cathode AVERAGE PL NECTED TO PLATES IA, SOCKET. | 0 volts | | 0 -50 0.65 Seee 1 200 200 | max volts max volts max watt curve page 70 max watt max volts |
| GRID-NO.1 (CONTROL-GR Positive-bias value. Negative-bias value GRID-NO.2 INPUT: For grid-No.2 volta, For grid-No.2 volta PLATE DISSIPATION (Eac PEAK HEATER-CATHODE Heater negative with Heater positive with Heater positive with TYPE 6KM8 Et+6.3 VOLTS GRID-NO.2 CON IB AND 2 AT | ID) VOLTAGE: ges up to 165 volts ges between 165 and 330 h plate) VOLTAGE: h respect to cathode AVERAGE PL NECTED TO PLATES IA, SOCKET. | 0 volts | | 0 -50 0.65 Seee 1 200 200 | max volts max volts max watt curve page 70 max watt max volts |
| GRID-NO.1 (CONTROL-GR Positive-bias value. Negative-bias value GRID-NO.2 INPUT: For grid-No.2 volta, For grid-No.2 volta PLATE DISSIPATION (Eac PEAK HEATER-CATHODE Heater negative with Heater positive with Heater positive with TYPE 6KM8 Et+6.3 VOLTS GRID-NO.2 CON IB AND 2 AT | ID) VOLTAGE: ges up to 165 volts ges between 165 and 330 h plate) VOLTAGE: h respect to cathode AVERAGE PL NECTED TO PLATES IA, SOCKET. | 0 volts | | 0 -50 0.65 Seee 1 200 200 | max volts max volts max watt curve page 70 max watt max volts |
| GRID-NO.1 (CONTROL-GR Positive-bias value. Negative-bias value GRID-NO.2 INPUT: For grid-No.2 volta, For grid-No.2 volta PLATE DISSIPATION (Eac PEAK HEATER-CATHODE Heater negative with Heater positive with Heater positive with TYPE 6KM8 Et+6.3 VOLTS GRID-NO.2 CON IB AND 2 AT | ID) VOLTAGE: ges up to 165 volts ges between 165 and 330 h plate) VOLTAGE: h respect to cathode AVERAGE PL NECTED TO PLATES IA, SOCKET. | 0 volts | | 0 -50 0.65 Seee 1 200 200 | max volts max volts max watt curve page 70 max watt max volts |
| GRID-NO.1 (CONTROL-GR Positive-bias value Negative-bias value GRID-NO.2 INPUT: For grid-NO.2 volta For grid-NO.2 volta PLATE DISSIPATION (Eac PEAK HEATER-CATHODE Heater negative wit Heater positive wit Heater positive wit | ID) VOLTAGE: ges up to 165 volts ges between 165 and 330 ch plate) VOLTAGE: h respect to cathode AVERAGE PL NECTED TO PLATES IA, SOCKET. | 0 volts | TERISTICS | 0 -50 0.65 See 1 200 200 | max volts max watt curve page 70 max watt max volts max volts |
| GRID-NO.1 (CONTROL-GR Positive-bias value. Negative-bias value GRID-NO.2 INPUT: For grid-No.2 volta, For grid-No.2 volta PLATE DISSIPATION (Eac PEAK HEATER-CATHODE Heater negative with Heater positive with Heater positive with TYPE 6KM8 Et+6.3 VOLTS GRID-NO.2 CON IB AND 2 AT | ID) VOLTAGE: ges up to 165 volts ges between 165 and 330 h plate) VOLTAGE: h respect to cathode AVERAGE PL NECTED TO PLATES IA, SOCKET. | 0 volts | TERISTICS | 0 -50 0.65 See 1 200 200 | max volts max volts max watt curve page 70 max watt max volts |

Maximum Circuit Values:

| Grid-No.1-Circuit Resistance: For grid-No.1-resistor-bias operation | 2.2 max n | negohms |
|---|-----------|---------|
| DIODE UNIT | | |
| Maximum Ratings, (Design-Maximum Values): PLATE CURRENT. | 1 max | ma |
| Characteristics, Instantaneous Values: Tube Voltage Drop for plate current of 2 ma | 10 | volts |

HIGH-MU TRIODE



| 1 | SHARP-CU | | 0 | -F P | ΕN | | OD | E . |
|----|--------------|----|----|--------|----|----|------|------|
| | Miniature | ty | pe | used | in | a | var | iety |
| f | applications | in | te | levisi | on | re | ceiv | ers. |
| 11 | 1 1 | | | 1 | | | | |

of applications in television receivers. The pentode unit is used as an if-amplifier tube, and the triode unit as a sync-separator or voltage-amplifier **6KT8**


Dantada

Tuinda

KT PP sync-separator or voltage-amplifier tube. Outline 8B, OUTLINES SECTION. Tube requires miniature nine-contact socket and may be mounted in any position. Heater volts (ac/dc), 6.3; amperes, 0.6.

| | Triode | Pentode | |
|---|-------------------|-------------------|-----------|
| Maximum Ratings, (Design-Maximum Values): | Unit | Unit | |
| PLATE VOLTAGE. | 330 max | 330 max | volts |
| GRID-NO.2 (SCREEN-GRID) SUPPLY VOLTAGE. | - | 330 max | volts |
| GRID-NO.2 VOLTAGE. | - | See curv | e page 70 |
| GRID-NO.1 (CONTROL-GRID) VOLTAGE, Positive-bias value | 0 max | 0 max | volts |
| PLATE DISSIPATION. | 1 max | 2.5 max | watts |
| GRID-NO.2 INPUT: | | | |
| For grid-No.2 voltages up to 165 volts | - | 0.55 max | watt |
| For grid-No.2 voltages between 165 and 330 volts | - | See curv | e page 70 |
| PEAK HEATER-CATHODE VOLTAGE: | | | |
| Heater negative with respect to cathode | 200 max | 200 max | volts |
| Heater positive with respect to cathode | $200 \bullet max$ | $200 \bullet max$ | volts |
| | | | |
| Characteristics: | 050 | 105 | |
| Plate Voltage | 250 | 125 | volts |
| Grid-No.2 Voltage | -2 | 125 | volts |
| Grid-No.1 Voltage | 100 | 1 | volts |
| Amplification Factor. | 31500 | 150000 | ohms |
| Plate Resistance (Approx.) | 3200 | 10000 | μmhos |
| Plate Current | 1.8 | 12 | ma |
| Grid-No.2 Current | 1.0 | 4.5 | ma |
| Grid-No.1 Voltage (Approx.) for plate current of 20 μ a | -3.5 | -7 | volts |
| Ond-No.1 Voltage (Approx.) for place current of 20 pa | 0.0 | | 10100 |
| Maximum Circuit Values: | | | |
| Grid-No.1-Circuit Resistance: | | | |
| For fixed-bias operation | 0.5 max | 0.5 max | megohm |
| For cathode-bias operation | 1 max | 1 max | megohm |
| | | | |

• The dc component must not exceed 100 volts.



HIGH-MU TRIODE— SHARP-CUTOFF PENTODE

Miniature type with frame-grid pentode unit used in black-and-white television receivers. The triode unit is used in general-purpose voltage-amplifier, sync-separator, and sound-if-



amplifier applications. The pentode unit is used as a video output tube. Outline 8D, OUTLINES SECTION. Tube requires miniature nine-contact socket and may be mounted in any position. For curves of average plate characteristics for triode unit, refer to type 6AW8-A.

| HEATER VOLTAGE (AC /DC) HEATER CURRENT. DIRECT INTERELECTRODE CAPACITANCES (Approx.): | | volts ampere |
|---|-----|-----------------|
| Triode Unit: Grid to Plate | 3.7 | pf |

CLASS A1 AMPLIFIER


= RCA Receiving Tube Manual =

| Grid to Cathode, Heater, Pentode Cathode, Pentode Grid No.3, and Internal Shield. Plate to Cathode, Heater, Pentode Cathode, Pentode Grid No.3. | 2.5 | pf |
|--|-----------------------|----------------|
| and Internal Shield | 2.4 0.015 max | pf |
| Pentode Unit: Grid No.1 to Plate | 0.09 max | pf |
| Grid No.1 to Cathode, Heater, Grid No.2, Grid No.3, and Internal Shield Plate to Cathode, Heater, Grid No.2, Grid No.3, and Internal Shield Pentode Plate to Triode Plate. | 13 4.8 0.17 mar | pf pf pf |


CLASS A1 AMPLIFIER

| | Triode | | ntode | |
|--|-----------------|------------|----------|------------|
| Maximum Ratings, (Design-Maximum Values): | Unit | U | nit | |
| PLATE VOLTAGE | 300 ma | x 300 |) max | volts |
| GRID-NO.2 (SCREEN-GRID) SUPPLY VOLTAGE | - | 300 |) max | volts |
| GRID-NO.2 VOLTAGE. | _ | Se | e curve | page 70 |
| GRID-NO.1 (CONTROL-GRID) VOLTAGE, Positive-bias value | 0 ma | <i>x</i> 0 | max | volts |
| PLATE DISSIPATION GRID-NO.2 INPUT: | 1 ma | x 5 | i max | watts |
| For grid-No.2 voltages up to 150 volts | - | 1 | max | watt |
| For grid-No.2 voltages between 150 and 300 volts PEAK HEATER-CATHODE VOLTAGE: | - | Se | ee curve | page 70 |
| Heater negative with respect to cathode | 200 ma | x 200 |) max | volts |
| Heater positive with respect to cathode | 200 ■ ma | x 200 | ∎max | volts |
| Characteristics: | | | | |
| Plate Supply Voltage | 200 | 125 | 200 | volts |
| Grid-No.2 Supply Voltage | - | 125 | 125 | volts |
| Grid-No.1 Supply Voltage | -2 | 0 | 0 | volts |
| Cathode-Bias Resistor | - | 82 | 68 | ohms |
| Amplification Factor | 70 | - | - | |
| Plate Resistance (Approx.) | 17500 | 55000 | 75000 | ohms |
| Transconductance | 4000 | 21000 | 23000 | μ mhos |
| Plate Current | 4 | 16.5 | 19 | ma |
| Grid-No.2 Current | - | 3.1 | 3.1 | ma |
| Grid-No.1 Voltage (Approx.) for plate current of 100 µa | -4.5 | -3.8 | -3.8 | volts |
| Maximum Circuit Values: | | | | |
| Grid-No.1-Circuit Resistance: | | | | |
| For fixed-bias operation | 0.5 ma | x 0.1 | max | megohm |
| For cathode-bias operation | 1 ma | x 0.25 | 5 max | megohm |

The dc component must not exceed 100 volts.

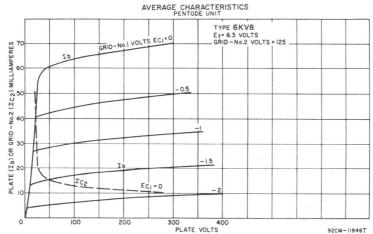

Technical Data



MEDIUM-MU TRIODE

Glass octal type used as detector, amplifier, or oscillator in radio receivers. Outline 22, OUT-LINES SECTION. Heater volts (ac/dc), 6.3; amperes, 0.15. Typical operation and characteristics: plate volts. 250 maz; grid volts, -9; plate ma., 8; plate resistance, 9000 ohms; amplification factor, 17; transconductance, 1900 μ mhos; grid voltage for cathode-current cutoff, -20. This is a DISCONTINUED type listed for reference only.

BEAM POWER TUBE

Metal type 6L6 and glass octal types 6L6-G, 6L6-GB, 6L6-GC are used in the output stage of audio amplifying equipment, especially units designed to have ample reserve of power6L5G

6L6 6L6G 6L6GB 6L6GC

delivering ability. These types provide high power output, sensitivity, and high efficiency. Power output at all levels has low third- and higher-order harmonics. Type 6L6, Outline 6; types 6L6-GB and 6L6-GC, Outline 19C; OUTLINES SEC-TION. Tubes require an octal socket and may be mounted in any position. It is especially important that these tubes, like other power-handling tubes, be adequately ventilated. Type 6L6-G is a DISCONTINUED type listed for reference only. Type 6L6-GC can be used in place of types 6L6, 6L6-G, and 6L6-GB. Type 6L6-GC may be supplied with pin 1 omitted.

| HEATER VOLTAGE (AC/DC) | | 6.3 | volts |
|---|------|--------|--------|
| HEATER CURRENT | | 0.9 | ampere |
| DIRECT INTERELECTRODE CAPACITANCES (Approx.): | 6L6* | 6L6-GC | |
| Grid No.1 to Plate | 0.4 | 0.6 | pf |
| Grid No.1 to Cathode, Heater, Grid No.2, and Grid No.3. | 10 | 10 | pf |
| Plate to Cathode, Heater, Grid No.2, and Grid No.3 | 12 | 6.5 | pf |
| * With pin 1 connected to pin 8. | | | |

CLASS A1 AMPLIFIER

| | LILIEK | | | |
|---|--------|------------------|----------------------|----------|
| | | 6L6, 6L6-G, 6L6- | | |
| Mantinum Battana | | | Design-Max | |
| Maximum Ratings: | | Values | Values | |
| PLATE VOLTAGE | | 360 max | 500 max | volts |
| GRID-NO.2 (SCREEN-GRID) VOLTAGE | | 270 max | 450 [▲] max | volts |
| PLATE DISSIPATION | | 19 max | 30 max | watts |
| GRID-NO.2 INPUT. | | 2.5 max | 5 max | watts |
| PEAK HEATER-CATHODE VOLTAGE: | | | | |
| Heater negative with respect to cathode | | 180 max | 200 max | volts |
| Heater positive with respect to cathode | | 180 max | 200 max | volts |
| | | | | |
| Typical Operation: | | | | |
| Plate Voltage | 250 | 300 | 350 | volts |
| | 250 | 200 | 250 | volts |
| | -14 | -12.5 | -18 | volts |
| Peak AF Grid-No.1 Voltage | 14 | 12.5 | 18 | volts |
| Zero-Signal Plate Current. | 72 | 48 | 54 | ma |
| Maximum-Signal Plate Current. | 79 | 55 | 66 | ma |
| Zero-Signal Grid-No.2 Current | 5 | 2.5 | 2.5 | ma |
| | 7.3 | 4.7 | 7 | ma |
| Plate Resistance (Approx.) | | 35000 | 33000 | ohms |
| | 5000 | 5300 | 5200 | μmhos |
| Load Resistance | | 4500 | 4200 | ohms |
| Total Harmonic Distortion. | 10 | 11 | 15 | per cent |
| | 6.5 | 6.5 | 10.8 | watts |
| Maximum-Signal Fower Output | 0.0 | 0.0 | 10.8 | watts |

| CLASS A | AMPLIFIER | (Triode | Connection)† |
|---------|-----------|---------|--------------|
|---------|-----------|---------|--------------|

| | 6L6, 6L6-G, 6L6-G | | |
|---------------------------|-------------------|----------------|-------|
| | Design- | Design- | |
| Maximum Ratings: | | Maximum Values | |
| PLATE VOLTAGE | 275 max | 450 max | volts |
| PLATE DISSIPATION (TOTAL) | 19 max | 30 max | watts |

= RCA Receiving Tube Manual =

| PEAK HEATER-CATHODE VOLTAGE: | 100 | 200 | |
|---|---------|---------|------------|
| Heater negative with respect to cathode | 180 max | 200 max | volts |
| Heater positive with respect to cathode | 180 max | 200 max | volts |
| Typical Operation: | | | |
| Plate Voltage | | 250 | volts |
| Grid-No.1 Voltage | | -20 | volts |
| Peak AF Grid-No.1 Voltage | | 20 | volts |
| Zero-Signal Plate Current | | 40 | ma |
| Maximum-Signal Plate Current. | | 44 | ma |
| Plate Resistance (Approx.) | | 1700 | ohms |
| Amplification Factor | | 8 | |
| Transconductance | | 4700 | μ mhos |
| Load Resistance | | 5000 | ohms |
| Total Harmonic Distortion | | 5 | per cent |
| Maximum-Signal Power Output. | | 1.4 | watts |
| † Grid No.2 connected to plate. | | | |

PUSH-PULL CLASS A1 AMPLIFIER


| Maximum Ratings: (Same as for class A, amplifier) | | | |
|---|------|-------|----------|
| Typical Operation (Values are for two tubes): | | | |
| Plate Voltage | 250 | 270 | volts |
| Grid-No.2 Voltage | 250 | 270 | volts |
| Grid-No.1 Voltage | -16 | -17.5 | volts |
| Peak AF Grid-No.1-to-Grid-No 1 Voltage | 32 | 35 | volts |
| Zero-Signal Plate Current | 120 | 134 | ma |
| Maximum-Signal Plate Current. | 140 | 155 | ma |
| Zero-Signal Grid-No.2 Current. | 10 | 11 | ma |
| Maximum-Signal Grid-No.2 Current | 16 | 17 | ma |
| Effective Load Resistance (Plate-to-plate) | 5000 | 5000 | ohms |
| Total Harmonic Distortion | 2 | 2 | per cent |
| Maximum-Signal Power Output | 14.5 | 17.5 | watts |

PUSH-PULL CLASS AB1 AMPLIFIER

Maximum Ratings: (Same as for class A1 amplifier)

| Typical Operation (Values are for two tubes): | 6L6, 6L | 6-GB, 6L6-GC | 6L6-GC | |
|---|---------|--------------|--------|----------|
| Plate Voltage | . 360 | 360 | 450 | volts |
| Grid-No.2 Voltage | . 270 | 270 | 400 | volts |
| Grid-No.1 Voltage | 22.5 | -22.5 | -37 | volts |
| Peak AF Grid-No.1-to-Grid-No.1 Voltage | . 45 | 45 | 70 | volts |
| Zero-Signal Plate Current | 88 | 88 | 116 | ma |
| Maximum-Signal Plate Current. | . 132 | 140 | 210 | ma |
| Zero-Signal Grid-No.2 Current | 5 | 5 | 5.6 | ma |
| Maximum-Signal Grid-No.2 Current. | . 15 | 11 | 22 | ma |
| Effective Load Resistance (Plate-to-plate) | . 6600 | 3800 | 5600 | ohms |
| Total Harmonic Distortion | . 2 | 2 | 1.8 | per cent |
| Maximum-Signal Power Output. | . 26.5 | 18 | 55 | watts |

AVERAGE PLATE CHARACTERISTICS

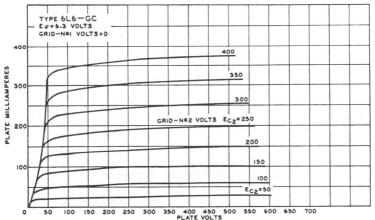

PUSH-PULL CLASS AB2 AMPLIFIER

Maximum Ratings: (Same as for class A1 amplifier)

Typical Operation (Values are for two tubes):

| Plate Voltage | 360 | 360 | volts |
|--|------|-------|----------|
| Grid-No.2 Voltage | 225 | 270 | volts |
| Grid-No.1 Voltage | -18 | -22.5 | volts |
| Peak AF Grid-No.1-to-Grid-No.1 Voltage | 52 | 72 | volts |
| Zero-Signal Plate Current | 78 | 88 | ma |
| Maximum-Signal Plate Current | 142 | 205 | ma |
| Zero-Signal Grid-No.2 Current. | 3.5 | 5 | ma |
| Maximum-Signal Grid-No.2 Current | 11 | 16 | ma |
| Effective Load Resistance (Plate-to-plate) | 6000 | 3800 | ohms |
| Total Harmonic Distortion | 2 | 2 | per cent |
| Maximum-Signal Power Output | 31 | 47 | watts |
| | | | |

Maximum Circuit Values:

| Grid-No.1-Circuit Resistance: | | |
|-------------------------------|---------|--------|
| For fixed-bias operation | 0.1 max | megohm |
| For cathode-bias operation | 0.5 max | megohm |
| | | |

In push-pull circuits where grid No.2 of each tube is connected to a tap on the plate winding of the output transformer, this maximum rating is 500 volts.

PENTAGRID MIXER



Metal type 6L7 and glass octal type 6L7-G used as mixers in superheterodyne circuits having a separate oscillator stage, as well as in other applications where dual control is desirable in a single stage. The two separate control grids are shielded from each other and the coupling effects between oscillator and signal circuits are very small. For additional information, refer to *Frequency Conversion*, ELECTRON TUBE AP-


6L7 6L7 G

PLICATIONS SECTION. Outlines 3 and 23, OUTLINES SECTION. Heater volts (ac/dc), 6.3; amperes, 0.3. Typical operation as mixer (values recommended for all-wave receivers): plate volts, 250 (300 max); grids-No.2-and-No.4 volts, 150 max; grid-No.1 volts, -6 min; grid-No.3 volts, -15; peak oscillator volts applied to grid No.3, 18 min; plate dissipation, 1 max watt; grids-No.2-and-No.4 input, 1.5 max watt; grids-No.2-and-No.4 ma., 9.2; plate resistance, greater than 1 megohm; conversion transconductance, 350 µmhos. Type 6L7-G is a DISCONTINUED type listed for reference only. Type 6L7 is used principally for renewal purposes.

Refer to type 6AB5/6N5

DIRECT-COUPLED POWER TRIODE

Glass octal type used as class A_1 power amplifier. Outline 26, OUTLINES SECTION. Heater volts (ac/dc), 6.3; amperes, 0.8. For electrical characteristics, refer to type 6B5. Type 6N6-G is a DISCONTINUED type listed for reference only.



MEDIUM-MU TWIN POWER TRIODE

Metal type 6N7 and glass octal type 6N7-GT used in output stage of radio receivers as class B power amplifier or with units in parallel as a class A₁ amplifier. Outlines 5 and 14C, respectively, OUTLINES SECTION. Tubes require octal socket. Heater volts (ac/dc), 6.3; amperes, 0.8. Typical operation as class A₁ amplifier; plate volts, 300 max; grid volts, -6; amplification factor, 35; plate resistance (approx.),

6N7 6N7GT

11000 ohms; transconductance, 3200 µmhos; plate ma., 7. Typical operation as push-pull class B power amplifier (both units): plate volts, 300 max; plate-supply impedance, 1000 ohms; effective grid-circuit impedance, 516 ohms; grid volts, 0; peak af grid-to-grid volts, 82; plate ma., 35 (zero signal), 70 (maximum signal); peak grid ma. (each unit), 22; effective load resistance (plate to plate), 8000 ohms; maximum-signal power output, 10 watts. These types are used principally for renewal purposes.

6N6G

6N5

MEDIUM-MU TRIODE

Glass octal type used as detector, amplifier, or oscillator in radio receivers. Outline 14C, OUTLINES SECTION. Tube requires octal socket. Heater volts (ac/dc), 6.3; amperes, 0.3. Except for interelectrode capacitances, this type is identical electrically with type 76. Type 6P5-GT is a DISCONTINUED type listed for reference only.


LOW-MU TRIODE— REMOTE-CUTOFF PENTODE


Glass octal type used as an amplifier. Outtine 23, OUTLINES SECTION. Heater volts (ac/dc), 6.3; amperes, 0.3. Except for interelectrode capacitances, this type is identical electrically with type 6F7. Type 6P7-G is a DISCONTINUED type listed for reference only.

TWIN DIODE—HIGH-MU TRIODE

Metal type 6Q7 and glass octal types 6Q7-G and 6Q7-GT used as combined detector, amplifier, and avc tubes in radio receivers. Outlines 3, 23, and 15A, respectively, OUTLINES SECTION. Types 6Q7 and 6Q7-GT are used principally for renewal purposes. Type 6Q7-G is a DISCONTINUED type listed for reference only. Tubes require octal socket. Heater volts (ac/dc), 6.3; amperes, 0.3. These types are simi-








lar electrically in most respects to types 6SQ7 and 6AT6. Maximum ratings and typical operation of the triode unit as a class A_1 amplifier are the same as those for type 6AT6 except that with a plate voltage of 100 volts, the transconductance is 1200 μ mhos and the plate resistance 58000 ohms. For triode-unit, grid-bias considerations and diode curves, refer to type 6AV6. K7 G72

THREE-UNIT TRIODE

Duodecar type containing one medium-mu and two high-mu triode units used as combined sync-clipper and gated-agc-amplifier tube in television receivers employing series-con-



Ilmit No

nected heater strings. Outline 12A, OUTLINES SECTION. Tube requires duodecar twelve-contact socket and may be mounted in any position. Heater volts (ac/dc), 6.3; amperes, 0.6; warm-up time (average), 11 seconds.

CLASS A1 AMPLIFIER

| Channelseristics | Unit | | | |
|---|-------|-------|------------|-------|
| Characteristics: | No. 1 | Unit | No. 2 or 3 | |
| Plate Voltage | 150 | 100 | 250 | volts |
| Grid Voltage | 0 | -1 | -2 | volts |
| Amplification Factor | 18 | 100 | 100 | |
| Plate Resistance (Approx.) | 7000 | 80000 | 62500 | ohms |
| Transconductance | 2500 | 1250 | 1600 | µmhos |
| Plate Current | 22 | 0.5 | 1.2 | ma |
| Grid Voltage (Approx.) for plate current of 10 µa | -13 | | -4.5 | volts |

GATED AGC AMPLIFIER AND SYNC CLIPPER

For operation in a 525-line, 30-frame system

| | | Unit Ivo. | |
|--|----------------------|----------------------|-------|
| Maximum Ratings, (Design-Maximum Values): | Unit No. 1 | 2 or 3 | |
| PLATE VOLTAGE | 330 max | 330 max | volts |
| STEADY-STATE POSITIVE-PULSE GRID VOLTAGE ° | 5 max | - | volts |
| PEAK POSITIVE-PULSE GRID VOLTAGE | 60 max | - | volts |
| DC GRID VOLTAGE: | | | |
| Positive-bias value | 0 max | 0 max | volts |
| Negative-bias value | -100 max | -100 max | volts |
| PLATE DISSIPATION | 3 max | 1.2 max | watts |
| PEAK HEATER-CATHODE VOLTAGE: | | | |
| Heater negative with respect to cathode | 200 max | 200 max | volts |
| Heater positive with respect to cathode | 200 ^m max | 200 ^m max | volts |
| | | | |



6Q11

6P5GT

6**P**7**G**

Maximum Circuit Values:

PD2 PT3 H2 S: 6R7 () ■ 6 K

TWIN DIODE-MEDIUM-MU TRIODE

Metal type 6R7 and glass octal types 6R7-G and 6R7-GT used as combined detector, amplifier, and avc tubes. Outlines 3, 23, and 15A, respectively, OUTLINES SECTION. Tubes require octal sockets. Within their maximum ratings, these types are identical electrically with type 6BF6 except for capacitances. Maximum ratings of triode unit as class A₁ amplifier: plate volts, 250 max; plate dissipation, 2.5 max

6R7 6**R**7**G** 6R7GT

watts. For typical operation as a resistance-coupled amplifier, refer to Chart 7, RESISTANCE COUPLED AMPLIFIER SECTION. Types 6R7-G and 6R7-GT are DISCONTINUED types listed for reference only. Type 6R7 is used principally for renewal purposes.



MEDIUM-MU TRIODE

Miniature types having high perveance used as vertical deflection amplifiers in television receivers. Type 6S4-A has a controlled heater warm-up time for use in television receivers em-



ploying series-connected heater strings. Outline 8D, OUTLINES SECTION. Tubes require miniature nine-contact socket and may be mounted in any position. Type 6S4 is a DISCONTINUED type listed for reference only.

| HEATER VOLTAGE (AC/DC) HEATER CURRENT. HEATER WARM-UP TIME (Average) for 6S4-A. DIRECT INTERELECTRODE CAPACITANCES (Approx.): | 6.3 0.6 11 | volts ampere seconds |
|--|------------------|----------------------------|
| Grid to Plate | 2.4 | pf |
| Grid to Cathode and Heater Plate to Cathode and Heater | 4.2 | pf pf |
| Characteristics: CLASS A, AMPLIFIER | | P |
| CLASS A1 AMPLIFIER | | |
| Plate Voltage | 250 | volts |
| Grid Voltage | -8 | volts |
| Amplification Factor | 16.5 | |
| Plate Resistance (Approx.) | 3700 | ohms |
| Transconductance | 4500 | μmhos |
| Plate Current | 24 | ma |
| Plate Current for grid voltage of -15 volts | 4 | ma |
| Grid Voltage (Approx.) for plate current of 50 µa | -22 | volts |

VERTICAL DEFLECTION AMPLIFIER

For operation in a 525-line, 30-frame system

Maximum Ratings, (Design-Maximum Values):


| DC PLATE VOLTAGE. | 550 max | volts |
|--|-----------------|-------|
| PEAK POSITIVE-PULSE PLATE VOLTAGE [†] | 2200 max | volts |
| PEAK NEGATIVE-PULSE GRID VOLTAGE. | -250 max | volts |
| PEAK CATHODE CURRENT | 105 max | ma |
| AVERAGE CATHODE CURRENT. | 30 max | ma |
| PLATE DISSIPATION | 8.5 max | watts |
| PEAK HEATER-CATHODE VOLTAGE: | | |
| Heater negative with respect to cathode | | volts |
| Heater positive with respect to cathode | 200 m ax | volts |

Maximum Circuit Value:

Grid-Circuit Resistance:

REMOTE-CUTOFF PENTODE

Metal type 6S7 and glass octal type 6S7-G used in rf and if stages of automobile receivers employing avc. Outlines 4 and 23, respectively, OUTLINES SECTION. Type 6S7 is used principally for renewal purposes. Type 6S7-G is a DISCONTINUED type listed for reference only. Tubes require octal socket. Heater volts, 6.3; amperes, 0.15. Typical operation as Class A₁ amplifier: plate volts, 250 (300 maz); grid-



No.2 volts, see curve page 66; grid-No.2 supply volts, 300 max; grid-No.1 volts, -3 (0 max); grid No.3 connected to cathode at socket; plate ma., 8.5; grid-No.2 ma., 2; plate resistance (Approx.), 1.0 megohm; transconductance, 1750 µmhos; plate dissipation, 2.25 max watts; grid-No.2 input: for grid-No.2 voltages up to 150 volts, 0.25 max watt; for grid-No.2 voltages between 150 and 300 volts, see curve page 66. Peak heater-cathode volts, 90 max.

TRIPLE DIODE—HIGH-MU TRIODE

Glass octal type used as audio amplifier, AM detector, and FM detector in AM/FM receivers. Diode unit No.2 is used for AM detection, and diode units No.1 and No.3 are used for FM detection. Outline 15A, OUTLINES SECTION, except over-all length is 3-5/8 max inches and seated height is 3-1/16 max inches. Tube requires octal socket. Heater volts (ac/dc), 6.3; amperes, 0.3. Typical operation of triode




unit as class A_1 amplifier: plate volts, 250 (300 max); grid volts, -2; amplification factor, 100; plate resistance (Approx.), 91000 ohms; transconductance, 1100 µmhos; plate dissipation, 0.5 max watt; platma., 0.9; peak heater-cathode volts, 90 max. Maximum plate ma. for diode units, 1.0 max (each unit). Peak heater-cathode volts (diode unit No.1), 90 max. For diode operation curves, refer to type 6AV6. Type 6S8-GT is used principally for renewal purposes.

PENTAGRID CONVERTER

Metal type 6SA7 and glass octal type 6SA7-GT used as converters in superheterodyne circuits. They are similar in performance to type 6BE6. For general discussion of pentagrid types, see *Frequency Conversion* in ELECTRON TUBE APPLICA-TIONS SECTION. Both tubes have excellent frequency stability. Tubes require octal socket and may be mounted in any position. Outlines 2 and 14C, respectively, OUTLINES SECTION. Type 6SA7-GT is used principally for renewal purposes.





| HEATER VOLTAGE (AC/DC) | 6.3 | volts |
|--|----------------|--------|
| HEATER CURRENT. | 0.3 | ampere |
| DIRECT INTERELECTRODE CAPACITANCES for 6SA7: | | - |
| Grid No.3 to All Other Electrodes (RF Input) | 9.5* | pf |
| Plate to All Other Electrodes (Mixer Output) | 9.5* | pf |
| Grid No.1 to All Other Electrodes (Osc. Input) | 7* | pf |
| Grid No.3 to Plate | 0.25 max* | pf |
| Grid No.3 to Grid No.1 | 0.15 max* | pf |
| Grid No.1 to Plate | $0.06 max^{*}$ | pf |
| Grid No.1 to Shell, Grid No.5, and All Other Electrodes except Cathode | 4.4 | pf |
| Grid No.1 to Cathode | 2.6 | pf |
| Cathode to Shell, Grid No.5, and All Other Electrodes except Grid No.1 | 5 | pf |
| * With shell connected to cathode. | | |

CONVERTER

Maximum Ratings, (Design-Center Values):

6**S**7

6**S**7**G**

658G1

Related type:

1258G1

6SA7

6SA7GT

Related types:

12SA7, 12SA7GT

| Plate Voltage | 300 max | volts |
|---|---------|-------|
| GRIDS-NO.2-AND-NO.4 (SCREEN-GRID) VOLTAGE | 100 max | volts |

| GRIDS-NO.2-AND-NO.4 SUPPLY VOLTAGE | | 300 max | volts |
|--|-------------------|----------------|-----------|
| GRID-NO.3 (CONTROL-GRID) VOLTAGE: | | 50 | |
| Negative bias value | | -50 max | volts |
| Positive bias value | | 0 max | volts |
| PLATE DISSIPATION | | 1.0 max | watt |
| GRIDS-NO.2-AND-NO.4 INPUT. | | 1.0 max | watt |
| CATHODE CURRENT. | | 14 max | ma |
| PEAK HEATER-CATHODE VOLTAGE: | | | |
| Heater negative with respect to cathode | | 90 max | volts |
| Heater positive with respect to cathode | | 90 max | volts |
| | | | |
| Typical Operation: Sep | parate Excitation | t | |
| Plate Voltage | . 100 | 250 | volts |
| Grid No.5 and shell (6SA7 only) | . Connect | ed to cathode | at socket |
| Grids-No.2-and-No.4 Voltage | . 100 | 100 | volts |
| Grid-No.3 Voltage | 2 | -2 | volts |
| Grid-No.1 (Oscillator-Grid) Resistor | . 20000 | 20000 | ohms |
| Plate Resistance (Approx.) | . 0.5 | 1.0 | megohm |
| Conversion Transconductance | . 425 | 450 | µmhos |
| Grid-No.3 Voltage (Approx.) for transconductance of 10 µmhos | -25 | -25 | volts |
| Grid-No.3 Voltage (Approx.) for conversion transconductance | | | |
| of 100 µmhos | | -9 | volts |
| Plate Current | | 3.5 | ma |
| Grids-No.2-and-No.4 Current. | | 8.5 | ma |
| Grid-No.1 Current | | 0.5 | ma |
| Cathode Current | | 12.5 | ma |
| | | | |
| NOTE: The transconductance between grid No.1 and grids 1 | NO.2 and NO.4 C | connected to l | nate (not |


No.1 and pros No.2 and No.4 connected to prate the following conditions: grids No.2, No.3 at 0 volts; grids No.2 and No.4 and plate at 100 volts; for 6SA7 only, grid No.5 and shell are connected to cathode at socket. \dagger The characteristics shown with separate excitation correspond very closely to those obtained in a self-excited oscillator circuit operating with zero bias.



PENTAGRID CONVERTER

Metal type used as converter in superheterodyne circuits. Because of its high conversion and oscillator transconductance, it is especially useful in FM converter service in the 100megacycle region. The 6SB7-Y has a micanol base which minimizes drift in oscillator frequency during warm-up period. For general discussion of pentagrid types, see *Frequency Con*-


version in ELECTRON TUBE APPLICATIONS SECTION. Outline 2, OUTLINES SECTION. Tube requires octal socket and may be mounted in any position. Heater volts (ac/dc), 6.3; amperes, 0.3. For maximum ratings and characteristics in converter service, refer to type 6BA7. Type 6SB7-Y is used principally for renewal purposes.



HIGH-MU TWIN TRIODE

Metal type used as phase inverter in radio equipment. Each unit may also be used in voltage-amplifier circuits. Outline 2, OUTLINES SECTION. Tube requires octal socket. Heater volts (ac/dc), 6.3; amperes, 0.3. Characteristics as class A_1 amplifier (each unit): plate volts, 250 max; grid volts, -2; amplification factor, 70; plate resistance (approx.); 53000 ohms; transconductance, 1325 µmhos; plate ma., 2; peak

heater-cathode volts, 90 max. This type is used principally for renewal purposes.



HIGH-MU TRIODE

Metal type 6SF5 and glass octal type 6SF5-GT are used in resistance-coupled amplifier circuits. Outlines 2 and 14C, respectively, OUT-LINES SECTION. Type 6SF5-GT may be supplied with pin No.1 omitted. Tubes require octal socket. Characteristics, application, and references under type 6F5 apply to types 6SF5 and 6SF5-GT. Heater volts (ac/dc), 6.3; amperes, 0.3. These types are used principally for renewal purposes.



6SB7Y

Related type: 125C7



RCA Receiving Tube Manual

DIODE— REMOTE-CUTOFF PENTODE


Metal type used as combined rf or if amplifier and detector or avc tube in radio receivers. Also used as resistance-coupled af amplifier. Outline 2, OUTLINES SECTION. Tube requires octal socket. Heater volts (ac/dc), 6.3; amperes, 0.3. Typical operation of pentode unit as class A_1 amplifier: plate volts, 250 (300 max); grid-No.2 volts, 100 (300 max); grid-No.1 volts, -1 (0 max); plate resistance (approx.), 0.7 meg-



ohm; transconductance, 2050 μ mhos; plate ma., 12.4; grid-No.2 ma., 3.3; plate dissipation, 3.5 max watts; grid-No.2 input, 0.5 max watt; peak heater-cathode volts, 90 max. For diode operation curves, refer to type 6AV6. Type 6SF7 is used principally for renewal purposes.

SEMIREMOTE-CUTOFF PENTODE


Metal type used as rf-amplifier tube in wide-band and high-frequency applications (up to 18 megacycles). Outline 2, OUTLINES SEC-TION. Tube requires octal socket. Heater volts (ac/dc), 6.3; amperes, 0.3. Characteristics as class A₁ amplifier: plate volts, 250 (300 max); grid-No.2 volts, 150 (300 max); grid-No.1 volts -2.5 (0 max); plate resistance, greater than 1 megohm; transconductance, 4000 μ mhos; plate



ma., 9.2; grid-No.2 ma., 3.4; plate dissipation, 3 max watts; grid-No.2 input, 0.6 max watt; peak heatercathode volts, 90 max. This type is used principally for renewal purposes.

SHARP-CUTOFF PENTODE

Metal type used as rf-amplifier tube in high-frequency, wide-band applications, and as a limiter tube in FM equipment. Outline 2, OUTLINES SECTION. Tube requires octal socket. Heater volts (ac/dc), 6.3; amperes, 0.3. Characteristics as class A: amplifier: plate volts, 250 (300 max); grid-No.2 volts, 150 (300 max); grid-No.1 volts, -1 (0 max); plate resistance (approx.), 0.9 megohm; transconductance, 4900



μmhos; plate ma., 10.8; grid-No.2 ma., 4.1; plate dissipation, 3 max watts; grid-No.2 input, 0.7 max watt; peak heater-cathode volts, 90 max. This type is used principally for renewal purposes.



6SF7

Related type:

125F7

Related type:

125G7

6SH7

Related type:

12SH7

SHARP-CUTOFF PENTODE

Metal type 6SJ7 and glass octal type 6SJ7-GT used as rf amplifiers and biased detectors. As a detector, either type is capable of delivering large audio-frequency output voltage



with relatively small input voltage. Outlines 2and 14C, respectively, OUTLINES SECTION. Tubes require octal socket and may be mounted in any position. Type 6SJ7-GT is used principally for renewal purposes.

| Heater Voltage (ac/dc) Heater Current. Direct Interelectrode Capacitances for 6SJ7:° | 6.3 0.3 | volts ampere |
|--|------------|-----------------|
| Pentode Connection: | | |
| Grid No.1 to Plate | 0.005 max | pf |
| Grid No.1 to Cathode, Heater, Grid No.2, and Grid No.3 | 6.0 | pf |
| Plate to Cathode, Heater, Grid No.2, and Grid No.3 | 7.0 | pf |
| Triode Connection: | | - |
| Grid No.1 to Plate | 2.8 | pf |
| Grid No.1 to Cathode and Heater | 3.4 | pf |
| Plate to Cathode and Heater | 11 | pf |
| ^o With shell connected to cathode. | | |

With grids No.2 and No.3 connected to plate.

CLASS A1 AMPLIFIER

| Maximum Ratings, (Design-Center Va | lues): | | Triode Connection* | Pentode Connection | |
|---|---|--|---|---|--|
| PLATE VOLTAGE | | | 250 max | 300 max | volts |
| GRID-NO.2 (SCREEN-GRID) VOLTAGE GRID-NO.2 SUPPLY VOLTAGE | | | - | 300 max | ve page 70 volts |
| GRID-NO.1 (CONTROL-GRID) VOLTAGE, PLATE DISSIPATION | | | $\begin{array}{c} 0 \ max \\ 2,5 \ max \end{array}$ | $\begin{array}{c} 0 \ max \\ 2.5 \ max \end{array}$ | volts watts |
| GRID-NO.2 INPUT: | | | | | |
| For grid-No.2 voltages up to 150 v For grid-No.2 voltages between 15 | 0 and $3($ | 00 volts | _ | 0.7 max See cury | watt ve page 70 |
| PEAK HEATER-CATHODE VOLTAGE: Heater negative with respect to ca | | | | 90 max | volts |
| Heater positive with respect to cat | hode | | 90 max | 90 max 90 max | volts |
| | | | | | |
| Innical Operation | | Triode | Pentode | | |
| Typical Operation: | Co | nnection* | Connecti | on | |
| Plate Voltage | | | Connecti 100 | on 250 | volts |
| Plate Voltage Grid No.3 | Co | nnection* | Connection 100 Connected to ca | on 250 ithode at soc | ket |
| Plate Voltage. Grid No.3 Grid-No.2 Voltage. | Co 180 | nnection* 250 – | Connection 100 Connected to ca 100 | on 250 athode at soc 100 | ket volts |
| Plate Voltage. Grid No.3. Grid-No.2 Voltage. Grid-No.1 Voltage. | Co 180 - -6 | nnection* 250 - - -8.5 | Connection 100 Connected to ca | on 250 ithode at soc | ket |
| Plate Voltage. Grid No.3 Grid-No.2 Voltage. Grid-No.1 Voltage. Amplification Factor. | Co 180 - -6 19 | nnection* 250 - -8.5 19 | Connecti 100 Connected to ca 100 -3 - | on 250 athode at soc 100 | ket volts volts |
| Plate Voltage. Grid No.3 Grid-No.2 Voltage. Grid-No.1 Voltage. Amplification Factor. Plate Resistance (Approx.). | Co 180 - -6 19 8250 | nnection* 250 -8.5 19 7600 | Connecti 100 Connected to ca 100 -3 700000 | on 250 athode at soc 100 -3 - t | ket volts volts ohms |
| Plate Voltage. Grid No.3. Grid-No.2 Voltage. Grid-No.1 Voltage. Amplification Factor. Plate Resistance (Approx.). Transconductance. | Co 180 - -6 19 | nnection* 250 - -8.5 19 | Connecti 100 Connected to ca 100 -3 - | on 250 athode at soc 100 | ket volts volts |
| Plate Voltage. Grid No.3 Grid-No.2 Voltage. Amplification Factor. Plate Resistance (Approx.) Transconductance. Grid-No.1 Voltage (Approx.) for plate | $\begin{array}{c} Co\\ 180\\ -\\ -6\\ 19\\ 8250\\ 2300 \end{array}$ | nnection* 250 -8.5 19 7600 | Connecti 100 Connected to cs 100 -3 700000 1575 | on 250 100 at soc -3 - t 1650 | ket volts volts μmhos |
| Plate Voltage. Grid No.3 Grid-No.2 Voltage. Grid-No.1 Voltage. Amplification Factor. Plate Resistance (Approx.) Transconductance. Grid-No.1 Voltage (Approx.) for plate current of 10 µa. | Co 180 | nnection* 250 - -8.5 19 7600 2500 - | Connecti 100 Connected to ca 100 -3 700000 1575 -8 | on 250 100 at soc -3 - 1650 -8 | ket volts ohms μmhos volts |
| Plate Voltage. Grid No.3 Grid-No.2 Voltage. Amplification Factor. Plate Resistance (Approx.) Transconductance. Grid-No.1 Voltage (Approx.) for plate | $\begin{array}{c} Co\\ 180\\ -\\ -6\\ 19\\ 8250\\ 2300 \end{array}$ | nnection* 250 -8.5 19 7600 | Connecti 100 Connected to cs 100 -3 700000 1575 | on 250 100 at soc -3 - t 1650 | ket volts volts μmhos |

* Grids No.2 and No.3 connected to plate.

Ga


† Greater than 1 megohm.

REMOTE-CUTOFF PENTODE

Metal type 6SK7 and glass octal type 6SK7-GT used as rf or if amplifiers in radio receivers. Outlines 2 and 14C, respectively, OUT-LINES SECTION. Tubes require octal socket. Heater volts (ac/dc), 6.3; amperes, 0.3. Characteristics as class A, amplifier: plate volts, 250 (300 max); grid No.3 connected to cathode at socket; grid-No.2 volts, 100 (300 max); grid-No.1 volts-3(0 max); plate resistance (approx.),



0.8 megohm; transconductance, 2000 µmhos; plate ma., 9.2; grid-No.2 ma., 2.6; plate dissipation, 4 max watts; grid-No.2 input, 0.4 max watt; peak heater-cathode volts, 90 max. These types are used principally for renewal purposes.



SIGSK7 BCI6SK7-GT

HIGH-MU TWIN TRIODE

Glass octal type used as phase inverter in radio equipment. Each unit may also be used in resistance-coupled amplifier circuits. Outline 14C, OUT-LINES SECTION. Tube requires

6SL7GT Related type: 12SL7GT

octal socket and may be mounted in any position. Except for the common heater, each triode unit is independent of the other. For typical operation as phase inverter or resistance-coupled amplifier, refer to RESISTANCE-COUPLED AMPLIFIER SECTION.

| HEATER VOLTAGE (AC/DC) | | | volts ampere |
|---|---------------------------|---------------------------------|-----------------|
| DIRECT INTERELECTRODE CAPACITANCES (Approx.):° Grid to Plate Grid to Cathode and Heater Plate to Cathode and Heater ° With external shield connected to cathode | 2.8 3 .0 | Unit No. 2 2.8 3.4 3.2 | pf pf pf |

CLASS A1 AMPLIFIER (Each Unit)

Maximum Ratings, (Design-Center Values):

| PLATE VOLTAGE. GRID VOLTAGE, Positive-bias value. PLATE DISSIPATION. | 0 max | volts volts watt |
|--|-------|------------------------|
| PAAK HEATER-CATHODE VOLTAGE: Heater negative with respect to cathode Heater positive with respect to cathode | | volts volts |

RCA Receiving Tube Manual


Characteristics:

| Plate Voltage | volts |
|----------------------------|------------|
| Grid Voltage | volts |
| Amplification Factor | |
| Plate Resistance (Approx.) | ohms |
| Transconductance | μ mhos |
| Plate Current | ma |

6SN7GT 6SN7GTA 6SN7GTB Related types: 12SN7GT, 12SN7GTA

MEDIUM-MU TWIN TRIODE

Glass octal types used as combined vertical oscillators and vertical deflection amplifiers, and as horizontal deflection oscillators, in television receivers. Each unit may also be used in




multivibrator or resistance-coupled amplifier circuits in radio equipment. Type 6SN7-GTB has a controlled heater warm-up time to permit use in series-connected heater strings. Outline 14C, OUTLINES SECTION. Tubes require octal socket and may be mounted in any position. Except for the common heater, each triode unit is independent of the other. For typical operation as resistance-coupled amplifier, refer to RESISTANCE-COUPLED AMPLIFIER SECTION. Types 6SN7-GT and 6SN7-GTA are DISCONTINUED types listed for reference only.

| HEATER VOLTAGE (AC/DC) HEATER CURRENT . HEATER WARM-UP TIME (Average) for 6SN7-GTB DIRECT INTERELECTRODE CAPACITANCES (Approx.) for 6SN7-GTE | | 0.6 | volts ampere seconds |
|---|-------------------------|--------------------------------|----------------------------|
| Grid to Plate. Grid to Cathode and Heater. Plate to Cathode and Heater. | Unit No.1 4.0 2.2 | Unit No.2 3.8 2.6 0.7 | pf pf pf |

CLASS A1 AMPLIFIER (Each Unit)

| 6SN7-GTB | |
|------------------|--|
| 450 max | volts |
| 20 max | ma |
| | |
| | watts |
| 7.5 max | watts |
| | |
| | volts |
| $200^{\circ}max$ | volts |
| | |
| 250 | volts |
| -8 | volts |
| | |
| | ohms |
| 2600 | μ mhos |
| | 450 max 20 max 5 max 7.5 max 200 max 200°max 250 |



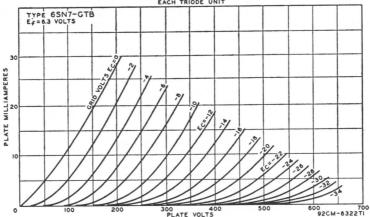

| Plate Current. Plate Current for grid voltage of -12.5 volts Grid Voltage (Approx.) for plate current of 10 µa | $\frac{10}{-7}$ | 9 1.3 -18 | ma ma volts |
|--|-----------------|-----------------|-------------------|
| Maximum Circuit Value: | | | |
| Grid-Circuit Resistance: For fixed-bias operation | | 1.0 max | megohm |
| ^o The dc component must not exceed 100 volts. | | | |

OSCILLATOR (Each Unit)

For operation in a 525-line, 30-frame system


| | 6SN7-GTB | | |
|--|------------------|------------------|---------|
| | Vertical | Horizonta | |
| | Deflection | Deflection | |
| Maximum Ratings, (Design-Center Values): | Oscillator | Oscillator | |
| DC PLATE VOLTAGE | 450 max | 450 max | volts |
| PEAK NEGATIVE-PULSE GRID VOLTAGE | -400 max | -600 max | volts |
| PEAK CATHODE CURRENT | 70 max | 300 max | ma |
| AVERAGE CATHODE CURRENT | 20 max | 20 max | ma |
| PLATE DISSIPATION: | - | - | |
| For either plate | 5 max | 5 max | watts |
| For both plates with both units operating | 7.5 max | 7.5 max | watts |
| PEAK HEATER-CATHODE VOLTAGE: | 202 | | |
| Heater negative with respect to cathode | 200 max | 200 max | volts |
| Heater positive with respect to cathode | $200^{\circ}max$ | $200^{\circ}max$ | volts |
| Maximum Circuit Value: | | | |
| Grid-Circuit Resistance | 2.2 max | 2.2 max | megohm |
| Ghu-oncuit Resistance | a, a mut | a. a mut | megonim |
| VERTICAL DEFLECTION AMPLIFI | ER (Each Unit) | | |
| For operation in a 525-line, 30-fr | rame system | | |
| Maximum Ratings, (Design-Center Values): | | 6SN7-GTI | B |
| DC PLATE VOLTAGE. | | 450 max | volts |
| PEAK POSITIVE-PILLEE DI ATE VOLTACE # (Absolute marimum) |) | 1500 mar | |

| DC PLATE VOLTAGE | 450 max | volts |
|--|------------------|-------|
| PEAK POSITIVE-PULSE PLATE VOLTAGE # (Absolute maximum) | 1500 max | volts |
| PEAK NEGATIVE-PULSE GRID VOLTAGE | -250 max | volts |
| PEAK CATHODE CURRENT | 70 max | ma |
| AVERAGE CATHODE CURRENT | 20 max | ma |
| PLATE DISSIPATION: | | |
| For either plate | 5 max | watts |
| For both plates with both units operating | 7.5 max | watts |
| PEAK HEATER-CATHODE VOLTAGE: | | |
| Heater negative with respect to cathode | 200 max | volts |
| Heater positive with respect to cathode | $200^{\circ}max$ | volts |
| | | |

Maximum Circuit Value:

Grid-Circuit Resistance:

° The dc component must not exceed 100 volts.



TWIN DIODE—HIGH-MU TRIODE

Metal type 6SQ7 and glass octal type 6SQ7-GT used as combined detector, amplifier, and avc tube in radio receivers. Outlines 2 and 14C, respectively, OUTLINESSECTION. Tubes 6SQ7 6SQ7GT Related types: 125Q7, 125Q7GT

require octal socket and may be mounted in any position. These types are similar electrically to type 6Q7 in many respects, but they have a higher-mu triode. Diodebiasing of the triode unit is not suitable because of the probability of triode platecurrent cutoff even with relatively small signal voltages applied to the diode circuit. Type 6SQ7-GT is used principally for renewal purposes.

| HEATER VOLTAGE (AC/DC) | 6.3 0.3 | volts |
|---|------------|-------|
| DIRECT INTERELECTRODE CAPACITANCES for 6SQ7:° | | |
| Triode Unit: | | |
| Grid to Plate | 1.6 | pf |
| Grid to Cathode and Heater | 3.2 | pf |
| Plate to Cathode and Heater | 3 | pf |
| | | 343 |

| Either Diode Plate to Cathode and Heater. Triode Grid to Plate of Diode No.1. Triode Grid to Plate of Diode No.2. ° With shell connected to cathode. | $\dots 0.03 max$ | pf pf pf |
|--|--|--|
| TRIODE UNIT AS CLASS A, AMPLIFIE | R | |
| Maximum Ratings, (Design-Center Values); | | |
| PLATE VOLTAGE. GRID VOLTAGE, Positive-bias value. PLATE DISSIPATION. PEAK HEATER-CATHODE VOLTAGE: Heater negative with respect to cathode. Heater positive with respect to cathode. | 0 max 0.5 max 90 max | volts volts watt volts volts |
| Characteristics: | | |
| Plate Voltage. 100 Grid Voltage. -1 Amplification Factor. 100 Plate Resistance (Approx.) 110000 Transconductance. 925 Plate Current. 0.5 | $250 \\ -2 \\ 100 \\ 85000 \\ 1175 \\ 1.1$ | volts volts µmhos ma |
| | | |

= RCA Receiving Tube Manual =

DIODE UNITS

Maximum Rating, (Design-Center Value):

PLATE CURRENT (Each Unit) 1.0 max ma Two diode plates are placed around a cathode, the sleeve of which is common to the triode unit. Each diode plate has its own base pin. For diode operation curves, refer to type 6AV6.

TWIN DIODE --- MEDIUM-MU TRIODE

6SR7 Related type: 12SR7 Metal type used as combined detector, amplifier, and avc tube. It is equivalent in performance to miniature type 6BF6. Outline 2, OUTLINES SECTION. Tube requires octal socket and may be mounted in any position. Heater volts (ac/dc) 6.3; amperes, 0.3. Maximum ratings and typical operation of triode unit as class A_1 amplifier: plate volts, 250 max; grid volts, -9: amplification factor, 16; plate re-



sistance (approx.), 8500 ohms; transconductance, 1900 μ mhos; plate ma., 9.5; plate dissipation, 2.5 max watts; peak heater-cathode volts, 90 max. For diode-operation curves, refer to type 6AV6. Type 6SR7 is used principally for renewal purposes.

REMOTE-CUTOFF PENTODE

Metal type used in rf or if stages of radio receivers particularly those employing avc. Outline 2, OUTLINES SECTION. Tube requires octal socket and may be mounted in any position. Heater volts (ac/dc), 6.3; amperes 0.15. Typical operation as class A₁ amplifier: plate volts, 250 (300 max); grid-No.2 supply volts, 300 max; grid-No.2 volts, 100; grid-No.1 volts, -3; grid No.3 connected to cathode at socket;



plate resistance (approx.), 1 megohm; transconductance, 1850 µmhos; plate ma., 9; grid-No.2 ma., 2; plate dissipation, 2.25 max watts; grid-No.2 input, 0.35 max watts. Type 6SS7 is used principally for renewal purposes.

TWIN DIODE-MEDIUM-MU TRIODE


Metal type used as combined detector, amplifier, and ave tube. Within maximum ratings this type is electrically identical to type 6BF6 except for interelectrode capacitances and heater current. Outline 2, OUTLINES SEC-TION. Tube requires octal socket and may be mounted in any position. Heater volts (ac/dc), 6.3; amperes, 0.15. Maximum ratings of triode



unit as class A_1 amplifier: plate volts, 250 max; plate dissipation, 2.5 max watts. For diode operation curves, refer to type 6AV6. Type 6ST7 is a DISCONTINUED type listed for reference only.

TWIN DIODE-HIGH-MU TRIODE

Metal type used as combined detector, amplifier, and ave tube in radio receivers. Except for heater-current rating and interelectrode capacitances, this type is essentially the same electrically as type 6AT6. Outline 2, OUTLINES SECTION. Tube requires octal socket. Heater volts (ac/dc), 6.3; amperes, 0.15. For diode operation curves, refer to type 6AV6. Type 6SZ7 is a DISCONTINUED type listed for reference only.



ar purposes

6SS7

6ST7

6SZ7

Technical Data



PD

PD-

KD

KD2

MEDIUM-MU TRIODE

Miniature type used as oscillator in tuners of uhf television receivers. Outline 7A, OUT-LINES SECTION. Tube requires miniature seven-contact socket. Heater volts (ac/dc), 6.3; amperes, 0.225. Characteristics as class A1 amplifier: plate-supply volts, 80; cathode-bias resistor, 150 ohms; plate ma., 18; amplification factor, 13; transconductance, 7000 µmhos. Maximum ratings as oscillator in uhf television re-

6T4

6**T**7G

6T8

6T8A

Related types:


5T8, 19T8

ceivers: plate volts, 200 max; grid ma., 8 max; cathode ma., 30 max; plate dissipation, 3.5 max watts; peak heater-cathode volts, 50 max. This type is used principally for renewal purposes.

TWIN DIODE-HIGH-MU TRIODE

Glass octal type used as combined detector. amplifier, and avc tube in radio receivers. Outline 23, OUTLINES SECTION. Heater volts (ac/dc), 6.3; amperes, 0.15. Typical operation as class A1 amplifier: plate volts, 250 max; grid volts, -3; plate ma., 1.2; plate resistance (approx.), 62000 ohms; amplification factor, 65; transconductance, 1050 µmhos. For diode operation curves, refer to type 6AV6. Type 6T7-G is a DISCONTINUED type listed for reference only.

TRIPLE DIODE—HIGH-MU TRIODE



audio amplifier, AM detector, and FM detector in AM/FM radio receivers. Diode unit No.1 is used for AM detection, and diode units No.2 and No.3

are used for FM detection. Type 6T8-A has a controlled heater warm-up time for use in receivers employing series-connected heater strings. Outline 8B, OUTLINES SECTION. Tubes require miniature nine-contact socket and may be mounted in any position. For typical operation as resistance-coupled amplifier, refer to RE-SISTANCE-COUPLED AMPLIFIER SECTION. Type 6T8 is a DISCONTIN-UED type listed for reference only.

| HEATER VOLTAGE (AC/DC) HEATER CURRENT. HEATER WARM-UP TIME (Average) for 6T8-A | | $\begin{array}{r} 6.3\\ 0.45\\ 11\end{array}$ | volts ampere seconds |
|--|---------------------|---|----------------------------|
| DIRECT INTERELECTRODE CAPACITANCES for 6T8-A: | Without External | With External | |
| Triode Unit: | Shield | Shield* | |
| Grid to Plate | 1.7 | 1.7 | pf |
| Grid to Cathode, Internal Shield (pin 7), and Heater | 1.6 | 1.7 | pf |
| Plate to Cathode, Internal Shield (pin 7), and Heater | 1.2 | 2.4 | pf |
| Diode Units: | | | |
| Diode-No.1 Plate to Cathode, Internal Shield (pin 7), | | | |
| and Heater | 3.8 | 3.8 | pf |
| Diode-No.2 Plate to Cathode, Internal Shield (pin 3), | 0.0 | 0.00 | |
| and Heater | 3.8 | 3.8• | pf |
| Diode-No.3 Plate to Cathode, Internal Shield (pin 7), | 3.4 | 3.6 | nf |
| and Heater. Diode-No.2 Cathode, Internal Shield (pin 3) to All Other | 0,4 | 0.0 | pf |
| Electrodes, and Heater | 7.5 | 8.5 | pf |
| Triode Grid to any Diode Plate | 0.034 max | 0.034 max | pf |
| * With external shield connected to pin 7 except as noted. | | | P - |
| • With external shield connected to pin 7 except as noted. | | | |

ith external shield connected to pin 3 With external shield connected to pins 4 and 5.


TRIODE UNIT AS CLASS A, AMPLIFIER


| Maximum Ratings, (Design-Maximum Values): | | |
|---|---------|-------|
| PLATE VOLTAGE | 330 max | volts |
| GRID VOLTAGE, Positive bias value | 0 max | volts |
| PLATE DISSIPATION | 1.1 max | watts |
| PEAK HEATER-CATHODE VOLTAGE: | | |
| Heater negative with respect to cathode | 100 max | volts |
| Heater positive with respect to cathode | 100 max | volts |
| | | |

— RCA Receiving Tube Manual =

Characteristics:

| Plate Voltage Grid Voltage Amplification Factor Plate Resistance (Approx.) Transconductance Plate Current | $70 \\ 54000 \\ 1300$ | $250 \\ -3 \\ 70 \\ 58000 \\ 1200 \\ 1.0$ | volts volts ohms µmhos ma |
|--|-----------------------|---|---------------------------------------|
| DIODE UNITS | 0.0 | 1.0 | ma |
| Maximum Ratings, (Design-Maximum Values): | | | |
| PLATE CURRENT (Each Unit) | | 5.5 max | ma |
| PEAK HEATER-CATHODE VOLTAGE (Unit No.2): Heater negative with respect to cathode Heater positive with respect to cathode | | 100 max 100 max | volts volts |



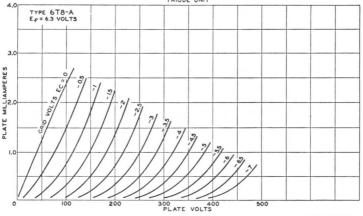


92CM- 7063T

ELECTRON-RAY TUBE

6U5

6U7G

Glass type used to indicate visually, by means of a fluorescent target, the effects of a change in a controlling voltage. It is used as a convenient, non-mechanical means of indicating accurate radio-receiver tuning. Maximum dimensions: over-all length, 4-3/16 inches; seated height, 3-9/16 inches; diameter, 1-3/16 inches. Tuberequiressix-contact socket. For a discussion of electron-ray tube considerations, refer to




ELECTRON TUBE APPLICATIONS SECTION. Heater volts (ac/dc), 6.3; amperes, 0.3. Typical operation in indicator service: plate- and target-supply volts, 250 (285 max); target-supply volts, 125 min; series triode-plate resistor, 1 megohm; target ma., 4; triode-plate max, 0.24; triode-plate dissipation, 1 max watt; triode-grid volts (approx.), -22 for 0° shadow angle, 0 for 90° shadow angle; peak heater-cathode volts, 90 max. This type is used principally for renewal purposes.

REMOTE-CUTOFF PENTODE

Glass octal type used in rf and if stages of radio receivers employing avc. It is also used as a mixer in superheterodyne circuits. Maximum over-all length, 4-7/8 inches; maximum diameter, 1-9/16 inches; Tube requires octal socket. Heater volts (ac/dc), 6.3; amperes, 0.3. Typical operation as class A₁ amplifier: plate volts, 250 (300 max); grid-No.2 supply volts, 300 max; grid-No.2 volts, 100; grid No.3 con-



nected to cathode at socket; grid-No.1 volts, -3; plate resistance (approx.), 0.8 megohm; transconductance, 1600 µmhos; plate ma., 8.2; grid-No.2 ma., 2; plate dissipation, 2.25 max watts; grid-No.2 input 0.25 max watt. This is a DISCONTINUED type listed for reference only.



MEDIUM-MU TRIODE— SHARP-CUTOFF PENTODE

Miniature types used as combined oscillator and mixer tubes in television receivers utilizing an intermediate frequency in the order of 40 megacycles per second. Type 6U8-A has a con6U8 6U8A Related types: 5U8, 9U8A

trolled heater warm-up time for use in television receivers employing series-connected heater strings. Outline 8B, OUTLINES SECTION. Tubes require miniature nine-contact socket and may be mounted in any position. Type 6U8 is a DIS-CONTINUED type listed for reference only.

| HEATER VOLTAGE (AC/DC) HEATER ('URRENT HEATER WARM-UP TIME (Average) for 6U8-A | | 6.3 0.45 11 | volts ampere seconds |
|--|-----------|-------------------|----------------------------|
| | Without | With | 00001140 |
| DIRECT INTERELECTRODE CAPACITANCES: | External | External | |
| Triode Unit: | Shield | Shield | |
| Grid to Plate | 1.8 | 1.8 | pf |
| Grid to Cathode, Heater, Pentode Cathode, Pentode Grid | | | |
| No.3, and Internal Shield | 2.8 | 2.8 | pf |
| Plate to Cathode, Heater, Pentode Cathode, Pentode Grid | | | |
| No.3, and Internal Shield | 1.5 | 2 | pf |
| Pentode Unit: Grid No.1 to Plate | 0.010 max | 0.006 max | pf |
| Grid No.1 to Cathode. Heater, Grid No.2, Grid No.3, and | 0.010 max | 0.000 mar | pi |
| Internal Shield. Plate to Cathode, Heater, Grid No.2, Grid No.3, and In- | 5.0 | 5.0 | pf |
| ternal Shield. | 2.6 | 3.5 | |
| Triode Cathode to Heater Pentode Cathode, Pentode Grid No.3, and Internal Shield to | 3 | 3• | pf |
| Heater. | 3 | 3• | pf |
| Pentode Grid No.1 to Triode Plate | 0.2 max | 0.2 max | pf |
| Pentode Plate to Triode Plate | 0.1 max | 0.02 max | pf |
| With external shield connected to pin 4 except as noted. | | | |

With external shield connected to pin 4 except as noted.

• With external shield connected to pin 6.

CLASS A1 AMPLIFIER

| Maximum Ratings, (Design-Maximum Values): | Triode Unit | Pentode Unit | |
|---|-------------|--------------|---------|
| PLATE VOLTAGE | 330 max | 330 max | volts |
| GRID-NO.2 (SCREEN-GRID) SUPPLY VOLTAGE. | | 330 max | volts |
| GRID-NO.2 VOLTAGE. | - | See curve | page 70 |
| GRID-NO.1 (CONTROL-GRID) VOLTAGE, Positive-bias value | 0 max | 0 max | volts |
| PLATE DISSIPATION | 2.5 max | 3 max | watts |
| GRID-NO.2 INPUT: | | | |
| For grid-No.2 voltages up to 165 volts | | 0.55 max | watt |
| For grid-No.2 voltages between 165 and 330 volts | - | See curve | page 70 |
| PEAK HEATER-CATHODE VOLTAGE: | | | |
| Heater negative with respect to cathode | 200 max | 200 max | volts |
| Heater positive with respect to cathode | 200 max | 200 max | volts |

| Characteristics: | Triode Unit | Pentode Unit | |
|--|-------------|--------------|------------|
| Plate Voltage | 125 | 125 | volts |
| Grid-No.2 Voltage | | 110 | volts |
| Grid-No.1 Voltage | -1 | -1 | volt |
| Amplification Factor | 40 | - | |
| Plate Resistance (Approx.) | - | 0.2 | megohm |
| Transconductance | | 5000 | μ mhos |
| Grid-No.1 Voltage (Approx.) for plate current of 20 µa | -9 | -8 | volts |
| Plate Current | 13.5 | 9.5 | ma |
| Grid-No.2 Current. | | 3.5 | ma |
| The dc component must not exceed 100 volts. | | | |

HALF-WAVE VACUUM RECTIFIER

Miniature type used as a damper tube in horizontal deflection circuits of television receivers. Outline 9B, OUTLINES SECTION, except vertical dimensions are 7/32 inch shorter



than shown. Tube requires miniature nine-contact socket and may be mounted in any position. It is especially important that this tube, like other power-handling tubes, be adequately ventilated. Heater volts (ac/dc), 6.3; amperes, 1.75.

DAMPER SERVICE

For operation in a 525-line, 30-frame system

| Maximum Katings, (Design-Center Values): | | |
|--|--------------------|-------|
| PEAK INVERSE PLATE VOLTAGE# (Absolute Maximum) | $6000 \dagger max$ | volts |
| PEAK PLATE CURRENT. | 800 max | ma |
| DC PLATE CURRENT | 135 max | ma |
| PEAK HEATER-CATHODE VOLTAGE: | | |
| Heater negative with respect to cathode # (Absolute Maximum) | 6750†∎max | volts |
| Heater positive with respect to cathode | $300^{\circ} max$ | volts |
| | | |

#The duration of the voltage pulse must not exceed 15 per cent of one horizontal scanning cycle. In a 525-line, 30-frame system, 15 per cent of one horizontal scanning cycle is 10 microseconds.

† Under no circumstances should this absolute value be exceeded.

The dc component must not exceed 750 volts.

° The dc component must not exceed 100 volts.



6V3A

BEAM POWER TUBE

Metal type 6V6 and glass octal types 6V6-GT and 6V6-GTA are used as output amplifiers in automobile, battery-operated, and other receivers in which reduced plate-current drain



is desirable. Outlines 5, 14C, and 14C, respectively, OUTLINES SECTION. Type 6V6-GT may be supplied with pin No.1 omitted. Tubes require octal socket and may be mounted in any position. These tubes are equivalent in performance to type 6AQ5-A. Refer to type 6AQ5-A for average plate characteristic curves. Type 6V6-GT is a DISCONTINUED type listed for reference only.

| HEATER VOLTAGE (AC/DC) | 6V6° . 0.3 . 10 | 6.3 0.45 11 6V6-GT 6V6-GTA 0.7 9.0 7.5 | volts ampere seconds pf pf |
|--|---|---|--|
| CLASS A, AMPLIFIER | | | |
| Maximum Ratings, (Design-Maximum Values): | | | |
| PLATE VOLTAGE. GRID-NO.2 (SCREEN-GRID) VOLTAGE. PLATE DISSIPATION. GRID-NO.2 INPUT. PEAK HEATER-CATHODE VOLTAGE: Heater negative with respect to cathode. Heater positive with respect to cathode. | | 350 max 315 max 14 max 2.2 max 6V6-GT 200 max 200 max | volts volts watts watts volts volts |
| Typical Operation: | | | |
| Plate Voltage 180 Grid-No.2 Voltage 180 Grid-No.1 (Control-Grid) Voltage -8.5 Peak AF Grid-No.1 Voltage 8.5 Zero-Signal Plate Current 29 Maximum-Signal Plate Current 30 Zero-Signal Grid-No.2 Current 3 Hate Resistance (Approx) 50000 Transconductance 3700 Load Resistance 5500 Total Harmonic Distortion 8 Maximum-Signal Power Output 2 | $\begin{array}{c} 250\\ 250\\ -12.5\\ 42.5\\ 4.5\\ 4.5\\ 7\\ 50000\\ 4100\\ 5000\\ 8\\ 4.5 \end{array}$ | 315 225 -13 13 34 35 2.2 6 80000 3750 8500 12 5.5 | volts volts volts ma ma ohms μ mhos per cent watts |

| Characteristics (Triode Connection);▲ | | |
|--|-----------------------|-------------|
| Plate Voltage | 250 | volts |
| Grid-No.1 (Control-Grid) Voltage | -12.5 | volts |
| Amplification Factor | 9.8 | |
| Plate Resistance (Approx.) Transconductance | 1960 5000 | ohms |
| Plate Current. | 49.5 | µmhos ma |
| Grid-No.1 Voltage (Approx.) for plate current of 0.5 ma | -36 | volts |
| ^A Grid No.2 connected to plate. | | |
| PUSH-PULL CLASS A1 AMPLIFIER | | |
| Maximum Ratings: (Same as for class A1 amplifier) | | |
| Typical Operation (Values are for two tubes): | | |
| Plate Voltage | 285 | volts |
| Grid-No.2 Voltage | 285 | volts |
| Grid-No.1 (Control-Grid) Voltage | -19 38 | volts |
| Zero-Signal Plate Current | 70 | ma |
| Maximum-Signal Plate Current | 92 | ma |
| Zero-Signal Grid-No.2 Current | 4 13.5 | ma |
| Maximum-Signal Grid-No.2 Current | 8000 | ohms |
| Total Harmonic Distortion | 3.5 | per cent |
| Maximum-Signal Power Output | 14 | watts |
| Maximum Circuit Values: | | |
| Grid-No.1-Circuit Resistance: | | |
| For fixed-bias operation | 0.1 max | megohm |
| For cathode-bias operation | 0.5 max | megohm |
| | | |
| VERTICAL DEFLECTION AMPLIFIER (Triode Connection) [*] For operation in a 525-line, 30-frame system | | |
| | | |
| Maximum Ratings, (Design-Maximum Values): | 950 | |
| DC PLATE VOLTAGE | $350 max \\ 1200 max$ | volts |
| PEAK NEGATIVE-PULSE GRID-NO.1 (CONTROL-GRID) VOLTAGE | 275 max | volts |
| PEAK CATHODE CURRENT. | 115 max | ma |
| AVERAGE CATHODE CURRENT. | 40 max | ma |
| PLATE DISSIPATION PEAK HEATER-CATHODE VOLTAGE: | 10 max | watts |
| Heater negative with respect to cathode | 200 max | volts |
| Heater positive with respect to cathode | 200 max | volts |
| Maximum Circuit Value: | | |
| Grid-No.1-Circuit Resistance: | | |
| | 0.0 | |

Grid No.4 connected to plate.

The duration of the voltage pulse must not exceed 15 per cent of one vertical scanning cycle. In a 525line, 30-frame system, 15 per cent of one vertical scanning cycle is 2.5 milliseconds.

The dc component must not exceed 100 volts.





TWIN DIODE-LOW-MU TRIODE

Glass octal type used as combined detector, amplifier, and avc tube. Outline 23, OUT-LINES SECTION. Except for interelectrode capacitances, this type is identical electrically with type 85. Heater volts (ac/dc), 6.3; amperes, 0.3. For diode operation curves, refer to type 6AV6. Type 6V7-G is a DISCONTINUED type listed for reference only.

HALF-WAVE VACUUM RECTIFIER

Glass octal type used as damper tube in television receivers. Outline 14C,OUTLINESSECTION.Thistype may be supplied with pin No.1 omitted. Tube requires octal socket and may 6V7G

6W4GT

be mounted in any position. Socket terminals 1, 2, 4, and 6 should not be used as tie points. It is especially important that this tube, likeother power-handling tubes, be adequately ventilated. Power-rectifier operation of this type is not recommended.

RCA Receiving Tube Manual =

| HEATER VOLTAGE (AC). HEATER CURRENT. DIRECT INTERELECTRODE CAPACITANCES (Approx.): Plate to Cathode and Heater. Cathode to Plate and Heater. Heater to Cathode. | 6.3 1.2 6 13 7 | volts amperes pf pf pf |
|---|--|--|
| DAMPER | | |
| For operation in a 525-line, 30-frame system | | |
| Maximum Ratings, (Design-Center Values): | | |
| PEAK INVERSE PLATE VOLTAGE (Absolute Maximum)* PEAK PLATE CURRENT. DC PLATE CURRENT. PLATE DISSIPATION. PEAK HEATER-CATHODE VOLTAGE: Heater negative with respect to cathode (Absolute Maximum)* Heater positive with respect to cathode. | 3850 max 750 max 125 max 3.5 max 2300 [®] max 300 [®] max | volts ma watts volts volts |
| Characteristics, Instantaneous Value: | | |
| Tube Voltage Drop for plate current of 250 ma | 21 | volts |
| * The duration of the voltage pulse must not exceed 15 per cent of one horizont: 525-line, 30-frame system, 15 per cent of one horizontal scanning cycle is 10 mid | | cle. In a |

The dc component must not exceed 500 volts.

* The dc component must not exceed 100 volts.

6W6GT

Related type:

12W6GT

Mautinum Batings (Design Manis

BEAM POWER TUBE

Glass octal type used in the audio output stage of radio and television receivers. Triode-connected, it is used as a vertical deflection amplifier in television receivers. Outline 14C, OUT-




LINES SECTION. This type may be supplied with pin No.1 omitted. Tube requires octal socket and may be mounted in any position.

| HEATER VOLTAGE (AC/DC) | 6.3 | volts |
|--|-----|----------|
| HEATER CURRENT DIRECT INTERELECTRODE CAPACITANCES: (Approx.): | 1.2 | amperes |
| Grid No.1 to Plate | 0.8 | pf |
| Grid No.1 to Cathode, Heater, Grid No.2, and Grid No.3 | 15 | pf pf |
| Plate to Cathode, Heater, Grid No.2, and Grid No.3 | 9 | pf |

CLASS A1 AMPLIFIER

| Maximum Katings, (Design-Maximum Values): | | |
|---|----------|-------|
| PLATE VOLTAGE | 330 max | volts |
| GRID-NO.2 (SCREEN-GRID) VOLTAGE | 165 max | volts |
| PLATE DISSIPATION | 12 max | watts |
| GRID-NO.2 INPUT. | 1.35 max | watts |
| PEAK HEATER-CATHODE VOLTAGE: | | |
| Heater negative with respect to cathode | 200 max | volts |
| Heater positive with respect to cathode | 200=max | volts |
| The dc component must not exceed 100 volts. | | |

AVERAGE PLATE CHARACTERISTICS

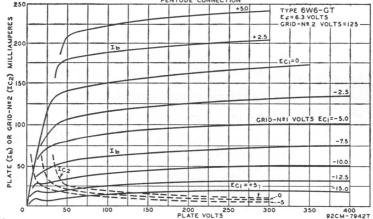


—— Technical Data —

Typical Operation:

| Typical Operation: | | | |
|---|---------------|------------------|---------------|
| Plate Supply Voltage | 110 | 200 | volts |
| Grid-No.2 Supply Voltage. | 110 | 125 | volts |
| Grid-No.1 (Control-Grid) Voltage | -7.5 | | volts |
| Cathode-Bias Resistor | | 180 | ohms |
| Peak AF Grid-No.1 Voltage | 7.5 | 8.5 | volts |
| Zero-Signal Plate Current | 49 | 46 | ma |
| Maximum-Signal Plate Current | 50 | 47 | ma |
| Zero-Signal Grid-No.2 Current. | 4 | 2.2 | ma |
| Maximum-Signal Grid-No.2 Current. | 10 | 8.5 | ma |
| Plate Resistance (Approx.) | 13000 8000 | 28000 8000 | ohms |
| Transconductance | 2000 | 4000 | µmhos ohms |
| Load Resistance | 10 | 10 | per cent |
| Total Harmonic Distortion (Approx.) | 2,1 | 3.8 | watta |
| Maximum-Signal Power Output | 2.1 | 0.0 | Walls |
| Characteristics (Triode Connection)*: | | | |
| | | 225 | |
| Plate Voltage. | | | volts |
| Grid-No.1 Voltage. | | -30 | volts |
| Amplification Factor | | $6.2 \\ 1600$ | - have a |
| Plate Resistance (Approx.) | | 3800 | ohms |
| Transconductance | | 22 | μ mhos |
| Plate Current Grid No.1 Voltage (Approx.) for plate current of 0.5 ma | | -42 | ma volts |
| | | -42 | VOIUS |
| *Grid No. 2 connected to plate. | | | |
| Maximum Circuit Values: | | | |
| | | | |
| Grid-No.1 Circuit Resistance: | | 0.1 | manahma |
| For fixed-bias operation. | | 0.1 max | megohm |
| For cathode-bias operation | | 0.5 max | megohm |
| VERTICAL DEFLECTION AMPLIF | IER | | |
| For operation in a 525-line, 30-frame | existem | | |
| For operation in a 555-title, 56-jrame | Triode | Pentode | |
| Maximum Ratings, (Design-Maximum Values): | Connection* | Connection | |
| | | | |
| DC PLATE VOLTAGE | 330 max | 330 max | volts |
| PEAK POSITIVE-PULSE PLATE VOLTAGE [†] | 1200 max | 1500 max | volts |
| DC GRID NO.2 (SCREEN-GRID) VOLTAGE | - | 165 max | volts |
| PEAK NEGATIVE-PULSE GRID-NO.1 VOLTAGE | -275 max | 275 max | volts |
| PEAK CATHODE CURRENT | 195 max | 195 max | ma |
| AVERAGE CATHODE CURRENT. | 65 max | 65 max | ma |
| PLATE DISSIPATION. | 8.5 max | 8 max 1.2 max | watts |
| GRID-NO.2 INPUT Peak Heater-Cathode Voltage: | | 1.2 max | watts |
| Heater negative with respect to cathode | 200 max | 200 max | volts |
| Heater positive with respect to cathode | 200 max | 200 max | volts |
| meater positive with respect to cathode | -00 max | | 40108 |
| Maximum Circuit Value: | | | |
| Grid-No.1-Circuit Resistance: | | | |
| For cathode-bias operation | 2.2 max | 2.2 max | megohms |
| a or carried o bran operation of the test of test | | | Borrand |

* Grid No.2 connected to plate.

The duration of the voltage pulse must not exceed 15 per cent of one vertical scanning cycle. In a 526-line, 30-frame system, 15 per cent of one vertical scanning cycle is 2.5 milliseconds.
The dc component must not exceed 100 volts.

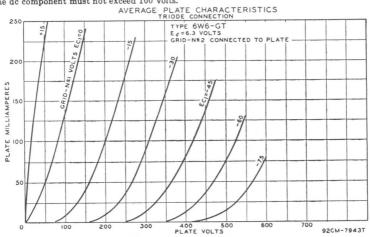

RCA Receiving Tube Manual =

SHARP-CUTOFF PENTODE

Glass octal type used as biased detector or high-gain amplifier in radio receivers. Outline 23, OUTLINES SECTION. Tube requires octal socket. Heater volts (ac/dc), 6.3; amperes, 0.15. Maximum ratings: plate volts, 300 max; grid-No.2 (screen-grid) volts, 100 max; grid-No.2 supply volts, 300 max; grid-No.1 (controlgrid) volts, 0 max; plate dissipation, 0.5 max

6W7G

6X/

Related type

12X4



watt; grid-No.2 input, 0.1 max watt. Within its maximum ratings, this type is identical electrically with type 6J7. Type 6W7-G is a DISCONTINUED type listed for reference only.

FULL-WAVE VACUUM RECTIFIER

Miniature type used in power supply of automobile and ac-operated radio receivers. Equivalent in performance to larger types 6X5 and 6X5-GT. Type 6X4 requires miniature seven-contact

socket and may be mounted in any position. Outline 7C, OUTLINES SECTION. It is especially important that this tube, like other power-handling tubes, be adequately ventilated. For discussion of Rating Chart and Operation Characteristics, refer to INTERPRETATION OF TUBE DATA. Heater volts (ac/dc), 6.3⁺; amperes, 0.6.

FULL-WAVE RECTIFIER

| Maximum Ratings, (Design-Maximum Values): | |
|--|--|
| PEAK INVERSE PLATE VOLTAGE. STEADY-STATE PEAK PLATE CURRENT (Per Plate) AC PLATE SUPPLY VOLTAGE (Per Plate, rms) DC OUTPUT VOLTAGE (At filter input)† DC OUTPUT CURRENT (Each plate)† HOT-SWITCHING TRANSIENT PLATE CURRENT. PAK HEATER-CATHODE VOLTAGE: Heater negative with respect to cathode. Heater positive with respect to cathode. | See Rating Chart 350 max volts 45 max ma # 450 max volts |
| OPERATION CHARACTERISTICS | OPERATION CHARACTERISTICS |
| FULL-WAVE CIRCUIT, CHOKE INPUT TO FILTER | FULL-WAVE CIRCUIT, CAPACITOR INPUT TO FILTER |
| TYPE 6X4 E = 6.3 VOLTS SUPPLY FREQUENCY=60 CPS — CHOKES OF INFINITE INDUCTANCE — CHOKES OF VALUES SHOWN — BOUNDARY LINE FOR CHOKE VALUES SHOWN CBA=SEE RATING CHART | TYPE 6X4 E € = 6.3 VOLTS FILTER-INPUT CAPACITOR = 10↓ € TOTAL EFFECT. PLATE-SUPPLY IMPEDANCE PER PLATE \$20 OHMS FOR CURVES 1-5 PER PLATE \$20 OHMS FOR CURVES 6-8 700- DEA = SEE RATING CHART |
| | |
| | |
| AS SHOWN | 600 |
| | 30 |
| 500 11 197 | 2 400 0 0 0 0 0 0 0 0 0 0 0 0 |
| | F 1230+ 1-1-1-1 |
| 400 1 450 - C | Davie 400 5 300 POLTS RMS PER PLATE |
| | P 250 |
| 5 300 325 A 325 B | SF TO 300 7 200 8 50 |
| | 5200 |
| | 8 |
| DISOV RMS PER PLATE | ° |
| 100 - 51 | 100 |
| | |
| A | |
| 0 20 40 60 80 100 DC LOAD MILLIAMPERES | 0 20 40 60 80 100 DC LOAD MILLIAMPERES |
| 352 92CM-8030TI | 92CM-803ITI |

| Typical Operation: Filter Input | Sine-Wave Capacitor | Operation Choke | Vibrator Operati Capacitor | on |
|--|------------------------|--------------------|-------------------------------|---------|
| AC Plate Supply Voltage (Each plate, rms) | 325 | 400 | - | volts |
| Filter Input Capacitor | | _ | 10 | μſ |
| Effective Plate Supply Impedance (Each plate) | 525 | | | ohms |
| Filter Input Choke | | 10 | - | henries |
| DC Output Current | 70 | 70 | 70 | ma |
| DC Output Voltage at Input to Filter (Approx.) | 310 | 340 | 240 | volts |


* When the heater is operated from a 3-cell (nominal-6-volt) storage-battery source, the permissible heater-voltage range is from 5 to 8 volts.

 \dagger This rating applies when the $6\rm X4$ is used in vibrator operation with a minimum duty cycle of 75 per cent.

If hot-switching is regularly required in operation, the use of choke-input circuits is recommended. Such circuits limit the hot-switching current to a value no higher than that of the peak plate current. When capacitor-input circuits are used, a maximum peak current value per plate of 1.1 amperes during the initial cycles of the hot-switching transient should not be exceeded.

The dc component must not exceed 100 volts.

• AC plate supply voltage is measured without load.





PD

FULL-WAVE VACUUM RECTIFIER

Metal type 6X5 and glass octal type 6X5-GT are used in power supply of automobile and ac-operated receivers. Outlines 5 and 14C, respectively, OUTLINES SECTION. Type



6X5-GT may be supplied with pin No.1 omitted. Both types require octal socket. Type 6X5 should be mounted in vertical position, but horizontal operation is permissible if pins 3 and 5 are in horizontal plane. Type 6X5-GT may be operated in any position. For maximum ratings, and typical operation, refer to type 6X4. Type 6X5 is a DISCONTINUED type listed for reference only.



Miniature type used as combined oscillator and mixer tube in television receivers utilizing an intermediate frequency in the order of 40 megacycles per second. In such service, the 6X8



gives performance comparable to that obtainable with a 6AG5 mixer and an oscillator consisting of one unit of a type 6J6. When used in an AM/FM receiver, the triode unit is used as an oscillator for both sections. In the AM section, the pentode unit is used as a high-gain pentode mixer; in the FM section, the pentode unit is used either as a pentode mixer or as a triode-connected mixer depending on signal-to-noise considerations. Outline 8B, OUTLINES SECTION. Tube requires miniature nine-contact socket and may be mounted in any position.

= RCA Receiving Tube Manual =

| HEATER VOLTAGE | | 6.3 0.45 | volts ampere |
|--|----------|---------------------|-----------------|
| | Without | With | |
| DIRECT INTERELECTRODE CAPACITANCES: | External | External | |
| TRIODE UNIT: | Shield | Shield [*] | |
| Grid to Plate | 1.5 | 1.5 | pf |
| Grid to Cathode and Heater | 2 | 2.4 | pf |
| Plate to Cathode and Heater | 0.5 | 1 | pf |
| PENTODE UNIT: | | | |
| Grid No.1 to Plate | 0.09 max | 0.06 max | pf |
| Grid No.1 to Cathode, Heater, Grid No.2, and Grid No.3 | 4.6 | 4.8 | pf |
| Plate to Cathode, Heater, Grid No.2, and Grid No.3 | 0.9 | 1.6 | pf |
| Pentode Grid No.1 to Triode Plate | 0.05 max | 0.04 max | pf |
| Pentode Plate to Triode Plate | 0.05 max | 0.008 max | pf |
| Heater to Cathode | 6.5 | 6.5 | pf |
| A With owtownol shield composed to soth do except or noted | | | |

With external shield connected to cathode except as noted.


• With external shield connected to pentode plate.


CLASS A1 AMPLIFIER


| Maximum Ratings, (Design-Maximum Values): | Triode Unit | Pentode Unit | |
|---|-------------|--------------|---------|
| PLATE VOLTAGE | 275 max | 275 max | volts |
| GRID NO.2 (SCREEN-GRID) SUPPLY VOLTAGE | - | 275 max | volts |
| GRID-NO.2 VOLTAGE. | - | See curve | page 70 |
| GRID-NO.1 (CONTROL-GRID) VOLTAGE, Positive-bias value | 0 max | 0 max | volts |
| PLATE DISSIPATION | 1.7 max | 2.3 max | watts |
| GRID-NO.2 INPUT: | | | |
| For grid-No.2 voltages up to 137.5 volts | - | 0.45 max | watt |
| For grid-No.2 voltages between 137.5 and 275 volts | - | See curve | page 70 |
| PEAK HEATER-CATHODE VOLTAGE: | | | |
| Heater negative with respect to cathode | 200 max | 200 max | volts |
| Heater positive with respect to cathode | 200 max | 200 max | volts |
| | | | |

| Characteristics: | Triode | Unit | Pentode Unit | |
|--|---------|-------|-----------------|------------|
| Plate Voltage | 125 | | 125 | volts |
| Grid No.3 | - | Conne | cted to cathode | at socket |
| Grid-No.2 Voltage | - | | 125 | volt |
| Grid-No.1 Voltage | -1 | | -1 | volt |
| Amplification Factor | 40 | | - | |
| Plate Resistance (Approx.) | 6000 | | 300000 | ohms |
| Transconductance | 6500 | | 5500 | μ mhos |
| Plate Current | | | 9 | ma |
| Grid-No.2 Current. | | | 2.2 | ma |
| Grid-No.1 Voltage (Approx.) for plate current of 20 µa | $^{-7}$ | | -6.5 | volts |
| The dc component must not exceed 100 volts. | | | | |



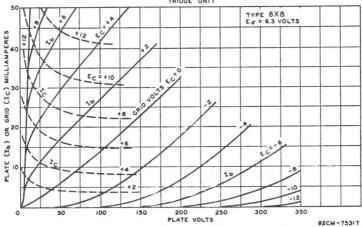



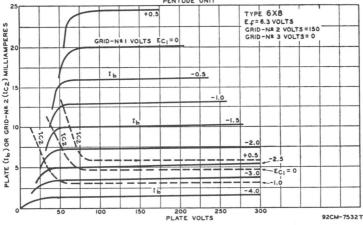

FULL-WAVE VACUUM RECTIFIER

PD2

5

6

.

8)K

PD.

ES²

P(3

H(2

NC

Glass type used in power supply of radio receivers. Maximum dimensions: over-all length, 4-3/16 inches; seated height, 3-9/16 inches; diameter, 1-9/16 inches. Heater volts (ac/dc), 6.3; amperes, 0.8. The maximum ac plate voltage per plate is 350 volts (rms), and the dc output current is 50 ma. This is a DISCONTINUED type listed for reference only.

BEAM POWER TUBE

Glass octal types used as output amplifier in radio receivers. Also used in rf-operated, high-voltage power supplies in television equipment. Except for envelope size and direct interelec6Y6G 6Y6GA

6Y5

trode capacitances, type 6Y6-G and type 6Y6-GA are identical. Outlines 26 and 19B, respectively, OUTLINES SECTION. Tubes require octal socket and may be mounted in any position.

| HEATER VOLTAGE (AC/DC) | | 6.3 1.25 | volts amperes |
|--|---------|-------------|------------------|
| DIRECT INTERELECTRODE CAPACITANCES (Approx.): | 6 Y 6-G | 6 Y 6-GA | |
| Grid No.1 to Plate | 0.7 | 0.7 | pf |
| Grid No.1 to Cathode, Heater, Grid No.2, and Grid No.3 | 15 | 12 | pf |
| Plate to Cathode, Heater, Grid No.2, and Grid No.3 | 11 | 7.5 | pf |
| CLASS A1 AMPLIFIER | | | |
| Maximum Ratings, (Design-Center Values): | | | |
| PLATE VOLTAGE. | | 200 max | volts |
| GRID-NO.2 (SCREEN-GRID) SUPPLY VOLTAGE. | | 200 max | volts |
| GRID-NO.2 VOLTAGE | | See curv | re page 70 |
| GRID-NO.2 INPUT: For grid-No.2 voltages up to 100 volts | | 1.75 max | watts |
| For grid-No.2 voltages between 100 and 200 volts | | | re page 70 |
| PLATE DISSIPATION. | | 12.5 max | watts |
| PEAK HEATER-CATHODE VOLTAGE: | | 12.0 1102 | 110000 |
| Heater negative with respect to cathode | | 180 max | volts |
| Heater positive with respect to cathode | | 180 max | volts |
| Typical Operation: | | | |
| Plate Voltage | 135 | 200 | volts |
| Grid-No.2 Voltage | 135 | 135 | volts |
| Grid-No.1 (Control-Grid) Voltage | -13.5 | -14 | volts |
| Peak AF Grid-No.1 Voltage | 13.5 | 14 | volts |

— RCA Receiving Tube Manual —

| Zero-Signal Plate Current | 58 | 61 | ma |
|-----------------------------------|--------|-------|----------|
| Maximum-Signal Plate Current. | 60 | 66 | ma |
| Zero-Signal Grid-No.2 Current. | 3.5 | 2.2 | ma |
| Maximum-Signal Grid-No.2 Current. | 11.5 | 9 | ma |
| Plate Resistance (Approx.) | · 9300 | 18300 | ohms |
| Transconductance | 7000 | 7100 | μmhos |
| Load Resistance | 2000 | 2600 | ohms |
| Total Harmonic Distortion | 10 | 10 | per cent |
| Maximum-Signal Power Output | 3.6 | 6 | watts |
| Maximum Circuit Values: | | | |
| Grid-No.1-Circuit Resistance: | | | |

| For fixed-bias operation | | • | | | • | | | | | | | | • • | | | |
|-----------------------------|--|---|--|--|---|------|---|--|--|--|--|------|-----|------|--|--|
| For cathode-bias operation. | | | | | | | , | | | | | | | | | |

HIGH-MU TWIN POWER TRIODE

Glass octal type used as class B amplifier in output stage of radio receivers. Outline 22, OUTLINES SECTION. For electrical characteristics, refer to type 79. Heater volts (ac/dc), 6.3; amperes, 0.6. This is a DISCONTINUED type listed for reference only.

Refer to type 84/6Z4

FULL-WAVE VACUUM RECTIFIER

Glass type used in power supply of radio receivers. Maximum dimensions: over-all length, 4-3/16 inches; seated height, 3-9/16 inches; diameter, 1-9/16 inches. Heater volts (ac/dc), 12.6 (series), 6.3 (parallel); amperes, 0.4 (series), 0.8 parallel). Maximum ac plate volts (per plate), 230; maximum dc output ma., 60. This is a DISCONTINUED type listed for reference only.

HIGH-MU TWIN POWER TRIODE

Glass octal type used as class B amplifier in output stage of radio receivers. Outline 22, OUTLINES SECTION. Tube requires octal socket. Heater volts (ac/dc), 6.3; amperes 0.3. Typical operation and maximum ratings as class B power amplifier: plate volts, 180 max; grid volts, 0; peak plate ma. per plate, 60 max; average plate dissipation, 8 max watts; zero-

signal plate ma. per plate, 4.2; plate-to-plate load resistance, 12000 ohms; output watts, 4.2 with average input of 320 milliwatts applied between grids. This is a DISCONTINUED type listed for reference only.


FULL-WAVE VACUUM RECTIFIER

Glass octal type used in power supply of radio equipment where economy of power is important. Outline 22, OUTLINES SECTION. Tube requires octal socket and may be mounted in any position. Heater volts (ac/dc), 6.3; amperes, 0.3. Maximum ratings: peak inverse plate volts, 1250; peak plate ma. per plate, 120; dc output ma., 40; peak heater-cathode volts, 450. This is a DISCONTINUED type listed for reference only.

MEDIUM-MU TRIODE

Glass lock-in type used as detector, amplifier, oroscillatorin radio equipment. Outline 13A, OUTLINES SECTION. Tube requires lock-in socket. Heater volts (ac/dc), 6.3; amperes, 0.3. Maximum ratings, typical operating conditions, and curves for type 7A4 are the same as for metal type 6J5. Type 7A4 is used principally for renewal purposes.





6Z5

6Y7G

6**Z**4


6**Z**7**G**



6ZY5G

0.1 max megohm 0.5 max megohm










BEAM POWER TUBE

Glass lock-in type used as output amplifier in radio receivers in which the plate voltage available for the output stage is relatively low. Outline 13B, OUTLINES SECTION. Tube requires lock-in socket. Heater volts (ac/dc), 6.3; amperes, 0.75. Typical operation and maximum ratings as class A1 amplifier: plate volts, 110 (125 max); grid-No.2 volts, 110 (125 max);

7A5

grid-No.1 volts, -7.5; peak af grid-No.1 volts, 7.5; plate resistance (approx.), 16,000 ohms; transconductance 5800 μ mhos; plate ma., zero-signal, 40 (maximum-signal, 41); grid-No.2 ma., zero-signal, 3 (maximum-signal, 7); load resistance, 2500 ohms; total harmonic distortion, 10 per cent; maximumsignal power output, 1.5 watts; peak heater-cathode volts, 90 max. This type is used principally for renewal purposes.



TWIN DIODE

Glass lock-in type used as detector, lowvoltage rectifier, or avc tube. Outline 13A, OUT-LINES SECTION. Tube requires lock-in socket. Heater volts (ac/dc), 6.3; amperes, 0.15. Maximum ratings as rectifier: ac plate volts per plate (rms), 150; dc output ma. per plate, 8; peak ma. per plate, 45; peak heater-cathode volts, 330. The application of this type is similar to that of metal type 6H6. Type 7A6 is used principally for renewal purposes.

REMOTE-CUTOFF PENTODE

Glass lock-in type used as rf or if amplifier in radio receivers. Outline 13A, OUTLINES SECTION. Tube requires lock-in socket. Heater volts (ac/dc), 6.3; amperes, 0.3. For maximum ratings, typical operation, and curves, refer to metal type 6SK7. Type 7A7 is used principally for renewal purposes.

OCTODE CONVERTER


Glass lock-in type used as converter in superheterodyne circuits. Outline 13A, OUT-LINES SECTION. Tube requires lock-in socket. Heater volts (ac/dc), 6.3; amperes, 0.15. Typical operation and maximum ratings as frequency converter: plate volts, 250 (300 max); grids-No.3-and-No.5 volts, 100 max; grid-No.2 supply volts, 250 applied through a 20000-ohm 7A6

7A7

(2

748

dropping resistor (300 max); grid-No.2 volts, 200 max; plate dissipation, 1 max watt; grids-No.3-and-No.5 input, 0.3 max watt; grid-No.2 input, 0.75 max watt; grid-No.4 volts, -3 (0 max); grid-No.1 resistor, 50000 ohms; plate ma, 3; grids-No.3-and-No.5 ma., 3.2; grid-No.2 ma., 4.2; grid-No.1 ma., 0.4; plate resistance (approx.), 0.7 megohm; conversion transconductance, 550 µmhos; peak heater-cathode volts, 90 max. This type is used principally for renewal purposes.



POWER PENTODE

Lock-in type used in output stage of video amplifier of television receivers. Outline 13B, OUTLINES SECTION. Tube requires lock-in socket. Heater volts (ac/dc), 6.3; amperes, 0.6. Characteristics and maximum ratings as Class A₁ amplifier: plate supply volts, 300 max; grid-No.2 supply volts, 150 (300 max); grid-No.2 volts, see curve page 70; grid-No.1 volts, posi-


7AD7

tive-bias value, 0 max; grid-No.2 input, for grid-No.2 voltages up to 150 volts, 1.2 max watts (for grid No.2 voltages between 150 and 300 volts, see curve page 70); plate dissipation, 10 max watts; cathodebias resistor, 68 ohms; plate ma., 28; grid-No.2 ma., 7; plate resistance (approx.), 0.3 megohm; transconductance, 9500 µmhos; peak heater-cathode volts, 90 max. Type 7AD7 is a DISCONTINUED type listed for reference only.

= RCA Receiving Tube Manual =

MEDIUM-MU TWIN TRIODE

Glass lock-in type used as voltage amplifier or phase inverter in radio equipment. Outline 18A,OUTLINESSECTION. Tube requires lockin socket. Heater volts (ac/dc), 6.3; amperes, 0.3. Characteristics and maximum ratings as Class A1 amplifier (each unit): plate supply volts, 250 (300 max); grid volts, positive-bias value, 0 max; cathode-bias resistor, 1100 ohms; plate ma., 9; transconductance, 2100 µmhos; amplification factor, 16; plate resistance (ap-



prox.), 7600 ohms, peak heater-cathode volts, 90 max. This type is used principally for renewal purposes.

SHARP-CUTOFF PENTODE


Glass lock-in type used as rf amplifier in ac/dc receivers or in mobile equipment where low heater current drain is important. Outline 13A, OUTLINES SECTION. Tube requires lock-in socket. Heater volts (ac/dc), 6.3; amperes, 0.15. Characteristics and maximum ratings as class A₁ amplifier: plate and grid-No.2 supply volts, 250 (300 max); grid-No.1 volts, positive-bias value, 0 max; plate dissipation, 2



max watts; grid-No.2 input, 0.75 max watt; grid No.3 and internal shield connected to cathode at socket; plate resistance (approx.), greater than 1 megohm; transconductance, 4200 μ mhos; cathodebias resistor, 250 obms; plate ma., 6; grid-No.2 ma., 2; peak heater-cathode volts, 90 max. This type is used principally for renewal purposes.

SHARP-CUTOFF PENTODE


Glass lock-in type used as rf amplifier in high-frequency and wide-band applications. Outline 13A, OUTLINES SECTION. Tube requires lock-in socket. Heater volts (ac/dc), 6.3; amperes, 0.15. Characteristics and maximum ratings as class A₁ amplifier: plate and grid-No. 2 supply volts, 250 (300 max); grid-No.2 volts, 250 (see curve page 70); grid-No.1 volts, positive-bias value, 0 max; plate dissipation, 2 max



watts; grid-No.2 input, for grid-No.2 voltages up to 150 volts, 0.7~max watt (for grid-No.2 voltages from 150 to 300 volts, see curve page 70); cathode-bias resistor, 250 ohms; grid No.3 and internal shield connected to cathode at socket; plate resistance (approx.), 1 megohm; transconductance, 3300 μ mhos; plate ma., 6.8; grid-No.2 ma. 1.9; peak heater-cathode volts, 90 max. Type 7AH7 is used principally for renewal purposes.

MEDIUM-MU TWIN TRIODE

Miniature type used as combined vertical deflection amplifier and vertical deflection oscillator in television receivers. This type has a controlled heater warm-up time for use in re-



ceivers employing series-connected heater strings. Each unit may also be used as a horizontal deflection oscillator, or in audio mixer, phase inverter, multivibrator, sync separator and amplifier, and resistance-coupled amplifier circuits in radio equipment. Outline 8B, OUTLINES SECTION. Heater volts (ac/dc), 7 in series arrangement, 3.5 in parallel arrangement; amperes, 0.3 (series), 0.6 (parallel); warm-up time (average) in parallel arrangement, 11 seconds. Except for heater ratings, this type is identical with miniature type 12AU7-A.

HIGH-MU TRIODE

Glass lock-in type used in resistancecoupled amplifier circuits. Outline 13A, OUT-LINES SECTION. Tube requires lock-in socket. Heater volts (ac/dc), 6.3; amperes, 0.3. Except for interelectrode capacitances, this type has the same maximum ratings and characteristics as metal types 6F5 and 6SF5. Type 7B4 is used principally for renewal purposes.




7 A F 7


7**A**H7

7AU7

7B4

- Technical Data =





Ĝ

G2(3

P(2

POWER PENTODE

Glass lock-in type used in output stage of radio receivers. Outline 13B, OUTLINES SEC-TION. Tube requires lock-in socket. Heater volts (ac/dc), 6.3; amperes, 0.4. Except for interelectrode capacitances, this type is the same electrically as glass-octal type 6K6-GT. Type 7B5 is used principally for renewal purposes.

TWIN DIODE—HIGH-MU TRIODE

Glass lock-in type used as combined detector, amplifier, and avc tube. Outline 13A, **OUTLINES SECTION.** Tube requires lock-in socket. Heater volts (ac/dc), 6.3; amperes, 0.3. Except for interelectrode capacitances, this type is the same electrically as metal type 6SQ7. Type 7B6 is used principally for renewal purposes.

REMOTE-CUTOFF PENTODE

Glass lock-in type used as rf or if amplifier in radio receivers employing avc. Outline 13A, **OUTLINES SECTION.** Tube requires lock-in socket. Heater volts (ac/dc), 6.3; amperes, 0.15. Characteristics and maximum ratings as class A1 amplifier: plate volts, 250 (300 max); grid-No.2 volts, 100 max; grid-No.1 volts, -3 (positive-bias value, 0 max); grid No.3 and internal 7**B**5

7**B**6

7**B**7

7B8

7C5

7C6

shield connected to cathode at socket; plate ma., 8.5; grid-No.2 ma., 1.7; grid-No.2 input, 0.25 max watt; plate dissipation, 2.25 max watts; plate resistance (approx.) 0.75 megohm; transconductance, 1750 µmhos; peak heater-cathode volts, 90 max. Type 7B7 is used principally for renewal purposes.



BS

PENTAGRID CONVERTER

Glass lock-in type used as frequency converter in superheterodyne circuits. Outline 13A OUTLINES SECTION. Tube requires lock-in socket. Heater volts (ac/dc), 6.3; amperes, 0.3. Except for interelectrode capacitances, this type is the same electrically as metal type 6A8. Type 7B8 is used principally for renewal purposes.

BEAM POWER TUBE


Glass lock-in type used as output amplifier in radio receivers. Outline 13B, OUTLINES SECTION. Tube requires lock-in socket. Heater volts (ac/dc), 6.3; amperes, 0.45. Refer to metal type 6V6 for maximum ratings and typical operation as class A1 amplifier and as pushpull class A1 amplifier. Type 7C5 is used principally for renewal purposes.

TWIN DIODE—HIGH-MU TRIODE

Glass lock-in type used as combined detector, amplifier, and avc tube. Outline 13A, OUTLINES SECTION. Tube requires lock-in socket. Heater volts (ac/dc), 6.3; amperes, 0.15. Characteristics and maximum ratings of triode unit as class A1 amplifier: plate volts, 250 (300 max); grid volts, -1 (positive-bias value, 0 max); plate ma., 1.3; amplification factor, 100; plate

resistance (approx.), 0.1 megohm; transconductance, 1000 µmhos; peak heater-cathode volts, 90 max. For diode operation curves and triode application, refer to miniature type 6AV6. Type 7C6 is used principally for renewal purposes.







359

SHARP-CUTOFF PENTODE


Glass lock-in type used as biased detector or rfamplifier. Outline 13A, OUTLINES SEC-TION. Tube requires lock-in socket. Heater volts (ac/dc), 6.3; amperes, 0.15. Characteristics and maximum ratings as class A1 amplifier: plate volts, 250 (300 max); grid-No.2 supply volts, 300 max; grid-No.2 volts, 100 max; grid-No.1 volts, -3 (positive-bias value, 0 max); grid



No.3 and internal shield connected to cathode at socket; grid-No.2 input, 0.1 max watt; plate dissipation, 1 max watt; plate resistance (approx.), 2 megohms; plate ma., 2; grid-No.2 ma., 0.5; transconductance, 1300 µmhos; peak heater-cathode volts, 90 max. This type is used principally for renewal purposes.


TWIN DIODE-MEDIUM-MU TRIODE

Glass lock-in type used as combined detector, amplifier, and avc tube. Outline 13A, **OUTLINES SECTION.** Tube requires lock-in socket. Heater volts (ac/dc), 6.3; amperes, 0.3. For maximum ratings, typical operation, and curves, refer to miniature type 6BF6. Type 7E6 is a DISCONTINUED type listed for reference only.



TWIN DIODE—REMOTE-CUTOFF PENTODE


Glass lock-in type used as combined detector, amplifier, and avc tube. Outline 13A, **OUTLINES SECTION.** Tube requires lock-in socket. Heater volts (ac/dc), 6.3; amperes, 0.3. Characteristics and maximum ratings of pentode unit as class A1 amplifier: plate volts, 250 (300 max); grid-No.2 supply volts, 300 max; grid-No.2 volts, 100 max; grid-No.1 volts, -3



(positive-bias value, 0 max); plate dissipation, 2 max watts; grid-No.2 input, 0.3 max watt: cathodebias resistor, 330 ohms; plate resistance (approx.), 0.7 megohm; transconductance, 1300 µmhos; plate ma., 7.5; grid-No.2 ma., 1.6; peak heater-cathode volts, 90 max. For diode curves, refer to type 6AV6. Type 7E7 is used principally for renewal purposes.

BEAM POWER TUBE


Glass octal type used as vertical deflection amplifier in television receivers employing series-connected heaterstrings.Outline14E,OUTLINES SECTION. Tube requires octal socket



and may be operated in any position. Heater volts (ac/dc), 7.2; amperes, 0.6; warm-up time (average), 11 seconds. Except for heater ratings, this type is identical with glass octal type 6EY6.

HIGH-MU TWIN TRIODE

Glass lock-in type used as phase inverter or resistance-coupled amplifier. Outline 13A, OUT-LINES SECTION. Tube requires lock-in socket. Heater volts (ac/dc), 6.3; amperes, 0.3. For maximum ratings, typical operation as class A₁ amplifier, and curves, refer to glass-octal type 6SL7-GT. Type 7F7 is used principally for renewal purposes.




7 E 7

7E6

7C7

7 EY 6 **Related type:** 6FY6

7F7



MEDIUM-MU TWIN TRIODE

Glasslock-in type used as amplifier or oscillator in radio equipment. Outline 13A, OUT-LINES SECTION, except over-all length is 2-9/32 max inches and seated length is 1-3/4inches. Tube requires lock-in socket. Heater volts (ac/dc), 6.3; amperes, 0.3. Characteristics and maximum ratings as class A₁ amplifier (each unit): plate supply volts, 250 (300 max); grid

7**F**8


volts, positive-bias value, 0 max; plate dissipation, 3.5 max watts (both units, 3.5 max watts); cathodebias resistor, 500 ohms; plate ma., 6.0; transconductance, 3300 µmhos; amplification factor, 48; peak heater-cathode volts, 90 max. This type is used principally for renewal purposes.

SHARP-CUTOFF PENTODE

Glass lock-in type used in video amplifiers of television receivers and in other applications requiring high transconductance. Outline 13A, OUTLINES SECTION. Tube requires lock-in socket. Heater volts (ac/dc), 6.3; amperes, 0.45. Characteristics and maximum ratings as class A₁ amplifier: plate volts, 250 (300 max); grid-No.2supply volts, 300 max; grid-No.2 volts,

7G7


100 max; plate dissipation, 1.5 max watts; grid-No.2 input, 0.3 max watt; grid-No.1 volts, -2; grid No.3 and internal shield connected to cathode at socket; plate resistance (approx.), 0.8 megohm; transconductance, 4500 μmhos; plate ma., 6; grid-No.2 ma., 2.0; peak heater-cathode volts, 90 max. This type is used principally for renewal purposes.



SEMIREMOTE-CUTOFF PENTODE

Glass lock-in type used as rf or if amplifier in radio receivers. Outline 13A, OUTLINES SECTION. Tube requires lock-in socket. Heater volts (ac/dc), 6.3; amperes, 0.3. Characteristics and maximum ratings as class A₁ amplifier: plate volts, 250 (300 max); grid-No.2 supply volts, 300 max; grid-No.2 volts, 150 (see curve page 70); grid-No.1 volts, positive-bias

value, 0 max; plate dissipation, 2.5 max watts; grid-No.2 input for grid-No.2 voltages up to 150 volts, 0.5 max watt (for grid-No.2 voltages between 150 and 300 volts, see curve page 70); grid No.3 and internal shield connected to cathode at socket; cathode-bias resistor, 180 ohms; plate resistance (approx.), 0.8 megohm; transconductance, 4000 µmhos; plate ma., 10; grid-No.2 ma., 3.2; peak heater-cathode volts, 90 max. This type is used principally for renewal purposes.



TRIODE—HEPTODE CONVERTER

Glass lock-in type used as combined oscillator and heptode mixer in radio receivers. Outline 13A, OUTLINESSECTION. Tube requires lock-in socket. Heater volts (ac/dc), 6.3; amperes, 0.3. For maximum ratings and typical operation, refer to glass-octal type 6J8-G. Type 7J7 is used principally for renewal purposes.

TWIN DIODE—HIGH-MU TRIODE

Glass lock in type used as FM detector and audio amplifier in circuits which require diode and triode units with separate cathodes. Outline 13A,OUTLINES SECTION. Tube requires lockin socket. Heater volts (ac/dc), 6.3; amperes, 0.3. For ratings and typical operation, refer to glass-octal type 6AQ7-GT. Type 7K7 is used principally for renewal purposes. 7H7

7J7

7K7

SHARP-CUTOFF PENTODE


Glass lock-in type used as rf and if amplifier inradio equipment. Outline 13A, OUTLINES SECTION. Tube requires lock-in socket. Heater volts (ac/dc), 6.3; amperes, 0.3. Typical operation as class A₁ amplifier: plate volts, 250 (300 max); grid-No.2 volts, 100; grid-No.1 volts, -1.5; grid No.3 tied to cathode at socket; cathode-bias resistor, 250 ohms; plate ma., 4.5;



grid-No.2 ma., 1.5; plate resistance (approx.), 1 megohm; transconductance, 3100 μ mhos. This is a DISCONTINUED type listed for reference only.


MEDIUM-MU TWIN TRIODE

Glass lock-in type used as voltage amplifier or phase inverter in radio equipment. Outline 13B, OUTLINESSECTION.Tuberequireslockin socket. Heater volts (ac/dc), 6.3; amperes, 0.6. For maximum ratings and typical operation of each triode unit, refer to metal type 6J5. The application of this type is similar to that of glass-octal type 6SN7-GT. Type 7N7 is used principally for renewal purposes.




PENTAGRID CONVERTER

Glass lock-in type used as converter in superheterodyne circuits. Outline 13A, OUT-LINESSECTION. Tube requires lock-in socket. Heater volts (ac/dc), 6.3; amperes, 0.3. For maximum ratings, typical operation in converter service, and curves, refer to metal type 6SA7. Type 7Q7 is used principally for renewal purposes.



TWIN DIODE— REMOTE-CUTOFF PENTODE


Glass lock-in type used as combined detector, amplifier, and avc tube. Outline 13A, OUT-LINES SECTION. Tube requires lock-in socket. Heater volts (ac/dc), 6.3; amperes, 0.3. Characteristics and maximum ratings of pentode unit as class A₁ amplifier: plate volts, 250 max; grid-No.2 supply volts, 250 max; grid-No.2 volts, 100 (see curve page70); grid-No.1 volts, -1 (pos-



itive-bias value, 0 max); plate dissipation, 2 max watts; grid-No.2 input for grid-No.2 voltages up to 125, 0.25 max watt (for grid-No.2 voltages between 125 and 250 volts, see curve page 70); plate resistance (approx.), 1.0 megohm; transconductance, 3200 μ mhos; plate ma., 5.7; grid-No.2 ma., 2.1; peak heater-cathode volts, 90 max. Refer to type 6AV6 for diode curves. Type 7R7 is used principally for renewal purposes.

TRIODE—HEPTODE CONVERTER

Glass lock-in type used as combined triode oscillator and heptode mixer in radio receivers. Outline 13A, OUTLINES SECTION. Tube requires lock-in socket. Heater volts (ac/dc), 6.3; amperes, 0.3. Typical operation of heptode unit: plate volts, 250 (300 maz); grids-No.2-and-No.4 volts, 100; grid-No.1 volts, -2; plate resistance, 1.25 megohms; conversion transconductance,



525 μmhos; plate ma., 1.8; grids-No.2-and-No.4 ma., 3.0. Typical operation of triode unit: plate supply volts, 250 (300 max) applied through a 20000-ohm dropping resistor bypassed by a 0.1-μ capacitor; grid resistor, 50000 ohms; plate ma., 5.0; total cathode ma. (both units), 10.2. This is a DISCONTINUED type listed for reference only.


7L7

7N7

707

7R7


757



SHARP-CUTOFF PENTODE

Glass lock-in type used as rf or if amplifier in radioreceivers. Outline 13A, OUTLINESSEC-TION. Tube requires lock-in socket. Heater volts (ac/dc), 6.3; amperes, 0.45. Characteristics and maximum ratings as class A1 amplifier: plate and grid-No.2 supply volts, 300 max; grid-No.2 series resistor, 40000 ohms; plate dissi-pation, 4 max watts; grid-No.2 input, 0.8 max

watt; grid No.3 connected to cathode at socket; cathode-bias resistor, 160 ohms; plate resistance (approx.), 0.3 megohm; transconductance, 5800 µmhos; plate ma., 10; grid-No.2 ma., 3.9; peak heater-cathode volts, 90 max. This type is used principally for renewal purposes.



PDI 5

8

PD2

KD2

KT&D

is

(3

(2

SHARP-CUTOFF PENTODE

Glass lock-in type used as rf or if amplifier in radio receivers. Outline 13A. OUTLINESSEC-TION. Tube requires lock-in socket. Heater volts (ac/dc), 6.3; amperes, 0.45. This type is the same as type 7V7 except for socket con-nections. Type 7W7 is used principally for renewal purposes.

TWIN DIODE—HIGH-MU TRIODE

Glass lock-in type used as combined detector, amplifier, and avc tube in circuits which require diodes with separate cathodes. Outline 13B,OUTLINESSECTION.Tuberequireslockin socket. Heater volts (ac/dc), 6.3; amperes, 0.3. Characteristics and maximum ratings of triode unit as class A1 amplifier: plate volts, 250 (300 max); grid volts, -1; amplification factor, 100; plate resistance (approx.), 67000 ohms; W7


7 X 7

transconductance, 1500 µmhos; plate ma., 1.9; peak heater-cathode volts, 90 max. This type is used principally for renewal purposes.

PD2 'n 6 NC(2 8

FULL-WAVE VACUUM RECTIFIER

Glass lock-in type used in power supply of automobile radio receivers and compact acautomobile radio receivers and compact ac-operated receivers. Outline 13A, OUTLINES SECTION. Tube requires lock-in socket. Heater volts (ac/dc), 6.3; amperes, 0.5. Maximum ratings: peak inverse plate volts, 1250; peak plate ma. per plate, 180; dc output ma., 70; peak heater-cathode volts, 450. For typical op-eration, refer to miniature type 6X4. Type 7Y4 is used principally for renewal purposes is used principally for renewal purposes.




FULL-WAVE VACUUM RECTIFIER

Glass lock-in type used in power supply of quires lock-in socket. Heater volts (ac/dc), 6.3; dc output ma., 100; peak heater-cathode volts, 450. Typical operation with capacitor-input fil-

automobile and ac-operated radio receivers. Outline 13B, OUTLINES SECTION, Tube reamperes, 0.9. Maximum ratings: peak inverse plate volts, 1250; peak plate ma. per plate, 300;

BS terms are plate-to-plate supply volts (rms), 650; total effective plate-supply impedance per plate, 75 min ohms; de output ma., 100. Typical operation with choke-input filter: ac plate-to-plate supply volts (rms), 900; filter-input choke, 6 min henries; dc output ma., 100. This type is used principally for renewal purposes.



MEDIUM-MU TRIODE-SHARP-CUTOFF PENTODE

Miniature type used in a wide variety of applications in television receivers employing series-connected heater strings. The pentode unit is used as a video amplifier, an if amplifier, or



7Y4

774


363

= RCA Receiving Tube Manual =

an agc amplifier. The triode unit is used in sync-amplifier, sync-separator, syncclipper, and phase-inverter circuits. Outline 8D, OUTLINES SECTION. Heater volts (ac/dc), 8.4; amperes, 0.45. Except for heater ratings, this type is identical with type 6AU8.

HIGH-MU TRIODE— SHARP-CUTOFF PENTODE


Miniature type used in a wide variety of applications in television receivers employing series-connected heater strings. The pentode unit is used as an amplifier and the triode



unit is used in low-frequency oscillator or sync circuits. Outline 8D, OUTLINES SECTION. Heater volts (ac/dc), 8.4; amperes, 0.45; warm-up time (average), 11 seconds. Except for heater ratings, this type is identical with miniature type 6AW8-A.

TWIN DIODE— MEDIUM-MU TWIN TRIODE


Duodecar type used as combined horizontal-deflection oscillator and horizontal phase detector in television receivers employing series-connected heater strings. Outline 12A, OUT-



LINES SECTION. Heater volts (ac/dc), 8.5; amperes, 0.45; warm-up time (average), 11 seconds. Except for heater ratings, this type is identical with duodecar type 6B10.

MEDIUM-MU TRIODE— SHARP-CUTOFF PENTODE

Miniature type used in a wide variety of applications in color and blackand-white television receivers employing series-connected heater strings. The pentode unit is used as a video ampli-



fier, an agc amplifier, or a reactance tube. The triode unit is used in low-frequency oscillator and phase-splitter circuits. Outline 8D, OUTLINES SECTION. Tube requires miniature nine-contact socket and may be operated in any position. Heater volts (ac/dc), 8.4; amperes, 0.45. Except for heater ratings, this type is identical with miniature type 6BA8-A.



8AW8A

Related type:

6AW8A

8B10

Related type:

6B10


8BA8A

Related type:


6BA8A

MEDIUM-MU TRIODE— SHARP-CUTOFF PENTODE

Miniature type used in a wide variety of applications in television receivers employing series-connected heater strings. The pentode unit is used as an if amplifier, a video amplifier, or



an agc amplifier. The triode unit is used in low-frequency oscillator circuits. Outline 8D, OUTLINES SECTION. Heater volts (ac/dc), 8.4; amperes, 0.45. Except for heater ratings, this type is identical with type 6BH8.



TWIN DIODE— HIGH-MU TRIODE

Miniature type used in a wide variety of applications in color and blackand-white television receivers employing series-connected heater strings. The triode unit is used in burst amplifier.

8BN8 Related type: 6BN8

af amplifier, and low-frequency oscillator applications. The diode units are used in phase-detector, ratio-detector or discriminator, and horizontal AFC discriminator circuits. Outline 8D, OUTLINES SECTION. Heater volts (ac/dc), 8.4; amperes, 0.45. Except for heater ratings, this type is identical with type 6BN8.




POWER PENTODE

Miniature type used in the output stage of audio-frequency amplifiers employing series-connected heater strings Outline 8E, OUTLINES SEC-TION. Heater volts (ac/dc), 8; am-

8BQ5 Related type: 6BQ5

peres, 0.6; warm-up time (average), 11 seconds. Except for heater ratings, this type is identical with type 6BQ5.




MEDIUM-MU TWIN TRIODE

Miniature type used as combined vertical deflection and horizontal deflection oscillator in television receivers employing series-connected heater strings. Outline 8D, OUTLINES SEC-

8CG7 Related type: 6CG7

TION. Heater volts (ac/dc), 8.4; amperes, 0.45; warm-up time (average), 11 seconds. Except for heater ratings, this type is identical with miniature type 6CG7.




MEDIUM-MU DUAL TRIODE

Miniature type used as combined vertical oscillator and vertical deflection amplifier in television receivers employing series-connected heater strings. Outline 8D, OUTLINES SEC-



TION. Heater volts (ac/dc), 8.4; amperes, 0.45; warm-up time (average), 11 seconds. Except for heater ratings, this type is identical with miniature type 6CM7.



TWIN DIODE— HIGH-MU TRIODE

Miniature type used as combined horizontal phase detector and reactance tube in television receivers employing series-connected heater strings. The triode unit is used in sync-



separator, sync-amplifier, or audio-amplifier circuits. Outline 8B, OUTLINES SECTION. Heater volts (ac/dc), 8.4 (series), 4.2 (parallel); amperes, 0.225 (series), 0.45 (parallel); warm-up time (average), 11 seconds (parallel). Except for heater ratings, this type is identical with type 6CN7.

MEDIUM-MU DUAL TRIODE

Miniature type used as combined vertical-deflection oscillator and vertical-deflection amplifier in television receivers employing series-connected heater strings. Outline 8D.OUTLINES

SECTION. Heater volts (ac/dc), 8.4; amperes, 0.45; heater warm-up time (average), 11 seconds. Except for heater ratings, this type is identical with type 6CS7.

MEDIUM-MU TRIODE— SHARP-CUTOFF PENTODE

Miniature type used in television receivers employing series-connected heater strings. Pentode unit is used as video amplifier; triode unit is used in sound if amplifier, sweep-oscillator,

sync-separator, sync-amplifier, and sync-clipper circuits. Outline 8D, OUTLINES SECTION. Heater volts (ac/dc), 8; amperes, 0.6; warm-up time (average), 11 seconds. Except for heater ratings, this type is identical with type 6CX8.

HIGH-MU TRIODE— SHARP-CUTOFF PENTODE

Miniature type used in color and black-and-white television receivers employing series - connected heater strings. The pentode unit is used as a video output amplifier; the triode unit

is used in sync-separator, sync-clipper, and phase-inverter circuits. Outline 8D, OUTLINES SECTION. Heater volts (ac/dc), 8; amperes, 0.6; warm-up time (average), 11 seconds. Except for heater ratings, this type is identical with miniature type 6EB8.

BEAM POWER TUBE


Miniature type used as vertical deflection amplifier in television receivers utilizing picture tubes having diagonal deflection angles of 110 degrees and employing series-connected

heater strings. Outline 8E, OUTLINES SECTION. Heater volts (ac/dc), 8.4; amperes, 0.6; warm-up time (average), 11 seconds. Except for heater ratings, this type is identical with miniature type 6EM5.


TWIN DIODE— SHARP-CUTOFF PENTODE

Miniature type used in television receivers employing series-connected P_{D_2} heater strings. The pentode unit is used as a video amplifier and the diodes konice in the series in t

are used as a horizontal phase in- $^{150|A|D_2}$ verter. Outline 8D, OUTLINES SECTION. Tube requires miniature nine-contact socket and may be operated in any position. Heater volts (ac/dc), 8; amperes, 0.6; warm-up time (average), 11 seconds.



5



PD1 (3

KDI & D2

KP.G3p

ISP

GIP

8) G2P



8FB8

Related type:

AFRA

Related type: 6EM5

8CS7

Related type:

6CS7





8ET7


= Technical Data =

PENTODE UNIT AS CLASS A1 AMPLIFIER

| Maximum Ratings, (Design-Maximum Values): | | |
|--|-----------------------------|--------|
| PLATE VOLTAGE. GRID-NO.2 (SCREEN-GRID) SUPPLY VOLTAGE. | 330 max | volts |
| GRID-NO.2 VOLTAGE. | 330 max See curv | volts |
| GRID-NO.1 (CONTROL-GRID) VOLTAGE, Positive-bias value. | 0 max | volts |
| GRID-NO.2 INPUT: | | |
| For grid-No.2 voltages up to 165 volts For grid-No.2 voltages between 165 and 330 volts | 1.1 max See curve | watts |
| PLATE DISSIPATION. | 5 max | watts |
| PEAK HEATER-CATHODE VOLTAGE: | | |
| Heater negative with respect to cathode | 200 max $200^{\circ}max$ | volts |
| meater positive with respect to cathode | 200 max | voits |
| Characteristics: | | |
| Plate Supply Voltage | 200 | volts |
| Grid-No.2 Supply Voltage | 150 | volts |
| Grid-No.1 Voltage | 100 | volts |
| Plate Resistance (Approx.) | 60000 | ohms |
| Transconductance – Plate Current. 55 | $11500 \\ 25$ | μmhos |
| Grid-No.2 Current. | 5.5 | ma |
| Grid-No.1 Voltage (Approx.) for plate current of 100 µa | -10 | volts |
| | | |
| Maximum Circuit Values: Grid-No.1-Circuit Resistance | | |
| For fixed-bias operation | 0.1 max | megohm |
| For cathode-bias operation | 0.25 max | megohm |
| | | |
| DIODE UNITS | | |
| Maximum Ratings, (Design-Maximum Values): | | |
| DC PLATE CURRENT PEAK HEATER-CATHODE VOLTAGE: | 3 max | ma |
| Heater negative with respect to cathode | 200 max | volts |
| Heater positive with respect to cathode | 200 • max | volts |
| Characteristics, Instantaneous Value: | | |
| Tube Voltage Drop for plate current of 1.5 ma | 10 | volts |
| | | |

° The dc component must not exceed 100 volts.

This value can be measured by a method involving a recurrent waveform such that the maximum ratings of the tube will not be exceeded.




MEDIUM-MU TWIN TRIODE

Miniature type used as combined vertical- and horizontal-deflection oscillator in television receivers employing series-connected heater strings. Outline 8D, OUTLINES SECTION.



Tube requires miniature nine-contact socket and may be operated in any position. Heater volts (ac/dc), 8.4; amperes, 0.45. Except for heater ratings, the 8FQ7 is identical with type 6FQ7.




Miniature type used in color and black-and-white television receivers employing series-connected heater strings. Triode unit is used in voltageamplifier applications; pentode unit is

8GN8 Related types: 6GN8, 10GN8

used in output stage of video amplifier. Outline 8D, OUTLINES SECTION. Tube requires miniature nine-contact socket and may be operated in any position. Heater volts (ac/dc), 8; amperes, 0.6; heater warm-up time (average), 11 seconds. Except for heater ratings, this type is identical with type 6GN8.

HIGH-MU TRIODE— SHARP-CUTOFF PENTODE


Miniature type used in a wide variety of applications in television receivers, particularly those having lowvoltage "B" supplies and employing series-connected heater strings. The



triode unit is used in sound-if, keyed-agc, sync-separator, sync-amplifier, and noisesuppression circuits. The pentode unit is especially useful as a video amplifier tube. Outline 8D, OUTLINES SECTION. Heater volts (ac/dc), 8.5; amperes, 0.45; warm-up time (average), 11 seconds. Except for heater ratings, this type is identical with miniature type 6JV8.

HIGH-MU TRIODE— SHARP-CUTOFF PENTODE

Miniature type used in color and black-and-white television receivers employing series-connected heater strings. The triode unit is used in syncseparator circuits; the pentode unit



has two independent control grids and is used in gated-agc-amplifier and noiseinverter circuits. Outline 8D, OUTLINES SECTION. Heater volts (ac/dc), 8.4; amperes, 0.45; warm-up time (average), 11 seconds. Except for heater ratings, this type is identical with miniature type 6KA8.

MEDIUM-MU TWIN TRIODE

Miniature type used as combined vertical-deflection-amplifier and vertical-deflection-oscillator in television receivers employing series-connected heater strings. Outline 8B,OUTLINES



SECTION. Heater volts (ac/dc), 9.4 (series), 4.7 (parallel); amperes, 0.225 (series), 0.45 (parallel); warm-up time (average), 11 seconds (parallel). Except for heater ratings, this type is identical with type 12AU7-A.

TWIN DIODE—HIGH-MU TRIODE

Miniature type used as combined sync separator and horizontal phase detector in television receivers employing series-connected heater strings. Outline 8B, OUTLINES SEC-TION. Tube requires miniature nine-contact socket. Heater volts (ac/dc), 9.4 (series), 4.7 (parallel); amperes, 0.3 (series), 0.6 (parallel); warm-up time (average), 11 seconds. Characteristics of triode unit as class A₁ amplifier:




plate supply volts, 250 (300 max); cathode-bias resistor, 200 ohms; amplification factor, 60; plate resistance (approx.), 10900 ohms; transconductance, 4000 μ mhos; plate ma., 10; plate dissipation, 2.5 max watts. Maximum ratings of diode unit: peak inverse plate volts, 300 max; peak plate ma., 60 max. Peak heater-cathode volts: heater negative with respect to cathode, 300 max; heater positive with respect to cathode, 200 max (the dc component must not exceed 100 volts). This type is used principally for renewal purposes.



8JV8

Related type:

6JV8

8K A 8

Related type:

6KA8


901

Related types:

7AU7. 12AU7A

9BR7

Miniature type used as combined oscillator and mixer in vhf tuners of television receivers employing seriesconnected heater strings. Outline 8B, OUTLINESSECTION. Tuberequires




miniature nine-contact socket and may be mounted in any position. Heater volts (ac/dc), 9.5; amperes, 0.3; warm-up time (average), 11 seconds.

= Technical Data =

CLASS A1 AMPLIFIER

| Maximum Ratings, (Design-Center Values): PLATE VOLTAGE. GRID-NO.2 (SCREEN-GRID) SUPPLY VOLTAGE. GRID-NO.2 VOLTAGE. GRID-NO.1 (CONTROL-GRID) VOLTAGE, Positive-bias value GRID-NO.2 INPUT: | Triode Uni 300 max - 0 max | t Tetrode Unit 300 max 300 max see curv 0 max | volts volts e page 70 volts |
|---|--|--|--|
| For grid-No.2 voltages up to 150 volts For grid-No.2 voltages between 150 and 300 volts PLATE DISSIPATION. PEAK HEATER-CATHODE VOLTAGE: Heater negative with respect to cathode | - 2.7 max 200 max | 2.8 max 200 max | watt e page 70 watts volts |
| Heater positive with respect to cathode The dc component must not exceed 100 volts. | 200∎ <i>max</i> | 200 m ax | volts |
| Characteristics: Plate Supply Voltage. Grid-No.2 Supply Voltage. Grid-No.1 Voltage. Cathode-Bias Resistor. Amplification Factor Plate Resistance (Approx.). Transconductance Plate Current. Grid-No.2 Current. Grid-No.1 Voltage (Approx.) for plate current of 10 µa | $ \begin{array}{r} 125 \\ - \\ 56 \\ 40 \\ 5000 \\ 8000 \\ 15 \\ -9 \\ \end{array} $ | $125 \\ 125 \\ -1 \\ -1 \\ -1 \\ -1 \\ -1 \\ 100000 \\ 5800 \\ 12 \\ 4 \\ -10$ | volts volts ohms µmhos ma volts |
| Maximum Circuit Values: Grid-No.1-Circuit Resistance: For fixed-bias operation For cathode-bias operation | 0.5 max 1 max | 0.25 max 1 max | megohm megohm |



Miniature type used in television receivers employing series-connected heater strings. Tube is used as combined oscillator and mixer tube in vhf tuners of television receivers utilizing

9U8A Related types: 5U8, 6U8A

an intermediate frequency in the order of 40 megacycles per second. Outline 8B, OUTLINES SECTION. Heater voltage (ac/dc), 9.45; amperes, 0.3, warm-up time (average), 11 seconds. Except for heater ratings, this type is identical with type 6U8-A.



POWER TRIODE

Glass type used as an audio-frequency amplifier. Outline 28, OUTLINES SECTION. Tube requires four-contact socket. Filament volts (ac/dc), 7.5; amperes, 1.25. Typical operation as class A₁ af power amplifier: plate volts, 425 max; grid volts, -40; peak af grid volts, 55; plate ma., 18; plate resistance, 5000 μ mkos; load resistance,

10

10200 ohms; undistorted output watts, 1.6. This is a DISCONTINUED type listed for reference only.



HIGH-MU TRIODE— SHARP-CUTOFF PENTODE

Miniature type=used in diversified applications in television receivers employing seriesconnected heater strings. The pentode unit is used as a general-purpose amplifier tube; the triode unit is used in vertical-deflection-oscillator, sync-separator, sync-clipper, and syncamplifier circuits. Outline 8B, OUTLINES SEC-TION. Tube requires miniature nine-contact socket. Heater volts (ac /dc), 10.5; amperes, 0.3;

10C8

warm-up time (average), 11 seconds. Characteristics of triode unit as class A₁ amplifier: plate supply volts, 250 (300 max); cathode-bias resistor, 390 ohms; amplification factor, 53; plate resistance (ap-


369

= RCA Receiving Tube Manual =

prox.), 12000 ohms; transconductance, 4400 μ mhos; plate ma., 7.3. Pentode unit: plate and grid-No.2 supply volts, 135 (300 max); cathode-bias resistor, 100 ohms; plate resistance (approx.), 0.19 megohm; transconductance, 8000 μ mhos; plate ma., 11.5; grid-No.2 ma., 3.2. Maximum ratings as vertical-deflection oscillator (triode unit) and amplifier (pentode unit) for operation in a 525-line, 30-frame system: plate volts, 300 max; peak positive-pulse plate volts (amplifier), 1000 max; peak negative-pulse grid-No.1 volts, -400 max (oscillator), -250 max (amplifier); peak cathode ma., 35 max (oscillator), 55 max (amplifier); average cathode ma., 12 max (oscillator), 18 max (amplifier); plate dissipation, 1 max watt (oscillator), 2.5 max watts (amplifier); peak heater-cathode volts, 200 max (the de component must not exceed 100 volts). This type is used principally for renewal purposes.

DUAL TRIODE


Miniature type used as combined vertical oscillator and vertical deflection amplifier in television receivers employing series-connected heater strings. Unit No.1 is a medium-mu



triode unit used as a blocking oscillator in vertical-deflection circuits, and unit No.2 is a low-mu triode unit used as a vertical-deflection amplifier. Outline 8D, OUT-LINES SECTION. Heater volts (ac/dc), 9.7; amperes, 0.6; warm-up time (average), 11 seconds. Except for heater ratings, this type is identical with miniature type 6DE7.

DUAL TRIODE


Miniature type used as combined vertical-deflection-oscillator and vertical-deflection-amplifier tube in television receivers employing series-connected heater strings. Outline 8D,



OUTLINES SECTION. Tube requires miniature nine-contact socket and may be operated in any position. Heater volts (ac/dc), 9.7; amperes, 0.6; warm-up time (average), 11 seconds. Except for heater ratings, the 10DR7 is identical with type 6DR7.

HIGH-MU TRIODE— SHARP-CUTOFF PENTODE


Miniature type used in televisionreceiver applications. The triode unit is used as a sync-separator, sync-amplifier, keyed-agc, or noise-suppressor tube. The pentode unit is used as a



video output tube. Outline 8D, OUTLINES SECTION. Heater volts (ac/dc), 10.2; amperes, 0.45. Except for heater ratings, this type is identical with miniature type 6DX8.

DUAL TRIODE

Glass octal type used as combined vertical-deflection oscillator and vertical-deflection amplifier in television receivers employing series-connected heater strings. Outline 19, OUTLINES



SECTION. Tube requires octal socket and may be operated in any position. Heater volts (ac/dc), 9.7; amperes, 0.6; warm-up time (average), 11 seconds. For maximum ratings and characteristics, refer to type 6EW7.


Related type: 6DR7, 13DR7

Related types:

6DE7, 13DE7

10DX8 Related type: 6DX8

10EG7



DUAL TRIODE

Glass octal type containing highmu triode and high-perveance, low-mu triode in same envelope. Used as combined vertical-deflection oscillator and vertical-deflection amplifier in televi-



sion receivers employing series-connected heater strings. Outline 14A, OUTLINES SECTION. Heater volts (ac/dc), 9.7; amperes, 0.6; warm-up time (average), 11 seconds. Except for heater ratings, this type is identical with type 6 EM7.




DUAL TRIODE

Novar type containing high-mu and high-perveance, low-mu triode units used as combined vertical-deflection amplifier and vertical-deflection oscillator in television receivers em-

Related types: 6GF7, 13GF7

ploying series-connected heater strings. Outline 10A, OUTLINES SECTION. Heater volts (ac/dc), 9.7; amperes, 0.6; warm-up time (average), 11 seconds. Except for heater ratings, this type is identical with novar type 6GF7.




HIGH-MU TRIODE— SHARP-CUTOFF PENTODE

Miniature type used in color and black-and-white television receivers employing series-connected heater strings. The triode unit is used as a sync-separator, sync-clipper, phase-in-



verter, or sound-if-amplifier tube. The pentode unit is used in the output stage of video amplifiers. Outline 8D, OUTLINES SECTION. Heater volts (ac/dc), 10.5; amperes, 0.45; warm-up time (average), 11 seconds. Except for heater ratings, this type is identical with miniature type 6GN8.




HIGH-MU TRIODE— SHARP-CUTOFF PENTODE

Miniature type used in color and black-and-white television receivers employing series-connected heater strings. Triode unit is used in high-gain, sound-if stages and in sync-separator,

10HF8 Related type: 6HF8

sync-clipper, and phase-inverter circuits; pentode unit is used as video-output amplifier. Outline 8D, OUTLINES SECTION. Tube requires miniature nine-contact socket and may be operated in any position. Heater volts (ac/dc), 10.5; amperes, 0.45; warm-up time (average), 11 seconds. Except for heater ratings, this type is identical with miniature type 6HF8.



HIGH-MU TRIODE— SHARP-CUTOFF TETRODE

Miniature type used in color and black-and-white television receivers employing series-connected heater strings. The triode unit is used as a sync separator, sync clipper, and phase

10JA8

inverter; the tetrode unit is used as a video amplifier. Outline 8D, OUTLINES

SECTION. Tube requires miniature nine-contact socket and may be mounted in any position. Heater volts (ac/dc), 10.5; amperes, 0.45; warm-up time (average), 11 seconds.

| | LASS A | AMPLIFIER | | | | |
|---|--|--|-----------------------------------|--|--|--|
| Maximum Ratings, (Design-Maximum Vo PLATE VOLTAGE. GRID-NO.2 (SCREEN-GRID) SUPPLY VOLTJ GRID-NO.2 VOLTAGE. GRID-NO.1 (CONTROL-GRID) VOLTAGE, PO PLATE DISSIPATION. GRID-NO.2 INPUT: For grid-NO.2 voltages up to 165 vol For grid-NO.2 voltages between 165 PEAK HEATER-CATHODE VOLTAGE: Heater negative with respect to cath Heater positive with respect to cath | AGE sitive-bia lts and 330 node | volts. | | Triode Unit 300 max - 0 max 1 max - - 200 max 200 max | 0 max 5 max 1.5 max | volts volts e page 70 volts watts e page 70 volts volts |
| Characteristics: Plate Voltage. Grid-No.2 Voltage. Amplification Factor Plate Resistance. Transconductance. Plate Current. Grid-No.2 Current. Grid-No.2 Current. Grid-No.1 Voltage (Approx.) for plate current of 10 µa | Triod 135 2 60 23000 2600 2 4.8 | $ \begin{array}{c} le \ Unit \\ 200 \\ -2 \\ 70 \\ 17000 \\ 4000 \\ 4 \\ - \\ -7 \end{array} $ | 30 135 0 - 32• 14• | $\begin{array}{c} Tetrode \ U\\ 135\\ 135\\ -1.5\\ 6600\\ 12600\\ 17\\ 4.2\\ -5 \end{array}$ | $\begin{array}{c} nit \\ 200 \\ 135 \\ -1.5 \\ 7000 \\ 14000 \\ 18 \\ 4 \\ -5 \end{array}$ | volts volts volts umhos ma ma volts |
| Maximum Circuit Values: Grid-No.1-Circuit Resistance: For fixed-bias operation For cathode-bias operation | | | | Triode Unit 0.5 max 1 max | Tetrode Unit 0.25 max 1 max | megohm megohm |

The dc component must not exceed 100 volts.

• This value can be measured by a method involving a recurrent waveform such that the maximum ratings of the tube will not be exceeded.

DETECTOR AMPLIFIER

Glass type used as detector and amplifier in battery-operated receivers. Filament volts (dc), 1.1; amperes, 0.25. Typical operation as class A₁ amplifier: plate volts, 135 max; grid volts, -10.5; plate resistance (approx.), 15500 ohms; transconductance, 440 μ mhos; plate ma., 3. This is a DISCONTINUED type listed for reference only.

SEMIREMOTE-CUTOFF TWIN PENTODE

Duodecar type used as if-amplifier tube in television receivers employing series-connected heater strings. Outline 12A, OUTLINES SECTION. Heater volts (ac/dc), 11.2; amperes,



0.45; warm-up time (average), 11 seconds. Except for heater ratings, this type is identical with duodecar type 6AR11.



11

11**A**R1

Related type:

6AR11


DUAL TRIODE

Miniature type used in television receivers employing series-connected heater-strings. Low-mu triode unit is used as vertical-deflection amplifier; high-mu triode unit is used as vertical-



deflection oscillator. Outline 8D, OUTLINES SECTION. Heater volts (ac/dc), 11; amperes, 0.45; warm-up time (average), 11 seconds. Except for heater rating, this type is identical with miniature type 6CY7.

F F



4

6

GIP PD

6 KP

G3P

P(2

G2P

PP

HIGH-MU TRIODE— SHARP-CUTOFF PENTODE

Miniature type with frame-grid pentode unit used in black-and-white television receivers. The triode unit is used in general-purpose voltage-amplifier, sync-separator, and sound-if-

Related type: 6KV8

amplifier applications. The pentode unit is used as a video output tube. Outline 8D, OUTLINES SECTION. Heater volts (ac/dc), 10.9; amperes, 0.45; warm-up time (average), 11 seconds. Except for heater ratings, this type is identical with miniature type 6KV8.

DETECTOR AMPLIFIER

Glass type used as detector and amplifier in battery-operated receivers. Filament volts (dc), 1.1; amperes, 0.25. Typical operation as class A₁ amplifier: plate volts, 135 max; grid volts, -10.5; plate resistance (approx.), 15500 ohms; transconductance, 440 μ mhos; plate ma, 3. This is a DISCONTINUED type listed for reference only.

POWER PENTODE

Glass type used as output amplifier in ac/dc radio receivers. Maximum dimensions: over-all length, 4-3/16 inches; seated height, 3-9/16 inches; diameter, 1-9/16 inches. Heater volts (ac/dc), 12.6 (series), 6.3 (parallel); amperes, 0.3 (series), 0.6 (parallel). Typical operation as class A₁ amplifier: plate volts and grid-No.2 volts, 180 max; grid-No.1 volts, -25; plate ma., 45; grid-No.2 ma. 8; plate resistance, 35000 12

12A5

ohms; transconductance, 2400μ mhos; load resistance, 3300μ ms; output watts, 3.4. This is a DIS-CONTINUED type listed for reference only.

RECTIFIER—POWER PENTODE

Glass type used as combined half-wave rectifier and power amplifier. Outline 24B, OUT-LINES SECTION. Tube requires small sevencontact (0.75-inch, pin-circle diameter) socket. Heater volts (ac/dc), 12.6; amperes, 0.3. Typical operation of pentode unit as class A₁ amplifier: plate volts and grid-No.2 volts, 135 max; grid-No.1 volts, -13.5; load resistance, 13500

ohms; plate resistance, $100\overline{0}0$ ohms; transconductance, $975 \ \mu$ mhos; cathode-bias resistor, 1175 ohms; plate ma., 9; grid-No.2 ma., 2.5; output watts, 0.55. Maximum ratings of rectifier unit with capacitor-input filter: ac plate volts (rms), 125; dc output ma., 30. This is a DISCONTINUED type listed for reference only.



Glass octal type used as converter in ac/dcreceivers. Outline 15A, OUTLINES SECTION. Heater volts (ac/dc), 12.6; amperes, 0.15. Except for heater rating, this type is identical with glass octal type 6A8-GT. Type 12A8-GT is used principally for renewal purposes.

BEAM POWER TUBE

Miniature type used in the output stage of automobile radio receivers operating from a 12-volt storage battery. Outline 8D, OUTLINES SEC-TION. Tube requires miniature ninecontact socket and may be mounted in any position.

12A7

12AB5


12A8GT

EXA Receiving Tube Manual =

| HEATER-VOLTAGE RANGE (AC/DC) [•] HEATER CURRENT (Approx.) at 12.6 volts DIRECT INTERELECTRODE CAPACITANCES: | | 0.0 to 15.9 0.2 | volts ampere |
|---|---|--|--|
| Grid No.1 to Plate. Grid No.1 to Cathode, Heater, Grid No.2, and Grid No.3 Plate to Cathode, Heater, Grid No.2, and Grid No.3 | | 0.7 max 8 8.5 | pf pf pf |
| • For longest life, it is recommended that the heater be operated with | thin the voltage | erange of 11 t | o 14 volts. |
| CLASS A, AMPLIFIER | | | |
| Maximum Ratings, (Design-Center Values): | | | |
| PLATE VOLTAGE. GRID-NO.2 (SCREEN-GRID) VOLTAGE. PLATE DISSIPATION. GRID-NO.2 INPUT. PEAK HEATER-CATHODE VOLTAGE: Heater negative with respect to cathode. Heater positive with respect to cathode. BULB TEMPERATURE (At hottest point). | | 315 max 285 max 12 max 2 max 90 max 250 max | volts watts watts volts volts °C |
| Typical Operation with 12.6 Volts on Heater: | | | |
| Piate Supply Voltage. Grid-No.2 Supply Voltage. Grid-No.1 (Control-Grid) Voltage. Cathode-Bias Resistor. Peak AF Grid-No.1 Voltage. Zero-Signal Plate Current. Maximum-Signal Grid-No.2 Current. Plate Resistance. Plate Resistance. Load Resistance. Total Harmonic Distortion. Maximum-Signal Power Output. | 270 10.5 33.5 36 1.6 3.2 | $\begin{array}{c} 250\\ 250\\ -12.5\\ 47\\ 4.5\\ 5000\\ 4100\\ 5000\\ 8\\ 4.5 \end{array}$ | volts volts ohms volts ma ma ma ohms per cent watts |
| Maximum Circuit Values: | | | |
| Grid-No.1-Circuit Resistance: For fixed-bias operation For cathode-bias operation | | 0.1 max 0.5 max | megohm megohm |
| PUSH-PULL CLASS AB1 AMPLI | FIER | | |
| Maximum Ratings: (Same as for single-tube class A_1 amplifier) | | | |

Typical Operation with 12.6 Volts on Heater (Values are for two tubes):

| Plate Voltage. | 250 | volts |
|--|-----|-------|
| Grid-No.2 Voltage | 250 | volts |
| Grid-No.1 Voltage | -15 | volts |
| Peak AF Grid-No.1-to-Grid-No.1 Voltage | 30 | volts |
| Zero-Signal Plate Current | 70 | ma |
| Maximum-Signal Plate Current | 79 | ma |
| Zero-Signal Grid-No.2 Current | 5 | ma |
| Maximum-Signal Grid-No.2 Current | 13 | ma |

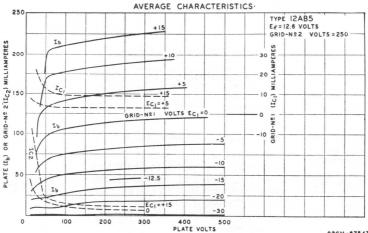

92CM -8754T

—— Technical Data =

| Effective Load Resistance (Plate-to-plate) Total Harmonic Distortion Maximum-Signal Power Output | 10000 5 10 | ohms per cent watts |
|--|------------------|---------------------------|
| Maximum Circuit Values: | | |
| Grid-No.1-Circuit Resistance: For fixed-bias operation | 0.1 max | megohm |

| For cathode-bias operation | 0.1 max 0.5 max | |
|----------------------------|--------------------|--|
| | | |


REMOTE-CUTOFF PENTODE

Miniature type used as rf and if amplifier in automobile receivers operating from a 12volt storage battery. Outline 7B, OUTLINES SECTION. Tube requires miniature seven-contact socket. Heater-voltage range (ac/dc), 10 to 15.9; amperes at 12.6 volts, 0.15. Characteristics as class A; amplifier: heater volts, 12.6; plate and grid-No.2 volts, 12.6 (30 max); grid No.3 connected to cathode at socket; grid-No.1 volts,

12AC6

0; grid-No.1 resistor (bypassed), 2.2 megohms; plate resistance (approx.), 0.5 megohm; transconductance, 730 μmhos; plate ma., 0.55; grid-No.2 ma., 0.2; cathode ma., 20 max; peak heater-cathode volts, 30 max. This type is used principally for renewal purposes.

PENTAGRID CONVERTER



PD2

Miniature type used as combined oscillator and mixer in low B + voltage automobile radio receivers operating directly from a 12-volt storage-battery system. Outline 7B, OUTLINES SECTION. Tube requires miniature seven-contact socket. Heater-voltage range (ac /dc), 10 to 15.9; amperes at 12.6 volts, 0.15. Typical operation in converter service: heater volts, 12.6 (16 plate and grids-No.2-and-No.4 volts, 12.6 (16

12AD6


max); grid-No.3 volts, 0 max; grid-No.1 volts (peak-to-peak), 4.5; grid-No.3 resistor, 2.2 megohms; grid-No.1 resistor, 33000 ohms; plate resistance (approx.), 0.4 megohm; conversion transconductance, 320 µmhos; plate ma., 0.35; grids-No.2-and-No.4 ma., 1.5; grid-No.1 ma., 0.06; total cathode ma., 1.6 (20 max); peak heater-cathode volts, 16 max. This type is used principally for renewal purposes.

TWIN DIODE-MEDIUM-MU TRIODE

Miniature types used as combined detector and af voltage amplifier in automobile radio receivers operating from a 12-volt storage battery. Outline 7B, OUTLINES SECTION. Tubes require miniature seven-contact socket. Heater-voltage range (ac/dc), 10 to 15.9; amperes at 12.6 volts, 0.15. Characteristics of triode unit as class A_1 amplifier: heater volts, 12.6; plate volts, 12.6 (30 max); grid volts, 0;

12AE6 12AE6A

plate resistance (approx.), 13000 ohms; amplification factor, 16.7; transconductance, 1300 µmhos; plate ma., 1; total cathode ma., 20 max. Maximum diode plate ma. (each unit), 1 max. Peak heater-cathode volts, 30 max. Type 12AE6 is a DISCONTINUED type listed for reference only. Type 12AE6-A is used principally for renewal purposes.



DUAL TRIODE

Miniature type with medium-mu and lowmu triode units used as transistor-driver in audio-output stage of hybrid car radios. Outline 8B, OUTLINES SECTION. Tube requires miniature nine-contact socket. Heater-voltage range (ac/dc), 10 to 15.9; amperes at 12.6 volts, 0.45. Characteristics as class A_1 amplifier: heater volts, 12.6; plate volts, 12.6; grid resistor, 1.5 megohms (unit No.1), 1 megohm (unit No.

12AE7

2); amplification factor, 13 (unit No.1), 6.4 (unit No.2); plate resistance (approx.), 3150 ohms (unit No. 1), 985 ohms (unit No.2); transconductance, 4000 µmhos (unit No.1),6500 µmhos (unit No.2); plate ma., 1.9 (unit No.1), 7.5 (unit No.2). Maximum ratings as audio driver (each unit); plate volts, 16 max; grid volts, 0 max; plate dissipation, 1 max watt; peak heater-cathode volts, 16 max. This type is used principally for renewal purposes.

HALF-WAVE VACUUM RECTIFIER


Miniature type used as a damper tube in horizontal-deflection circuits of television receivers employing series-connected heater strings. Outline 9B, OUTLINES SECTION. Heater



volts (ac/dc), 12.6; amperes, 0.6; warm-up time (average), 11 seconds. Except for heater ratings, this type is identical with miniature type 6AF3.

REMOTE-CUTOFF PENTODE


Miniature type used as if and rf amplifier in automobile radio receivers operating from a 12-volt storage battery. Outline 7B, OUT-LINES SECTION. Tube requires miniature seven-contact socket. Heater-voltage range (ac/dc), 10 to 15.9; amperes at 12.6 volts, 0.16. Characteristics as class A_1 amplifier: heater volts, 12.6; plate and grid-No.2 volts, 12.6 (16 max); grid No.3 connected to cathode at socket;



grid-No.1 supply volts, 0 max; grid-No.1 resistor (bypassed), 2.2 megohms; plate resistance (approx.), 0.35 megohm; transconductance, 1500 μ mhos; plate ma., 1.1; grid-No.2 ma., 0.45; peak heater-cathode volts, 16 max. This type is used principally for renewal purposes.


MEDIUM-MU TWIN TRIODE

Glass octal tube used as audio amplifier in radioequipment.Outline14B,OUTLINESSEC-TION, except over-all length is 3-1/16 max inches and seated length is 2-1/2 inches. Tube requires octal socket. Heater volts (ac/dc), 12.6; amperes, 0.15. Characteristics and maximum ratings (each unit) as class A: amplifier: plate volts, 180 max; grid volts, -6.5; amplification factor, 16; transconductance, 1900 µmhos; plate resistance (approx.), 8400 ohms; plate ma., 7.6. This type is used principally for renewal purposes.



TWIN DIODE— HIGH-MU TRIODE

Miniature type used as combined detector and af voltage amplifier in automobile radio receivers operating from a 12-volt storage battery. Outline 7B, OUTLINES SECTION. Tube requires miniature seven-contact socket. Heatervoltage range (ac/dc), 10 to 15.9 volts; amperes at 12.6 volts, 0.15. Characteristics with heater volts of 12.6 and maximum ratings of triode unit as class A₁ amplifier: plate volts, 12.6 (30



max); grid volts, 0; amplification factor, 55; plate resistance (approx.), 45000 ohms; transconductance, 1200 µmhos; plate ma., 0.75; total cathode ma., 20 max; peak heater-cathode volts, 30 max. Maximum rating of each diode unit: plate ma., 1 max. This type is used principally for renewal purposes.

TWIN DIODE

Miniature, high-perveance type used as detector in FM and television circuits. It is especially useful as a ratio detector in ac/dc FM receivers. Outline 7A, OUTLINES SECTION. Heater volts (ac/dc), 12.6; amperes, 0.15. Except for heater rating, this type is identical with miniature type 6AL5.



12AF6

12AF3


Related type:

6AF3

12AH7GT

12AJ6

Related types: 3AL5, 6AL5




MEDIUM-MU TRIODE-POWER TETRODE

Miniature type used in automobile-radio receivers operating from a 12-volt storage battery. The triode unit performs the trigger function and the tetrode unit performs the relayactuating function in automatic station-selection circuits. Outline 8D, OUTLINES SEC-TION. Tube requires miniature nine-contact socket. Heater-voltage range (ac/dc), 10 to 15.9; amperes at 12.6 volts, 0.55. Characteristics

12AL8

of triode unit as class A₁ amplifier: heater volts, 12.6; plate volts, 12.6 (30 max); grid volts (developed across 2.2-megohm resistor), -0.9; amplification factor, 13; plate resistance (approx.); 13000 ohms; transconductance, 1000 µmhos; plate ma., 0.5; cathode ma., 20 max. Tetrode unit: heater volts, 12.6; plate volts, 12.6 (30 max); grid-No.1 (space-charge-grid) volts, 12.6 (16 absolute max); grid-No.2 (control-grid) volts, (developed across 2.2-megohm resistor), -0.5 (-20 max); amplification factor (grid No.2 to plate), 7.2; plate resistance (approx.), 480 ohms; transconductance (grid No.2 to plate), 15000 µmhos; plate ma., 40; grid-No.1 ma., 75. Peak heater-cathode volts, 30 max. This type is used principally for renewal purposes.




BEAM POWER TUBE— SHARP-CUTOFF PENTODE

Duodecar type used as FM detector and audio-frequency output amplifier in television receivers employing series-connected heater strings. Outline 12B, OUTLINES SECTION.

12AL11 Related type: 6AL11

Heater volts (ac/dc), 12.6; amperes, 0.45; warm-up time (average), 11 seconds. Except for heater ratings, this type is identical with duodecar type 6AL11.





BEAM POWER TUBE

Miniature type used as output amplifier primarily in automobile radio receivers operating from a 12-volt storage battery. Outline 7C, OUT-LINES SECTION. Heater volts



(ac/dc), 12.6; amperes, 0.225. Except for heater ratings, this type is identical with miniature type 6AQ5. Within its maximum ratings, the performance of the 12AQ5 is equivalent to that of the larger type 12V6-GT.





Miniature type used as combined detector, amplifier, and avc tube in compact ac/dc radio receivers. Outline 7B,OUTLINES SECTION. Heater volts (ac/dc), 12.6; amperes, 0.15. Except for heater ratings, this type is identical with miniature type 6AT6.

HIGH-MU TWIN TRIODE

Miniature type used as push-pull cathode-drive amplifier or frequency converter in the FM and television broadcast bands. Outline 8B, OUT-LINES SECTION. Tube requires 12AT7

12AT6

Related type:

6AT6

miniature nine-contact socket and may be mounted in any position. Each triode

unit is independent of the other except for the common heater. For typical operation as a resistance-coupled amplifier, refer to RESISTANCE-COUPLED AM-PLIFIER SECTION.


| Heater Arrangement: Heater Voltage (ac/dc) Heater Current Direct Interelectrode Capacitances: Grid-Dirive Operation: | Series 12.6 0.15 | Parallel 6.8 0.3 | volts ampere |
|---|------------------------|--|-----------------|
| Grid to Plate (Each unit) Grid to Cathode and Heater (Each unit) Plate to Cathode and Heater | | 1.5 2.2 | pf pf |
| Unit No.1 Unit No.2 Cathode-Drive Operation: | | $\begin{array}{c} 0.5\\ 0.4 \end{array}$ | pf pf |
| Cathode to Plate (Each unit). Cathode to Grid and Heater (Each unit). Plate to Grid and Heater (Each unit). Heater to Cathode (Each unit). | | 0.2 4.6 1.8 2.4 | pf pf pf |

CLASS A1 AMPLIFIER (Each Unit)

Maximum Ratings, (Design-Center Values):

| PLATE DISSIPATION 2.5 max watt PEAK HEATER-CATHODE VOLTAGE: 90 max volt Heater negative with respect to cathode 90 max volt Heater positive with respect to cathode 90 max volt | |
|---|----|
| Characteristics: | |
| Plate Supply Voltage | |
| Cathode-Bias Resistor | 18 |
| Amplification Factor | |
| Plate Resistance (Approx.) | ns |
| Transconductance | OB |
| Grid Voltage (Approx.) for plate current of 10 μ a | ts |
| Plate Current | 18 |

AVERAGE PLATE CHARACTERISTICS

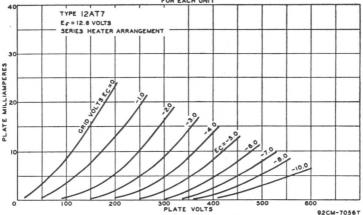


SHARP-CUTOFF PENTODE

Miniature type used in compact ac/dc radio equipment as an rf amplifier especially in high-frequency, wideband applications. Outline 7B, OUT-LINES SECTION. Heater volts (ac/dc), 12.6; amperes, 0.15. Except for heater ratings, this type is identical with miniature type 6AU6.



12AU6 Related types: 3AU6, 4AU6, 6AU6A

— Technical Data =



MEDIUM-MU TWIN TRIODE

Miniature types used as phase inverter or push-pull amplifier in ac/dc radio equipment and in diversified applications such as multivibrators or oscillators in industrial control de12AU7 12AU7A Related types: 7AU7, 9AU7

vices. Also used as combined vertical oscillator and vertical deflection amplifier, and as horizontal deflection oscillator, in television receivers. The 12AU7-A is also useful in applications critical as to microphonics. Outline 8B, OUTLINES SEC-TION. Tubes require miniature nine-contact socket and may be mounted in any position. Each triode unit is independent of the other except for the common heater. For typical operation as a resistance-coupled amplifier, refer to RESIST-ANCE-COUPLED AMPLIFIER SECTION. Type 12AU7 is a DISCONTIN-UED type listed for reference only.

| HEATER ARRANGEMENT: | Series | Parallel | |
|---|-----------|-----------|--------|
| HEATER VOLTAGE (AC/DC) | 12.6 | 6.3 | volts |
| HEATER CURRENT. | 0.15 | 0.3 | ampere |
| DIRECT INTERELECTRODE CAPACITANCES for 12AU7-A (Approx.): | Unit No.1 | Unit No.2 | |
| Grid to Plate | | 1.5 | pf |
| Grid to Cathode and Heater | | 1.6 | pf |
| Plate to Cathode and Heater | 0.5 | 0.35 | pf |


CLASS A1 AMPLIFIER (Each Unit Unless Otherwise Specified)


Maximum Ratings for 12AU7-A, (Design-Maximum Values):

| Plate Voltage | 330 max | volts |
|---|-------------------|-------|
| PLATE DISSIPATION: | 0.55 | |
| Each Plate | 2.75 max | watts |
| Both Plates (Both units operating) | 5.5 max | watts |
| CATHODE CURRENT | 22 max | ma |
| PEAK HEATER-CATHODE VOLTAGE: | | |
| Heater negative with respect to cathode | 200 max | volts |
| Heater positive with respect to cathode | $200 \bullet max$ | volts |
| • The dc component must not exceed 100 volts. | | |

Characteristics for 12AU7-A:

| Plate Voltage | 100 | 250 | volts |
|---|------|----------|------------|
| Grid Voltage | 0 | -8.5 | volts |
| Amplification Factor | 19.5 | 17 | |
| Plate Resistance (Approx.) | 6250 | 7700 | ohms |
| Transconductance | 3100 | 2200 | μ mhos |
| Plate Current | 11.8 | 10.5 | ma |
| Grid Voltage (Approx.) for plate current of 10 µa | - | $^{-24}$ | volts |



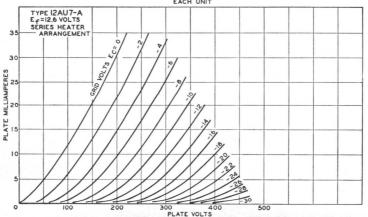

Maximum Circuit Values:

| Grid-Circuit Resistance: For fixed-bias operation | 0.25 max | megohm |
|--|----------|--------|
| For cathode-bias operation | 1.0 max | megohm |

OSCILLATOR (Each Unit, Unless Otherwise Specified) For operation in a 525-line, 30-frame system

| Maximum Ratings for 12AU7-A, (Design-Maximum Values): | Vertical- Deflection Oscillator | Horizontal Deflection Oscillator | |
|---|---------------------------------------|--|-----------|
| DC PLATE VOLTAGE. | 330 max | 330 max | volts |
| PEAK NEGATIVE-PULSE GRID VOLTAGE | -440 max | -660 max | volts |
| PEAK CATHODE CURRENT. | 66 max | 330 max | ma |
| AVERAGE CATHODE CURRENT. | 22 max | 22 max | ma |
| PLATE DISSIPATION: | | and moore | 11106 |
| Each Plate | 2.75 max | 2.75 max | watts |
| Both Plates (Both units operating) | 5.5 max | 5.5 max | watts |
| PEAK HEATER-CATHODE VOLTAGE: | o to mak | 0.0 11000 | 11 40 000 |
| Heater negative with respect to cathode | 200 max | 200 max | volts |
| Heater positive with respect to cathode | 200 max | 200 max | volts |
| | | | |
| Maximum Circuit Value: | | | |
| Grid-Circuit Resistance | 2.2 max | 2.2 max | megohms |

VERTICAL-DEFLECTION AMPLIFIER (Each Unit Unless Otherwise Specified)

For operation in a 525-line, 30-frame system

Maximum Ratings for 12AU7-A, (Design-Maximum Values):

| DC PLATE VOLTAGE | 330 max | volts |
|---|-----------------|-------|
| PEAK POSITIVE-PULSE PLATE VOLTAGE# | 1200 max | volts |
| PEAK NEGATIVE-PULSE GRID VOLTAGE | -275 max | volts |
| PEAK CATHODE CURRENT | 66 max | ma |
| AVERAGE CATHODE CURRENT | 22 max | ma |
| PLATE DISSIPATION: | | |
| Each Plate | 2.75 max | watts |
| Both Plates (Both units operating) | 5.5 max | watts |
| PEAK HEATER-CATHODE VOLTAGE: | | |
| Heater negative with respect to cathode | 200 max | volts |
| Heater positive with respect to cathode | 200 m ax | volts |
| | | |

Maximum Circuit Values:

Grid-Circuit Resistance:

Related types: 6AV5GA, 25AV5GA

2.2 max megohms For cathode-bias operation. #The duration of the voltage pulse must not exceed 15 per cent of one vertical scanning cycle. In a 525-line, 30-frame system, 15 per cent of one vertical scanning cycle is 2.5 milliseconds. The dc component must not exceed 100 volts.

BEAM POWER TUBE

Glass octal type used as horizontal 12AV5GA deflection amplifier in television receivers employing series-connected heater strings.Outline19B,OUTLINESSEC-TION. Heater volts (ac/dc), 12.6; am-



peres, 0.6; warm-up time (average), 11 seconds. Except for heater ratings, this type is identical with glass octal type 6AV5-GA.

TWIN DIODE-HIGH-MU TRIODE

Miniature type used as combined detector, amplifier, and avc tube in automobile and ac-operated receivers. **Outline 7B, OUTLINES SECTION.** Heater volts (ac/dc), 12.6; amperes,




0.15. Except for heater ratings, this type is identical with miniature type 6AV6.

1741

Related types

3AV6, 4AV6, 6AV6

— Technical Data =



MEDIUM-MU TWIN TRIODE

Miniature type used as frequency converter in vhf tuners of television receivers, and as rf amplifier, oscillator, or mixer. Outline 8B, OUT-LINES SECTION. Tube requires miniature nine-contact socket. Heater volts (ac/dc), 12.6 (series), 6.3 (parallel); amperes, 0.225 (series), 0.45 (parallel). Characteristics as class A1 amplifier (each unit): plate volts, 150 (300 max); cathode-bias resistor, 56 ohms; amplification

12AV7

factor, 41; plate resistance (approx.), 4800 ohms; transconductance, 8500 µmhos; plate ma., 18; plate dissipation, 2.7 max watts; peak heater-cathode volts, 90 max. This type is used principally for renewal purposes.




SHARP-CUTOFF PENTODE

Miniature type used as an rf or if amplifier up to 400 megacycles in compact ac/dc FM receivers. Outline 7B, OUTLINES SECTION. Tube requires miniature seven-contact socket.



Heater volts (ac/dc), 12.6; amperes, 0.15. Except for heater ratings and terminal connections, this type is identical with miniature type 6AG5.



HALF-WAVE VACUUM RECTIFIER

Duodecar type used as damper tube in horizontal-deflection circuits of television receivers employing seriesconnected heater strings. Outline 12C, **OUTLINES SECTION. Heater volts**



(ac/dc), 12.6; amperes, 0.6; warm-up time (average), 11 seconds. Except for heater ratings, this type is identical with duodecar type 6AX3.

HALF-WAVE VACUUM RECTIFIER




Glass octal types used as damper tubes in horizontal deflection circuits 12AX4GTA of television receivers. Types 12AX4-GTA and 12AX4-GTB have a controlled heater warm-up time for use in series-connected heater strings. Outline 14C, OUTLINES SECTION. These types may be supplied with pin No.1 omitted. Heater volts (ac/dc),

12AX4GT 2AX4GTB **Related types:**

6AX4GT. 6AX4GTB. 17AX4GT, 17AX4GTA, 25AX4GTA

12.6; amperes, 0.6; warm-up time (average) for 12AX4-GTA and 12AX4-GTB, 11 seconds. Except for heater rating, these types are identical with glass octal type 6AX4-GT. Type 12AX4-GT is a DISCONTINUED type listed for reference only.



HIGH-MU TWIN TRIODE

Miniature types used as phase inverter or twin resistance-coupled amplifier in radio equipment. The 12AX7 is also used in diversified applications such as multivibrators or oscillators in

12AX7 12AX7A

industrial control devices. Type 12AX7-A has controlled hum and noise characteristics and is used in high-fidelity audio-amplifier applications. Outline 8B, OUT-LINES SECTION. Tube requires miniature nine-contact socket and may be mounted in any position. Each triode unit is independent of the other except for common heater. For characteristics and curves, refer to type 6AV6. For typical operation as a resistance-coupled amplifier, refer to RESISTANCE-COUPLED AMPLIFIER SECTION.

| HEATER ARRANGEMENT: | Series | Parallel | |
|---|---|----------------------------------|-----------------|
| HEATER VOLTAGE (AC/DC) HEATER CURRENT | $\begin{array}{c} 12.6\\ 0.15\end{array}$ | $6.3 \\ 0.3$ | volts ampere |
| DIRECT INTERELECTRODE CAPACITANCES (Approx.): Grid to Plate (Each unit) Grid to Cathode and Heater (Each unit) Plate to Cathode and Heater | Unit No. 1 1.7 1.6 0.46 | Unit No. 2 1.7 1.6 0.34 | pf pf |
| CLASS A1 AMPLIFIER (Each | Unit) | | |
| Maximum Ratings, (Design-Maximum Values:) | | | |
| PLATE VOLTAGE. PLATE DISSIPATION. GRID VOLTAGE: | | 330 max 1.2 max | volts watts |
| Negative-bias value Positive-bias value | | | volts |
| PEAK HEATER-CATHODE VOLTAGE: Heater negative with respect to cathode Heater positive with respect to cathode | | | volts |
| The dc component must not exceed 100 volts. | | | |

Equivalent Noise and Hum Voltage, (Reference to Grid, Each Unit):*

HALF-WAVE VACUUM RECTIFIER


Novar type used as damper tube in horizontal-deflection circuits of black-and-white television receivers. Tube has controlled warm-up time for use in series-connected heater strings.



Outline 17A, OUTLINES SECTION. Heater volts (ac/dc), 12.6; amperes, 0.6; warm-up time (average), 11 seconds. Except for heater rating, this type is identical with novar type 6AY3.

MEDIUM-MU TWIN TRIODE

Miniature type used in the first stages of high-gain audio-frequency amplifiers where reduction of microphonics, leakage noise, and hum are primary considerations. Outline 8B.



OUTLINES SECTION. Tube requires miniature nine-contact socket and may be mounted in any position. Each triode unit is independent of the other except for the common heater. Use of the 12.6-volt connection with an ac heater supply is not recommended for applications involving low hum. For typical operation as a resistance-coupled amplifier, refer to RESISTANCE-COUPLED AMPLIFIER SECTION.

| HEATER ARRANGEMENT: | Series | Parallel | |
|---|--------|----------|------------|
| HEATER VOLTAGE (AC/DC) | 12.6 | 6.3 | volts |
| HEATER CURRENT. | 0.15 | 0.3 | ampere |
| AMPLIFICATION FACTOR (Each unit)* | | 44 | |
| PLATE RESISTANCE (Each unit, approx.)* | | 25000 | ohms |
| TRANSCONDUCTANCE* | | 1750 | μ mhos |
| * For plate volts, 250; grid volts, -4; plate ma., 3. | | | |

CLASS A1 AMPLIFIER (Each Unit)

Maximum Ratings (Design-Center Values):

| GRID VOLTAGE: | |
|---------------------|-------|
| Negative bias value | volts |

12AY


Related types:

6AY3. 17AY3

12AY7

= Technical Data =

| PLATE DISSIPATION | 1.5 max | watts |
|---|------------------|-------|
| CATHODE CURRENT | 10 max | ma |
| PEAK HEATER-CATHODE VOLTAGE: Heater negative with respect to cathode | 90 max 90 max | volts |



HIGH-MU TWIN TRIODE

Miniature types used in directcoupled cathode-drive rf amplifier circuits of vhf television tuners. Outline 8B, OUTLINES SECTION. Tubes require miniature nine-contact socket



12B4A

and may be mounted in any position. Heatervolts (ac/dc):12.6 (series), 6.3 (parallel); amperes, 0.225 (series), 0.45 (parallel); warm-up time (average), 12AZ7-A, 11 seconds. Type 12AZ7 is a DISCONTINUED type listed for reference only. For characteristics, class A₁ amplifier, refer to miniature type 12AT7.

| | Without | With | |
|---|--------------------|---------------------|-----|
| DIRECT INTERELECTRODE CAPACITANCES (Approx.): | External Shield | External Shield▲ | |
| Grid to Plate (Each unit) | 2 | 1.9 | pf |
| Grid to Cathode and Heater (Each unit) | 2.6 | 2.8 | pf |
| Plate to Cathode and Heater: | 0.44 | 1.4 | - 6 |
| Unit No.1 Unit No.2 | $0.44 \\ 0.36$ | 1.4 | pf |
| | 0.30 | 1.0 | pf |
| * With external shield connected to cathode of unit under test. | | | |

external smelu connected to cathode of unit under test.

CLASS A1 AMPLIFIER (Each Unit)

| Maximum Ratings: | 12AZ7 Design-Center Values | 12AZ7-A Design-Maxi- mu m Values | |
|--|----------------------------------|---|-------------------------|
| PLATE VOLTAGE. GRID VOLTAGE, Negative-bias value. PLATE DISSIPATION. PEAK HEATER-CATHODE VOLTAGE: | 300 max - 50 max 2.5 max | 330 max - 55 max 2.5 max | volts volts watts |
| Heater negative with respect to cathode Heater positive with respect to cathode ^o The dc component must not exceed 100 volts. | 200 max 200° max | 200 max 200°max | volts volts |

Maximum Circuit Values (Each Unit):

Grid-Circuit Resistance:

| For fixed-bias operation | 0.25 max | megohm |
|----------------------------|----------|--------|
| For cathode-bias operation | 1 max | megohm |



LOW-MU TRIODE

Miniature type having high perveance used as vertical deflection amplifier in television receivers. This type has a controlled heater warm-up time for use in series-connected heater

strings. Outline 8D, OUTLINES SECTION. Tube requires miniature nine-contact socket and may be mounted in any position. Heater volts (ac/dc), 12.6 (series), 6.3 (parallel); amperes, 0.3 (series), 0.6 (parallel); warm-uptime (average), 11 seconds.

CLASS A1 AMPLIFIER

Maximum Ratings, (Design-Center Values):

| PLATE VOLTAGE., GRID VOLTAGE, Negative-bias value PLATE DISSIPATION. | 550 max -50 max 5,5 max | volts volts watts |
|--|-------------------------------|-------------------------|
| PEAK HEATER-CATHODE VOLTAGE: Heater negative with respect to cathode | 200 max 200°max | volts |
| Characteristics: | | |
| Plate Voltage Grid Voltage | $150 \\ -17.5$ | volts volts |
| Amplification Factor. Plate Resistance (Approx.). | 6.5 1030 | ohms |
| | | 383 |

= RCA Receiving Tube Manual =

| Transconductance. Plate Current. Grid Voltage (Approx) for plate current of 200 μa. Plate Current for grid voltage of -23 volts. | $6300 \\ 34 \\ -32 \\ 9.6$ | μmhos ma volts ma |
|--|--|--|
| Maximum Circuit Values: Grid-Circuit Resistance. For fixed-bias operation. For cathode-bias operation. | 0.47 max 2.2 max | megohms |
| VERTICAL DEFLECTION AMPLIFIER For operation in a 525-line, 30-frame system Maximum Ratings, (Design-Center Values): | | |
| DC PLATE VOLTAGE. PEAK POSITIVE-PULSE PLATE VOLTAGE# (Absolute Maximum). PEAK SCATIVE-PULSE GRID VOLTAGE. PEAK CATHODE CURRENT. AVERAGE CATHODE CURRENT. PLATE DISSIPATION. PEAK HEATER-CATHODE VOLTAGE: Heater negative with respect to cathode. | 550 max 1000†max -250 max 105 max 30 max 5.5 max 200 max | volts volts ma ma watts volts |
| Heater positive with respect to cathode | 200° max | volts |

Maximum Circuit Value:

Grid-Circuit Resistance:

t Under no circumstances should this absolute value be exceeded.

° The dc component must not exceed 100 volts.

TRIODE—PENTODE

12**B8G**T

12BA6

Related types:

3BA6, 6BA6

12BA

Related type:

68A7

Glass octai type used as combined detector and rf or if amplifier in ac/dc receivers. Heater volts (ac/dc), 12.6; amperes, 0.3. Characteristics of triode unit: plate volts, 90; grid volts, 0; amplification factor, 90; plate resistance, 37000 ohms; transconductance, 2400 µmhos; plate ma., 2.8. Characteristics of pentode unit: plate volts, 90; grid-No.2 volts, 90; grid-No.1 volts;



3; plate resistance, 200000 ohms; transconductance, 1800 µmhos; plate ma., 7; grid-No.2 ma., 2. This is a DISCONTINUED type listed for reference only.

REMOTE-CUTOFF PENTODE

Miniature type used as rf amplifier in ac/dc standard broadcast receivers, in FM receivers, and in other wide-band, high-frequency applications. Outline 7B, OUTLINES SEC-



TION. Heater volts (ac/dc), 12.6; amperes, 0.15. Except for heater ratings, this type is identical with miniature type 6BA6.

PENTAGRID CONVERTER

Miniature type used as converter in ac/dc superheterodyne circuits especially those for the FM broadcast band. Outline 8D, OUTLINES SECTION. Heater volts (ac/dc), 12.6; amperes, 0.15. Except for heater rating, this type is identical with miniature type 6BA7. Type 12BA7 is used principally for renewal purposes.

REMOTE-CUTOFF PENTODE


Miniature type used as rf or if amplifier in radio receivers. Outline 7B, OUTLINES SEC-TION. Heater volts (ac/dc), 12.6; amperes, 0.15. Except for heater rating, this type is identical with miniature type 6BD6. Type 12BD6 is used principally for renewal purposes.






12BD6 Related type: 68D6

Technical Data






PENTAGRID CONVERTER

Miniature type used as converter in ac/dc receivers for both standard broadcast and FM bands. Outline 7B, OUTLINES SECTION. Heater volts (ac/dc), 12.6; amperes, 0.15. Except for heater ratings, this type is identical with miniature type 6BE6.

Miniature type used as combined detector, amplifier, and avc tube primarily in automobile radio receivers operating from a 12-volt storage battery. Outline 7B. OUTLINES SEC- 12BE6 Related types: 3BE6, 6BE6

12BF6 Related type: 6BF6

TION. Heater volts (ac/dc), 12.6; amperes, 0.15. Except for heater ratings, this type is identical with miniature type 6BF6.



MEDIUM-MU TWIN TRIODE

Miniature types used as combined vertical deflection amplifiers and vertical oscillators, and as horizontal deflection oscillators, in television receivers. Type 12BH7-A has a controlled



heater warm-up time for use in series-connected heater strings. These types are also used in other applications including phase-inverter circuits and multivibrator circuits. Outline 8D, OUTLINES SECTION. Tubes require miniature nine-contact socket and may be mounted in any position. Each triode unit is independent of the other except for the common heater. Type 12BH7 is a DISCONTINUED type listed for reference only.

| HEATER ARRANGEMENT: | Series | Parallel | |
|---|-----------|-----------|---------|
| HEATER VOLTAGE (AC/DC) | 12.6 | 6.3 | volts |
| HEATER CURRENT. | 0.3 | 0.6 | ampere |
| HEATER WARM-UP TIME (Average) for 12BH7-A | | 11 | seconds |
| DIRECT INTERELECTRODE CAPACITANCES (Approx.): | Unit No.1 | Unit No.2 | |
| Grid to Plate | 2.6 | 2.6 | pf |
| Grid to Cathode and Heater | 3.2 | 3.2 | pf |
| Plate to Cathode and Heater | 0.5 | 0.4 | pf |
| Plate of Unit No.1 to Plate of Unit No.2 | 0.8 | | pf |

CLASS A1 AMPLIFIER (Each Unit)

| Maximum Ratings, (Design-Center Values): | | |
|---|----------------|-------|
| PLATE VOLTAGE | 300 max | volts |
| GRID VOLTAGE: | | |
| Negative-bias value | -50 max | volts |
| Positive-bias value | 0 max | volts |
| CATHODE CURRENT | 20 max | ma |
| PLATE DISSIPATION: | | |
| Each Plate | 3.5 max | watts |
| Both Plates (Both units operating) | 7 max | watts |
| PEAK HEATER-CATHODE VOLTAGE: | | |
| Heater negative with respect to cathode | 200 max | volts |
| Heater positive with respect to cathode | 200=max | volts |
| The dc component must not exceed 100 volts. | | |
| Characteristics: | | |
| | 050 | |
| Plate Voltage | 250 -10.5 | volts |
| Grid Voltage | -10.0 | volts |
| | | |

RCA Receiving Tube Manual =

| Amplification Factor. Plate Resistance (Approx.). Transconductance. Grid Voltage (Approx.) for plate current of 50 μa. Plate Current. Plate Current for grid voltage of -14 volts. | 16.5 5300 3100 -23 11.5 4 | ohms µmhos volts ma ma |
|---|--|------------------------------------|
| Maximum Circuit Values: | | |
| Grid-Circuit Resistance: For fixed-bias operation. For cathode-bias operation. | 0.25 max 1.0 max | megohm megohm |

OSCILLATOR (Each Unit)

For operation in a 525-line, 30-frame system

| | Vertical Deflection | Horizontal Deflection | |
|--|------------------------|--------------------------|---------|
| Maximum Ratings, (Design-Center Values): | Oscillator | Oscillator | |
| DC PLATE VOLTAGE | 450 max | 450 max | volts |
| PEAK NEGATIVE-PULSE GRID VOLTAGE | -400 max | -600 max | volts |
| PEAK CATHODE CURRENT. | 70 max | 300 max | ma |
| AVERAGE CATHODE CURRENT | 20 max | 20 max | ma |
| PLATE DISSIPATION: | | | |
| Each Plate | | 3.5 max | watts |
| Both Plates (Both units operating) | 7 max | 7 max | watts |
| PEAK HEATER-CATHODE VOLTAGE: | | | |
| Heater negative with respect to cathode | 200 max | 200 max | volts |
| Heater positive with respect to cathode | $200^{\circ}max$ | 2 00° max | volts |
| Maximum Circuit Values: | | | |
| Grid-Circuit Resistance | 2.2 max | 2.2 max | megohms |

VERTICAL DEFLECTION AMPLIFIER (Each Unit)

For operation in a 525-line, 30-frame system


| Maximum Ratings, (Design-Center Values): | | |
|---|------------------|-------|
| DC PLATE VOLTAGE | 450 max | volts |
| PEAK POSITIVE-PULSE PLATE VOLTAGE# (Absolute maximum) | 1500∎max | volts |
| PEAK NEGATIVE-PULSE GRID VOLTAGE | -250 max | volts |
| PEAK CATHODE CURRENT | 70 max | ma |
| AVERAGE CATHODE CURRENT | 20 max | ma |
| PLATE DISSIPATION: | | |
| Each Plate | 3.5 max | watts |
| Both Plates (Both units operating) | 7 max | watts |
| PEAK HEATER-CATHODE VOLTAGE: | | |
| Heater negative with respect to cathode | 200 max | volts |
| Heater positive with respect to cathode | $200^{\circ}max$ | volts |
| | | |

Maximum Circuit Value:

 Grid-Circuit Resistance:
 2.2 max
 megohms


 # The duration of the voltage pulse must not exceed 15 per cent of one vertical scanning cycle. In a 525-line, 30-frame system, 15 per cent of one vertical scanning cycle is 2.5 milliseconds.
 Under no circumstances should this absolute value be exceeded.

° The dc component must not exceed 100 volts.

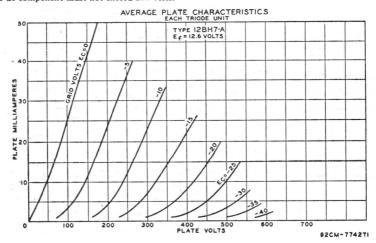

= Technical Data =

BEAM POWER TUBE



Miniature type used in audio output stages of television and radio receivers employing series-connected heater strings. Outline 8D, OUTLINES SECTION. Heater volts (ac/dc), 12.6: amperes, 0.6: warm-up time (average), 11 seconds. Peak heater-cathode volts, 200 max. When the heater is positive with respect to the cathode, the dc component of the heater-cathode voltage must not exceed 100 volts. Except

12BK 5 **Related types:** 6BK5, 25BK5

for heater and heater-cathode ratings, this type is identical with miniature type 6BK5. Type 12BK5 is used principally for renewal purposes.

REMOTE-CUTOFF PENTODE

Miniature type used as if and rf amplifier in automobile radio receivers operating from a 12-volt storage battery. Outline 7B, OUT-LINES SECTION. Tube requires miniature seven-contact socket. Heater-voltage range (ac/dc), 10 to 15.9; amperes at 12.6 volts, 0.15. Characteristics as class A1 amplifier: heater volts, 12.6; plate and grid-No.2 volts, 12.6 (30 max); grid No.3 connected to cathode at socket;

12BL6

12BQ6GTB

/12CU6

Related types:

25BQ6GTB/25CU6


grid-No.1 volts, 0 max; grid-No.1 resistor, 2.2 megohms, plate resistance (approx.), 0.5 megohm; transconductance, 1350 µmhos; plate ma., 1.35; grid-No.2 ma., 0.5; cathode ma., 20 max; peak heater-cathode volts, 30 max. This type is used principally for renewal purposes.



BEAM POWER TUBE

Glass octal type used as horizontaldeflection amplifier in television receivers employing series-connected heater strings. Outline 15C, OUT- 6BQ6GTB/6CU6: 17BQ6GTB, LINES SECTION. This type may be

supplied with pin No.1 omitted. Heater volts (ac/dc), 12.6; amperes, 0.6; warm-up time (average), 11 seconds. Except for heater ratings, this type is identical with glass octal type 6BQ6-GTB/6CU6.



TWIN DIODE—HIGH-MU TRIODE

Miniature type used as combined sync separator and horizontal phase detector in television receivers. Outline 8B, OUTLINES SEC-TION. Tube requires miniature nine-contact socket. Heater volts (ac/dc), 12.6 (series), 6.3 (parallel); amperes, 0.225 (series), 0.45 (parallel). For maximum ratings, characteristics, and curves of triode unit, refer to type 12AT7. Maximum ratings of diode units (each unit): peak inverse

12BR7

plate volts, 300 max; peak plate ma., 60 max; peak heater-cathode volts, 200 max (the dc component must not exceed 100 volts). Type 12BR7 is used principally for renewal purposes.



HALF-WAVE VACUUM RECTIFIER

Novar type used as damper tube in horizontal-deflection circuits of blackand-white television receivers employing series-connected heater strings. Outline 10D, OUTLINES SECTION.

2BS3 Related types: 6BS3, 17BS3

Heater volts (ac/dc), 12.6; amperes, 0.6; warm-up time (average), 11 seconds. Except for heater ratings, this type is identical with novar type 6BS3.

387

SHARP-CUTOFF PENTODE


Miniature type used as video amplifier in television receivers. Outline 8D, OUTLINES SECTION. Tube requires miniature nine-contact socket. Heater volts (ac/dc), 12.6 (series), 6.3 (parallel); amperes, 0.3 (series), 0.6 (parallel). Maximum ratings as class A₁ amplifier: plate volts, 300 max; grid-No.3 volts, 0 max; grid-No.2 volts, 175 max; grid-No.1 volts, -50 max; plate dissipation, 6.25 max watts; grid-No.2 in-



put, 1 max watt; peak heater-cathode volts, 200 max (the dc component must not exceed 100 volts). This type is used principally for renewal purposes.

FULL-WAVE VACUUM RECTIFIER

Miniature type used in full-wave power supplies having high dc output current requirements. Outline 8D, OUTLINES SECTION. Type 12BW4 requires miniature nine-contact socket



and may be mounted in any position. Heater volts (ac/dc), 12.6; amperes 0.45. It is especially important that this tube, like other power-handling tubes, be adequately ventilated. Except for heater ratings, this type is identical with miniature type 6BW4.

SHARP-CUTOFF PENTODE

12BY7 12BY7A amplifier in tel 12BY7A has warm-up time

12BV7

28W4

Related type:

68W4

Miniature types used as video amplifier in television receivers. Type 12BY7-A has a controlled heater warm-up time for use in series-connected heater strings. Outline 8D,




OUTLINES SECTION. Tubes require miniature nine-contact socket and may be mounted in any position. Type 12BY7 is a DISCONTINUED type listed for reference only.

| HEATER ARRANGEMENT: Series HEATER VOLTAGE (AC/DC) 12.6 HEATER CURRENT. 0.3 HEATER WARM-UP TIME (Average) for 12BY7-A — DIRECT INTERELECTRODE CAPACITANCES: Grid No.1 to Plate. Grid No.1 to Plate. Grid No.3, and Internal Shield Plate to Cathode, Heater, Grid No.2, Grid No.3, and Internal Shield | Parallel 6.3 0.6 11 0.063 10.2 3.5 | volts ampere seconds pf pf pf |
|---|--|--|
| CLASS A1 AMPLIFIER | | |
| Maximum Ratings, (Design-Maximum Values): | | |
| PLATE SUPPLY VOLTAGE. GRID-NO.3 (SUPPRESSOR-GRID) VOLTAGE, Positive value. | 330 max 0 max | volts |
| GRID-NO.2 (SCREEN-GRID) VOLTAGE GRID-NO.1 (CONTROL-GRID) VOLTAGE: | 190 max | volts |
| Negative-bias value Positive-bias value | -55 max 0 max | volts volts |
| GRID-NO.2 INPUT. PLATE DISSIPATION | 1.2 max 6.5 max | watts watts |
| PEAK HEATER-CATHODE VOLTAGE: Heater negative with respect to cathode | 200 max 200°max | volts |
| Characteristics: | | |
| Plate Supply Voltage | 250 | volts |
| Grid No.3 | | |
| Grid-No.2 Supply Voltage Cathode-Bias Resistor | 180 100 | volts |
| Plate Resistance (Approx.) | 93000 | ohms |
| Transconductance | 11000 | μmhos |
| Plate Current | 26 5.75 | ma |
| Grid-No.1 Voltage (Approx.) for plate current of 20 µa | -11.6 | ma volts |



Maximum Circuit Values:

Grid-No.1-Circuit Resistance: 0.25 max megohm For fixed-bias operation ... For cathode-bias operation 1 max megohm The dc component must not exceed 100 volts.

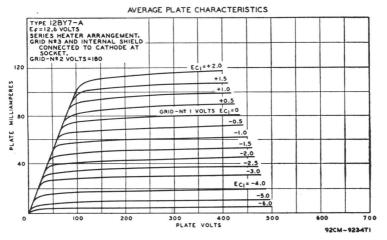


6)62 G3

SEMIREMOTE-CUTOFF PENTODE

Miniature type used in gain-controlled video if stages of television receivers. Outline 7B, OUTLINES SECTION. Tube requires miniature seven-contact socket and may be

mounted in any position. Heater volts (ac/dc), 12.6; amperes, 0.15. Except for heater ratings, this type is identical with miniature type 6BZ6.



HIGH-MU TWIN TRIODE

Miniature type used in sync-separator and sync-amplifier circuits of k_{T_1} television receivers. This tube is also used in clipping circuits and in generalpurpose audio amplifier applications.



12BZ6

Related types:

3BZ6, 4BZ6, 6BZ6

Outline 8D, OUTLINES SECTION. Tube requires miniature nine-contact socket and may be mounted in any position. Heater volts (ac/dc), 12.6 (series), 6.3 (parallel); amperes, 0.3 (series), 0.6 (parallel).

| CLASS / | AN AM | APLIFIER | (Each | Unit) |
|---------|-------|----------|-------|-------|
|---------|-------|----------|-------|-------|

Maximum Ratings. (Design-Center Values):

| indxinioni naniga, (Deergin Center i anaco) | | |
|---|---|-------------|
| PLATE VOLTAGE. | 300 max | volts |
| Negative-bias value | -50 max | volts |
| PLATE DISSIPATION | $\begin{array}{c} 0 \ max \\ 1.5 \ max \end{array}$ | watts |
| PEAK HEATER-CATHODE VOLTAGE: Heater negative with respect to cathode | 180 max | volts |
| Heater positive with respect to cathode | 180 max | volts |
| Characteristics: | 250 | volts |
| Plate Voltage Grid Voltage | -2 | volts |
| Amplification Factor Plate Resistance (Approx.) | 100 31800 | ohms |
| Transconductance | 3200 2.5 | µmhos ma |
| Plate Current | 2.0 | ma |

Maximum Circuit Value: Grid-Circuit Resistance: For contact-potential-bias operation

12C5

12C8

Refer to type 12CU5/12C5

TWIN DIODE-SEMIREMOTE-CUTOFF PENTODE

Metal type used as combined detector, amplifier, and avc tube in ac/dc receivers. Outline 3. OUTLINES SECTION. Heater volts (ac/dc), 12.6; amperes, 0.15. Except for heater ratings, this type is identical with metal type 6B8. Type 12C8 is used principally for renewal purposes.

BEAM POWER TUBE

Miniature type used in the audio output stages of television receivers. This type has a controlled heater warm-up time for use in seriesconnected heater strings. Outline 7C, OUT-LINES SECTION. Tube requires miniature seven-contact socket. Heater volts (ac/dc), 12.6; amperes, 0.6; warm-up time (average), 11 seconds. Peak heater-cathode volts: heater negaPD G2P G3c

5 max megohms



tive with respect to cathode, 300 max (the dc component must not exceed 200 volts); heater positive with respect to cathode, 200 max (the dc component must not exceed 100 volts). Except for heater and heater-cathode ratings, this type is identical with miniature type 6CA5.

REMOTE-CUTOFF PENTODE

Miniature type used as if amplifier in automobile radio receivers operating from a 12-volt storage battery. Outline 7C, OUTLINES SEC-TION. Tube requires miniature seven-contact socket. Heater-voltage range (ac/dc), 10 to 15.9; amperes at 12.6 volts, 0.45. Characteristics as class A1 amplifier: heater volts, 12.6; plate and grid-No.2 volts, 12.6 (16 max); grid-No.1 volts 0 max; grid-No.1 resistor (bypassed), 2.2 meg-

ohms; plate resistance (approx.), 0.04 megohm; transconductance, 3800 µmhos; plate ma., 4.5; grid-No.2 ma., 3.5; peak heater-cathode volts, 16 max. This type is used principally for renewal purposes.

DIODE-**REMOTE-CUTOFF PENTODE**

Miniature type used as combined detector and audio amplifier in automobile and ac-operated radio receivers. The diode unit is used as an AM detector, and the pentode unit as an




là,

automatic-volume-controlled audio amplifier. Outline 7B, OUTLINES SECTION. Heater volts (ac/dc), 12.6; amperes, 0.15. Except for heater ratings, this type is identical with miniature type 6CR6.

MEDIUM-MU TRIODE-SHARP-CUTOFF PENTODE

Miniature type used in television receivers employing series-connected heater strings. Pentode unit is used as video amplifier; triode unit is used in sweep-oscillator sync-amplifier, syncseparator, and sync-clipper circuits. Outline 8D, OUTLINES SECTION. Tube requires miniature nine-contact socket. Heater volts (ac/dc), 12.6; amperes, 0.3; warm-up time (average), 11 seconds. Characteristics of triode unit as class



Related types: 6CA5, 25CA5

12CA5

12CN5

12CR6

12CT8

390

Technical Data

A1 amplifier: plate supply volts, 150 (300 max); cathode-bias resistor, 150 ohms; amplification factor, 40; plate resistance (approx.), 8200 ohms; transconductance, 4900 mmos; plate ma., 9; plate dissipation, 2.5 max watts. Pentode unit: plate supply volts, 200 (300 max); grid-No.2 supply volts, 125 (300 max); cathode-bias resistor, 82 ohms; plate resistance (approx.), 0.15 megohm; transconductance, 7000 μ mhos; plate ma., 15; grid-No.2 ma., 3.4; plate dissipation, 2.75 max watts; grid-No.2 input, 0.9 max watt. Peak heater-cathode volts, 200 max (the dc component must not exceed 100 volts when heater is positive with respect to cathode). This type is used principally for renewal purposes.



BEAM POWER TUBE

Miniature type used in the audio output stage of television receivers employing series-connected heater strings. Outline 7C, OUTLINES SECTION. Heater volts (ac/dc), 12.6; amperes, 12CU5 /12C5 Related types: 6CU5, 17CU5

12CU6

0.6; warm-up time (average), 11 seconds. Except for heater rating, this type is identical with miniature type 6CU5.

Refer to type 12BQ6-GBT//12CU6

REMOTE-CUTOFF PENTODE

Miniature type used as rf amplifier in low B+ voltage automobile radio receivers operating directly from 12-volt storage-battery systems. Outline 7B, OUTLINES SECTION. Tube requires miniature seven-contact socket. Heatervoltage range (ac/dc), 10 to 15.9; amperes at 12.6 volts, 0.15. Characteristics as class A₁ amplifier: heater volts, 12.6; plate and grid-No.2 volts, 12.6 (33 max); grid No.3 connected to

12CX6

cathode at socket; grid-No.1 volts, 0 max; grid-No.1 resistor (bypassed), 2.2 megohms; plate resistance (approx.), 0.04 megohm; transconductance, 3100μ mhos; plate ma., 3; grid-No.2 ma., 1.4; peak heater-cathode volts, 30 max. This type is used principally for renewal purposes.



HALF-WAVE VACUUM RECTIFIER

Glass octal type used as damper diode in horizontal-deflection circuits of television receivers employing seriesconnected heater strings. Outline 14C, OUTLINES SECTION. Tube re-

12D4

quires octal socket and may be mounted in any position. Socket terminals 1, 2, 4, and 6 should not be used as tie points. This type may be supplied with pin 1 omitted. It is especially important that this tube, like other power-handling tubes, be adequately ventilated. Heater volts (ac/dc), 12.6; amperes, 0.6; warm-up time (average), 11 seconds.

DAMPER SERVICE

For operation in a 525-line, 30-frame system

Maximum Ratings, (Design-Maximum Values):

| maximum namigu, (Deorgin maximum rando), | | |
|--|----------------------------------|-----------|
| PEAK INVERSE PLATE VOLTAGE# | 4400 max | volts |
| PEAK PLATE CURRENT. | 900 max | ma |
| DC PLATE CURRENT | 155 max | ma |
| PLATE DISSIPATION | 5.5 max | watts |
| PEAK HEATER-CATHODE VOLTAGE: | | |
| Heater negative with respect to cathode# | 44 00 [▲] max | volts |
| Heater positive with respect to cathode | 300 max | volts |
| # The duration of the voltage pulse must not exceed 15 per cent of one horizon 525-line, 30-frame system, 15 per cent of one horizontal scanning cycle is 10 m | ital scanning cy icroseconds. | cle. In a |
| * The dc component must not exceed 900 volts. | | |
| 1100 | | |

The dc component must not exceed 100 volts.

BEAM POWER TUBE

Miniature type used as verticaldeflection-amplifier tube in television receivers employing series-connected K,G3 heater strings. Outline 8D, OUT-LINES SECTION, except all vertical



dimensions of this type are 1/8 inch greater. Tube requires miniature nine-contact socket and may be operated in any position. Heater volts (ac/dc), 12.6; amperes, 0.6; warm-up time (average). 11 seconds.

CLASS A1 AMPLIFIER

| Maximum Ratings, (Design-Center Values): | | |
|---|--|--|
| PLATE VOLTAGE. | 300 max | volts |
| GRID-NO.2 (SCREEN-GRID) VOLTAGE. | 150 max | volts |
| GRID-NO.2 INPUT. | 1.25 max | watts |
| PLATE DISSIPATION. | 10 max | watts |
| PEAK HEATER-CATHODE VOLTAGE: | 10 max | walls |
| Heater negative with respect to cathode | 200 max | volts |
| Heater positive with respect to cathode | 200 max | volts |
| | 200 mai | VOILB |
| Typical Operation: | | |
| Plate Supply Voltage | 200 | volts |
| Grid-No.2 Supply Voltage | 125 | volts |
| Cathode-Bias Resistor | 180 | ohms |
| Peak AF Grid-No.1 Voltage | 8.5 | volts |
| Zero-Signal Plate Current. | 46 | ma |
| Maximum-Signal Plate Current | 47 | ma |
| Zero-Signal Grid-No.2 Current | 2.2 | ma |
| Maximum-Signal Grid-No.2 Current. | 8.5 | ma |
| Plate Resistance (Approx.) | 28000 | ohms |
| Transconductance | 8000 | µmhos |
| Load Resistance. | 4000 | ohms |
| Total Harmonic Distortion. | 10 | per cent |
| Maximum-Signal Power Output. | 3.8 | watta |
| | 0.0 | Watts |
| Maximum Circuit Values: | | |
| | | |
| Grid-No. 1 Circuit Resistance: | | |
| | 0.1 max | megohm |
| Grid-No. 1 Circuit Resistance: | | megohm megohms |
| Grid-No. 1 Circuit Resistance: For fixed-bias operation. For cathode-bias operation. | | |
| Grid-No. 1 Circuit Resistance: For fixed-bias operation For cathode-bias operation VERTICAL-DEFLECTION AMPLIFIER | | |
| Grid-No. 1 Circuit Resistance: For fixed-bias operation For cathode-bias operation. VERTICAL-DEFLECTION AMPLIFIER For operation in a 525-line, 30-frame system | | |
| Grid-No. 1 Circuit Resistance: For fixed-bias operation For cathode-bias operation VERTICAL-DEFLECTION AMPLIFIER | | |
| Grid-No. 1 Circuit Resistance: For fixed-bias operation For cathode-bias operation VERTICAL-DEFLECTION AMPLIFIER For operation in a 525-line, 30-frame system Maximum Ratings, (Design-Center Values): DC PLATE VOLTAGE | | |
| Grid-No. 1 Circuit Resistance: For fixed-bias operation For cathode-bias operation VERTICAL-DEFLECTION AMPLIFIER For operation in a 525-line, 30-frame system Maximum Ratings, (Design-Center Values): DC PLATE VOLTAGE | 2.2 max | megohms |
| Grid-No. 1 Circuit Resistance: For fixed-bias operation For cathode-bias operation. VERTICAL-DEFLECTION AMPLIFIER For operation in a 525-line, 30-frame system Maximum Ratings, (Design-Center Values): DC PLATE VOLTAGE DC PLATE VOLTAGE (Absolute Maximum) ⁴ | 2.2 max 300 max | wolts |
| Grid-No. 1 Circuit Resistance: For fixed-bias operation For cathode-bias operation VERTICAL-DEFLECTION AMPLIFIER For operation in a 525-line, 30-frame system Maximum Ratings, (Design-Center Values): DC PLATE VOLTAGE PEAK POSITIVE-PULSE PLATE VOLTAGE (Absolute Maximum) ⁴ . DC GRID-NO.2 (SCREEN-GRID) VOLTAGE | 2.2 max 300 max 2000=max | volts volts |
| Grid-No. 1 Circuit Resistance: For fixed-bias operation For cathode-bias operation VERTICAL-DEFLECTION AMPLIFIER For operation in a 525-line, 30-frame system Maximum Ratings, (Design-Center Values): DC PLATE VOLTAGE PEAK POSITIVE-PULSE PLATE VOLTAGE (Absolute Maximum)^. DC GRID-NO.2 (SCREEN-GRID) VOLTAGE PEAK NEGATIVE-PULSE GRID-NO.1 (CONTROL-GRID) VOLTAGE. | 2.2 max 300 max 2000∎max 150 max | volts volts volts volts |
| Grid-No. 1 Circuit Resistance: For fixed-bias operation . For cathode-bias operation . VERTICAL-DEFLECTION AMPLIFIER For operation in a 525-line, 30-frame system Maximum Ratings, (Design-Center Values): DC PLATE VOLTAGE . PEAK POSITIVE-PULSE PLATE VOLTAGE (Absolute Maximum) ^A . DC GRID-NO.2 (SCREEN-GRID) VOLTAGE . PEAK NEGATIVE-PULSE GRID-NO.1 (CONTROL-GRID) VOLTAGE . PEAK NEGATIVE-PULSE GRID-NO.1 (CONTROL-GRID) VOLTAGE . PEAK COURDENT . | 2.2 max 300 max 2000 ^m max 150 max 250 max 200 max | volts volts volts volts volts |
| Grid-No. 1 Circuit Resistance: For fixed-bias operation For cathode-bias operation VERTICAL-DEFLECTION AMPLIFIER For operation in a 525-line, 30-frame system Maximum Ratings, (Design-Center Values): DC PLATE VOLTAGE PEAK POSITIVE-PULSE DIATE VOLTAGE (Absolute Maximum) ^A . DC GRID-NO.2 (SCREEN-GRID) VOLTAGE PEAK NEGATIVE-PULSE GRID-NO.1 (CONTROL-GRID) VOLTAGE. PEAK CATHODE CURRENT. AVERAGE CATHODE CURRENT. | 2.2 max 300 max 2000 ^m max 150 max -250 max 55 max | volts volts volts volts volts ma ma |
| Grid-No. 1 Circuit Resistance: For fixed-bias operation For cathode-bias operation VERTICAL-DEFLECTION AMPLIFIER For operation in a 525-line, 30-frame system Maximum Ratings, (Design-Center Values): DC PLATE VOLTAGE PEAK POSITIVE-PULSE GRID-NO.1 (CONTROL-GRID) VOLTAGE. PEAK CATHODE CURRENT. AVERAGE CATHODE CURRENT. GRID-NO.2 INPUT. | 2.2 max 300 max 2000=max 150 max 200 max 55 max 1.25 max | volts volts volts volts volts ma ma watts |
| Grid-No. 1 Circuit Resistance: For fixed-bias operation For cathode-bias operation VERTICAL-DEFLECTION AMPLIFIER For operation in a 525-line, 30-frame system Maximum Ratings, (Design-Center Values): DC PLATE VOLTAGE PEAK POSITIVE-PULSE PLATE VOLTAGE (Absolute Maximum) ⁴ . DC GRID-NO.2 (SCREN-GRID) VOLTAGE PEAK CATHODE CURRENT. AVERAGE CATHODE CURRENT. GRID-NO.2 INPUT. PLATE DISSIPATION. | 2.2 max 300 max 2000 ^m max 150 max -250 max 55 max | volts volts volts volts volts ma ma |
| Grid-No. 1 Circuit Resistance: For fixed-bias operation For cathode-bias operation VERTICAL-DEFLECTION AMPLIFIER For operation in a 525-line, 30-frame system Maximum Ratings, (Design-Center Values): DC PLATE VOLTAGE PEAK POSITIVE-PULSE PLATE VOLTAGE (Absolute Maximum) ^A . DC GRID-NO.2 (SCREEN-GRID) VOLTAGE (Absolute Maximum) ^A . PEAK NEGATIVE-PULSE GRID-NO.1 (CONTROL-GRID) VOLTAGE. PEAK CATHODE CURRENT. AVERAGE CATHODE CURRENT. GRID-NO.2 INPUT. PLATE DISSIPATION. PEAK HEATER-CATHODE VOLTAGE: | 2.2 max 300 max 2000 ^m ax 150 max 250 max 200 max 1.25 max 10 max | volts volts volts volts ma ma watts watts |
| Grid-No. 1 Circuit Resistance: For fixed-bias operation For cathode-bias operation. VERTICAL-DEFLECTION AMPLIFIER For operation in a 525-line, 30-frame system Maximum Ratings, (Design-Center Values): DC PLATE VOLTAGE, PEAK POSITIVE-PULSE PLATE VOLTAGE (Absolute Maximum) ^A . DC GRID-NO.2 (SCREEN-GRID) VOLTAGE PEAK CATHODE CURRENT. AVERAGE CATHODE CURRENT. AVERAGE CATHODE CURRENT. AVERAGE CATHODE CURRENT. PLATE DISSIPATION. PLATE PLATE DISSIPATION. PLATE DISSIPATION. | 2.2 max 300 max 2000 ^m max 150 max 200 max 55 max 1.25 max 10 max | wolts volts volts volts volts ma ma watts watts volts |
| Grid-No. 1 Circuit Resistance: For fixed-bias operation For cathode-bias operation VERTICAL-DEFLECTION AMPLIFIER For operation in a 525-line, 30-frame system Maximum Ratings, (Design-Center Values): DC PLATE VOLTAGE PEAK POSITIVE-PULSE PLATE VOLTAGE (Absolute Maximum) ⁴ . DC GRID-NO.2 (SCREN-GRID) VOLTAGE PEAK NEGATIVE-PULSE GRID-NO.1 (CONTROL-GRID) VOLTAGE. PEAK CATHODE CURRENT. AVERAGE CATHODE CURRENT. GRID-NO.2 INPUT. PLATE DISSIPATION. PEAK HEATER-CATHODE VOLTAGE: Heater negative with respect to cathode. Heater positive with respect to cathode. | 2.2 max 300 max 2000 ^m ax 150 max 250 max 200 max 1.25 max 10 max | volts volts volts volts ma ma watts watts |
| Grid-No. 1 Circuit Resistance: For fixed-bias operation For cathode-bias operation VERTICAL-DEFLECTION AMPLIFIER For operation in a 525-line, 30-frame system Maximum Ratings, (Design-Center Values): DC PLATE VOLTAGE PEAK POSITIVE-PULSE GRID-Center Values): DC GRID-NO.2 (SCREEN-GRID) VOLTAGE (Absolute Maximum) ^A . PEAK NEGATIVE-PULSE GRID-NO.1 (CONTROL-GRID) VOLTAGE. PEAK CATHODE CURRENT. AVERAGE CATHODE CURRENT. GRID-NO.2 INPUT. PLATE DISSIPATION. PEAK HEATER-CATHODE VOLTAGE: Heater negative with respect to cathode. Heater positive with respect to cathode. Heater positive with respect to cathode. Maximum Circuit Values: | 2.2 max 300 max 2000 ^m max 150 max 200 max 55 max 1.25 max 10 max | wolts volts volts volts volts ma ma watts watts volts |
| Grid-No. 1 Circuit Resistance: For fixed-bias operation. For cathode-bias operation. VERTICAL-DEFLECTION AMPLIFIER For operation in a 525-line, 30-frame system Maximum Ratings, (Design-Center Values): DC PLATE VOLTAGE. PEAK POSITIVE-PULSE GRID-VOLTAGE (Absolute Maximum)^. DC GRID-NO.2 (SCREEN-GRID) VOLTAGE (Absolute Maximum)^. DC GRID-NO.2 (SCREEN-GRID) VOLTAGE (Absolute Maximum)^. PEAK CATHODE CURRENT. AVERAGE CATHODE CURRENT. AVERAGE CATHODE CURRENT. AVERAGE CATHODE CURRENT. PLATE DISSIPATION. PEAK HEATER-CATHODE VOLTAGE: Heater negative with respect to cathode. Heater positive with respect to cathode. Maximum Circuit Values: Grid-No.1-Circuit Resistance: | 2.2 max 300 max 2000 max -250 max 200 max 1.25 max 10 max 200 max | wolts volts volts volts ma ma watts volts volts volts |
| Grid-No. 1 Circuit Resistance: For fixed-bias operation For cathode-bias operation VERTICAL-DEFLECTION AMPLIFIER For operation in a 525-line, 30-frame system Maximum Ratings, (Design-Center Values): DC PLATE VOLTAGE PEAK POSITIVE-PULSE GRID-Center Values): DC GRID-NO.2 (SCREEN-GRID) VOLTAGE (Absolute Maximum) ^A . PEAK NEGATIVE-PULSE GRID-NO.1 (CONTROL-GRID) VOLTAGE. PEAK CATHODE CURRENT. AVERAGE CATHODE CURRENT. GRID-NO.2 INPUT. PLATE DISSIPATION. PEAK HEATER-CATHODE VOLTAGE: Heater negative with respect to cathode. Heater positive with respect to cathode. Heater positive with respect to cathode. Maximum Circuit Values: | 2.2 max 300 max 2000 [®] max 150 max -250 max 200 max 10 max 200 [®] max 0.1 max | wolts volts volts volts volts ma ma watts watts volts |

• The dc component must not exceed 100 volts.

12DB5


Maximum Patings

* The duration of the voltage pulse must not exceed 15 per cent of one vertical scanning cycle. In a 525-line, 30-frame system, 15 per cent of one vertical scanning cycle is 2.5 milliseconds.

Under no circumstances should this absolute maximum value be exceeded.


DIODE-**REMOTE-CUTOFF PENTODE**

Miniature type used in automobile radio receivers: pentode unit is used as rf or if amplifier. Outline 8B, OUTLINES SECTION. Tube requires miniature nine-contact socket.



Tube requires miniature nine-contact socket. Heater-voltage range (ac/do), 10 to 15.9; am-peres at 12.6 volts, 0.2. Characteristics of pen-tode unit as class A₁ amplifier: heater volts, 12.6; plate and grid-No.2 volts, 12.6 (30 max); or an, 0.5; cathode ma., 20 max; peak heater-cathode volts, 30 max. Maximum diode plate ma., 5; tube voltage drop for plate current of 20 ma., 5 volts. This type is used principally for renewal purposes.

12DE8



5

G2TR 3

GITR

PD2

PTR

8)IC

SHARP-CUTOFF PENTODE

Miniature type used as if-amplifier tube in television receivers. Outline 7B, OUTLINESSECTION. Heater volts (ac/dc), 12.6; amperes, 0.15. Except for heater ratings, this type is identical with miniature type 6DK6.

TWIN DIODE — POWER TETRODE

Miniature type used as combined detector, ave diode, and power amplifier in low B+voltage automobile radio receivers operating from 12-volt storage-battery systems. Outline 8D, OUTLINES SECTION. Tube requires miniature nine-contact socket. Heater-voltage range (ac/dc), 10 to 15.9; amperes at 12.6 volts, 0.5. Typical operation of tetrode unit as class A1 amplifier: heater volts, 12.6; plate and grid12DK6 Related types: 3DK6, 6DK6

12DK7

No.2 volts, 12.6 (30 max); grid-No.1 resistor, 15 megohms; peak af grid-No.1 volts (from 0.2-megohm signal source), 1.4; plate ma., 6 (zero-signal), 2.5 (maximum-signal); load resistance, 3500 ohms; maximum-signal power output, 10 milliwatts; plate dissipation, 0.5 max watt; peak heater-cathode volts, 30 max. Diode characteristics (each unit); heater volts, 12.6; plate volts, 10; plate ma., 1. This type is used principally for renewal purposes.

TWIN DIODE—POWER TETRODE

Miniature type used as combined detector and power amplifier driver in low B+ voltage automobile radio receivers operating directly from 12-volt storage-battery systems. Outline 8D, OUTLINES SECTION. Tube requires miniature nine-contact socket. Heater-voltage range (ac/dc), 10 to 15.9; amperes at 12.6 volts, 0.55. Typical operation of tetrode unit as audio driver: heater volts, 12.6; jalate volts, 12.6 (30

12DL8

max); grid-No.2 (control-grid) volts (obtained for y rectification through a 2.2-megohm resistor), -2 (-20 max); peak af grid-No.2 volts (obtained from 0.1-megohm source), 2.5; grid-No.1 (space-chargegrid) volts, 12.6 (16 absolute max); plate ma., 40 (zero-signal), 8 (maximum signal); grid-No.1 ma., 75; load resistance, 800 ohms; maximum-signal power output, 40 milliwatts. Characteristics: plate, heater, and grid-No.1 volts, 12.6; grid-No.2 volts, -0.5; plate resistance (approx.), 480 ohms; transconductance (grid No.2 to plate), 15000 µmhos; amplification factor (grid No.2 to plate), 7.2. Maximum diode plate ma.(each unit), 5. Peak heater-cathode volts, 30 max. This type is used principally for renewal purposes.



HALF-WAVE VACUUM RECTIFIER

Glass octal type used as damper tube in horizontal-deflection circuits of television receivers employing seriesconnected heater strings. Outline 14F, OUTLINES SECTION. Heater volts




(ac/dc), 12.6; amperes, 0.6; warm-up time (average), 11 seconds. Except for heater rating, this type is identical with glass octal type 6DM4.



BEAM POWER TUBE

Glass octal types used as horizontal-deflection-amplifier tubes in television receivers employing series-connected heater strings. Outline 21, OUT-LINES SECTION. Heater volts (ac/dc), 12.6; amperes, 0.6; warm-up 12DQ6A 12DQ6B Related types: 6DQ6A, 6DQ6B, 17DQ6A, 17DQ6B


time (average), 11 seconds. Except for heater ratings, these types are identical with glass octal types 6DQ6-A and 6DQ6-B, respectively.



RCA Receiving Tube Manual

POWER PENTODE


Miniature type used as video-output-amplifier tube in television receivers employing. series-connected heater strings. Outline 8D, OUTLINES SECTION. Tube requires miniature nine-contact socket. Heater volts (ac/dc), 12.6 (series), 6.3 (parallel); amperes, 0.3 (series), 0.6 (parallel); warm-up time (average), 11 seconds. Characteristics as class A₁ amplifier: plate supply volts, 200 (330 max); grid-No.3 connected to cathode at socket; grid-No.2 supply volts.



125 (330 max); cathode-bias resistor, 68 ohms; plate resistance (approx.), 53000 ohms; transconductance, 10500 umhos; plate ma., 26; grid-No.2 ma., 5.6; plate dissipation, 6.5 max watts; grid-No.2 input, 1.1 max watt; peak heater-cathode volts, 200 max.(the dc component must not exceed 100 volts when heater is positive with respect to cathode). This type is used principally for renewal purposes.

TWIN DIODE—POWER TETRODE


Miniature types used as combined detectors and power-amplifier drivers in low B+voltage automobile radio receivers operating directly from 12-volt storage-battery systems.Outline 8D, OUTLINES SECTION. Tubes require miniature nine-contact socket. Heater voltage range (ac/dc), 10 to 15.9; amperes at 12.6 volts, 0.4. Maximum ratings of tetrode unit as audio driver: plate and grid-No.2 (control-



grid) volts, 16 max; grid-No.1 (space-charge-grid) volts, -16 max; peak heater-cathode volts, 16 max. Characteristics and typical operation with grid-No.2-resistor bias, refer to type 12DL8. Maximum diode plate ma. (each unit), 5. Type 12DS7-A is a DISCONTINUED type listed for reference only. Type 12DS7 is used principally for renewal purposes.

BEAM POWER TUBE


Miniature type used as verticaldeflection-amplifier tube in television receivers employing series-connected heaterstrings.Outline8D,OUTLINES SECTION. Heater volts (ac/dc), 12.6;



amperes, 0.6; warm-up time (average), 11 seconds. Except for heater ratings, this type is identical with type 6DT5.

HIGH-MU TWIN TRIODE


Miniature type used as push-pull rf amplifier and as combined oscillator and mixer in FM tuners. Also useful in a wide variety of applications in radio and television receivers. Outline



8B, OUTLINES SECTION. Heater volts (ac/dc), 12.6; amperes, 0.15. Except for heater ratings, interelectrode capacitances, and basing arrangement, this type is identical with miniature type 12AT7. Except for heating ratings, type 12DT8 is identical with miniature type 6DT8.

TWIN-DIODE—POWER TETRODE

Miniature type used as combined detector, ave, and power-amplifier driver in low B+voltage automobile radio receivers operating di rectly from12-volt storage-battery systems.Outline 8B, OUTLINES SECTION. Tube requires miniature nine-contact socket. Heater-voltage range (ac/dc), 10 to 15.9; ampress at 12.6 volts, 0.25. Typical operation of tetrode unit as audio driver: heater volts, 12.6; plate and grid-No.2



12DS7A

12DS7

12DQ7




Related type: 6DT8

12DU7

volts, 12.6 (16 max); grid-No.1 voltage obtained by rectification through 2.2-megohm resistor; peak af grid-No.1 volts, 2.2; load resistance, 2700 ohms; maximum-signal power output, 25 milliwatts. Maximum diode plate ma. (each unit), 1. Peak heater-cathode volts, 16 max. This type is used principally for renewal purposes.


TWIN DIODE—POWER TETRODE



Miniature type used as combined detector and power-amplifier driver in low B+ voltage G2TR automobile radio receivers operating directly from 12-volt storage-battery systems. Outline 8D, OUTLINES SECTION. Tube requires miniature nine-contact socket. Heater-voltage (ac/dc), 10 to 15.9; amperes at 12.6 volts, 0.375. Typical operation of tetrode unit as audio driver: heater volts, 12.6; plate and grid-No.1

12DV8

(space-charge-grid) supply volts, 12.6 (16 max); grid-No.2 resistor, 4.7 megohms; cathode-bias resistor, 18 ohms; peak af grid-No.2 supply volts (obtained from 0.3-megohm signal source), 1.2; plate resistance (approx.), 900 ohms; transconductance (grid No.2 to plate), 8500 µmhos; amplification factor (grid No.2 to plate), 7.6; indicated-signal plate ma., 6.8; grid-No.1 ma., 54; load resistance, 1250 ohms; indicatedsignal power output, 5 milliwatts. Maximum diode plate ma. (each unit), 5. Peak heater-cathode volts, 16 max. This type is used principally for renewal purposes.



DUAL TRIODE

^{GTI} Miniature type containing highmu and medium-mu triodes; used as
 ^{KTI} amplifier and phase inverter in audio equipment. Outline 8B, OUTLINES SECTION. Tube requires miniature

12DW7

nine-contact socket and may be operated in any position. Heater volts (ac/dc), 12.6 (series), 6.3 (parallel); amperes, 0.15 (series), 0.3 (parallel).

CLASS A1 AMPLIFIER

| Maximum Ratings, (Design-Maximum Values): | | | Unit No.1 | Unit No.2 | |
|---|-------|------------------|---------------------------------------|-----------------------------------|-------------------------------|
| PLATE VOLTAGE | | | 330 max | 330 max | volts |
| GRID VOLTAGE: Negative-bias value Positive-bias value CATHODE CURRENT. PLATE DISSIPATION. PEAK HEATER-CATHODE VOLTAGE: | | · · · · · · · | 55 max 0 max 1.2 max 200 max | - 22 max 3.3 max 200 max | volts volts ma watts |
| Heater negative with respect to cathode Heater positive with respect to cathode | | | $200^{\circ}max$ | 200 max $200^{\circ}max$ | volts volts |
| neater positive with respect to cathode | | | 200 max | 200 max | voits |
| | | | | | |
| Characteristics: | Uni | it No.1 | Unit | No.2 | |
| Plate Voltage | 100 | 250 | 100 | 250 | volts |
| Grid Voltage | -1 | -2 | 0 | -8.5 | volts |
| Amplification Factor | 100 | 100 | 20 | 17 | |
| Plate Resistance (Approx.) | 80000 | 62500 | 6500 | 7700 | ohms |
| Transconductance | 1250 | 1600 | 3100 | 2200 | μmhos |
| Plate Current | 0.5 | 1.2 | 11.8 | 10.5 | ma |
| Grid Voltage (Approx.) for plate current of 10 µa | - | - | - | -24 | volts |
| | | | | | |
| Maximum Circuit Values: | | | | | |
| Grid-Circuit Resistance: | | | Unit No.1 | Unit No.2 | |
| For fixed-bias operation | | | 0.25 max | 0.25 max | megohm |

For cathode-bias operation

° The dc component must not exceed 100 volts.

395

1 max megohm

1 max

= RCA Receiving Tube Manual =

MEDIUM-MU TRIODE— REMOTE-CUTOFF TETRODE

Miniature type used in low B+ voltage automobile radio receivers operating directly G_{2TR} from 12-volt storage-battery systems. The tetrode unit is used for relay service in a signalseeker. Outline 8B, OUTLINES SECTION. κ_{TR} Tube requires miniature nine-contact socket. Heater-voltage range (ac/dc), 10 to 15.9; amperes at 12.6 volts, 0.35. Characteristics as class A₁ amplifier: heater volts, 12.6; plate and grid-

No.2 (pentode unit) volts, 12.6 (16 max); grid volts (triode unit), 0; grid-No.1 resistor (pentode unit), 2.2 megohms; amplification factor (triode unit), 20; plate resistance (apprcx.), 10000 ohms (triode unit), 5000 ohms (tetrode unit); transconductance, 2000 µmhos (triode unit), 6000 µmhos (tetrode unit); plate ma., 1.2 (triode unit), 14 (tetrode unit); grid-No.2 ma. (tetrode unit), 2; peak heater-cathode volts, 16 max. This type is used principally for renewal purposes.

REMOTE-CUTOFF PENTODE

Miniature type used as rf and if amplifier in low B^+ voltage automobile radio receivers operating directly from 12-volt storage-battery systems. Outline 7B, OUTLINES SECTION.



12 6

volts

PTR

KT,IS

5

GITR

Tube requires miniature seven-contact socket and may be mounted in any position.

| HEATER-VOLTAGE RANGE (AC/DC) [®] | 15.9 | volts |
|---|----------|----------------|
| | 0.19 | ampere |
| DIRECT INTERELECTRODE CAPACITANCES: | | |
| | | |
| Grid No.1 to Plate | 0.05 max | tq |
| Grid No.1 to Cathode, Heater, Grid No.2, Grid No.3, and Internal Shield | 9.5 | pf pf pf |
| Plate to Cathode, Heater, Grid No.2, Grid No.3, and Internal Shield | 4 | nf |
| Trate to Cathole, Meater, Grid 10.2, Grid 10.0, and Internal Sineld | * | pr |
| | | |
| | | |


CLASS A1 AMPLIFIER

| Maximum Ratings, (Design-Maximum Values): | | |
|---|--------|-------|
| PLATE VOLTAGE | 16 max | volts |
| GRID-NO.2 (SCREEN-GRID) VOLTAGE | 16 max | volts |
| GRID-NO.1 (CONTROL-GRID) VOLTAGE, Positive-bias value | 0 max | volts |
| PEAK HEATER-CATHODE VOLTAGE: | | |
| Heater negative with respect to cathode | 16 max | volts |
| Heater positive with respect to cathode | 16 max | volts |
| | | |


Characteristics with 12.6 Volts on Heater: Plate Voltage. Grid No.3.

12DY8

12DZ6

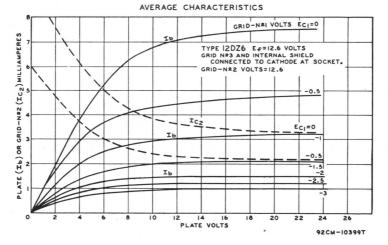

| Grid-No 2 Voltage. Grid-No.1 Supply Voltage. Grid-No.1 Resistor (Bypassed). Grid-No.3 Resistor (Bypassed). Plate Resistance (Approx.) Transconductance. | $12.6 \\ 0 \\ 10 \\ 10 \\ 25000 \\ 3800$ | volts volts megohms megohms ohms µmhos |
|---|--|---|
| Grids No.1 and No.3 Supply Voltage (Approx.) for transconductance, grid No.1 to plate, of 10 µmhos. Plate Current. Grid-No.2 Current. | $\begin{array}{c}-10\\4.5\\2.2\end{array}$ | volts ma ma |
| Maximum Circuit Values: Grid-No.1-Circuit Resistance. Grid-No.3-Circuit Resistance. *For longest life, it is recommended that the heater be operated within the voltag | 10 max | megohms megohms to 14 volts. |




REMOTE-CUTOFF PENTODE

Miniature type used as rf amplifier in low B+ voltage automobile radio receivers operating directly from 12-volt storage-battery systems. Outline 7B, OUTLINES SECTION. Tube requires miniature seven-contact socket. Heatervoltage range (ac /dc), 10 to 15.9; amperes at 12.6 volts, 0.19. Characteristics as class A₁ amplifier: heater volts, 12.6; plate and grid-No.2 volts, 12.6 (16 max); grid No.3 connected to

12EA6

cathode at socket; grid-No.1 resistor (bypassed), 10 megohms; plate resistance (approx.), 32000 ohms; transconductance, 3800 μ mhos; plate ma., 3.2; grid-No.2 ma., 1.4; peak heater-cathode volts, 16 max. This type is used principally for renewal purposes.



MEDIUM-MU TRIODE— SEMIREMOTE-CUTOFF PENTODE

Miniature type used as combined vhf oscillator and mixer in low B+ voltage automobile radio receivers operating directly from 12-volt storage-battery systems. Outline 8B, OUT-LINES SECTION. Tube requires miniature nine-contact socket. Heater-voltage range (ac/dc), 10 to 15.9; amperes at 12.6 volts, 0.225. Characteristics as class A₁ amplifier: heater volts, 12.6; plate and grid-No.2 (pentode unit)

12EC8

volts, 12.6 (16 max); grid-No.1 supply volts, 0; grid-No.1 resistor, 4700 ohms (triode unit), 33000 ohms (pentode unit); amplification factor (triode unit), 25; plate resistance (approx.), 6000 ohms (triode unit), 0.75 megohm (pentode unit); transconductance, 4700 μ mhos (triode unit), 2000 μ mhos (pentode unit); plate ma., 2.4 (triode unit), 0.66 (pentode unit); grid-No.2 ma. (pentode unit), 0.28; peak heater-cathode volts, 16 max. This type is used principally for renewal purposes.



BEAM POWER TUBE

Miniature type used as audio-output amplifier in radio and television receivers employing series-connected heater strings. Outline 13, OUTLINES SECTION. Tube requires miniature



seven-contact socket and may be mounted in any position. Heater volts (ac/dc), 12.6; amperes, 0.45; warm-up time (average), 11 seconds.

CLASS A1 AMPLIFIER

Maximum Ratings, (Design-Maximum Values):

RCA Receiving Tube Manual =


| PEAK HEATER-CATHODE VOLTAGE: Heater negative with respect to cathode | | 300• <i>max</i> | volts |
|---|-------|---------------------------------|----------|
| Heater positive with respect to cathode | | 2 00 • <i>max</i> | volts |
| Typical Operation: | | | |
| Plate Voltage | 110 | 125 | volts |
| Grid-No.2 Voltage | 110 | 125 | volts |
| Grid-No.1 (Control-Grid) Voltage | -4 | -4.5 | volts |
| Peak AF Grid-No.1 Voltage | 4 | 4.5 | volts |
| Zero-Signal Plate Current | 32 | 37 | ma |
| Maximum-Signal Plate Current. | 31 | 36 | ma |
| Zero-Signal Grid-No.2 Current. | 4 | 7 | ma |
| Maximum-Signal Grid-No.2 Current | 8 | 11 | ma |
| Plate Resistance (Approx.). | 14000 | 14000 | ohms |
| Transconductance | 8100 | 8500 | μmhos |
| Load Resistance. | 4500 | 4500 | ohms |
| Total Harmonic Distortion | 5 | 5 | per cent |
| Maximum-Signal Power Output | 1.1 | 1.5 | watts |
| Maximum Circuit Values: | | | |
| Grid-No.1-Circuit Resistance: | | | |
| For fixed-bias operation | | 0.1 max | megohm |
| For cathode-bias operation | | 0.5 max | megohm |

• The dc component must not exceed 200 volts.

The dc component must not exceed 100 volts.

PENTAGRID AMPLIFIER

Miniature type used as rf amplifier in low B+ voltage automobile radio receivers operating directly from 12-volt storage-battery systems. Outline 7B, OUTLINES SECTION. Tube requires miniature seven-contact socket. Heatervoltage range (ac/dc), 10 to 15.9; amperes at 12.6 volts, 0.15. Characteristics as class A₁ amplifier: heater volts, 12.6; plate and grids-No.2and-No.4 volts, 12.6 (16 max); grid No.3 con-



nected to grid-No.1 through 0.1-megohm resistor; grid-No.1 volts (developed across 2.2-megohm resistor), -0.6; plate resistance (approx.), 0.15 megohm; transcenductance (grid No.3 to plate), 800 µmhos; plate ma., 0.55; grids-No.2-and-No.4 ma., 2.8; cathode ma., 20 mex; peak heater-cathode volts, 16 max. This type is used principally for renewal purposes.

POWER PENTODE

Miniature type used in the audio output stage of radio and television receivers employing series-connected heater strings. Outline 7C, OUTLINES SECTION. Heater volts (ac/dc),



12.6; amperes, 0.6; warm-up time (average), 11 seconds. Peak heater-cathode voltage when the heater is negative with respect to the cathode, 300 max volts. Except for heater and heater-cathode ratings, this type is identical with miniature type 6EH5.

REMOTE-CUTOFF PENTODE

Miniature type used as if and rf amplifier in low B+ voltage automobile radio receivers operating directly from 12-volt storage-battery systems. Outline 7B, OUTLINES SECTION. Tube requires miniature seven-contact socket. Heater-voltage range (ac/dc), 10 to 15.9; amperes at 12.6 volts, 0.19. Characteristics as class A_1 amplifier: heater volts, 12.6; plate and grid-No.2 volts, 12.6 (16 max); grid No.3 connected




to cathode at socket; grid-No.1 supply volts, 0 max; grid-No.1 resistor (bypassed), 2.2 megohms; plate resistance (approx.), 0.05 megohm; transconductance, 4200 μmhos; plate ma., 4; grid-No.2 ma., 1.7; peak heater-cathode volts, 16 max. This type is used principally for renewal purposes.

12EG6

Related types:

6EH5, 25EH5, 50EH5

12EK6




TWIN-DIODE—HIGH-MU TRIODE

Miniature type used as combined detector and audio-amplifier tube in low B+ voltage automobile-radio receivers operating directly from 12-volt storage-battery systems. Outline 7B, OUTLINES SECTION. Tube requires miniature seven-contact socket. Heater-voltage range (ac/dc), 10 to 15.9; amperes at 12.6 volts, 0.15. Characteristics of triode unit as class A1 amplifier: heater volts, 12.6; plate volts, 12.6

12EL6

(30 max); grid volts, 0; amplification factor, 55; plate resistance (approx.), 45000 ohms; transconductance, 1200 µmhos; plate ma., 0.75; cathode ma., 20 max; peak heater-cathode volts, 30 max. Maximum diode plate ma.-(each unit), 1. This type is used principally for renewal purposes.



DIODE-POWER TETRODE

Miniature type used as combined detector and driver for transistorized power output stage in low B+ voltage automobile-radio receivers operating directly from 12-volt storage-battery systems. Outline 8D, OUTLINES SECTION. Heater voltage range (ac/dc), 10.0 to 15.9; amperes (approx.) at 12.6 volts, 0.5. Characteristics for tetrode unit: plate resistance (approx.), 4000 ohms; transconductance, 5000

12EM6

µmhos; plate and grid-No.2 volts, 12.6; grid-No.1 resistor (bypassed), 2.2 megohms; plate ma., 6; grid-No.2 ma., 1. Maximum ratings, tetrode unit: plate and grid-No.2 volts, 30 max; plate dissipation, 0.5 max watts; peak heater-cathode volts, 30 max. Maximum ratings, tetrode unit: plate ma., 10 max. Tube requires miniature nine-contact socket and may be operated in any position. Type 12EM6 is a DISCONTINUED type listed for reference only.




BEAM POWER TUBE

Glass octal type used as vertical-deflectionamplifier tube in television receivers employing series-connected heater strings. Outline 14C, OUTLINES SECTION. Tube requires octal socket. This tube may be supplied with pin No.1 omitted. Heater volts (ac/dc), 12.6; amperes, 0.6; warm-up time (average), 11 seconds. Characteristics as class A₁ amplifier: plate volts, 200; grid-No.2 volts, 110; grid-No.1 volts, -9.5;



plate resistance (approx.), 28000 ohms; transconductance, 8000 μ mhos. Maximum ratings as vertical deflection amplifier (for operation in a 525-line, 30-frame system): dc plate volts, 300 max; peak positive-pulse plate volts, 1200 max; dc grid-No.2 volts, 150 max; peak negative-pulse grid-No.1 volts, -250 max; eachode ma.; 175 (peak), 50 (average); plate dissipation, 7 max watts; grid-No.2 input, 1.25 max watts; peak heater-cathode volts: heater negative with respect to cathode, 300 max (the dc component must not exceed 200 volts). This type is used principally for renewal purposes.



DIODE---REMOTE-CUTOFF PENTODE

Miniature type used as combined if amplifier and AM detector in AM and AM/FM radio receivers. Outline 8D, OUTLINES SECTION. Tube requires miniature nine-contact socket



and may be operated in any position. Heater volts (ac/dc), 12.6; amperes, 0.15. Except for heater ratings, this type is identical with miniature type 6EQ7.

399

RCA Receiving Tube Manual =

HIGH-MU TRIODE

Glass octal type used in resistance-coupled amplifier circuits of ac/dc receivers. Outline 15A, OUTLINES SECTION. This type may be supplied with pin No.1 omitted. Heater volts (ac/dc), 12.6; amperes, 0.15. Except for heater ratings, this type is identical with glass-octal type 6F5-GT. Type 12F5-GT is a DISCON-TINUED type listed for reference only.

Miniature type used as combined detector and af voltage amplifier in low B+ voltage automobile radio receivers operating directly from 12-volt storage-battery systems. Outline 8B, OUTLINES SECTION. Tube requires miniature nine-contact socket. Heater-voltage range (ac/dc), 10 to 15.9; amperes at 12.6 volts, 0.15. Typical operation of pentode unit as class A₁ amplifier: heater volts, 12.6; plate and grid-





No.2 volts, 12.6 (30 max); grid No.3 connected to cathode at socket; grid-No.1 volts, 0 max; plate resistance (approx.), 0.33 megohm; transconductance, 1000 µmhos; plate ma., 1; grid-No.2 ma., 0.38; peak heater-cathode volts, 30 max. Maximum diode plate ma. (each unit), 1. This type is used principally for renewal purposes.

TWIN DIODE-LOW-MU TRIODE


Miniature type used as combined detector and af amplifier in low B+ voltage automobile radio receivers operating directly from 12-volt storagebattery systems. Outline 7B, OUT-



LINES SECTION. Tube requires miniature seven-contact socket and may be mounted in any position.

| HEATER-VOLTAGE RANGE (AC/DC) | .0 to 15.9 | volts |
|--|------------|--------|
| HEATER CURRENT (Approx.) at 12.6 volts | 0.15 | ampere |
| DIRECT INTERELECTRODE CAPACITANCES (Approx.): | | |
| Triode Grid to Triode Plate | | pf |
| Triode Grid to Cathode and Heater | 1.8 | pf |
| Triode Plate to Cathode and Heater | 0.7 | pf |
| Plate of Diode Unit No.1 to Plate of Diode Unit No.2 | 0.9 | pf |
| ······································ | | |

• For longest life, it is recommended that the heater be operated within the voltage range of 11 to 14 volts.

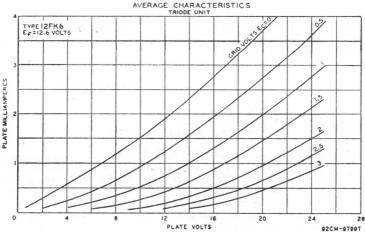

12F5GT

Related type:


6F5GT

12F8

12FK6

TRIODE UNIT AS CLASS A1 AMPLIFIER


| Maximum Ratings, (Design-Center Values): | | |
|---|--|---|
| Plate Voltage | 16 max | volts |
| GRID VOLTAGE: Positive-bias value Negative-bias value PEAK HEATER-CATHODE VOLTAGE: | 0 max -16 max | volts |
| Heater negative with respect to cathode | 16 max 16 max | volts volts |
| Characteristics with 12.6 Volts on Heater: | | |
| Plate Voltage. Grid-Supply Voltage. Grid Resistor (Bypassed). Plate Resistance (Approx.). Transconductance Amplification Factor. Plate Current. Grid Voltage (Approx.) for plate current of 10 µa. | $12.6 \\ 0 \\ 2.2 \\ 6200 \\ 1200 \\ 7.4 \\ 1.3 \\ -4$ | volts volts megohms ohms µmhos ma volts |
| Maximum Circuit Value: Grid-Circuit Resistance | 10 max | megohms |
| DIODE UNITS | | |
| Maximum Ratings, (Design-Center Values): | | |
| PLATE CURRENT (Each unit) | 1 max | ma |



Miniature type used as combined detector and af voltage amplifier in low B+ voltage automobile radio receivers operating directly from 12-volt storage-battery systems. Outline 7B, OUTLINES SECTION. Tube requires miniature seven-contact socket. Heater-voltage range (ac/dc), 10 to 15.9; amperes at 12.6 volts, 0.15. Characteristics of triode unit as class A1 amplifier: heater volts, 12.6; plate volts, 12.6

12FM6

(30 max); grid resistor (bypassed), 2.2 megohms; amplification factor, 10; plate resistance (approx.), 7700 ohms; transconductance, 1300 µmhos; plate ma., 1; peak heater-cathode volts, 30 max. Maximum diode plate ma. (each unit), 1. This type is used principally for renewal purposes.



HIGH-MU TWIN DOUBLE-PLATE TRIODE

Miniature type used in frequencydivider and complex-wave-generator circuits of electronic musical instruments. Outline 8B, OUTLINES SEC-TION. Tube requires miniature nine12FQ8

contact socket and may be mounted in any position. Heater volts (ac/dc), 12.6; amperes, 0.15.

CLASS AL AMPLIFIER

| Characteristics, (Each Unit): | | |
|--|---------------|---------------|
| Plate Voltage. Grid Voltage | 250 | volts |
| Amplification Factor | 95 | 10105 |
| Plate Resistance (Approx.) Transconductance | 76000 1250 | ohms µmhos |
| Plate Current | 1.5 | ma |

Using either plate A or plate B, with plate not in use connected to ground.

FREQUENCY-DIVIDER AND COMPLEX-WAVE GENERATOR Each Unit

Maximum Ratings, (Design-Maximum Values):

| PLATE A VOLTAGE | 330 max 330 max | volts |
|-----------------------------------|--------------------|-------|
| GRID VOLTAGE, Positive-bias value | 0 max | volts |
| PLATE A DISSIPATION | 0.5 max | watt |
| PLATE B DISSIPATION | 0.5 max | watt |

RCA Receiving Tube Manual =

| PEAK HEATER-CATHODE VOLTAGE: | | |
|--|------------|-------|
| Heater negative with respect to cathode | 200 max | volts |
| ^a Heater positive with respect to cathode | . 200° max | volts |
| ° The dc component must not exceed 100 volts. | | |
| | | |

DIODE— MEDIUM-MU TRIODE— REMOTE-CUTOFF PENTODE

12FR8

Miniature type used as combined if amplifier, af amplifier, and second detector in low B+ voltage automobile radio receivers operating directly from 12-volt storage-battery systems. Out-



line 8D, OUTLINES SECTION, except vertical dimensions are 3/16 inch shorter. Tube requires miniature nine-contact socket and may be operated in any position. Heater-voltage range (dc), 10 to 15.9; amperes at 12.6 volts, 0.32.

| Maximum Ratings, (Design-Center Values): | Triode Unit | Pentode Unit | |
|---|----------------|-----------------|---------|
| PLATE VOLTAGE. | 16 max | 16 max | volts |
| GRID-NO.2 (SCREEN-GRID) SUPPLY VOLTAGE | _ | 16 max | volts |
| GRID-NO.2 VOLTAGE | _ | 16 max | volts |
| PEAK HEATER-CATHODE VOLTAGE: | | 10 1102 | |
| Heater negative with respect to cathode | 16 max | - | volts |
| Heater positive with respect to cathode | 16 max | | volts |
| Characteristics with 12.6 Volts on Heater: | | | |
| Plate Voltage | 12.6 | 12.6 | volts |
| Grid-No.2 Voltage | | 12.6 | volts |
| Grid-No.1 Voltage | -0.6 | -0.8 | volt |
| Amplification Factor | 10 | - | |
| Plate Resistance (Approx.) | - | 0.4 | megohm |
| Transconductance | 1200 | 2700 | μmhos |
| Plate Current | 1 | 1.9 | ma |
| Grid-No.2 Current | | 0.7 | ma |
| Grid-No.1 Voltage (Approx.) | | | |
| for transconductance of 30 µmhos | | -2.8 | volts |
| Grid Voltage (Approx.) for plate current of 10 µa | -3.5 | | volts |
| Developed across a 2.2-megohm grid-No.1 resistor. | | | Volts |
| Maximum Circuit Values: | | | |
| Grid-No.1-Circuit Resistance | 10 max | 10 max | megohms |
| DIODE UNIT | | | |
| Maximum Ratings, (Design-Center Values): | | | |
| PLATE CURRENT. | | 5 max | ma |
| | | | |

CLASS A1 AMPLIFIER

Characteristics, Instantaneous Value:


Tube Voltage Drop for plate current of 2 ma.

volts

MEDIUM-MU TWIN TRIODE

12FV7

Miniature type used in relay-control tuning units of television receivers. Outline 8D, OUTLINES SECTION. Tube requires miniature nine-contact socket and may be mounted in any position.




10


| HEATER ARRANGEMENT: | 001000 | Parallel | |
|--|--------|----------|--------|
| HEATER VOLTAGE (AC /DC) | 12.6 | 6.3 | volts |
| HEATER CURRENT. | 0.45 | 0.9 | ampere |
| DIRECT INTERELECTRODE CAPACITANCES (Each Unit, Approx.): | | | |
| Grid to Plate. | | 6 | pf |
| Grid to Cathode and Heater | | 0.6 | pf |
| Plate to Cathode and Heater | | 5.5 | pf |

CLASS A1 AMPLIFIER (Each Unit)

| Characteristics: | | |
|--|------------------|---------|
| Plate Voltage | 100 | volts |
| Grid Voltage | -2 | volts |
| Amplification Factor | 21.5 | |
| Plate Resistance (Approx.) | 2250 | ohms |
| Transconductance | 9600 | μmhos |
| Plate Current | 16 | ma |
| Grid Voltage (Approx.) for plate current of 100 µa | -10 | volts |
| RELAY CONTROL (Each Unit) | | |
| Maximum Ratings, (Design-Maximum Values): | | |
| PLATE VOLTAGE | 300 max | volts |
| GRID VOLTAGE, Positive-bias value | 0 max | volts |
| CATHODE CURRENT PLATE DISSIPATION: | 30 max | ma |
| For ON times up to 30 seconds in any 2-minute interval | 4.5 max | watts |
| For ON times exceeding 30 seconds in any 2-minute interval PEAK HEATER-CATHODE VOLTAGE: | 2.5 max | watts |
| Heater negative with respect to cathode | 200 max | volts |
| Heater positive with respect to cathode | 200 ■ max | volts |
| Typical Operation with 5000-Ohm Relay Load (Each Unit): | | |
| ON Time Up to 30 Seconds in Any 2-Minute Interval | | |
| Plate-Supply Voltage | 270 | volts |
| Zero-Bias Plate Current | 36 | ma |
| Grid Resistor | 2.2 | megohms |
| Grid Voltage (Approx.) for plate current of 2 ma | -13 | volts |
| Maximum Circuit Values: | | |
| Grid-Circuit Resistance. | 3.3 | megohms |
| The dc component must not exceed 100 volts | | |

The dc component must not exceed 100 volts.



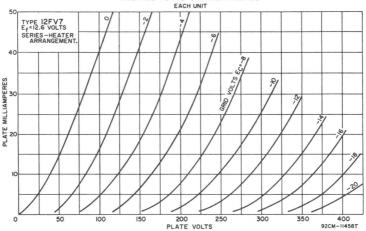



POWER PENTODE

Miniature type used in output stages of audio amplifiers employing series-connected heater strings. Outline 7C, OUTLINES SECTION. Heater volts (ac/dc), 12.6; amperes, 12FX5 Related type: 60FX5

0.45; warm-up time (average), 11 seconds. Except for heater ratings, this type is identical with miniature type 60FX5.

MEDIUM-MU TRIODE PENTAGRID CONVERTER

H.K1

2

G2,G4HP

G5,KHP

IS

12FX8

Miniature type used as combined PHP 3 rf amplifier and frequency converter in low B+ voltage automobile radio GIHF receivers operating directly from 12-

volt storage-battery systems. Outline ^{62,64}HP ⁶³HP ⁸D, OUTLINES SECTION, except vertical dimensions are 3/16 inch shorter. Tube requires miniature nine-contact socket and may be operated in any position. Heater-voltage range (dc), 10 to 15.9; amperes at 12.6 volts, 0.27.

HEPTODE UNIT AS CONVERTER

| Maximum Ratings, (Design-Center Values): | | |
|---|-----------|------------|
| PLATE VOLTAGE. | 16 max | volts |
| GRID-NO.3 (CONTROL-GRID) VOLTAGE: | | |
| Negative-bias value | 16 max | volts |
| Positive-bias value | 0 max | volts |
| GRIDS-No. 2 and No. 4 (SCREEN GRID) VOLTAGE | 16 max | volts |
| Heater negative with respect to cathode | 16 max | volts |
| Heater positive with respect to cathode | 16 max | volts |
| Typical Operation and Characteristics with 12.6 Volts on Heater: | | |
| Plate Voltage | 12.6 | volts |
| Grid-No.3 Voltage [•] | -0.5 | volt |
| Grids-No.2 and No.4 Voltage | 12.6 | volts |
| RMS Grid-No.1 (Oscillator-Grid) Voltage | 1.6 | volts |
| Grid-No.1 Resistor | 33000 | ohms |
| Plate Resistance (Approx.) | 0.5 | megohm |
| Conversion Transconductance | 300 | μmhos |
| Grid-No.3 Voltage (Approx.) for conversion transconductance of 10 µmhos | -3 290 | volts |
| Plate Current. Grids-No.2 and No.4 Current. | 1.25 | µa ma |
| Grids-No.2 and No.4 Current. | 1.20 | ma |
| Oscillator Characteristics (Not Oscillating):* | | |
| Plate and Grids-No.2 and No.4 Voltage | 12.6 | volts |
| Grid-No.3 Voltage | 0 | volts |
| Grid-No.1 Voltage Amplification Factor (between grid No.1 and grids | 0 | volts |
| No.2 and No.4 connected to plate) | 9 | |
| Transconductance (between grid No.1 and grids | | |
| No.2 and No.4 connected to plate) | 3600 | μ mhos |
| Cathode Current. | 4.4 | ma |
| Grid-No.1 Voltage (Approx.) for plate current of 10 µa | -4.5 | volts |
| *With grids No.2 and No.4 connected to plate and with 12.5 volts on heater. | | |
| Maximum Circuit Values: | | |
| Grid-No.3-Circuit Resistance | 10 max | megohms |
| With self-excitation. | | 0 |
| • Developed across a 2.2-megohm grid-No.3 resistor. | | |
| TRIODE UNIT AS CLASS A, AMPLIFIER | | |
| | | |
| Maximum Ratings, (Design-Center Values): | | |
| PLATE VOLTAGE | 16 max | volts |
| Characteristics with 12.6 Volts on Heater: | | |
| Plate Voltage | 12.6 | volts |
| Grid Voltage ^D | -0.8 | volt |
| Amplification Factor | 10 | |
| Plate Resistance (Approx.) | 7150 | ohms |
| Transconductance | 1400 | μ mhos |
| Plate Current | 1.3 | ma |
| Grid Voltage (Approx.) for plate current of 10 µa | -3.2 | volts |

^D Developed across a 2.2 megohm grid resistor


PENTAGRID CONVERTER



Miniature type used as converter in low B+ voltage automobile radio receivers operating directly from 12-volt storage-battery systems. Outline 7B, OUTLINESSECTION. Tube requires miniatures even-contact socket. Heatervoltage range (ac/dc), 10 to 15.9; amperes at 12.6 volts, 0.15. Typical operation as converter: heater volts, 12.6; plate and grids-No.2-and-No.4 volts, 12.6 (16 max); grid-No.3 supply

12GA6

volts, 0 max; grid-No.3 resistor (bypassed), 2.2 megohms; rms grid-No.1 volts, 1.6; grid-No.1 resistor, 33000 ohms; plate resistance (approx.), 1 megohm; conversion transconductance, 140 µmhos; plate ma., 0.3; grids-No.2-and-No.4 ma., 0.8; grid-No.1 ma., 0.06; peak heater-cathode volts, 16 max. This type is used principally for renewal purposes.



Characteristics:

BEAM POWER TUBE

Glass octal type used as horizontal-deflection amplifier in television receivers employing series-connected heater strings. Outline 21, OUTLINES SECTION. Tube requires octal socket

12GC6

and may be operated in any position. Heater volts (ac/dc), 12.6; amperes, 0.6; warm-up time (average), 11 seconds.

CLASS A1 AMPLIFIER

| Plate Voltage | 60 | 250 | volts |
|---|------|-------|-------|
| Grid-No.2 (Screen-Grid) Voltage. | 150 | 150 | volts |
| | | | |
| Grid-No.1 (Control-Grid) Voltage | 0 | -22.5 | volts |
| Triode Amplification Factor for | | | |
| plate and grid-No.2 voltages of 150 volts | - | 4.1 | |
| Plate Resistance (Approx.) | | 20000 | ohms |
| Transconductance | - | 6600 | μmhos |
| Plate Current | 345° | 75 | ma |
| Grid-No.2 Current. | 30° | 2.4 | ma |
| Grid-No.1 Voltage (Approx.) for plate current of 1 ma | - | -46 | volts |

HORIZONTAL-DEFLECTION AMPLIFIER

For operation in a 525-line, 30-frame system

Maximum Ratings, (Design-Maximum Values):

| DC PLATE VOLTAGE | 770 max | volts |
|--|--------------------|-------|
| PEAK POSITIVE-PULSE PLATE VOLTAGE [®] | 6500 max | volts |
| PEAK NEGATIVE-PULSE PLATE VOLTAGE | -1500 max | volts |
| DC GRID-NO.2 VOLTAGE. | 220 max | volts |
| PEAK NEGATIVE-PULSE GRID-NO.1 VOLTAGE | -330 max | volts |
| PEAK CATHODE CURRENT | 550 max | ma |
| Average Cathode Current | 175 max | ma |
| PLATE DISSIPATION [®] | 17.5 max | watts |
| GRID-NO.2 INPUT. | 4.5 max | watts |
| PEAK HEATER-CATHODE VOLTAGE: | | |
| Heater negative with respect to cathode | 200 max | volts |
| Heater positive with respect to cathode | 200 $^{\Box}max$ | volts |
| BULB TEMPERATURE (At hottest point) | 220 max | °C |


Maximum Circuit Values:

This rating is applicable where the duration of the voltage pulse does not exceed 15 per cent of one horizontal scanning cycle. In a 525-line, 30-frame system, 15 per cent of one horizontal scanning cycle is 10 microseconds.

• An adequate bias resistor or other means is required to protect the tube in the absence of excitation. • The dc component must not exceed 100 volts.

BEAM POWER TUBE

Duodecar type used as horizontaldeflection-amplifier tube in television receivers employing series-connected heater strings. Outline 20, OUTLINES SECTION. Heater volts (ac/dc), 12.6;



amperes, 0.6; warm-up time (average), 11 seconds. Except for heater ratings, this type is identical with duodecar type 6GE5.

BEAM POWER TUBE


Related types: 6GJ5, 17GJ5

12GE5

Related types:

6GE5, 17GE5

Novar type used in horizontal-deflection-amplifier circuits of television receivers employing series-connected heater strings. Outline 18A, OUT-LINES SECTION. Tube requires no-



var nine-contact socket and may be operated in any position. Heater volts (ac/dc), 12.6; amperes, 0.6; warm-up time (average), 11 seconds. Except for heater ratings, this type is identical with novar type 6GJ5.

SHARP-CUTOFF PENTODE

12GN7

Miniature type with frame grid used as video amplifier tube in television receivers employing series-connected heater strings. Outline 8D, OUTLINES SECTION. Tube requires



miniature nine-contact socket and may be mounted in any position. Heater volts, 6.3 (series), 12.6 (parallel); amperes, 0.6 (series), 0.3 (parallel); warm-up time (average), 11 seconds.

CLASS A1 AMPLIFIER


Maximum Ratings, (Design-Maximum Values):

| PLATE VOLTAGE | | 400 max | volts |
|--|-----|------------------|------------|
| GRID-NO.2 (SCREEN-GRID) SUPPLY VOLTAGE | | 330 max | volts |
| GRID-NO.2 VOLTAGE. | | See cur | ve page 70 |
| GRID-NO.1 (CONTROL-GRID) VOLTAGE, Positive-bias value | | 0 max | volts |
| PLATE DISSIPATION | | 7.5 max | watts |
| GRID-NO.2 INPUT: | | | |
| For grid-No.2 voltages up to 165 volts | | 1.5 max | watts |
| For grid-No.2 voltages between 165 and 330 volts | | See cur | ve page 70 |
| PEAK HEATER-CATHODE VOLTAGE: | | | |
| Heater negative with respect to cathode | | 200 max | volts |
| Heater positive with respect to cathode | | 200 = max | volts |
| | | | |
| Characteristics: | | | |
| Plate Supply Voltage | 50 | 250 | volts |
| Grid-No.2 Supply Voltage | 125 | 150 | volts |
| Grid-No.1 Voltage | 0 | 0 | volts |
| Cathode-Bias Resistor | - | 56 | ohms |
| Plate Resistance (Approx.) | - | 0.05 | megohm |
| Transconductance | - | 36000 | µmhos |
| Plate Current | 70• | 28 | ma |
| Grid-No.2 Current | 24 | 6.5 | ma |
| Grid-No.1 Voltage (Approx.) for plate current of 100 μ a | - | -5.7 | volts |
| | | | |

Maximum Circuit Values:

The dc component must not exceed 100 volts.

• This value can be measured by a method involving a recurrent waveform such that the maximum ratings of the tube will not be exceeded.



BEAM POWER TUBE

Novar type used as horizontaldeflection amplifier in television receivers employing series-connected heater strings. Outline 17A, OUT-LINES SECTION. Tube requires no-

Related types: 6GT5, 17GT5

var nine-contact socket and may be operated in any position. Heater volts (ac/dc), 12.6; amperes, 0.6; warm-up time (average), 11 seconds. Except for heater ratings, this tube is identical with novar type 6GT5.




BEAM POWER TUBE

Glass octal type used as horizontal-deflection amplifier in high-efficiency deflection circuits of television receivers employing series-connected heater strings. Outline 21. OUTLINES



SECTION. Tube requires octal socket and may be operated in any position. Heater volts (ac/dc), 12.6; amperes, 0.6; heater warm-up time (average), 11 seconds. Except for heater ratings, this type is identical with glass octal type 6GW6.



TWIN DIODE


Metal type used as detector, lowvoltage rectifier, or avc tube in ac/dc radio receivers. Maximum dimensions: over-all length, 1-3/4 inches; seated height, 1-3/16 inches, diameter, 1-1/32



inches. Heater volts (ac/dc), 12.6; amperes, 0.15. Except for heater ratings, this type is identical with metal type 6H6.







MEDIUM-MU TRIODE

Glass octal type used as detector, amplifier, or oscillator in ac/dc radio equipment. Outline 14C, OUTLINES SECTION. This type may be supplied with pin No.1 omitted. Heater volts (ac/dc), 12.6; amperes, 0.15. Except for heater rating and base, this type is identical with glassoctal type 6J5-GT. Type 12J5-GT is used principally for renewal purposes.

SHARP-CUTOFF PENTODE

Glass octal type used as biased detector or high-gain audio amplifier in ac/dc radio receivers. Outline 15A, OUTLINESSECTION. Heater volts (ac/dc), 12.6; amperes, 0.15. Except for heater rating, this type is identical with glassoctal type 6J7-GT. Type 12J7-GT is used principally for renewal purposes.

TWIN DIODE—POWER TETRODE

Miniature type used as combined detector and audio driver in low B+ voltage automobile radio receivers operating directly from 12-volt storage-battery systems. Outline 8B, OUT-LINES SECTION. Tube requires miniature nine-contact socket. Heater-voltage range (ac/dc), 10 to 15.9; amperes at 12.6 volts, 0.325. Typical operation of tetrode unit as audio driver: heater volts, 12.6; plate and grid-No.2 12J5GT Related type: 6J5GT

Related type: 6J7GT

12J8

RCA Receiving Tube Manual

volts, 12.6 (30 max); grid-No.1 volts, 0; peak af grid-No.1 volts, 2.26; grid-No.1 resisistor, 2.2 megohms (bypassed by 1- μ f capacitor); zero-signal plate ma., 12; zero-signal grid-No.2 ma., 1.5; plate resistance (approx.), 6000 ohms; transconductance, 5500 μ mhos; load resistance, 2700 ohms, maximum-signal power output, 20 milliwatts. Maximum diode plate ma. (each unit), 5. Peak heater-cathode volts, 30 max. This type is used principally for renewal purposes.

BEAM POWER TUBE

Novar type used as high-efficiency horizontal-deflection-amplifier tube in television receivers employing seriesconnected heater strings. Outline 18A, OUTLINES SECTION. Heater volts



(ac/dc), 12.6; amperes, 0.6; warm-up time (average), 11 seconds. Except for heater ratings, this type is identical with novar type 6JB6.

POWER TETRODE

Miniature type used as power amplifier driver in low B+ voltage automobile radio receivers operating directly from 12-volt storage-battery systems. Outline 7C, OUTLINES



SECTION. Tube requires miniature seven-contact socket and may be mounted in any position. Heater-voltage range (ac/dc), 10.0 to 15.9; amperes (approx.) at 12.6 volts, 0.4. Maximum ratings and characteristics are the same as those of the tetrode unit of miniature type 12DL8.

REMOTE-CUTOFF PENTODE


Glass octal type used as rf or if amplifier in ac/dc radio receivers particularly those employing avc. Outline 15A, OUTLINES SECTION. Heater volts (ac/dc), 12.6; amperes, 0.15. Except for heater ratings, this type is identical with glass octal type 6K7-GT. Type 12K7-GG is used principally for renewal purposes

TRIODE—HEXODE CONVERTER

Metal type used as combined triode oscillator and hexode mixer in ac/dc radio receivers. Outline 4, OUTLINES SECTION. Heater volts (ac/dc), 12.6; amperes, 0.15. Except for heater ratings,this type is identical with metal type 6K8. Type 12K8 is used principally for renewal purposes.

DIODE— SHARP-CUTOFF PENTODE

Miniature type used in combined if-amplifier and AM-detector service in AM and AM/FM broadcast receivers employing series-connected heater strings. Pentode unit may also



HX

G3HX

12KL8 Related type: 6KL8

be used as an rf- or if-amplifier or limiter tube; the diode unit may be used for avc or detection. Outline 8D, OUTLINES SECTION. Heater volts (ac/dc), 12.6; amperes, 0.15; warm-up time (average), 17 seconds. Except for heater ratings, this type is identical with miniature type 6KL8.

12K8

12K7GT

Related type:

6K7GT

12JB6

Related types:

6JB6, 17JB6

12K5

Related type:

BC



BEAM POWER TUBE

Glass octal type used in audio output stages of television receivers employing series-connectedheated strings. Outline 14C, OUTLINESSEC-TION. This type may be supplied with pin No. 1 omitted. Heater volts (ac/dc), 12.6; amperes, 0.6; warm-up time (average), 11 seconds. Peak heater-cathode volts: heater negative with respect to cathode, 300 max; heater positive with respect to cathode, 200 max (the dc component



must not exceed 100 volts). Except for heater and heater-cathode ratings, this type is identical with glass octal type 50L6-GT. Type 12L6-GT is used principally for renewal purposes.

TWIN DIODE—HIGH-MU TRIODE

Glass octal type used as combined detector, amplifier, and avc tube in ac/dc radio receivers. Outline 15A, OUTLINES SECTION Heater volts (ac/dc), 12.6; amperes, 0.15. Except for heater rating, this type is identical with glass octal type 6Q7-GT. Type 12Q7-GT is used principally for renewal purposes.

BEAM POWER TUBE

Miniature type used as a vertical deflection amplifier in television receivers employing series-connected heater strings. Outline 7C, OUT-LINES SECTION. Tube requires miniature seven-contact socket and may be mounted in any position.

| IZQ/G | 10000 |
|----------------------|-------|
| Related type: | |
| 6Q7GT | |



8

H(2

B

HEATER VOLTAGE (AC/DC) 12.6 volts HEATER CURRENT 0.6 ampere HEATER WARM-UP TIME (Average) 11 seconds PLATE RESISTANCE (Approx.)* 13000 ohms TRANSCONDUCTANCE* 7000 µmhos

* For plate and grid-No.2 volts, 110; grid-No.1 volts, -8.5, plate ma., 40; grid-No.2 ma., 3.3.

VERTICAL DEFLECTION AMPLIFIER

For operation in a 525-line, 30-frame system

| Maximum Ratings, (Design-Center Values): | | |
|---|-----------------------|-------|
| DC PLATE VOLTAGE | 150 max | volts |
| PEAK POSITIVE-PULSE PLATE VOLTAGE [†] (Absolute Maximum) | 1500 [▲] max | volts |
| GRID-NO.2 (SCREEN-GRID) VOLTAGE | 150 max | volts |
| PEAK NEGATIVE-PULSE GRID-NO.1 (CONTROL-GRID) VOLTAGE | -150 max | volts |
| PEAK CATHODE CURRENT | 155 max | ma |
| AVERAGE CATHODE CURRENT | 45 max | ma |
| PLATE DISSIPATION | 4.5 max | watts |
| GRID-NO.2 INPUT | 1 max | watt |
| PEAK HEATER-CATHODE VOLTAGE: | | |
| Heater negative with respect to cathode | 300 max | volts |
| Heater positive with respect to cathode | 200 max | volts |
| | | |


Maximum Circuit Value:

Grid-No.1-Circuit Resistance:

For cathode-bias operation. 2.2 max megohms † The duration of the voltage pulse must not exceed 15 per cent of one vertical scanning cycle. In a 525-line, 30-frame system, 15 per cent of one vertical scanning cycle is 2.5 milliseconds.

^{*} Under no circumstances should this absolute value be exceeded.

The dc component must not exceed 100 volts.



TRIPLE DIODE—HIGH-MU TRIODE

Glass octal type used as audio amplifier, AM detector, and FM detector in AM /FM receivers. Outline 15B, OUTLINES SECTION. Heater volts (ac/dc), 12.6; amperes, 0.15. Except for heater ratings, this type is identical with glass octal type 6S8-GT. Type 12S8-GT is a DISCONTINUED type listed for reference only.

1258GT Related type: 658GT

12R5

RCA Receiving Tube Manual =

PENTAGRID CONVERTER

12**SA**7



65A7, 65A7GT

12SC7


Related type:


6SC7

Metal type 12SA7 and glass octal type 12SA7-GT used as converter in ac/dc receivers. Outlines 2 and 14C, respectively, OUTLINES SECTION. Heater volts (ac/dc), 12.6; amperes, 0.15. Except for heater ratings, these types are identical with metal type 6SA7 and glass octal type 6SA7-GT. Type 12SA7-GT is used principally for renewal purposes.

HIGH-MU TWIN TRIODE


Metal type used as phase inverter or voltage amplifier in ac/dc radio equipment. Outline 2, OUTLINESSECTION. Heater volts (ac/dc), 12.6; amperes, 0.15. Except for heater ratings, this type is identical with metal type 6SC7. Type 12SC7 is used principally for renewal purposes.





HIGH-MU TRIODE

Metal type 12SF5 and glass octal type 12SF5-GT used in resistance-coupled amplifier circuits of a /dc radio equipment. Outline 2 and. 14C, respectively, OUTLINES SECTION. Heater volts (ac/dc), 12.6; amperes, 0.15. Except for heater ratings, these types are identical with metal type 6SF5 and glass octal type 6SF5-GT, respectively. Type 12SF5-GT is a DISCONTINUED type listed for reference only. Type 12SF5 is used principally for renewal purposes.




DIODE—REMOTE-CUTOFF PENTODE

Metal type used as combined rf or if amplifier and detector or avc tube in ac/dc-radio receivers. Outline 2, OUTLINES "SECTION. Heater volts (ac/dc), 12.6; amperes, 0.15. Except for heater ratings, this type is identical with metal type 6SF7. Type 12SF7 is used principally for renewal purposes.



SEMIREMOTE-CUTOFF PENTODE

Metal type used as rf amplifier in ac /dc receivers involving high-frequency, wide-band applications. Outline & OUTLINES SECTION. Heater volts (ac /dc), 12.6; amperes, 0.15. Except for heater ratings, this type is identical with metal type 6SG7. Type 12SG7 is used principally for renewal purposes.




12SF5 12SF5GT Related types: 6SF5, 6SF5GT

Related type: 6SF7

Related type: 65G7

410



SHARP-CUTOFF PENTODE

Metal type used as rf amplifier in ac/dc receivers involving high-frequency, wide-band applications and as limiter tube in FM equipment. Outline 3, OUTLINES SECTION. Heater volts (ac/dc), 12.6; amperes, 0.15. Except for heater ratings, this type is identical with metal type 6SH7. Type 12SH7 is used principally for renewal purposes.

SHARP-CUTOFF PENTODE


Metal type 12SJ7 and glass-octal type 12SJ7-GT used as rf amplifiers and biased detectors in ac/dc radio receivers. Outline 2 and 14C, respectively, OUTLINES SECTION. 12SJ7GT 12SJ7GT Related types:

Related type:

6SH7

65J7, 65J7GT

Heater volts (ac/dc), 12.6; amperes, 0.15. Except for heater ratings, these types are identical with metal type 6SJ7 and glass-octal type 6SJ7-GT. Type 12SJ7-GT is a DISCONTINUED type listed for reference only.



REMOTE-CUTOFF PENTODE

Metal type 12SK7 and glass octal type 12SK7-GT used as rf and if amplifiers in ac/dc radio receivers. Outlines 2 and 14C, respectively, OUT-LINES SECTION. Heater volts




(ac/dc), 12 .6; amperes, 0.15. Except for heater ratings, these types are identical with metal type 6SK7 and glass octal type 6SK7-GT. Type 12SK7-GT is used principally for renewal purposes.



HIGH-MU TWIN TRIODE

Glass octal type used as phase inverter or resistance-coupled amplifier in ac/dc radio equipment. Outline 14C, OUTLINES SECTION. Heater volts (ac/dc), 12.6; amperes, 0.15. Except for heater rating, this type is identical with glass octal type 6SL7-GT.





MEDIUM-MU TWIN TRIODE

Glass octal types used as combined vertical oscillators and vertical deflection amplifiers, and as horizontal deflection oscillators in television receivers. May also be used in multivibrator 12SN7GT 2SN7GTA Related type: 6SN7GTB

or resistance-coupled amplifier circuits in radio receivers. Outline 14C, OUTLINES SECTION. Heater volts (ac/dc), 12.6; amperes, 0.3. Except for heater ratings, these types are identical with glass octal types 6SN7-GT and 6SN7-GTB, respectively. Type 12SN7-GT is a DISCONTINUED type listed for reference only.



12SR7


12SR7GT

Related types:

6SR7, 6SR7GT

TWIN DIODE—HIGH-MU TRIODE


Metal type 12SQ7 and glass octal type 12SQ7-GT used as combined detector, amplifier, and avc tube in ac/dc radio receivers. Outlines 2 and 14C, respectively, OUTLINES SECTION.



Heater volts (ac/dc), 12.6; amperes, 0.15. Except for heater ratings, these types are identical with metal type 6SQ7 and glass octal type 6SQ7-GT.

TWIN DIODE-MEDIUM-MU TRIODE


Metal type 12SR7 and glass octal type 12SR7-GT used as combined detector, amplifier, and avc tube in ac/dc radio receivers. Outlines 2and 14C, respectively, OUTLINESSECTION. Heater volts (ac/dc), 12.6; amperes, 0.15. Except for heater rating, type 12SR7 is identical with type 6SR7, and type 12SR7-GT is electrically identical with type 6SR7 except for interelectrode capacitances. Type 12SR7 is used



principally for renewal purposes. The 12SR7-GT is a DISCONTINUED type listed for reference only.

MEDIUM-MU TWIN TRIODE

Miniature type used as general-purposeamplifier tube in automobile-radio receivers operating directly from 12-volt storage-battery systems. Outline 8B, OUTLINES SECTION. Tube requires miniature nine-contact socket and may be mounted in any position. Heater voltage range (ac/dc), 10.0 to 15.9; amperes (approx.) at 12.6 volts, 0.15. Maximum ratings (each unit) as class A, amplifier; plate volts, 30



max; cathode ma., 15 max; peak heater-cathode volts, 30 max. This type is used principally for renewal purposes.

BEAM POWER TUBE

Glass octal type used as output amplifier primarily in automobile radio receivers operating from a 12-volt storage battery. Outline 14C, OUTLINES SECTION. Tube requires octal socket



and may be mounted in any position. Heater volts (ac/dc), 12.6; amperes, 0.225. Except for heater rating, this type is identical with glass octal type 6V6-GT.

BEAM POWER TUBE

Glass octal type used in the audio outputstages of television receivers employing series-connected heater strings. Triode-connected, this type is used as a vertical deflection amplifier. Outline



14C, OUTLINES SECTION. This type may be supplied with pin No.1 omitted. Heater volts (ac/dc), 12.6; amperes, 0.6; warm-up time (average), 11 seconds. Peak heater-cathode volts: heater negative with respect to cathode, 300 max (the dc component must not exceed 200 volts); heater positive with respect to cathode, 200 max (the dc component must not exceed 100 volts). Except for heater and heater-cathode ratings, this type is identical with glass octal type 6W6-GT.

12U7


12V6GT

Related types:

5V6GT, 6V6GT

12W6GT

Related type:



FULL-WAVE VACUUM RECTIFIER

Miniature type used in power supply of automobile radio receivers operating from a 12-volt storage battery. Outline 7C, OUTLINES SEC-TION. Heater volts (ac/dc), 12.6; am-



12Z3

peres, 0.3. Except for heater ratings, this type is identical with miniature type 6X4.

HALF-WAVE VACUUM RECTIFIER Glass types used in power supply of ac/dc receivers. Maximum dimensions: over-all length,


4-3 /16 inches; seated height, 3-9 /16 inches; diameter, 1-9 /16 inches. Tube requires four-contact socket. Heater volts (ac /dc), 12.6; amperes, 0.3. Maximum ratings as half-wave rectifier: peak inverse plate volts, 700 max; peak plate ma., 330 max; dc output ma., 55 max; peak heater-cathode volts, 350 max. This is a DIS-CONTINUED type listed for reference only.

HIGH-MU TRIODE

Nuvistor type used in booster amplifiers of antenna systems serving multiple television receiver installations. Outline 1, OUTLINES SECTION. Heater volts (ac/dc), 13.5; amperes, 0.06. Except for heater ratings, this type is identical with nuvistor type 6CW4. 13CW4

Related types: 2CW4, 6CW4

INDEX=LARGE LUG




DUAL TRIODE

Miniature type used as combined vertical-deflection-oscillator and vertical-deflection-amplifier tube in television receivers employing series-connected heater strings. Unit No.1 is a

Related types: 6ED7, 10DE7

medium-mu triode unit used as a blocking oscillator in vertical-deflection circuits, and unit No.2 is a low-mu triode unit used as a vertical-deflection amplifier. Outline 8D, OUTLINES SECTION. Heater volts (ac/dc), 13; amperes, 0.45; warmup time (average), 11 seconds. Except for heater ratings, this type is identical with miniature type 6DE7.



DUAL TRIODE

Miniature type containing highmu and low-mu triodes; used as combined vertical-deflection-oscillator and vertical-deflection-amplifier tube in television receivers. Outline 8D, OUT-


13DR7 Related types: 6DR7, 10DR7

LINES SECTION. Tube requires miniature nine-contact socket and may be operated in any position. Heater volts (ac/dc), 13; amperes, 0.45; warm-up time (average), 11 seconds. Except for heater ratings, this type is identical with type 6DR7.

413

DUAL TRIODE


Glass octal type containing highmu triode and high-perveance, lowmu triode; used as combined verticaldeflection oscillator and vertical-deflection amplifier in television receivers



employing series-connected heater strings. Outline 14B, OUTLINES SECTION. Heater volts (ac/dc), 13; amperes, 0.45; warm-up time (average), 11 seconds. Except for heater ratings, this type is identical with type 6EM7.

DUAL TRIODE

Glass type containing high-mu and low-mu triode units used as combined vertical-deflection oscillator and vertical-deflection amplifier in television receivers employing series-connected



heater strings. Heater volts (ac/dc), 13; amperes, 0.45; warm-up time(average), 11 seconds. Except for heater ratings, this type is identical with glass type 6FD7.

BEAM POWER TUBE

13GB5

Maximum Patings (Design Maximum Values):

Related type:


6FD7

ISEN

Related types:

6EM7, 10EM7

Neonoval type used as horizontaldeflection amplifier in television receivers. Maximum dimensions: overall length, 4-7/64 inches; seated height, 3-49/64 inches; diameter, 1-3/16 in.



Tube requires neonoval nine-contact socket and may be mounted in any position. Heater volts (ac/dc), 13.3; amperes, 0.6. Typical instantaneous characteristics (measured with recurrent waveform such that maximum ratings are not exceeded): plate volts, 75; grid-No.2 volts, 200; grid-No.1 volts, -10; plate ma., 440; grid-No.2 ma., 37.


HORIZONTAL DEFLECTION AMPLIFIER

For operation in a 525-line, 30-frame system

| 275 | max | volts |
|------|--|--|
| 7700 | max | volts |
| 275 | max | volts |
| 275 | max | ma |
| 17 | max | watts |
| 6 | max | watts |
| | | |
| 250 | max | volts |
| 250 | max | volts |
| | | |
| | | |
| 2.2 | max | megohms |
| | | 0 |
| | 7700 275 275 17 6 250 250 250 | 275 max 7700 max 275 max 275 max 17 max 6 max 250°max 250°max 2.2 max 0.5 max |

The duration of the voltage pulse must not exceed 15 per cent of one horizontal scanning cycle. In a 525-line, 30-frame system, 15 per cent of one horizontal scanning cycle is 10 microseconds.
The dc component must not exceed 125 volts.

Technical Data




DUAL TRIODE

Novar type containing high-mu and high-perveance, low-mu triode units used as combined vertical-deflection amplifier and vertical-deflection oscillator in television receivers em-

13GF7 Related types: 6GF7, 10GF7

ploying series-connected heater strings. Outline10A,OUTLINESSECTION. Heater volts (ac/dc), 13; amperes, 0.45; warm-up time (average), 11 seconds. Except for heater ratings, this type is identical with novar type 6GF7.



POWER PENTODE— BEAM POWER TUBE

Duodecar type used in FM and television receivers employing seriesconnected heater strings. The pentode unit is used in audio power-output stages, and the beam power unit is 13**J**10

used as a gated-beam discriminator in FM and television limiter and discriminator applications. Outline 12B, OUTLINES SECTION. Tube requires duodecar twelve-contact socket and may be mounted in any position. Heater volts (ac/dc), 13.2; amperes, 0.45; warm-up time (average), 11 seconds.

PENTODE UNIT AS CLASS A1 AMPLIFIER

| Maximum Ratings, (Design-Maximum Values): | | |
|---|----------|----------|
| PLATE VOLTAGE. | 275 max | volts |
| GRID-NO.2 (SCREEN-GRID) VOLTAGE. | 275 max | volts |
| PLATE DISSIPATION. | 10 max | watts |
| GRID-NO.2 INPUT | 2 max | watts |
| PEAK HEATER-CATHODE VOLTAGE: | | |
| Heater negative with respect to cathode | 200 max | volts |
| Heater positive with respect to cathode | 200 max | volts |
| | | |
| Characteristics and Typical Operation: | | |
| Plate Voltage | 250 | volts |
| Grid-No.2 Voltage | 250 | volts |
| Grid-No.1 Voltage | -8 | volts |
| Peak AF Grid-No.1 Voltage | 8 | volts |
| Plate Resistance (Approx.). | 0.1 | megohm |
| Transconductance. | 6500 | μmhos |
| Zero-Signal Plate Current. | 35 | ma |
| Maximum-Signal Plate Current. | 39 | ma |
| Zero-Signal Grid-No.2 Current. | 2.5 | ma |
| Maximum-Signal Grid-No.2 Current. | 7 | ma |
| Load Resistance | 5000 | ohms |
| Total Harmonic Distortion (Approx.). | 10 | per cent |
| Maximum-Signal Power Output. | 4.2 | watts |
| Maximum biginar rower output | | W LOUD |
| Maximum Circuit Values: | | |
| Grid-No.1-Circuit Resistance: | | |
| For fixed-bias operation | 0.25 max | megohm |
| For cathode-bias operation | 0.5 max. | megohm |
| | | U |
| BEAM POWER UNIT AS GATED-BEAM DISCRIMINAT | DR | |
| Maximum Ratings, (Design-Maximum Values): | | |
| PLATE SUPPLY VOLTAGE | 330 max | volts |
| GRID-NO.2 (ACCELERATOR-GRID) VOLTAGE. | 110 max | volts |
| PEAK POSITIVE GRID-NO.1 VOLTAGE | 60 max | volts |
| AVERAGE CATHODE CURRENT. | 13 max | ma |
| PEAK HEATER-CATHODE VOLTAGE: | 13 max | ma |
| Heater negative with respect to cathode | 200 max | volts |
| Heater positive with respect to cathode | 200 max | volts |
| meater positive with respect to cathode | Loo mai | vorts |

The dc component must not exceed 100 volts.


RCA Receiving Tube Manual


MEDIUM-MU TRIODE

Glass lock-in type used as detector, amplifier, or oscillator in ac/dc radio receivers. Outline 13A, OUTLINES SECTION. Tube requires lock-in socket. Heater volts (ac/dc), 12.6; amperes, 0.15. Except for heater rating and capacitances, this type is electrically identical with lock-in type 7A4 and metal type 6J5. Type 14A4 is a DISCONTINUED type listed for reference only.

BEAM POWER TUBE

Glasslock-in type used as output amplifier in ac /dc radio receivers. Outline 13A, OUTLINES SECTION. Tube requires lock-in socket. Heater volts (ac/dc), 12.6; amperes, 0.15. Typical operation and ratings as class A₁ amplifier: plate volts and grid-No.2 volts, 250 (300 max); plate dissipation, 7.5 watts; grid-No.2 input, 1.5 watts; grid-No.1 volts, -12.5; plate ma., 32;





grid-No.2 ma., 5.5; plate resistance, 70000 ohms; transconductance, 3000 µmhos; load resistance, 7500 ohms; output watts, 2.8. This is a DISCONTINUED type listed for reference only.

REMOTE-CUTOFF PENTODE

Glasslock-in type used as rf or if amplifier inac/dc radio receivers. Outline 13A, OUTLINES SECTION. Tube requires lock-in socket. Heater volts (ac/dc), 12.6; ampress, 0.15. Except for heater rating and capacitances, this type is electrically identical with metal type 65K7 and lock-in type 7A7. Type 14A7 is used principally for renewal purposes.

MEDIUM-MU TWIN TRIODE

Glass lock-in type used as voltage amplifier or phase inverter in radio equipment. Outline 13A, OUTLINES SECTION. Tube requires lock-in socket. Heater volts (ac/dc), 12.6; amperes, 0.15. Except for heater ratings, this type is electrically identical with lock-in type 7AF7. Type 14AF7 is used principally for renewal purposes.


TWIN DIODE—HIGH-MU TRIODE


Glass lock-in type used as combined detector, amplifier, and avc tube in ac/dc radio receivers. Outline 13A, OUTLINES SECTION. Tube requires lock-in socket. Heater volts (ac/dc), 12.6; amperes, 0.15. Except for heater rating and capacitances, this type is electrically identical with lock-in type 7B6 and metal type 6SQ7. Type 14B6 is used principally for renewal purposes.


PENTAGRID CONVERTER

Glass lock-in type used as converter in ac/dc radio receivers. Outline 13A, OUTLINES SECTION. Tube requires lock-in socket. Heater volts (ac/dc), 12.6; amperes, 0.15. Except for heater rating and capacitances, this type is electrically identical with lock-in type 7B8 and metal type 6A8. Type 14B8 is a DISCONTIN-UED type listed for reference only.









14A5

1444


14A7


14AF7

14B6

14B8

— Technical Data





D2

8

UBS

6

PD

BEAM POWER TUBE

Glasslock-in type used as output amplifier in ac/dc radio receivers. Outline 13B, OUT-LINES SECTION. Tube requires lock-in socket. Heater volts (ac/dc), 12.6; amperes, 0.225. Except for heater ratings, this type is electrically identical with lock-in type 7C5 and metal type 6V6. Type 14C5 is a DISCON-TINUED type listed for reference only.

SHARP-CUTOFF PENTODE

Glass lock-in type used as rf amplifier and biased detector in ac/dc radio receivers. Outline 13A, OUTLINES SECTION. Tube requires lock-in socket. Heater volts (ac/dc), 12.6; amperes, 0.15. Typical operation and maximum ratings as class A₁ amplifier: plate volts, 250 (300 max); grid-No.2 volts, 100; plate dissipation, 1 max watt; grid-No.2 input, 0.1 14C5

14C7


max watt; grid No.1 volts, -3; grid No.3 connected to cathode at socket; plate resistance, greater than 1 megohm; transconductance, 1575 μ mhos; plate ma., 2.2; grid-No.2 ma., 0.7. Within the limits of its maximum ratings, this type is similar in performance to metal types 6SJ7 and 12SJ7. Type 14C7 is used principally for renewal purposes.

TWIN DIODE-MEDIUM-MU TRIODE

Glass lock-in type used as combined detector, amplifier, and avc tube in ac/dc radio receivers. Outline 13A, OUTLINES SECTION. Tube requires lock-in socket. Heater volts, (ac/dc), 12.6; amperes, 0.15. Except for heater ratings, this type is electrically identical with lock-in type 7E6 and miniature type 6BF6. Type 14E6 is a DISCONTINUED type listed for reference only.

14E6

2



TWIN DIODE—REMOTE-CUTOFF PENTODE

Glass lock-in type used as combined detector, amplifier, and ave tube in ac/dc receivers. Outline 13A, OUTLINES SECTION. Tube requires lock-in socket. Heater volts (ac/dc), 12 6; amperes, 0.15. Except for heater ratings, this type is electrically identical with lock-in type 7E7. Type 14E7 is a DISCON-TINUED type listed for reference only.

HIGH-MU TWIN TRIODE

Glass lock-in type used as phase inverter or resistance-coupled amplifier in ac/dc radio receivers. Outline 13A, OUTLINES SECTION. Tube requires lock-in socket. Heater volts (ac/dc), 12.6; amperes, 0.15. Except for heater ratings, this type is electrically identical with lock-in type 7F7 and glass-octal type 6SL7-GT. Type 14F7 is used principally for renewal purposes.

MEDIUM-MU TWIN TRIODE

Glass lock-in type used as amplifier or oscillator in ac/dc radio equipment. Outline 13A, OUTLINES SECTION, except over-all length is 2-9/32 max inches and seated length is 1-3/4 inches. Tube requires lock-in socket. Heater volts (ac/dc), 12.6; amperes, 0.15. Except for heater ratings, this type is electrically identical with lock-in type 7F8. Type 14F8 is used principally for renewal purposes. 14E7


14F7

14F8

RCA Receiving Tube Manual

TWIN DIODE—HIGH-MU TRIODE

Miniature type used as combined detector and af voltage amplifier in radio receivers. Outline 8B, OUT-LINES SECTION. Tube requires miniature nine-contact socket and may be operated in any position.



volts

| HEATER VOLTAGE (AC/DC) | 14 | volts |
|--|-------|------------|
| HEATER CURRENT. | 0.15 | ampere |
| AMPLIFICATION FACTOR ^o | 72 | |
| PLATE RESISTANCE (Approx.) ^o | 72000 | ohms |
| TRANSCONDUCTANCE ^o | 1000 | μ mhos |
| ° For triode unit; plate volts, 250; grid volts, -3; plate ma., 0.7. | | |

TRIODE UNIT AS CLASS A, AMPLIFIER

Maximum Ratings, (Design-Maximum Values):

14GT8


| PLATE VOLTAGE. | 330 max | volts |
|---|------------------|-------|
| GRID VOLTAGE, Positive-bias value PLATE DISSIPATION. | 0 max 1 1 max | volts |
| PEAK HEATER-CATHODE VOLTAGE: | 1.1 <i>max</i> | walls |
| Heater negative with respect to cathode | 200 max | volts |
| Heater positive with respect to cathode | 200 max | volts |

DIODE UNITS (Each Unit)

Maximum Ratings, (Design-Maximum Values):

| PLATE CURRENT. | 5 max | ma |
|--|-----------------------------|----------------|
| РЕАК НЕАТЕR-САТНОРЕ VOLTAGE: Heater negative with respect to cathode Heater positive with respect to cathode | 200 max 200 = max | volts volts |

Characteristics, Instantaneous Value:

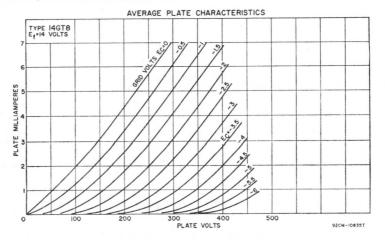



SEMIREMOTE-CUTOFF PENTODE


14H7


Glass lock-in type used as rf or if amplifier in ac/dc radio receivers. Outline 13A, OUT-LINESSECTION. Tube requires lock-in socket. Heater volts (ac/dc), 12.6; amperes, 0.15. Except for heater ratings, this type is electrically identical with type 7H7. Type 14H7 is a DIS-CONTINUED type listed for reference only.
















TRIODE—HEPTODE CONVERTER

Glass lock-in type used as combined triode oscillator and heptode mixer in ac/dc radio receivers. Outline 13A, OUTLINES SECTION. Tube requires lock-in socket. Heater volts (ac/dc), 12.6; amperes, 0.15. Except for heater ratings, this type is electrically identical with lock-in type 7J7. Type 14J7 is a DISCON-TINUED type listed for reference only.

MEDIUM-MU TWIN TRIODE

Glass lock-in type used as voltage amplifier or phase inverter in ac/dc radio equipment. Outline 13B, OUTLINES SECTION. Tube requires lock-in socket. Heater volts (ac/dc), 12.6; amperes, 0.3. Except for heater ratings and capacitances, this type is electrically identical with lock-in type 7N7 and glass-octal type 6SN7-GT. Type 14N7 is a DISCONTINUED type listed for reference only.

PENTAGRID CONVERTER

Glass lock-in type used as converter in ac /dc radio receivers. Outline 13A, OUTLINES SECTION. Tube requires lock-in socket. Heater volts (ac/dc), 12.6; amperes, 0.15. Except for heater ratings and capacitances, this type is electrically identical with metal type 6SA7 and lock-in type 7Q7. Type 14Q7 is used principally for renewal purposes.

TWIN DIODE-**REMOTE-CUTOFF PENTODE**

Glass lock-in type used as combined detector, amplifier, and avc tube in ac/dc radio receivers. Outline 13A, OUTLINES SECTION. Tube requires lock-in socket. Heater volts (ac/dc), 12.6; amperes, 0.15. Except for heater ratings, this type is electrically identical with lock-in type 7R7. Type 14R7 is used principally for renewal purposes.

SHARP-CUTOFF PENTODE

Glass type used as rf amplifier in batteryoperated receivers. Outline 24B, OUTLINES SECTION. Tube requires five-contact socket. Heater volts (dc), 2.0; amperes, 0.22. Typical operation as class A1 amplifier: plate volts, 135 max; grid-No.2 (screen-grid) volts, 67.5 max; grid-No.1 volts, -1.5; plate ma., 1.85; grid-No.2 ma., 0.3; plate resistance, 0.80 megohm; transconductance, 750 µmhos. This is a DISCON-TINUED type listed for reference only.

DUAL TRIODE-SHARP-CUTOFF PENTODE

Duodecar type used in a variety of applications in television receivers employing series-connected heater strings. The high-mu triode unit is used in agc-keyer applications, the low-mu

triode unit in sync-separator applications, and the pentode unit in video-amplifier applications. Outline 12C, OUTLINES SECTION. Heater volts (ac/dc), 14.7; amperes, 0.45; warm-up time (average), 11 seconds. Except for heater ratings, this type is identical with duodecar type 6AF11.

14J7

14N7

14Q7

14R7

15

15AFII

Related type:

6AF11



RCA Receiving Tube Manual

DUAL TRIODE


Duodecar type used as combined vertical-deflection oscillator and vertical-deflection amplifier in television receivers employing series-connected heater strings. The high-mu triode unit



No.1 is used as an oscillator, and the low-mu triode unit No.2 is used as an amplifier. Outline 12D, OUTLINES SECTION. Heater volts (ac/dc), 14.7; amperes, 0.45; warm-up time (average), 11 seconds. Except for heater ratings, this type is identical with duodecar type 6FY7.

POWER PENTODE

Miniature type used as vertical deflection-amplifier tube in television receivers. Outline 8E, OUTLINES SECTION. Heater volts (ac/dc), 14.7; amperes, 0.3; warm-up time (average).



11 seconds. Except for heater ratings, this type is identical with miniature type 6HB6.

HIGH-MU TRIODE— BEAM POWER TUBE

15KY8

Related type:


6HB6

15F

Related type:

6FY7

Novar type used in combined vertical-deflection-oscillator and verticaldeflection-amplifier applications in black-and-white television receivers having (bw-voltage "B" supplies and



-24

volts

having low-voltage "B" supplies and KT GT employing series-connected heater strings. Outline 10C, OUTLINES SECTION. Tube requires novar nine-contact socket and may be mounted in any position.

| HEATER VOLTAGE (AC /DC) | | | | 15 | volts |
|---|-----------|-------------|---------|-------|---------|
| HEATER CURRENT. | | | | 0.45 | ampere |
| HEATER WARM-UP TIME (Average) | | | | 10 | seconds |
| DIRECT INTERELECTRODE CAPACITANCES (Approx.): | | | | | becondo |
| Triode Unit: | | | | | |
| Grid to Plate | | | | 0.44 | pf |
| Grid to Cathode and Heater | | | | 15 | pf |
| Plate to Cathode and Heater | | | | 7 | r - |
| Pentode Unit: | | | | ' | pf |
| Grid No.1 to Plate | | | | 0.040 | |
| | | | | 0.048 | pf |
| Grid No.1 to Cathode, Heater, Grid No.2, and Gr | | | | 2.6 | pf |
| Plate to Cathode, Heater, Grid No.2, and Grid No. | 0.3 | | | 0.28 | pf |
| CLASS AI AMI | PLIFIER | | | | |
| Characteristics: | Triode Un | nit Bear | n Power | Unit | |
| Plate Voltage | 250 | 50 | 135 | 120 | volts |
| Grid-No.2 (Screen-Grid) Voltage | - | 120 | 120 | * | volts |
| Grid-No.1 (Control-Grid) Voltage | | 0 | -10 | -10 | volts |
| Amplification Factor | 64 | | | 7 | |
| Plate Resistance (Approx.) | 40000 | - | 18000 | - | ohms |
| Transconductance | 1600 | - | 8400 | - | μmhos |
| Plate Current. | 1.4 | 170• | 39 | - | ma |
| Grid-No.2 Current | - | 20 • | 3 | - | ma |

VERTICAL-DEFLECTION OSCILLATOR AND AMPLIFIER

Grid-No.1 Voltage (Approx.) for plate current of 1 ma

For operation in a 525-line, 30-frame system

| | Triode | Beam Power | |
|---|------------|------------|-------|
| | Unit | Unit | |
| Maximum Ratings, (Design-Maximum Values): | Oscillator | Amplifier | |
| DC PLATE VOLTAGE. | 330 max | 300 max | volts |
| PEAK POSITIVE-PULSE PLATE VOLTAGE# (Absolute Maximum) | _ | 2200 †max | volts |
| DC GRID-NO.2 VOLTAGE. | - | 150 max | volts |

| Peak Negative-Pulse Grid-No.1 Voltage Peak Cathode Current. Average Cathode Current. Plate Dissipation. | -400 max 77 max 22 max 1.5 max | -250 max 200 max 60 max 12 max | volts ma ma watts |
|--|---|---|----------------------------|
| GRID-NO.2 INPUT. PEAK HEATER-CATHODE VOLTAGE: | - | 1.9 max | watts |
| Heater negative with respect to cathode | 200 max 200∎max | 200 max 200 [∎] max | volts volts |
| Maximum Circuit Values: | | | |
| Grid-No.1-Circuit Resistance: For grid-resistor-bias operation | 2.2 max | 2.2 max r | negohms |


* Triode connection, grid No.2 connected to plate at socket.

This value can be measured by a method involving a recurrent waveform such that the maximum ratings of the tube will not be exceeded.


The duration of the voltage pulse must not exceed 15 per cent of one vertical scanning cycle. In a 525-line, 30-frame system, 15 per cent of one vertical scanning cycle is 2.5 milliseconds.

† Under no conditions should this maximum value be exceeded.

The dc component must not exceed 100 volts.

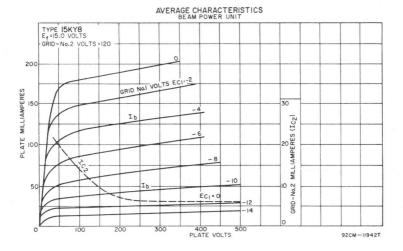



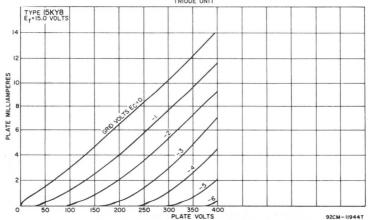

DIODE

Miniature type used as booster diodeinline-time-base circuits of transformerless television receivers. Outline 9C, OUTLINES SECTION. Tube requires miniature nine-contact socket



and may be mounted in any position. Heater volts (ac/dc), 16.4; amperes, 0.6.

| Maximum Ratings, (Design-Center Values): | | |
|--|------------------|-------|
| SUPPLY VOLTAGE at zero current. | 550 max | volts |
| SUPPLY VOLTAGE. | 250 max | volts |
| PEAK PLATE CURRENT. | 550 max | ma |
| AVERAGE PLATE CURRENT | 220 max | ma |
| PLATE DISSIPATION. | 5 max | watts |
| PEAK NEGATIVE-PULSE PLATE VOLTAGE [®] | -6000 max | volts |
| PEAK HEATER-CATHODE VOLTAGE: | | |
| Heater negative with respect to cathode | 6600 • max | volts |
| Heater positive with respect to cathode | 6600• <i>max</i> | volts |
| | | |

Under no conditions should an absolute maximum value of 7500 volts be exceeded.
 The pulse duration must not exceed 22 per cent of a cycle, or a maximum of 18 microseconds.

HALF-WAVE VACUUM RECTIFIER

IZAX3 Related types: 6AX3, 12AX3

16AQ3

Duodecar type used as damper tube in horizontal-deflection circuits of television receivers employing seriesconnected heater strings. Outline 12C, OUTLINES SECTION. Heater volts



(ac/dc), 16.8; amperes, 0.45; warm-up time (average), 11 seconds. Except for heater ratings, this type is identical with duodecar type 6AX3.



12AX4GTA, 12AX4GTB,

25AX4GT

Related types: 6AY3, 12AY3

7 BF

Related types: 6BH3, 22BH3

HALF-WAVE VACUUM RECTIFIER

Glass octal types used as damper tubes in horizontal deflection circuits of television receivers employing seriesconnected heater strings. Outline 14C, OUTLINES SECTION. Heater volts



(ac/dc), 16.8; amperes, 0.45; warm-up time (average), 11 seconds. Except for heater ratings, these types are identical with glass octal types 6AX4-GT and 6AX4-GTB, respectively.

HALF-WAVE VACUUM RECTIFIER

Novar type used as damper tube in horizontal-deflection circuits of blackand-white television receivers employing series-connected heater strings. Outline 17A, OUTLINES SECTION.




Heater volts (ac/dc), 16.8; amperes, 0.45; warm-up time (average), 11 seconds. Except for heater ratings, this type is identical with novar type 6AY3.

HALF-WAVE VACUUM RECTIFIER

Novar type used as damper tube in horizontal-deflection circuits of blackand-white television receivers employing series-connected heater strings. Outline 17A, OUTLINES SECTION.



Heater volts (ac/dc), 17.0; amperes, 0.6; warm-up time (average), 11 seconds. Except for heater ratings, this type is identical with novar type 6BH3.



BEAM POWER TUBE

Glass octal type used as horizontal deflection amplifier in television receivers employing series-connected heater strings. Outline 15C, OUT-LINES SECTION. Heater volts (ac/

Related types: 6BQ6GTB/6CU6, 12BQ6-GTB/12CU6, 25BQ6GTB/

25CU6

dc), 16.8; amperes, 0.45; warm-up time (average), 11 seconds. Except for heater ratings, this type is identical with glass octal type 6BQ6-GTB/6CU6.



HALF-WAVE VACUUM RECTIFIER

Novar type used as damper tube in horizontal-deflection circuits of blackand-white television receivers employing series-connected heater strings. Outline 10D, OUTLINES SECTION.

17BS3 Related types: 6BS3, 12BS3


Heater volts (ac/dc), 16.8; amperes, 0.45; warm-up time (average), 11 seconds. Except for heater ratings, this type is identical with novar type 6BS3.



SHARP-CUTOFF DUAL TETRODE

Miniature type used as vhf rf-amplifier and autodyne mixer tube. Outline 8B, OUTLINESSECTION. Heater volts (ac/dc), 16.8; amperes, 0.15. Except for heater ratings, this type is identical with miniature type 6C9.

17C9



BEAM POWER TUBE

Miniature type used in the audio output stage of television receivers employing series-connected heater strings. Outline 7C, OUTLINES SECTION. Heater volts (ac/dc), 16.8; amperes,

17CU5 Related types: 6CU5, 12CU5/12C5

0.45; warm-up time (average), 11 seconds. Except for heater ratings, this type is identical with miniature type 6CU5.



HALF-WAVE VACUUM RECTIFIER

Glass octal type used as damper tube in horizontal-deflection circuits of television receivers employing seriesconnected heater strings. Outline 14C, OUTLINES SECTION. Heater volts



(ac/dc), 16.8; amperes, 0.45; warm-up time (average), 11 seconds. Except for heater ratings, this type is identical with glass octal type 6DA4.

423

HALF-WAVE VACUUM RECTIFIER

Glass octal type used as damper tube in horizontal-deflection circuits of television receivers employing seriesconnected heater strings. Outline 14F, OUTLINES SECTION. Heater volts K3 JC IC

(ac/dc), 17; amperes, 0.6; warm-up time (average), 11 seconds. Except for heater ratings, this type is identical with glass octal type 6DE4.

HALF-WAVE VACUUM RECTIFIER

Glass octal type used as damper tube in horizontal-deflection circuits of television receivers employing seriesconnected heater strings. Outline 14F, OUTLINES SECTION. Heater volts (ac/dc), 16.8; amperes, 0.45; warm-up time (average), 11 seconds. Except for heater ratings, this type is identical with glass octal type 6DM 4.

17DQ6B Related types: 6DQ6A, 6DQ6B,

17DE4

Related types:

6DE4, 22DE4

17DM4

Related types:

6DM4, 12DM4

17DQ6A

12DQ6A, 12DQ6B

17GF5

Related types:

6GE5, 12GE5

17GJ5

Related types:

6GJ5, 12GJ5

17GT5

Related types: 6GT5, 12GT5

BEAM POWER TUBE

Glass octal types used as horizontal deflection amplifier in television receivers employing series-connected heater strings. Outline 21, OUTLINES SECTION. Heater volts (ac/dc), 16.8;

amperes, 0.45; warm-up time (average), 11 seconds. Except for heater ratings, these types are identical with glass octal types 6DQ6-A and 6DQ6-B.

BEAM POWER TUBE

Duodecar type used as horizontaldeflection-amplifier tube in television receivers employing series-connected heater strings. Outline 20, OUTLINES SECTION. Heater volts (ac/dc), 16.8;

amperes, 0.45; warm-up time (average), 11 seconds. Except for heater ratings, this type is identical with duodecar type 6GE5.


BEAM POWER TUBE

Novar type used in horizontal-deflection-amplifier circuits of television receivers employing series-connected heaterstrings.Outline18A,OUTLINES SECTION. Tube requires novar nine-

contact socket and may be operated in any position. Heater volts (ac/dc), 16.8; amperes, 0.45; warm-up time (average), 11 seconds. Except for heater ratings, this type is identical with type 6GJ5.

BEAM POWER TUBE

Novar type used in horizontal-deflection-amplifier circuits of television receivers employing series-connected heater strings. Outlines 17A, OUT-LINES SECTION. Tube requires no-





10

G3(4


G1 (3

G

6 3 (3

Go

var nine-contact socket and may be operated in any position. Heater volts (ac/dc), 16.8; amperes, 0.45; warm-up time (average), 11 seconds. Except for heater ratings, this tube is identical with novar type 6GT5.



BEAM POWER TUBE

Duodecar type used as horizontaldeflection-amplifier tube in television receivers employing series-connected heater strings. Outline 16C, OUT-LINES SECTION. Heater volts (ac/




dc), 16.8; amperes, 0.45; warm-up time (average), 11 seconds. Except for heater ratings, this type is identical with duodecar type 6GV5.

BEAM POWER TUBE

Glass octal type used in horizontal-deflection-amplifier circuits of highefficiency deflection circuits of television receivers employing series-connected heater strings. Outline 21, OUT-

Related types: 6GW6, 12GW6

LINES SECTION. Tube requires octal socket and may be operated in any position. Heater volts (ac/dc), 16.8; amperes, 0.45; warm-up time (average), 11 seconds. Except for heater ratings, this type is identical with glass octal type 6GW6.




BEAM POWER TUBE

Novar type used as high-efficiency horizontal-deflection-amplifier tube in television receivers employing seriesconnected heater strings. Outline 18A, OUTLINES SECTION. Heater volts

Related types: 6JB6, 12JB6

(ac/dc), 16.8; amperes, 0.45; warm-up time (average), 11 seconds. Except for heater ratings, this type is identical with novar type 6JB6.



MEDIUM-MU TRIODE POWER PENTODE

Duodecar type used as combined vertical-deflection-oscillator and vertical-deflection-amplifier tube in television receivers employing series-connected heater strings. Outline 12B,

17JZ8

OUTLINES SECTION. Tube requires duodecar twelve-contact socket and may be mounted in any position. Heater volts (ac/dc), 16.8; amperes, 0.45; warm-up time (average), 11 seconds.

CLASS A1 AMPLIFIER

| | Triode | Pe | ntode | |
|---|---------|------|-------|-------|
| Characteristics: | Unit | U | nit | |
| Plate Voltage | 150 | 45 | 120 | volts |
| Grid-No.2 (Screen-Grid) Voltage | _ | 110 | 110 | volts |
| Grid-No.1 (Control-Grid) Voltage | $^{-5}$ | 0 | -8 | volts |
| Amplification Factor | 21.5 | - | - | |
| Plate Resistance (Approx.) | 11300 | - | 11700 | ohms |
| Transconductance | 1900 | - | 7100 | μmhos |
| Plate Current | 3.3 | 122• | 46 | ma |
| Grid-No.2 Current | - | 17. | 4 | ma |
| Grid-No.1 Voltage (Approx.) for plate current of 100 µa | - | - | -25 | volts |
| Grid-No.1 Voltage (Approx.) for plate current of 10 µa | -10 | - | - | volts |
| | | | | 425 |

DC PLATE VOLTAGE.....

PEAK POSITIVE-PULSE PLATE VOLTAGE#

PEAK NEGATIVE-PULSE GRID-NO.1 VOLTAGE.....

PEAK CATHODE CURRENT.....

AVERAGE CATHODE CURRENT.

PLATE DISSIPATION

Maximum Ratings, (Design-Maximum Values):

Maximum Circuit Values:

17H3

18A5

GRID-NO.2 VOLTAGE

Grid-No.1-Circuit Resistance:

GRID-NO.2 INPUT.

PEAK HEATER-CATHODE VOLTAGE:

 For fixed-bias operation
 1 max
 1 max
 max
 megohm

 For cathode-bias operation
 2.2 max
 2.2 max
 megohms

RCA Receiving Tube Manual =

VERTICAL-DEFLECTION OSCILLATOR AND AMPLIFIER For operation in a 525-line, 30-frame system

Triode

Unit

Oscillator

250 max

-400 max

70 max

20 max

200 max

200 max

1 max

Pentode

Unit

Amplifier

250 max

200 max

-150 max

245 max

1.8 max

200 mar

200 max

70 max

7 max

2000 max

volts

volts

volts

volts

ma

ma

watts

watts

volts

volts

• This value may be measured by a method involving a recurrent waveform such that the maximum ratings of the tube will not be exceeded.

The duration of the voltage pulse must not exceed 15 per cent of one vertical scanning cycle. In a 525-line, 30-frame system, 15 per cent of one vertical scanning cycle is 2.5 milliseconds.

† An adequate bias resistor or other means is required to protect the tube in the absence of excitation.
The dc component must not exceed 100 volts.

HALF-WAVE VACUUM RECTIFIER

Miniature type used as damper tube in horizontal-deflection circuits of television receiversemploying series-connected heaterstrings. Outline 8D, OUTLINES SECTION. Tube requires miniature nine-contact socket and may be mounted in any position. Socket terminals 2, 6, 7, and 9 should not be used as tie points. It is especially important that this tube, like other power-handling tubes, be adequately ventilated.

Heater volts (ac/dc), 17.5; amperes, 0.3; warm-up time (average), 11 seconds. Maximum ratings for damper service (for operation in a 525-line, 30-frame system): peak inverse plate volts, 2000 max; peak plate ma., 450 max; dc plate ma., 75 max; plate dissipation, 3 max watts; peak heater-cathode volts; heater negative with respect to cathode, 2000 max (the dc component must not exceed 500 volts); heater positive with respect to cathode, 200 max (the dc component must not exceed 100 volts). This type is used principally for renewal purposes.

BEAM POWER TUBE

Glass octal type used as horizontal-deflection-amplifier tube in television receivers employing series-connected heater strings. Outline 14E, OUTLINES SECTION. Tube requires octal socket and may be operated in any position. Heater volts (ac/dc), 18.5; amperes, 0.3; warmup time (average), 11 seconds. Characteristics as class A1 amplifier: plate volts, 200; grid-No.2 volts, 125; grid-No.1 volts, -17; plate ma., 40;



grid-No.2 ma., 1.1; transconductance, 4800 µmhos; plate resistance (approx.), 27000 ohms.

HORIZONTAL-DEFLECTION AMPLIFIER

For operation in a 525-line, 30-frame system Maximum Ratings. (Design-Maximum Values):

| Maximum Kumgs, (Design-Maximum Vataes). | | |
|--|----------|-------|
| DC PLATE VOLTAGE | 350 max | volts |
| PEAK POSITIVE-PULSE PLATE VOLTAGE# | 3000 max | volts |
| PEAK NEGATIVE-PULSE PLATE VOLTAGE | -600 max | volts |
| DC GRID-NO.2 (SCREEN-GRID) VOLTAGE | 160 max | volts |
| PEAK NEGATIVE-PULSE GRID-NO.1 (CONTROL-GRID) VOLTAGE | -250 max | volts |
| PEAK CATHODE CURRENT. | 310 max | ma |
| AVERAGE CATHODE CURRENT. | 90 max | ma |
| GRID-NO.2 INPUT | 2.5 max | watts |
| PLATE DISSIPATION | 9 max | watts |
| | | |

426

| PEAK HEATER-CATHODE VOLTAGE: | | |
|---|---------|-------|
| Heater negative with respect to cathode | 200 max | volts |
| Heater positive with respect to cathode | 200 max | volts |
| BULB TEMPERATURE (At hottest point) | 190 max | °C |
| | | |

Maximum Circuit Value:

Grid-No.1-Circuit Resistance:

 $\hfill\square$ Under no circumstances should this absolute value be exceeded.

• An adequate bias resistor or other means is required to protect the tube in the absence of excitation.

The dc component must not exceed 100 volts.



REMOTE-CUTOFF PENTODE


Miniature type used as rf- and ifamplifier tube in ac/dc radio receivers. Outline 7B, OUTLINES SECTION. Tube requires miniature seven-contact socket and may be mounted in any 18FW6 18FW6A

position. Heater volts (ac/dc), 18; amperes, 0.1; warm-up time (average), 18-FW6-A, 20 seconds.

CLASS A1 AMPLIFIER

Maximum Ratings, (Design-Maximum Values):

| PLATE VOLTAGE | 150 max | volts |
|---|------------|------------|
| GRID-NO.2 (SCREEN-GRID) SUPPLY VOLTAGE. | 150 max | volts |
| GRID-NO.2 VOLTAGE | See curv | e page 70 |
| GRID-NO.1 (CONTROL-GRID) VOLTAGE, Positive-bias value | 0 max | volts |
| GRID-NO.2 INPUT: | • | |
| For grid-No.2 voltages up to 75 volts. | 0.6 max | watt |
| For grid-No.2 voltages between 75 and 150 volts | | e page 70 |
| PLATE DISSIPATION. | 2.5 max | watts |
| PEAK HEATER-CATHODE VOLTAGE: | | in divers |
| Heater negative with respect to cathode | 100 max | volts |
| Heater positive with respect to cathode | 100 max | volts |
| | | |
| Characteristics: | | |
| Plate Supply Voltage | 100 | volts |
| | to cathode | |
| Grid-No.2 Supply Voltage. | 100 | volts |
| Cathode-Bias Resistor. | 68 | ohms |
| | | |
| Plate Resistance (Approx.) | 0.25 | megohm |
| Transconductance | 4400 | μ mhos |
| Plate Current | 11 | ma |
| Grid-No.2 Current Grid-No.1 Voltage (Approx.) for transconductance of 25 μmhos | 4.4 | ma |
| | -20 | volts |



PENTAGRID CONVERTER

Miniature type used for converter applications in ac/dc radio receivers. Outline 7B, OUTLINES SECTION. Tube requires miniature seven-contact socket and may be mounted in



any position. Heater volts (ac/dc), 18; amperes, 0.1; warm-up time (average), 18FX6-A, 20 seconds.

CONVERTER

Maximum Ratings, (Design-Maximum Values):

| PLATE VOLTAGE | 150 max | volts |
|--|---------|-------|
| GRIDS-NO.2-AND-NO.4 (SCREEN-GRID) SUPPLY VOLTAGE | 150 max | volts |
| GRIDS-NO.2-AND-NO.4 VOLTAGE | 110 max | volts |
| GRIDS-NO.2-AND-NO.4 INPUT. | 1.2 max | watts |
| | | |

RCA Receiving Tube Manual

| PLATE DISSIPATION PEAK HEATER-CATHODE VOLTAGE: | 1 max | watt |
|---|---------------|------------|
| Heater negative with respect to cathode | 100 max | volts |
| Heater positive with respect to cathode | 100 max | volts |
| Typical Operation (Separate Excitation):* | | |
| Plate Voltage | 100 | volts |
| Grids-No.2-and-No.4 (Screen-Grid) Voltage | 100 | volts |
| Grid-No.3 (Control-Grid) Voltage | -1.5 | volts |
| Grid-No.1 (Oscillator-Grid) Resistor | 20000 | ohms |
| Plate Resistance (Approx.). | 0.4 | megohm |
| Conversion Transconductance | 480 | µmhos |
| Grid-No.3 Voltage (Approx.) for conversion transconductance of 10 µmhos | -21 | volts |
| Plate Current. | 2.3 | ma |
| Grids-No.2-and-No.4 Current. | 6.2 | ma |
| Grid-No.1 Current | 0.5 | ma |
| Total Cathode Current | 9 | ma |
| Note: The transconductor as between grid No 1 and gridg No 2 and No 4 conne | atad to plate | (not ongil |

Note: The transconductance between grid No.1 and grids No.2 and No.4 connected to plate (not oscillating) is approximately 7000 μ mhos under the following conditions: grids No.1 and No.3 at 0 volts; grids No.2 and No.4 and plate at 100 volts. Under the same conditions, the plate current is 24 ma., and the amplification factor is 22.

* The characteristics shown with separate excitation correspond very closely with those obtained in a self-excited oscillator circuit operating with zero bias.

TWIN DIODE-HIGH-MU TRIODE

Miniature type used for combined detector, amplifier, and avc tube in compact ac/dc radio receivers. Outline 7B, OUTLINES SECTION. Tube requires miniature seven-contact sock-



et and may be mounted in any position. Heater volts (ac/dc), 18; amperes, 0.1; warm-up time (average), 18FY6-A, 20 seconds.

TRIODE UNIT AS CLASS A1 AMPLIFIER

| Maximum Kafings, (Design-Maximum Values): | | |
|---|---------|-------|
| PLATE VOLTAGE | 150 max | volts |
| GRID VOLTAGE, Positive-bias value | 0 max | volts |
| PLATE DISSIPATION | 0.5 max | watt |
| PEAK HEATER-CATHODE VOLTAGE: | | |
| Heater negative with respect to cathode | 100 max | volts |
| Heater positive with respect to cathode | 100 max | volts |
| Characteristics: | | |
| Plate Voltage | 100 | volts |
| Grid Voltage | -1 | volt |
| Amplification Factor | 100 | |
| Plate Resistance (Approx.) | 77000 | ohms |
| Transconductance | 1300 | μmhos |
| Plate Current | 0.6 | ma |
| | | |

DIODE UNITS (Each Unit)

Maximum Ratings, (Design-Maximum Values):

PLATE CURRENT.....

Maximum Dations (Design Manimum Values)

1 max

ma

SHARP-CUTOFF PENTODE




18FY6

18FY6A

Miniature type used in the if, rf, and converter stages of ac/dc AM radio receivers. Outline 7B, OUT-LINESSECTION. Tube requires miniature seven-contact socket and may be operated in any position.

| | ~ ~ | - 1 | | | | | | r | | | | | | | | |
|-------------------------|-----|-----|--|--|--|--|--|------|--|--|--|--|--|--|--|--|
| HEATER VOLTAGE (AC/DC). | | | | | | | | | | | | | | | | |
| HEATER CURRENT | | | | | | | | | | | | | | | | |
| WARM-UP TIME (AVERAGE). | | | | | | | | | | | | | | | | |



| DIRECT INTERELECTRODE CAPACITANCES:° Grid-No.1 to Plate Grid No.1 to Cathode, Heater, Grid No.2, Grid No.3, and Internal Shield Plate to Cathode, Heater, Grid No.2, Grid No.3 and Internal Shield ° Values are same without external shield, or with external shield connected to | 0.0035 6.0 5.0 o cathode. | pf pf pf |
|--|------------------------------------|----------------|
| CLASS A1 AMPLIFIER | | |
| Characteristics: | | |
| Plate Supply Voltage Grid No.3 (Suppressor Grid)Connec | 100 | volts |
| Grid No.3 (Suppressor Grid)Connec | ted to cathor | le at socket |
| Grid-No.2 (Screen-Grid) Voltage | 100 | volts |
| Cathode-Bias Resistor. | 150 | ohms |
| Plate Resistance (Approx.). | 0.5 | megohm |
| Transconductance | 4300 | μmhos |

Technical Data

RF AMPLIFIER AND CONVERTER

| Maximum Ratings, (Design-Maximum Values): | | |
|--|----------------------------|-------|
| PLATE VOLTAGE. | 150 max | volts |
| GRID-NO.2 SUPPLY VOLTAGE. GRID-NO.2 VOLTAGE. | 150 max See curve | volts |
| PLATE DISSIPATION | 2.5 max | watts |
| GRID-NO.2 INPUT: | 0.6 max | watt |
| For grid-No.2 voltages up to 75 volts For grid-No.2 voltages between 75 and 150 volts | See curve | |
| PEAK HEATER-CATHODE VOLTAGE: | | |
| Heater negative with respect to cathode | $100 \ max$ $100 \ max$ | volts |
| Heater positive with respect to cathode | 100 max | VOIUS |



Glass type used in output stage of batteryoperated receivers. Maximum dimensions: overall length, 4-3/16 inches; seated height, 3-9/16 inches; diameter, 1-9/16 inches. Tube requires six-contact socket. Filament volts (dc), 2.0; amperes, 0.26. Except for filament current, this type is electrically identical with type 1J6-GT. Type 19 is a DISCONTINUED type listed for reference only.

HALF-WAVE VACUUM RECTIFIER

Glass octal types used as damper. diode in horizontal-deflection circuits 19AU4GTA of black-and-white television receivers employing series-connected heater strings. Outline 14F, OUTLINESSEC-

19

19AU4

Related type:

6AU4GTA

2

4.7

ma

ma

volts




Plate Current....

Grid-No.2 Current. Grid-No.1 Voltage (Approx.), for plate current of 10 µa.

TION. Tubes require octal socket and may be mounted in any position. These types may be supplied with pin 1 omitted. Socket terminals 1, 2, 4, and 6 should not be used as tie points. It is especially important that these tubes, like other power-handling tubes, be adequately ventilated. Heater volts (ac/dc), 18.9; amperes, 0.6; warm-up time (average), 11 seconds. Type 19AU4-GTA is used principally for renewal purposes.

DAMPER SERVICE

For operation in a 525-line, 30-frame system

| Maximum Ratings: | 19AU4-GTA Design Maximum | | |
|---|-----------------------------|--------------------------------------|----------------|
| PEAK INVERSE PLATE VOLTAGE# | . 4500 max | 4500° max | volts |
| PEAK PLATE CURRENT. | | 1050 max | ma |
| DC PLATE CURRENT | | 175 max | ma |
| PLATE DISSIPATION | . 6.5 max | 6 max | watts |
| PEAK HEATER-CATHODE VOLTAGE: Heater negative with respect to cathode | . 4500†max . 300≜max | 4500°† <i>max</i> 300≜ <i>max</i> | volts volts |

The duration of the voltage pulse must not exceed 15 per cent of one horizontal scanning cycle. In a 525-line, 30-frame system, 15 per cent of one horizontal scanning cycle is 10 microseconds. ° Under no circumstances should this absolute value be exceeded.


† The dc component must not exceed 900 volts.

The dc component must not exceed 100 volts.

RCA Receiving Tube Manual

BEAM POWER TUBE


Glass octal types used as output amplifiers in horizontal deflection circuits of television equipment of the "transformerless" type where high pulse voltages occur during short duty cycles. Type 19BG6GA, Outline 25A, OUT-LINES SECTION. Tubes require octal socket. Vertical tube mounting is preferred but horizontal operation is permissible if pins No.2 and No.7 are in vertical plane. Heater volts (ac/dc),



18.9; amperes, 0.3. Except for heater rating and interelectrode capacitances, type 19BG6-GA is electrically identical with glass octal type 6BG6-G. Type 19BG6-G is a DISCONTINUED type listed for reference only. Type 19BG6-GA is used principally for renewal purposes.

MEDIUM-MU TRIODE— SHARP-CUTOFF TETRODE


Miniature type used as combined vhf oscillator and mixer in television receivers employing series-connected heater strings. Outline 8B, OUTLINES SECTION. Tube requires miniature



nine-contact socket and may be operated in any position. Heater volts (ac/dc), 18.9; amperes, 0.15; warm-up time (average), 11 seconds. Except for heater ratings, this type is identical with miniature type 6CL8-A.

MEDIUM-MU TRIODE— SHARP-CUTOFF PENTODE

Miniature type used as combined oscillator and mixer in television receivers employing series-connected heaterstrings and using an intermediate frequency in the order of 40 megacycles



per second. Outline 8B, OUTLINES SECTION. Tube requires miniature ninecontact socket and may be operated in any position. Heater volts (ac/dc), 18.9; amperes, 0.15; warm-up time (average), 11 seconds. Except for heater ratings, this type is identical with miniature type 6EA8.

SEMIREMOTE-CUTOFF PENTODE

Miniature type used as if-amplifier tube in FM receivers employing seriesconnected heater strings. Outline 7B, OUTLINES SECTION. Heater volts (ac/dc), 18.9; amperes, 0.15; warm-up



time (average), 17 seconds. Except for heater ratings, this type is identical with miniature type 6HR6.

SHARP-CUTOFF PENTODE

Miniature type used as if-amplifier and limiter tube in FM receivers. Outline 7B, OUTLINES SECTION. Heater volts (ac/dc), 18.9; amperes, 0.15; warm-up time (average), 17 sec-



onds. Except for heater ratings, this type is identical to miniature type 6HS6.

19CL8A Related types: 5CL8A, 6CL8A

19EA8

Related types:

SEAS, GEAS

19HR6

Related type:

AHRA

19HS6

Related type:

6HS6


19BG6G

19BG6GA

Related type:

68G6G





HIGH-MU TRIODE— SHARP-CUTOFF PENTODE

Miniature type used as if-amplifier and af voltage-amplifier tube in radio receivers employing series-connected heaterstrings.Outline 8B,OUT-LINES SECTION. Tube requires min-

19HV8

Dantada


Triede

iature nine-contact socket and may be mounted in any position. Heater volts (ac/dc), 18.9; amperes, 0.15.

| CLASS | A_1 | AMP | LIFIE | R |
|-------|-------|-----|-------|---|
|-------|-------|-----|-------|---|

| Maximum Ratings, (Design-Maximum Values): | Triode Unit | Pentode Unit | |
|---|----------------|----------------------|-----------|
| | 0 1111 | | 14 |
| PLATE VOLTAGE. | 330 max | 330 max | volts |
| GRID-NO.2 (SCREEN-GRID) SUPPLY VOLTAGE. | - | 330 max | volts |
| GRID-NO.2 VOLTAGE. | - | | e page 70 |
| GRID-NO.1 (CONTROL-GRID) VOLTAGE, Positive-bias value | 0 max | 0 max | volts |
| PLATE DISSIPATION | 0.55 max | 3 max | watts |
| GRID-NO.2 INPUT: | | | |
| For grid-No.2 voltages up to 165 volts | - | 0.55 max | watt |
| For grid-No.2 voltages between 165 and 330 volts | _ | See curv | e page 70 |
| PEAK HEATER-CATHODE VOLTAGE: | | | 1-0- |
| Heater negative with respect to cathode | 200 max | 200 max | volts |
| Heater positive with respect to cathode | 200 max | 200 ^m max | volts |
| | 200 1102 | 200 11000 | TOTOS |
| Characteristics: | | | |
| Plate Voltage | 100 | 125 | volts |
| Grid-No.2 Voltage | | 125 | volts |
| Grid-No.1 Voltage | $^{-1}$ | -1 | volt |
| Amplification Factor | 70 | | |
| Plate Resistance (Approx.) | 54000 | 200000 | ohms |
| Transconductance | 1300 | 6500 | μmhos |
| Plate Current | 0.8 | 12 | ma |
| Grid-No.2 Current | | 4 | ma |
| Grid-No.1 Voltage (Approx.) for plate current of 50 µa | -1.5 | _ | volts |
| Grid-No.1 Voltage (Approx.) for plate current of 20 μ a | 1.0 | -9 | volts |
| | | 0 | VOICS |
| Maximum Circuit Values: | | | |
| Grid-No.1-Circuit Resistance: | | | |
| For fixed-bias operation. | 0.5 max | 0.25 max | megohm |
| For cathode-bias operation | 1 max | 1 max | megohm |
| | | | |

The dc component must not exceed 100 volts.




MEDIUM-MU TWIN TRIODE

Miniature type used for converter service in ac/dc AM and FM receivers and as oscillator, amplifier, or mixer in television receivers of the "transformerless" type.Outline 7B, OUT-LINES SECTION. Tube requires miniature seven-contact socket and may be mounted in any position. Heater volts (ac/dc), 18.9; amperes, 0.15. For direct interelectrode capaci-

19J6 Related types: 5J6, 6J6

19JN8

tances, ratings, and typical operation as a class A_1 amplifier, and curves, refer to type 6J6. Maximum ratings and characteristics for mixer service (each unit): plate volts, 150 (300 max); cathode-bias resistor, 810 ohms; peak oscillator volts, 3; plate resistance, 10200 ohms; conversion transconductance, 1900 μ mos; plate ma., 4.8; plate dissipation, 1.5 max watts; peak heater-cathode volts, 90 max. Type 19J6 is used principally for renewal purposes.



MEDIUM-MU TRIODE— SHARP-CUTOFF PENTODE

Miniature type used as FM converter and rf-amplifier tube in radio receivers. Outline 8B, OUTLINES SECTION. Tube requires miniature nine-contact socket and may be mount-

ed in any position. Heater volts (ac/dc), 18.9; amperes, 0.15.

RCA Receiving Tube Manual =

CLASS A1 AMPLIFIER

| | Triode | Pentode | |
|--|--------------------|----------|------------|
| Maximum Ratings, (Design-Maximum Values): | Unit | Unit | |
| PLATE VOLTAGE. | 300 max | 300 max | volts |
| GRID-NO.2 (SCREEN-GRID) SUPPLY VOLTAGE | | 300 max | volts |
| GRID-NO.2 VOLTAGE. | - | See curv | re page 70 |
| GRID-NO.1 (CONTROL-GRID) VOLTAGE, Positive-bias value | 0 max | 0 max | volts |
| PLATE DISSIPATION | 2.5 max | 2.5 max | watts |
| GRID-NO.2 INPUT: | | | |
| For grid-No.2 voltages up to 150 volts | | 0.55 max | watt |
| For grid-No.2 voltages between 150 and 300 volts | | See curv | re page 70 |
| PEAK HEATER-CATHODE VOLTAGE: | | | |
| Heater negative with respect to cathode | 200 max | 200 max | volts |
| Heater positive with respect to cathode | 200 ^{max} | 200 max | volts |
| Characteristics: | | | |
| Plate Voltage | 125 | 125 | volts |
| Grid-No.2 Voltage | - | 125 | volts |
| Grid-No.1 Voltage | -1 | -1 | volt |
| Amplification Factor | 46 | - | |
| Plate Resistance (Approx.) | 5400 | 200000 | ohms |
| Transconductance | 8500 | 7500 | μmhos |
| Plate Current | 13.5 | 12 | ma |
| Grid-No.2 Current. | - | 4 | ma |
| Grid-No.1 Voltage (Approx.) for plate current of 10 µa | -8 | -8 | volts |
| Maximum Circuit Values: Grid-No.1-Circuit Resistance: | | | |
| For fixed-bias operation | 2.2 max | 2 2 max | megohms |
| For cathode-bias operation | 2.2 max | | megohms |

The dc component must not exceed 100 volts.

TRIPLE DIODE—HIGH-MU TRIODE

19T8 Related types: 5T8, 6T8A Miniature type used as combined audio amplifier, AM detector, and FM detector in AM/FM receivers of the a/c or "transformer" type. Outline 8B, OUTLINES SECTION. Tube requires miniature nine-contact socket and may be mounted in any position. Heater volts (ac/dc), 18.9; amperes, 0.15. Except for



heater ratings, this type is identical with miniature type 6T8-A. Type 19T8 is used principally for renewal purposes.

MEDIUM-MU TRIODE— SHARP-CUTOFF PENTODE

Miniature type used as combined oscillator and mixer tube in "transformerless" AM/FM receivers. Outline 8B, OUTLINES SECTION. Tube requires miniature nine-contact socket



and may be mounted in any position. Heater volts (ac/dc), 18.9; amperes, 0.15. Except for heater ratings, this type is identical with miniature type 6X8.

POWER TRIODE

Glass type used as output amplifier in drybattery-operated receivers. Filament volts (dc), 3.3; amperes, 0.132. Characteristics as class A1 amplifier: plate volts, 135 max; grid volts, -22.5; plate max, 6.5; plate resistance, 6300 ohms; amplification factor, 3.3; transconductance, 525 μ mhos; load resistance, 6500 ohms; output mw., 110. This is a DISCONTINUED type listed for reference only.



20

Related types:

5X8, 6X8




DIODE—REMOTE-CUTOFF PENTODE

Miniature type used as combined if amplifier and AM detector in AM and AM/FM radio receivers. Outline 8D, OUTLINES SECTION. Tube requires miniature nine-contact socket



and may be operated in any position. Heater volts (ac/dc), 20; amperes, 0.1. Except for heater ratings, this type is identical with miniature type 6EQ7.



HIGH-MU TWIN TRIODE

Miniature type used in high-gain, resistance-coupled, low-level audio amplifiers operating at low-signal levels, such as preamplifiers for stereo phonographs. Outline 8B, OUTLINES SEC-


20EZ7

TION. For typical operation as resistance-coupled amplifier, refer to RESISTANCE-COUPLED AMPLIFIER SECTION. Tube requires miniature nine-contact socket and may be operated in any position.

| HEATER VOLTS (AC/DC) | | 20 | volts |
|---|-----------|-----------|---------|
| HEATER CURRENT | | 0.1 20 | ampere |
| DIRECT INTERELECTRODES CAPACITANCES: ^o | Unit No.1 | Unit No.2 | beeendb |
| Grid to Plate | 1.5 | 1.5 | pf |
| Grid to Cathode and Heater | 1.6 | 1.6 | pf |
| Plate to Cathode and Heater | 0.2 | 0.3 | pf |

CLASS A1 AMPLIFIER (Each Unit)

| Maximum Ratings, (Design-Maximum Values): | | |
|---|---------|-------|
| PLATE VOLTAGE | 330 max | volts |
| GRID VOLTAGE: | | |
| Negative-bias value | 55 max | volts |
| Positive-bias value | 0 max | volts |
| PLATE DISSIPATION | 1.2 max | watts |
| PEAK HEATER-CATHODE VOLTAGE: | | |
| Heater negative with respect to cathode | 200 max | volts |
| Heater positive with respect to cathode | 200 max | volts |

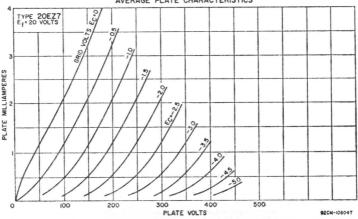

AVERAGE PLATE CHARACTERISTICS

Characteristics:

| Plate Voltage | 100 | 250 | volts |
|----------------------------|---------|-------|-------|
| Grid Voltage | $^{-1}$ | -2 | volts |
| Amplification Factor | 100 | 100 | |
| Plate Resistance (Approx.) | 80000 | 62500 | ohms |
| Transconductance | 1250 | 1600 | μmhos |
| Plate Current | 0.5 | 1.2 | ma |
| ° Without external shield. | | | |

The dc component must not exceed 100 volts.

BEAM POWER TUBE

Glass octal type used as horizontal-deflection amplifier in television receivers employing series-connected heater strings. Outline 25A, OUT-LINES SECTION. Tubes requires oc-



tal socket and should be operated vertically (base down or up) or horizontally with pins 2 and 7 in a vertical plane. Heater volts (ac/dc), 21-5; amperes; warm-up time (average), 11 seconds. Except for heater ratings, this tube is identical with glass octal type 6EX6.

BEAM POWER TUBE


21GY5

Characteristics:

21EX6

Related type: 6EX6

> Duodecar type used as horizontaldeflection-amplifier tube in television receivers employing series-connected heater strings. Outline 16C, OUT-LINES SECTION. Tube requires duo-



decar twelve-contact socket and may be mounted in any position. Heater volts (ac/dc), 21; amperes, 0.45; warm-up time (average), 11 seconds.

CLASS A1 AMPLIFIER

| Plate Voltage | 60 | 130 | volts |
|---|------|-------|------------|
| Grid-No.2 (Screen-Grid) Voltage | 130 | 130 | volts |
| Grid-No.1 (Control-Grid) Voltage | 0 | -20 | volts |
| Triode Amplification Factor* | - | 4.7 | |
| Plate Resistance (Approx.) | | 11000 | ohms |
| Transconductance | - | 9100 | μ mhos |
| Plate Current | 410• | 50 | ma |
| Grid-No.2 Current | 24• | 1.75 | ma |
| Grid-No.1 Voltage (Approx.) for plate current of 1 ma | | -33 | volts |
| | | | |

* Triode connection, grid No.2 connected to plate.

• This value can be measured by a method involving a recurrent waveform such that the maximum ratings of the tube will not be exceeded.

HORIZONTAL-DEFLECTION AMPLIFIER

For operation in a 525-line, 30-frame system

| Maximum Ratings, (Design-Maximum Values): | | |
|---|-----------|-------|
| DC PLATE SUPPLY VOLTAGE. | 770 max | volts |
| PEAK POSITIVE-PULSE PLATE VOLTAGE# | 6500 max | volts |
| PEAK NEGATIVE-PULSE PLATE VOLTAGE | -1500 max | volts |
| GRID-NO.2 VOLTAGE. | 220 max | volts |
| PEAK NEGATIVE-PULSE GRID-NO.1 VOLTAGE. | -330 max | volts |
| DC GRID-NO.1 VOLTAGE | -55 max | volts |
| PEAK CATHODE CURRENT | 800 max | ma |
| AVERAGE CATHODE CURRENT | 230 max | ma |
| PLATE DISSIPATION | 18 max | watts |
| GRID-NO.2 INPUT. | 3.5 max | watts |
| PEAK HEATER-CATHODE VOLTAGE: | | |
| Heater negative with respect to cathode | 200 max | volts |
| Heater positive with respect to cathode | 200 max | volts |
| BULB TEMPERATURE (At hottest point) | 220 max | °C |
| | | |

Technical Data

Maximum Circuit Values: Grid-No.1-Circuit Resistance

GZ

..... 1 max megohm

The duration of the voltage pulse must not exceed 15 per cent of one horizontal scanning cycle. In a 525-line, 30-frame system, 15 per cent of one horizontal scanning cycle is 10 microseconds.
† An adequate bias resistor or other means is required to protect the tube in the absence of excitation.
■ The dc component must not exceed 100 volts.

SHARP-CUTOFF TETRODE

Glass type used as rf amplifier in dry-battery-operated receivers. Maximum over-all length, 5-1/32 inches; maximum diameter, 1-13/16 inches. Filament volts (dc), 3.3; amperes, 0.132. Characteristics as class Ai amplifier: plate volts, 135 max; grid-No.2 (screen-grid) volts, 67.5 max; grid-No.1 volts, -1.5; plate ma., 3.7; grid-No.2 ma., 1.3; plate resistance, 325000 ohms; transconductance, 500 µmhos. This is a DIS-CONTINUED type listed for reference only.

HALF-WAVE VACUUM RECTIFIER

Novar type used as damper tube in horizontal deflection circuits of blackand-white television receivers employing series-connected heater strings. Outline 17A, OUTLINES SECTION.

Related types: 6BH3, 17BH3

Heater volts (ac/dc), 22.4; amperes, 0.450; warm-up time (average), 11 seconds. Except for heater ratings, this type is identical with novar type 6BH3.



HALF-WAVE VACUUM RECTIFIER

Glass octal type used as damper tube in horizontal-deflection circuits of black-and-white television receivers employing series-connected heater strings. Outline 14F, OUTLINESSEC-



TION. Heater volts (ac/dc), 22.4; amperes, 0.45; warm-up time (average), 11 seconds. Except for heater ratings, this type is identical with glass octal type 6DE4.



BEAM POWER TUBE

Novar type used as horizontaldeflection-amplifier tube in low-B+, black-and-white television receivers employing series-connected heater strings.Outline17A,OUTLINESSEC-


22JG6


TION. Tube requires novar nine-contact socket and may be mounted in any position.

| HEATER VOLTAGE (AC /DC) HEATER CURRENT | 22 0.45 11 | volts ampere seconds |
|--|------------------|----------------------------|
| Grid No.1 to Cathode, Heater, Grid No.2, and Grid No.3 Plate to Cathode, Heater, Grid No.2, and Grid No.3 | 0.7 22 9 | pf pf |

CLASS A1 AMPLIFIER

| | Triode | Pe | ntode | |
|----------------------------------|------------|--------|---------|----------------|
| Characteristics: | Connection | Conn | ection | |
| Plate Voltage | 125 | 50 | 130 | volts |
| Grid No.3 (Suppressor Grid) | Con | nected | to cath | node at socket |
| Grid-No.2 (Screen-Grid) Voltage | | 125 | 125 | volts |
| Grid-No.1 (Control-Grid) Voltage | -20 | 0 | -20 | volts |



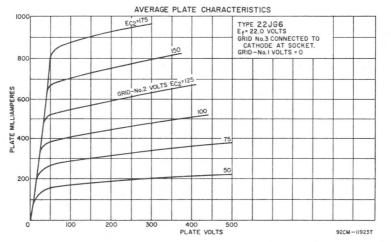


| Amplification Factor | 4.1 | | |
|--|-----|---------|-------|
| Plate Resistance (Approx.) | - | - 12000 | ohms |
| Transconductance | - | - 10000 | μmhos |
| Plate Current | - | 525° 80 | ma |
| Grid-No.2 Current. | - | 32 2.5 | ma |
| Grid-No.1 Voltage (Approx.), for plate current of 1 ma | - | 40 | volts |

HORIZONTAL-DEFLECTION AMPLIFIER

For operation in a 525-line, 30-frame system

Maximum Ratings, (Design-Maximum Values):

| DC PLATE SUPPLY VOLTAGE. | 770 | max | volts |
|--|-------|-----|-------|
| PEAK POSITIVE-PULSE PLATE VOLTAGE ^D | 6500 | max | volts |
| PEAK NEGATIVE-PULSE PLATE VOLTAGE | -1500 | max | volts |
| DC GRID-NO.3 VOLTAGE* | 75 | max | volts |
| DC GRID-NO.2 VOLTAGE. | 220 | max | volts |
| DC GRID-NO.1 VOLTAGE, Negative-bias value | -55 | max | volts |
| PEAK NEGATIVE-PULSE GRID-NO.1 VOLTAGE | -330 | max | volts |
| PEAK CATHODE CURRENT. | 950 | max | ma |
| AVERAGE CATHODE CURRENT. | 275 | max | ma |
| PLATE DISSIPATION † | 17 | max | watts |
| GRID-NO.2 INPUT | 3.5 | max | watts |

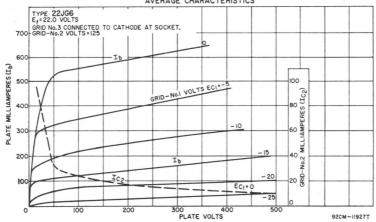

AVERAGE CHARACTERISTICS

| PEAK HEATER-CATHODE VOLTAGE: Heater negative with respect to cathode. Heater positive with respect to cathode. BULB TEMPERATURE (At hottest point). | 200 max 200#max 220 max | volts volts °C |
|---|-------------------------------|----------------------|
| Maximum Circuit Values: | | |
| Grid-No.1-Circuit Resistance: | | |
| For grid-No.1-resistor-bias operation | 2.2 max m | egohms |
| With grid No.2 connected to plate at socket. | | |

• This value can be measured by a method involving a recurrent waveform such that the maximum ratings of the tube will not be exceeded.

[□] The duration of the voltage pulse must not exceed 15 per cent of one horizontal scanning cycle. In a 525-line, 30-frame system, 15 per cent of one horizontal scanning cycle is 10 microseconds.

* In horizontal-deflection-amplifier-service, a positive voltage (typical value, 30 volts) may be applied to grid No.3 to reduce "snivets" interference, which may occur in both vhf and uhf television receivers. † An adequate bias resistor or other means is required to protect the tube in the absence of excitation. # The dc component must not exceed 100 volts.


Р 2 () 1 (

SHARP-CUTOFF TETRODE

Glass type used as rf amplifier or biased detector in ac-operated receivers. Maximum over-all length, 5-1/32 inches; maximum diameter, 1-13/16 inches. Tube requires five-contact socket. Heater volts (ac/dc), 2.5; amperes, 1.75. Typical operation and maximum ratings as class A₁ amplifier: plate volts, 250 (275 max); grid-No.2 volts, 90; grid-No.1 volts, -3; plate re-

24A

sistance, 0.6 megohm; transconductance, 1050 µmhos; plate ma., 4; grid-No.2 ma., 1.7 max. This type is used principally for renewal purposes.



POWER PENTODE

Metal type 25A6 and glass octal type 25A6-GT used in output stage of ac/dc receivers. Outlines 5 and 14C, respectively, OUT-LINES SECTION. Tubes require octal socket. Heater volts (ac/dc), 25; amperes, 0.3. Maximum ratings as class A_1 amplifier: plate volts, 160; grid-No.2 volts, 135; plate dissipation, 5.3 watts; grid-No.2 input, 1.9 watts. These are DISCONTINUED types listed for reference only.

RECTIFIER—POWER PENTODE

Glass octal type used as combined halfwave rectifier and power amplifier. Outline 14C, OUTLINES SECTION. Heater volts (ac/dc), 25; amperes, 0.3. Typical operation of pentode unit as class A_1 amplifier: plate volts and grid-No.2 volts, 100 (117 max); grid-No.1 volts, -15; plate ma., 20.5; grid-No.2 ma., 4; plate resistance, 50000 ohms, transconductance, 1800

25A6 25A6GT

25A7GT

µmhos; load resistance, 4500 ohms; output watts, 0.77. Maximum ratings of rectifier unit: peak inverse plate volts, 350; peak plate ma., 450; dc output ma., 75; peak heater-cathode volts, 175. This is a DISCONTINUED type listed for reference only.



HIGH-MU POWER TRIODE

Glass octal type used in output stage of ac /dc receivers. Outline 14C, OUTLINES SEC-TION. Heater volts (ac/dc), 25; amperes, 0.3. Maximum ratings: plate volts, 180 max; plate dissipation, 10 max watts. This is a DISCON TINUED type listed for reference only.

25AC5GT

RCA Receiving Tube Manual =

BEAM POWER TUBE

Glass octal type used as horizon-25AV5GA tal-deflection amplifier tube in television receivers employing either transformer coupling or direct coupling to the deflecting yoke. Outline 19B, OUT-



LINES SECTION. Heater volts (ac/dc), 25; amperes, 0.3. Except for heater ratings, this type is identical with glass octal type 6AV5-GA.

HALF-WAVE VACUUM RECTIFIER

Related types: 6AX4GT, 6AX4GTB, 12AX4GTA, 12AX4GTB, 17AX4GT, 17AX4GTA

25AX4GT

Related types: 6AV5GA, 12AV5GA

> Glass octal type used as a damper tube in horizontal deflection circuits of television receivers. Outline 14C. OUTLINES SECTION. This type may be supplied with pin No.1 omit-



ted. Heater volts (ac/dc), 25; amperes, 0.3. Except for heater ratings, this type is identical with glass octal type 6AX4-GT.

DIRECT-COUPLED POWER AMPLIFIER

Glass type used as class A1 power amplifier. One triode, the driver, is directly connected within the tube to the second, or output, triode. Heater volts (ac/dc), 25; amperes, 0.3. Maximum ratings and characteristics are the same as for type 25N6-G. Type 25B5 is a DISCON-TINUED type listed for reference only.



TRIODE—PENTODE

Glass octal type used as amplifier. Highmu triode unit and remote-cutoff pentode unit are independent. Outline 14C, OUTLINESSEC-TION. Heater volts (ac/dc), 25; amperes, 0.15. Typical operation of pentode unit as class A1 amplifier: plate and grid-No.2 volts, 100; grid-No.1 volts, -3; plate ma., 7.6; grid-No.2 ma., 2; plate resistance, 185000 ohms; transconduc-




tance, 2000 µmhos. Triode unit: plate volts, 100; grid volts, -1; platema., 0.6; amplification factor, 112; plate resistance, 75000; transconductance, 1500 µmhos. This is a DISCONTINUED type listed for reference only.

POWER PENTODE

Glass octal type used in output stage of ac/dc receivers. Outline 26, OUTLINES SEC-TION. Heater volts (ac/dc), 25; amperes, 0.3. Typical operation as class A1 amplifier: plate volts, 200 max; grid-No.2 volts, 135 max; grid-No.1 volts, -23; plate ma., 62; grid-No.2 ma., 1.8; plate resistance, 18000 ohms; transconductance, 5000 µmhos; load resistance, 2500 ohms; output watts, 7.1. This is a DISCON-TINUED type listed for reference only.

BEAM POWER TUBE

Miniature type used in audio output stages of television and radio receivers. Also used as video amplifier. Outline 8D, OUTLINES SECTION. Heater volts (ac/dc), 25; amperes, 0.3. Except for heater rating, this type is identical with miniature type 6BK5.






25**B8GT**

25B5

25B6G

25BK5 **Related types:** 6BK5, 12BK5



BEAM POWER TUBE

Glass octal types used as horizontal deflection amplifiers in circuits of **25BQ6GTB** television equipment. Outline 15C, **OUTLINES SECTION.** These types may be supplied with pin No.1 omitted. Tubes require octal socket and may be 6BQ6GTB/6CU6, 12BQ6mounted in any position. Heater volts

Related types: GTB/12CU6, 17BQ6GTB

25BQ6GT

(ac/dc), 25; amperes, 0.3. Except for heater rating, these types are identical with glass octal types 6BQ6-GT and 6BQ6-GTB/6CU6, respectively. Type 25BQ6-GT is a DISCONTINUED type listed for reference only.



BEAM POWER TUBE

Miniature type used in the audio output stage of radio receivers. Because of its high power sensitivity and high efficiency at low plate and screengrid voltages, it is capable of provid-

Related type 50C5

ing a relatively high power output. Outline 7C, OUTLINES SECTION. Tube requires miniature seven-contact socket and may be mounted in any position. Heater volts (ac/dc), 25; amperes, 0.3. Except for heater ratings, this type is identical with miniature type 50C5.



K333

HC2

N

Go

BEAM POWER TUBE

Glass octal type used as output amplifier. Outline 26, OUTLINES SECTION. Heater volts (ac/dc), 25; amperes, 0.3. Refer to type 6Y6-G for typical operation as a class A1 amplifier. Type 25C6-G is a DISCONTINUED type listed for reference only.

BEAM POWER TUBE

Miniature type used in audio-output stage of radio and television receivers. Outline 7C, OUTLINES SEC-TION. Heater volts (ac/dc), 25; amperes, 0.3. Except for heater ratings, this type is identical with miniature type 12CA5.

BEAM POWER TUBE

Glass octal types used as horizontal deflection amplifiers in television receivers employing seriesconnected heater strings. Type 25CD6-GB, Outline 25A, OUTLINES SEC-



TION. Heater volts (ac/dc), 25; amperes, 0.6; warm-up time (average), 11 seconds. Except for heater ratings, these types are identical with glass octal types 6CD6-G and 6CD6-GA, respectively. Type 25CD6-GA is a DISCONTINUED type listed for reference only.

Refer to type 25BQ6GTB/25CU6

25CU6




25C6G

Characteristics

BEAM POWER TUBE

Glass octal type used as horizontal deflection amplifier in television receivers employing series-connected heater strings. Outline, 25A, OUT-LINES SECTION. Tube requires



| Heater Voltage (AC/DC) | 25 | volts |
|---|--------------|---------|
| HEATER CURRENT | 0.6 | ampere |
| HEATER WARM-UP TIME (Average) | 11 | seconds |
| PLATE RESISTANCE (Approx.) [†] | 4000 | ohms |
| TRANSCONDUCTANCE [†] | 9000 | μmhos |
| MU-FACTOR,† Grid No.2 to Grid No.1 | 4.35 | |
| † For plate and grid-No.2 volts, 125; grid-No.1 volts, -18; plate ma., 70; grid-N | o.2 ma., 6.3 | 3. |

HORIZONTAL DEFLECTION AMPLIFIER

For operation in a 525-line, 30-frame system

Maximum Ratings, (Design-Center Values):

| DC PLATE VOLTAGE. | 700 max | volts |
|---|---------------------|-------|
| PEAK POSITIVE-PULSE PLATE VOLTAGE# (Absolute Maximum) | $6600 \square max$ | volts |
| PEAK NEGATIVE-PULSE PLATE VOLTAGE | -1500 max | volts |
| DC GRID-NO.2 (SCREEN-GRID) VOLTAGE | 175 max | volts |
| PEAK NEGATIVE-PULSE GRID-NO.1 (CONTROL-GRID) VOLTAGE | -200 max | volts |
| PEAK CATHODE CURRENT | 700 max | ma |
| AVERAGE CATHODE CURRENT. | 200 max | ma |
| GRID-NO.2 INPUT | 3 max | watts |
| PLATE DISSIPATION [†] | 15 max | watts |
| PEAK HEATER-CATHODE VOLTAGE: | | |
| Heater negative with respect to cathode | 200 max | volts |
| Heater positive with respect to cathode | 200 max | volts |
| BULB TEMPERATURE (At hottest point) | 225 max | °C |
| Maximum Circuit Value: | | |

Grid-No.1-Circuit Resistance...

25EC6

25DN6

0.47 max megohm # The duration of the voltage pulse must not exceed 15 per cent of one horizontal scanning cycle. In a 525-line, 30-frame system, 15 per cent of one horizontal scanning cycle is 10 microseconds.

^D Under no circumstances should this absolute value be exceeded.

† An adequate bias resistor or other means is required to protect the tube in the absence of excitation. The dc component must not exceed 100 volts.

BEAM POWER TUBE

Glass octal type used as horizontal deflection amplifier in television receivers employing series-connected heater strings. Outline 25A, OUT-LINES SECTION, except vertical dimensions are 1/4 inch shorter. Tube requires octal socket and may be operated in any position.

| f | AC (4) | 10 | GI |
|-------------------|--------|----|------|
| с ₃ (3 | < _ | LP | 10NC |
| •30 | | 7 | |
| нS | V | Y | DH |
| | NC | 0 | |
| | | | 6 |

| HEATER VOLTAGE (AC/DC) | 25 | volts |
|--|-----|---------|
| HEATER CURRENT. | 0.6 | ampere |
| WARM-UP TIME (AVERAGE) | 11 | seconds |
| DIRECT INTERELECTRODE CAPACITANCES: | | |
| Grid No.1 to Plate | 0.6 | pf |
| Grid No.1 to Cathode, Heater, Grid No.3, and Grid No.2 | 24 | pf |
| Plate to Cathode, Heater, Grid No.3, and Grid No.2 | 10 | pf |

CLASS A1 AMPLIFIER

| Plate Voltage | 60 | 135 | volts |
|----------------------------------|-----|-------|-------|
| Grid-No.2 (Screen-Grid) Voltage | 135 | 135 | volts |
| Grid-No.1 (Control-Grid) Voltage | 0 | -22.5 | volts |
| Triode Amplification Factor | - | 3.8 | |
| | | | |



a

G3G

H(2

NC

| Plate Resistance (Approx.) | - | 4700 | ohms |
|---|-----|------|-------|
| Transconductance | - | 7500 | μmhos |
| Plate Current | 350 | 70 | ma |
| Grid-No.2 Current. | 40 | 4.5 | ma |
| Grid-No.1 Voltage (Approx.) for plate current of 1 ma | - | -42 | volts |

HORIZONTAL-DEFLECTION AMPLIFIER

For operation in a 525-line, 30-frame system

Maximum Ratings, (Design-Maximum Values):

| DC PLATE SUPPLY VOLTAGE. | 700 max | volts |
|--|--------------|-------|
| PEAK POSITIVE-PULSE PLATE VOLTAGE [®] | $7000 \ max$ | volts |
| PEAK NEGATIVE-PULSE PLATE VOLTAGE | -1500 max | volts |
| DC GRID-NO.2 VOLTAGE | 175 max | volts |
| PEAK NEGATIVE-PULSE GRID-NO.1 VOLTAGE | -300 max | volts |
| PEAK CATHODE CURRENT. | 700 max | ma |
| AVERAGE CATHODE CURRENT. | 200 max | ma |
| GRID-NO.2 INPUT | 4 max | watts |
| PLATE_DISSIPATION ^D | 10 max | watts |
| PEAK HEATER-CATHODE VOLTAGE: | | - |
| Heater negative with respect to cathode | 200 max | volts |
| Heater positive with respect to cathode | 200*max | volts |
| BULB TEMPERATURE (At hottest point) | 225 max | °C |
| | | |
| | | |

Maximum Circuit Values:

Grid-No.1-Circuit Resistance:

 This rating is applicable where the duration of the voltage pulse does not exceed 15 per cent of the horizontal scanning cycle. In a 525-line, 30-frame system, 15 per cent of the horizontal scanning cycle is 10 microseconds.

[□] An adequate bias resistor or other means is required to protect the tube in the absence of excitation.

* The dc component must not exceed 100 volts.

Maximum Ratings, (Design-Maximum Values);



POWER PENTODE

Miniature type used in the audio output stage of radio and television receivers and in phonographs. Outline 7C, OUTLINES SECTION. Heater volts (ac/dc), 25; amperes, 0.3. Except for heater rating, this type is identical with miniature type 6EH5.

BEAM POWER TUBE

Miniature type used in audio-output stage of ac/dc radio receivers employing series-connected heater strings. Outline 7C, OUTLINES SECTION. Tube requires miniature seven-contact socket and may be mounted in any position.

| HEATER VOLTAGE (AC/DC) HEATER CURRENT. HEATER WARM-UP TIME (AVERAGE) | $\begin{smallmatrix}&25\\0.15\\17\end{smallmatrix}$ | volts ampere seconds |
|--|---|----------------------------|
| DIRECT INTERELECTRODE CAPACITANCES (Approx.): | | |
| Grid No.1 to Plate | 0.44 | pf |
| Grid No.1 to Cathode, Heater, Grid No.2, and Grid No.3 | 12 | pf |
| Plate to Cathode, Heater, Grid No.2, and Grid No.3 | 8 | pf |

CLASS A1 AMPLIFIER

| PLATE VOLTAGE. | 150 | max | volts |
|---|-----|-----|-------|
| GRID-NO.2 (SCREEN-GRID) VOLTAGE | 130 | | volts |
| GRID-NO.1 (CONTROL-GRID) VOLTAGE, Positive-bias value | | max | volts |
| PLATE DISSIPATION | 5.5 | | watts |
| GRID-NO.2 INPUT | 1.1 | max | watts |

25EH5

Related types:


6EH5, 12EH5, 50EH5

25F5A

= RCA Receiving Tube Manual ==


| PEAK HEATER-CATHODE VOLTAGE: Heater negative with respect to cathode Heater positive with respect to cathode BULB TEMPERATURE (At hottest point) | 200 max 200 = max 220 max | volts volts °C |
|--|--|--|
| Typical Operation and Characteristics: Plate Voltage. Grid-No.2 Voltage. Grid-No.1 Voltage. Peak AF Grid-No.1 Voltage. Plate Resistance (Approx.). Transconductance. Zero-Signal Plate Current. Maximum-Signal Grid-No.2 Current. Maximum-Signal Grid-No.2 Current. Effective Load Resistance. Total Harmonic Distortion. Maximum-Signal Power Output. | $110 \\ 110 \\ -7.5 \\ 7.5 \\ 13000 \\ 6400 \\ 43 \\ 45 \\ 3.8 \\ 7.3 \\ 2500 \\ 7 \\ 1.5 $ | volts volts volts ohms ma ma ma ohms per cent watts |
| Maximum Circuit Values: Grid-No.1-Circuit Resistance: For fixed-bias operation For cathode-bias operation PUSH-PULL CLASS AB ₁ AMPLIFIER Maximum Ratings: (Same as for Class AB ₁ amplifier) | 0.1 max 0.5 max | megohm megohm |
| Typical Operation (Values are for two tubes): Plate Voltage. Grid-No.2 Voltage. Grid-No.1 Voltage. Peak AF Grid-No.1-to-Grid-No.1 Voltage. Zero-Signal Plate Current. Maximum-Signal Plate Current. Zero-Signal Grid-No.2 Current. Effective Load Resistance (Plate-to-plate). Total Harmonic Distortion. Maximum-Signal Power Output. | $ \begin{array}{c} 110\\ -8\\ 14.4\\ 82\\ 88\\ 7.2\\ 12.5\\ 4500\\ 2.6\\ 2.9\\ \end{array} $ | volts volts volts ma ma ma ohms per cent watts |
| Maximum Circuit Values: Grid-No.1 Circuit Resistance: For fixed-bias operation For cathode-bias operation | 0.1 max 0.5 max | megohm megohm |

The dc component must not exceed 100 volts.

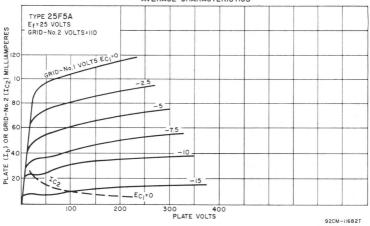

AVERAGE CHARACTERISTICS

92CM-11682T



BEAM POWER TUBE

Metal type 25L6 and glass octal type 25L6-GT used in output stage of ac/dc receivers. Outlines 5 and 14C, respectively, OUTLINES SECTION. These tubes require octal sockets and

may be mounted in any position. Type 25L6-GT may be supplied with pin No.1 omitted. Heater volts (ac/dc), 25; amperes, 0.3. For maximum ratings and typical operation, refer to type 50L6-GT. Refer to miniature type 50C5 for curves, installation, and application information, but take into consideration the differences in heater ratings. Type 25L6 is used principally for renewal purposes.



DIRECT-COUPLED TWIN POWER AMPLIFIER

Glass octal type used as class A1 power amplifier. Heater volts (ac/dc), 25; amperes, 0.3. Characteristics as class A1 amplifier-input triode: plate volts, 100 (180 max); grid volts, 0; peak af grid volts, 29.7; plate ma., 5.8. Output triode: plate volts, 180 max; plate ma., 46; load resistance, 4000 ohms; output watts, 3.8. This is a DISCONTINUED type listed for reference only.

HALF-WAVE VACUUM RECTIFIER

Glass octal type used as damper tube in magnetic-deflection circuits of television receivers. Outline 14C, OUTLINES SECTION. This type may be supplied with pin No.1 omitted. Tube requires octal socket and may be mounted in any position. It is especially important that this tube, like other power-handling tubes, be adequately ventilated. Heater volts (ac/dc) 25: amperes, 0.3. This type is used principally for renewal purposes.

DAMPER SERVICE

Maximum Ratings, (Design-Center Values):

| r or operation in a 525-line, 30-frame system | | |
|--|-----------------------|-------|
| PEAK INVERSE PLATE VOLTAGE# (Absolute Maximum) | 3850 ^m max | volts |
| PEAK PLATE CURRENT. | 750 max | ma |
| DC PLATE CURRENT. | 125 max | ma |
| PLATE DISSIPATION | 3.5 max | watts |
| PEAK HEATER-CATHODE VOLTAGE: | | |
| Heater negative with respect to cathode (Absolute Maximum) | 500 ■ max | volts |
| Heater positive with respect to cathode | 200 ⁴ max | volts |

The duration of the voltage pulse must not exceed 15 per cent of one horizontal scanning cycle. In a 525-line, 30-frame system, 15 per cent of one horizontal scanning cycle is 10 microseconds.

Under no circumstances should this absolute maximum value be exceeded.

* The dc component must not exceed 100 volts.

VACUUM RECTIFIER-DOUBLER

6

Glass type used as half-wave rectifier or voltage doubler in ac/dc receivers. Maximum dimensions: over-all length, 4-3 /16 inches; seated height, 3-9/16 inches: diameter, 1-9/16 inches, Heater volts (ac/dc), 25; amperes, 0.3. Maximum ratings: peak inverse plate volts, 700; peak plate ma. per plate, 450; peak heater-cathode volts, 350; dc output ma. per plate, 75. This is a DISCONTINUED typelisted for reference only.

25Y5



25N6G

25L6

25L6GT

Related types:

12L6GT, 50L6GT

25W4GT

RCA Receiving Tube Manual =


VACUUM RECTIFIER-DOUBLER

Glass type used as half-wave rectifier or voltage doubler in ac/dc receivers. Maximum dimensions: over-all length, 4-3/16 inches; seated height, 3-9/16 inches; diameter, 1-9/16 inches. Tube requires six-contact socket and may be mounted in any position. Heater volts (ac/dc), 25; amperes, 0.3. This type is electrically identical with metal type 25Z6. Type 25Z5 is used principally for renewal purposes.



VACUUM RECTIFIER-DOUBLER

Metal type 25Z6 and glass octal type 25Z6-GT used as half-wave rectifiers or voltagedoublers in ac/dc receivers, particularly "transformerless" receivers. Outlines 5 and 14C, respectively, OUTLINES SECTION. Type 25Z6-GT may be supplied with pin No.1 omitted. Tubes require octal socket. Heater volts (ac/dc), 25; amperes, 0.3. Maximum ratings for halfwave rectifier or voltage-doubler service: peak



inverse plate volts, 700 max; peak plate ma. (per plate), 450 max; dc output ma. (per plate), 75 max; peak heater-cathode volts, 350 max. Typical operation as half-wave rectifier with filter-input capacitor of 16 μ f: ac plate-supply volts per plate (rms), 235; minimum total effective plate-supply impedance per plate, 100 ohms; dc output ma. per plate, 75; dc output volts at input to filter, 255 (at half-load current of 75 ma.), 200 (at full-load current of 150 ma.); voltage regulation, 55 volts. Typical operation as voltage doubler: ac plate-supply volts per plate (rms), 117; filter-input capacitor, 16 μ f; minimum total effective plate-supply impedance per plate, 30 ohms (half-wave), 15 ohms (full-wave); dc output ma., 75. Type 25Z6 is a DISCONTINUED type listed for reference only. Type 25Z6-GT is used principally for renewal purposes.

MEDIUM-MU TRIODE

Glass type used as rf voltage amplifier in ac-operated receivers. Outline 27, OUTLINES SECTION. Tube requires four-contact socket. Filament volts (ac/dc), 1.5; amperes, 1.05. Typical operation as class A₁ amplifier: plate volts, 180 max; grid volts, -14.5, plate ma., 6.2; plate resistance, 7300 ohms; transconductance, 1150 µmhos; amplification factor, 8.3. This is a DIS-CONTINUED type listed for reference only.



LOW-MU TRIODE

Glass type used as voltage amplifier or detectorin ac-operated receivers. Tube requires fivecontact socket. Heater volts (ac/dc), 2.5; amperes, 1.75. Maximum ratings and characteristics as class A₁ amplification factor, 9: plate resistance, 9250 ohms; transconductance, 975 μ mhos; plate ma., 5.2. This type is used principally for renewal purposes.

MEDIUM-MU TRIODE Glass type used as voltage amplifier or detector in battery-operated receivers. Tube requires

four-contact socket. Filament volts (dc), 2.0; amperes, 0.06. Except for interelectrode capacitances, this type is electrically identical with glass-octal type 1H4-G. Type 30 is a DISCON-TINUED type listed for reference only.



.....

26

25Z5

25Z6

25Z6GT





G2

Maximum Patings (Design Maximum Values):



Glass type used in output stage of batteryoperated receivers. Tube requires four-contact socket. Filament volts (dc), 2.0; amperes, 0.13. Typical operation as class A₁ amplifier: plate volts, 180 max; grid volts, -30; plate ma., 12.3; plate resistance, 3600 ohms; amplification factor, 3.8; transconductance, 1050 µmhos; load resistance, 5700 ohms; output watts, 0.375. This is a DISCONTINUED type listed for reference only.

SHARP-CUTOFF TETRODE

Glass type used as rf amplifier or biased detector in battery-operated receivers. Maximum over-all length, 5-1/32 inches; maximum diameter, 1-13/16 inches. Tube requires fourcontact socket. Filament volts (dc), 2.0; amperes, 0.06. Typical operation as class A₁ amplifier: plate volts, 180 maz; grid-No.2 ma., 0.4 maz; plate resistance, greater than 1 megohm; plate ma., 1.7; transconductance, 650 µmhos. This is a DISCONTINUED type listed for reference only.

POWER PENTODE

Miniature type used in audio output stage of compact ac/dc radio receivers. Outline 7C, OUTLINES SECTION. Tube requires miniature seven contact socket and may be mounted in any position. Heater volts (ac/dc), 32; amperes, 0.1; warm-up time (average) for type 32ET5A, 20 seconds.

32ET5 32ET5A


CLASS A1 AMPLIFIER

| Maximum Ratings, (Design-Maximum Values): | | |
|---|---------|------------|
| PLATE VOLTAGE | 150 max | volts |
| GRID-NO.2 (SCREEN-GRID) VOLTAGE. | 130 max | volts |
| GRID-NO.2 INPUT | 1.2 max | watts |
| PLATE DISSIPATION. | 5.4 max | watts |
| PEAK HEATER-CATHODE VOLTAGE: | | |
| Heater negative with respect to cathode | 200 max | volts |
| Heater positive with respect to cathode | 200 max | volts |
| Typical Operation and Characteristics: | | |
| Plate Voltage | 110 | volts |
| Grid-No.2 Voltage | 110 | volts |
| Grid-No.1 (Control-Grid) Voltage | -7.5 | volts |
| Peak AF Grid-No.1 Voltage | 7.5 | volts |
| Zero-Signal Plate Current. | 30 | ma |
| Zero-Signal Grid-No.2 Current. | 2.8 | ma |
| Plate Resistance (Approx.) | 21500 | ohms |
| Transconductance | 5500 | μ mhos |
| Load Resistance | 2800 | ohms |
| Total Harmonic Distortion | 10 | per cent |
| Maximum-Signal Power Output | 1.2 | watts |
| Maximum Circuit Values: | | |
| Grid-No.1-Circuit Resistance: | | |
| For fixed-bias operation | 0.1 max | megohm |
| For cathode-bias operation | 0.5 max | megohm |
| The dc component must not exceed 100 volts. | | _ |
| | | |

32

RECTIFIER—BEAM POWER TUBE


Glass octal type used as combined halfwave rectifier and output amplifier in ac/dc receivers. Outline 15A, OUTLINES SECTION. Tube requires octal socket. Heater volts (ac/dc), 32.5; amperes, 0.3. Maximum ratings for rectifier unit: ac plate volts (rms), 125; dc output ma., 60. Typical operation of beam power unit as class A, amplifier: plate and grid-No.2 volts,



90; grid-No.1 volts, -7; plate ma., 27; grid-No.2 ma., 2; plate resistance, 17000 ohms; transconductance, 4800 µmhos; load resistance, 2600 ohms; maximum-signal output watts, 1.0. This is a DISCONTINUED type listed for reference only.

POWER PENTODE

Glass type used in output stage of batteryoperated receivers. Outline 26, OUTLINES SECTION. Tube requires five-contact socket. Filament volts (dc), 2.0; amperes, 0.26. Typical operation as class A₁ amplifier: plate and grid-No.2 volts, 180 max; grid-No.1 volts, -18; plate ma., 22; grid-No.2 ma., 5; plate resistance, 55000 ohms; transconductance, 1750 μ mhos;



load resistance, 6000 ohms; output watts, 1.4. This is a DISCONTINUED type listed for reference only.

REMOTE-CUTOFF PENTODE


Glass type used as rf or if amplifier in battery-operated radio receivers, particularly those employing avc. Maximum over-all length, 5-1/32 inches; maximum diameter, 1-13/16 inches. Tube requires four-contact socket. Filament volts (dc), 2.0; amperes, 0.06. Characteristics as class A1 amplifier: plate volts, 180 max; grid-No.2 volts, 67.5 max; grid-No.1 volts, -3



min; plate ma., 2.8; grid-No.2 ma., 1.0; plate resistance, 1.0 megohm; transconductance, 620 μ mhos. This is a DISCONTINUED type listed for reference only.

BEAM POWER TUBE

Miniature types used in audio output stages of compact ac/dc radio receivers. Outline 7C, OUTLINES SEC-TION. Tubes require miniature sevencontact socket and may be operated in any position.



| HEATER VOLTAGE (AC/DC) HEATER CURRENT | $ \begin{array}{c} 34 \\ 0.1 \end{array} $ | volts ampere |
|--|--|-----------------|
| HEATER WARM-UP TIME (AVERAGE) for 34GD5-A | 20 | seconds |
| DIRECT INTERELECTRODE CAPACITANCES (Approx.): | | |
| Grid No.1 to Plate | 0.6 | pf |
| Grid No.1 to Cathode, Heater, Grid No.2, and Grid No.3 | 12 | pf |
| Plate to Cathode, Heater, Grid No.2, and Grid No.3: | | P - |
| For 34GD5 | 6 | pf |
| For 34GD5-A | 9 | pf |

CLASS A1 AMPLIFIER

Maximum Ratings, (Design-Maximum Values):

| PLATE VOLTAGE GRID-NO.2 (SCREEN-GRID) VOLTAGE. | 150 max 130 max | volts |
|---|--------------------|-------|
| GRID-NO.1 (CONTROL-GRID) VOLTAGE: | 100 max | VOICS |
| Negative-bias value | 50 max | volts |
| Positive-bias value | 0 max | volts |
| GRID-NO.2 INPUT. | 1.1 max | watts |
| PLATE DISSIPATION PEAK HEATER-CATHODE VOLTAGE: | 5 max | watts |
| Heater negative with respect to cathode | 200 max | volts |
| Heater positive with respect to cathode | 200 max | volts |
| BULB TEMPERATURE (At hottest point): | 200-max | voits |
| For 34GD5 | 180 max | °C |
| For 34GD5-A | 250 max | °Č |

33

32L7GT

34

34GD5

34GD5A


Typical Operation and Characteristics:

| Plate Voltage | 110 | volts |
|--------------------------------|-------|------------|
| Grid-No.2 Voltage | 110 | volts |
| Grid-No.1 Voltage | -7.5 | volts |
| Peak AF Grid-No.1 Voltage | 7.5 | volts |
| Zero-Signal Plate Current | 35 | ma |
| Zero-Signal Grid-No.2 Current. | 3 | ma |
| Plate Resistance (Approx.) | 13000 | ohms |
| Transconductance | 5700 | μ mhos |
| Load Resistance | 2500 | ohms |
| Total Harmonic Distortion | 10 | per cent |
| Maximum-Signal Power Output | 1.4 | watts |
| Maximum Circuit Values | | |

Maximum Circuit Values:


| Grid-No.1-Circuit Resistance: | |
|-------------------------------|----------------|
| For fixed-bias operation | 0.1 max megohm |
| For cathode-bias operation | 0.5 max megohm |
| | |

The dc component must not exceed 100 volts.

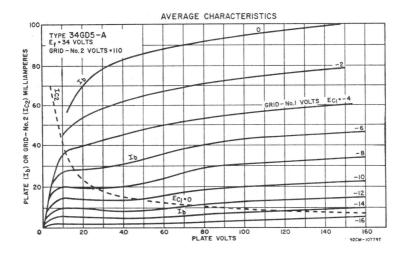

REMOTE-CUTOFF TETRODE

Glass type used as rf or if amplifier in ac receivers. Maximum over-all length, 5-1/32 inches; maximum diameter, 1-13/16 inches. Tube requires five-contact socket. Heater volts (ac/dc); 2.5; amperes, 1.75. Characteristics as class A1 amplifier: plate volts, 250 (275 max); (1) (5) H grid-No.2 volts, 90 max; grid-No.1 volts, -3 min; plate ma., 6.5; grid-No.2 ma., 2.5; trans-conductance, 1050 µmhos. This is a DISCONTINUED type listed for reference only.



G2

PCZ

BEAM POWER TUBE

Glass lock-in type used in output stage of ac /dc receivers. Outline 13B, OUTLINES SEC-TION. Tube requires lock-in socket. Heater volts (ac/dc), 35; amperes, 0.15. For maximum ratings and typical operation, refer to glass octal type 35L6-GT. Type 35A5 is used principally for renewal purposes.

.

35A5

BEAM POWER TUBE

Miniature type used in output stage of compact, ac/dc radio receivers. Because of its high power sensitivity at plate and screen-grid voltages available in ac/dc receivers, it is capable of pro-



viding a relatively high power output. Outline 7C, OUTLINES SECTION. Tube requires miniature seven-contact socket and may be mounted in any position. Within its maximum ratings, type 35B5 is equivalent in performance to glass-octal type 35L6-GT, and miniature type 35C5. Refer to type 35C5 for typical operation, maximum circuit values, installation, application information, and curves.

| HEATER VOLTAGE (AC/DC) HEATER CURRENT DIRECT INTERELECTRODE CAPACITANCES (Approx.): | $\begin{array}{c} 35\\ 0.15\end{array}$ | volts ampere |
|--|---|-----------------|
| Grid No.1 to Plate | 0.6 | pf |
| Grid No.1 to Cathode, Heater, Grid No.2, and Grid No.3 Plate to Cathode, Heater, Grid No.2, and Grid No.3 | 12 | pf pf pf |

CLASS A1 AMPLIFIER

| Maximum Ratings, (Design-Center Values): | | |
|--|---------|-------|
| PLATE VOLTAGE | 117 max | volts |
| GRID-NO.2 (SCREEN-GRID) VOLTAGE | | |
| PLATE DISSIPATION | 4.5 max | watts |
| GRID-NO.2 INPUT | 1.0 max | watt |
| PEAK HEATER-CATHODE VOLTAGE: | | |
| Heater negative with respect to cathode | 150 max | volts |
| Heater positive with respect to cathode | 150 max | volts |
| | | |

BEAM POWER TUBE

35C5

35B5

Miniature type used in output stage of compact, ac/dc radio receivers. Because of its high power sensitivity and high efficiency at plate and screengrid voltages available in ac/dc receivers, the 35C5 is capable of providing a relatively high power output. Except




for terminal connections and slightly higher ratings, type 35C5 is equivalent in performance to miniature type 35B5 and, within its maximum ratings, to glass octal type 35L6-GT. The basing arrangement of the 35C5 simplifies the problem of meeting Underwriters' Laboratories requirements in the design of ac/dc receivers.

| Heater Voltage (ac/dc). Heater Current. Direct Interelectrode Capacitances (Approx.): | 35 0.15 | volts ampere |
|--|---|---|
| Grid No.1 to Plate Grid No.1 to Cathode, Heater, Grid No.2, and Grid No.3 Plate to Cathode, Heater, Grid No.2, and Grid No.3 | 0.6 12 9 | pf pf |
| CLASS A1 AMPLIFIER | | |
| Maximum Ratings, (Design-Maximum Values): | | |
| PLATE VOLTAGE GRID-NO.2 (SCREEN-GRID) VOLTAGE PLATE DISSIPATION GRID-NO.2 INPUT PEAK HEATER-CATHODE VOLTAGE: | 150 max 130 max 5.2 max 1.1 max | volts volts watts watt |
| Heater negative with respect to cathode. Heater positive with respect to cathode. BULB TEMPERATURE (At hottest point). | 200 max 200∎max 250 max | volts volts °C |
| Typical Operation: | | |
| Plate Voltage . Grid-No.2 Voltage . Grid-No.1 (Control-Grid) Voltage . Peak AF Grid-No.1 Voltage . Zero-Signal Plate Current . Maximum-Signal Plate Current . Maximum-Signal Grid-No.2 Current . Maximum-Signal Grid-No.2 Current . | $ \begin{array}{c} 110\\ 110\\ -7.5\\ 7.5\\ 40\\ 41\\ 3\\ 7 \end{array} $ | volts volts volts ma ma ma |

| Plate Resistance (Approx.) 1 Transconductance. 1 Load Resistance. 1 Total Harmonic Distortion. 1 Maximum-Signal Power Output. 1 | 5800 2500 10 | ohms µmhos ohms per cent watts |
|---|--------------------|--|
| Maximum Circuit Values: Grid-No.1-Circuit Resistance: For fixed-bias operation For cathode-bias operation | | megohm megohm |

Technical Data


e dc component must not exceed 100 volts.

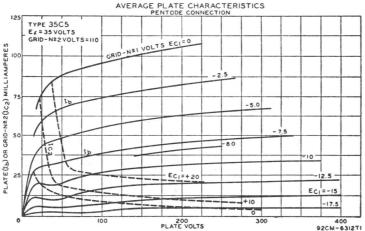

INSTALLATION AND APPLICATION

Type 35C5 requires miniature seven-contact socket and may be mounted in any position. Outline 7C, OUTLINES SECTION. It is especially important that this tube, like other power-handling tubes, should be adequately ventilated.

The 35-volt heater is designed to operate under the normal conditions of linevoltage variation without materially affecting the performance or serviceability of the 35C5. For operation of the 35C5 in series with other types having 0.15ampere rating, the current in the heater circuit should be adjusted to 0.15 ampere for the normal supply voltage.



HIGH-MU TRIODE-POWER PENTODE

Miniature type used as two-stage af amplifier where plate supply voltage is obtained from single half-wave rectifier connected directly to 120-volt ac line. Outline 8E, OUTLINES SEC-

35DZ8

TION, except maximum vertical dimensions are 1/16 inch greater than shown. Tube requires miniature nine-contact socket and may be operated in any position. Heater volts (ac/dc), 35; amperes, 0.15.

CLASS A, AMPLIFIER

| Triode Unit | Pentode Unit | |
|----------------|--------------------------------------|---|
| 150 max | 150 max | volts |
| - | 135 max | volts |
| 5 max | 60 max | ma |
| 0.75 max | 6.5 max | watts |
| - | 1.5 max | watts |
| | Unit 150 max 5 max 0.75 max | Unit Unit 150 max 150 max - 135 max 5 max 60 max 0.75 max 6.5 max |

| PEAK HEATER-CATHODE VOLTAGE: Heater negative with respect to cathode Heater positive with respect to cathode | Triode Unit 200 max 200°max | Pentode Unit 200 max 200°max | volts volts |
|--|--------------------------------------|---------------------------------------|----------------|
| Typical Operation and Characteristics: | | | |
| Plate Supply Voltage | 120 | 145 | volts |
| Grid-No.2 Supply Voltage. | - | 120 | volts |
| Cathode-Bias Resistor | 1500 | 180 | ohms |
| Amplification Factor | 100 | - | |
| Plate Current | 0.8 | 45 | ma |
| Grid-No.2 Current | - | 6 | ma |
| Transconductance | 1400 | 7500 | μhmos |
| Load Resistance. | | 2500 | ohms |
| Power Output. | - | 2 | watts |
| Grid Voltage (Approx.), for plate current of 20 µa | -2.5 | - | volts |
| Maximum Circuit Values: | | | |
| | ~ | 0 5 | 1 |

0.5 max megohms

POWER PENTODE

35EH5

Miniature type used in the audio output stage of radio and television receivers and in phonographs. This type has unusually high power sensitivity and is capable of providing relatively



high power output at low plate and screen-grid voltages with a low af grid-No.1 driving voltage. Outline 7C, OUTLINES SECTION. Tube requires miniature seven-contact socket and may be mounted in any position.


| HEATER VOLTAGE (AC/DC) | $35 \\ 0.15$ | volts amperes |
|--|--------------------|-------------------|
| DIRECT INTERELECTRODE CAPACITANCES (Approx.): | | |
| Grid No.1 to Plate Grid No.1 to Cathode, Heater, Grid No.2, and Grid No.3 | 0.65 | pf |
| Grid No.1 to Cathode, Heater, Grid No.2, and Grid No.3 | $17 \\ 9$ | pf pf |
| CLASS A1 AMPLIFIER | | |
| Maximum Ratings, (Design-Maximum Values): | | |
| | 150 | 14 |
| PLATE VOLTAGE | 150 max 130 max | volts |
| GRID-NO.2 (SCREEN-GRID) VOLTAGE, Positive-bias value | 130 max 0 max | volts |
| PLATE DISSIPATION. | 5 max | volts |
| GRID-NO.2 INPUT | 1.75 max | watts |
| | 1.10 max | watts |
| PEAK HEATER-CATHODE VOLTAGE: | | |
| Heater negative with respect to cathode | 200 max | volts |
| Heater positive with respect to cathode | 200 max | volts |
| BULB TEMPERATURE (At hottest point) | 225 max | °C |
| | | |
| Typical Operation: | | |
| Plate Supply Voltage | 110 | volts |
| Grid-No.2 Supply Voltage | 115 | volts |
| Cathode-Bias Resistor | 62 | ohms |
| Peak AF Grid-No.1 Voltage | 3 | volts |
| Zero-Signal Plate Current. | 32 | ma |
| Maximum-Signal Plate Current. | 32 | ma |
| Zero-Signal Grid-No.2 Current. | 7.2 | ma |
| Maximum-Signal Grid-No.2 Current. | 12 | ma |
| Plate Resistance (Approx.) | 14000 | ohms |
| Transconductance | 3000 | μ mhos |
| Load Resistance | 3000 | ohms |
| Maximum-Signal Power Output. | 1.2 | per cent watts |
| Maximum-Signal Fower Output. | 1.4 | watts |
| Maximum Circuit Values: | | |
| Grid-No.1-Circuit Resistance: | | |
| For fixed-bias operation | 0.1 max | megohm |
| For cathode-bias operation | 0.5 max | megohm |
| | | Bounn |

The dc component must not exceed 100 volts.

Technical Data

In a series-heater circuit of the "dc power line" type employing several 0.15ampere types and one or two 35C5s, the heater(s) of the 35C5(s) should be placed on the positive side of the line. Under these conditions, heater-cathode voltage of the 35C5 must not exceed the value given under maximum ratings. In a seriesheater circuit of the "universal" type employing rectifier tube 35W4, one or two 35C5s and several 0.15-ampere types, it is recommended that the heater(s) of the 35C5(s) be placed in the circuit so that the higher values of heater-cathode bias will be impressed on the 35C5(s) rather than on the other 0.15-ampere types. This is accomplished by arranging the 35C5(s) on the side of the supply line which is connected to the cathode of the rectifier, i.e., the positive terminal of the rectified voltage supply. Between this side of the line and the 35C5(s), any necessary auxiliary resistance and the heater of the 35W4 are connected in series.

As a power amplifier (class A_1), the 35C5 is recommended for use either singly or in push-pull combination in the power-output stage of ac/dc receivers. The operating values shown under typical operation have been determined on the basis that grid-No.1 current does not flow during any part of the input cycle.

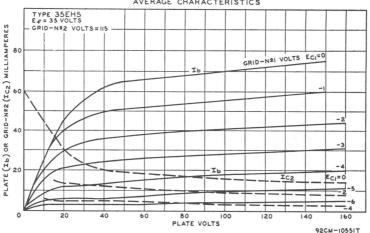





BEAM POWER TUBE

Miniature type used in af poweroutput stage of radio receivers. Outline 7C, OUTLINES SECTION.Tube has heater tap which may be used for operating a 6.3-volt, 150-ma. panel

35GL6

lamp in equipment using semiconductor rectifiers. For dc output currents greater than 70 ma., a resistor shunting the panel lamp is required. Tube requires miniature seven-contact socket and may be operated in any position.

| HELERE Vorman (10/20). | Without Panel Lamp | With No.40 or 47 Panel Lamp | |
|-----------------------------------|--------------------------|-----------------------------------|--------|
| HEATER VOLTAGE (AC/DC): | 0.5 | 00 | |
| ENTIRE HEATER (PINS 3 AND 4) | 35 | 32 | volts |
| PANEL LAMP SECTION (PINS 4 AND 6) | 7 | 5.5 | volts |
| HEATER CURRENT: | | | |
| Between Pins 3 and 4 | 0.15 | - | ampere |
| Between Pins 3 and 6 | _ | 0.15 | ampere |
| | | | 457 |

= RCA Receiving Tube Manual =

CLASS A1 AMPLIFIER

| Maximum Ratings, (Design-Maximum Values): | |
|--|--|
| RMS HEATER-TAP VOLTAGE, when panel lamp fails. 14 max PLATE VOLTAGE. 150 max GRID-NO.2 (SCREEN-GRID) VOLTAGE. 130 max PLATE DISSIPATION. 5.5 max GRID-NO.2 INPUT. 11 max PEAK HEATER-CATHODE VOLTAGE: 11 max Heater negative with respect to cathode. 200 max BULB TEMPERATURE (At hottest point). 225 max | volts volts watts watts volts volts |
| Typical Operation and Characteristics: | |
| Plate Voltage 110 Grid-No.2 Voltage. 110 Grid-No.1 (Control-Grid) Voltage -7.5 Peak AF Grid-No.1 Voltage -7.5 Zero-Signal Plate Current 45 Maximum-Signal Grid-No.2 Current. 9 Plate Resistance (Approx). 12000 Transconductance. 7500 Load Resistance. 2500 Total Harmonic Distortion. 8 Maximum-Signal Power Output. 1.8 | volts volts volts ma ma ma ohms per cent watts |
| Maniana Ciania Valua | |

Maximum Circuit Values:

35L6GT

| Grid-No.1-Circuit Resistance: | |
|-------------------------------|-----|
| For fixed-bias operation | 0.1 |
| For cathode-bias operation | 0.5 |

BEAM POWER TUBE


Glass octal type used in output stage of ac/dc radio receivers. Outline 14C, OUTLINES SECTION. Tube requires octal socket and may be mounted in any position. This type 0.5 max megohm ^{C2} P3 H² ^{C2} ^{C1} ^{C1} ^{C2} ^{C1} ^{C2} ^{C1} ^{C1} ^{C2} ^{C1} ^{C1} ^{C2} ^{C1} ^{C1} ^{C2} ^{C2} ^{C1} ^{C2} ^{C2}

max

megohm

mounted in any position. This type NC G3 may be supplied with pin No.1 omitted. Refer to miniature type 35C5 for installation, application information, and curves.

| ·····, •······························· | | | |
|--|-----------------------------|--------------------|----------------|
| HEATER VOLTAGE (AC/DC) HEATER CURRENT DIRECT INTERELECTRODE CAPACITANCES (Approx.): | | 35 0.15 | volts |
| Grid No.1 to Plate. Grid No.1 to Cathode, Heater, Grid No.2, and Grid No.3. Plate to Cathode, Heater, Grid No.2, and Grid No.3 | ••••• | $0.6 \\ 13 \\ 9.5$ | pf pf pf |
| CLASS A1 AMPLIFIER | | | |
| Maximum Ratings, (Design-Center Values): | | | |
| PLATE VOLTAGE. GRID-NO.2 (SCREEN-GRID) VOLTAGE. PLATE DISSIPATION. | | 200 max 125 max | volts |
| GRID-NO.2 INPUT | • • • • • • • • • • • • • • | 8.5 max 1.0 max | watts |
| PEAK HEATER-CATHODE VOLTAGE: | | 1.0 max | watt |
| Heater negative with respect to cathode | | 90 max | volts |
| Heater positive with respect to cathode | | 90 max | volts |
| Typical Operation: | Fixed Bias | Cathode Bias | |
| Plate Supply Voltage | 110 | 200 | volts |
| Grid-No.2 Supply Voltage. | 110 | 125 | volts |
| Grid-No.1 (Control-Grid) Voltage | -7.5 | | volts |
| Cathode-Bias Resistor. Peak AF Grid-No.1 Voltage | 7.5 | 180 | ohms |
| Zero-Signal Plate Current. | 40 | 8 43 | volts |
| Maximum-Signal Plate Current. | 41 | 43 | ma ma |
| Zero-Signal Grid-No.2 Current | 3 | 2 | ma |
| Maximum-Signal Grid-No.2 Current | 7 | 5.5 | ma |
| Plate Resistance (Approx.) | 14000 | 34000 | ohms |
| Transconductance | 5800 | 6100 | μmhos |
| Load Resistance. | 2500 | 5000 | ohms |
| Total Harmonic Distortion Maximum-Signal Power Output | $10 \\ 1,5$ | 10 | per cent |
| | 1.0 | 3.0 | watts |
| Maximum Circuit Values: | | | |
| Grid-No.1-Circuit Resistance: | | | |
| For fixed-bias operation | | 0.1 max | megohm |
| For cathode-bias operation | • • • • • • • • • • • • • | 0.5 max | megohm |
| | | | |



HALF-WAVE VACUUM RECTIFIER


Miniature type used in power supply of ac/dc receivers. Equivalent in performance to glass-octal type 35Z5-GT. The heater is provided with a tap for operation of a panel lamp.

| HEATER VOLTAGE (AC/DC): | * | ** | |
|---|---------------|------|--------|
| ENTIRE HEATER (PINS 3 AND 4) | | 32 | volts |
| PANEL LAMP SECTION (PINS 4 AND 6) | 7.5 | 5.5 | volts |
| HEATER CURRENT: | | | |
| BETWEEN PINS 3 AND 4 | | - | ampere |
| BETWEEN PINS 3 AND 6 | | 0.15 | ampere |
| * Without panel lamp. ** With No.40 or No.4 | 7 panel lamp. | | |

HALF-WAVE RECTIFIER

| Maximum Ratings, (Design-Maximum Values): | | |
|---|------------------------------|-------------|
| PEAK INVERSE PLATE VOLTAGE. PEAK PLATE CURRENT. DC OUTPUT CURRENT: | 360 max 660 max | volts ma |
| With Panel Lamp and {No Shunting Resistor. Shunting Resistor. Without Panel Lamp. | 66 max 100 max 110 max | ma ma |
| PANEL-LAMP-SECTION VOLTAGE (rms): When Panel Lamp Fails. PEAK HEATER-CATHODE VOLTAGE: | 17 max | volts |
| Heater negative with respect to cathode | 360 max 360 max | volts |


INSTALLATION AND APPLICATION

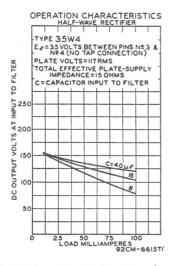

Tube requires miniature seven-contact socket and may be mounted in any position. Outline 7C, OUTLINES SECTION. For heater considerations, refer to miniature type 35C5.

35W4

With the panel lamp connected as shown in the diagram, the drop across R and all heaters (with panel lamp) should equal 117 volts at 0.15 ampere. The shunting resistor R_s is required when dc output current exceeds 60 milliamperes. Values of R_s for dc output currents greater than 60 milliamperes are given in tabulated data.



Typical Operation with Panel Lamp:†

| AC Plate-Supply Voltage (rms) | 117 | 117 | 117 | 117 | volts |
|--|--------|---------|-----------|-----------|-------|
| Filter-Input Capacitor Minimum Total Effective Plate-Supply | 40 | 40 | 40 | 40 | μſ |
| Impedance | | 15 | 15 | 15 | ohms |
| Panel-Lamp Shunting Resistor | | 300 70 | 150 80 | 100 90 | ohms |
| DC Output Current. | | | | | ma |
| † No.40 or No.47 panel lamp used in circuit given below with | capaci | tor-inp | ut nite | Γ. | |
| Typical Operation without Panel Lamp: | | | | | |
| | | | | | |

| AC Plate-Supply Voltage (rms) | 117 | volts |
|--|-----|-------|
| Filter-Input Capacitor | 40 | μſ |
| Minimum Total Effective Plate-Supply Impedance | 15 | ohms |
| DC Output Current | 100 | ma |
| | | |

RCA Receiving Tube Manual

| DC Output Voltage at Input to Filter (Approx.): At half-load current (50 ma.). At full-load current (100 ma.). Voltage Regulation (Approx.): Half-load to full-load current. | 135 120 15 | volts volts |
|--|-------------------------------|----------------------|
| Maximum Circuit Values: | | |
| Panel-Lamp Shunting Resistor:* | | |
| For dc output current of $\begin{cases} 70 \text{ ma.} \\ 80 \text{ ma.} \\ 90 \text{ ma.} \end{cases}$ | 800 max 400 max 250 max | ohms ohms ohms |
| | | |

* Required when dc output current is greater than 60 milliamperes.

35Y4

35Z3

35**Z4GT**

35**Z**5GT

HALF-WAVE VACUUM RECTIFIER

Glass lock-in type used in power supply of ac/dc receivers. The heater is provided with tap for the operation of a panel lamp. Outline 13B, OUTLINES SECTION. Tube requires lock-in socket. Heater volts (ac/dc), 35; amperes, 0.15. For maximum ratings, refer to glass octal type 35Z5-GT. For typical operation and curves, refer to miniature type 35W4. Type 35Y4 is used principally for renewal purposes.

HALF-WAVE VACUUM RECTIFIER

Glass lock-in type used in power supply of ac/dc receivers. Outline 13B, OUTLINES SEC-TION. Tube requires lock-in socket. Heater volts (ac/dc), 35; amperes, 0.15. For maximum ratings and typical operation, refer to glass octal type 3525-GT without panel lamp. Type 3523 is used principally for renewal purposes.

HALF-WAVE VACUUM RECTIFIER

Glass octal type used in power supply of ac/dcreceivers. Outline 14C, OUTLINES SEC-TION. Tube requires octal socket. This type may be supplied with pin No.1 omitted. Heater volts (ac/dc), 35; amperes, 0.15. For maximum ratings and typical operation, refer to glass octal type 35Z5-GT without panel lamp. Type 35Z4-GT is used principally for renewal purposes.


HALF-WAVE VACUUM RECTIFIER

Glass octal type used in power supply of ac/dc receivers. The heater is provided with a tap for operation of a panel lamp. Outline 14C, OUT-LINES SECTION. Tube requires

octal socket and may be mounted in any position. This type may be supplied with pin No.1 omitted. For installation and application considerations, refer to miniature type 35W4.

| HEATER VOLTAGE (AC/DC): ENTIRE HEATER (PINS 2 AND 7) PANEL LAMP SECTION (PINS 2 AND 3) HEATER CURRENT: | * 35 7.5 | ** 32 5.5 | volts volts |
|---|----------------|-----------------|----------------|
| BETWEEN PINS 2 AND 7. | 0.15 | 0.15 | ampere |
| Between Pins 3 and 7 | - | 0.15 | ampere |
| * Without panel lamp. ** With No. 40 or No. 47 panel lan | np. | | |
| HALF-WAVE RECTIFIER | | | |
| Maximum Ratings, (Design-Center Values): | | | |
| PEAK INVERSE PLATE VOLTAGE | | 700 max | volts |
| PEAK PLATE CURRENT. DC OUTPUT CURRENT: | | 600 max | ma |
| With Panel Lamp and {No Shunting Resistor | | 60 max | ma |
| - Snunting Resistor | | 90 max | ma |
| Without Panel Lamp | | 100 max | ma |

NC







| PANEL-LAMP-SECTION VOLTAGE (rms): When Panel Lamp Fails PEAK HEATER-CATHODE VOLTAGE: Heater negative with respect to cathode Heater positive with respect to cathode | | | | 350 | i max) max) max | | volts |
|---|--|---|--------------------------------|--------------------------------|-------------------------------|-----|-----------------------------------|
| Typical Operation with Panel Lamp:† | | | | | | | |
| AC Plate-Supply Voltage (rms). Filter-Input Capacitor Minimum Total Effective Plate-Supply Impedance Panel-Lamp Shunting Resistor. DC Output Current. | $ \begin{array}{r} 117 \\ 40 \\ 15 \\ - \\ 60 \\ \end{array} $ | $117 \\ 40 \\ 15 \\ 300 \\ 70$ | $117 \\ 40 \\ 15 \\ 150 \\ 80$ | $117 \\ 40 \\ 15 \\ 100 \\ 90$ | $235 \\ 40 \\ 100 \\ - \\ 60$ | | volts µf ohms ohms ma |
| † No.40 or No.47 panel lamp used in circuit with capacitor | -input | filter g | iven u | nder ty | pe 35 V | V4. | 3 |
| Typical Operation without Panel Lamp: | | | | | | | |
| AC Plate-Supply Voltage (rms) Filter-Input Capacitor Minimum Total Effective Plate-Supply Impedance DC Output Current DC Output Voltage at Input to Filter (Approx.): | | $ \begin{array}{r} 117 \\ 40 \\ 15 \\ 100 \end{array} $ | | 238 40 100 |) | | volts µf ohms ma |
| At half-load current (50 ma.). At full-load current (100 ma.) Voltage Regulation (Approx.): | | 140 120 | | 280 235 | 5 | | volts |
| Half-load to full-load current | | 20 | | 45 | 1 | | volts |
| Maximum Circuit Values: Panel-Lamp Shunting Resistor®: for dc output current of {80 ma | | | | |) max) max | | ohms |
| * Required when dc output current is greater than 60 millian | | | | |) max | | ohms |

Technical Data

* Required when dc output current is greater than 60 milliamperes.




SHARP-CUTOFF TETRODE

Glass type used as rf or if amplifier or as biased or grid-resistor detector in radio receivers. Outline 24B, OUTLINES SECTION. Tube requires five-contact socket. Heater volts (ac/dc), 6.3; amperes, 0.3. Characteristics as class A_1 amplifier: plate volts, 250 max; grid-No.2 volts, 90 max; grid-No.1 volts, -3; plate ma., 3.2; grid-No.2 ma., 1.7 max; plate resist-

36

ance, 0.55 megohm; transconductance, 1080 $\mu mhos.$ This is a DISCONTINUED type listed for reference only.



HALF-WAVE VACUUM RECTIFIER

Miniature types used in power supply of ac/dc receivers. These types have a tapped heater so that the heater section between pins 4 and 6 can be used as a limiting resistance in the rectifier

36AM3 36AM3A 36AM3B

plate circuit. This heater section is not to be used as a panel-lamp shunt. Outline 7C, OUTLINES SECTION. Tubes require miniature seven-contact socket and may be operated in any position. Type 36AM3 is a DISCONTINUED type listed for reference only.

| HEATER VOLTAGE (AC/DC): ENTIRE HEATER (PINS 3 AND 4). TAP SECTION (PINS 3 AND 6). HEATER CURRENT (PINS 3 AND 6). HEATER WARM-UP TIME (Average), For 36AM3-B. | | 36 32 0,1 20 | volts volts ampere seconds |
|--|--------------------------|------------------------------|-------------------------------------|
| HALF-WAVE RECTIFIER | | | |
| Maximum Ratings, (Design-Maximum Values): | 36 A M 3-A 36 A M 3-B | 36AM3 | |
| Peak Inverse Plate Voltage Peak Plate Current. DC Output Current. Peak Heater-Cathode Voltage: | | 365 max 530 max 82 max | volt ^s ma ma |
| Heater negative with respect to cathode | | 350 • max 200 • max | volts volts |
| | | | |

= RCA Receiving Tube Manual =

| Typical Operation with Capacitor Input to Filter: | | | |
|---|-----|-----|----------------|
| AC Plate-Supply Voltage (rms) | 120 | 117 | volts |
| Filter-Input Capacitor | 40 | 40 | μf |
| Total Effective Plate Supply Resistance | | | See text above |
| DC Output Current | 75 | 75 | ma |
| DC Output Voltage | 118 | 105 | volts |
| Characteristics: | | | |
| Tube Voltage Drop for plate current of 150 ma | 16 | 20 | volts |
| • The dc component must not exceed 350 volts. | | | |

The dc component must not exceed 100 volts.


37

38

39/44

MEDIUM-MU TRIODE

Glass type used as voltage amplifier or detector in radio receivers. Tube requires five-contact socket. Heater volts (ac/dc), 6.3; amperes, 0.3. Characteristics as class A₁ amplifier: plate volts, 250 max; grid volts, -18; plate ma., 7.5; plate resistance, 8400 ohms; amplification factor, 9.2; transconductance, 1100 µmhos. This is a DIS-CONTINUED type listed for reference only.



62

6.

POWER PENTODE

Glass type used in output stage of radio receivers. Outline 24B, OUTLINES SECTION. Tube requires five-contact socket. Heater volts (ac/dc), 6.3; amperes, 0.3. Characteristics as class A₁ amplifier: plate and grid-No.2 volts, 250 max; grid-No.1 volts, -25; plate ma., 22; grid-No.2 ma., 3.8; plate resistance, 0.1 megohm; transconductance, 1200 µmhos; load resistance, 10000 ohms; output watts, 2.5. This is a DIS-CONTINUED type listed for reference only.



Glass type used as rf or if amplifier in radio receivers, particularly those employing avc. Outline 24B, OUTLINES SECTION. Tube requires five-contact socket. Heater volts (ac/dc), 6.3; amperes, 0.3. Characteristics as class A₁ amplifier: plate volts, 250 max; grid-No.2 volts, 90 max; grid-No.1 volts, -3 min; plate ma., 5.8; grid-No.2 ma., 1.4; plate resistance, 1.0 meg-



ohm; transconductance, 1050 µmhos. This is a DISCONTINUED type listed for reference only.


MEDIUM-MU TRIODE


Glass type used as resistance-coupled or impedance-coupled amplifier in battery-operated receivers. Outline 27, OUTLINES SEC-TION. Filament volts (dc), 5; amperes, 0.25. Characteristics as class A₁ amplifier; plate-supply volts, 180; load resistance, 250000 ohms; grid volts, -3; plate ma., 0.2; plate resistance, 150000 ohms; amplification factor, 30; transconductance, 200 μ mhos. This is a DISCON-TINUED type listed for reference only.

POWER PENTODE

Glass type used in output stage of radio receivers. Tube requires six-contact socket. Heater volts (ac /dc), 6.3; amperes, 0.4. This type is electrically identical with type 6K6-GT. Type 41 is used principally for renewal purposes.









(2

(2

NO

6

POWER PENTODE

Glass type used in audio output stage of ac receivers. Outline 27, OUTLINES SEC-TION. Tube requires six-contact socket. Heater volts (ac/dc), 6.3; amperes, 0.7. This type is electrically identical with type 6F6. Type 42 is used principally for renewal purposes.

POWER PENTODE

Glass type used in audio output stage of ac/dc receivers. Outline 27, OUTLINES SEC-TION. Tube requires six-contact socket. Heater volts (ac/dc), 25; amperes, 0.3. This type is electrically identical with type 25A6. Type 43 is used principally for renewal purposes.

POWER TRIODE

Glass type used in output stage of radio receivers. Outline 27, OUTLINES SECTION. Tube requires four-contact socket. Filament volts (ac/de), 2.5; amperes, 1.5. Typical operation as class A₁ amplifier: plate supply volts, 275 max; grid volts, -56; cathode-bias resistor, 1550 ohms; amplification factor, 3.5; plate resistance, 1700 ohms; transconductance, 2050

 μ mhos; plate ma., 36; load resistance, 4600 ohms; undistorted power output, 2 watts. This is a DIS-CONTINUED type listed for reference only.

HALF-WAVE VACUUM RECTIFIER

Miniature type used in power supply of small, portable, ac/dc/battery receivers where small size and low heat dissipation are important. Outline 7B, OUTLINES SECTION. Tube requires miniature seven-contact socket and may be mounted in any position. Heater volts (ac/dc), 45; amperes, 0.075. Maximum ratings: peak inverse plate volts, 350 max; peak plate

ma., 390 max; dc output ma., 65 max; peak heater-cathode volts, 175 max. Typical operation with capacitor-input filter: ac plate volts (rms), 117; minimum total effective plate-supply impedance, 15 ohms; dc output ma., 65. This is a DISCONTINUED type listed for reference only.

HALF-WAVE VACUUM RECTIFIER

Glass octal type used in power supply of ac/dc receivers. The heater is provided with a tap for operation of a panel lamp. Outline 14C,

ac/dc receivers. The heater is provided with a tap for operation of a panel lamp. Outline 14C, OUTLINES SECTION. Tube requires octal socket. Without panel lamp, heater volts (ac/dc) of entire heater (pins 2 and 7), 45; amperes, 0.15. With panel lamp, heater volts (ac/dc) of panel-lamp section (pins 2 and 3 with 0.15 ampere between pins 2 and 7), 5.5. Except for difference in heater voltage, this type has the

45Z5GT

46

same ratings and typical operation values as glass octal type 35Z5-GT. Type 45Z5-GT is a DISCON-TINUED type listed for reference only.



DUAL-GRID POWER AMPLIFIER

Glass type used as class A_1 or class B amplifier in radio equipment. Outline 28, OUT-LINES SECTION. Tube requires five-contact socket. Filament volts (ac/de), 2.5; amperes, 1.75. Typical operation as class A_1 amplifier (grid No.2 connected to plate at socket): plate volts, 250 max; grid volts, -33; plate ma., 22; plate resistance, 2380 ohms; am

plate ma., 22; plate resistance, 2300 onms; amplification factor, 5.6; transconductance, 2350 µmhos; load resistance for maximum undistorted power output, 6400 ohms; output watts, 1.25. This is a DISCONTINUED type listed for reference only.

42


43

45

45Z3

POWER PENTODE

Glass type used in audio output stage of radio receivers. Outline 28, OUTLINES SEC-TION. Tube requires five-contact socket and should preferably be mounted in vertical position. Horizontal operation is permissible if pins 1 and 5 are in vertical plane. Filament volts (ac/dc), 2.5; amperes, 1.75. Typical operation as class A_1 amplifier: plate and grid-No.2 volts,



250 max; cathode-bias resistor, 450 ohms; plate ma., 31; grid-No.2 ma., 6; plate resistance, 60000 ohms; transconductance, 2500μ mhos; load resistance, 7000 ohms; power output, 2.7 watts. This type is used principally for renewal purposes.

POWER TETRODE

Glass type used in audio output stage of radio receivers designed to operate from dc power lines. Outline 28, OUTLINES SECTION. Heater volts (dc), 30; amperes, 0.4. Typical operation as class A₁ amplifier: plate volts, 125 maz; grid-No.2 volts, 100 maz; grid-No.1 volts, -20; plate ma., 56; grid-No.2 ma., 9.5; transconductance, 3900 µmhos; load resistance, 1500 ohms; output watts, 2.5. This is a DIS-CONTINUED type listed for reference only.

DUAL-GRID POWER AMPLIFIER

Glass type used in output stage of batteryoperated receivers. Outline 27, OUTLINES SECTION. Tube requires five-contact socket. Filament volts (dc), 2.0; amperes, 0.12. Typical operation as class A₁ amplifier (grid No.2 connected to plate at socket): plate volts, 435 max; grid volts, -20; plate ma., 6; plate resistance, 4175 ohms; amplification factor, 4.7; transcon-





ductance, 1125 μ mhos; load resistance, 11000 ohms; output watts (approx.), 0.17. This is a DIS-CONTINUED type listed for reference only.

POWER' TRIODE

Glass type used in output stage of af amplifiers employing transformer input coupling. Maximum over-all length, 6-1/4 inches; maximum diameter, 2-7/16 inches. Tube requires four-contact socket and should be mounted in vertical position with base down. Filament volts (ac/dc), 7.5; amperes, 1.25. Characteristics as class A₁ amplifier: plate volts, 450 max; grid volts, -84; cathode resistor, 1530 ohms; plate




ma., 55; plate resistance, 1800 ohms; amplification factor, 3.8; transconductance, 2100 μ mhos; load resistance, 4350 ohms; output watts, 4.6. This is a DISCONTINUED type listed for reference only.

BEAM POWER TUBE

Glass lock-in type used in output stage of ac/dc receivers. Outline 13B, OUTLINES SEC-TION. Tube requires lock-in socket. Heater volts (ac/dc), 50; amperes, 0.15. For ratings and data, refer to glass-octal type 50L6-GT. Type 50A5 is used principally for renewal purposes.

BEAM POWER TUBE

Miniature type used in output stage of compact ac/dc receivers. Because of its high power sensitivity at plate and screen-grid voltages available in ac/dc receivers, it is capable of



providing a relatively high power output. Outline 7C, OUTLINES SECTION.

48

47

49

50

50A5

50B5

Tube requires miniature seven-contact socket and may be mounted in any position. Except for basing arrangement, type 50B5 is identical with miniature type 50C5.



BEAM POWER TUBE

Miniature type used in output stage of compact, ac/dc radio receivers. Because of its high power sensitivity and high efficiency at plate and screen-grid voltages available in ac/dc receivers, the 50C5 is capable of providing a relatively high power output.

50C5 Related type: 25C5

Within its maximum ratings, type 50C5 is equivalent in performance to glass octal type 50L6-GT. The basing arrangement of the 50C5 simplifies the problem of meeting Underwriters' Laboratories requirements in the design of ac/dc receivers.

| HEATER VOLTAGE (AC/DC) | 50 0.15 | volts |
|---|------------|----------|
| DIRECT INTERELECTRODE CAPACITANCES (Approx.): Grid No.1 to Plate Grid No.1 to Cathode, Heater, Grid No.2, and Grid No.3. Plate to Cathode, Heater, Grid No.2, and Grid No.3. | 13 | pf pf |


CLASS A1 AMPLIFIER

Maximum Ratings, (Design-Maximum Values):

| PLATE VOLTAGE | 150 max | volts |
|---|---------|------------|
| GRID-NO.2 (SCREEN-GRID) VOLTAGE | 130 max | volts |
| GRID-No.1 (CONTROL-GRID) VOLTAGE, Positive-bias value | 0 max | volts |
| PLATE DISSIPATION. | 7 max | watts |
| GRID-NO.2 INPUT. | 1 4 max | watts |
| PEAK HEATER-CATHODE VOLTAGE: | | in di o co |
| Heater negative with respect to cathode | 200 max | volts |
| Heater positive with respect to cathode | 200 max | volts |
| BULB TEMPERATURE (At hottest point) | 220 max | °C |
| | LLO mai | 0 |
| The dc component must not exceed 100 volts. | | |

Typical Operation:

| Plate Voltage | 120 | volts |
|----------------------------------|-------|-------|
| Grid-No.2 Voltage | | volts |
| Grid-No.1 (Control-Grid) Voltage | -8 | volts |
| Peak AF Grid-No.1 Voltage | 8 | volts |
| Zero-Signal Plate Current | 49 | ma |
| Maximum-Signal Plate Current | 50 | ma |
| Zero-Signal Grid-No.2 Current | 4 | ma |
| Maximum-Signal Grid-No.2 Current | 8.5 | ma |
| Plate Resistance (Approx.) | 10000 | ohms |
| Transconductance | 7500 | μmhos |

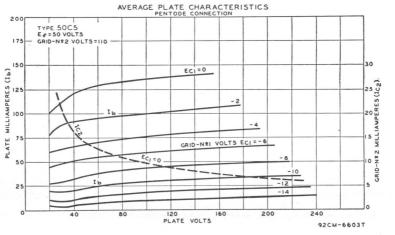

| Load Resistance Total Harmonic Distortion Maximum-Signal Power Output | 10 | ohms per cent watts |
|---|--------------------|---------------------------|
| Maximum Circuit Values: | | |
| Grid-No.1-Circuit Resistance: For fixed-bias operation For cathode-bias operation | 0.1 max 0.5 max | megohm megohm |

= RCA Receiving Tube Manual =

INSTALLATION AND APPLICATION

Type 50C5 requires miniature seven-contact socket and may be mounted in any position. Outline7C, OUTLINES SECTION. It is especially important that this tube, like other power-handling tubes, be adequately ventilated.

The 50-volt heater is designed to operate under the normal conditions of linevoltage variation without materially affecting the performance or serviceability of the 50C5. For operation of the 50C5 in series with other types having 0.15ampere rating, the current in the heater circuit should be adjusted to 0.15 ampere for the normal supply voltage.

In a series-heater circuit of the "dc power line" type employing several 0.15ampere types and one or two 50C5s, the heater(s) of the 50C5(s) should be placed on the positive side of the line. Under these conditions, heater-cathode voltage of the 50C5 must not exceed the value given under maximum ratings. In a seriesheater circuit of the "universal" type employing rectifier tube 35W4, one or two 50C5s, and several 0.15-ampere types, it is recommended that the heater(s) of the 50C5(s) be placed in the circuit so that the higher values of heater-cathode bias will be impressed on the 50C5(s) rather than on the other 0.15-ampere types. This is accomplished by arranging the 50C5(s) on the side of the supply line which is connected to the cathode of the rectifier, i.e., the positive terminal of the rectified voltage supply. Between this side of the line and the 50C5(s), any necessary auxiliary resistance and the heater of the 35W4 are connected in series.

As a power amplifier (class A_1), the 50C5 is recommended for use either singly or in push-pull combination in the power-output stage of "ac/dc" receivers. The operating values shown under typical operation have been determined on the basis that grid-No.1 current does not flow during any part of the input cycle.

BEAM POWER TUBE


50C6G

50DC4

Glass octal type used in output stage of ac/dc receivers. Outline 26, OUTLINES SEC-TION. Heater volts (ac/dc), 50; amperes, 0.15. Except for heater rating, this type is identical with glass octal type 6Y6-G. Type 50C6-G is a DISCONTINUED type listed for reference only.

HALF-WAVE VACUUM RECTIFIER

Miniature type used in power supply of ac/dc radio receivers. The heater is provided with a tap for operation of a panel lamp. For typical circuit, refer to type 35W4. Outline 7C, OUTLINES



SECTION. Tube requires seven-contact socket and may be mounted in any position.

| HEATER VOLTAGE (AC/DC): | * | ** | volts |
|---|------|------|--------|
| ENTIRE HEATER (PINS 3 AND 4) | 50 | 45 | volts |
| PANEL-LAMP SECTION (PINS 4 AND 6) | 7.5 | 5.5 | volts |
| HEATER CURRENT: | | | |
| Between Pins 3 and 4 | 0.15 | - | ampere |
| Between Pins 3 and 6 | - | 0.15 | ampere |
| * Without panel lamp. ** With No.40 or No.47 panel la | mp. | | |


Technical Data

HALF-WAVE RECTIFIER

| Maximim Ratings, (Design-Maximum Values): | | | | | |
|---|-------|----------|---------|--------------|-------|
| PEAK INVERSE PLATE VOLTAGE | | | | 330 max | volts |
| PEAK PLATE CURRENT DC OUTPUT CURRENT: | | | | 720 max | ma |
| With Panel Lamp and No Shunting Resistor. | | | | 70 max | ma |
| Shunting Resistor [•] | | | | 110 max | ma |
| Without Panel Lamp | | | | 120 max | ma |
| PANEL-LAMP-SECTION VOLTAGE (rms): | | | | | |
| When Panel Lamp Fails | | | | 16.5 max | volts |
| PEAK HEATER-CATHODE VOLTAGE: | | | | | |
| Heater negative with respect to cathode | | | | 330 max | volts |
| Heater positive with respect to cathode | | | | 330 max | volts |
| Typical Operation with Panel Lamp:† | | | | | |
| AC Plate-Supply Voltage (rms) | 117 | 117 | 117 | 117 | volts |
| Filter-Input Capacitor | 40 | 40 | 40 | 40 | μf |
| Minimum Total Effective Plate-Supply Impedance | 15 | 15 | 15 | 15 | ohms |
| Panel-Lamp Shunting Resistor | 450 | 200 | 100 | 75 | ohms |
| DC Output Current | 70 | 80 | 90 | 100 | ma |
| † No.40 or No.47 panel lamp used in circuit with capacitor- | input | filter g | iven un | der type 35V | V4. |
| Typical Operation without Panel Lamp: | | | | | |
| AC Plate-Supply Voltage (rms) | | | | 117 | volts |
| | | | | 1.0 | |


| AO I late-Supply Voltage (lins) | TT 1 | VUIUB |
|--|------|-------|
| Filter-Input Capacitor | 40 | μf |
| Minimum Total Effective Plate-Supply Impedance | 15 | ohms |
| DC Output Current | 110 | ma |
| DC Output Voltage at Input to Filter (Approx.): | | |
| At half-load current (55 ma.) | 130 | volts |
| At full-load current (110 ma.) | 110 | volts |
| Voltage Regulation (Approx.): | | |
| Half-load to full-load current | 20 | volts |
| • Produined when do output current is greater than 70 milliampered | | |

Required when dc output current is greater than 70 milliamperes.



POWER PENTODE

Miniature type used in the audio output stage of radio and television receivers and in phonographs. Outline 7C, OUTLINES SECTION. Heater volts (ac/dc), 50; amperes, 0.15. Except for heater rating, this type is identical with miniature type 6EH5.




BEAM POWER TUBE

Glass octal type used in audiooutput stages of compact stereophonic and monophonic phonographs and radio and television receivers. Outline 14F, OUTLINES SECTION. Tube requires octal socket and may be mounted SOEH5 Related types: 6EH5, 12EH5, 25EH5



in any position. Heater volts (ac/dc), 50; amperes, 0.15. Peak heater-cathode volts, heater negative with respect to cathode, 200 max. Except for heater ratings and heater-cathode voltage, this type is identical with glass octal type 6FE5.



POWER PENTODE

Miniature type used as audio output amplifier in ac/dc radio receivers. Outline 7C, OUTLINES SECTION. Tube requires seven-contact socket and may be operated in any position.

50FK5

= RCA Receiving Tube Manual =

| HEATER VOLTAGE (AC/DC) HEATER CURRENT. DIRECT INTERELECTRODE CAPACITANCES: | 50 0.1 | volts ampere |
|--|---|------------------|
| Crid No 1 to Plata | 0.65 | pf |
| Grid No.1 to Flate Grid No.1 to Cathode, Heater, Grid No.2, and Grid No.3. Plate to Cathode, Heater, Grid No.2, and Grid No.3. | 17 | pf |
| Plate to Cathode, Heater, Grid No.2, and Grid No.3 | 9 | \mathbf{pf} |
| CLASS A1 AMPLIFIER | | |
| Maximum Ratings, (Design-Maximum Values): | | |
| PLATE VOLTAGE | 150 max | volts |
| GRID-NO.2 (SCREEN-GRID) VOLTAGE | 130 max 0 max | volts volts |
| PLATE DISSIPATION | 5 max | watts |
| GRID-NO.2 INPUT PEAK HEATER-CATHODE VOLTAGE: | 1.75 max | watts |
| Heater negative with respect to cathode | 200 max | volts |
| Heater positive with respect to cathode | 200 • max | volts |
| BULB TEMPERATURE (At hottest point) | 225 max | °C |
| Typical Operation and Characteristics: | | |
| Plate Supply Voltage | 110 | volts |
| Grid-No.2 Supply Voltage | 115 | volts |
| Cathode-Bias Resistor. Peak AF Grid-No.1 Voltage. | 62 3 | ohms volts |
| Zero-Signal Plate Current | 32 | ma |
| Maximum-Signal Plate Current | 32 | ma |
| Zero-Signal Plate Current. Zero-Signal Grid-No.2 Current. Maximum-Signal Grid-No.2 Current. Maximum-Signal Grid-No.2 Current. | 8.5 12 | ma |
| Flate Resistance (Approx.) | 14000 | ohms |
| Transconductance | $12800 \\ 3000$ | μmhos |
| Load Resistance Total Harmonic Distortion | 8000 | ohms per cent |
| Maximum-Signal Power Output | 1.2 | watts |
| Grid-No.1-Circuit Resistance: For fixed-bias operation | 0.1 | megohm |
| For cathode-bias operation The dc component must not exceed 100 volts. AVERAGE PLATE CHARACTERISTICS | 0.5 | megohm |
| The dc component must not exceed 100 volts. AVERAGE PLATE CHARACTERISTICS | 0.5 | |
| The dc component must not exceed 100 volts. AVERAGE PLATE CHARACTERISTICS TYPE 50FK5 Ef + 50 VOLTS | 0.5 | |
| The dc component must not exceed 100 volts. AVERAGE PLATE CHARACTERISTICS TYPE 50FK5 Ef + 50 VOLTS | 0.5 | |
| The dc component must not exceed 100 volts. AVERAGE PLATE CHARACTERISTICS TYPE 50FK5 Ef + 50 VOLTS | | |
| The dc component must not exceed 100 volts. AVERAGE PLATE CHARACTERISTICS TYPE 50FK5 Ef + 50 VOLTS | | |
| The dc component must not exceed 100 volts. AVERAGE PLATE CHARACTERISTICS TYPE 50FK5 Ef + 50 VOLTS | | |
| The dc component must not exceed 100 volts. AVERAGE PLATE CHARACTERISTICS TYPE 50FK5 Ef + 50 VOLTS | <u>s ECI=0</u> | |
| The dc component must not exceed 100 volts. AVERAGE PLATE CHARACTERISTICS TYPE 50FK5 Ef + 50 VOLTS | | |
| The dc component must not exceed 100 volts. AVERAGE PLATE CHARACTERISTICS TYPE 50FK5 Ef + 50 VOLTS | <u>s ECI=0</u> | |
| The dc component must not exceed 100 volts. AVERAGE PLATE CHARACTERISTICS TYPE 50FK5 Ef + 50 VOLTS | <u>s ECI=0</u> | |
| The dc component must not exceed 100 volts. AVERAGE PLATE CHARACTERISTICS TYPE 50 FK5 E,+ 50 VOLTS + 115 GRID-No.2 VOLTS + 115 GRID-No.1 VOLT Tb GRID-NO.1 VOLT | s EC1 = 0 | |
| The dc component must not exceed 100 volts. AVERAGE PLATE CHARACTERISTICS TYPE 50 FK5 E,+ 50 VOLTS + 115 GRID-No.2 VOLTS + 115 GRID-No.1 VOLT Tb GRID-NO.1 VOLT | s EC1 = 0 | |
| The dc component must not exceed 100 volts. AVERAGE PLATE CHARACTERISTICS TYPE 50 FK5 E,+ 50 VOLTS + 115 GRID-No.2 VOLTS + 115 GRID-No.1 VOLT Tb GRID-NO.1 VOLT | s EC1 = 0 | |
| The dc component must not exceed 100 volts. AVERAGE PLATE CHARACTERISTICS TYPE 50 FK5 E,+ 50 VOLTS + 115 GRID-No.2 VOLTS + 115 GRID-No.1 VOLT Tb GRID-NO.1 VOLT | <u>S ECI=0</u> | |
| The dc component must not exceed 100 volts. AVERAGE PLATE CHARACTERISTICS TYPE 50 FK5 E,+ 50 VOLTS + 115 GRID-No.2 VOLTS + 115 GRID-No.1 VOLT Tb GRID-NO.1 VOLT | s EC1 = 0 | |
| The dc component must not exceed 100 volts. AVERAGE PLATE CHARACTERISTICS TYPE 50 FK5 E,+ 50 VOLTS + 115 GRID - No.2 VOLTS + 115 GRID - No.2 VOLTS + 115 GRID - No.1 VOLT Tb GRID - NO.1 VOLT | <u>S ECI = 0</u> 1 2 3 3 3 5 | |
| The dc component must not exceed 100 volts. AVERAGE PLATE CHARACTERISTICS TYPE 50 FK5 E,+ 50 VOLTS + 115 GRID-No.2 VOLTS + 115 GRID-No.1 VOLT Tb GRID-NO.1 VOLT | <u>S ECI=0</u> | |
| The dc component must not exceed 100 volts. AVERAGE PLATE CHARACTERISTICS TYPE 50FK5 GRID-No.2 VOLTS + 115 GRID-No.2 VOLTS + 115 GRID-No.1 VOLT Tb GRID-No.1 VOLT Tb GRID-No.1 VOLT Tb GRID-No.1 VOLT Tb GRID-No.2 VOLTS + 115 GRID-No.2 VOLTS | <u>S ECI = 0</u> 1 2 3 3 3 5 | |
| The dc component must not exceed 100 volts. AVERAGE PLATE CHARACTERISTICS TYPE 50FK5 Ef + 50 V0LTS + 115 GRID - No.2 V0LTS + 115 GRID - No.2 V0LTS + 115 GRID - No.1 V0LT Tb GRID - NO.1 | $S = E_{C_1} = 0$ 112233456 | meğohm |
| The dc component must not exceed 100 volts. AVERAGE PLATE CHARACTERISTICS TYPE 50FK5 GRID-No.2 VOLTS + 115 GRID-No.2 VOLTS + 115 GRID-No.1 VOLT Tb GRID-No.1 VOLT Tb GRID-No.1 VOLT Tb GRID-No.1 VOLT Tb GRID-No.2 VOLTS + 115 GRID-No.2 VOLTS | <u>S ECI = 0</u> 1 2 3 3 4 4 5 6 6 6 | meğohm |
| The dc component must not exceed 100 volts. AVERAGE PLATE CHARACTERISTICS TYPE 50FK5 GRID-No.2 VOLTS + 115 GRID-No.2 VOLTS + 115 GRID-No.1 VOLT Tb GRID-No.1 VOLT Tb GRID-No.1 VOLT Tb GRID-No.1 VOLT Tb GRID-No.2 VOLTS + 115 GRID-No.2 VOLTS | S ECI=0 1 2 3 4 5 6 140 160 92CH-10780 H | megohm |
| The dc component must not exceed 100 volts. AVERAGE PLATE CHARACTERISTICS AVERAGE PLATE CHARACTERISTICS Image: second | S ECI=0 1 2 3 5 6 140 160 92CH-10785 H | meğohm |

Miniature type used in audi quency power-output stage of radio receivers. Outline 7C, OUTLINES SEC-TION. Tube requires miniature seven-



contact socket and may be mounted K,G_3 in any position. The heater is provided with a tap for operation of a panel lamp. Heater volts (ac/dc), 50; amperes, 0.15; tap volts (without panel lamp), 7.

CLASS A1 AMPLIFIER

Maximum Ratings, (Design-Maximum Values):

| PLATE VOLTAGE | 150 max | volts |
|--|---------|----------|
| GRID-NO.2 (SCREEN-GRID) VOLTAGE | 130 max | volts |
| PLATE DISSIPATION | 5.5 max | watts |
| GRID-NO.2 INPUT. | 1.1 max | watts |
| RMS HEATER-TAP VOLTAGE WHEN PANEL LAMP FAILS. | 14 max | volts |
| PEAK HEATER-CATHODE VOLTAGE: | | |
| Heater negative with respect to cathode | 200 max | volts |
| Heater positive with respect to cathode | 200 max | volts |
| | | |
| Typical Operation and Characteristics: | | |
| Plate Voltage | 110 | volts |
| Grid-No.2 Voltage | 110 | volts |
| Grid-No.1 (Control-Grid) Voltage | -7.5 | volts |
| Peak AF Grid-No.1 Voltage | 7.5 | volts |
| Zero-Signal Plate Current. | 49 | ma |
| Maximum-Signal Plate Current | 50 | ma |
| Zero-Signal Grid-No.2 Current. | 4 | ma |
| Maximum-Signal Grid-No.2 Current. | 8 5 | ma |
| Plate Resistance (Approx.) | 10000 | ohms |
| Transconductance. | 7500 | μmhos |
| Load Resistance. | 2500 | ohms |
| Total Harmonic Distortion (Approx.) | 9 | per cent |
| Maximum-Signal Power Output | 1.9 | watts |
| in a man and a contract output the second seco | 1.0 | Watto |
| Maximum Circuit Values: | | |
| Grid-No.1-Circuit Resistance: | | |
| | | |

| For fixed-bias operation | | megohm |
|--|---------|--------|
| For cathode-bias operation | 0.5 max | megohm |
| The dc component must not exceed 100 volts | | |

BEAM POWER TUBE

Glass octal type used in output stage of ac/dc radio receivers. Outline14C,OUTLINESSECTION.Tube requires octal socket and may be mounted in any position. This type may be supplied with pin No.1 omit-

SOL6GT Related types: 12L6GT, 25L6, 25L6GT

ted. Refer to miniature type 50C5 for installation and application information.

| Heater Voltage (ac/dc) Heater Current Direct Interelectrode Capacitances (Approx.): | 50 0.15 | volts ampere |
|---|--------------------|-----------------|
| Grid No.1 to Plate. Grid No.1 to Cathode, Heater, Grid No.2, and Grid No.3. Plate to Cathode, Heater, Grid No.2, and Grid No.3. | $0.6 \\ 15 \\ 9.5$ | pf pf pf |

CLASS A1 AMPLIFIER

| Maximum Ratings, (Design-Center Values): | | | |
|--|------------|--------------|-------|
| PLATE VOLTAGE. | | 200 max | volts |
| GRID-No.2 (SCREEN-GRID) VOLTAGE | | 125 max | volts |
| PLATE DISSIPATION. | | 10 max | watts |
| GRID-NO.2 INPUT. | | 1.25 max | watts |
| PEAK HEATER-CATHODE VOLTAGE: | | | |
| Heater negative with respect to cathode | | 90 max | volts |
| Heater positive with respect to cathode | | 90 max | volts |
| | | | |
| Typical Operation: | Fixed Bias | Cathode Bias | |
| Plate Supply Voltage | 110 | 200 | volts |
| Grid-No.2 Supply Voltage | 110 | 125 | volts |
| Grid-No.1 (Control-Grid) Voltage | -7.5 | | volts |
| Peak AF Grid-No.1 Voltage | 7.5 | 8.0 | volts |
| Cathode-Bias Resistor | - | 180 | ohms |
| Zero-Signal Plate Current | 49 | 46 | ma |
| Maximum-Signal Plate Current | 50 | 47 | ma |
| Zero-Signal Grid-No.2 Current. | 4 | 2.2 | ma |
| Maximum-Signal Grid-No.2 Current | 10 | 8.5 | ma |
| | | | |

| Plate Resistance (Approx.) | 13000 | 28000 | ohms |
|-----------------------------|-------|-------|----------|
| Transconductance | 8000 | 8000 | μmhos |
| Load Resistance | 2000 | 4000 | ohms |
| Total Harmonic Distortion | 10 | 10 | per cent |
| Maximum-Signal Power Output | 2.1 | 3.8 | watts |

VACUUM RECTIFIER-DOUBLER

Lock-in type used as half-wave rectifier or voltage doubler in ac/dc receivers. Outline 13B, OUTLINES SECTION. Tube requires lock-in socket. Heater volts (ac/dc), 50; amperes, 0.15. This type is electrically identical with glass octal type 50Y6-GT and, except for heater rating, with glass octal type 25Z6-GT. Refer to type 25Z6-GT for maximum ratings, typical operation, and curves. Type 50X6 is used principally for renewal purposes.


VACUUM RECTIFIER-DOUBLER


50Y6GT

50Y7GT

50X6

Glass octal type used as half-wave rectifier or voltage doubler in ac/dc receivers. This type is used particularly in "transformerless" receivers of either the ac/dc type or the voltagedoubler type. Outline 14C, OUTLINES





SECTION. This type may be supplied with pin No.1 omitted. Tube requires octal socket. Heater volts (ac/dc), 50; amperes, 0.15. Except for heater rating, this type is electrically identical with type 25Z6-GT.

VACUUM RECTIFIER-DOUBLER


Glass octal type used as half-wave rectifier or voltage doubler in ac/dc receivers. This type is used particularly in "transformerless" receivers of either the ac/dc type or the voltagedoubler type. The heater is provided with a tap for operation of a panel lamp. Outline 14 C, OUT-LINES SECTION. Tube requires octal socket. Without panel lamp, heater volts (ac/dc) of PD23 1 6 HL H2 7 H NC KDI

PDI

entire heater (pins 2 and 7), 50; amperes, 0.15. With panel lamp, heater volts (ac/dc) of panel-lamp section (pins 6 and 7 with 0.15 ampere between pins 2 and 7), 5.5. For maximum ratings and typical operation as half-wave rectifier or voltage doubler without panel lamp, refer to glass octal type 25Z6-GT. When operated with a panel lamp and 250-ohm panel-lamp shunting resistor, ratings and typical operation are the same as for type 25Z6-GT, except that dc output current per plate is 65 ma. Type 50Y7-GT is used principally for renewal purposes.

VACUUM RECTIFIER-DOUBLER


Glass octal type used as half-wave rectifier or voltage doubler in ac/dc receivers. Outline 22, OUTLINES SECTION. The heater is provided with a tap for operation of a panel lamp. Without panel lamp, heater volts (ac/dc) of entire heater (pins 2 and 7), 50; amperes, 0.15. With panel lamp, heater volts (ac/dc) of panellamp section (pins 6 and 7 with 0.15 ampere



between pins 2 and 7), 2. Maximum ratings as rectifier or doubler: peak inverse plate volts, 700 max; peak plate ma. per plate, 400 max; dc output ma. per plate with panel lamp, 65 max; peak heatercathode volts, 350 max; panel lamp section volts (pins 6 and 7), 2.5 max. This is a DISCONTINUED type listed for reference only.

HIGH-MU TWIN POWER TRIODE

Glass type used in output stage of acoperated receivers as a class B power amplifier. Outline 27, OUTLINES SECTION. Tube requires medium seven-contact (0.855-inch pincircle diameter) socket. Heater volts (ac/dc), 2.5; amperes, 2.0. Except for heater rating, this type is electrically identical with metal type 6N7. Type 53 is a DISCONTINUED type listed for reference only.



53

50Z7G



POWER PENTODE


Miniature type used in output stages of audio amplifiers, especially in two-tube series-string stereo systems. This type has extremely high power-sensitivity and can be driven to

60FX5 Related type: 12FX5

full output by a ceramic or crystal phonograph pickup. Outline 7C, OUTLINES SECTION. Tube requires seven-contact socket and may be mounted in any position.

| Heater Voltage (ac/dc) Heater Current. Direct Interelectrode Capacitances (Approx.): | $\begin{smallmatrix} 60\\0.1 \end{smallmatrix}$ | volts ampere |
|---|---|----------------------------------|
| Grid No.1 to Cathode, Heater, Grid No.2, and Grid No.3 | $\begin{smallmatrix}0.65\\17\\9\end{smallmatrix}$ | pf pf pf |
| CLASS A, AMPLIFIER | | |
| Maximum Ratings, (Design-Maximum Values): | | |
| PLATE VOLTAGE. GRID-NO.2 (SCREEN-GRID) VOLTAGE. PLATE DISSIPATION. GRID-NO.2 INPUT. | 150 max 130 max 5.5 max 2 max | volts volts watts watts |
| PEAK HEATER-CATHODE VOLTAGE: Heater negative with respect to cathode. Heater positive with respect to cathode. BULB TEMPERATURE (At hottest point). | 200 max 200*max 225 max | volts volts °C |
| Typical Operation: | | |
| Plate Supply Voltage | $110 \\ 115$ | volts |
| Cathode-Bias Resistor | 62 | ohms |
| Peak AF Grid-No.1 Voltage. | 3 | volts |
| Zero-Signal Plate Current Maximum-Signal Plate Current | 36 35 | ma |
| Zero-Signal Grid No.2 Current. | 10 | ma |
| Maximum-Signal Grid No.2 Current. | 12 | ma |
| Plate Resistance | 17500 | ohms |
| Transconductance | 13500 | μ mhos |
| Load Resistance | 3000 | ohms |
| Total Harmonic Distortion Maximum-Signal Power Output | 1.3 | per cent watts |
| Maximum Circuit Values: Grid-No.1-Circuit Resistance: | | |
| For fixed-bias operation | 0.1 max | megohm |

AVERAGE CHARACTERISTICS

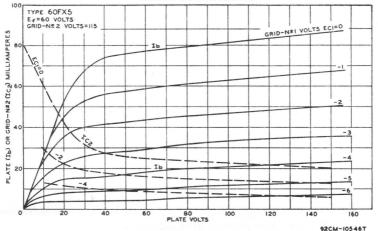

= RCA Receiving Tube Manual =

RECTIFIER—BEAM POWER TUBE


Glass octal type used as combined halfwave rectifier and output amplifier in ac/dc receivers. Outline 14E, OUTLINES SECTION. Tube requires octal socket. Heater volts (ac/dc), 70; amperes, 0.15. Maximum ratings of rectifier unit: peak inverse plate volts, 350; peak plate ma., 420; dc output ma., 70; peak heatercathode volts, 175; minimum total effective



plate-supply impedance, 15 ohms. Typical operation and maximum ratings of beam power unit as class A_1 amplifier: plate and grid-No.2 volts, 110 (117 max); grid-No.1 volts, -7.5; plate ma., 40; grid-No.2 ma., 3; plate resistance, 15000 ohms; transconductance, 7500 μ mhos; load resistance, 2000 ohms; output watts, 1.8; plate dissipation, 5 max watts; grid-No.2 input, 1 max watt. This type is used principally for renewal purposes.

TWIN DIODE-HIGH-MU TRIODE

Glass type used as combined detector, amplifier, and ave tube in radio receivers. Outline 24B, OUTLINES SECTION. Tube requires sixcontact socket. Heater volts (ac/dc), 6.3; amperes, 0.3. Except for interelectrode capacitances and plate volts of 250 max, this type is identical electrically with metal type 6SQ7. Type 75 is used principally for renewal purposes.



REMOTE-CUTOFF PENTODE

Glass type used in rf and if stages of radio receivers, particularly those employing avc. Outline 24B, OUTLINES SECTION. Tube requires six-contact socket. Heater volts (ac/dc), 6.3; amperes, 0.3. Except for capacitances, this type is identical electrically with metal type 6K7. Type 78 is used principally for renewal purposes.



FULL-WAVE VACUUM RECTIFIER


Glass type used in power supply of radio equipment having moderate direct-current requirements. Outline 27, OUTLINES SEC-TION, except maximum over-all length 4 inches; maximum seated length, 3-3 /8 inches. Tube requires four-contactsocket and should be mounted preferably in a vertical position. Horizontal mounting is permissible if pins 1 and 4 are in a horizontal plane. Filament volts (ac), 5.0; am-



peres, 2.0. For filament operation, refer to type 5U4-G. Type 80 is electrically identical with glass octal type 5Y3-GT. Type 80 is used principally for renewal purposes.

FULL-WAVE VACUUM RECTIFIER

Glass type used in power supply of automobile and ac-operated radio receivers. Maximum dimensions: over-all length, 4-3/16 inches; seated height, 3-9/16 inches; diameter, 1-9/16 inches. Tube requires five-contact socket. Heater volts (ac/dc), 6.3; amperes, 0.5. Maximum ratings: peak inverse plate volts, 1250 max; peak plate ma., 180 max; dc output ma., 60 max; peak heater-cathode volts, 450 max.



Typical operation with capacitor-input filter: ac plate-to-plate supply volts (rms), 650; minimum total effective plate-supply impedance per plate, 150 ohms; dc output ma., 60. Typical operation with choke-input filter: ac plate-to-plate supply volts (rms), 900; minimum filter-input choke, 10 henries; dc output ma., 60. This type is used principally for renewal purposes.


80

84/6Z4

70L7GT

75

= Technical Data =



G2B

6 KB

PD

GIE

PB

(2

RECTIFIER—BEAM POWER TUBE

Glass octal type used as combined halfwave rectifier and output amplifier in ac/dc receivers. Outline 14E, OUTLINES SECTION. Tube requires octal socket. Heater volts (ac/dc). 117; amperes, 0.09. For ratings and operation of rectifier unit, refer to type 117N7-GT. Typical operation of beam power unit as class A1 amplifier: plate and grid-No.2 volts, 105 (117 max); grid-No.1 volts, -5.2; peak af grid-No.1

117L7/ M7GT

volts, 5.2; plate ma., 43; grid-No.2 ma., 4 (zero-signal); 5.5 (maximum-signal); plate input, 6 max watts; grid-No.2 dissipation, 1 max watt; plate resistance (approx.), 17000 ohms; transconductance, 5300 umhos; load resistance, 4000 ohms; total harmonic distortion, 5 per cent; maximum-signal power output, 0.85 watt. Type 117L7/M7-GT is used principally for renewal purposes.

RECTIFIER—BEAM POWER TUBE

Glass octal type used as combined halfwave rectifier and output amplifier in ac/dc receivers. Outline 14E, OUTLINES SECTION. Tube requires octal socket and may be mounted in any position. Heater volts (ac/dc), 117: amperes, 0.09. Maximum ratings of rectifier unit as half-wave rectifier: peak inverse plate volts, 350 max; peak plate ma., 450 max; dc output ma., 75 max; peak heater-cathode volts (heater

117N7GT

negative with respect to cathode), 175 max. Typical operation with capacitor-input filter: ac plate supply volts (rms), 177; minimum total effective plate-supply impedance, 15 ohms; dc output ma., 75; dc output volts at input to filter, 122. Typical operation of beam power unit as class A_1 amplifier: plate and grid-No.2 volts, 100 (117 max); grid-No.1 volts, -6; peak af grid-No.1 volts, 6; plate ma., 51; grid-No.2 ma., 5; plate dissipation, 5.5 max watts; grid-No.2 input, 1 max watt; plate resistance (approx.), 16000 ohms; transconductance, 7000 µmhos; load resistance, 3000 ohms; total harmonic distortion, 6 per cent; maximum-signal power output, 1.2 watts. This type is used principally for renewal purposes.





RECTIFIER—BEAM POWER TUBE

Glass octal type used as combined halfwave rectifier and output tube. Outline 14E, OUTLINES SECTION. Tube requires octal socket. Heater volts (ac/dc), 117; amperes, 0.09. This type is electrically identical with glassoctal type 117L7/M7-GT. Type 117P7-GT is used principally for renewal purposes.

HALF-WAVE VACUUM RECTIFIER

Miniature type used in power supply of ac /dc battery radio receivers. The heater is designed for operation directly across a 117-volt ac or dc supply line. Outline 7C, OUTLINES SECTION. Tube requires miniature seven-contact socket. This tube, like other power-handling tubes, must be adequately ventilated. Heater volts (ac/dc), 117; amperes, 0.04. Maximum ratings for half-wave rectifier service: 117P7GT

117Z3

peak inverse plate volts, 330 max; peak plate ma., 540 max; dc output ma., 90 max; peak heater-cathode volts: heater negative with respect to cathode, 175 max; heater positive with respect to cathode, 100 max. This type is used principally for renewal purposes.

NC (3 H(2 1 8

HALF-WAVE VACUUM RECTIFIER

Glass octal type used in power supply of ac/dc/battery radio receivers. Maximum overall length, 3 inches; maximum diameter, 1-5/16 inches. Tube requires octal socket. Heater volts (ac/dc), 117; amperes, 0.04. Maximum ratings as half-wave rectifier: peak inverse plate volts, 350 max; peak plate ma., 540 max; peak heatercathode volts, 175 max. Typical operation with capacitor-input filter: ac plate supply volts

117Z4GT


(rms), 117; minimum total effective plate-supply impedance, 30 ohms; dc output ma., 90. This is a DISCONTINUED type listed for reference only.

467

RCA Receiving Tube Manual

VACUUM RECTIFIER-DOUBLER

Glass octal type used as half-wave rectifier or voltage doubler in ac/dc receivers. Outline 14C, OUTLINES SECTION. Tube requires octal socket and may be mounted in any position. This type may be supplied with pin No.1 omitted. Heater volts (ac/dc), 117; amperes, 0.075. Maximum ratings: peak inverse plate volts, 700 max; peak plate ma. per plate, 360 max; dc output ma. per plate, 60 max; peak heater-



cathode volts, 350 max. Typical operation as half-wave rectifier with capacitor-input filter or as halfwave or full-wave voltage doubler: ac plate supply volts per plate (rms), 117; filter-input capacitor, 50 μ f; minimum total effective plate-supply impedance per plate, 15 (30 for half-wave doubler service); dc output ma. per plate, 60. This type is used principally for renewal purposes.

SHARP-CUTOFF PENTODE

Miniature type used as audio amplifier in applications requiring reduced microphonics, leakage noise, and hum. Especially useful in the input stages of medium-gain public-address



systems, home sound recorders, and general-purpose audio systems. Outline 8B, OUTLINES SECTION. Tube requires miniature nine-contact socket and may be mounted in any position. For operation as resistance-coupled amplifier, refer to RESISTANCE-COUPLED AMPLIFIER SECTION.

| Heater Voltage (ac/dc) | 6.3 0.15 | volts |
|--|-------------|-------|
| DIRECT INTERELECTRODE CAPACITANCES: | | |
| Pentode Connection: | | |
| Grid No.1 to Plate | 0.11 max | pf |
| Grid No.1 to Cathode, Heater, Grid No.2, and Grid No.3 | 2.7 | pf |
| Plate to Cathode, Heater, Grid No.2, and Grid No.3 | 2.4 | pf |
| Triode Connection*: | | |
| Grid No.1 to Plate | 1.4 | pf |
| Grid No.1 to Cathode and Heater | 1.4 | pf |
| Plate to Cathode and Heater | 0.85 | pf |
| * Crid No 2 and grid No 2 connected to plate | | |


* Grid No.2 and grid No.3 connected to plate.

117**Z6GT**

5879

CLASS A1 AMPLIFIER

| Maximum Ratings, (Design-Maximum Values): | Triode Connection* | Pentode Connection | |
|---|-----------------------|-----------------------|-------|
| PLATE VOLTAGE | 275 max | 330 max | volts |

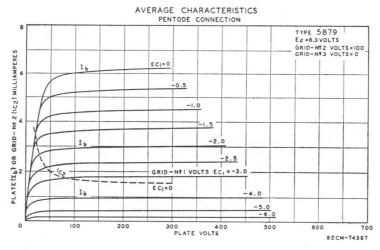


Technical Data

| | Triode Connection* | Pentode Connection | |
|---|-----------------------------|------------------------------|----------------------|
| GRID-NO.2 (SCREEN-GRID) VOLTAGE | - | See cur 330 max | ve page 70 volts |
| GRID-No.1 (CONTROL-GRID) VOLTAGE: Negative-bias value. Positive-bias value. | -55 max 0 max 1.7 max | -55 max 0 max 1.25 max | volts |
| PLATE DISSIPATION. GRID-NO.2 INPUT: For grid-No.2 voltages up to 165 volts | | 0.25 max | watts |
| For grid-No.2 voltages between 165 and 330 volts PEAK HEATER-CATHODE VOLTAGE: | - | See cur | ve page 70 |
| Heater negative with respect to cathode | 100 max 100 max | 100 max 100 max | volts |
| Characteristics: | | | |
| Plate Voltage | 250 - Connec | 250 ted to cathod | volts e at socket |
| Grid-No.2 Voltage – | -8 | 100 | volts |
| Amplification Factor | 21 | -3 | volts |
| Plate Resistance (Approx.) 0.017 Transconductance 1240 | $0.0137 \\ 1530$ | $\frac{2}{1000}$ | megohms µmhos |
| Grid-No.1 Voltage (Approx.) for plate current of 10 µa – | - | -8 | volts |
| Plate Current. 2.2 Grid-No.2 Current. – | 5.5 | $1.8 \\ 0.4$ | ma ma |
| Maximum Circuit Value: | | | |
| Grid-No.1-Circuit Resistance | | 2.2 max | megohms |

* Grid No.2 and grid No.3 connected to plate.

AVERAGE CHARACTERISTICS

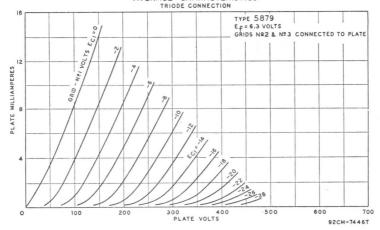



BEAM POWER TUBE

Glass octal type used in the output stages of radio receivers and audio amplifiers, particularly in the push-pull stages of high-fidelity audio amplifiers. Maximum dimensions: over-all length,

5881

3-15/32 inches; seated height, 2-29/32 inches; diameter, 1-7/16 inches. Tube requires octal socket and may be mounted in any position. For typical operation as push-pull class A₁, class AB₁ (within maximum ratings), and class AB₂ amplifier, and for curves of average plate characteristics, refer to type 6L6-GC. Heater volts (ac/dc), 6.3; amperes, 0.9.

RCA Receiving Tube Manual =

CLASS A1 AMPLIFIER

| Maximum Ratings, (Design-Center Values): | | riode nection* | | ntode nection | |
|---|--|-------------------|---------------|---|-------------------|
| PLATE VOLTAGE. | 40 | 0 max | | 0 max | volts |
| GRID-NO.2 (SCREEN-GRID) VOLTAGE PLATE DISSIPATION | 2 | - 6 max | | 0 max 3 max | volts |
| GRID-NO.2 INPUT. | | - | | 3 max | watts |
| PEAK HEATER-CATHODE VOLTAGE: Heater negative with respect to cathode | 20 | 0 max | 20 | 0 max | volts |
| Heater positive with respect to cathode | | 0 max | | 0 max | volts |
| | | | | | |
| Typical Operation and Characteristics: | | | | | |
| Plate Voltage | 250 | 300 | 250 | 350 | volts |
| Grid-No.2 Voltage | 10 | | 250 | 250 | volts |
| Grid-No.1 (Control-Grid) Voltage Peak AF Grid-No.1 Voltage | $^{-18}_{18}$ | $^{-20}_{20}$ | $^{-14}_{14}$ | $^{-18}_{18}$ | volts volts |
| Zero-Signal Plate Current. | 52 | 78 | 75 | 53 | ma |
| Maximum-Signal Plate Current. | 58 | 85 | 80 | 65 | ma |
| Zero-Signal Grid-No.2 Current | - | - | 4.3 | $2.5 \\ 8.5$ | ma |
| Maximum-Signal Grid-No.2 Current Amplification Factor | 8 | _ | 7.6 | 8.5 | ma |
| Plate Resistance (Approx.). | - | - | 30000 | 48000 | ohms |
| Transconductance | 5250 | - | 6100 | 5200 | µmhos |
| Load Resistance. | 4000 | 4000 | $2500 \\ 10$ | 4200 | ohms |
| Total Harmonic Distortion Maximum-Signal Power Output | $\begin{array}{c} 6\\ 1.4 \end{array}$ | $5.5 \\ 1.8$ | 6.7 | $\begin{smallmatrix}&13\\11.3\end{smallmatrix}$ | per cent watts |
| | | | | | |
| Maximum Circuit Values: | | | | | |
| Grid-No.1-Circuit Resistance: | | | | | |

| For fixed-bias operation | 0.1 max | |
|---------------------------------|---------|--------|
| For cathode-bias operation | 0.5 max | megohm |
| * Grid No.2 connected to plate. | | |

BEAM POWER TUBE

6973

Characteristics:

Miniature type used as power amplifier in compact high-fidelity audio equipment. Tube features linear operation over a wide range of power, high power sensitivity, high stability, and



low heater power, and is capable of delivering high power output at low distortion. Double base-pin connections for both grid No.1 and grid No.2 provide cool operation of grids and thus minimize grid emission and permit use of high values of grid-circuit resistance to reduce driving power. Outline 8E,OUTLINES SECTION. Tube requires miniature nine-contact socket and may be mounted in any position.

| Heater Voltage (ac/dc) | $\begin{array}{c} 6.3 \\ 0.45 \end{array}$ | volts |
|--|--|----------------|
| DIRECT INTERELECTRODE CAPACITANCES: Grid No.1 to Plate. Grid No.1 to Cathode, Heater, Grid No.2, and Grid No.3. Plate to Cathode, Heater, Grid No.2, and Grid No.3. | | pf pf pf |

CLASS A1 AMPLIFIER

| Plate Voltage Grid-No.2 (Screen-Grid) Voltage | $250 \\ 250$ | volts |
|--|------------------|-------------|
| | | volts |
| Plate Resistance (Approx.) | | ohms |
| Transconductance | 4800 | μmhos |
| Plate Current. | $\frac{46}{3.5}$ | ma |
| Grid-No.2 Current Grid-No.1 Voltage (Approx.) for plate current of 100 µa | -40 | ma volts |

PUSH-PULL CLASS AB1 AMPLIFIER

Maximum Ratings, (Design-Maximum Values):


| PLATE VOLTAGE. GRID-N0.2 VOLTAGE. | 440 max 330 max | volts |
|--------------------------------------|--------------------|-------|
| PLATE DISSIPATION. | 12 max | watts |
| GRID-NO.2 INPUT. | 2 max | watts |

—— Technical Data =

AVERAGE CHARACTERISTICS WITH EC2 AS VARIABLE 250 TYPE 6973 E = 6.3 VOLTS GRID-NºI VOLTS=0 200 GRID-Nº 2 VOLTS EC2=300 PLATE MILLIAMPERES 250 Ec2=200 150 Ec2 = 100 50 0 50 100 150 200 250 300 350 400 PLATE VOLTS 92CM-9380T PEAK HEATER-CATHODE VOLTAGE: Heater negative with respect to cathode..... 200 max volts Heater positive with respect to cathode..... 200 max volts °C BULB TEMPERATURE (At hottest point) 250 max Typical Operation, (Values are for two tubes): Fixed Bias Cathode Bias Plate Supply Voltage. Grid-No.2 Supply Voltage. Grid-No.1 Voltage. Cathode-Bias Resistor Peak AF Grid-No.1-to-Grid-No.1 Voltage.... Zero-Signal Plate Current. Maximum-Signal Plate Current. 250 350 400 300 310 volta 290 250 280 300 310 volts -15 -22 -25 volts 230 270 ohms 30 44 50 48 55 volts 92 58 50 80 ma 105 106 107 96 92 ma Zero-Signal Grid-No.2 Current. Maximum-Signal Grid-No.2 Current. 3.5 $2.5 \\ 13.7$ 7 6 5 ma 16 14 14 ma Effective Load Resistance (Plate-to-plate)..... 7500 8000 5500 6000 ohms 8000 2 1.5 2 2 4 per cent 12.5 20 24 15 watts Maximum Circuit Values: Grid-No.1-Circuit Resistance: 0.5 maxFor fixed-bias operation..... megohm For cathode-bias operation..... 1 max megohm

" The dc component must not exceed 100 volts.



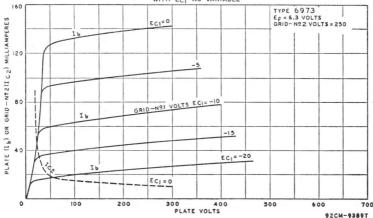

471

RCA Receiving Tube Manual

PUSH-PULL CLASS AB1 AMPLIFIER

Grid No.2 of Each Tube Connected to Tap on Plate Winding of Output Transformer Maximum Ratings, (Design-Maximum Values):

| (Doorgh Maarheant Varaco). | | | |
|--|------------|--------------|----------|
| PLATE AND GRID-NO.2 SUPPLY VOLTAGE | | 410 max | volts |
| PLATE DISSIPATION. | | 12 max | watts |
| GRID-NO.2 INPUT | | 1.75 max | watts |
| PEAK HEATER-CATHODE VOLTAGE: | | | |
| Heater negative with respect to cathode | | 200 max | volts |
| Heater negative with respect to cathode | | 200 max | |
| Heater positive with respect to cathode | | 200 max | volts |
| BULB TEMPERATURE (At hottest point) | | 250 max | °C |
| | | | |
| Typical Operation, (Values are for two tubes): | Fixed Bias | Cathode Bias | |
| Plate Supply Voltage | 375 | 370 | volts |
| Grid-No.2 Supply Voltage | * | # | volts |
| Grid-No.1 Voltage | -33.5 | <i>a</i> | volts |
| Cathode-Bias Resistor. | | 355 | ohms |
| Peak AF Grid-No.1-to-Grid-No.1 Voltage | 67 | 62 | volts |
| Teak AF Ghu-No.1-to-Ghu-No.1 Voltage | | | |
| Zero-Signal Cathode Current | 62 | 74 | ma |
| Maximum-Signal Cathode Current | 95 | 84 | ma |
| Effective Load Resistance (Plate-to-plate) | 12500 | 13000 | ohms |
| Total Harmonic Distortion | 1.5 | 1.2 | per cent |
| Maximum-Signal Power Output | 18.5 | 15 | watts |
| And and a short output the territer the territer territ | 10.0 | 10 | |

Maximum Circuit Values:*

7025

7027

7027A

| Grid-No.1-Circuit Resistance: For fixed-bias operation | 0.5 max | megohm |
|---|---------|--------|
| For cathode-bias operation | | megohm |
| The dc component must not exceed 100 volts. | | |


* Obtained from taps on the primary winding of the output transformer. The taps are located on each side of the center tap (B+) so as to apply 50 per cent of the plate signal voltage to grid No.2 of each output tube.

Obtained from taps on the primary winding of the putput transformer. The taps are located on each side of the center tap (B+) so as to supply 43 per cent of the plate signal voltage to grid No.2 of each output tube.

•The type of input-coupling network used should not introduce too much resistance in the grid-No.1 circuit. Transformer- or impedance-coupling devices are recommended.

HIGH-MU TWIN TRIODE

Miniature type used as phase inverter or resistance-coupled amplifier in high-quality, high-fidelity audio amplifiers where low noise and hum are primary considerations. Outline



8B, OUTLINES SECTION. This type is identical with miniature type 12AX7 except that it has a controlled equivalent noise and hum characteristic. For operation as resistance-coupled amplifier, RESISTANCE-COUPLED AMPLIFIER SECTION.

Equivalent-Noise and Hum Voltage Referenced to Grid, (Each Unit):

Average Value (rms) † ... 1.8 µvolts Maximum Value (rms) • 7 µvolts † Measured in "true rms" units under following conditions: heater volts (ac), 6.3 (parallel connection); center tap of heater transformer connected to ground; plate supply volts, 250; plate load resistor, 2700 ohms; cathode-bypass capacitor, 100 μ f; grid resistor, 0 ohms; and amplifier covering frequency range between 25 to 10000 cycles per second.

• Same conditions as for "Average Value" except: cathode resistor is unbypassed and grid resistor. 0.05 megohm.

BEAM POWER TUBE

Glass octal types used in push-pull power amplifier circuits of high-fidelity audio equipment. Tubes provide high power sensitivity and high stability and are capable of delivering high power



output at low distortion. Double base-pin connections for both grid No.1 and grid No.2 provide for flexibility of circuit arrangement and also cool operation of the grids with the result that reverse grid current is minimized. Outline 19D, OUT- Technical Data

LINES SECTION, except diameter is 1-5/8 inches max. Tubes require octal socket and may be mounted in any position. It is especially important that these tubes, like other power-handling tubes, be adequately ventilated. Type 7027 is a DISCONTINUED type listed for reference only.


| HEATER VOLTAGE (AC/DC) | | | volts ampere |
|---|----------------|---------|-----------------|
| DIRECT INTERELECTRODE CAPACITANCES (Approx.): | | | |
| Grid No.1 to Plate | | 1.5 | pf |
| Grid No.1 to Cathode, Heater, Grid No.2, and G | rid No.3 | 10 | pf |
| Plate to Cathode, Heater, Grid No.2, and Grid N | | | pf |
| CLASS A1 AA | APLIFIER | | |
| Characteristics: | | | |
| Plate Voltage | | 250 | volts |
| Grid-No.2 (Screen-Grid) Voltage | | | volts |
| Grid-No.1 (Control-Grid) Voltage | | | volts |
| Plate Resistance (Approx.) | | | ohms |
| Transconductance | | | μmhos |
| Plate Current. | | | ma |
| Grid-No.2 Current | | | ma |
| | | | |
| PUSH-PULL CLASS | 1 | | |
| Maximum Ratings for 7027-A, (Design-Maximum V | alues): | | |
| PLATE VOLTAGE | | 600 max | volts |
| GRID-NO.2 VOLTAGE | | 500 max | volts |
| PLATE DISSIPATION | | | watts |
| GRID-NO.2 INPUT. | | 5 max | watts |
| PEAK HEATER-CATHODE VOLTAGE: | | | |
| Heater negative with respect to cathode | | | volts |
| Heater positive with respect to cathode | | 200 max | volts |
| Typical Operation for 7027-A, (Values are for two t | ubes): | | |
| Fixed | | le Bias | |
| Plate Supply Voltage 400 450 | 540 400 3 | 80 425 | volts |
| Grid-No.2 Supply Voltage | 400 300 3 | 80 425 | volts |
| Grid-No.1 Voltage | •38• | | olts |
| Cathode-Bias Resistor | - 200 1 | 30 200 | ohms |
| Peak AF Grid-No.1-to-Grid-No.1 | | | |
| Voltage | 76 57 68 | .5 86 | volts |
| Zero-Signal Plate Current | 5 100 112 1 | 38 150 | ma |
| Maximum-Signal Plate Current 152 19 | 4 220 128 1 | 70 196 | ma |
| Zero-Signal Grid-No.2 Current | 4 5 7 5 | .6 8 | ma |
| Maximum-Signal Grid-No.2 Current. 17 19. | 2 21.4 16 | 20 20 | ma |
| Effective Load Resistance (Plate-to- | | | |
| Plate) | 0 6500 6600 45 | 00 3800 | ohms |
| | | | |

AVERAGE PLATE CHARACTERISTICS TYPE 7027-A E = 6.3 VOLTS GRID - NºI VOLTS = 0 MILLIAMPERES GRID - Nº 2 VOLTS EC2 = 250 PLATE 0 Ec2=50 PLATE VOLTS

92CM-10132T

| RCA Receiving Tube Manual = | | |
|---|--|--|
| Total Harmonic Distortion21.5223.5Maximum-Signal Power Output3450763236 | 4 44 | per cent watts |
| Maximum Circuit Values: Grid-No.1-Circuit Resistance: For fixed-bias operation. For cathode-bias operation. The dc component must not exceed 100 volts. The type of input coupling network used should not introduce too much resi circuit. Transformer- or impedance-coupling devices are recommended. | 0.1 max 0.5 max istance in the | megohm megohm grid-No.1 |
| PUSH-PULL CLASS AB1 AMPLIFIER Grid No.2 of Each Tube Connected to Tap on Plate Winding of Output | t Transformer | |
| Maximum Ratings, for 7027-A, (Design-Maximum Values): PLATE AND GRID-NO.2 SUPPLY VOLTAGE. PLATE DISSIPATION. GRID-NO.2 INPUT. PEAK HEATER-CATHODE VOLTAGE: Heater negative with respect to cathode. Heater positive with respect to cathode. | 600 max 35 max 4.5 max 200 max 200 max | volts watts volts volts |
| Typical Operation (Values are for two tubes): Plate Supply Voltage. Grid-No.2 Supply Voltage. Cathode Bias Resistor. Peak AF Grid-No.1-to-Grid-No.1 Voltage. Zero-Signal Cathode Current. Maximum-Signal Cathode Current. Effective Load Resistance (Plate to plate). Total Harmonic Distortion. Maximum-Signal Power Output. | $410 \\ * \\ 220 \\ 68 \\ 134 \\ 155 \\ 8000 \\ 1.6 \\ 24$ | volts volts ohms volts ma ohms per cent watts |
| Maximum Circuit Value: Grid-No.1-Circuit Resistance: For cathode-bias operation The dc component must not exceed 100 volts. | | megohm |
| * Obtained from taps on the primary winding of the output transformer. The t side of the center tap (\mathbf{B}_{+}) so as to apply 42 per cent of the plate signal volta | | |


* Obtained from taps on the primary winding of the output transformer. The taps are located on each side of the center tap (B+) so as to apply 43 per cent of the plate signal voltage to grid No.2 of each output tube.

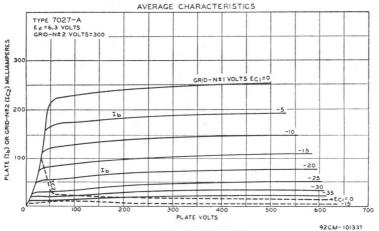

POWER PENTODE

7189

Miniature type used as power amplifier tube in high-fidelity audio equipment. Outline 8E, OUTLINES SEC-TION. Tube requires miniature ninecontact socket and may be mounted in any position. Heater volts (ac/dc), 6.3; amperes, 0.76.



Technical Data

CLASS A1 AMPLIFIER

| end deletistes. | | |
|-----------------------------------|-------|-------|
| Plate Voltage | 250 | volts |
| Grid-No.2 (Screen-Grid) Voltage | 250 | volts |
| Grid-No.1 (Control-Grid) Voltage | -7.3 | volts |
| Mu-Factor, Grid No.2 to Grid No.1 | 19.5 | |
| Plate Resistance (Approx.) | 40000 | ohms |
| Transconductance | 11300 | μmhos |
| Plate Current | 48 | ma |
| Grid-No.2 Current | 5.5 | ma |
| | | |

PUSH-PULL CLASS AB1 AMPLIFIER

| Maximum Ratings, (Design-Center Values): | | Special Connection | |
|--|---------|-----------------------|----------|
| Plate Voltage | 400 max | 375 max | volts |
| GRID-NO.2 VOLTAGE. | 300 max | ٠ | volts |
| CATHODE CURRENT | 65 max | 65 max | ma |
| PLATE DISSIPATION | 12 max | 12 max | watts |
| ZERO-SIGNAL GRID-NO.2 INPUT. | 2 max | 2 max | watts |
| MAXIMUM-SIGNAL GRID-NO.2 INPUT | 4 max | 4 max | watts |
| PEAK HEATER-CATHODE VOLTAGE: | | | |
| Heater negative with respect to cathode | 100 max | 100 max | volts |
| Heater positive with respect to cathode | 100 max | 100 max | volts |
| | | Grid-No.2 Special | |
| Typical Operation, (Values are for two tubes): | | Connection• | |
| Plate Supply Voltage | - | 375 | volts |
| Plate Voltage | 400 | - | volts |
| Grid-No.2 Supply Voltage | - | | |
| Grid-No.2 Voltage | 300 | • | volts |
| Grid-No.1 Voltage | -15 | - | volts |
| Cathode-Bias Resistor | - | 220 | ohms |
| Peak AF Grid-No.1 Voltage | 14.8 | 17.7 | volts |
| Zero-Signal Plate Current | 15 | 70 | ma |
| Maximum-Signal Plate Current | 105 | 81 | ma |
| Zero-Signal Grid-No.2 Current. | 1.6 | ٠ | ma |
| Maximum-Signal Grid-No.2 Current | 25 | • | ma |
| Effective Load Resistance (Plate-to-plate) | 8000 | 11000 | ohms |
| Total Harmonic Distortion | 4 | 3 | per cent |
| Maximum-Signal Power Output | 24 | 16.5 | watts |
| | | | |

 Maximum Circuit Values:
 Fixed Bias
 Cathode Bias

 Grid-No.1-Circuit Resistance.
 0.3 max
 1 max megohm

Grid No.2 of each tube connected to tap on plate winding of output transformer.
Obtained from taps on primary winding of the output transformer. The taps are located on each side of the center tap (B+) so as to supply 43 per cent of the plate signal voltage to grid No.2 of each output tube.



Characteristics

MEDIUM-MU TRIODE— SHARP-CUTOFF PENTODE

Miniature type used in a wide variety of applications in high-quality, high-fidelity audio equipment, particularly in phase-splitters, tone-control amplifiers, and high-gain voltage

7199

Grid-No.2

amplifiers in which low hum and reduced noise are required. Outline 8B, OUT-LINES SECTION. Tube requires miniature nine-contact socket and may be mounted in any position. For operation as resistance-coupled amplifier, refer to RESISTANCE-COUPLED AMPLIFIER SECTION. In direct-coupled voltageamplifier phase-splitter circuits, the pentode unit should drive the triode unit.

| HEATER VOLTAGE (AC/DC) | 6.3 | volts |
|------------------------|------|--------|
| HEATER CURRENT. | 0.45 | ampere |

DIRECT INTERELECTRODE CAPACITANCES: Triode Unit:

| Grid to Plate. Grid to Cathode and Heater. Plate to Cathode and Heater. | $\begin{smallmatrix}&2\\2.3\\0.3\end{smallmatrix}$ | pf pf pf |
|---|--|----------------|
| Pentode Unit: Grid No.1 to Plate. Grid No.1 to Cathode, Heater, Grid No.2, Grid No.3, and Internal Shield. Plate to Cathode, Heater, Grid No.2, Grid No.3, and Internal Shield | 0.06 max 5 2 | pf pf pf |

Equivalent-Noise and Hum Voltage Referenced to Grid:

| | Triode Unit | Pentode Unit | |
|---------------------|-------------|--------------|--------|
| Median Value (rms) | 10† | 35 • | µvolts |
| Maximum Value (rms) | | 100. | µvolts |
| | | | |


† Measured in "true rms" units under the following conditions: heater volts (ac), 6.3; center tap of heater transformer connected to ground; plate-supply volts, 250; plate load resistor, 0.1 megohm; cathode resistor, 1500 ohms; grid resistor, 0.05 megohm; and amplifier covering frequency range between 25 and 10000 cycles per second.

• Same conditions as for triode unit except: grid-No.2 supply volts, 250; grid-No.2 resistor, 0.33 megohm; grid-No.2-bypass capacitor, 0.22 µf; cathode resistor, 1200 ohms; and grid-No.1 resistor, 0.05 megohm.

CLASS A1 AMPLIFIER

| Maximum Ratings, (Design-Maximum Values): | Triode Unit | Pentode Unit | |
|---|----------------|-----------------|---------|
| PLATE VOLTAGE | 330 max | 330 max | volts |
| GRID-NO.2 (SCREEN-GRID) VOLTAGE | - | See curve | page 70 |
| GRID-NO.2 SUPPLY VOLTAGE. | | 330 max | volts |
| GRID-NO.1 (CONTROL-GRID) VOLTAGE, Positive-bias value | 0 max | 0 max | volts |
| PLATE DISSIPATION | 2.4 max | 3 max | watts |
| GRID-NO.2 INPUT: | | | |
| For grid-No.2 voltages up to 165 volts | - | 0.6 max | watt |
| For grid-No.2 voltages between 165 and 330 volts | - | See curve | page 70 |
| PEAK HEATER-CATHODE VOLTAGE: | | | |
| Heater positive with respect to cathode | 200 max | 200 max | volts |
| Heater negative with respect to cathode | 200 max | 200 max | volts |
| | | | |

| Characteristics: | Triode Unit | | tode nit | |
|---|----------------|------|-------------|------------|
| Plate Supply Voltage | 215 | 100 | 220 | volts |
| Grid-No.2 Supply Voltage | - | 50 | 130 | volts |
| Grid-No.1 Voltage | -8.5 | - | - | volts |
| Cathode-Bias Resistor | - | 1000 | 62 | ohms |
| Amplification Factor | 17 | | - | |
| Plate Resistance (Approx.) | 0.0081 | 1 | 0.4 | meghom |
| Transconductance | 2100 | 1500 | 7000 | μ mhos |
| Grid-No.1 Voltage (Approx.) for plate current of 10 μ a | -40 | -4 | - | volts |
| Plate Current | 9 | 1.1 | 12.5 | ma |
| Grid-No.2 Current | - | 0.35 | 3.5 | ma |

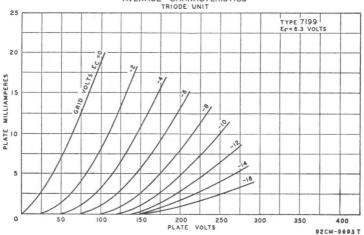

AVERAGE CHARACTERISTICS


Maximum Circuit Values:


Grid-No.1-Circuit Resistance:*

Triode Unit Pentode Unit For fixed-bias operation 0.5 max 1.0 max For cathode-bias operation.....

The dc component must not exceed 100 volts.

* If either unit is operated at maximum rated conditions, grid-No.1-circuit resistance for both units should not exceed the stated values.

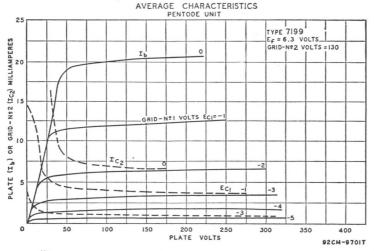



DUAL TRIODE

Miniature type used for combined first- and second-stage audio preamplification in high-fidelity phonograph or tape equipment. Tube has high-mu unit and medium-mu unit. Outline 8B.

7247

0.25 max 1.0 max

megohm

megohm

OUTLINES SECTION. Tube requires miniature nine-contact socket and may be operated in any position. Heater volts (ac/dc), 12.6 (series), 6.3 (parallel); amperes, 0.15 (series), 0.3 (parallel).

CLASS A1 AMPLIFIER

| Maximum Ratings, (Design-Maximum Values): | | | Unit No.1 | Unit No.2 | |
|--|-------|---------|------------------|------------------|---------|
| PLATE VOLTAGE: | | | 330 max | 330 max | volts |
| Negative-bias value | | | 55 max | 55 max | volts |
| Positive-bias value | | | 0 max | 0 max | volts |
| CATHODE CURRENT | | | - | 22 max | ma |
| PLATE DISSIPATION | | | 1.2 max | 3 max | watts |
| PEAK HEATER-CATHODE VOLTAGE: | | | | | |
| Heater negative with respect to cathode | | | 200 max | 200 max | volts |
| Heater positive with respect to cathode | | | $200^{\circ}max$ | $200^{\circ}max$ | volts |
| | | | | | |
| Characteristics: | Unit | No.1 | Unit | No.2 | |
| Plate Voltage | 100 | 250 | 100 | 250 | volts |
| Grid Voltage | · -1 | -2 | 0 | -8.5 | volts |
| Amplification Factor | 100 | 100 | 20 | 17 | |
| Plate Resistance (Approx.) | 80000 | 62500 | 6500 | 7700 | ohms |
| Transconductance | 1250 | 1600 | 3100 | 2200 | µmhos |
| Plate Current | 0.5 | 1.2 | 11.8 | 10.5 | ma |
| Grid Voltage (Approx.) for plate current of 10 μ a | - | - | - | -24 | volts |
| Maximum Circuit Values: | | | Unit | Unit | |
| Grid-Circuit Resistance: | | | No.1 | No.2 | |
| | | | | | |
| For fixed-bias operation | | | 15 max | 0.5 max | megohms |
| For cathode-bias operation | | • • • • | - | 1 max | megohm |
| | | | | | |

| Hum | Output | Voltage: |
|-----|--------|----------|
|-----|--------|----------|

| Average Value (rms, cathode bypassed) | 1.8 | µvolts |
|--|-----|--------|
| Maximum Value (rms, cathode unbypassed) | 7 | µvolts |
| ° The dc component must not exceed 100 volts | | |

The dc component must not exceed 100 volts.


• Measured in "true rms" units under the following conditions: heater volts (ac), 6.3 (parallel connection); center tap of heater transformer connected to ground; dc plate supply volts, 250; plate load resistor, 0.1 megohm; cathode resistor, 2700 ohms; cathode-bypass capacitor, 100 μ f; grid resistor, 0 ohms; amplifier covering frequency range of 25 to 10000 cps.

• Same conditions as above, except that cathode resistor is unbypassed and grid resistor is 0.05 megohm.

POWER PENTODE

7355

Glass octal type used in the power-output stage of high-fidelity audiofrequency amplifier systems. Outline 14E, OUTLINESSECTION. Tube requires octalsocket and may be mounted in any position. Heater volts (ac/dc), 6.3; amperes, 0.8.



CLASS A1 AMPLIFIER


Maximum Ratings, (Design-Maximum Values):

| g., | | | |
|--|-------------|-------------------|------------|
| PLATE VOLTAGE | | 500 max | volts |
| GRID-NO.2 (SCREEN-GRID) VOLTAGE | | 400 max | volts |
| GRID-NO.1 (CONTROL-GRID) VOLTAGE, Positive-bias value | | 0 max | volts |
| PLATE DISSIPATION | | 18 max | watts |
| DC GRID-NO.2 INPUT | | $3.5 \bullet max$ | watts |
| Average Cathode Current | | 100 max | ma |
| PEAK HEATER-CATHODE VOLTAGE: | | | |
| Heater negative with respect to cathode | | 200 max | volts |
| Heater positive with respect to cathode | | 200 max | volts |
| Typical Operation and Characteristics: | | | |
| Plate Voltage | | 250 | volts |
| Grid-No.2 Voltage | | 225 | volts |
| Grid-No.1 Voltage | | -15 | volts |
| Peak AF Grid-No.1 Voltage | | -15 15 | volts |
| Plate Resistance (Approx.) | | 42000 | ohms |
| Transconductance | | 42000 | |
| Zero-Signal Plate Current. | | 62 | μ mhos |
| Maximum Signal Plate Current. | | 74 | ma |
| Zero-Signal Grid-No.2 Current | | 3.2 | ma |
| Maximum-Signal Grid-No.2 Current. | | 16.5 | ma |
| Load Resistance. | | 2500 | ohms |
| Total Harmonic Distortion (Approx.) | | 15 | per cent |
| Maximum-Signal Power Output | | 9 | watts |
| Grid-No.1 Voltage (Approx.) for plate current of 500 µa | | -35 | volts |
| Maximum Circuit Values: | | | |
| Grid-No.1-Circuit Resistance: | | | |
| For fixed-bias operation | | 0.3 max | megohm |
| For cathode-bias operation | | 1 max | megohm |
| | | 1 11002 | megonin |
| PUSH-PULL CLASS AB ₁ AMPLIF | IER | | |
| Maximum Ratings, (Same as for Class A1 amplifier): | | | |
| Typical Operation (Values are for two tubes): | | | |
| Plate Voltage | 300 | 400 | volts |
| Grid-No.2 Voltage | 250 | 300 | volts |
| Grid-No.1 Voltage | -21 | -34 | volts |
| Peak AF Grid-No.1 Voltage | 42 | 60 | volts |
| Zero-Signal Plate Current | 100 | 56 | ma |
| Maximum-Signal Plate Current | 185 | 175 | ma |
| Zero-Signal Grid-No.2 Current | 5.5 | 3.5 | ma |
| Maximum-Signal Grid-No.2 Current | 24 | 24 | ma |
| Effective Load Resistance (Plate-to-plate) | 4000 | 5000 | ohms |
| Total Harmonic Distortion | 2 | 6 | per cent |
| Maximum-Signal Power Output | 28.5 | 40 | watts |
| · Grid-No 2 input may reach 7 watte during peak lovels of speech | and music a | anola | |

Grid-No.2 input may reach 7 watts during peak levels of speech and music signals.

The dc component must not exceed 100 volts.

= Technical Data



BEAM POWER TUBE

Glass octal type used as output amplifier tube in high-quality sound systems. Outline 14C, OUTLINES SEC-TION. Tube requires octal socket and may be mounted in any position. Heater volts (ac/dc), 6.3; amperes, 0.45.

7408

CLASS A. AMPLIFIER

| Maximum Ratings, (Design-Maximum Values): | | | |
|---|----|-----------------|-------|
| PLATE VOLTAGE. | | 350 max | volts |
| GRID-NO.2 (SCREEN-GRID) VOLTAGE | | 315 max | volts |
| GRID-NO.2 INPUT. | | 2.2 max | watts |
| PLATE DISSIPATION. | | 14 max | watts |
| PEAK HEATER-CATHODE VOLTAGE: | | | |
| Heater negative with respect to cathode | | 200 max | volts |
| Heater positive with respect to cathode | | 2 00 max | volts |
| Typical Operation and Characteristics: | | | |
| Plate Voltage | 60 | 250 | volts |

Plate Voltage

| riace voltage | 00 | 200 | VOIUS |
|----------------------------------|------|-------|----------|
| Grid-No.2 Voltage | 250 | 250 | volts |
| Grid-No.1 (Control-Grid) Voltage | 0 | -12.5 | volts |
| Peak AF Grid-No.1 Voltage | | 12.5 | volts |
| Zero-Signal Plate Current | 100• | 45 | ma |
| Maximum-Signal Plate Current | - | 47 | ma |
| Zero-Signal Grid-No.2 Current. | 22 | 4.5 | ma |
| Maximum-Signal Grid-No.2 Current | | 7 | ma |
| Plate Resistance (Approx.) | | 50000 | ohms |
| Transconductance | | 4100 | μmhos |
| Load Resistance | | 5000 | ohms |
| Total Harmonic Distortion | | 7 | per cent |
| Maximum-Signal Power Output | - | 4.5 | watts |
| | | | |


Maximum Circuit Values:

Grid-No.1 Circuit Resistance:

| For fixed-bias operation | 0.1 max | megohm |
|----------------------------|---------|--------|
| For cathode-bias operation | 0.5 max | megohm |
| | | |

The dc component must not exceed 100 volts.

• This value can be measured by a method involving a recurrent waveform such that the maximum ratings of the tube will not be exceeded.



SHARP-CUTOFF PENTODE

Miniature type used in compact audio equipment, especially in lowhum, low-microphonic, high-gain, resistance-coupled-amplifier applications. Outline 7B, OUTLINES SEC-

7543

TION. This type is identical with miniature type 6AU6 except that it has a controlled hum characteristic.

Hum Output Voltage:

| Average Value (rms, cathode bypassed) | 1.2† | millivolts |
|---|---------------|--------------|
| Average Value (rms, cathode unbypassed) | 0.9• | millivolt |
| † Measured in "true rms" units under the following conditions: heater volts | (ac), 6.3; ce | enter tap of |

Measured in "true rms" units under heater transformer connected to ground; plate and grid-No.2 supply volts, 250; plate load resistor, 0.27 megohm; grid No.3 and internal shield connected to cathode at socket; grid-No.2 resistor, 0.68 megohm; grid-No.1 resistor, 0.1 megohm; cathode resistor, 1000 ohms; grid resistor of following stage, 10 megohms; and stage gain, 340

• Same conditions as above except cathode resistor is unbypassed and stage gain is 110.

RCA Receiving Tube Manual =

POWER PENTODE

7591 Glass octal type used as audiofrequency power-output tube in highquality audio applications. Outline 14C, OUTLINES SECTION. Tube requires octal socket and may be mounted in any position. Heater volts (ac/dc),

6.3; amperes, 0.8.



CLASS A1 AMPLIFIER

Maximum Ratings, (Design-Maximum Values):

| PLATE VOLTAGE | 550 max | volts |
|---|----------------------|----------|
| | 440 max | volts |
| GRID-NO.2 (SCREEN-GRID) VOLTAGE | | |
| CATHODE CURRENT | 85 max | ma |
| PLATE DISSIPATION. | 19 max | watts |
| GRID-NO.2 INPUT. | 3.3°max | watts |
| PEAK HEATER-CATHODE VOLTAGE: | | |
| Heater negative with respect to cathode | 200 max | volts |
| Heater positive with respect to cathode | 200 [∎] max | volts |
| Typical Operation and Characteristics: | | |
| Plate Voltage | 300 | volts |
| Grid-No.2 Voltage. | 300 | volts |
| Grid-No.1 (Control-Grid) Voltage. | -10 | volts |
| Peak AF Grid-No.1 Voltage | 10 | volts |
| Zero-Signal Plate Current. | 60 | ma |
| Maximum-Signal Plate Current. | 75 | ma |
| Zero-Signal Grid-No.2 Current. | 8 | ma |
| Maximum-Signal Grid-No.2 Current. | 15 | ma |
| Triode Amplification Factor* | 16.8 | ma |
| | 29000 | ohms |
| Plate Resistance (Approx.). | | |
| Transconductance | 10200 | μmhos |
| Load Resistance | 3000 | ohms |
| Total Harmonic Distortion | 13 | per cent |
| Maximum-Signal Power Output | 11 | watts |
| Maximum Circuit Values: | | |
| Grid-No.1-Circuit Resistance: | | |
| For fixed-bias operation | 0.3 max | megohms |

For cathode-bias operation.

PUSH-PULL CLASS AB1 AMPLIFIER

Maximum Ratings: (Same as for Class A1 Amplifier)

| Typical Operation, (Values are for two tubes): | Fiz | red Bias | Cathode Bias | |
|---|-------|----------|--------------|----------|
| Plate Supply Voltage | 350 | 450 | 450 | volts |
| Grid-No.2 Supply Voltage | 350 | 400 | 400 | volts |
| Grid-No.1 Supply Voltage | -15.5 | -21 | - | volts |
| Cathode-Bias Resistor (Common to both cathodes) | - | - | 200 | ohms |
| Peak AF Grid-No.1-to-Grid-No.1 Voltage | 31 | 42 | 28 | volts |
| Zero-Signal Plate Current | 92 | 66 | 82 | ma |
| Maximum-Signal Plate Current | 130 | 144 | 94 | ma |
| Zero-Signal Grid-No.2 Current. | 13 | 9.4 | 11.5 | ma |
| Maximum-Signal Grid-No.2 Current | 28.6 | 30 | 22 | ma |
| Effective Load Resistance (Plate-to-plate) | 6600 | 6600 | 9000 | ohms |
| Total Harmonic Distortion | 2 | 1.5 | 2 | per cent |
| Maximum-Signal Power Output | 30 | 45 | 28 | watts |


• Grid-No.2 input may reach 6 watts during peak levels of speech and music signals.

The dc component must not exceed 100 volts.

* Triode connection, grid No.2 connected to plate.

BEAM POWER TUBE

Neonoval type used as af poweramplifier tube. Outline 11C, OUT-LINES SECTION. Tube requires neonoval nine-contact socket and may be mounted in any position. Heater volts (ac/dc), 50 volts; amperes, 0.15.



7695

Technical Data


CLASS A1 AMPLIFIER

| Maximum Ratings, (Design-Maximum Values): | | | | |
|---|-------|--------------------|----------|--|
| PLATE VOLTAGE | | 150 max | volts | |
| GRID-NO.2 (SCREEN-GRID) VOLTAGE | | 150 max | volts | |
| GRID-NO.2 INPUT | | 2.5 max | watts | |
| PLATE DISSIPATION. | | 16 max | watts | |
| PEAK HEATER-CATHODE VOLTAGE: | | | | |
| Heater negative with respect to cathode | | 200 max | volts | |
| Heater positive with respect to cathcde | | 200 max | volts | |
| | Fixed | Cathode | | |
| Typical Operation and Characteristics: | Bias | Bias | | |
| Plate Supply Voltage | 130 | 140 | volts | |
| Grid-No.2 Supply Voltage | 130 | 140 | volts | |
| Grid-No.1 (Control-Grid) Voltage | -11 | - | volts | |
| Cathode-Bias Resistor | _ | 100 | ohms | |
| Peak AF Grid-No.1 Voltage | 11 | 11.3 | volts | |
| Zero-Signal Plate Current | 100 | 100 | ma | |
| Maximum-Signal Plate Current. | 108 | 100 | ma | |
| Zero-Signal Grid-No.2 Current | 5 | 5 | ma | |
| Maximum-Signal Grid-No.2 Current. | 15 | 14 | ma | |
| Plate Resistance (Approx.) | 7000 | - | ohms | |
| Transconductance | 11000 | - | µmhos | |
| Load Resistance | 1100 | 1100 | ohms | |
| Total Harmonic Distortion | 11 | 11 | per cent | |
| Maximum-Signal Power Output | 4.5 | 4.5 | watts | |
| Maximum Circuit Values: | | | | |
| Grid-No.1-Circuit Resistance: | | | | |
| For fixed-bias operation | | 0.1 max | megohm | |
| For cathode-bias operation. | | 0.1 max 0.5 max | megohm | |
| For carnote-bias operation | | 0.0 max | megonin | |

The dc component must not exceed 100 volts.

PUSH-PULL CLASS AB1 AMPLIFIER

| Maximum Ratings, (Same as for Class A1 Amplifier): | Fixed | Cathode | |
|--|-------|---------|----------|
| Typical Operation, (Values are for two tubes): | Bias | Bias | |
| Plate Supply Voltage | 130 | 140 | volts |
| Grid-No.2 Supply Voltage | 130 | 140 | volts |
| Grid-No.1 Voltage | -12 | - | volts |
| Cathode-Bias Resistor | | 50 | ohms |
| Peak AF Grid-No.1-to-Grid-No.1 Voltage | 22.6 | 22.6 | volts |
| Zero-Signal Plate Current. | 195 | 210 | ma |
| Maximum-Signal Plate Current. | 220 | 220 | ma |
| Zero-Signal Grid-No.2 Current. | 9 | 9 | ma |
| Maximum-Signal Grid-No.2 Current | 24 | 20 | ma |
| Effective Load Resistance (Plate-to-plate) | 1800 | 1500 | ohms |
| Total Harmonic Distortion | 6 | 4 | per cent |
| Maximum-Signal Power Output | 10 | 10 | watts |



POWER PENTODE

Novar type used in output stages of high-fidelity audio amplifiers or radio receivers; used in applications requiring relatively large power output. Outline 10C, OUTLINES SEC-

7868

TION. Tube requires novar nine-contact socket and may be operated in any position. It is especially important that this tube, like other power-handling tubes, be adequately ventilated.

| HEATER VOLTAGE (AC/DC) | 6.3 | volts |
|--|------|---------------|
| HEATER CURRENT. | 0.8 | ampere |
| DIRECT INTERELECTRODE CAPACITANCES (Approx.): | | |
| Grid No.1 to Plate | 0.15 | \mathbf{pf} |
| Grid No.1 to Cathode, Heater, Grid No.2, and Grid No.3 | 11 | pf |
| Plate to Cathode, Heater, Grid No.2, and Grid No.3 | 4.4 | pf |
| | | |

= RCA Receiving Tube Manual =

CLASS A1 AMPLIFIER

| Maximum Ratings, (Design-Maximum System): | | |
|---|--------------------|------------|
| PLATE VOLTAGE | 550 max | volts |
| GRID-NO.2 (SCREEN-GRID) VOLTAGE. | 440 max | volts |
| PLATE DISSIPATION | 19 max | watts |
| GRID-NO.2 INPUT | 3.3•max | watts |
| DC CATHODE CURRENT. | 90 max | ma |
| PEAK HEATER-CATHODE VOLTAGE: | | |
| Heater negative with respect to cathode | 200 max | volts |
| Heater positive with respect to cathode | $200 \square max$ | volts |
| BULB TEMPERATURE (At hottest point) | 240 max | °C |
| | | |
| Typical Operation and Characteristics: | | |
| Plate Supply Voltage | 300 | volts |
| Grid-No.2 Voltage | 300 | volts |
| Grid-No.1 (Control-Grid) Voltage | -10 | volts |
| Peak AF Grid-No.1 Voltage | 10 | volts |
| Zero-Signal Plate Current | 60 | ma |
| Maximum-Signal Plate Current | 75 | ma |
| Zero-Signal Grid-No.2 Current | 8 | ma |
| Maximum-Signal Grid-No.2 Current | 15 | ma |
| Plate Resistance (Approx.). | 290.00 | ohms |
| Transconductance | 10200 | μ mhos |
| Effective Load Resistance | 3000 | ohms |
| Total Harmonic Distortion | 13 | per cent |
| Maximum-Signal Power Output | 11 | watts |

Maximum Circuit Values:

| Grid-No.1-Circuit Resistance: | | |
|-------------------------------|---------|--------|
| For fixed-bias operation | 0.3 max | megohm |
| For cathode-bias operation | 1 max | megohm |

PUSH-PULL CLASS AB1 AMPLIFIER

| Maximum Ratings, (Same as for Class A, | Amplifier) | | | | Cathode | |
|---|------------|---------------------|-----------------------|---------------------|-------------------|----------------|
| Typical Operation (Values are for two tube | es): | Fixed | Bias | | Bias | |
| Plate Supply Voltage | | $400 \\ 350 \\ -16$ | $450 \\ 350 \\ -16.5$ | $450 \\ 400 \\ -21$ | $450 \\ 400 \\ -$ | volts volts |
| to both cathodes) Peak AF Grid-No.1-to-Grid-No.1 | | | - | - | 70 | ohms |
| Voltage | 25 31 | 32 | 33 | 42 | 31 | volts |
| Zero-Signal Plate Current | 74 72 | 64 | 60 | 40 | 86 | ma |
| Maximum-Signal Plate Current 1 | 16 130 | 135 | 142 | 145 | 94 | ma |
| Zero-Signal Grid-No.2 Current | 10 9.5 | 8 | 7.2 | 5 | 10 | ma |
| Maximum-Signal Grid-No.2 Current. | 28 32 | 28 | 26 | 30 | 20 | ma |
| (Plate-to-plate) | 00 6600 | 6600 | 6600 | 6600 | 10000 | ohms |
| Total Harmonic Distortion | 5 2.5 | 2 | 2.5 | 5 | 2 | per cent |
| Maximum-Signal Power Output | 24 30 | 34 | 38 | 44 | 28 | watts |

PUSH-PULL CLASS AB1 AMPLIFIER

Grid No.2 of Each Tube Connected to Tap on Plate Winding of Output Transformer*

| Maximum Ratings: (Same as for Class A ₁ Amplifier) Typical.Operation (Values are for two tubes): | Fixed Bias | Cathode Bias | |
|--|---------------|-----------------|----------|
| Plate Supply Voltage | 400 | 425 | volts |
| Grid-No.2 Supply Voltage. | * | * | volts |
| Grid-No.1 Voltage | -20.5 | | volts |
| Cathode-Bias Resistor (Common to both cathodes) | - | 185 | ohms |
| Peak AF Grid-No.1-to-Grid-No.1 Voltage | 41 | 42 | volts |
| Zero-Signal Plate Current. | 60 | 88 | ma |
| Maximum-Signal Plate Current. | 115 | 100 | ma |
| Zero-Signal Grid-No.2 Current. | 8 | 12 | ma |
| Maximum-Signal Grid-No.2 Current | 18 | 16 | ma |
| Effective Load Resistance (Plate-to-plate) | 6600 | 6600 | ohms |
| Total Harmonic Distortion | 2.5 | 3.5 | per cent |
| Maximum-Signal Power Output | 23 | 21 | watts |


• In push-pull circuits where the grid No.2 of each tube is connected to a tap on the plate winding of the output transformer, this maximum rating is 440 volts.

• Grid No.2 input may reach 6 watts during peak levels of speech and music signals.

[□] The dc component must not exceed 100 volts.

* Grid No.2 supply voltage is obtained from taps on the primary winding of the output transformer. The taps are located on each side of the center tap (B+) so as to apply 50 per cent of the plate signal voltage to the grid No.2 of each output tube.

— Technical Data

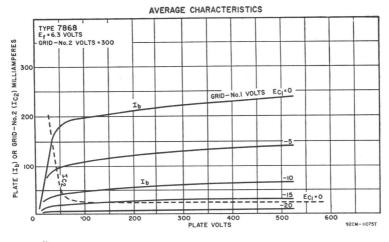

ELECTRON-RAY TUBE

Miniature type with triode unit used to indicate visually by means of a fluorescent target the effects of changes in a controlling voltage. Tube is used for accurate tuning or modu-



lation control. Maximum dimensions: over-all length, 2-27/32 inches; seated height, 2-13/32 inches; diameter, 7/8 inch. Tube requires nine-contact socket and may be mounted in any position. Heater volts (ac/dc), 6.3; amperes, 0.27. For additional considerations, refer to *Tuning Indication with Electron-Ray Tubes* in ELECTRON TUBE APPLICATIONS SECTION.

INDICATOR SERVICE

| Maximum and Minimum Ratings, (Design-Center Values): | | |
|---|----------|---------|
| RAY-CONTROL-ELECTRODE VOLTAGE: | | |
| Without current flowing through series triode-plate resistor | 550 max | volts |
| With current flowing through series triode-plate resistor | 300 max | volts |
| FLUORESCENT-TARGET VOLTAGE: | | |
| Without current flowing through series triode-plate resistor | 550 max | volts |
| With current flowing through series triode-plate resistor | (300 max | volts |
| | (150 min | volts |
| CATHODE CURRENT. | 3 max | ma |
| TRIODE-PLATE DISSIPATION. | 0.5 max | watt |
| PEAK HEATER-CATHODE VOLTAGE: | 100 | |
| Heater negative with respect to cathode | 100 max | volts |
| Heater positive with respect to cathode | 100 max | volts |
| BULB TEMPERATURE (At hottest point) | 120 max | °C |
| | | |
| Typical Operation with Ray-Control Electrode Connected to Triode Plate: | | |
| Triode-Plate Supply Voltage | 250 | volts |
| Fluorescent-Target Voltage | 250 | volts |
| Series Triode-Plate Resistor | 0.47 | megohm |
| Triode-Grid Supply Voltage0 | -22 | volts |
| Triode-Grid Resistor | 3 | megohms |
| Triode-Plate Current | 0.06 | ma |
| Fluorescent-Target Current 1.1 | 1.6 | ma |
| Length of Dark Part of Fluorescent Target | 0 | inch |
| Length of Dark Part of Fluorescent Target when triode-grid | | |
| resistor is 0 ohms | | inch |
| Maximum Circuit Value: | | |
| Triode-Grid-Circuit Resistance | 3 max | megohms |
| | | |

RCA Picture Tube Characteristics*

| RCA Type | Envelope | Aluminized Screen | Faceplate ^o | Minimum Screen Size Inches | Focusing Method | Deflection Method | Approx. Diagonal Deflec- tion Angle Degrees | High Voltage Terminal | Basing | Maximum Final High-Voltage Electrode (Anode ^b) ^c Volts | PM Ion-Tra Magnel Require |
|---------------------|----------|----------------------|------------------------|--|--------------------|----------------------|--|-----------------------------|------------|--|------------------------------------|
| Black-and- | White T | ypes | I | | | | | | | | |
| 5TP4d | G | Yes | CL | 4½ Dia. | E | M | 50e | Cavity Cap | 12C | 27000 | No |
| 7JP4 | (G) | No | CL | 6 Dia. | E | E | (f) | Base Pin | 14R | 6000 | No |
| 8DP4 | G | No | FG | 73/16 x 53/8 | E | M | 90 | Cavity Cap | 12AB | 8000 | Yes |
| 10BP4A | (G) | No | FG | 91/8 Dia. | M | M | 50° | Cavity Cap | 12N | 12000 | Yes |
| 10FP4A | G | Yes | FG | 91/8 Dia. | M | M | 50° | Cavity Cap | 12N | 12000 | No |
| 12KP4A | G | Yes | FG | 111/8 Dia. | м | M | 54e | Cavity Cap | 12N | 12000 | No |
| 12LP4A | G | No | FG | 11 Dia. | M | M | 54e | Cavity Cap | 12N | 12000 | Yes |
| 14ATP49 | G | Yes | FG | 12 ¹ / ₁₆ x 9 ¹ / ₂ | E | M | 90 | Cavity Cap | 12L | 14000 | No |
| 14EP4 | G | No | FG | 111/2 x 85/8 | м | M | 70 | Cavity Cap | 12N | 14000 | Yes |
| 14QP4A | G | Yes | FG | 111/2 x 85/8 | E | M | 70 | Cavity Cap | 12L | 11000 | Yes |
| 14WP4 | G | Yes | FG | 12 ¹ / ₁₆ x 9 ¹ / ₂ | E | M | 90 | Cavity Cap | 12L | 14000 | No |
| 16AP4A | M | No | FG | 143/8 Dia. | M | M | 53e | Metal-Shell Lip | 12D | 14000 | Yes |
| 16DP4A | G | No | FG | 14½ Dia. | М | M | 60e | Cavity Cap | 12D | 15000 | Yes |
| 16GP4B | M | No | FFG | 143/8 Dia. | M | M | 70e | Metal-Shell Lip | 12D | 14000 | Yes |
| 16LP4A | (G) | No | FG | 14½ Dia. | M | M | 52e | Cavity Cap | 12N | 14000 | Yes |
| 16RP4A | G | Yes | FG | 13½ x 10½ | M | M | 70 | Cavity Cap | 12N | 16000 | Yes |
| 16TP4 | G | No | FG | 131/2 x 101/8 | M | M | 70 | Cavity Cap | 12N | 14000 | Yes |
| 16WP4A | G | No | FG | 14½ Dia. | M | M | 70e | Cavity Cap | 12N | 16000 | Yes |
| 17BJP4 | G | Yes | FG | 145/6 x 111/8 | E | M | 90 | Cavity Cap | 12L | 16000 | No |
| 17BP4B | G | Yes | FG | 145/16 x 111/8 | M | M | 70 | Cavity Cap | 12N | 16000 | Yes |
| 17CDP49 | G | Yes | FG | 1434 x 1111/16 | E | M | 110 | Cavity Cap | 8HR | 16000 | No |
| 17CFP4 | G | Yes | FG | 143/4 x 1111/16 | E | M | 90 | Cavity Cap | 12L | 16000 | No |
| 17CP4 | M | No | FFG | 143/8 x 1011/16 | M | M | 70 | Metal-Shell Lip | 12D | 16000 | Yes |
| 17CSP4 | G | Yes | FG | 14 ³ / ₄ x 11 ¹¹ / ₁₆ | E | M | 110 | Cavity Cap | 7FA | 17600h | No |
| 17CYP4 | G | Yes | FG | 143/4 x 1111/16 | E | M | 90 | Cavity Cap | 12L | 16000 | No |
| 17DAP4 | G | Yes | FG | 143/4 x 1111/16 | E | M | 110 | Cavity Cap | 8JK | 16000 | No |
| 17DKP4 | G | Yes | FG | 143/4 x 1111/16 | E | M | 110 | Cavity Cap | 8JR | 23000 ^h | No |
| 17DQP4k | G | Yes | FG | 143/4 x 111/16 | E | M | 110 | Cavity Cap | 7FA | 17600hp | No |
| | | Yes | FG | | E | M | 110 | Cavity Cap | 8JK | 17600 ^h | No |
| 17DRP4iw | G | | FG | $\frac{14_{4}^{3} \times 11_{16}^{11}}{14_{4}^{3} \times 11_{16}^{11}}$ | E | M | 110 | | 8HR | 18000 | No |
| 17DSP4 | G | Yes | FG | $14\frac{3}{4} \times 11\frac{11}{16}$ $14\frac{3}{4} \times 11\frac{11}{16}$ | E | M | 110 | Cavity Cap | 8JR | 17600 ^h | No |
| 17DXP4 ^k | G | | FG | 7.4 | E | M | 70 | Metal-Shell Lip | | | |
| 17GP4 | G | No Yes | FG | 143/8 x 1011/16 | E | M | 70 | Cavity Cap | 12M 12L | 16000 | Yes |
| 17HP4B | G | Yes | FG ^m | $\frac{14\frac{5}{16} \times 11\frac{1}{8}}{14\frac{1}{4} \times 10\frac{3}{4}}$ | E | M | 70 | Cavity Cap Cavity Cap | 12L | 16000 | Yes |
| 17QP4A | G | Yes | FG ^m | 14 ¹ / ₄ x 10 ³ / ₄ | M | M | 70 | Cavity Cap | 12L | 18000 | Yes |
| 17QP4A | M | No | FFG | 14 ³ / ₈ x 10 ¹¹ / ₁₆ | E | M | 70 | Metal-Shell Lip | 12IN | 16000 | Yes |
| 19ABP4 | G | Yes | FG | 15 ¹ / ₈ x 12 | E | M | 114 | Cavity Cap | 8JK | 20000 ^h | No |
| 19A5P4 | Gn | Yes | FG | 15 ¹ / ₈ x 12 | E | M | 114 | Cavity Cap | 8HR | 20000h | No |
| 19AHP4k | G | Yes | FG | 15 ¹ / ₈ x 12 | E | M | 114 | Cavity Cap | 8HR | 17600hp | No |
| 19AHP4 ^k | G | Yes | FG | 15½ x 12 | E | M | 114 | Cavity Cap | 7FA | 19800hp | No |
| 19AJP4* | (M) | No | FFG | 13% X 12 17% Dia. | M | M | 66° | Metal-Shell Lip | 12D | 16000 | Yes |
| 19AP48 | Gn | Yes | FG | $15\frac{1}{4} \times 12\frac{1}{16}$ | E | M | 114 | Cavity Cap | 8HR | 20000 ^h | No |
| | G | Yes | FG | | E | M | 114 | | | | |
| 19AVP4 | G | Yes | FG | 15 ¹ / ₈ x 12 | E | M | | Cavity Cap | 8HR | 23000h | No |
| 19AYP4k | G | Yes | FG | $15\frac{1}{8} \times 12$ 17 x 12 ³ / ₄ | M | M | 114 | Cavity Cap | 8HR | 23000 ^h | No |
| 20DP4C | G | ICS | ru | $17 \times 12\frac{3}{4}$ | IVI | IVI | 70 | Cavity Cap | 12N | 18000 | Yes |

Active RCA Picture-Tube Types shown here can replace more than 300 different types of industry picture tubes. The RCA Picture Tube Replacement and Interchangeability Chart is available on request. Unless otherwise noted, all picture tubes listed have 6.3-volt, 600-milliampere heaters.

G Glass rectangular.

G Glass round.

M Metal rectangular.

- (M) # Metal round.
- CL Clear glass.
- CLI Cical glass
- FG Filterglass.
- FFG Frosted Filterglass. M Magnetic.
- E Electrostatic.
 - Electrostatic.

a Spherical, unless otherwise specified.

 Spherical, unless other was specified.
 ANODE is defined as the electrode, or the electrode in combination with one or more additional electrodes connected within the tube to it, to which is applied the highest dc voltage for accelerating the electrons in the beam prior to its deflection.

e Design-Center Value, unless otherwise indicated.

d Projection type.

= Picture Tube Characteristics =

| RCA Type | Envelope | Aluminized Screen | Faceplate ^{cz} | Minimum Screen Size Inches | Focusing Method | Deflection Method | Approx. Diagonal Deflec- tion Angle Degrees | High Voltage Terminal | Basing | Maximum Final High-Voltage Electrode (Anode ^b) ^c Volts | PM Ion-Trap Magnet Required |
|-----------------|----------|----------------------|-------------------------|---|--------------------|----------------------|--|-----------------------------|--------|--|--------------------------------------|
| Black-and- | White T | ypes | | | | | | | | | |
| 21AMP4A | G | Yes | FG | 19 ¹ / ₁₆ x 15 ¹ / ₁₆ | M | M | 90 | Cavity Cap | 12N | 18000 | Yes |
| 21AP4 | M | No | FFG | 18 ¹ / ₈ x 13 ¹¹ / ₁₆ | М | M | 70 | Metal-Shell Lip | 12D | 18000 | Yes |
| 21AVP4B | G | Yes | FG | 19 ¹ / ₁₆ x 15 ¹ / ₁₆ | E | M | 72 | Cavity Cap | 12L | 20000 | Yes |
| 21AWP4 | G | Yes | FG | 19 ¹ / ₁₆ x 15 ¹ / ₁₆ | M | M | 72 | Cavity Cap | 12N | 18000 | Yes |
| 21CBP4A | G | Yes | FG | 19 ¹ / ₁₆ x 15 ¹ / ₁₆ | E | M | 90 | Cavity Cap | 12L | 20000 | No |
| 21CQP4 | G | Yes | FG | 19 ¹ / ₁₆ x 15 ¹ / ₁₆ | E | M | 110 | Cavity Cap | 7FA | 18000 | No |
| 21DEP4A | G | Yes | FG | 19 ¹ / ₁₆ x 15 ¹ / ₁₆ | E | M | 110 | Cavity Cap | 8HR | 20000 | No |
| 21DFP4 | G | Yes | FG | 19 ¹ / ₁₆ x 15 ¹ / ₁₆ | E | M | 110 | Cavity Cap | 8HR | 18000 | No |
| 21DLP4 | G | Yes | FG | 19 ¹ / ₁₆ x 15 ¹ / ₁₆ | E | M | 90 | Cavity Cap | 12L | 20000 | No |
| 21DSP4 | G | Yes | FG | 191/16 x 151/16 | E | M | 90 | Cavity Cap | 12L | 20000P | No |
| 21EP4B | G | Yes | FG ^m | 19 ¹ / ₈ x 13 ⁷ / ₈ | м | M | 70 | Cavity Cap | 12N | 18000 | Yes |
| 21EQP4 | G | Yes | FG | 19 ¹ / ₁₆ x 15 ¹ / ₁₆ | E | M | 110 | Cavity Cap | 8JR | 18000 | No |
| 21EVP4iw | G | Yes | FG | 191/16 x 151/16 | E | M | 110 | Cavity Cap | 8JK | 20000 ^h | No |
| 21FAP4 | G | Yes | FG | 19 ¹ / ₁₆ x 15 ¹ / ₁₆ | E | M | 110 | Cavity Cap | 8JR | 22000 ^h | No |
| 21FDP4 | G | Yes | FG | 19 ¹ / ₁₆ x 15 ¹ / ₁₆ | E | M | 110 | Cavity Cap | 8KW | 20000h | No |
| 21FP4C | G | Yes | FGm | 19 ¹ / ₈ x 13 ⁷ / ₈ | E | M | 70 | Cavity Cap | 12L | 18000 | Yes |
| 21MP4 | M | No | FFG | 18 ¹ / ₈ x 13 ¹¹ / ₁₆ | E | M | 70 | Metal-Shell Lip | 12M | 16000 | Yes |
| 21WP4A | G | Yes | FG | 17 ³ / ₈ x 13 ⁵ / ₈ | M | M | 70 | Cavity Cap | 12N | 18000 | Yes |
| 21XP4A | G | Yes | FG | 173/8 x 135/8 | E | M | 70 | Cavity Cap | 12L | 18000 | Yes |
| 21YP4A | G | Yes | FG | 19 ¹ / ₁₆ x 14 ³ / ₁₆ | E | M | 70 | Cavity Cap | 12L | 18000 | Yes |
| 21ZP4B | G | Yes | FG | 19 ¹ / ₁₆ x 14 ³ / ₁₆ | M | M | 70 | Cavity Cap | 12N | 18000 | Yes |
| 23AHP4 | G | Yes | FG | 19 ¹ / ₄ x 15 ¹ / ₈ | E | M | 92 | Cavity Cap | 12L | 22000h | No |
| 23ALP4k | G | Yes | FG | 19 ¹ / ₄ x 15 ¹ / ₈ | E | M | 114 | Cavity Cap | 8HR | 22000h | No |
| 23BJP4 | G | Yes | FG | 191/4 x 151/8 | E | м | 92 | Cavity Cap | 12L | 25000 ^{hp} | No |
| 23BKP4 | Gn | Yes | FG | 195/16 x 151/4 | E | M | 92 | Cavity Cap | 12L | 25000hp | No |
| 23BLP4 | Gn | Yes | FGr | 195/16 x 151/4 | E | M | 92 | Cavity Cap | 12L | 25000hp | No |
| 23CP4 | Gn | Yes | FG | 195/16 x 151/4 | E | M | 110 | Cavity Cap | 8HR | 22000h | No |
| 23CP4 | Gn | Yes | FG | 195/16 x 151/4 | E | M | 110 | Cavity Cap | 8KP | 22000hp | No |
| 23FP4A | G | Yes | FG | 19 ¹ / ₄ x 15 ¹ / ₈ | E | M | 114 | Cavity Cap | 8HR | 23500h | No |
| 23JP4k | Gn | Yes | FG | 19% x 15% | E | M | 110 | Cavity Cap | 7FA | 22000 ^{hp} | No |
| 23JP4- 23YP4 | Gn | Yes | FG | 19% x 15% 19% x 15% | E | M | 92 | Cavity Cap Cavity Cap | 12L | 22000 ^h | No |
| 231F4 24AEP4 | G | Yes | FG | 217/16 x 167/8 | E | M | 90 | Cavity Cap | 12L | 20000 | No |
| 24AEF4 | G | Yes | FG | $217_{16} \times 107_{8}$ $217_{16} \times 167_{8}$ | E | M | 110 | Cavity Cap | 8HR | 20000 | No |
| 24ATP4 | G | Yes | FG | 217/16 x 167/8 | E | M | 90 | Cavity Cap | 12L | 20000P | No |
| 24AUP4 | G | Yes | FG | 217/16 x 167/8 | E | M | 90 | Cavity Cap | 12L | 20000 | No |
| 248AP4 | G | Yes | FG | 217/16 x 167/8 | E | M | 110 | Cavity Cap | 8HR | 20000P | No |
| 24CP4A | G | Yes | FG | 217/16 x 167/8 | M | м | 90 | Cavity Cap | 12N | 20000 | Yes |
| 27MP4 | M | Yes | FFG | 237/16 x 181/8 | M | M | 90 | Metal-Shell Lip | 12D | 18000 | Yes |
| 27RP4 | G | Yes | FG | 24 ¹ / ₄ x 18 ⁵ / ₈ | M | M | 90 | Cavity Cap | 12N | 20000 | Yes |
| Color Typ | | | | | | | | | | | |
| 15GP22# | (G) | Yes | CL | 111/2 x 85/8 | E | м | 45° | Metal Flange | 20A | 20000 | No |
| 21AXP22A | | Yes | FG | 191/6 x 151/4 | E | M | 70e | Metal Shell | 14AH | 25000 | No |
| 21CYP22A | | Yes | FG | 19 ¹ / ₄ x 15 ¹ / ₂ | E | M | 70° | Two Cavity Caps | | 25000 | No |
| 21FBP22' | G | Yes | FG | 19 ¹ / ₄ x 15 ¹ / ₂ | E | M | 70e | Cavity Cap | 14AU | 27500 ^h | No |
| 21FJP22' | (G) | Yes | FG | 19 ¹ / ₄ x 15 ¹ / ₂ | E | M | 70e | Cavity Cap | 14AU | 27500 ^h | No |

· Horizontal deflection angle.


- f Typical deflection factors (volts dc/in.) for ultor voltage of 6000 volts:

 - DJ1 & DJ2 (meaner screen) 186 to 246 DJ3 & DJ4 (meaner base) 150 to 204 L

- g 8.4-volt, 450-milliampere heater.
- h Design-Maximum Value.
- i 2.68-volt, 450-milliampere heater.

For basing diagrams, see page 486.

- k 6.3-volt, 450-milliampere heater.
- m Cylindrical faceplate.
- n Bipanel type.
- P Referred to Grid No. 1: Cathode-Drive Service. Has low grid-2 voltage rating.
- r Treated to reduce specular reflection. q 2.35-volt, 600-milliampere heater.
- This type has a flat, aluminized, filterglass, phosphor-dot screen plate.
- 1 6.3-volt, 1.8-ampere heater (three heaters paralleled internally).
- 6.3-volt, 1.6-ampere heater (three heaters paralleled internally).
- v This type has an integral protective window.
- w This type has an internal magnetic shield.

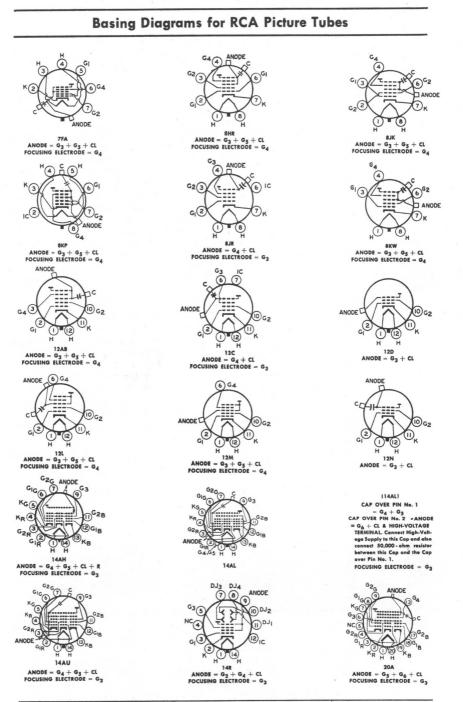

= RCA Receiving Tube Manual

Electron Tube Testing

The electron tube user-service man, experimenter, or non-technical radio listener-is interested in knowing the condition of his tubes, since they govern the performance of the device in which they are used. In order to determine the condition of a tube, some method of test is necessary. Because the operating capabilities and design features of a tube are indicated and described by its electrical characteristics. a tube is tested by measuring its characteristics and comparing them with values established as standard for that type. Tubes which read abnormally high with respect to the standard for the type are subject to criticism just the same as tubes which are too low.


Certain practical limitations are placed on the accuracy with which a tube test can be correlated with actual tube performance. These limitations make it impractical for the service man and dealer to employ complex and costly testing equipment having laboratory accuracy. Because the accuracy of the tubetesting device need be no greater than the accuracy of the correlation between test results and receiver performance, and since certain fundamental characteristics are virtually fixed by the manufacturing technique of leading tube manufacturers, it is possible to employ a relatively simple test in order to determine the serviceability of a tube.

In view of these factors, dealers and service men will find it economically expedient to obtain adequate accuracy and simplicity of operation by employing a device which indicates the status of a single characteristic. Whether the tube is satisfactory or unsatisfactory is judged from the test result of this single characteristic. Consequently, it is very desirable that the characteristic selected for the test be one which is truly representative of the tube's over-all condition.

The following information and circuits are given to describe and illustrate general theoretical and practical tubetester considerations and not to provide information on the construction of a home-made tube tester. In addition to the problem of determining what tube characteristic is most representative of performance capabilities in all types of receivers, the designer of a home-made tester faces the difficult problem of determining satisfactory limits for his particular tester. Getting information of this nature, if it is to be accurate and useful, is a big job. It requires the testing of many tubes of each type, testing of many types, and correlation of the data with performance in many kinds of equipment.

Short-Circuit Test

The fundamental circuit of a shortcircuit tester is shown in Fig. 99. Although this circuit is suitable for tetrodes and types having less than four electrodes, tubes of more electrodes may be tested by adding more indicator lamps to the circuit. Voltages are applied between the various electrodes with lamps in series with the electrode leads. The value of the voltages applied will depend




on the type of tube being tested and its maximum ratings. Any two shorted electrodes complete a circuit and light one or more lamps. Since two electrodes may be just touching to give a high-resistance short, it is desirable that the indicating lamps operate on very low current. It is also desirable to maintain the filament or heater of the tube at its operating temperature during the short-circuit test, because short-circuits in a tube may sometimes occur only when the electrodes are heated. However, a shortcircuit tester having too high a sensitivity may indicate very-high-resistance shorts that do not adversely affect tube operation.

Selection of a Suitable Characteristic for Test

Some characteristics of a tube are far more important in determining its operating worth than are others. The cost of building a device to measure any one of the more important characteristics may be considerably higher than that of a device which measures a less representative characteristic. Consequently, three methods of test will be discussed, ranging from relatively simple and inexpensive equipment to more elaborate, more accurate, and more costly devices.


An emission test is perhaps the simplest method of indicating a tube's condition. (Refer to Diodes, in ELEC-TRONS, ELECTRODES, AND ELEC-TRON TUBES SECTION, for a discussion of electron emission.) Since emission falls off as the tube wears out, low emission is indicative of the end of tube serviceability. However, the emission test is subject to limitations because it tests the tube under static conditions and does not take into account the actual operation of the tube. On the one hand, coated filaments, or cathodes, often develop active spots from which the emission is so great that the relatively small grid area adjacent to these spots cannot control the electron stream. Under these conditions, the total emission may indicate the tube to be normal although the tube is unsatisfactory. On the other hand, coated types of filaments are capable of such large emission that the tube will often operate satisfactorily after the emission has fallen far below the original value.

Fig. 100 shows the fundamental circuit diagram for an emission test. All of the electrodes of the tube, except the cathode, are connected to the plate. The filament, or heater, is operated at rated voltage; after the tube has reached constant temperature, a low positive voltage is applied to the plate and the electron emission is read on the meter. Readings which are well below the average for a particular tube type indicate that the total number of available electrons has been so reduced that the tube is no longer able to function properly.



A transconductance test takes into account a fundamental operating principle of the tube. (This fact will be seen from the definition of transconductance in the Section on ELECTRON TUBE CHARACTERISTICS.) It follows that transconductance tests, when properly made, permit better correlation between test results and actual performance than does a straight emission test.

There are two forms of transconductance test which can be utilized in a tube tester. In the first form (illustrated by Fig. 100 giving a fundamental circuit with a tetrode under test), appropriate operating voltages are applied to the




electrodes of the tube. A plate current depending upon the electrode voltages will then be indicated by the meter. If the bias on the grid is then shifted by the application of a different grid voltage, a new plate-current reading is obtained. The difference between the two plate-current readings is indicative of the transconductance of the tube. This

Electron Tube Testing

method of transconductance testing is commonly called the "grid-shift" method, and depends on readings under static conditions. The fact that this form of test is made under static conditions imposes limitations not encountered in the second form of test made under dynamic conditions.


The dynamic transconductance test illustrated in Fig.102 gives a fundamental circuit with a tetrode under test. This method is superior to the static transconductance test in that ac voltage is applied to the grid. Thus, the tube is tested under conditions which approximate actual operating conditions. The alternating component of the plate current is read by means of an ac ammeter of the dynamometer type. The transconductance of the tube is equal to the



ac plate current divided by the inputsignal voltage. If a one-volt rms signal is applied to the grid, the plate-currentmeter reading in milliamperes multiplied by one thousand is the value of transconductance in micromhos.

The power-output test probably gives the best correlation between test results and actual operating performance of a tube. In the case of voltage amplifiers, the power output is indicative of the amplification and output voltages obtainable from the tube. In the case of power-output tubes, the performance of the tube is closely checked. Consequently, although more complicated to set up, the power-output test will give closer correlation with actual performance than any other single test.

Fig. 103 shows the fundamental circuit of a power-output test for class A operation of tubes. The diagram illustrates the method for a pentode. The ac output voltage developed across the plate-load impedance (L) is indicated by the current meter. The current meter is isolated as far as the dc plate current is concerned by the capacitor (C). The power output can be calculated from the




current reading and known load resistance. In this way, it is possible to determine the operating condition of the tube quite accurately.

Fig. 104 shows the fundamental circuit of a power-output test for class B operation of tubes. With ac voltage applied to the grid of the tube, the current in the plate circuit is read on a dc milliammeter. The power output of the tube is approximately equal to:

$(I_{b^2} \times R_L)/0.405$,

where P_o is the power output in watts, I_b is the dc current in amperes, and R_L is the load resistance in chms.



Essential Tube-Tester Requirements

1. The tester should provide for making a short-circuit test before measurement of the tube's characteristics.

2. It is important that some means of controlling the voltages applied to the electrodes of the tube be provided. If the tester is ac operated, a line-voltage control permits the supply of proper electrode voltages.

3. It is essential that the rated voltage applied to the filament or heater be maintained accurately.

4. It is suggested that the characteristics test follow one of the methods described. The method selected and the quality of the parts used in the test will depend upon the user's requirements.

Tube-Tester Limitations

A tube-testing device can only indicate the difference between a given tube's characteristics and those which are standard for that particular type. Since the operating conditions. imposed upon a tube of a given type may vary within wide limits; it is impossible for a tubetesting device to evaluate tubes in terms of performance capabilities for all applications. The tube tester, therefore, cannot be looked upon as a final authority in determining whether or not a tube is always satisfactory. Actual operating test in the equipment in which the tube is to be used will give the best possible indication of a tube's worth.

Resistance-Coupled Amplifiers

Resistance-coupled, audio-frequency voltage amplifiers utilize simple components and are capable of providing essentially uniform amplification over a relatively wide frequency range.

Suitable Tubes

In this section, data are given for over 50 types of tubes suitable for use in resistance-coupled circuits. These types include low- and high-mu triodes, twin triodes, triode-connected pentodes, and pentodes. The accompanying key to tube types will assist in locating the appropriate data chart.

Circuit Advantages

For most of the types shown, the data pertain to operation with cathode bias; for all of the pentodes, the data pertain to operation with series screen-grid resistor. The use of a cathode-bias resistor where feasible and a series screen-grid resistor where applicable offers several advantages over fixed-voltage operation.

The advantages are: (1) effects of possible tube differences are minimized; (2) operation over a wide range of platesupply voltages without appreciable change in gain is feasible; (3) the low frequency at which the amplifier cuts off is easily changed; and (4) tendency toward motorboating is minimized.

Number of Stages

These advantages can be enhanced by the addition of suitable decoupling filters in the plate supply of each stage of a multi-stage amplifier. With proper filters, three or more amplifier stages can be operated from a single power-supply unit of conventional design without encountering any difficulties due to coupling

| Туре | Chart No. | Type Char | t No. |
|---------------|-----------|----------------|---------------|
| 3AU6 | 2 | 6CG7 | 8 |
| 3AV6 | 9 | 6CN7 | 5 |
| 3BC5 | 11 | 6 EU7 | 9 |
| 3CB6 | 10 | 6FQ7 | 8 |
| 3CF6 | 11 | 6J5 | 8 |
| | | | |
| 4AU6 | 2 | 6SL7GT | 5 |
| 4BC5 | 11 | 6SN7GTB | 8 |
| 4BQ7A | 10 | 6T8A | 5 |
| 4BQ7A 4BZ7 | 10 | 7AU7 | 3 |
| 4CB6 | 11 | 8CG7 | 8 |
| TODO | 11 | ocui | 0 |
| | | | |
| 5BK7A | | 12AT6 | 5 |
| 5BQ7A | 10 | 12AT7 | 4 |
| 5T8 | 5 | 12AU6 | 2 |
| 6AB4 | 4 | 12AU7A | 3 |
| 6AG5 | 11 | 12AV6 | 9 |
| | | | |
| 6AT6 | 5 | 12AX7 | 9 |
| 6AU6A | 2 | 12AX7A | 9 |
| 6AV6 | 9 | 12AY7 | 1 |
| 6BC5 | 11 | 12SL7GT | 5 |
| 6BK7B | 10 | 12SN7GTA | 8 |
| | | | |
| 40054 | 10 | 00000 | 0 |
| 6BQ7A | 10 | 20EZ7 | 9 |
| 6BZ7 | 10 | 5879P | 6 |
| 6C4 6CB6 | 3 11 | 5879T 7025 | $\frac{7}{9}$ |
| 6CB6 6CB6A | 11 | 7025 7199P | 9 12 |
| 6CB6A 6CF6 | 11 | 7199P 7199T | 12 13 |
| 5010 | 11 | 11001 | 10 |
| | I | | |

T=Triode Unit or Triode Connection P=Pentode Unit or Pentode Connection

KEY TO CHARTS

through the power unit. When decoupling filters are not used, not more than two stages should be operated from a single power-supply unit.


Symbols Used in Resistance-Coupled Amplifier Charts

- C = Blocking Capacitor (μ f).
- C_k = Cathode Bypass Capacitor (μf).
- $C_{g_2} =$ Screen-Grid Bypass Capacitor (μf) .
- $\begin{array}{l} E_{bb} = Plate-Supply \mbox{ Voltage (volts).} \\ & \mbox{ Voltage at plate equals plate-} \\ & \mbox{ supply voltage minus drop in } R_p \\ & \mbox{ and } R_k. \end{array}$
- R_k = Cathode Resistor (ohms).
- $R_{g_2} =$ Screen-Grid Resistor (megohms).
- $R_g = Grid Resistor (megohms)$ for following stage.
- R_p = Plate Resistor (megohms).
- V.G.= Voltage Gain.
- $E_o = Output Voltage (peak volts).$ This voltage is obtained across R_g (for following stage) at any frequency within the flat region of the output vs. frequency curve, and is for the condition where the signal level is adequate to swing the grid of the resistance-coupled amplifier tube to the point where its grid starts to draw current.

Note: The listed values for E_o are the peak output voltages available when the grid is driven from a low-impedance source. The listed values for the cathode resistors are optimum for any signal source. With a high-impedance source, protection against severe distortion and loss of gain due to input loading may be obtained by the use of a coupling capacitor connected directly to the input grid and a high-value resistor connected between the grid and ground.

General Circuit Considerations

In the discussions which follow, the frequency (f_2) is that value at which the high-frequency response begins to fall



off. The frequency (f_1) is that value at which the low-frequency response drops below a satisfactory value, as discussed below. A variation of 10 per cent in values of resistors and capacitors has only slight effect on performance. One-half-watt resistors are usually suitable for R_{g2} , R_g , R_p , and R_k resistors. Capacitors C and C_{g2} should have a working voltage equal to or greater than E_{bb} . Capacitor C_k may have a low working voltage in the order of 10 to 25 volts.

Triode Amplifier Heater-Cathode Type

Capacitors C and C_k have been chosen to give an output voltage equal to 0.8 E_0 for a frequency (f₁) of 100 cycles. For any other value of f₁, multiply values of C and C_k by 100/f₁. In the





Diagram No. 1

case of capacitor C_k , the values shown in the charts are for an amplifier with dc heater excitation; when ac is used, depending on the character of the associated circuit, the gain, and the value of f_1 , it may be necessary to increase the value of Ck to minimize hum disturbances. It may be desirable to operate the heater at a positive voltage of from 15 to 40 volts with respect to the cathode. The voltage output at f1 of "n" like stages equals $(0.8)^n \times E_o$, where E_o is the peak output voltage of final stage. For an amplifier of typical construction, the value of f_2 is well above the audiofrequency range for any value of R_n.

Pentode Amplifier Filament-Type


Capacitors C and C_{g2} have been chosen to give an output voltage equal to $0.8 \times E_0$ for a frequency (f₁) of 100 cycles. For any other value of f_1 , multiply values of C and C_{g2} by $100/f_1$. The voltage output at f_1 for "n" like stages equals $(0.8)^n \times E_0$ where E_0 is peak output voltage of final stage. For an amplifier of typical construction, and for R_p values of 0.1, 0.25, and 0.5 megohm, approximate values of f_2 are 20000, 10000, and 5000 cps, respectively. Note: The



values of input-coupling capacitor in microfarads and of grid resistor in megohms should be such that their product lies between 0.02 and 0.1. Values commonly used are $0.005 \,\mu$ f and 10 megohms.

Pentode Amplifier Heater-Cathode Type

Capacitors C, C_k , and C_{g_2} have been chosen to give an output voltage equal to $0.7 \times E_0$ for a frequency (f₁) of 100 cycles. For any other value of f_1 , multiply values of C, C_k , and C_{g2} by 100/ f_1 . In the case of capacitor C_k , the values shown in the charts are for an amplifier with dc heater excitation; when



ac is used, depending on the character of the associated circuits, the voltage gain, and the value of f, it may be necessary to increase the value of C_k to minimize hum disturbances. It may be desirable to operate the heater at a positive voltage of from 15 to 40 volts with respect to the cathode. The voltage output at f_1 for "n" like stages equals $(0.7)^n \times E_o$ where E_o is peak output voltage of final stage. For an amplifier of typical construction, and for R_p values of 0.1, 0.25, and 0.5 megohm, approximate values of f_2 are 20000, 10000, and 5000 cps, respectively.

| Ebb | Rp | Rg | Rg2 | Rk | Cg2 | Ck | С | E _o * | V.G. |
|-----|---------------------|---------------------|-----|----------------------|-----|----|---|------------------|----------------|
| 90 | 0.1 0.24 0.51 | 0.24 0.51 1.0 | | 1800 3700 7800 | | - | | 13 14 16 | 24 26 27 |
| 180 | 0.1 0.24 0.51 | 0.24 0.51 1.0 | | 1300 2800 5700 | | | | 31 33 33 | 27 29 30 |
| 300 | 0.1 0.24 0.51 | 0.24 0.51 1.0 | | 1200 2300 4800 | | | | 58 30 56 | 28 30 31 |

(See page 492 for explanation of column headings)



One triode unit. * Peak volts.

^A Coupling capacitors should be selected to give desired frequency response. Cathode resistors should be adequately bypassed.

RCA Receiving Tube Manual =

| | Ebb | Rp | Rg | Rg2 | R_k | Cg2 | $C_{\mathbf{k}}$ | C | E _o * | V.G. |
|--------------------------|-----|-------|----------------------|-------------------------|-----------------------|-------------------------|----------------------|----------------------------|------------------|-------------------|
| (2) | | 0.22 | 0.22 0.47 1.0 | 0.340 0.370 0.380 | 2700 2900 3100 | 0.057 0.050 0.050 | 5.8 5.4 5.3 | 0.0081 0.0055 0.0034 | 16 22 25 | 79 104 125 |
| 3AU6 | 90 | 0.47 | 0.47 1.0 2.2 | 1.00 1.00 1.00 | 6000 6200 6300 | 0.027 0.023 0.027 | 2.8 2.7 2.8 | 0.0042 0.0027 0.0019 | 13 17 25 | 105 137 161 |
| 4AU6 6AU6A | | 1.0 | 1.0 2.2 | 1.90 2.40 | 10800 13100 | 0.017 0.017 | 1.7 1.7 | 0.0025 0.0017 | 10 19 | 139 184 |
| 12AU6 | | 0.22 | 0.22 0.47 1.0 | 0.520 0.520 0.520 | 1340 1390 1420 | 0.059 0.059 0.059 | 8.8 8.7 8.6 | 0.0081 0.0053 0.0032 | 31 43 48 | 143 192 223 |
| See Circuit | 180 | 0.47 | 0.47 1.0 2.2 | 1.05 1.15 1.20 | 2700 2880 2960 | 0.039 0.037 0.036 | 5.5 5.4 5.4 | 0.0041 0.0027 0.0019 | 34 43 50 | 189 249 294 |
| Diagram 3 | | 1.0 | 1.0 2.2 | 2.40 2.70 | 5500 6000 | 0.028 0.022 | 3.2 2.8 | 0.0023 0.0015 | 33 40 | 230 323 |
| | | 0.22 | 0.22 0.47 1.0 | 0.530 0.540 0.540 | 780 783 800 | 0.077 0.077 0.077 | 13.2 13.2 13.1 | 0.0082 0.0053 0.0033 | 53 65 74 | 200 270 316 |
| | 300 | 0.47 | 0.47 1.0 2.2 | 1.15 1.22 1.31 | 1590 1650 1720 | 0.057 0.049 0.045 | 8.4 7.4 7.2 | 0.0045 0.0027 0.0017 | 56 72 82 | 275 357 418 |
| | | 1.0 | 1.0 2.2 | 2.50 2.80 | 3300 3500 | 0.036 0.031 | 5.3 4.2 | 0.0022 0.0015 | 57 72 | 352 466 |
| | | i Di | 0.047 | | 1600 | | 3.2 | 0.061 | | |
| | 90 | 0.047 | 0.047 0.1 0.22 | - | 1800 2000 | | 3.2 2.5 2.0 | 0.001 0.033 0.015 | 9 11 14 | 10 11 11 |
| 3 | | 0.1 | 0.1 0.22 0.47 | | 3000 3800 4500 | | 1.6 1.1 1.0 | 0.032 0.015 0.007 | 10 15 18 | 11 11 11 |
| 6C4 | | 0.22 | 0.22 0.47 1.0 | | 6800 9500 11500 | | 0.7 0.5 0.43 | 0.015 0.0065 0.0035 | 14 20 24 | 11 11 11 |
| 7AU7• 12AU7A• | | 0.047 | 0.047 0.1 0.22 | | 920 1200 1400 | | 3.9 2.9 2.5 | 0.062 0.037 0.016 | 20 26 29 | 11 12 12 |
| | 180 | 0.1 | 0.1 0.22 0.47 | | 2000 2800 3600 | | 1.9 1.4 1.1 | 0.032 0.016 0.007 | 24 33 40 | 12 12 12 |
| See Circuit Diagram 1 | | 0.22 | 0.22 0.47 1.0 | Ξ | 5300 8300 10000 | | 0.8 0.56 0.48 | 0.015 0.007 0.0035 | 31 44 54 | 12 12 12 |
| | | 0.047 | 0.047 0.1 0.22 | | 870 1200 1500 | | 4.1 3.0 2.4 | 0.065 0.034 0.016 | 38 52 68 | 12 12 12 |
| | 300 | 0.1 | 0.1 0.22 0.47 | | 1900 3000 4000 | | 1.9 1.3 1.1 | 0.032 0.016 0.007 | 44 68 80 | 12 12 12 |
| | | 0.22 | 0.22 0.47 1.0 | | 5300 8800 11000 | - | 0.9 0.52 0.46 | 0.015 0.007 0.0035 | 57 82 92 | 12 12 12 |

(See page 492 for explanation of column headings)

• One triode unit.

*Peak volts.

Resistance-Coupled Amplifiers

| Ebb | Rp | Rg | Rg2 | Rk | Cg2 | C_k | С | Eo* | V.G. |
|-----|------|------|-----|-------|-----|-------|--------|-----|------|
| | | | | | | | | | |
| | | 0.1 | - | 2680 | - | 2.4 | 0.026 | 8 | 24 |
| | 0.1 | 0.22 | | 3060 | - | 2.00 | 0.014 | 11 | 25 |
| | | 0.47 | - | 3390 | - | 1.84 | 0.0074 | 13 | 28 |
| | | 0.22 | - | 5500 | - 1 | 1.33 | 0.0136 | 10 | 25 |
| 90 | 0.22 | 0.47 | - | 6300 | - | 1.01 | 0.0067 | 14 | 28 |
| | | 1.0 | - | 6930 | - | 0.92 | 0.0038 | 15 | 28 |
| | | 0.47 | - | 10900 | - | 0.63 | 0.007 | 13 | 26 |
| | 0.47 | 1.0 | - | 12500 | - | 0.52 | 0.0043 | 14 | 28 |
| | | 2.2 | - | 13500 | | 0.47 | 0.0031 | 18 | 28 |
| | | 0.1 | - | 1407 | - | 3.6 | 0.029 | 20 | 31 |
| | 0.1 | 0.22 | - | 1674 | - | 3.0 | 0.016 | 28 | 33 |
| | | 0.47 | - | 1786 | | 2.6 | 0.0083 | 31 | 34 |
| | | 0.22 | - | 2890 | - | 1.75 | 0.0140 | 24 | 33 |
| 180 | 0.22 | 0.47 | - | 3860 | - | 1.34 | 0.0077 | 35 | 33 |
| | | 1.0 | - | 4660 | - | 1.14 | 0.0047 | 42 | 33 |
| 1. | | 0.47 | - | 6960 | - | 0.83 | 0.0075 | 31 | 31 |
| | 0.47 | 1.0 | - | 8450 | | 0.67 | 0.0046 | 39 | 32 |
| | | 2.2 | - | 9600 | - | 0.55 | 0.0032 | 45 | 32 |
| | | 0.1 | - | 974 | - | 4.0 | 0.028 | 37 | 34 |
| 1 | 0.1 | 0.22 | - | 1404 | - | 3.1 | 0.015 | 57 | 34 |
| | | 0.47 | - | 2169 | | 2.5 | 0.0083 | 78 | 33 |
| | | 0.22 | - | 2510 | - | 1.9 | 0.015 | 50 | 33 |
| 300 | 0.22 | 0.47 | - | 4200 | - 1 | 1.3 | 0.0074 | 78 | 33 |
| | | 1.0 | - | 4950 | - | 1.1 | 0.0046 | 85 | 32 |
| | | 0.47 | - | 5700 | - | 0.90 | 0.0076 | 57 | 33 |
| | 0.47 | 1.0 | - | 8720 | - | 0.62 | 0.0041 | 81 | 32 |
| | | 2.2 | - | 9700 | | 0.57 | 0.0030 | 88 | 32 |
| | | 1 | | 1 | 1 | 1 | 1 | | |

(See page 492 for explanation of column headings)



6AB4 12AT7*

See Circuit Diagram 1

| 1 | 0.1 | 0.1 0.22 0.47 | - | 4200 4600 4800 | | 2.5 2.2 2.0 | 0.025 0.014 0.0065 | 5.4 7.5 9.1 | 22 27 30 |
|-----|------|---------------------|---|-------------------------|---|--------------------|---------------------------|-------------------|----------------|
| 90 | 0.22 | 0.22 0.47 1.0 | | 7000 7800 8100 | | 1.5 1.3 1.1 | 0.013 0.007 0.0035 | 7.3 10 12 | 30 34 37 |
| | 0.47 | 0.47 1.0 2.2 | | 12000 14000 15000 | | 0.83 0.7 0.6 | 0.006 0.0035 0.002 | 10 14 16 | 36 39 41 |
| | 0.1 | 0.1 0.22 0.47 | - | 1900 2200 2500 | | 3.6 3.1 2.8 | 0.027 0.014 0.0065 | 19 25 32 | 30 35 37 |
| 180 | 0.22 | 0.22 0.47 1.0 | | 3400 4100 4600 | | 2.2 1.7 1.5 | 0.014 0.0065 0.0035 | 24 34 38 | 38 42 44 |
| | 0.47 | 0.47 1.0 2.2 | - | 6600 8100 9100 | | 1.1 0.9 0.8 | 0.0065 0.0035 0.002 | 29 38 43 | 44 46 47 |
| | 0.1 | 0.1 0.22 0.47 | | 1500 1800 2100 | | 4.4 3.6 3.0 | 0.027 0.014 0.0065 | 40 54 63 | 34 38 41 |
| 300 | 0.22 | 0.22 0.47 0.1 | | 2600 3200 3700 | | 2.5 1.9 1.6 | 0.013 0.0065 0.0035 | 51 65 77 | 42 46 48 |
| | 0.47 | 0.47 1.0 2.2 | - | 5200 6300 7200 | - | 1.2 1.0 0.9 | 0.006 0.0035 0.002 | 61 74 85 | 48 50 51 |



5T8 6AT6 6CN7 6SL7GT• 6T8A 12AT6 12SL7GT•

See Circuit Diagram 1

• One triode unit. * Peak volts.

RCA Receiving Tube Manual =

Eo* V.G. Rp Rg Ck C Ebb Rg2 Rk Cg2 0.044 4.6 0.020 29 0.1 13 0.1 0.22 0.35 1700 0.046 4.5 0.012 17 39 0.047 4.4 0.006 0.47 20 47 0.22 0.034 3.2 0.010 15 43 90 0.22 0.47 0.80 3000 0.035 3.1 0.005 21 59 1.0 0.036 3.0 0.003 24 67 0.005 21 59 0.47 0.021 1.8 0.47 1.0 1.9 7000 0.022 1.7 0.003 25 75 2.2 0.023 1.7 0.002 28 87 7.4 0.1 0.060 0.020 24 39 0.22 0.35 700 0.062 7.3 0.012 28 56 0.1 0.006 0.47 0.064 7.2 33 65 0.22 0.045 5.5 0.010 24 65 180 0.22 0.47 0.80 1200 0.046 5.3 0.005 31 87 0.003 101 1.0 0.048 5.2 34 0.47 0.033 3.5 0.005 27 98 0.47 1.0 1.9 2500 0.034 3.4 0.003 122 32 2.2 0.035 3.3 0.002 37 140 10.8 0.1 0.075 0.020 25 51 0.1 0.22 0.35 300 0.077 10.6 0.012 32 68 0.47 0.080 10.5 0.006 35 83 0.22 0.056 7.9 0.010 28 81 300 0.22 0.47 0.80 600 0.057 7.5 0.005 37 109 0.058 0.003 41 1.0 7.4 123 0.47 0.044 5.3 0.005 34 125 0.47 1.0 1.3 1200 0.046 5.2 0.003 42 152 2.2 0.047 5.1 0.002 48 174 0.047 0.060 9 10 1800 2.9 -0.047 0.1 2100 2.4 0.033 12 11 0.016 14 0.22 -2200 -2.3 21 0.1 3200 1.8 0.027 10 12 -_ 90 0.1 0.22 3900 1.3 0.015 13 13 -0.47 1.0 0.007 16 13 4300 _ As Triode: 0.22 6200 0.87 0.015 12 13 0 22 0.47 8100 0.53 0.006 16 13 --1.00 9000 _ 0.49 0.003 19 14 0.047 1200 3.5 0.063 21 12 _ -0.047 0.1 _ 1600 ----2.6 0.033 29 13 0.22 0.016 ----1800 ---2.4 35 13 2200 1.9 0.031 26 0.1 13 180 2000 1.35 0.015 0.1 0.22 33 14 --0.47 3400 -1.1 0.007 40 14 4500 0.92 0.015 14 0.22 -_ 28 0.22 6400 0.006 0.47 0.61 39 14 -----1.00 8200 0.003 14 0.52 47 -0.047 1100 3.9 0.063 42 13 -0.047 0 1 1500 28 0.033 65 13 _ _ 0.22 1700 2.5 0.016 71 14 0.1 2000 2 1 0.032 45 15 -_ 300 0.1 0.22 3400 1.4 0.015 74 15 83 0.47 ----3700 _ 1.1 0.007 15 0.22 _ 0.97 4300 0.015 50 15 0.22 0.47 15 _ 7200 _ 0.63 0.007 88 1.00 7400 0.63 0.003 94 15 _ -

(See page 492 for explanation of column headings)

* Peak volts.

6

5879

See Circuit Diagram 3

5879

See Circuit Diagram 1

Resistance-Coupled Amplifiers =

(See page 492 for explanation of column headings)

| Ebb | Rp | Rg | Rg2 | Rk | Cg2 | Ck | C | E _o * | V.G. | |
|-----|-------|----------------------|-----|-------------------------|-------|----------------------|---------------------------|------------------|----------------|------------------------------|
| 1 | 0.047 | 0.047 0.1 0.22 | | 1870 2230 2500 | - | 3.1 2.5 2.1 | 0.063 0.031 0.016 | 14 18 20 | 13 14 14 | 8 |
| 90 | 0.1 | 0.1 0.22 0.47 | | 3370 4100 4800 | | 1.8 1.3 1.1 | 0.034 0.015 0.006 | 15 20 23 | 14 14 15 | 6CG7 • |
| | 0.22 | 0.22 0.47 1.00 | | 7000 9100 10500 | | 0.80 0.65 0.60 | 0.013 0.007 0.004 | 16 22 25 | 14 14 15 | 6FQ7 6J5 |
| | 0.047 | 0.047 0.1 0.22 | | 1500 1860 2160 | | 3.6 2.9 2.2 | 0.066 0.055 0.015 | 33 41 47 | 14 14 15 | 6SN7GTB• 8CG7 12SN7GTA |
| 180 | 0.1 | 0.1 0.22 0.47 | | 2750 3550 4140 | | 1.8 1.4 1.3 | 0.028 0.015 0.007 | 35 45 51 | 15 15 16 | 125147 014 |
| | 0.22 | 0.22 0.47 1.00 | | 5150 7000 7800 | - | 1.0 0.71 0.61 | 0.016 0.007 0.004 | 36 45 51 | 16 16 16 | See Circuit |
| | 0.047 | 0.047 0.1 0.22 | - | 1300 1580 1800 | | 3.6 3.0 2.5 | 0.061 0.032 0.015 | 59 73 83 | 14 15 16 | Diagram 1 |
| 300 | 0.1 | 0.1 0.22 0.47 | - | 2500 3130 3900 | - | 1.9 1.4 1.2 | 0.031 0.014 0.0065 | 68 82 96 | 16 16 16 | |
| | 0.22 | 0.22 0.47 1.00 | | 4800 6500 7800 | - | 0.95 0.69 0.58 | 0.015 0.0065 0.0035 | 68 85 96 | 16 16 16 | |
| | 0.1 | 0.1 0.22 0.47 | | 4400 4700 4800 | | 2.7 2.4 2.3 | 0.023 0.013 0.007 | 5 6 8 | 29 35 41 | (9) |
| 90 | 0.22 | 0.22 0.47 1.0 | | 7000 7400 7600 | | 1.6 1.4 1.3 | 0.012 0.006 0.003 | 6 9 11 | 39 45 48 | |
| | 0.47 | 0.47 1.0 2.2 | - | 12000 13000 14000 | | 0.9 0.8 0.7 | 0.006 0.003 0.002 | 9 11 13 | 48 52 55 | 3AV6 6AV6 6EU7* |
| | 0.1 | 0.1 0.22 0.47 | | 1800 2000 2200 | | 4.0 3.5 3.1 | 0.025 0.013 0.006 | 18 25 32 | 40 47 52 | 12AV6 12AX7* |
| 180 | 0.22 | 0.22 0.47 1.0 | | 3000 3500 3900 | | 2.4 2.1 1.8 | 0.012 0.006 0.003 | 24 34 39 | 53 59 63 | 12AX7A* 20EZ7* |
| | 0.47 | 0.47 1.0 2.2 | | 5800 6700 7400 | 1 1 1 | 1.3 1.1 1.0 | 0.006 0.003 0.002 | 30 39 45 | 62 66 68 | 7025• |
| | 0.1 | 0.1 0.22 0.47 | | 1300 1500 1700 | 1 1 1 | 4.6 4.0 3.6 | 0.027 0.013 0.006 | 43 57 66 | 45 52 57 | See Circuit Diagram 1 |
| 300 | 0.22 | 0.22 0.47 1.0 | | 2200 2800 3100 | | 3.0 2.3 2.1 | 0.013 0.006 0.003 | 54 69 79 | 59 65 68 | |
| | 0.47 | 0.47 1.0 2.2 | | 4300 5200 5900 | 1 1 3 | 1.6 1.3 1.1 | 0.006 0.003 0.002 | 62 77 92 | 69 73 75 | |

• One triode unit.

* Peak volts.

= RCA Receiving Tube Manual =

(See page 492 for explanation of column headings)

| | Ebb | Rp | Rg | R _{g2} | Rk | C.a | Ck | C | E _o * | V.G. |
|--------------------------|----------|-------|-------------|-----------------|--------------|-------------|--------------|------------------|------------------|------------|
| 0 | | тр | _ ANG | rtg2 | I INK | Cg2 | | <u> </u> | 100 | v.G. |
| (10) | | 0.045 | 0.047 | | 1580 | - | 4.0 | 0.058 | 9 | 18 |
| | | 0.047 | 0.10 0.22 | - | 1760 1820 | _ | 3.5 | 0.032 0.015 | 13 16 | 19 20 |
| \mathbf{O} | | | 0.1 | - | 2920 | - | 2.1 | 0.029 | 12 | 19 |
| | 90 | 0.1 | 0.22 0.47 | - | 3570 4020 | - | 1.7 | 0.015 | 17 | 20 |
| 4BQ7A° | | | | | | | 1.4 | 0.0075 | 20 | 20 |
| 4BZ7* | | 0.22 | 0.22 0.47 | - | 6040 7500 | - | 0.98 | 0.0135 0.0075 | 16 21 | 19 20 |
| 5BK7A° | | | 1.0 | - | 8800 | - | 0.63 | 0.0036 | 25 | 20 |
| 5BQ7A* | | 0.047 | 0.047 | - | 694 | - | 6.0 4.4 | 0.062 | 25 32 | 23 24 |
| 6BK7 B* | | 0.047 | 0.1 0.22 | - | 817 905 | - | 4.4 | 0.032 0.0155 | 32 | 24 |
| 6BQ7A* | | | 0.1 | - | 1596 | - | 2.80 | 0.030 | 30 | 23 |
| | 180 | 0.10 | 0.22 | - | 1630 | | 2.30 | 0.0152 | 32 | 24 |
| 6BZ7° | | | 0.47 | - | 1860 | | 2.00 | 0.0073 | 38 | 24 |
| | | 0.22 | 0.22 0.47 | - | 3950 4500 | - | 1.24 | 0.0150 0.0072 | 35 41 | 22 23 |
| See Circuit | | | 1.0 | - | 5530 | | 0.79 | 0.0038 | 49 | 23 |
| Diagram 1 | | | 0.047 | - | 438 | - | 6.70 | 0.062 | 38 | 26 |
| | | 0.047 | 0.1 0.22 | - | 542 644 | - | 5.50 4.30 | 0.032 0.016 | 48 57 | 27 |
| | | | 0.10 | - | 1009 | _ | 3.5 | 0.031 | 42 | 25 |
| | 300 | 0.10 | 0.22 | - | 1332 | - | 2.5 | 0.015 | 56 | 26 |
| | | | 0.47 | - | 1609 | | 2.1 | 0.0074 | 64 | 25 |
| | | 0.22 | 0.22 0.47 | _ | 2623 3900 | _ | 1.5 | 0.015 0.0073 | 50 70 | 24 24 |
| | | 0.22 | 1.0 | - 1 | 4920 | - | 0.88 | 0.0039 | 84 | 24 |
| | | | 0.00 | 0.400 | | 0.046 | | 0.0004 | 10 | 00 |
| | | 0.22 | 0.22 0.47 | 0.480 0.480 | 3800 3800 | 0.046 0.049 | 5.5 | 0.0084 0.0054 | 10 16 | 89 114 |
| (11) | | т. | 1.0 | 0.500 | 4400 | 0.045 | 5.3 | 0.0034 | 23 | 128 |
| \bigcirc | 90 | 0.47 | 0.47 1.0 | 1.04 1.04 | 7200 7700 | 0.033 | 2.9 2.8 | 0.0044 0.0029 | 10 15 | 111 133 |
| | 90 | 0.47 | 2.2 | 1.10 | 8400 | 0.033 | 2.6 | 0.0029 | 18 | 152 |
| 3BC5 | <u> </u> | | 1.0 | 2.50 | 16000 | 0.018 | 1.4 | 0.0023 | 10 | 118 |
| 3CB6 | | 1.0 | 2.2 | 2.50 | 18600 | 0.016 | 1.2 | 0.0017 | 11 | 139 |
| 3CF6 | | 0.00 | 0.22 | 0.550 | 1600 | 0.072 | 9.5 | 0.0090 | 30 36 | 161 |
| 4BC5 | | 0.22 | 0.47 1.0 | 0.620 0.650 | 1800 1900 | 0.062 | 8.5 8.5 | 0.0053 0.0034 | 36 43 | 208 239 |
| 46C5 4CB6 | · | | 0.47 | 1.00 | 3400 | 0.059 | 6.0 | 0.0048 | 34 | 183 |
| | 180 | 0.47 | 1.0 | 1.00 | 3500 3800 | 0.059 0.059 | 6.0 5.8 | 0.0031 0.0020 | 41 46 | 229 262 |
| 6AG5 | | | 2.2 | | | | 2.7 | | | 202 |
| 6BC5 | | 1.0 | 1.0 2.2 | 2.60 2.60 | 7300 7400 | 0.029 0.029 | 2.7 | 0.0022 0.0016 | 33 38 | 227 |
| 6CB6 | | | 0.22 | 0.600 | 980 | 0.085 | 13.0 | 0.0085 | 51 | 223 |
| 6CB6A | | 0.22 | 0.47 | 0.680 | 1090 1150 | 0.084 0.081 | 12.0 11.0 | 0.0055 | 64 74 | 288 334 |
| 6CF6 | | | | | | | | | 52 | 285 |
| | 300 | 0.47 | 0.47 1.0 | 1.25 1.34 | 2000 2150 | 0.064 0.061 | 7.9 7.6 | 0.0045 0.0029 | 52 67 | 285 363 |
| See Circuit | | - | 2.2 | 1.53 | 2350 | 0.057 | 7.1 | 0.0019 | 79 | 416 |
| See Circuit Diagram 3 | | 1.0 | 1.0 | 2.60 | 4000 | 0.044 | 5.2 | 0.0023 | 51 | 334 |
| 0 | | 1.0 | 2.2 | 3.00 | 4700 | 0.038 | 4.3 | 0.0015 | 69 | 427 |

• One triode unit.

^{*} Peak volts.

Resistance-Coupled Amplifiers =

| Ebb | Rp | Rg | R _{g2} | Rk | Cg2 | Ck | C | E _o * | V.G. |
|-----|-------|----------------------|-------------------------|---------------------------|-------------------------|----------------------|----------------------------|------------------|-------------------|
| | 0.22 | 0.22 0.47 1.0 | 0.560 0.600 0.640 | 3700 3900 4200 | 0.046 0.043 0.039 | 4.50 4.30 4.00 | 0.0090 0.0055 0.0033 | 12 17 19 | 73 95 109 |
| 90 | 0.47 | 0.47 1.0 2.2 | 0.870 0.980 1.00 | 6000 6700 6700 | 0.036 0.044 0.043 | 2.70 3.00 2.80 | 0.0046 0.0030 0.0020 | 16 22 25 | 95 113 131 |
| | 1.0 | 1.0 2.2 | 2.00 2.20 | 12200 12800 | 0.021 0.024 | 1.44 1.74 | 0.0028 0.0016 | 15 21 | 119 167 |
| | 0.22 | 0.22 0.47 1.0 | 0.530 0.600 0.650 | 1570 1730 1820 | 0.069 0.064 0.061 | 7.50 7.40 7.30 | 0.0088 0.0064 0.0034 | 32 38 45 | 82 164 190 |
| 180 | 0.47 | 0.47 1.0 2.2 | 1.12 1.40 1.57 | 3200 3500 3740 | 0.053 0.042 0.040 | 5.30 5.10 5.40 | 0.0046 0.0028 0.0019 | 35 40 45 | 147 209 250 |
| | 1.0 | 1.0 2.2 | 2.50 3.40 | 6500 7500 | 0.039 0.026 | 2.80 2.30 | 0.0024 0.0015 | 34 39 | 179 277 |
| | 0.22 | 0.22 0.47 1.0 | 0.600 0.670 0.720 | 9200 1010 1100 | 0.086 0.076 0.076 | 11.2 10.5 10.0 | 0.0085 0.0052 0.0033 | 52 66 77 | 182 236 257 |
| 300 | 0.47 | 0.47 1.0 2.2 | 1.25 1.43 1.45 | 1950 3210 2200 | 0.060 0.053 0.055 | 7.0 6.4 6.3 | 0.0044 0.0027 0.0019 | 41 72 82 | 221 296 345 |
| | 1.0 | 1.0 2.2 | 3.00 3.30 | ⁻ 4100 4340 | 0.040 0.037 | 4.2 3.6 | 0.0022 0.0016 | 57 74 | 295 378 |
| | 0.047 | 0.047 0.1 0.22 | | 1292 1401 1470 | | 3.3 2.8 2.4 | 0.060 0.032 0.016 | 8 10 11 | 12 13 13 |
| 90 | 0.10 | 0.1 0.22 0.47 | | 2630 3090 3440 | | 1.60 1.24 1.10 | 0.029 0.015 0.008 | 9 12 14 | 13 13 14 |
| | 0.22 | 0.22 0.47 1.0 | | 6550 8270 9130 | | 0.70 0.51 0.44 | 0.015 0.0077 0.0045 | 12 16 18 | 12 12 12 |
| | 0.047 | 0.047 0.1 0.22 | | 723 836 948 | | 4.0 3.5 2.9 | 0.061 0.032 0.016 | 16 20 24 | 14 14 15 |
| 180 | 0.10 | 0.1 0.22 0.47 | | 1543 2002 2522 | | 2.0 1.6 1.2 | 0.031 0.016 0.0082 | 17 24 30 | 14 14 13 |
| | 0.22 | 0.22 0.47 1.0 | | 4390 6122 8060 | | 0.79 0.57 0.47 | 0.015 0.0078 0.0046 | 24 33 41 | 13 12 12 |
| | 0.047 | 0.047 0.1 0.22 | | 534 726 840 | 111 | 4.0 3.6 3.0 | 0.061 0.031 0.015 | 27 38 44 | 15 15 15 |
| 300 | 0.10 | 0.1 0.22 0.47 | | 1117 1613 2043 | 1 1 1 | 2.3 1.7 1.31 | 0.031 0.0155 0.0078 | 26 41 51 | 15 14 14 |
| | 0.22 | 0.22 0.47 | | 3133 4480 4930 | | 0.93 0.69 0.56 | 0.015 0.0079 0.0045 | 36 51 55 | 13 13 13 |

(See page 492 for explanation of column headings)



7199

Pentode Unit

See Circuit Diagram 3

13

7199


Triode Unit

See Circuit Diagram 1

* Peak volts.

Outlines

(All dimensions are in inches)

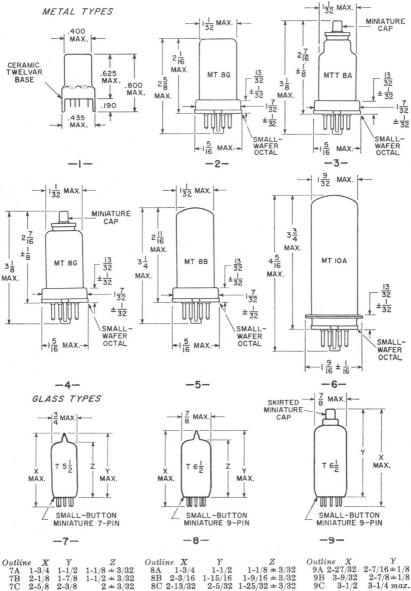


| uune A | I | 4 | Outtine A | 1 | - 21 | Outline A | 1 | |
|----------|---------|------------------|------------|-----------|--------------------|-----------|-----------------|--|
| 7A 1-3/4 | 1 - 1/2 | $1-1/8 \pm 3/32$ | 8A 1-3/4 | 1 - 1/2 | $1-1/8 \pm 3/32$ | | | |
| 7B 2-1/8 | 1 - 7/8 | $1-1/2 \pm 3/32$ | 8B 2-3/16 | 1 - 15/16 | $1-9/16 \pm 3/32$ | 9B 3-9/32 | $2-7/8 \pm 1/8$ | |
| 7C 2-5/8 | 2-3/8 | $2 \pm 3/32$ | 8C 2-13/32 | 2-5/32 | $1-25/32 \pm 3/32$ | 9C 3-1/2 | 3-1/4 max. | |
| | , | | 8D 2-5/8 | 2-3/8 | $2 \pm 3/32$ | | | |
| | | | 8E 3-1/16 | 2-13/16 | $2-7/16 \pm 3/32$ | | | |
| | | | | 1 | | | | |

Outlines — ----- I.I88 MAX. Y MAX. Ζ X MAX. X MAX. MAX. Т9 Т9 Т9 X MAX. SMALL-BUTTON DUODECAR 12-PIN LARGE-BUTTON NEONOVAL 9-PIN 000000

-12-

| Outline | X | Y | Z | Outline | e X | Y | Z | Outline | X = X | Y |
|---------|-------|-------|---------------|---------|-------|-------|---------------|---------|-------|---------------|
| 10A | 3.000 | 2.620 | 2.100 - 2.280 | 11A | 2.630 | 2.320 | 1.770 - 2.010 | 12A | 1.875 | 1.250 - 1.500 |
| 10B | 3.080 | 2.700 | 2.050 - 2.230 | 11B | 2.930 | 2.620 | 2.070 - 2.310 | 12B | 2.375 | 1.750 - 2.000 |
| 10C | 3.110 | 2.730 | 2.210 - 2.390 | 11C | 3.230 | 2.920 | 2.370 - 2.610 | 12C | 2.625 | 2.000 - 2.250 |
| 10D | 3.410 | 3.030 | 2.510 - 2.690 | | | | | 12D | 2.875 | 2.250 - 2.500 |
| | | | | | | | | | | |

-11-





SMALL-BUTTON

-10-

ż










| Outline X 13A 2-25/32 13B 3-5/32 | Outline X 14A 2-7/8 14B 3 14C 3-5/16 14D 3-3/8 14E 3-7/16 14E 3-12/16 | 2-7/16 2-3/4 2-13/16 2-7/8 | 1-9 /32 1-9 /32 | 15C | 3-5/16 3-9/16 3-7/8 | Y 2-3 /4 3 3-5 /16 3-1 /2 | 1-9 /32 1-9 /32 |
|--|---|-------------------------------------|--------------------|-----|---------------------------|---------------------------------------|--------------------|
| | 14F 3-13/16 | 5 3-1/4 | 1-9/32 | | | | |

— RCA Receiving Tube Manual —






1.562 MAX.




 $\begin{array}{ccccc} Outline & X & Y & Z \\ 16A & 3.875 & 2.750-3.000 & 1.188 \\ 16B & 3.625 & 3.000-3.250 & 1.188 \\ 16C & 3.625 & 3.000-3.250 & 1.563 \\ 16D & 4.125 & 3.500-3.750 & 1.563 \end{array}$

 $\begin{array}{c|ccccc} Outline & X & Y & Z \\ 17A & 3.410 & 3.030 & 2.510 \pm 0.090 \\ 17B & 4.160 & 3.780 & 3.260 - 3.440 \end{array}$


 $\begin{array}{ccc} Outline \ X & Y \\ 18A & 3.55 & 3.04 \pm 0.13 \\ 18B & 4.60 & 4.09 \pm 0.13 \end{array}$





| Outline | X | Y | Z |
|------------|---------|---------|-----------|
| 19A | 3 - 7/8 | 3-5/16 | 1 - 13/32 |
| 19B | 4 | 3-7/16 | 1 - 13/32 |
| 19C | 4 - 1/4 | 3-11/16 | 1-3/8 |
| 19D | 4 - 5/8 | 4-1/16 | 1-3/8 |
| 19E | 4 - 3/4 | 4-3/16 | 1 - 11/16 |
| | | | |









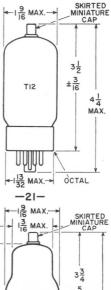





14



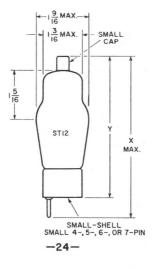


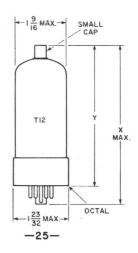





503

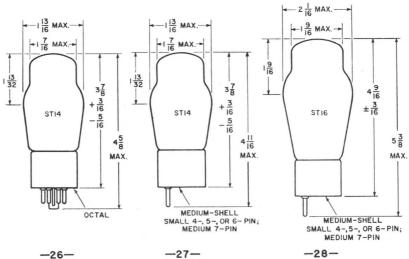

Circuits

The circuits included in this Manual illustrate some of the more important applications of RCA receiving tubes; they are not necessarily examples of commercial practice. These circuits have been conservatively designed and are capable of excellent performance. Electrical specifications are given for circuit components to assist those interested in home construction. Layouts and mechanical details are omitted because they vary widely with the requirements of individual set builders and with the sizes and shapes of the components employed.

Circuits designed for operation from both ac and dc voltage supplies should be installed in non-metallic cabinets or properly insulated from metallic cabinets. Potentiometer shafts and switches should make use of insulated (plastic) knobs. In practical use, no metallic part of an "ac/dc" chassis should be exposed to touch, accidental or otherwise. When such circuits are tested outside of their cabinets, a line isolation transformer such as the RCA WP-25A Isotap should be used.

Performance of these circuits depends as much on the quality of the components selected and the care employed in layout and construction as on the circuits themselves. Good signal reproduction from receivers and amplifiers requires the use of good-quality speakers, transformers, chokes, and input sources (microphones, phonograph pickups, etc).

Coils for the receiver circuits may be purchased at local parts dealers by specifying the characteristics required: for rf coils, the circuit position (antenna or interstage), tuning range desired, and tuning capacitances employed; for if coils or transformers, the intermediate frequency, circuit position (1st if, 2nd if, etc.), and, in some cases, the associated tube types; for oscillator coils, the receiver tuning range, the intermediate frequency, the type of converter tube, and the type of winding used (tapped or transformer-coupled).

The voltage ratings specified for capacitors are the minimum dc working voltages required. Paper, mica, or ceramic capacitors having higher voltage ratings than those specified may be used except insofar as the physical sizes of such capacitors may affect equipment layout. However, if electrolytic capacitors having substantially higher voltage ratings than those specified are used. they may not "form" completely at the operating voltage, with the result that the effective capacitances of such units may be below their rated value. The wattage ratings specified for resistors assume methods of construction that provide adequate ventilation; compact installations having poor ventilation may require resistors of higher wattage ratings.

Circuits which work at very high frequencies or which are required to handle very wide bandwidths demand more than ordinary skill and experience in construction. Placement of component parts is quite critical and may require considerable experimentation. All rf leads to components including bypass capacitors must be kept short and must be properly dressed to minimize undesirable coupling and capacitance effects. Correct circuit alignment and oscillator tracking may require the use of a cathode-ray oscilloscope, a high-impedance vacuum-tube voltmeter, and a signal generator capable of supplying a properly modulated signal at the appropriate frequencies. Unless the builder has had considerable experience with broadband, high-frequency circuits, he should not undertake the construction of such circuits.

Information on the characteristics and application features of each tube type are given in the TECHNICAL DATA FOR RCA RECEIVING TUBES SECTION. This information should be helpful in the understanding and utilization of the circuits.

Circuits —

LIST OF CIRCUITS


| | | Page |
|-------|--|------|
| 22-1 | Portable Battery-Operated Superheterodyne Receiver | 506 |
| 22-2 | Portable 3-Way Superheterodyne Receiver | 507 |
| 22-3 | AC-Operated Superheterodyne Receiver | 508 |
| 22-4 | AC/DC Superheterodyne Receiver | 509 |
| 22-5 | Automobile Receiver | 510 |
| 22-6 | 144-Mc Superregenerative Receiver | 511 |
| 22-7 | Citizens-Band Transceiver. | 512 |
| 22-8 | AM/FM Receiver | 514 |
| 22-9 | TRF AM Tuner (for high-fidelity local broadcast reception) | |
| 22-10 | FM Tuner | 516 |
| 22-11 | Three-Stage IF Amplifier Limiter and Ratio Detector (for monaural or stereo tuner) | |
| 22-12 | FM Stereo Multiplex Adapter | |
| 22-13 | High-Fidelity Audio Amplifier (class AB ₁ ; power output, 15 watts). | 519 |
| 22-14 | High-Fidelity Audio Amplifier (class AB ₁ ; power output, 30 watts). | 520 |
| 22-15 | High-Fidelity Audio Amplifier (class AB ₁ ; power output, 50 watts). | 521 |
| 22-16 | Two-Channel Sterophonic Amplifier (power output, 1 watt each channel) | 522 |
| 22-17 | Two-Channel Sterophonic Amplifier With Tone Control | |
| | (power output, 1 watt each channel) | 523 |
| 22-18 | Two-Channel Audio Mixer | |
| 22-19 | Phonograph Amplifier (power output, 1 watt) | 524 |
| 22-20 | Microphone and Phonograph Amplifier (power output, 8 watts) | 525 |
| 22-21 | Preamplifier for Amateur Receiver for 10-Meter (30- Megacycle) Band (power gain, 25 to 35 db) | 526 |
| 22-22 | Preamplifier for Magnetic Phonograph Pickup (with RIAA equalization) | 526 |
| 22-23 | Preamplifier for Ceramic Phonograph Pickup (cathode- | |
| | follower, low-impedance output) | 527 |
| 22-24 | Low-Distortion Preamplifier (for low-output, high- impedance microphones) | 527 |
| 22-25 | Two-Stage Input Amplifier (cathode-follower, low- impedance output) | 528 |
| 22-26 | Bass and Treble Tone-Control Amplifier Stage | |
| 22-27 | Audio Control Unit (with volume and tone controls) | 529 |
| 22-28 | Code-Practice Oscillator | 529 |
| 22-29 | Intercommunication Set (with master unit and two or more remote units) | 530 |
| 22-30 | All-Purpose Power Supply | |
| 22-31 | Cathode-Ray Oscilloscope. | |
| 22-32 | Audio-Signal Generator | |
| 22-33 | Electronic Volt-Ohm Meter | 535 |
| | | |

RCA Receiving Tube Manual =

(22-1)

annote pi provinsi in

PORTABLE BATTERY-OPERATED SUPERHETERODYNE RECEIVER

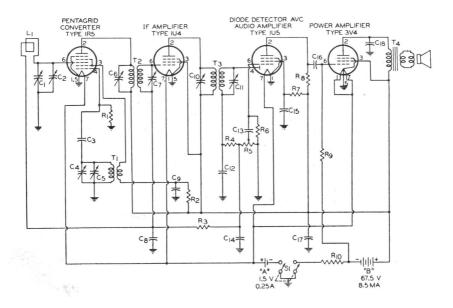

- C₁ C₄ = Ganged tuning capaci-tors: C₁, 10-274 pf; C₄, 7.5-122.5 pf C₂ C₅ = Trimmer capacitors, 2-15 pf C = 56 f comparis

- $C_3 = 56$ pf, ceramic $C_6 C_7 C_{10} C_{11} = Trimmer ca-$ pacitors for if transformers
- $C_{s=0.05 \ \mu f}$, paper, 50 v. $C_{9} C_{15}=0.02 \ \mu f$, paper, 100 v. $C_{12}=82 \ p f$, ceramic $C_{11} C_{16}=0.002 \ \mu f$, paper, 150 v.

- $C_{14}=33$ pf, ceramic $C_{17}=10 \ \mu f$, electrolytic, 100 v.

 $C_{18}=0.0022 \ \mu f$, paper, 600 v. $L_1=Loop$ antenna or ferriterod antenna, 540-1600 Kc rod antenna, 540-1600 Ke
(with specified values of
capacitance for C₁ and C₂)
R₁=0.1 megohm, 0.25 watt
R₂=15000 ohms, 0.25 watt
R₄=68000 ohms, 0.25 watt
R₄=68000 ohms, 0.25 watt $R_{\delta} = Volume \text{ control, potenti-}$


ometer, 2 megohms $\begin{array}{l} R_{\text{f}}=10 \text{ megohms, } 0.25 \text{ watt} \\ R_{\text{7}}=4.7 \text{ megohms, } 0.25 \text{ watt} \\ R_{\text{8}}R_{\text{9}}=1 \text{ megohm, } 0.25 \text{ watt} \end{array}$ $R_{10} = 390$ ohms, 0.25 watt $S_1 = Switch$, double-pole, singlethrow

- T1=Oscillator coil for use with tuning capacitor of 7.5-122.5 $\mu\mu$ f, and 455 Kc if transformer
- T₂ T₃ = Intermediate-frequency transformers, 455 Kc (permeability-tuned type may be used)
- $T_4 = Output$ transformer for matching impedance of voice coil to 10000-ohm tube load

— Circuits

(22-2)

PORTABLE 3-WAY SUPERHETERODYNE RECEIVER

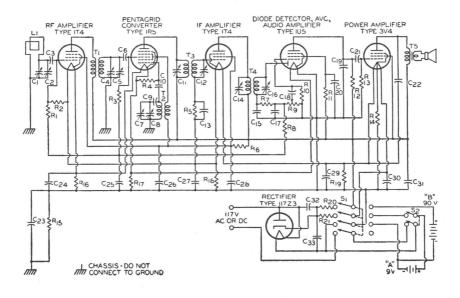

- $C_1 C_4 C_8 = Ganged tuning ca-$ C1 C4 Cs = Ganged tuning ca-pacitors, 20-450 pf C2 Cs C7=Trimmer capacitors, 4-30 pf C3 C10 C15 C17=100 pf, ceramic C9=560 pf, ceramic C10 C12 C14 C16=Trimmer ca-pacitors for if transformers Cu=0.01 uf, paper 400 x

- $C_{13}=0.01 \ \mu f$, paper 400 v. $C_{18} \ C_{21}=0.002 \ \mu f$, paper, 400 v.

- C₁₃ C₂₁=0.002 μ f, paper, 400 v. C₁₃=270 pf, ceramic C₂₀=0.02 μ f, paper, 400 v. C₂₂=0.02 μ f, paper, 400 v. C₂₁=0.1 μ f, paper, 400 v. C₂₁=0.1 μ f, paper, 400 v. C₂₄=0.05 μ f, paper, 200 v. C₂₅=0.05 μ f, paper, 400 v. C₂₆C₂₇=C₂₅=0.05 μ f, paper, 400 v. C₂₆=0.05 μ f, paper, 400 v. C₂₆=0.05 μ f, paper, 400 v.
- $C_{30}=160 \ \mu f$, electrolytic, 25 v. $C_{31}C_{33}=20 \ \mu f$, electrolytic, 150 v.

- $L_1 = Loop$ antenna or ferrite-rod antenna, 540-1600 Kc (with specified values of capacitance for C1 and C2)
- $R_1 R_2 R_{11} = 4.7$ megohms, 0.25 watt watt $R_a = 2.2$ megohms, 0.25 watt $R_i = 0.1$ megohms, 0.25 watt $R_b = 5.6$ megohms, 0.25 watt $R_b = 27000$ ohms, 0.25 watt $R_7 = 68000$ ohms, 0.25 watt

- $R_8 = 3.3$ megohms, 0.25 watt $R_9 = Volume \text{ control, potenti-}$
- ometer, 1 megohm
- B₁₀=10 megohms, 0.25 watt R₁₂=0.22 megohm, 0.25 watt R₁₃=1 megohm, 0.25 watt
- $R_{14} R_{16} = 1800$ ohms, 0.25 watt $R_{15} = 0.22$ megohm, 0.5 watt
- $R_{17} = 1000 \text{ ohms}, 0.25 \text{ watt}$ $R_{18} = 2700 \text{ ohms}, 0.25 \text{ watt}$


- $R_{19} = 1500$ ohms, 0.25 watt
- $R_{20} = 1800$ ohms, 10 watts $R_{21} = 2300$ ohms, 10 watts
- $S_1 = Switch, 4$ -pole double
 - throw
- $S_2 = Switch$, double-pole, singlethrow $T_1 = RF$ transformer, 540-1600
- Kc $T_2 = Oscillator coil for use with$
- a 560- $\mu\mu$ f padder, 20-450 $\mu\mu$ f tuning capacitor, and 455 Kc if transformer
- T₃ T₄ = Intermediate-frequency transformers. 455 Kc (permeability-tuned type may be used)
- $T_s = Output$ transformer for matching impedance of voice coil to 10000-ohm tube load

507

RCA Receiving Tube Manual =

(22-3)

AC-OPERATED SUPERHETERODYNE RECEIVER

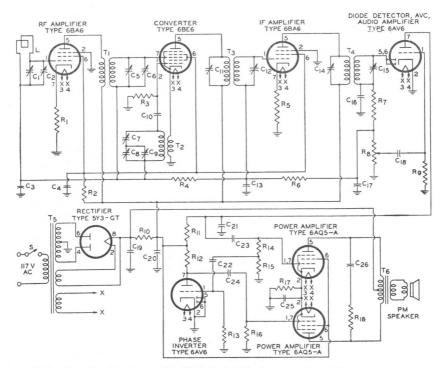

- C1 C5 C8=Ganged tuning
- capacitors, 10-365 pf C2. C6 C9=Trimmer capacitors, 4-30 pf
- C₃ C₁₈=0.05 μ f, paper, 50 v. C₄=0.05 μ f, paper, 400 v. C₇=Oscillator padding
- capacitor—follow oscillator-coil manufacturer's recommendation
- $C_{10} = 56 \text{ pf, mica}$ $C_{11} C_{12} C_{14} C_{15} = \text{Trimmer}$
- capacitors for if transformers
- Capacitors for it transforme C₁₆ C₁₇=180 pf, mica C₁₅ C₂₂=0.01 μ f, paper, 400 v. C₁₉=20 μ f, electrolytic, 450 v. C₂₀=80 μ f, electrolytic, 450 v. C₂₁=120 pf; mica C₂₁=220 pf; mica C₂₁=0.02 μ f, paper, 400 v.

C₂₅=20 μ f, electrolytic, 50 v. C₂₅=0.05 μ f, paper, 600 v. L=Loop antenna or ferrite-rod

- L=Loop antenna or ferrite-rod antenna, 540-1600 Kc (with specified values of ca-pacitance for C₁ and C₂) R₁ R₅=180 ohms, 0.5 watt R₂=12000 ohms, 0.5 watt R₃=33000 ohms, 0.5 watt R4 R6=2.2 megohms. 0.5 watt
- R₇=0.1 megohm, 0.5 watt R₈=Volume control,

potentiometer, 1 megohm R₉ R₁s=10 megohms, 0.5 watt R10=1800 ohms, 2 watts $R_{11} R_{12} = 0.22$ megohm, 0.5 watt $R_{14} R_{16} = 0.47$ megohm, 0.5 watt

 $R_{15}=8200 \text{ ohms}, 0.5 \text{ watt} R_{17}=270 \text{ ohms}, 5 \text{ watts}$


 $R_{18} = 15000$ ohms, 1 watt $S=Switch on volume control T_1=RF transformer, 540-1600$ Kc

- T₂=Oscillator coil for use with 10-365- $\mu\mu$ f tuning capacitor and 455-Kc if transformer
- T₃ T₄=Intermediate-frequency transformers, 455 Kc (permeability-tuned type may be used)
- $T_5 = Power transformer. 250-0-$ 250 volts rms, 120 ma. dc
- T₆=Output transformer for matching impedance of voice coil to a 10000-ohm plate-toplate tube load

Circuits =

(22-4)

AC/DC SUPERHETERODYNE RECEIVER

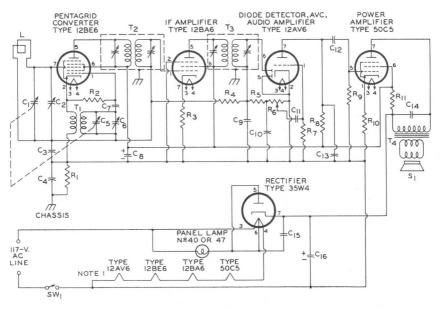

- C1 C5=Ganged tuning capacitors; C1, 10-365 pf; C5, 7-115 pf
- $C_2 = Trimmer$ capacitor, 4-30 pf
- $C_4=0.05 \ \mu f$, paper, 50 v. $C_4=0.1 \ \mu f$, paper, 400 v.
- C6=Trimmer capacitor, 2-17 pf

- 400 v.
- $\begin{array}{l} C_{6} = Trimmer capacitor, 2-1 \ell \\ C_{7} = 56 \ p', \ ceramic \\ C_{8} = 30 \ \mu f, \ electrolytic, 150 \ v. \\ C_{9} \ C_{10} = 150 \ p', \ ceramic \\ C_{11} \ C_{14} = 0.02 \ \mu f, \ paper, 400 \ v. \\ C_{14} = 30.07 \ \mu f, \ paper, 400 \ v. \\ C_{14} = 0.05 \ \mu f, \ paper, 400 \ v. \end{array}$


- $C_{16} = 50 \ \mu f$, electrolytic, 150 v. L=Loop antenna or ferrite-rod antenna, 540-1600 Kc (with specified values of capacitance for C_1 and C_2) $R_1=0.22$ megohm, 0.5 watt $R_2=33000$ ohms, 0.5 watt $R_3=100$ ohms, 0.5 watt R₄=3.3 megohms, 0.5 watt $R_5 = 47000 \text{ ohms}, 0.5 \text{ watt}$ R₆=Volume control, potentiometer, 0.5 megohm $R_7=4.7$ megohms, 0.5 watt R_8 $R_9=0.47$ megohm, 0.5 watt
- R₁₀=150 ohms, 0.5 watt
- R11=1200 ohms, 1 watt
- T₁=Oscillator coil for use with 7-115-µµf tuning capacitor and 455-Kc intermediate-
- frequency transformer
- T₂ T₃=Intermediate-frequency transformers, 455 Kc (permeability-tuned type may be used)
- T₄=Output transformer for matching impedance of voice coil to 2500-ohm tube load

NOTE 1: The following tube types are recommended for a 100-ma-heater tube complement: 18FX6A converter, 18FW6A if amplifier, 18FY6A detector and audio amplifier, 34GD5A power amplifier, and 36AM3B rectifier.

= RCA Receiving Tube Manual =

(22-5)

AUTOMOBILE RECEIVER

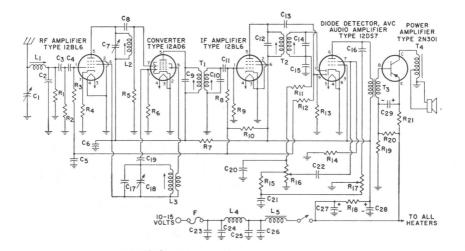

- C1, C7, C18=Ganged tuning capacitors; C₁, 7-100 pf; C₇, C₁₈; 80-350 pf C₂, C₃, C₈, C₁₃, C₁₉, C₂₀=100 pf,
- mica

- mica $C_4=27$ pf, mica $C_5=0.047 \mu f$, paper, 100 volts C_6 , $C_{16}=0.1 \mu f$, paper, 100 volts C_9 , C_{10} , C_{12} , $C_{14}=Trimmer$ Capacitors for if transformers $C_{15}=125$ pf, mica $C_{15}=125$ pf, mica $C_{21}=0.0056 \mu f$, paper, 100 volts $C_{22}=0.01 \mu f$, paper, 100 volts $C_{23}=0.47 \mu f$, paper, 100 volts C_{23} , $C_{26}=0.47 \mu f$, paper, 100 volts

- volts

- $\begin{array}{l} C_{24}, C_{25} = 300 \text{ pf, mica} \\ C_{27} = 500 \ \mu\text{f, electrolytic, } 25 \ v. \\ C_{28} = 250 \ \mu\text{f, electrolytic, } 25 \ v. \end{array}$
- $C_{29} = 500 \ \mu f$, electrolytic, 3 v.
- F = Fuse, 5 a.
- $L_1 =$ Antenna Coil for use with C_1

- $L_2 = RF$ coil for use with C_7
- L₃=Oscillator coil, tapped, for use with C₁₈, and 262.5-Kc
- if transformer L₄=RF choke, 5 a.
- L5=Filter choke, 10 mh., 5 a.
- $R_1=0.56$ megohm, 0.5 watt
- $R_2=0.47$ megohm, 0.5 watt R_3 , $R_{12}=2.2$ megohm, 0.5 watt

- R₃, R₁₂=2.2 megohm, 0.5 r R₄=150 ohms, 0.5 watt R₅=1 megohm, 0.5 watt R₆=33000 ohms, 0.5 watt R₇=100 ohms, 0.5 watt R₈, R₉, R₁₃=4.7 megohms, 0.5 watt
- R₁₀=22 megohms, 0.5 watt
- R₁₁=47000 ohms, 0.5 watt
- R14=10 megohms, 0.5 watt R15=82000 ohms, 0.5 watt
- R₁₆=Volume control,
- potentiometer, 1 megohm,
- tapped at 0.3 megohm R_{17} = Tone control,


- potentiometer, 1 megohm
- R₁₈=47 ohms, 1 watt R₁₉=220 ohms, 1 watt

- R₁₉=220 ohms, 1 watt R₂₀=15 ohms, 0.5 watt R₂₁=1 ohm, 1 watt S=Speaker, 3.2-ohm voice coil T₁=1F input transformer, 262.5 Kc T₂=1F output transformer, 262.5 Kc
- T₃=Audio driver transformer; impedance of primary, 2200 ohms; of secondary, 10 ohms; dc resistance of primary, 180 ohms; of
- primary, 180 onms; or secondary, 1.6 ohms; primary current, 15 ma. dc. T₄=Audio output transformer; impedance of primary, 20 ohms, of secondary, 4 ohms; dc scietesea of neimary, 2 dc resistance of primary, 2 ohms max.; primary current, 0.5 amperes dc.

Circuits =

(22-6)

144-Mc SUPERREGENERATIVE RECEIVER

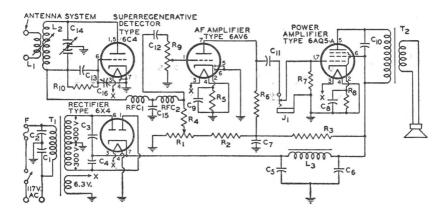

C₁ C₂= 0.1 μ f, paper, 400 v. C₃ C₄= 100 pf, mica, 500 v. C₅ C₆ C₇= 20 μ f, electrolytic, 450 v.

- 400 v. $C_8 = 25 \mu f$, electrolytic, 50 v. $C_8 = 25 \mu f$, electrolytic, 25 v. $C_{10} = 0.002 \mu f$, paper, 600 v. $C_{11} = 0.01 \mu f$, paper, 400 v. $C_{12} = 0.005 \mu f$, paper, 400 v. $C_{13} = 50 \rho f$, silver mica, 300 v. $C_{14} = Ganged or split-stator tun-$ ing canacitor 10 n f max per
- ing capacitor, 10 pf max. per section
- $C_{15} = 0.006 \ \mu f$, mica, 300 v. $C_{16} = Quench-frequency \ control$, trimmer capacitor, 3-30 pf,
- ceramic or mica F = Fuse, 0.5 ampere $J_1 = Jack \text{ for earphones}$
- $L_1 L_2 = rf transformer; L_1,$
- Lturn No. 18 Enam. wire; Ls, 4 turns of No. 12 Enam. copper wire on a ½" I.D. form (144 Mc): adjust spacing to set band
- L₃=Filter choke, 12 henries, 70 ma.
- $R_1 = Potentiometer, 50000$ ohms, 1 watt, wire wound $R_2 R_3 = 47000$ ohms, 1 watt $R_4 = 27000$ ohms, 0.5 watt $R_5 = 2700$ ohms, 1 watt


- $\begin{array}{l} R_6 \; R_7 {=}\; 0.1 \; megohm, \; 0.5 \; watt \\ R_8 {=}\; 270 \; ohms, \; 1 \; watt \\ R_9 {=}\; Volume\; control, \; potenti- \end{array}$
- ometer, 0.5 megohm $R_{10} = 4.7$ megohms, 0.5 watt $RFC_1 = One-quarter wavelength$
- (20.5 inches at 144 Mc) of No. 23 Enam. close wound on a $\frac{1}{4}$ form RFC₂ = RF choke, 8 mh. T₁ = Power transformer,
- 300-0-300 volts rms, 70 ma.;
- 6.3 volts, 1.5 amperes $T_2=Output$ transformer for matching impedance of voice coil to 5000-ohm tube load

NOTE: The use of an rf amplifier is recommended to minimize radiation from the superregenerative detector.

RCA Receiving Tube Manual =

(22-7)

CITIZENS-BAND TRANSCEIVER

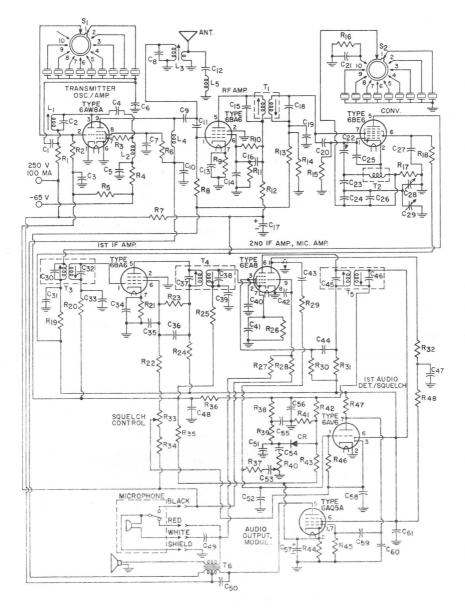

Circuits =

(22-7)

CITIZENS-BAND TRANSCEIVER (Cont'd)

C₅₂ C₅₆=200 pf, mica, 500 v.

C₁=470 pf, ceramic, 500 v. C₂=3.3 pf, ceramic, 500 v. C₂=3.5 c7 \circ C₁₀ C₁₁ C₁₄ C₁₆ C₃₉ C₃₄ C₃₆ C₅₇ C₉ C₁₀ C₁₁ C₁₄ C₁₆ C₃₉ C₄₄ C₈₅=5 pf, ceramic, 500 v. C₄ C₈₅=5 pf, ceramic, 500 v. C₁₁=18 pf, mica, 500 v. C₁₂=24 pf, mica, 500 v. C₁₂=24 pf, mica, 500 v. C₁₃=50 µf, ceramic, 500 v. C₁₃=50 µf, ceramic, 500 v. C₁₅=50 µf, ceramic, 500 v. C₁₅=20 pf, ceramic, 500 v. C₂₂=22 pf, ceramic, 500 v. C₂₂=22 pf, mica, 500 v. C₂₃=62 pf, ceramic, 500 v. C₂₃=456 pf, ceramic, 500 v. C₂₃=456 pf, ceramic, 500 v. C₂₃=42 variable, 1.5 -10 pf, ceramic, 600 v. C₃₀ C₃₂=Part of T₃ C₃₀ C₃₂=Part of T₃ C₃₀ C₃₂=Part of T₅ C₄₀=3300 pf, paper, 600 v. NOTE: See general conv.

 $C_{57}=10 \ \mu f$, electrolytic, 50 v. $C_{60}=150 \ pf$, mica, 500 v. CR=Diode, 1N34 L₁=Oscillator coil, transmitter, RCA stock No. 226183 or equiv $L_2 L_4 = 500 \mu f$, rf choke L₃=Power-amplifier coil, RCA stock No. 226184 or equiv. L5=2nd-harmonic trap, RCA stock No. 226187 or equiv. $R_1 R_2 R_{15} R_{19} R_{20} = 47000$ ohms, 0.5 watt $R_3 = 56$ ohms, 0.5 watt R4 R11 R23=27000 ohms, 0.5 watt R5 R48=56000 ohms, 0.5 watt $R_6=5600 \text{ ohms, 1 watt}$ $R_7=1000 \text{ ohms, 2 watts}$ $R_8 = 0.18$ megohm, 0.5 watt R₉ R₂₁=68 ohms, 0.5 watt R₁₀=27000 ohms, 1 watt $R_{12} = 2700 \text{ ohms}, 1 \text{ watt}$ $R_{12} R_{24} = 4700 \text{ ohms}, 1 \text{ watt}$ $R_{13} R_{35} = 10 \text{ megohms}, 0.5 \text{ watt}$ $R_{14} R_{28} R_{36} = 2.2 \text{ megohms},$ 0.5 watt $R_{16}=39$ ohms, 0.5 watt $R_{17}=82$ ohms, 0.5 watt R₁₈=15000 ohms, 1 watt R22 R34=1.5 megohms, 0.5 watt R25 R38 R45 R47=0.47 megohm,

0.5 watt


 $\begin{array}{l} R_{25}=150 \text{ ohms, } 0.5 \text{ watt} \\ R_{27} R_{30}=0.1 \text{ megohm, } 0.5 \text{ watt} \\ R_{22}=0.68 \text{ megohm, } 0.5 \text{ watt} \\ R_{31}=27000 \text{ ohms, } 2 \text{ watts} \\ R_{32}=68000 \text{ ohms, } 0.5 \text{ watt} \\ R_{31}=3 \text{ megohms, } 0.25 \text{ watt} \\ R_{37}=0.33 \text{ megohm, } 0.5 \text{ watt} \\ R_{39}=1 \text{ megohm, } 0.5 \text{ watt} \\ R_{40}=2 \text{ megohm, } 0.5 \text{ watt} \\ R_{41}=R_{22}=0.22 \text{ megohm, } 0.5 \text{ watt} \\ R_{42}=0.22 \text{ megohms, } 1 \text{ watt} \\ R_{46}=8.2 \text{ megohms, } 0.5 \text{ watt} \end{array}$

- S₁=Rotary switch, channel select transmit, RCA stock No. 226189 or equiv.
- S₂=Rotary switch, channel select receive, RCA stock No. 226189 or equiv.
- Select receive, No. 226189 or equiv. $T_1 = RF$ interstage transformer, RCA stock No. 226191 or equiv.
- T₂=Oscillator coil, receiver, RCA stock No. 226192 or equiv
- or equiv. $T_3 T_4 T_5 = IF$ transformers, RCA stock No. 226193
- or equiv. T₆=Output and modulation transformer, RCA stock No. 226194 or equiv.

NOTE: See general considerations for construction of high-frequency and broadband circuits on page 504. RCA Receiving Tube Manual =


(22-8)

AM/FM RECEIVER

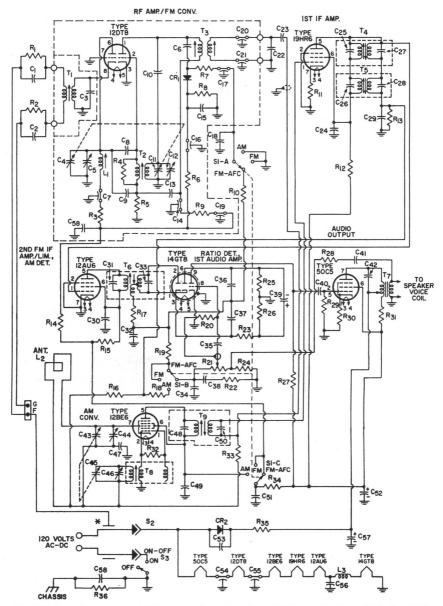

* On FM, the ac line serves as an FM antenna by means of a special line cord having a third wire which is not physically connected to the line.

NOTE: See general considerations for construction of high-frequency and broadband circuits on page 504.

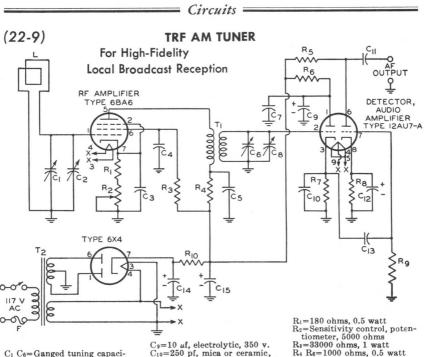

- C1 C6=Ganged tuning capaci-
- tors, 10-365 pf C₂ C₈=Trimmer capacitors,
- 4-30 pf $C_3=0.01 \mu f$, paper or ceramic,
- 200 v. $C_4=0.01 \ \mu f$, paper or ceramic,
- 400 v. C5 C11=0.1 µf, paper, 400 v.
- C7=250 pf, mica or ceramic 400 v

Parts List for AM/FM RECEIVER

- $C_1 = Part of R_1$
- $C_2 = Part of R_2$
- $C_3=36$ pf, ceramic, 500 v. C4 C11=Ganged tuning ca
- pacitors, tune L_1 and T_2 to 88-108 Mc
- $C_5 C_{12}$ =Trimmer capacitors, 1-7 pf
- C₆C₈=6.8 pf, ceramic, 500 v., N220
- C7 C16 C19=1000 pf, feed-
- through, 500 v

- through 300 V. $C_9=11 \, \text{pf}$, ceramic, 500 v. $C_{10}=68 \, \text{pf}$, ceramic, 500 v. $C_{13}=21 \, \text{pf}$, ceramic, 500 v. $C_{14}=500 \, \text{pf}$, feedthrough, 500 v. $C_{15}=0.22 \, \mu \text{f}$, ceramic disc, 500 v. $C_{17} \cos C_{23}=2000 \, \text{pf}$, feed-

- $C_{17} C_{23} C_{55} 2000 \text{ pl, feed}^2$ through, 500 v. $C_{18} = 0.15 \,\mu\text{f}$, paper, 200 v. $C_{20} C_{21} = 2 \text{ pf, feedthrough, 500 v.}$ $C_{22} = Tuning capacitor; value,$
- with cable capacitance, tunes T₃ to 10.7 Mc
- tunes T₃ to 10.7 Mc C₂₂=4700 pf, ceramic, 500 v. C₂₃ C₃₂=2700 pf, ceramic, 500 v. C₂₅ C₂₇=Part of T₄ C₂₆ C₂₈=Part of T₅ C₂₉ C₃₂=100 pf, ceramic, 500 v., NPO C₃₁ C₃₂=Part of T₆ C₄₂ C₄₂=1000 pf coronic, 500 v.

- C34 C49=1000 pf, ceramic, 500 v.

- C10=250 pf, mica or ceramic, 200 v.
- $C_{12}=25 \ \mu f$, electrolytic, 25 v.
- $C_{13}=0.05 \ \mu f$, paper, 200 v. $C_{14}=20 \ \mu f$, electrolytic, 450 v.
- $C_{15}=80 \ \mu f$, electrolytic, 450 v. F=Fuse, 1 ampere
- L=Loop antenna or ferrite-rod

antenna, 540-1600 Kc (with specified values of ca-pacitance for C_1 and C_2)

C35 C47 C51 C56=0.01 µf, ceramic, 500 v. $C_{36}C_{37}=330$ pf, mica, 500 v. $C_{38}^{*}=0.01 \ \mu$, paper, 200 v. $C_{38}^{*}=0.01 \ \mu$, paper, 200 v. $C_{39}^{*}=2 \ \mu$, electrolytic, 50 v. $C_{40}^{*}=5600 \ \text{pf}$, ceramic, 500 v. $C_{41}^{*}=0.11 \ \mu$, paper, 200 v. $C_{42}^{*}=0.022 \ \mu$, paper, 200 v. C43 C45=Ganged tuning capacitors, tune Ts to 540-1650 Kc C44 C46=Trimmer capacitors, 12 pf C48 C50=Part of T9 $C_{48} (-100 - 10 - 10) = C_{48} (-100 - 10) = 0.000 \text{ m}, \text{ electrolytic, } 150 \text{ v}.$ $C_{523} = 0.047 \,\mu\text{f}, \text{ paper, } 400 \text{ v}.$ $C_{57} = 80 \,\mu\text{f}, \text{ electrolytic, } 150 \text{ v}.$ $C_{58} = 0.1 \,\mu\text{f}, \text{ ceramic, } 500 \text{ v}.$ $C_{R1} = AFC crystal diode$ CR₂=Silicon rectifier, 1N3756 $L_1 = RF$ coil $L_2 = Antenna, air loop with$ back cover $\mu_3 = 1 \,\mu f$, rf choke $R_1 = 0.5$ megohm (includes C_1) $R_2 = 0.5$ megohm (includes C_2) $R_3 = 2200 \text{ ohms}, 0.5 \text{ watt}$ $R_4 = 1200 \text{ ohms}, 0.5 \text{ watt}$ R5 R19=33000 ohms, 0.5 watt R6 R18=47000 ohms, 0.5 watt

- R7 R27 R29=0.47 megohm.
 - 0.5 watt

R₈=3900 ohms, 0.5 watt R9 R32=22000 ohms, 0.5 watt $R_{10} R_{33} = 1$ megohm, 0.5 watt $R_{11} R_{17} = 68$ ohms, 0.5 watt R₁₂=4700 ohms, 0.5 watt R₁₃=0.33 megohm, 0.5 watt $\begin{array}{l} R_{14}=220 \text{ ohms, } 0.5 \text{ watt} \\ R_{14}=220 \text{ ohms, } 0.5 \text{ watt} \\ R_{15} R_{23}=1000 \text{ ohms, } 0.5 \text{ watt} \\ R_{16}=3.3 \text{ megohms, } 0.5 \text{ watt} \\ R_{20}=4.7 \text{ megohms, } 0.5 \text{ watt} \end{array}$ R21=Volume-control potentiometer, 1 megohm, includes S_3 $R_{22}=39000$ ohms, 0.5 watt $R_{24}=820$ ohms, 0.5 watt $R_{23}R_{26}=6800$ ohms, 0.5 watt $R_{25}R_{26}=1500$ ohms, 0.5 watt R₃₀=150 ohms, 0.5 watt $R_{31}=560$ ohms, 2 watts R34=220 ohms, 0.5 watt R₃₅=100 ohms, wire-wound, 4 watts R₃₆=0.22 megohm, 0.5 watt S1=Switch, slide, AM-FM-AFC S2=Interlock switch S3=Switch, ON-OFF, part of R21 $T_1 = Antenna transformer$ $T_2 = Oscillator transformer$ T₃ T₄ T₅ T₂=IF transformers $T_6 = Ratio-detector transformer$

 $R_5=0.1$ megohm, 0.5 watt

Rs=1500 ohms, 0.5 watt $R_9 = 0.47$ megohm, 0.5 watt

R10=7000 ohms, 10 watts $T_1 = RF$ transformer, 540-1600

6.3 volts, 1.2 amperes


T2=Power transformer, 250-0-250 volts rms, 40 ma.;

Kc.

 $R_7 = 0.15$ megohm, 0.5 watt

- $T_7 =$ Audio output transformer
- T₈=Oscillator coil

(22-10)

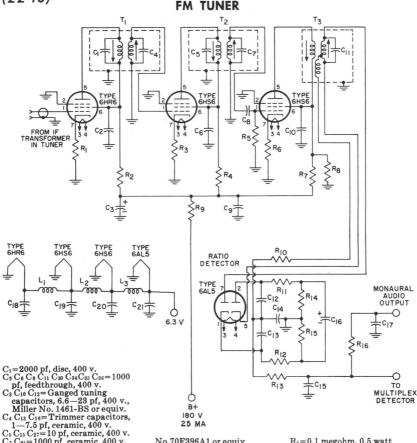

- $C_7 C_{21} = 1000 \text{ pf}$, ceramic, 400 v. $C_9 C_{28} = 2000 \text{ pf}$, feedthrough,
- 400 v. C14 C25=2000 pf, ceramic, 400 v.
- C17 C18=22 pf, ceramic, 400 v. C19=2.2 pf, ceramic, 400 v.
- $C_{20} = 47$ pf, ceramic, 400 v. $C_{22} = C_{23} C_{24} C_{37} = 0.01 \mu$ f, disc, 400 v.
- C26=6.8 pf, ceramic, 400 v.
- C_{29} = Part of T_2 $C_{31} C_{32}$ = 2 pf, feedthrough, 400 v. C₃₃=Capacitor inserted in place of tuning capacitor in
- secondary winding of T2; value, with cable capacitance, tunes input to 10.7 Mc L1=12 turns No.22 Enam.
- close-wound on 1/4-inch coil form; slug 3/8-inch Moldite No.5101 ferrite or equiv. L₂=5 turns No.22 Enam. close-
- wound on 1/4-inch coil form $L_3=4 \mu f$, rf choke, Miller

- No.70F396A1 or equiv.
- L₁=3 turns No.16 Enam. double-spaced on 1/4-inch coil form; slug 3/8-inch Moldite No.5101 ferrite or equiv.
- L₅=1½ turns No.16 Enam. close-wound on 14-inch coil form; slug ¾-inch Moldite No.5101 ferrite or equiv.
- L₆=2 µh, rf choke, Ohmite No.Z144 or equiv.
- $L_7 = RF \text{ coil}, 0.4 \,\mu\text{h}; 20 \text{ turns}$ No.26 Enam. close-wound on 0.47-megohm, 0.5-watt Allen-Bradley resistor or resistor of equivalent physical size
- L₈ L₉=1 μh, rf choke; 25 turns No. 24 Enam. close-wound on a 0.47-megohm, 1-watt Allen-Bradley resistor or resistor of equivalent physical size

- $R_1=0.1$ megohm, 0.5 watt $R_2 R_3=47000$ ohms, 0.5 watt
- $R_4 R_6 = 0.47$ megohm, 0.5 watt
- $R_5=5$ ohms, 0.5 watt
- R7=22000 ohms, 0.5 watt
- R₈ R₉=220 ohms, 0.5 watt R₁₀=4700 ohms, 0.5 watt
- $R_{11}=15000$ ohms, 1 watt S=AM/FM range switch; open position is used for local stations, closed position for distant stations
- $T_1 = RF$ transformer; primary 2 turns No.32 wire with type B nylon insulation. Alpha No.1860 or equiv., center-tapped; secondary 3 turns No.16 Enam. doublespaced on $\frac{1}{4}$ -inch coil form; slug $\frac{3}{6}$ -inch Moldite No. 5101 ferrite or equiv. $T_2=10.7$ -Mc if transformer;
- tuning capacitor in secondary removed and replaced by C₃₃

* A metal shield should be provided between the grid and plate terminals on the socket for the 6CW4. • If an AFC network is included, C₁₈ must be decreased by the capacitance loading the oscillator tank. NOTE: See general considerations for construction of high-frequency and broadband circuits on page 504.


Circuits

-

(22-11)


THREE-STAGE IF AMPLIFIER/LIMITER AND DETECTOR

For Monaural or Stereo Tuner

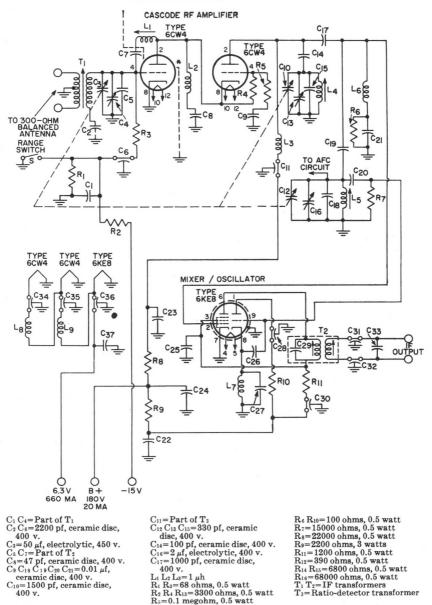

NOTE: Tube shields may be required if regeneration is encountered. See general considerations for construction of high-frequency and broadband circuits on page 504.

(22-12)

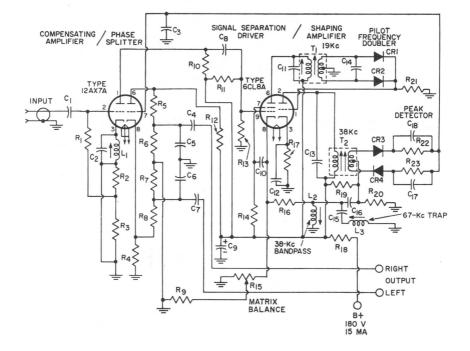

FM STEREO MULTIPLEX ADAPTER

 $C_1 C_4 C_7 C_{12} C_{16} C_{17} C_{18} = 0.01 \ \mu f$,

- ceramic, 500 v. C₂ C₁₅=2200 pf, film, 500 v., N150
- $C_3=470$ pf, ceramic, 500 v. $C_5 C_6=270$ pf, ceramic, 500 v., N750

- C₁₃=1000 pf, film, 500 v., N150
- Cl₁₉=3300 pf, ceramic, 500 v. CR₁ CR₂ CR₃ CR₄=Crystal diodes, RCA stock No.11207

- or equiv. L₁ L₃=Coil, 67-Kc trap, RCA stock No.111047 or equiv.
- L₂=Coil, 38-Kc bandpass, RCA stock No.11048 or equiv.
- $\begin{array}{l} R_1 = 0.56 \text{ megohm, } 0.5 \text{ watt} \\ R_2 = 1500 \text{ ohms, } 0.5 \text{ watt} \\ R_3 = 15000 \text{ ohms, } 0.5 \text{ watt} \\ R_4 \ R_9 \ R_{12} = 22000 \text{ ohms, } 0.5 \end{array}$

- watt R5 R6 R7 R8=0.1 megohm, 0.5
- watt R₁₀=68000 ohms, 0.5 watt
- R₁₁=3.9 megohms, 0.5 watt
- R₁₃=1 megohm, 0.5 watt
- R₁₄ R₁₆=10000 ohms, 0.5 watt


- R_{15} =Potentiometer, balance control, RCA stock No. 111044 or equiv. R17=4700 ohms, 0.5 watt
- R18=330 ohms, 1 watt R₁₉=1.2 megohms, 0.5 watt
- $R_{20}=0.15$ megohm, 0.5 watt $R_{21} R_{22} R_{23}=47000$ ohms, 0.5
- watt
- T₁=Transformer, 19-Kc, RCA stock No.111045 or equiv.
- T₂=Transformer, 38-Kc tank, RCA stock No. 111046 or equiv.

NOTE: See general considerations for construction of high-frequency and broadband circuits on page 504.

(22 - 13)

HIGH-FIDELITY AUDIO AMPLIFIER

Class AB₁; Power Output, 15 Watts

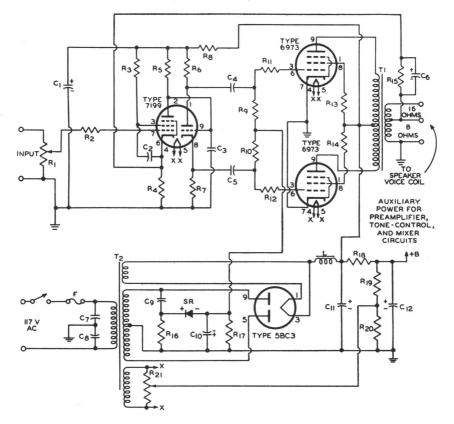

- $C_1=40 \ \mu f$, electrolytic, 450 v. $C_2 \ C_4 \ C_5=0.25 \ \mu f$, paper, 400 v. $C_3=3.3 \ pf$, ceramic or mica,
- 600 v. $C_6 = 150$ pf, ceramic or mica,
- 400 v.
- 400 v. Cr Cs=0.05 μ f, paper, 400 v. Cs=0.02 μ f, paper, 600 v. Cs=0.02 μ f, electrolytic, 50 v. Cs=80 μ f, electrolytic, 450 v. Cs=40 μ f, electrolytic, 450 v. F=Fuse, 3 amperes L=Chake 3 h. 160 ma. dc.

- L=Choke, 3 h., 160 ma., dc resistance 75 ohms or less
- R₁=Volume control, potentiometer, 1 megohm


- $R_2 = 10000$ ohms, 0.5 watt
- $\begin{array}{l} R_{3}=0.82 \text{ megohm, } 0.5 \text{ watt} \\ R_{4}=820 \text{ ohms, } 0.5 \text{ watt} \\ R_{5}=0.22 \text{ megohm, } 0.5 \text{ watt} \\ R_{6} R_{7}=15000 \text{ ohms}\pm 5 \text{ per} \end{array}$
- cent. 2 watts
- R₈=3900 ohms, 2 watts
- $R_8 = 33900$ ohms, 2 watts $R_9 R_{10} = 0.1$ megohm, 0.5 watt $R_{11} R_{12} = 1000$ ohms, 0.5 watt $R_{13} R_{14} = 100$ ohms, 0.5 watt $R_{15} = 2000$ ohms, 0.5 watt $R_{17} = 68000$ ohms, 1 watt $R_{17} = 64000$ ohms, 2 watts $R_{15} = 4700$ ohms, 2 watts
- $R_{19}=0.27$ megohm, 1 watt $R_{20}=47000$ ohms, 0.5 watt

- R21=Hum balance adjustment, potentiometer, 100 ohms, 0.5 watt SR=Selenium rectifier, 20 ma.,
- 135 volts rms
- $T_1 = Output transformer$ (having 8-ohm tap for feed-back connection) for match-ing impedance of voice coil to 6600-ohm plate-to-plate tube load; 50 watts; fre-cuency response 10 to quency response, 10 to 50000 cps.
- T2=Power transformer, 360-0-360 volts rms, 120 ma.; 6.3 v., 3.5 a; 5v., 3a.

(22 - 14)

HIGH-FIDELITY AUDIO AMPLIFIER

Class AB₁; Power Output, 30 Watts

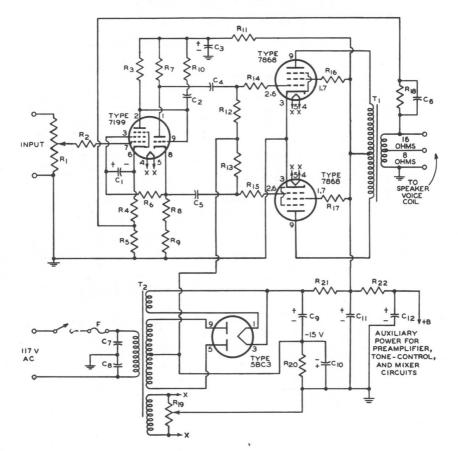

 $C_1=25 \ \mu f$, electrolytic, 50 v. $C_2=22 \ pf$, ceramic or mica, 600 v.

- $C_{3}=80 \ \mu$ f, electrolytic, 450 v C₃=80 \ \muf, electrolytic, 450 v C₄ C₅=0.25 \ \muf, paper, 600 v. C₇ C₈=0.05 \ \muf, paper, 600 v. C₇ C₈=0.05 \ \muf, paper, 600 v. C₉ C₁₁=40 \ \muf, electrolytic, 500 v.

 $C_{10}=100 \ \mu f$, electrolytic, 50 v. $C_{12}=20 \ \mu f$, electrolytic, 450 v. F=Fuse, 3 amperes, 150 v.

- R1=Volume control, potenti-
- ometer, 1 megohm $R_2=10000$ ohms, 0.5 watt

- $\begin{array}{l} R_3 = 0.22 \mbox{ megohm, } 0.5 \mbox{ watt} \\ R_4 = 820 \mbox{ ohms, } 0.5 \mbox{ watt} \\ R_5 = 10 \mbox{ ohms, } 0.5 \mbox{ watt} \end{array}$


- $R_6=0.18$ megohm, 0.5 watt $R_7=15000$ ohms ± 5 per cent,
- 2 watts $R_8=15000 \text{ ohms} \pm 5 \text{ per cent},$
- 0.5 watt
- R₉=1000 ohms, 0.5 watt
- $R_{10}=22000 \text{ ohms}, 0.5 \text{ watt}$ $R_{11}=2000 \text{ ohms}, 2 \text{ watts}$
- $R_{12} R_{13} = 0.1$ megohm, 0.5 watt $R_{14} R_{15} = 1000$ ohms, 0.5 watt
- R₁₆ R₁₇=56 ohms, 0.5 watt
- R₁₈=270 ohms, 0.5 watt

- R19=Hum balance adjustment, potentiometer, 100 ohms, 0.5 watt
- $\begin{array}{l} R_{20}=120 \text{ ohms, } 10 \text{ watts} \\ R_{21}=50 \text{ ohms, } 10 \text{ watts} \\ R_{22}=10000 \text{ ohms, } 2 \text{ watts} \end{array}$

- T₁=Output transformer (having 16-ohm tap for feedback connection) for matching impedance of voice coil to 6600-ohm plate-to-plate tube load; 50 watts; frequency
- response, 10 to 50000 cps. T_2 = Power transformer, 375-0-375 volts rms, 160 ma.; 6.3 v., 5 a.; 5 v., 3 a.

Circuits

(22 - 15)

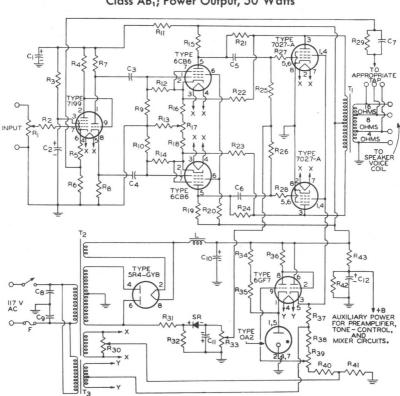

HIGH-FIDELITY AUDIO AMPLIFIER

Class AB₁; Power Output, 50 Watts

C₁ C₂=40 μ f, electrolytic, 450 v. C₃ C₄=0.02 μ f, paper, 400 v. C₅ C₅=1 μ f, paper, 400 v. C₇=0.002 μ f to 4-ohm tap; 0.0015 μ f to 8-ohm tap; or, 0.001 μ f to 16-ohm tap;

0.001 μ t to 16-ohm tap; paper, 400 v. C₈ C₉=0.05 μ f, paper, 600 v. C₁₀=20 μ f, electrolytic, 600 v. C₁₂=40 μ f, electrolytic, 150 v. C₁₂=40 μ f, electrolytic, 450 v. F=Fuse, 5 amperes L=Choke, 8 h., 250 ma., dc resistance 60 ohms, or less R₁=Volume control, potenti-

- R1=Volume control, potenti-
- ometer, 0.5 megohm $R_2=4700$ ohms, 0.5 watt
- $R_2 = 4700$ ohms, 0.5 watt $R_3 = 0.82$ megohm, 0.5 watt $R_4 = 0.22$ megohm, 0.5 watt $R_5 = 820$ ohms, 0.5 watt $R_6 = 10$ ohms, 0.5 watt

- R7 R8=15000 ohms, 2 watts R₉ R₁₀=1.5 megohms, 0.5 watt
- R11=33000 ohms, 2 watts

- $\begin{array}{l} R_{12} \; R_{14} \!=\! 1.3 \; megohms, \; 0.5 \; watt \\ R_{13} \!=\! 47 \; ohms, \; 0.5 \; watt \\ R_{15} \; R_{19} \!=\! 0.15 \; megohm, \; 0.5 \; watt \\ R_{16} \; R_{18} \!=\! 390 \; ohms, \; 0.5 \; watt \end{array}$

- R₁₇=AC balance control
- potentiometer, 500 ohms, Note 4
- $R_{20}=0.15$ megohm, 1 watt
- $R_{21} = 0.33$ megohm, 1 watt $R_{22} R_{23} = 0.12$ megohm, 2 watts $R_{25} R_{25} = 0.1$ megohm, 0.5 watt
- R₂₇ R₂₈=4700 ohms, 0.5 watt
- $R_{29} = 600$ ohms to 4-ohm tap;
- 820 ohms to 8-ohm tap; or, 1200 ohms to 16-ohm tap; 0.5 watt R_{30} = Hum balance adjustment,
- potentiometer, 100 ohms, Note 3
- R₃₁=0.12 megohm, 5 watts
- R32 R34 R35 R37=33000 ohms,
- 2 watts R₃₃=Bias adjustment, potentiometer 50000 ohms, Note 1


 $R_{36}=0.27$ megohm, 1 watt $R_{38}=10000$ ohms, 1 watt

- R₃₉=Screen-grid voltage ad-
- justment, potentiometer,
- 25000 ohms, 2 watts, Note 2 R40=15000 ohms, 2 watts
- R41=12000 ohms, 2 watts
- $R_{42}=0.22$ megohm, 2 watts $R_{43}=22000$ ohms, 2 watts
- SR=Selenium rectifier, 20 ma., 135 volts rms
- $T_1 = Output$ transformer for matching impedance of voice coil to 5000-ohm plate-to-plate tube load; 50 watts; frequency response, 10 to 50000 cps.
- $T_2 =$ Power transformer, 600-0-600 volts rms, 200 ma., 6.3 v., 5 a.; 5 v., 3 a. T_3 =Filament transformer, 6.3
- volts, center tapped, 1 ampere

NOTES: All of the following adjustments should be made before amplifier is placed into operation. (1) With 5R4-GYB rectifier out of socket, adjust R_{33} for reading of -40 volts between junction of R_{25} and R_{26} and B- (ground bus). (2) With speaker connected, adjust R_{39} for reading of 400 volts between pin 2 of 6GF7 and -B (ground bus). (3) With input shorted, adjust R₃₀ for minimum hum from speaker. (4) With input open and volume control R_1 set for maximum volume, adjust R_{17} for minimum hum from speaker.

RCA Receiving Tube Manual =

(21-16)

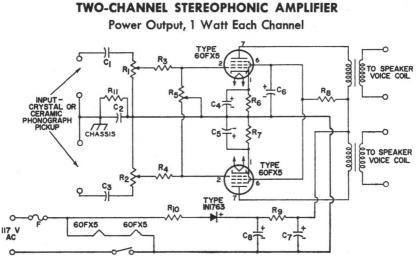

C₁, C₂=0.22 μ f, 400 v., paper C₂=0.1 μ f, 400 v., paper C₄, C₁=50 μ f, 25 v., electrolytic C₅=50 μ f, 150 v., electrolytic C₇, C₈=50 μ f, 150 v., electrolytic F=Fuse, 3 amperes

R₁, R₂=Volume control, potentiometer, 1.5 megohms,

ganged R₃, R₄=47000 ohms, 0.5 watt

 $R_5 = Balance control,$

potentiometer, 2 megohms R₆, R₇=60 ohms, 1 watt


 $R_8=220$ ohms, 2 watts $R_9=280$ ohms, 2 watts $R_{10}=12$ ohms, 1 watt R₁₁=0.22 megohm, 0.5 watt T₁, T₂=Output transformer for matching impedance of voice coil to 3000-ohm tube load.

Circuits

(22.17)

TWO-CHANNEL STEREOPHONIC AMPLIFIER With Tone Control

Power Output, 1 Watt Each Channel

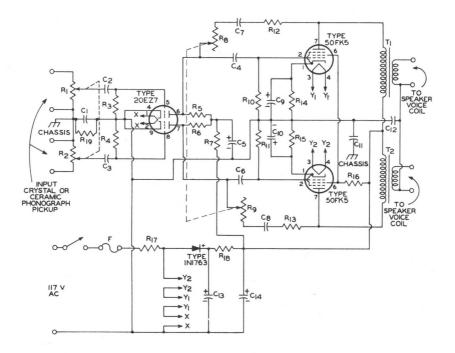

C₁ C₁₁=0.047 μ f, paper, 150 v. C₂ C₃=0.01 μ f, paper, 150 v. C₄ C₅=0.022 μ f, paper, 150 v.

 $C_4 C_6 = 0.022 \mu$, paper, 150 v. $C_5 = 8 \mu$, electrolytic, 150 v. $C_7 C_8 = 680 \mu\mu$ f, ceramic or mica, 400 v. $C_9 C_{10} = 50 \mu$ f, electrolytic, 25 v. $C_{12} = 200 \mu$ f, electrolytic, 150 v. $C_{12} = 200 \mu$ f, electrolytic, 150 v. $C_{14} = 100 \mu$ f, electrolytic, 150 v. F = Fuse, 2 amperes

 $R_1 R_2 = Volume control,$ potentiometer, 2 megohms, ganged.

R₃ R₄=10 megohms, 0.5 watt $R_5 R_6=0.22$ megohm, 1 watt $R_7=0.022$ megohm, 2 watts R₈ R₉=Tone control, potenti-

ometer, 2 megohms, ganged. R₁₀ R₁₁=0.47 megohm, 0.5 watt R₁₂ R₁₃ R₁₉=0.22 megohm, 0.5 watt


 $R_{14}R_{15}$ =120 ohms, 2 watts R_{16} =750 ohms, 2 watts R_{17} =6.8 ohms, 2 watts R_{18} =100 ohms, 10 watts $T_1 T_2$ =Output transformer for matphing improduces of using

matching impedance of voice coil to 1000-ohm plate tube load. Turns ratio 20 to 1; primary current 90 ma. dc; power-handling capacity, 3.5 watts minimum.

(22 - 18)

TWO-CHANNEL AUDIO MIXER

Voltage Gain From Each Grid of 6EU7 to Output is Approximately 20

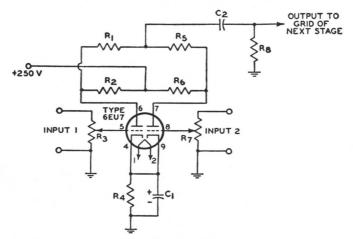


 $C_1=10 \ \mu f$, electrolytic, 25 v. $C_2=0.05 \ \mu f$, paper, 400 v.

(22-19)

 $R_1 R_5 R_8=1$ megohm, 0.5 watt $R_2 R_6=0.1$ megohm, 0.5 watt

PHONOGRAPH AMPLIFIER

R₃ R₇=Potentiometers, 0.1 megohm, audio taper R₄=1200 ohms, 0.5 watt

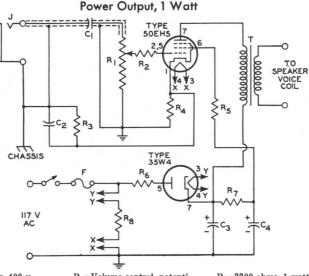


C₁=0.02 μ f, paper, 400 v. C₂=0.082 μ f, paper, 400 v. C₄ C₄ = 40 μ f, electrolytic, 150 v.

F=Fuse, 1 ampere J=Input connector, shielded, for crystal phonograph pickup.

R1=Volume control, potentiometer, 0.5 megohm, audio

taper $R_2=10000$ ohms, 0.5 watt $\begin{array}{l} R_{2} = 0.020 \text{ megohm, } 0.5 \text{ watt} \\ R_{4} R_{5} = 56 \text{ ohms, } 0.5 \text{ watt} \\ R_{6} = 22 \text{ ohms, } 0.5 \text{ watt} \end{array}$ $R_7=3300$ ohms, 1 watt $R_8=210$ ohms, 10 watts T=Output transformer for matching impedance of voice coil to 3000-ohm tube load. Circuits =

(22-20)

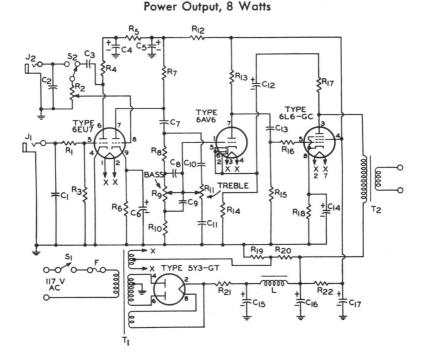

MICROPHONE AND PHONOGRAPH AMPLIFIER

C₁ C₂=100 pf disc-ceramic, 300 v.

- 300 v. $C_3=0.05 \ \mu f$, paper, 200 v. $C_4=8 \ \mu f$, electrolytic, 450 v. $C_5=16 \ \mu f$, electrolytic, 450 v. $C_7=0.1 \ \mu f$, paper, 200 v. $C_7=0.001 \ \mu f$, disc-ceramic, 300 v. $C_9=0.01 \ \mu f$, disc-ceramic, 300 v. $C_{10}=470 \ \mu f$, disc-ceramic, 300 v. C11=4700 pf, disc-ceramic,
- 300 v.

- $C_{12}=4 \ \mu$ f, electrolytic, 450 v. $C_{13}=0.05 \ \mu$ f, paper, 600 v. $C_{14}=25 \ \mu$ f, electrolytic, 25 v. $C_{15} \ C_{16} \ C_{17}=20 \ \mu$ f, electrolytic, 450 v.
- F=Fuse, 1 ampere

- J₁=Jack for high-impedance crystal microphone input; max. input: 2 millivolts peak
- J₂=Jack for crystal phonopickup input; max. input:
- 0.5 volt peak L=Filter choke, 5 henries,
- 200 ma.
- $R_1 R_{16} = 10000$ ohms, 0.5 watt $R_2 = Volume Control, potenti$ ometer, 1 megohm
- $R_3=2.2$ megohms, 0.5 watt R_4 R_8 $R_{20}=0.22$ megohm, 0.5
- watt
- $R_5=27000$ ohms, 0.5 watt $R_6=1200$ ohms, 0.5 watt
- R7 R13=0.1 megohm, 0.5 watt
- R₉ R₁₁=Tone control, potentiometer, 0.5 megohm

- $\begin{array}{l} R_{10}{=}\,22000 \,\,ohms,\,0.5\,\,watt\\ R_{12}{=}\,12000\,\,ohms,\,0.5\,\,watt\\ R_{14}{=}\,1800\,\,ohms,\,0.5\,\,watt\\ R_{15}{=}\,0.47\,\,megohm,\,0.5\,\,watt \end{array}$
- $R_{17}=0.15$ megohm, 0.5 watt $R_{18}=180$ ohms, 2 watts
- $R_{19} = 47000 \text{ ohms, } 1 \text{ watt} R_{21} = 50 \text{ ohms, } 10 \text{ watts}$
- $R_{22}=8200$ ohms, 2 watts $S_1=Switch, SPST$ $S_2=Switch, SPDT$

- $T_1 =$ Power transformer, 300-0-300 v., 90 ma.; 6.3 v., 3.5 a. center tapped; 5 v., 2 a.
- $T_2 = Output$ transformer for matching impedance of voice coil to 4000-ohm tube load; 10 watts


RCA Receiving Tube Manual =

(22-21)

CHICK STATE

PREAMPLIFIER FOR AMATEUR RECEIVER FOR 10-METER (30-MEGACYCLE) BAND

Power Gain, 25 to 35 db

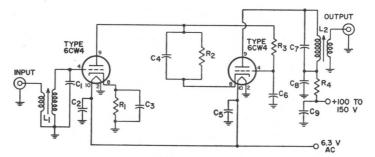


C₁, C₇=5 pf, 500 v., mica C₂, C₃, C₄, C₅, C₆, C₈, C₉=0.001 μ f, 500 v., ceramic L1, L2=18 turns of No.32 Enam. copper wire wound

on $\frac{1}{4}$ " I.D. slug-tuned form. L₁ tuned to 32 Mc; L₂ to 29.5 Mc. Input and output link, $\frac{1}{2}$ turns. Input and output impedance, 75 ohms.

 R_1 , $R_2 = 100$ ohms, 0.5 watt $R_3=0.47$ megohm, 0.5 watt $R_4=1000$ ohms, 0.5 watt

(22-22)

PREAMPLIFIER FOR MAGNETIC PHONOGRAPH PICKUP

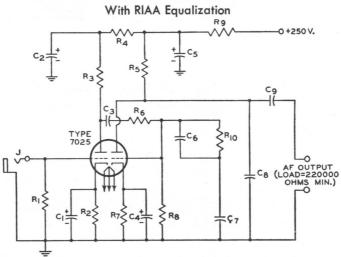

C₁ C₄=25 μ f, electrolytic, 25 v. C₂ C₅=20 μ f, electrolytic, 450 v. C₃=0.1 μ f, paper, 600 v. C₆=0.0033 μ f \pm 5 per cent,

- paper, 600 v. C₇=0.01 μ f ± 5 per cent,
- $C_7 = 0.01 \ \mu \pm 5$ per cent, paper, 600 v. $C_8 = 180 \ \text{pf} \pm 5 \ \text{per cent},$ ceramic or mica, 500 v. (includes capacitance of output cable)

- J=Input connector, shielded, for high-impedance magnetic phono pickup (10 mv. output,
- approx.) R₁=Value depends on type of magnetic pickup used. Follow pickup manufacturer's recommendations.


R₂ R₇=2700 ohms, 0.5 watt $\begin{array}{l} R_2 \; R_7 = 2\,700 \; \text{onms}, \; 0.5 \; \text{watt} \\ R_4 \; R_5 = 0.1 \; \text{megohm}, \; 0.5 \; \text{watt} \\ R_4 = 39000 \; \text{ohms}, \; 0.5 \; \text{watt} \\ R_6 = 0.47 \; \text{megohm}, \; 0.5 \; \text{watt} \\ R_6 = 0.68 \; \text{megohm}, \; 0.5 \; \text{watt} \\ R_9 = 15000 \; \text{ohms}, \; 1 \; \text{watt} \\ R_1 = 22000 \; \text{ohms}, \; 0.5 \; \text{watt} \end{array}$

Circuits :

(22-23)

PREAMPLIFIER FOR CERAMIC PHONOGRAPH PICKUP

Cathode-Follower (Low-Impedance) Output

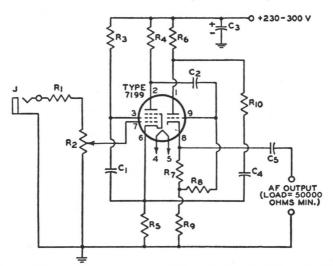

C₁=0.1 μ f, paper, 400 v. C₂=0.01 μ f, paper, 400 v. C₃=20 μ f, electrolytic, 400 v. C₄=0.25 μ f, paper, 400 v. C₄=0.25 μ f, paper, 600 v. J=Input connector, shielded, for high-impedance ceramic phono pickup (0.5 v. output) $R_1=1.8 \text{ megohms, } 0.5 \text{ watt}$ $R_2=Volume \text{ control, potenti-}$ ometer, 0.5 megohm, audio taper


R₃=0.82 megohm, 0.5 watt

 $\begin{array}{l} R_4\!=\!0.22 \text{ megohm, } 0.5 \text{ watt} \\ R_5\!=\!1000 \text{ ohms, } 0.5 \text{ watt} \\ R_6 \; R_9\!=\!47000 \text{ ohms, } 0.5 \text{ watt} \\ R_7\!=\!4700 \text{ ohms, } 0.5 \text{ watt} \\ R_8\!=\!1 \text{ megohm, } 0.5 \text{ watt} \\ R_{10}\!=\!1800 \text{ ohms, } 0.5 \text{ watt} \end{array}$

(22-24)

LOW-DISTORTION PREAMPLIFIER

For Low-Output High-Impedance Microphones

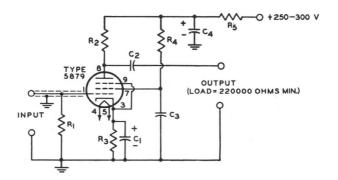

 $R_3{=}\,1000$ ohms, 0.5 watt $R_4{=}\,0.47$ megohm, 0.5 watt $R_5{=}\,22000$ ohms, 0.5 watt


RCA Receiving Tube Manual

(22-25)

STATISTICS.

TWO-STAGE INPUT AMPLIFIER

Cathode-Follower (Low-Impedance) Output




 $\begin{array}{l} C_1 \ C_2 = 0.1 \ \mu f, \ paper, \ 400 \ v. \\ C_2 = 25 \ \mu f, \ electrolytic, \ 25 \ v. \\ C_4 = 0.5 \ \mu f, \ paper, \ 200 \ v. \end{array}$

R₁=Volume control, potentiometer, 0.5 megohm R₂=0.22 megohm, 0.5 watt R_{2} $R_{4}{=}5600$ ohms, 0.5 watt $R_{\delta}{=}27000$ ohms, 0.5 watt $R_{\delta}{=}0.56$ megohm, 0.5 watt

(22-26)

BASS AND TREBLE TONE-CONTROL AMPLIFIER STAGE

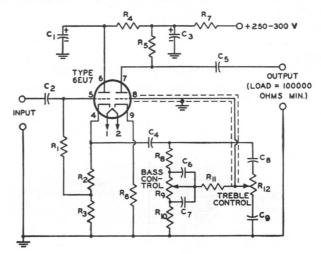


C₁ C₃=20 μ f, electrolytic, 450 v. C₂=0.047 μ f, paper, 400 v. C₄=0.1 μ f, paper, 400 v. C₅=0.22 μ f, paper, 400 v. C₆=0.0022 μ f, paper, 400 v. C₇=0.0022 μ f, paper, 400 v. C₈=220 pf, ceramic or mica, 500 v. $\begin{array}{l} C_9\!=\!0.0022 \ \mu f, \ paper, \ 400 \ v. \\ R_1\!=\!0.47 \ megohm, \ 0.5 \ watt \\ R_2\!=\!1500 \ ohms, \ 0.5 \ watt \\ R_3 \ R_7\!=\!15000 \ ohms, \ 0.5 \ watt \\ R_4\!=\!22000 \ ohms, \ 0.5 \ watt \\ R_6 \ R_8 \ R_{11}\!=\!0.1 \ megohm, \ 0.5 \ watt \end{array}$

 $\begin{array}{l} R_6 = 1000 \text{ ohms, } 0.5 \text{ watt} \\ R_9 = Bass \text{ control, potenti-} \\ \text{ometer, } 1 \text{ megohm} \\ R_{10} = 10000 \text{ ohms, } 0.5 \text{ watt} \\ R_{12} = Treble \text{ control, potenti-} \\ \text{ometer, } 1 \text{ megohm} \end{array}$

Sensitivity=0.5 volt rms for output of 1.25 volts with controls set for flat response.

Circuits

(22-27)

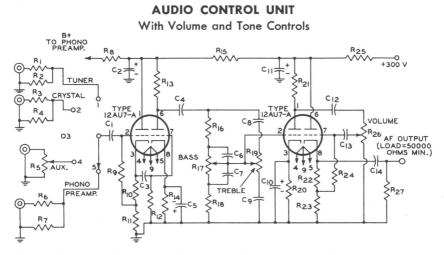


 $\begin{array}{c} C_1 \ C_7 = 0.01 \ \mu f, \ paper, \ 400 \ v. \\ C_2 \ C_{11} = 20 \ \mu f, \ electrolytic, \ 450 \ v. \\ C_3 \ C_4 = 0.1 \ \mu f, \ paper, \ 400 \ v. \\ R_6 \ C_{19} = 25 \ \mu f, \ electrolytic, \ 25 \ v. \\ C_8 = 470 \ p f, \ mica, \ 300 \ v. \\ C_9 = 4700 \ p f, \ mica, \ 300 \ v. \\ C_{12} \ C_{14} = 0.47 \ \mu f, \ paper, \ 400 \ v. \\ C_{13} = 0.033 \ \mu f, \ paper, \ 400 \ v. \\ R_1 \ R_2 \ R_7 = 0.27 \ megohm, \ 0.5 \\ watt \end{array}$

 $\begin{array}{l} R_3\!=\!1.5 \mbox{ megohms, } 0.5 \mbox{ watt } \\ R_4\!=\!2 \mbox{ megohms, } 0.5 \mbox{ watt } \\ R_5\!=\!Potentiometer, 0.5 \\ megohm, audio taper \\ R_6\!=\!0.33 \mbox{ megohm, } 0.5 \mbox{ watt } \\ R_8\!=\!0.56 \mbox{ megohm, } 0.5 \mbox{ watt } \\ R_{10}\!=\!2200 \mbox{ ohms, } 0.5 \mbox{ watt } \\ R_{11}R_{12}\!=\!0.22 \mbox{ megohm, } 0.5 \mbox{ watt } \\ R_{12}R_{12}\!=\!1 \mbox{ megohm, } 0.5 \mbox{ watt } \\ R_{13}R_{12}\!=\!0.1 \mbox{ megohm, } 0.5 \mbox{ watt } \\ R_{13}R_{21}\!=\!0.1 \mbox{ megohm, } 0.5 \mbox{ watt } \end{array}$

 $\begin{array}{l} R_{14} = 1200 \text{ ohms, } 0.5 \text{ watt} \\ R_{17} R_{19} = Potentiometers, 0.5 \\ megohm, audio taper \\ R_{18} = 22000 \text{ ohms, } 0.5 \\ R_{20} = 2700 \text{ ohms, } 0.5 \\ watt \\ R_{22} = 5600 \text{ ohms, } 0.5 \\ watt \\ R_{23} = 27000 \text{ ohms, } 0.5 \\ watt \\ R_{24} = 0.47 \\ megohm, 0.5 \\ watt \\ R_{26} = Potentiometer, 0.1 \\ megohm, audio taper \end{array}$

(22-28)



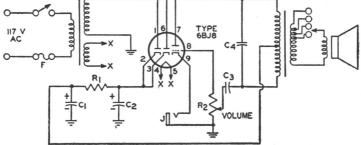

 $C_1\,C_2=20~\mu f,$ electrolytic, 150 v. $C_3=0.001~\mu f,$ paper, 200 v. $C_4=0.03~\mu f,$ paper, 200 v. F=1/8 ampere $\begin{array}{l} J = Input jack for key \\ R_1 = 1500 ohms, 1 watt \\ R_2 = Potentiometer, 0.1 \\ megohm, 0.5 watt \\ T_1 = Power transformer, 125 \end{array}$

volts rms, 15 ma; 6.3 volts, 0.6 ampere T₂=Output transformer, universal


NOTE: Select any two terminals of secondary of T2 to give desired tone.

RCA Receiving Tube Manual

(22-29)

INTERCOMMUNICATION SET

With Master Unit and Two or More Remote Units

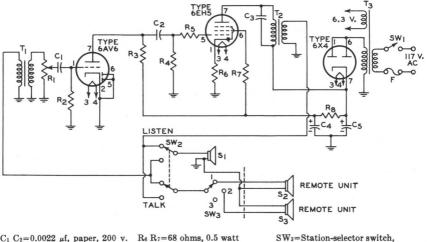

- $C_1 C_2=0.0022 \mu f$, paper, 200 v. $C_3=0.005 \mu f$, paper, 200 v. $C_4 C_6=60 \mu f$, electrolytic, 150 v. F=Fuse, 1 ampere $R_1=Volume control, potentiom-$ ctor 0.5 more home guide to poreter, 0.5 megohm, audio taper taper

 $R_2=6.8$ megohms, 0.5 watt $R_3 R_4=0.47$ megohm, 0.5 watt R5=10000 ohms, 0.5 watt

- $R_8=2200$ ohms, 1 watt
- S1 S2 S3=Speaker, permanent
 - magnet, voice-coil impedance 3-4 ohms
- SW1=On-off switch, single-pole single-throw, attached to vol-ume control R₁

SW2=Talk-listen switch, double-pole double-throw $SW_3 = Station-selector switch,$ rotary

- $T_1 = Input$ transformer, 4-ohm primary, 25000-ohm second-
- $T_2 = Output transformer, 3000-ohm$
- primary, 4-ohm secondary T_3 =Power transformer, 125 volts rms, 50 ma., 6.3 volts rms, 2 amperes


NOTES: The leads from the LISTEN-TALK switch to T_1 and T_2 should be kept as far apart as possible to prevent undesirable regeneration effects.

Connections to the remote speaker units should be made with low-resistance wire, preferably shielded "intercom" cable.

Circuits =

(22-30)

ALL-PURPOSE POWER SUPPLY

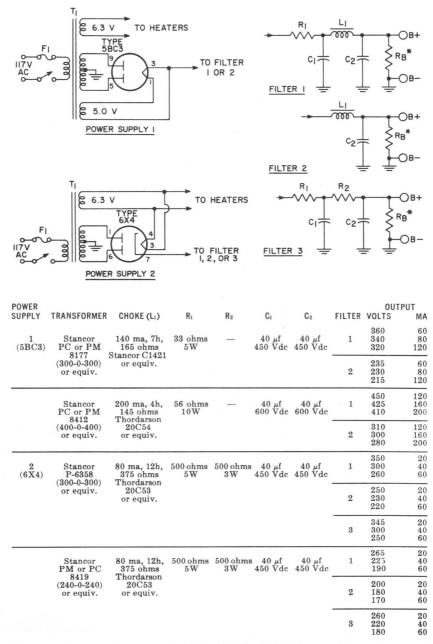


NOTE: Bleeder R_B can be omitted if an external load is permanently connected across the output terminals. Bleeder current should be approximately 10 per cent of the load current.

RCA Receiving Tube Manual =

(22-31)

CATHODE-RAY OSCILLOSCOPE

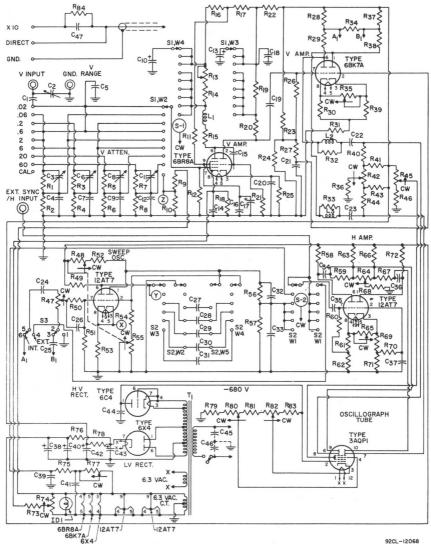

92CL-12068

Circuits =

(22-31)

CATHODE-RAY OSCILLOSCOPE (Cont'd)

- C₁ C₃ C₆ C₈ C₁₁=Trimmer capacitors, 4-40 pf, Arco No.422 or equiv.
- $C_2 C_{15} C_{21} C_{19} C_{35} = 0.1 \ \mu f_{,5}$

- paper, 400 v. $C_4=64$ pf, ceramic disc, 500 v. $C_7=140$ pf, ceramic disc, 500 v. $C_7=140$ pf, ceramic disc, 500 v.
- $C_9=410$ pf, ceramic disc, 500 v. $C_{10} C_{13} C_{40} C_{43}=20 \mu f$, elec-
- trolytic, 450 v. $C_{12}=1500$ pf, ceramic disc,
- 500 v. C₁₄=1200 pf, ceramic disc,
- 500 v. $C_{16} C_{24} C_{25} = 0.02 \mu f$, ceramic disc, 600 v.
- C17 C38=10 µf, electrolytic, 450 v.
- $C_{18}C_{42}=40 \ \mu f$, electrolytic, 450 v.
- C_{20} =560 pf, ceramic disc, 500 v.
- $C_{22} = 0.05 \,\mu f$, ceramic disc, 200 v.
- C₂₃=0.05 µf, paper, 200 v.

- $C_{28}^{-2} = 0.02 \ \mu$, paper, 200 v. $C_{26}^{-5} = 5 \ \mu$, ceramic disc, 150 v. $C_{27}^{-2} = 0.22 \ \mu$, paper, 400 v. $C_{28}^{-2} = 0.022 \ \mu$, paper, 400 v. $C_{29}^{-2} = 2200 \ \mu$, ceramic disc, 400 v.
- $C_{29}^{29}=2200 \text{ pf}$, ceramic disc, 400 v. $C_{30}=220 \text{ pf}$, ceramic disc, 400 v. $C_{31}=15 \text{ pf}$, ceramic disc, 500 v. $C_{32}=180 \text{ pf}$, ceramic disc, 200 v. $C_{33}=150 \text{ pf}$, ceramic disc, 200 v. $C_{34}C_{35}C_{47}C_{41}=0.1 \mu \text{f}$, paper, 200 v.

- 200 v. $C_{39} C_{45} C_{46} = 0.01 \ \mu f, ceramic$
- disc. 600 v.
- $C_{44}=0.5 \ \mu f$, paper, 1000 v. $C_{47}=12 \ pf$, tubular ceramic,
- 150 v $ID_1 = Pilot lamp, No.47$ $L_1 = Peaking coil, 20 \mu h$ $L_2 L_3 = Peaking coil, 36 \mu h$

- (wound on 10,000-ohm, 0.5-watt resistor)
- $R_1=0.68$ megohm, 0.5 watt

- $R_2 R_{26} R_{27} R_{68} R_{79} = 0.47$
- megohm, 0.5 watt
- $R_3=0.91$ megohm, 0.5 watt
- $R_4=0.11$ megohm, 0.5 watt
- R5 R7 R12 R21 R40 R44=1 megohm, 0.5 watt
- R6=33000 ohms, 0.5 watt
- $R_8 R_{34} R_{32} R_{33} = 10000 \text{ ohms.}$
- 0.5 watt
- $R_9 R_{62} R_{71} R_{83} = 15000 \text{ ohms.}$ 0.5 watt
- R₁₀=820 ohms, 0.5 watt
- $\begin{array}{l} R_{11} = 47000 \text{ ohms, } 0.5 \text{ watt} \\ R_{11} = 47000 \text{ ohms, } 0.5 \text{ watt} \\ R_{13} = \text{Variable, wire-wound,} \\ 5000 \text{ ohms, } 2 \text{ watts, } \text{Clarostat } A43-5000 \text{ or equiv.} \end{array}$
- R14=6800 ohms, 1 watt
- R15 R20 R29 R38=1200 ohms,

- 0.5 watt $R_{16}=2200$ ohms, 0.5 watt $R_{17}=$ Wire-wound, 2500 ohms, 5 watts, IRC Type PW5 or equiv
- R₁₈=100 ohms, 0.5 watt
- R₁₉=4700 ohms, 1 watt
- R22=820 ohms. 1 watt
- $R_{23} = 0.22$ megohm, 0.5 watt $R_{24} = 82000$ ohms, 0.5 watt

- $R_{23} = 120$ ohms, 0.5 watt $R_{28} R_{37} = 1800$ ohms, 1 watt $R_{30} R_{39} = 1000$ ohms, 0.5 watt
- R₃₁=Wire-wound, 2400 ohms, 5 watts, IRC Type PW5 or equiv.
- $R_{35} = 5000 \text{ ohms}, 0.5 \text{ watt} R_{36} = 1.2 \text{ megohm}, 0.5 \text{ watt}$
- R41 R43 R63 R66=0.82 megohm,
- 0.5 watt R42 R48=Variable, 1 megohm,
- 0.5 watt R45=Variable, 0.1 megohm, 0.25 watt
- $R_{46} = 0.18$ megohm, 0.5 watt $R_{47} R_{77} = Variable, 0.25$
 - megohm, 0.5 watt


- $R_{49}=0.1$ megohm, 1 watt
- R₅₀=68000 ohms, 0.5 watt
- R₅₁=3300 ohms, 0.5 watt
- R52=0.27 megohm, 0.5 watt
- R₅₃=680 ohms, 0.5 watt
- R54=39000 ohms, 0.5 watt
- R₅₅=Variable, 5 megohms, 0.5 watt
- R56 R59 R67=2.7 megohms. 0.5 watt
- R₅₇=3.3 megohms, 0.5 watt R₅₈ R₇₂ R₇₅ R₈₁=0.12 megohms,
- 0.5 watt
- R_{60} $R_{70}=10$ megohms, 0.5 watt R_{61} $R_{69}=2400$ ohms, 0.5 watt $R_{64}=$ Variable, 2 megohms,

- 0.5 watt R₆₅=Variable, 50000 ohms, 0.5 watt
- $R_{73}=0.1$ megohm, 0.5 watt $R_{74}=$ Variable, 10000 ohms, 0.25 watt R₇₆=4700 ohms, 0.5 watt
- R₇₈=Wire-wound, 1500 ohms, 7 watts, IRC Type PW7 or equiv.
- Rso=Variable, 0.5 megohm. 0.5 watt
- R₈₂=Variable, 75000 ohms, 0.5 watt (includes ac switch)
- S1=Rotary switch, vertical range selector, 9 positions, 4 sections, RCA stock No.219199 or equiv.
- S₂=Rotary switch, horizontal sweep selector, 6 positions, 5 sections, RCA stock No. 219200 or equiv.
- S_3 =Switch, dpdt, sync, Stack-pole Type SS-33 or equiv. T_1 =Power transformer, 117
- volts, 60 cps, RCA stock No. 218122 or equiv. X, Y, Z,=Test points

NOTE: For home construction of this circuit, the complete Kit RCA-WO-33A (K) is recommended because of the large number of special components used. This circuit is also available in wired form as the RCA-WO-33A.



AUDIO SIGNAL GENERATOR

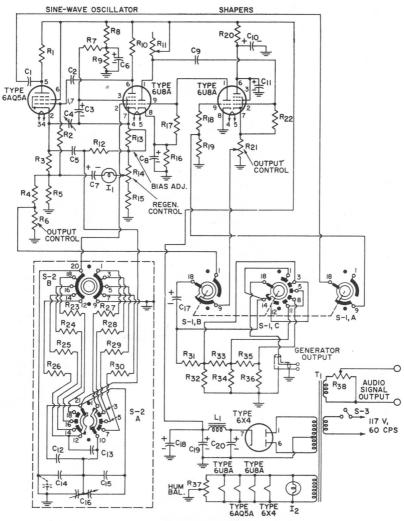

- $C_1=0.1 \ \mu f$, ceramic, 400 v. $C_2 C_9=0.25 \ \mu f$ ceramic, 400 v. $C_3 C_6 C_7=20 \ \mu f$, electrolytic,
- 350 v.
- ³³⁰ V. C_4 =Trimmer capacitor, 5—80 pf C_5 =1 μ f, paper, 200 v. $C_8 C_{17}$ =40 μ f electrolytic, 150 v. C_{10} =100 μ f, electrolytic, 150 v. $C_{11} C_{19} C_{20}$ =3-section elec-trolytic; 20 μ f, 250 v.; 60 μ f, $450 v.; 90 \mu$ f, 450 v.; 60 μ f,

- $450 \text{ v}; 20 \mu\text{f}, 250 \text{ v}.$ $C_{12}=2.2 \text{ pf}, \text{ ceramic}$ $C_{13}=3.3 \text{ pf}, \text{ ceramic}, 500 \text{ v}.$ $C_{14}=7.5-8 \mu\text{f}, \text{ trimmer}$

- $C_{15}=27$ pf, ceramic, 600 v. $C_{16}=$ Variable, 2 gang; RCA stock No.220226 or equiv.
- $C_{18}=50 \ \mu f$, electrolytic, 250 v. $I_1=Lamp$, 3 watts, 120 v. $I_2=Pilot lamp$, No.47 L_1 = Reactor, RCA stock No.220215 or equiv. R_1 = 3900 ohms, 2 watts
- $R_2 R_{12} R_{22} = 1$ megohm, 0.5 watt
- $R_3 = 470 \text{ ohms}, 1 \text{ watt}$
- R1=3900 ohms, 1 watt
- $R_5 = 12000 \text{ ohms}, 1 \text{ watt}$
- R6=Potentiometer, 12000 ohms
- R7=3300 ohms, 0.5 watt
- R₈ R₉=22000 ohms, 1 watt
- $R_{10} = 56000 \text{ ohms}, 0.5 \text{ watt}$
- R₁₁=Potentiometer, 2500 ohms, 0.5 watt
- R₁₃ R₁₄=Potentiometer, 5000 ohms
- R15=8200 ohms, 0.5 watt R₁₆=12000 ohms, 0.5 watt R₁₇=4700 ohms, 1 watt $R_{11} = 4700$ omms, 1 watt $R_{18} = 0.47$ megohm, 0.5 watt $R_{19} = 0.27$ megohm, 0.5 watt $R_{21} = 15000$ ohms, 2 watts $R_{21} = 9$ otentiometer, 750 ohms $R_{22} = 36000$ ohms, 0.5 watt $R_{22} = 36000$ ohms, 0.5 watt R₂₄=0.36 megohm, 0.5 watt $R_{25}=3.6$ megohms, 0.5 watt R₂₆=36 megohms, 1 watt R27=8 megohms, 1 watt R28=0.8 megohm, 0.5 watt R29 = 80000 ohms, 0.5 watt R₃₀=8000 ohms, 0.5 watt R₃₁ R₃₃ R₃₅=6200 ohms, 0.5 watt $R_{32} R_{34} = 750 \text{ ohms}, 0.5 \text{ watt} R_{36} = 680 \text{ ohms}, 0.5 \text{ watt}$

= Circuits

AUDIO SIGNAL GENERATOR (Cont'd)

R₃₇=Potentiometer, 100 ohms R₃₈=Potentiometer, 100 ohms, with switch S-3 $S_1 = Rotary switch, function$

selector, 8 position, 3 wafer,


(22-33)

RCA stock No. 220216 or equiv. S₂=Rotary switch, range

selector, 4 position, 2 wafer, RCA stock No.220217 or

equiv.

T1=Power transformer, 117 volts rms, 60 cps, RCA stock No.220214 or equiv.

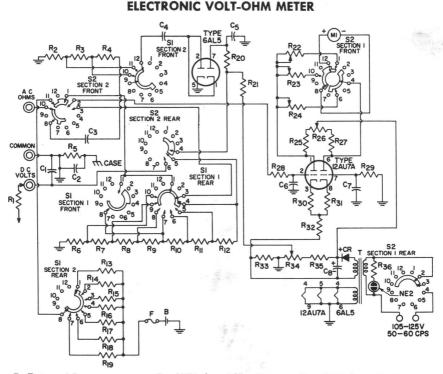

- B=Battery, 1.5 v. C₁=470 pf, ceramic disc, 1600 v. $C_2 = 0.001 \,\mu f$, ceramic disc, 500 v.
- $C_3 = 0.47 \ \mu f$, tubular, 400 v. $C_4 C_5 = 0.02 \ \mu f$, ceramic disc,
- 400 v.

 $C_6 C_7 = 0.005 \,\mu f$, ceramic disc, 200 v.

- $C_8=10 \ \mu f$, electrolytic, 400 v. F=Fuse, 0.5 ampere

- resistor, 1 megohm, 0.25 watt $R_2=138000$ ohms, 0.25 watt $R_3=320000$ ohms, 0.5 watt

- $R_4=0.9$ megohm, 1 watt $R_5 R_{18}=1$ megohm, 0.25 watt
- R6 R16 R25 R27=10000 ohms, 0.5 watt

- $R_7 = 20000 \text{ ohms}, 0.25 \text{ watt} R_8 = 70000 \text{ ohms}, 0.25 \text{ watt}$ R₉=0.2 megohm, 0.25 watt R_{10} = 0.7 megohms, 0.25 watt R_{11} = 2 megohms, 0.25 watt R_{12} = 7 megohms, 0.25 watt R_{13} = 8.2 ohms, wire-wound, 0.5 watt R₁₄=100 ohms, 0.25 watt
- R15=1000 ohms, 0.25 watt
- $R_{17}=0.1$ megohms, 0.25 watt $R_{19}=10$ megohms, 0.25 watt $R_{29}=10$ megohms, 0.25 watt
- R20=20 megohms, 0.25 watt
- R₂₁=91 megohms, 0.5 watt
- R₂₂=10000 ohms, potentiom-eter, ac calibration, 0.5 watt
- R23=10000 ohms, potentiom-
- eter dc calibration, 0.5 watt R₂₄=15000 ohms, potentiometer, ohms adjustment, 0.25 watt

- R₂₆=10000 ohms, potentiometer, zero adjustment, 0.25 watt
- R28=3.3 megohms, 0.5 watt
- R₂₉=6.8 megohms, 0.5 watt R₃₀ R₃₁=330 ohms, 0.5 watt
- R₃₂=15000 ohms, 0.5 watt R₃₃=27000 ohms, 0.5 watt
- R₃₄=10000 ohms, potentiom-
- eter, ac balance, 0.5 watt R₃₅=47000 ohms, 0.5 watt
- $R_{36} = 0.22$ megohm, 0.5 watt $S_1 = Range$ selector switch, 7
 - position, RCA stock No. 217924 or equiv.
- $S_2 =$ Function selector switch, 5 position, RCA stock No. 217923 or equiv.
- T₁=Power transformer, 105-125 volts rms, 50-60 cps, RCA stock No. 217921 or equiv.

NOTE: Switches are shown in their maximum counterclockwise positions (S_1 = 1.5 v., R X 1; S_2 ="OFF"). For home construction of this or a similar circuit, the complete Kit RCA-WV-77E (K) or RCA-WV-98C (K) is recommended because of the large number of special components used.

Index

| | Page |
|--|--|
| Absolute Maximum System of Ratings | 69 |
| AC/DC Superheterodyne Receiver | 509 |
| AC-Operated Superheterodyne Receiver | 508 |
| Admittance, Input | 16 |
| All-purpose Power Supply | 531 |
| AM Detection | 42 |
| AM/FM Receiver | 514 |
| Amplification | 14 |
| Amplification Factor (μ) | 12 |
| Amplifier: | |
| audio control unit, circuit | 529 |
| audio-frequency | 14 |
| audio mixer, circuit | 524 |
| cathode-drive | 27 |
| cathode-follower | 7, 30 |
| cathode-follower, circuit | , 528 |
| class A | 1, 11 1, 99 |
| class AB | 23 |
| class AB ₂ | 25 |
| class B | |
| class C | 14 |
| high-fidelity | -521 |
| intermediate-frequency | 517 |
| limiter | 5, 45 |
| low-distortion input, circuit | 527 38 |
| luminance parallel | |
| phase-inverter | |
| preamplifier, circuit | |
| push-pull | 7, 20 |
| radio-frequency14 | |
| remote-cutoff16 | 5, 50 |
| | |
| resistance-coupled15, 29, | 491 |
| sharp-cutoff | 491 50 |
| sharp-cutoffsync | 491 50 39 |
| sharp-cutoff sync television | 491 50 39 36 |
| sharp-cutoff sync. television. tone-control | 491 50 39 36 34 |
| sharp-cutoff sync television. tone-control tone-control, circuit | 491 50 39 36 |
| sharp-cutoff. sync. television. tone-control. tone-control, circuit. video. | 491 50 39 36 34 528 37 14 |
| sharp-cutoff sync television. tone-control tone-control, circuit | 491 50 39 36 34 528 37 |
| sharp-cutoff sync television.tone-control tone-control.circuit.video voltage.voltage. volume-expander Amplitude Modulation (AM) | 491 50 39 36 34 528 37 14 32 42 |
| sharp-cutoff sync television tone-control tone-control, circuit video voltage. volume-expander | 491 50 39 36 34 528 37 14 32 |
| sharp-cutoff. sync. television tone-control. video. voltage. voltage. volume-expander. Amplitude Modulation (AM). AM Tuner. Anode. | 491 50 39 36 34 528 37 14 32 42 |
| sharp-cutoff. sync. television. tone-control. tone-control, circuit. video. voltage. volume-expander. Amplitude Modulation (AM). AM Tuner. Anode. Application Guide for RCA | 491 50 39 36 34 528 37 14 32 42 515 5 |
| sharp-cutoff | 491 50 39 36 34 528 37 14 32 42 515 5 75 |
| sharp-cutoff. sync. television. tone-control. tone-control, circuit. video. voltage. volume-expander. Amplitude Modulation (AM). AM Tuner. Anode. Application Guide for RCA Receiving Tubes. Arc-Back Limit. | 491 50 39 36 34 528 37 14 32 42 515 5 |
| sharp-cutoff. sync. television. tone-control. tone-control, circuit. video. voltage. volume-expander. Amplitude Modulation (AM). AM Tuner. Anode. Application Guide for RCA Receiving Tubes. Arc-Back Limit. Audio Control Unit with Volume and | $\begin{array}{r} 491 \\ 50 \\ 39 \\ 36 \\ 34 \\ 528 \\ 37 \\ 14 \\ 32 \\ 42 \\ 515 \\ 5 \\ 75 \\ 72 \end{array}$ |
| sharp-cutoff. sync. television. tone-control. tone-control, circuit. video. voltage. volume-expander. Amplitude Modulation (AM). AM Tuner. Anode. Application Guide for RCA Receiving Tubes. Arc-Back Limit. Audio Control Unit with Volume and Tone Controls. | $\begin{array}{r} 491 \\ 50 \\ 39 \\ 36 \\ 34 \\ 528 \\ 37 \\ 14 \\ 32 \\ 42 \\ 515 \\ 5 \\ 75 \\ 72 \\ 529 \end{array}$ |
| sharp-cutoff. sync television tone-control tone-control, circuit video voltage volume-expander Amplitude Modulation (AM) AM Tuner Anode Application Guide for RCA Receiving Tubes Arc-Back Limit. Audio Control Unit with Volume and Tone Controls Audio Mixer. | 491 50 39 36 34 528 37 14 32 42 515 5 75 72 529 524 |
| sharp-cutoff. sync. television. tone-control. tone-control, circuit. video. voltage. volume-expander. Amplitude Modulation (AM). AM Tuner. Anode. Application Guide for RCA Receiving Tubes. Arc-Back Limit. Audio Control Unit with Volume and Tone Controls. Audio Signal Generator. | 491 50 39 36 34 528 37 14 32 42 515 5 72 529 524 534 |
| sharp-cutoff. sync television tone-control tone-control, circuit video voltage volume-expander Amplitude Modulation (AM) AM Tuner Anode Anode Application Guide for RCA Receiving Tubes Arc-Back Limit. Audio Control Unit with Volume and Tone Controls. Audio Mixer. Audio Signal Generator. Automatic Frequency Control (AFC) | $\begin{array}{c} 491\\ 50\\ 39\\ 36\\ 34\\ 528\\ 37\\ 14\\ 32\\ 42\\ 515\\ 5\\ 72\\ 529\\ 524\\ 534\\ 56\end{array}$ |
| sharp-cutoff. sync | 491 50 39 36 34 5288 37 14 32 42 515 5 75 72 529 524 534 56 5, 48 |
| sharp-cutoff. sync television tone-control tone-control, circuit video voltage voltage Amplitude Modulation (AM) AM Tuner Anode Application Guide for RCA Receiving Tubes Arc-Back Limit. Audio Control Unit with Volume and Tone Controls Audio Mixer Audio Signal Generator. Automatic Frequency Control (AFC) Automatic Gain Control (AGC)46 Automatic Volume Control (AVC) | $\begin{array}{r} 491\\ 50\\ 39\\ 36\\ 34\\ 528\\ 87\\ 14\\ 32\\ 42\\ 515\\ 5\\ 75\\ 72\\ 529\\ 524\\ 534\\ 56\\ 5, 48\\ 46\end{array}$ |
| sharp-cutoff. sync | 491 50 39 36 34 5288 37 14 32 42 515 5 75 72 529 524 534 56 5, 48 |
| sharp-cutoff. sync television tone-control tone-control, circuit video voltage voltage Amplitude Modulation (AM) AM Tuner Anode Application Guide for RCA Receiving Tubes Arc-Back Limit. Audio Control Unit with Volume and Tone Controls Audio Mixer Audio Signal Generator. Automatic Frequency Control (AFC) Automatic Gain Control (AGC)46 Automatic Volume Control (AVC) | $\begin{array}{r} 491\\ 50\\ 39\\ 36\\ 34\\ 528\\ 87\\ 14\\ 32\\ 42\\ 515\\ 5\\ 75\\ 72\\ 529\\ 524\\ 534\\ 56\\ 5, 48\\ 46\end{array}$ |
| sharp-cutoff. sync television tone-control tone-control, circuit voltage voltage voltage Amplitude Modulation (AM) AM Tuner Anode Application Guide for RCA Receiving Tubes Arc-Back Limit Audio Control Unit with Volume and Tone Controls Audio Signal Generator Audio Signal Generator Automatic Frequency Control (AFC) Automatic Gain Control (AGC) Automatic Gain Control (AVC) Automobile Receiver B ass and Treble Tone-Control | $\begin{array}{r} 491\\ 50\\ 39\\ 36\\ 34\\ 528\\ 87\\ 14\\ 32\\ 42\\ 515\\ 5\\ 75\\ 72\\ 529\\ 524\\ 534\\ 56\\ 5, 48\\ 46\end{array}$ |
| sharp-cutoff. sync television tone-control tone-control, circuit voltage voltage voltage voltage voltage voltage voltage voltage voltage voltage voltage Amplitude Modulation (AM) Am Tuner Anode Application Guide for RCA Receiving Tubes Arc-Back Limit. Audio Control Unit with Volume and Tone Controls Audio Mixer Audio Mixer Audio Signal Generator. Automatic Frequency Control (AFC) Automatic Frequency Control (AFC) Automatic Volume Control (AVC) Automobile Receiver B ass and Treble Tone-Control Amplifier Stage | $\begin{array}{c} 491\\ 50\\ 39\\ 36\\ 44\\ 528\\ 37\\ 14\\ 32\\ 42\\ 515\\ 5\\ 75\\ 72\\ 529\\ 524\\ 534\\ 56\\ 5, 48\\ 46\\ 510\\ \end{array}$ |
| sharp-cutoff. sync television tone-control tone-control, circuit voltage voltage voltage Amplitude Modulation (AM) AM Tuner Anode Application Guide for RCA Receiving Tubes Arc-Back Limit Audio Control Unit with Volume and Tone Controls Audio Signal Generator Audio Signal Generator Automatic Frequency Control (AFC) Automatic Gain Control (AGC) Automatic Gain Control (AVC) Automobile Receiver B ass and Treble Tone-Control | 491 50 39 36 34 528 37 14 32 42 515 5 75 72 529 524 534 56 5,48 46 510 528 |
| sharp-cutoff. sync | 491 50 39 36 34 528 37 14 32 42 515 5 75 72 529 524 534 56 5,48 46 510 528 |
| sharp-cutoff. sync | 491 50 399 36 34 528 37 14 528 37 528 52 52 524 534 56 510 5288 8 60 |

| | Page |
|---|------------|
| | - |
| grid-resistor | , 64 |
| Bypassing | 61 |
| By passing | 01 |
| Calculation of: | |
| amplification factor | 12 |
| cathode (self-bias) resistor |), 61 |
| cathode load resistor | 31 |
| control-grid-plate transconductance | 13 |
| filament resistor power dissipation | 59 |
| filament (or heater) resistor value | 59 |
| harmonic distortion | , 25 |
| heater warm-up time | 69 |
| load resistance |), 24 |
| operating conditions from | 21 |
| conversion nomograph | 72 |
| peak inverse plate voltage | 13 |
| plate efficiency | 12 |
| plate resistance power output | |
| power sensitivity | 13 |
| screen-grid voltage dropping resistor | 70 |
| transconductance | |
| voltage amplification (gain)15, 30 | |
| Capacitor-Input Filter | 65 |
| Cathode: | |
| bias | 60 |
| bypassing | 61 |
| connection | 60 |
| current | 59 |
| directly heated | 3 |
| drive | 27 |
| follower | 528 4 |
| indirectly heated | 46 |
| ionic-heated | 61 |
| resistortypes | 3 |
| Cathode-Ray Oscilloscope | 532 |
| Characteristic Curves, Interpretation of | 73 |
| Characteristics: | 10 |
| amplification factor | 12 |
| control-grid-plate transconductance | 13 |
| conversion transconductance | 13 |
| dynamic | 12 |
| plate resistance | 12 |
| static | 12 |
| Charts and Tables: | 70 |
| grid-No. 2 input rating chart picture tube characteristics chart | 70 484 |
| outline drawings | 404 500 |
| resistance-coupled amplifier | 491 |
| Choke-Input Filter | 65 |
| Chrominance Channel | 38 |
| Circuit Diagram of: | 00 |
| ac/dc superheterodyne receiver | 509 |
| ac-operated superheterodyne receiver. | 508 |
| All-purpose power supply | 531 |
| AM/FM receiver | 514 |
| audio-control unit | 529 |
| audio signal generator | 534 |
| automobile receiver | 510 |
| bass and treble tone-control amplifier | |
| stage | 528 |
| cathode-ray oscilloscope | 532 |
| citizens-band transceiver | 512 |

INDEX (Continued)

Page

| code practice oscillator | 529 |
|---|-------------------|
| | 535 |
| | 518 |
| | 516 |
| | 519 |
| | 520 |
| high-fidelity, 50-w audio amplifier | 521 |
| intercommunication setlow-distortion preamplifier | $\frac{530}{527}$ |
| microphone and phonograph preamplifier | 525 |
| phonograph amplifier | 524 |
| portable superheterodyne receiver | 506 |
| portable 3-way superheterodyne receiver | 507 |
| preamplifier for 10-m, 30-Mc amateur receiver | 526 |
| preamplifier for ceramic phonograph- | |
| pickup preamplifier for magnetic phonograph- | 527 |
| pickup | 526 |
| superregenerative (144-Mc) receiver | 511 |
| three-stage if amplifier/limiter and | 011 |
| ratio detector | 517 |
| TRF AM tuner. | 515 |
| two-channel audio mixer | 524 |
| two-channel, 1-w stereo amplifier | 522 |
| two-channel, 1-w stereo amplifier | |
| with tone control | 523 |
| two-stage input amplifier | 528 |
| Citizens-Band Transceiver | 512 |
| Code Practice Oscillator | 429 |
| Color Picture Tubes | 11 |
| Color Television | 38 |
| Contact Potential | 63 |
| Conversion Nomograph, Use of | 21 |
| Conversion Transconductance | 13 |
| Corrective Filter | 32 |
| Cross-Modulation | |
| Current: | , 04 |
| cathode | 59 |
| dc output | 71 |
| grid14 | |
| peak plate | 71 |
| plate | 5 |
| Curves, Interpretation of Characteristic | 73 |
| Cutoff | . 75 |
| | |
| Dark Heater | 4 |
| Deflection Circuits: | - |
| horizontal output | 53 |
| vertical output | 52 |
| Degeneration (See Inverse Feedback) | 28 |
| Delayed Automatic Volume Control | 47 |
| (DAVC) | 41 |
| Demodulation Design-Center System of Ratings | 42 69 |
| | |
| Design-Maximum System of Ratings | 69 |
| Detection: | 42 |
| diode discriminator | 42 45 |
| full-wave diode. | 43 |
| grid bias. | 40 |
| grid resistor and capacitor | 44 |
| ratio detector | 46 |
| | _ 0 |

| | Page |
|---|-------------|
| Diode: | |
| biasing | 43 |
| considerations | 5 |
| detection | 42 43 |
| load resistor | 43 |
| Discriminator. | 45 64 |
| Dress of Circuit Leads | |
| Driver17, 2 Dynamic Characteristics | 3, 25 12 |
| Dynamic Characteristics | 14 |
| Electron: | |
| considerations | 3 |
| secondary | .8, 9 |
| Electronic Volt-Ohm Meter | 535 |
| Electrons, Electrodes, and Electron | |
| Tubes | 3 |
| Electron Tube Application | 14 |
| Electron Tube Characteristics | 12 |
| Electron Tube Installation | 58 |
| Electron Tube Testing | 487 |
| Electron-Ray Tubes | 49 |
| Emission: | |
| current | 5 |
| secondary | .8,9 |
| test | 488 |
| Feedback, Inverse | 28 |
| Filament (also see Heater and Cathode): | 40 |
| operation | 3. 58 |
| resistor | 59 |
| series operation | 58 |
| shunt resistor | 59 |
| supply voltage | 58 |
| Filter: | |
| capacitor-input | 65 |
| choke-input | 65 |
| corrective | 32 |
| radio-frequency | 65 65 |
| smoothing FM Detection | 45 |
| FM Stereo Multiplex Adapter | 518 |
| FM Tuner | 516 |
| Formulas (see Calculation) | 010 |
| Frame Grid | 7 |
| Frequency Conversion | 54 |
| Frequency Modulation (FM)4 | |
| Full-Wave Diode Detection | 43 |
| Full-Wave Rectifier | |
| Fuses, Use of | 60 |
| r uses, ose or | 00 |
| Gain (Voltage Amplification) | 15 |
| Generic Tube Types | 4 |
| Grid: | |
| anode | 55 |
| bias | 60 |
| bias detection | 44 |
| control | |
| | 14, 23 |
| resistor | |
| resistor and capacitor detection | 44 |
| screensuppressor | 7 |
| voltage supply | 60 |
| Bo amplead | 00 |

INDEX (Continued)

Page

| Grid-Plate Capacitance Grid-Plate Transconductance | 7 13 |
|---|---|
| Half-Wave Rectifier | 5, 40 L, 25 |
| | 4 |
| cathode | 60 |
| cathode bias | 60 |
| cathode connection | 59 |
| resistor | 58 |
| series operation | 59 |
| shunt resistor | |
| supply voltage | 58 |
| warm-up time | 69 |
| Hexode Mixer | 55 |
| High-Fidelity Amplifiers2 | 6,66 |
| High-Fidelity, 15-w Audio Amplifier | 519 |
| High-Fidelity, 30-w Audio Amplifier | 520 |
| High-Fidelity, 50-w Audio Amplifier | 521 |
| | |
| High-Voltage Regulation | 53 |
| Horizontal Output Circuits | 53 |
| Hum and Noise Characteristics | 73 |
| F Amplifier/Limiter and Ratio Detector | 517 |
| Impedance, Input | 16 |
| Input Capacitance | 73 |
| Instantaneous Peak Voltage | 72 |
| Intercommunication Set | 530 |
| Interelectrode Capacitances | |
| | |
| Intermediate Frequency, Production of | 54 |
| Interpretation of Tube Data | 69 |
| Inverse Feedback: | |
| constant-current type | 29 28 |
| | |
| Key: Basing Diagrams Inside Back C | |
| Kinescopes | 10 |
| limitors | 36 |
| Limiters | 00 |
| Load: resistance | 20 |
| resistance | |
| nonistance line 10 | |
| resistance line | |
| Low-Distortion preamplifier | 527 |
| | |
| Low-Distortion preamplifier Luminance Amplifier Maximum Ratings | 527 |
| Low-Distortion preamplifier Luminance Amplifier Maximum Ratings Mercury-Vapor Rectifier: | 527 38 69 |
| Low-Distortion preamplifier Luminance Amplifier Maximum Ratings Mercury-Vapor Rectifier: considerations | 527 38 69 6 |
| Low-Distortion preamplifier Luminance Amplifier Maximum Ratings Mercury-Vapor Rectifier: considerations interference from | 527 38 69 6 66 |
| Low-Distortion preamplifier Luminance Amplifier Maximum Ratings Mercury-Vapor Rectifier: considerations interference from Mho-micromho | 527 38 69 6 66 13 |
| Low-Distortion preamplifier Luminance Amplifier Maximum Ratings Mercury-Vapor Rectifier: considerations interference from Mho-micromho Microphone and Phonograph Amplifier | 527 38 69 6 66 13 525 |
| Low-Distortion preamplifier Luminance Amplifier Maximum Ratings Mercury-Vapor Rectifier: considerations interference from Mho-micromho Microphone and Phonograph Amplifier Miniature Tube, Structure of | 527 38 69 6 66 13 |
| Low-Distortion preamplifier Luminance Amplifier Maximum Ratings Mercury-Vapor Rectifier: considerations interference from Mho-micromho. Microphone and Phonograph Amplifier Miniature Tube, Structure of Mixer: | 527 38 69 6 66 13 525 82 |
| Low-Distortion preamplifier Luminance Amplifier Maximum Ratings Mercury-Vapor Rectifier: considerations interference from Mho-micromho Microphone and Phonograph Amplifier Miniature Tube, Structure of Mixer: audio | 527 38 69 6 6 66 13 525 82 524 |
| Low-Distortion preamplifier | 527 38 69 6 66 13 525 82 524 55 |
| Low-Distortion preamplifier Luminance Amplifier Maximum Ratings. Mercury-Vapor Rectifier: considerations. interference from. Mho-micromho. Microphone and Phonograph Amplifier Miniature Tube, Structure of Mixer: audio. hexode. pentagrid. | 527 38 69 6 66 13 525 82 525 82 524 55 55 |
| Low-Distortion preamplifier Luminance Amplifier Maximum Ratings. Mercury-Vapor Rectifier: considerations. interference from. Mho-micromho. Microphone and Phonograph Amplifier Miniature Tube, Structure of Mixer: audio. hexode. pentagrid. Modulated Wave. 42 | 527 38 69 6 66 13 525 82 525 82 55 55 2,45 |
| Low-Distortion preamplifier Luminance Amplifier Maximum Ratings Mercury-Vapor Rectifier: considerations interference from Mho-micromho. Microphone and Phonograph Amplifier Miniature Tube, Structure of Mixer: audio hexode pentagrid Modulated Wave | 527 38 69 6 66 13 525 82 524 55 55 55 2,45 42 |
| Low-Distortion preamplifier Luminance Amplifier Maximum Ratings. Mercury-Vapor Rectifier: considerations. interference from. Mho-micromho. Microphone and Phonograph Amplifier Miniature Tube, Structure of Mixer: audio. hexode. pentagrid. Modulated Wave. 42 | 527 38 69 6 66 13 525 82 524 55 55 55 2,45 42 |
| Low-Distortion preamplifier Luminance Amplifier Maximum Ratings Mercury-Vapor Rectifier: considerations interference from Mho-micromho. Microphone and Phonograph Amplifier Miniature Tube, Structure of Mixer: audio hexode pentagrid Modulated Wave | 527 38 69 6 66 13 525 82 524 55 55 55 2,45 42 |
| Low-Distortion preamplifier Luminance Amplifier Maximum Ratings. Mercury-Vapor Rectifier: considerations interference from. Mho-micromho. Microphone and Phonograph Amplifier Miniature Tube, Structure of Mixer: audio hexode pentagrid. Modulated Wave | 527 38 69 6 66 13 525 82 524 55 55 2, 45 55 2, 45 42 2, 9 |
| Low-Distortion preamplifier Luminance Amplifier Maximum Ratings Mercury-Vapor Rectifier: considerations interference from Mho-micromho. Microphone and Phonograph Amplifier Miniature Tube, Structure of Mixer: audio hexode pentagrid Modulated Wave | 527 38 69 6 6 6 6 6 6 13 525 82 525 524 55 55 524 55 55 82 45 42 55 62 |

| Pa | ge |
|---|----------|
| Noise | 73 |
| | 37 |
| | 10 |
| | 74 |
| Nuvistor | 10 |
| Nuvistor Tube, Structure of | 2 |
| Operation, Typical Values | 73 |
| Oscillator: | |
| | 50 50 |
| | 50 50 |
| | 51 |
| | 32 |
| | 00 |
| | 73 |
| Output Circuits: | 10 |
| | 53 |
| vertical | 52 |
| | 66 |
| Parallel Operation 17 | 40 |
| | 40 72 |
| | 71 |
| | 54 |
| | 55 |
| Pentode Considerations | 8 |
| | 33 |
| Phonograph Amplifier | 24 |
| | 35 |
| Picture Tube: | |
| basing diagrams 48 | 86 |
| characteristics chart | 84 |
| corona considerations | 68 |
| | 10 58 |
| | 10 |
| | 68 |
| high-voltage considerations | 68 |
| | 68 |
| | 58 10 |
| | 10 |
| | 58 |
| Plate: | |
| current | 5 |
| dissipation | 70 |
| | 13 20 |
| | 12 |
| | 60 |
| | 73 |
| | 06 |
| Portable 3-Way Superheterodyne | |
| | 07 |
| Power Output: | |
| calculations | |
| | 89 |
| • | 13 |
| | 81 |
| Preamplifier for Amateur Receiver 52 Preamplifier for Ceramic Phonograph | 26 |
| | 27 |

$\mathbf{INDEX}~(\mathbf{Continued})$

Page

| | i ugo |
|--------------------------------------|-------|
| Preamplifier for Magnetic Phonograph | |
| Pickup | 526 |
| Preamplifiers, Phonograph and Tape | 35 |
| Push-Pull Operation | , 20 |
| | |
| Radio-Frequency: | |
| amplifier | . 36 |
| filter | 65 |
| Ratings: | 00 |
| absolute-maximum system | 69 |
| design-center system | 69 |
| design-maximum system | 69 |
| | |
| Ratio Detector | 517 |
| Reading List | 544 |
| Receiving Tube Chart | 75 |
| Rectifiers: | |
| full-wave | |
| half-wave | |
| ionic-heated cathode | 6 |
| parallel operation of | 40 |
| plate-characteristics curves | 73 |
| voltage doubler | 41 |
| Relaxation Oscillator | 50 |
| Remote-Cutoff Tubes10 | |
| Resistance-Coupled Amplifier 15, | 491 |
| Resistance Coupling | 33 |
| Resistor: | |
| cathode (self-biasing) | 61 |
| center tap | 60 |
| filament | 59 |
| filter | 65 |
| grid | 15 |
| plate load2 | 0, 21 |
| screen-grid6 | 3, 70 |
| | |
| Saturation Current | 5 |
| Screen Grid (Grid No. 2): | 0 |
| considerations | 7 |
| input | 70 |
| voltage supply | 63 |
| Secondary Electrons | |
| | |
| Secondary Emission | 8 |
| Self Bias (cathode bias) | 60 |
| Shielding | 64 |
| Short-Circuit Test | 487 |
| Signal Generator. | 534 |
| Signal-to-Noise Ratio | 37 |
| Space Charge | 5. 9 |
| Static Characteristics | 12 |
| Stereo Circuits | |
| Superheterodyne Receiver: | , 010 |
| ac/dc | 509 |
| ac-operated | 508 |
| portable | 506 |
| portable 3-way | 507 |
| Superregenerative Receiver | 511 |
| Suppressor Grid (Grid No. 3) | 8 |
| Suppressor and (and no. o) | 0 |
| | |

| 1 | Page |
|---|-----------|
| Symbols Used in Resistance-Coupled | |
| Amplifier Charts | 492 |
| Sync Circuits | 39 |
| Synchroguide | 51 |
| Tables and Charts (see Charts and Tables) | |
| Tables and Charts (see Charts and Tables) Technical Data for Tube Types | 83 |
| Television Picture Tubes | 10 |
| Television RF Amplifiers | 36 |
| Television Sync Circuits | 39 |
| Testing Electron Tubes | 487 |
| Tetrode Considerations | *07 |
| Three-Stage IF Amplifier/Limiter | ' |
| and Ratio Detector. | 517 |
| Tone-Control Amplifier Stage | 528 |
| Tone Control. | 34 |
| Transceivers, Citizens-Band | 512 |
| Transconductance: | 015 |
| conversion | 13 |
| grid-plate | 13 |
| test | 488 |
| TRF AM Tuner | 515 |
| Triode Considerations | 6 |
| Tube: | |
| outlines ratings, interpretation of | 500 |
| tester requirements | 69 489 |
| Tube Types, Technical Data | *05 |
| Tuner: | 00 |
| FM | 516 |
| TRF AM | 515 |
| Tuning Indicators | 49 |
| Twin diode—triode9 | 9. 43 |
| Two-Channel Audio Mixer | 524 |
| Two-Channel Stereophonic Amplifier522, | 523 |
| Two-Stage Input Amplifier, Cathode- | |
| Follower (Low-Impedance) Output | 528 |
| Typical Operation Values, | |
| Interpretation of | 73 |
| Vertical Output Circuits | 52 |
| Video Amplifiers | 37 |
| Voltage: | 01 |
| amplification, class A | 14 |
| doubler rectifier | 41 |
| peak heater-cathode | 71 |
| peak inverse plate | 72 |
| supply | 58 |
| Voltage Doubler | 41 |
| Volt-Ohm Meter | 535 |
| Volume Control: automatic (AVC) | 46 |
| by grid-voltage variation | 40 |
| by screen-grid-voltage variation | 64 |
| delayed automatic (DAVC) | 47 |
| Volume Compressor and Expander | 32 |
| - | |
| Zero-Bias Operation | 60 |

RCA Technical Publications

on Electron Tubes, Semiconductor Products, Batteries, and Test and Measuring Equipment

Copies of the publications listed below may be obtained from your RCA distributor or from Commercial Engineering, Radio Corporation of America, Harrison, N. J.

Electron Tubes

•RCA ELECTRONTUBE HANDBOOK - HB-3. Fivebinders, each 73/8" Lx 55/8" Wx 27/8" D, having gold-imprinted black covers. The "bible" of the industry-contains over 5000 pages of loose-leaf data and curves on RCA receiving tubes, transmitting tubes, cathode-ray tubes, picture tubes, photocells, phototubes, camera tubes, ignitrons, vacuum and gas rectifiers, magnetrons, traveling-wave tubes, premium tubes, pencil tubes, and other miscellaneous types for special applications. Available on subscription basis. Price \$20.00* including service for first year. Also available with RCA Semiconductor Products Handbook HB-10 at special combination price of \$25.00.* Write to Commercial Engineering for descriptive flyer and order form.

• RADIOTRON† DESIGNER'S HANDBOOK -4th Edition $(8\frac{3}{4}'' \times 5\frac{1}{2}'')-1500$ pages. Comprehensive reference thoroughly covering the design of radio and audio circuits and equipment. Written for the design engineer, student, and experimenter. Contains 1000 illustrations, 2500 references, and cross-referenced index of 7000 entries. Edited by F. Langford-Smith of Amalgamated Wireless Valve Co., Pty., Ltd. in Australia. Price \$7.00.*

• RCA TRANSMITTING TUBES – TT-5 $(8\frac{1}{4})^{\prime\prime} \times 5\frac{5}{8})^{\prime\prime}$ – 320 pages. Gives data on over 180 power tubes having plate-

input ratings up to 4 kw and on associated rectifier tubes. Provides basic information on generic types, parts and materials, installation and application, and interpretation of data. Contains circuit diagrams for transmitting and industrial applications. Features lie-flat binding. Price \$1.00.*°

• RCA MAGNETRONS AND TRAVELING-WAVE TUBES – MT-301A (10⁷/₈" x 8³/₈") –48 pages. Operating theory for magnetrons and traveling-wave tubes, application considerations, and techniques for measurement of electrical parameters. Price 60 cents.*^o

• RCA INTERCHANGEABILITY DIRECTORY OF FOREIGN vs. U.S.A. RECEIVING-TYPE ELECTRON TUBES—1CE-197B (8%'' x 107's'')—8 pages. Covers approximately 800 foreign tube types used principally in AM and FM radios, TV receivers, and audio amplifiers. Indicates U.S.A. direct replacement type or similar type if available. Price 10 cents.*°

• RCA POWER TUBES—PG101E (107%" x 8%")—46 pages. Technical information on 200 RCA vacuum power tubes, rectifier tubes, thyratrons, and ignitrons. Includes terminal connections. Price 75 cents.*°

• RCA RECEIVING-TYPE TUBES FOR IN-DUSTRY AND COMMUNICATIONS—RIT-104C (107%'' x 83%'')—44 pages. Technical information on over 190 RCA "special red" tubes, premium tubes, nuvistors, computer tubes, pencil tubes, glowdischarge tubes, small thyratrons, lowmicrophonic amplifier tubes, vacuumgauge tubes, mobile communications tubes, and other special types. Includes socket-connection diagrams. Price 35 cents.*°

• RCA RECEIVING TUBES AND PICTURE TUBES -1275-K $(10\%'' \times 8\%'') - 64$ pages. New booklet contains classification chart, characteristics chart, and base and envelope connection diagrams on more than 1050 entertainment receiving tubes and picture tubes. Price 50 cents.*^o

• RCA INTERCHANGEABILITY DIRECTORY OF INDUSTRIAL-TYPE ELECTRON TUBES— ID-1020D (10⁷/₈" x 8³/₉")—12 pages. Lists more than 1600 basic type designations for 20 classes of industrial tube types; shows the RCA Direct Replacement Type or the RCA Similar Type, when available. Price 35 cents.*°

• RCA NUVISTOR TUBES FOR INDUSTRIAL AND MILITARY APPLICATIONS -1CE-280 ($107\%'' \times 83\%''$) -16 pages. Describes unique features of nuvistors and includes tabular data, dimensional outlines, curves, terminal diagrams, and socket information. Price 25 cents.*°

• RCA PHOTO AND IMAGE TUBES — 1CE-269 (101%" x 83%") — 32 pages. Includes concise data on RCA multiplier phototubes, gas and vacuum photodiodes, and image-converter tubes. Features recommended multiplier phototubes and image-converter tubes and quick selection charts for phototubes. Includes response curves for photo and image tubes, sockets and shields for phototubes, and dimensional outlines for photo and image tubes. Price 60 cents.*°

• RCA STORAGE AND CATHODE-RAY TUBES -1CE-270 (107%" x 83%")-12 pages. Includes technical data on RCA display-storage tubes, computer-storage tubes, scan-converters, radechons, oscillograph-type cathode-ray tubes, and special-purpose kinescopes including monoscopes, transcriber types, monitor types, flying-spot types, projection types, and view-finder types. Gives latest JEDEC "Kelley Chart" and descriptive material on the characteristics of phosphors used in RCA industrial tubes. Price 20 cents.*°

• RCA MICROWAVE TUBES AND PACK-AGED SOLID-STATE DEVICES – 1CE-180E (107%" x 83%")–16 pages. Includes technical data on RCA solid-state

devices, traveling-wave tubes, pencil tubes, integral-cavity pencil tubes, magnetrons, and solenoids for travelingwave tubes. Single copy free on request.

• RCA PENCIL TUBES—1CE-219 (107%" x 83%")—28 pages. Contains operating theory for pencil tubes, electrical and mechanical circuit-design considerations, environmental considerations, application considerations, and data for commercial types. Price 50 cents.*°

•RCA PHOSPHORS-TPM-1508A (10%" x 83%")-20 pages. Contains defining data for over 25 different industrial phosphors, spectral-energy emission curves, persistence curves, and quick-reference classification charts. Price 75 cents.*°

• TECHNICAL BULLETINS—Authorized information on RCA transmitting tubes and other tubes for communications and industry. Be sure to mention tube-type bulletin desired. Single copy on any type free on request.

• TV SERVICING. Bulletin TVS-1030 (10%' x 8%') - 48 pages. Contains articles on TV trouble shooting, TV tuner alignment, and TV circuit analysis by RCA's expert in the field of TV servicing and test equipment—John R. Meagher. Price 35 cents.*°

• TV SERVICING, SUPPLEMENT 1. Bulletin TVS-1031 (107%" x 83%")-12page booklet by John R. Meagher on solving trouble shooting problems in those hard-to-service television receivers known to service technicians as "...ugh" sets or "dogs." Price 15 cents.*°

Semiconductor Products

• RCA SEMICONDUCTOR PRODUCTS HANDBOOK—HB-10. Two binders, each 7%'' L x 55%'' W x 27%'' D, having goldimprinted red covers. Contains over 1000 pages of loose-leaf data and curves on RCA semiconductor devices such as transistors, silicon rectifiers, silicon controlled rectifiers, tunnel diodes, and tunnel rectifiers. Available on subscription basis. Price \$10.00* including service for first year. Also available with RCA Electron Tube Handbook HB-3 at special combination price of \$25.00*. Write to Commercial Engineering for descriptive flyer and order form. • RCA TRANSISTOR MANUAL — SC-10 (8%" x 5%")—304 pages. Contains detailed technical data on RCA semiconductor devices. Easy-to-read text includes information on basic theory, application, and installation of transistors, silicon rectifiers, and semiconductor diodes. Includes circuit diagrams and parts lists for many typical applications. Features lie-flat binding. Price \$1.50.*°

• RCA TUNNEL DIODE MANUAL — TD-30 (83%'' x 53%'') — 160 pages. Describes the microwave and switching capabilities of tunnel diodes. Contains information on theory and characteristics, and on tunnel-diode applications in switching circuits and in microwave oscillator, converter, and amplifier circuits. Includes data for over 40 RCA germanium and gallium arsenide tunnel diodes and tunnel rectifiers. Price \$1.50.*°

• RCA SEMICONDUCTOR PRODUCTS GUIDE-60-S-16R5 ($107\%'' \ge 8\%''$)-12 pages. Contains application guide, index, and ratings and characteristics arranged for easy access to RCA's entire line of semiconductor products, as well as digital microcircuits, memory products, and photocells. Single copy free on request.

• RCATRANSISTOR REPLACEMENT GUIDE -1L1115 (10%" x 8%")-36 pages. Contains RCA transistor and rectifier replacement data for more than 1000 portable radio receivers, table radio receivers, tape recorders, and portable equipment of 145 manufacturers. Price 35 cents.*°

• RCA SILICON RECTIFIER INTERCHANGE-ABILITY DIRECTORY-1CE-229A (10%'' x 8%'')-16 pages. Contains replacement information, ratings, characteristics, and physical dimensions for more than 400 silicon and selenium rectifiers. Price 25 cents.*°

• TRANSISTORIZED VOLTAGE REGULA-TORS APPLICATION GUIDE-1CE-254 (10%" x 8%")-12 pages. Discusses transistorized voltage regulators of the series and shunt types. Included are design considerations, step-by-step design procedures, and the solutions to sample design problems. An appendix contains the derivation of design equations. Price 25 cents.*°

• RCA SILICON POWER TRANSISTORS APPLICATION GUIDE—1CE-215 (10%'' x 8%'')-28 pages. Describes outstanding features of RCA silicon power transistors and their use in many critical industrial and military applications. Includes construction details, discussion of voltage ratings, thermal stability conditions, and equivalent circuits for these transistors. Price 50 cents.*°

• RCA SILICON VHF TRANSISTORS AP-PLICATION GUIDE-1CE-228 (10%'' x 8%'')-20 pages. Describes unique capabilities of RCA silicon vhf transistors and their use in critical industrial and military applications up to 300 Mc. Price 50 cents.*°

• TECHNICAL BULLETINS — Authorized information on RCA semiconductor products. Be sure to mention type-number bulletin desired. Single copy on any type free on request.

Batteries

• RCA BATTERIES—BAT-134F (107%" x 83%")—24 pages. Technical data on 113 Leclanché, alkaline, and mercury-type dry batteries, for radios, industrial applications, flashlights, lanterns, electronic toys, and for photoflash service. Price 35 cents.*°

• RCA BATTERY MANUAL – BDG-111 $(10\%'' \times 8\%'')$ – 64 pages. Contains information for the designer, application engineer, experimenter, and student on dry cells and batteries: carbon zinc (Leclanché), mercury, and alkaline types. Includes battery theory and applications, detailed electrical and mechanical characteristics, a classification chart, dimensional outlines, and terminal connections for each battery type. Price 50 cents.*°

• RCA ALKALINE BATTERIES -1 CE-237 $(10\%'' \times 8\%'') - 2$ pages. Contains technical data, curves, and dimensional outlines for 4 alkaline batteries in applications having a wide range of current-drain requirements. No recovery period required; batteries have exceptionally long shelf life. Single copy free on request.

Test and Measuring Equipment

INSTRUCTION BOOKLETS — Illustrated instruction booklets, containing specifications, operating and maintenance data, application information, schematic diagrams, and replacement parts lists, are available for all RCA test instruments. Booklets for the following popular instruments are available at the prices indicated. Prices for booklets on other instruments are available on request.

| WA-44A (Audio Signal |
|------------------------------------|
| Generator)\$0.50* |
| WA-44C (Audio Oscillator) 1.00* |
| WE-93A (Transistor Radio |
| Dynamic Demonstrator |
| Kit) 0.25* |
| WE-95A (VOM Dynamic Dem- |
| onstrator Kit) 0.10* |
| WO-33A (Super-Portable |
| Oscilloscope) 1.00* |
| WO-88A (5-in. Oscilloscope) 0.50* |
| WO-91A (5-in. Oscilloscope) 1.00* |
| WR-36A (Dot-Bar Generator) 0.50* |
| WR-46A (Video Dot/Crosshatch |
| Generator) 0.75* |
| WR-49A (RF Signal Generator) 0.50* |
| WR-49B (RF Signal Generator) 1.00* |
| WR-50A (RF Signal Generator) 1.00* |
| WR-51A (Stereo FM Signal |
| Simulator) 1.00* |
| WR-61B (Color-Bar Generator) 1.00* |
| WR-64A (Color-Bar/Dot/ |
| Crosshatch Generator) 1.00* |
| WR-67A (Test-Oscillator) 0.25* |
| WR-69A (TV-FM Sweep |
| Generator) 1.00* |

| WR-70A (RF-IF-VF Marker | |
|---|-------|
| Adder) | 0.75* |
| WR-86A (UHF Sweep | |
| Generator | 0.50* |
| WR-99A (Marker Calibrator) | 1.00* |
| WV-37B (Radio Battery Tester) | |
| WV-38A (Volt-Ohm- | |
| Milliammeter) | 0.50* |
| WV-65A (VoltOhmyst [†]) | 0.25* |
| WV-74A (High-Sensitivity | |
| AC VTVM) | 0.75* |
| WV-75A (VoltOhmyst [†]) | 0.25* |
| WV-76A (AC VTVM) | 0.75* |
| WV-77A (VoltOhmyst [†]) | 0.25* |
| WV-77B (VoltOhmyst [†]) | 0.25* |
| WV-77E (VoltOhmyst [†]) | 1.00* |
| WV-84C (Ultra-Sensitive | |
| DC Microammeter) | 0.75* |
| WV-95A (VoltOhmyst [†]) | 0.25* |
| WV-97A (VoltOhmyst [†]) | 0.50* |
| WV-98B (Senior VoltOhmyst [†]). | 1.00* |
| WV-98C (Senior VoltOhmyst [†]). | 0.50* |
| 195-A (VoltOhmyst [†]) | 0.25* |
| WT-100A (Electron-Tube | |
| MicroMhoMeter, Ser. | |
| No. 1001 and over) | 2.00* |
| WT-100A (Tube Chart 1CE | |
| $-163)\ldots\ldots\ldots$ | 3.00* |
| WT-110A (Automatic Electron- | |
| Tube Tester) | 1.00* |
| WT-110A (1CE-174 Card | |
| Punch Data) | 0.25* |
| WT-110A (1CE-234 Card | |
| Punch Data) | 1.00* |

†Trade Mark Reg. U.S. Pat. Off.

*Prices shown apply in U.S.A. and are subject to change without notice.

°Optional List Price.

Reading List

This list includes references of both elementary and advanced character. Obviously, the list is not inclusive, but it will guide the reader to other references. ALBERT, A. L. Electrons and Electron Devices, The MacMillan Co. BECK, A. H. W. Thermionic Valves, Cambridge University Press. CHUTE, G. M. Electronics in Industry. McGraw-Hill Book Co., Inc. DOME, R. B. Television Principles. McGraw-Hill Book Co., Inc. Dow, W. G. Fundamentals of Engineering Electronics. John Wiley and Sons, Inc. EASTMAN, A. V. Fundamentals of Vacuum Tubes. McGraw-Hill Book Co., Inc. EDSON, W. A. Vacuum Tube Oscillators, John Wiley and Sons, Inc. FINK, D. G. Television Engineering. McGraw-Hill Book Co., Inc. GHIRARDI, A. A. Radio and Television Receiver Circuitry and Operation. Rinehart and Co., Inc. GRAY, T. S. Applied Electronics. John Wiley and Sons, Inc. GROB, B. Basic Television. McGraw-Hill Book Co., Inc. HENNEY, KEITH. Radio Engineering Handbook. McGraw-Hill Book Co., Inc. HOAG, J. B. Basic Radio. D. Van Nostrand Co., Inc. KOLLER, L. R. Physics of Electron Tubes. McGraw-Hill Book Co., Inc. MAEDEL, G. F. Basic Mathematics for Television and Radio. Prentice-Hall, Inc. MARCUS, A. Elements of Radio. Prentice-Hall, Inc. MARKUS AND ZELUFF. Handbook of Industrial Electronic Circuits. McGraw-Hill Book Co., Inc. MILLMAN AND SEELY. Electronics. McGraw-Hill Book Co., Inc. MOYER AND WOSTREL. Radio Receiving and Television Tubes. McGraw-Hill Book Co., Inc. PENDER, DELMAR, AND MCILWAIN. Handbook for Electrical Engineers-Communications and Electronics. John Wiley and Sons, Inc. PREISMAN, A. Graphical Constructions for Vacuum Tube Circuits. McGraw-Hill Book Co., Inc. HICKEY, H. V., and VILLINES, JR., W. M. Elements of Electronics. McGraw-Hill Book Co., Inc. RCA TECHNICAL BOOK SERIES. Electron Tubes, Vol. I and Vol. II. RCA Review. REICH, H. J. Theory and Applications of Electron Tubes. McGraw-Hill Book Co., Inc. RICHTER, WALTHER. Fundamentals of Industrial Electronic Circuits. McGraw-Hill Book Co., Inc. SEELY, S. Electron Tube Circuits. McGraw-Hill Book Co., Inc. SPANGENBERG, K. R. Vacuum Tubes. McGraw-Hill Book Co., Inc. STURLEY, K. R. Radio Receiver Design. Chapman and Hall, Ltd. TERMAN, F. E. Fundamentals of Radio. McGraw-Hill Book Co., Inc. TERMAN, F. E. Radio Engineers Handbook. McGraw-Hill Book Co., Inc. The Radio Amateurs Handbook. American Radio Relay League. ZWORYKIN AND MORTON. Television: The Electronics of Image Transmission. John Wiley and Sons, Inc.

| BC | Gas-Type Tube Base Sleeve | F- | Filament (negative only) | LC | Do Not Use, Except As |
|---------|----------------------------------|---------------------------|------------------------------|----|-----------------------------|
| BS | Base Shell | $\mathbf{F}_{\mathbf{M}}$ | Filament Tap | | Specified in Data |
| С | External Con- ductive Coating | G | Grid | NC | No Internal |
| CL | Collector | H | Heater | | Connection- |
| DJ | Deflecting Elec- | H_L | Heater Tap for Panel Lamp | | May Be Used As Tie Point |
| TIC | trode | Нм | Heater Tap | P | Plate (Anode) |
| ES F | External Shield Filament | IC | Do Not Use | RC | Ray-Control |
| F+ | Filament | IS | Internal Shield | S | Electrode Shell |
| | (positive only) | K | Cathode | TA | Target |

KEY: BASING DIAGRAMS (Bottom Views)

Subscripts for multi-unit types: B, beam unit; D, diode unit; HP, heptode unit; HX, hexode unit; P, pentode unit; T, triode unit; TR, tetrode unit.

Many tube types are available in addition to the home-entertainment types described in this manual. For industrial and specialized applications, other small receiving-type tubes are available, such as nuvistor tubes, "premium" tubes, thyratrons, cold-cathode (glow-discharge) tubes, computer tubes, tubes for mobile communications applications, and Special Red tubes. Other lines of RCA electron devices include:

POWER TUBES

Transmitting and Industrial Types

TELEVISION CAMERA TUBES

Image Orthicons, Vidicons, and Monoscopes

PHOTOTUBES

Single-Unit, Twin-Unit, and Multiplier Types

PHOTOCELLS

• Photoconductive and Photojunction Types

THYRATRONS and IGNITRONS

MICROWAVE TUBES

Magnetrons, Traveling-Wave Tubes, Pencil Tubes

CATHODE-RAY TUBES

Special-Purpose Kinescopes, Storage Tubes, and Oscillograph Types

SPECIAL TYPES

Vacuum Gauge Tubes, Image Converters

SEMICONDUCTOR DEVICES

Germanium and Silicon Transistors, Silicon Rectifiers, Tunnel Diodes, Microelectronics, Memory Devices

For sales information, write to Sales For technical information, write to Commercial Engineering

RADIO CORPORATION OF AMERICA

ELECTRONIC COMPONENTS AND DEVICES

HARRISON, N. J.

