

PHILIPS

Data handbook



Electronic
components
and materials


Electron tubes

Part 1b August 1977

Transmitting tubes for communication

Tubes for r.f. heating

Amplifier circuit assemblies

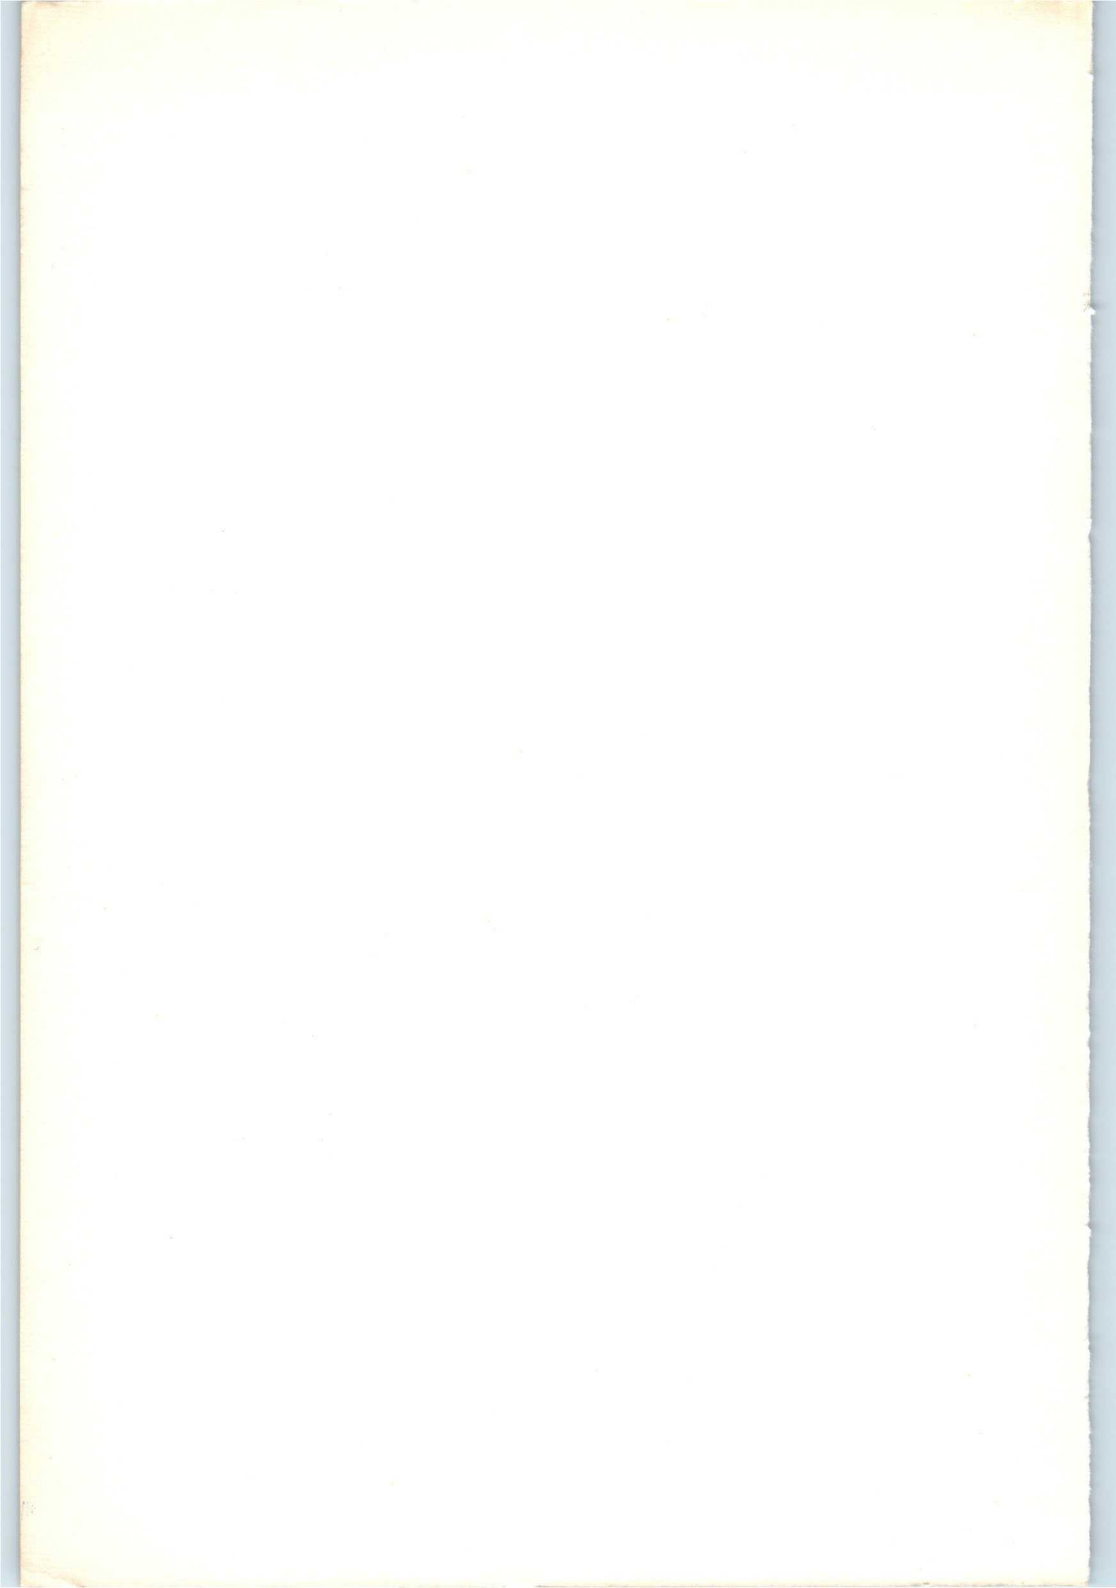

ELECTRON TUBES

Part 1b

AUGUST 1977

General section

Transmitting tubes for communication
Tubes for r.f. heating

Amplifier circuit assemblies

Associated accessories

Index

DATA HANDBOOK SYSTEM

Our Data Handbook System is a comprehensive source of information on electronic components, subassemblies and materials; it is made up of three series of handbooks each comprising several parts.

ELECTRON TUBES	BLUE
SEMICONDUCTORS AND INTEGRATED CIRCUITS	RED
COMPONENTS AND MATERIALS	GREEN

The several parts contain all pertinent data available at the time of publication, and each is revised and reissued periodically.

Where ratings or specifications differ from those published in the preceding edition they are pointed out by arrows. Where application information is given it is advisory and does not form part of the product specification.

If you need confirmation that the published data about any of our products are the latest available, please contact our representative. He is at your service and will be glad to answer your inquiries.

This information is furnished for guidance, and with no guarantee as to its accuracy or completeness; its publication conveys no licence under any patent or other right, nor does the publisher assume liability for any consequence of its use; specifications and availability of goods mentioned in it are subject to change without notice; it is not to be reproduced in any way, in whole or in part without the written consent of the publisher.

ELECTRON TUBES (BLUE SERIES)

This series consists of the following parts, issued on the dates indicated.

Part 1a	Transmitting tubes for communication Tubes for r.f. heating Types PE05/25 – TBW15/25	December 1975
Part 1b	Transmitting tubes for communication Tubes for r.f. heating Amplifier circuit assemblies	August 1977
Part 2	Microwave products Communication magnetrons Diodes Magnetrons for microwave heating Triodes Klystrons T-R switches Travelling-wave tubes Microwave semiconductor devices Isolators, Circulators	May 1976
Part 3	Special Quality tubes Miscellaneous devices	January 1975
Part 4	Receiving tubes	March 1975
Part 5a	Cathode-ray tubes	August 1976
Part 5b	Camera tubes Image intensifier tubes	May 1975
Part 6	Products for nuclear technology Channel electron multipliers Geiger-Müller tubes Neutron tubes	January 1977
Part 7a	Gas-filled tubes Thyratrons Ignitrons Industrial rectifying tubes High-voltage rectifying tubes	March 1977
Part 7b	Gas-filled tubes Segment indicator tubes Switching diodes Indicator tubes Dry reed contact units	March 1977
Part 8	TV picture tubes	May 1977
Part 9	Photomultiplier tubes Phototubes (diodes)	June 1976

SEMICONDUCTORS AND INTEGRATED CIRCUITS (RED SERIES)

This series consists of the following parts, issued on the dates indicated.

Part 1a	Rectifier diodes, thyristors, triacs		March 1976
	Rectifier diodes	Rectifier stacks	
	Voltage regulator diodes (> 1,5 W)	Thyristors	
	Transient suppressor diodes	Triacs	
Part 1b	Diodes		May 1977
	Small signal germanium diodes	Voltage regulator diodes (< 1,5 W)	
	Small signal silicon diodes	Voltage reference diodes	
	Special diodes	Tuner diodes	
Part 2	Low-frequency transistors		December 1975
Part 3	High-frequency and switching transistors		April 1976
Part 4a	Special semiconductors		June 1976
	Transmitting transistors	Dual transistors	
	Microwave devices	Microminiature devices for	
	Field-effect transistors	thick- and thin-film circuits	
Part 4b	Devices for optoelectronics		July 1976
	Photosensitive diodes and transistors	Photocouplers	
	Light emitting diodes	Infrared sensitive devices	
	Displays	Photoconductive devices	
Part 5a	Professional analogue integrated circuits		November 1976
Part 5b	Consumer integrated circuits		March 1977
	Radio - Audio		
	Television		
Part 6	Digital integrated circuits		May 1976
	LOC MOS HE family		
	GZ family		

COMPONENTS AND MATERIALS (GREEN SERIES)

This series consists of the following parts, issued on the dates indicated.

Part 1	Assemblies for industrial use High noise immunity logic FZ/30-Series Counter modules 50-Series NORbits 60-Series, 61-Series Circuit blocks 90-Series Circuit block CSA70 (L)	PLC modules Input/output devices Hybrid circuits Peripheral devices Ferrite core memory products	June 1977
Part 2a	Resistors Fixed resistors Variable resistors Voltage dependent resistors (VDR) Light dependent resistors (LDR)	Negative temperature coefficient thermistors (NTC) Positive temperature coefficient thermistors (PTC) Test switches	February 1976
Part 2b	Capacitors Electrolytic and solid capacitors Paper capacitors and film capacitors	Ceramic capacitors Variable capacitors	April 1976
Part 3	Radio, Audio, Television FM tuners Loudspeakers Television tuners and aerial input assemblies	Components for black and white television Components for colour television	January 1977
Part 4a	Soft ferrites Ferrites for radio, audio and television Beads and chokes	Ferroxcube potcores and square cores Ferroxcube transformer cores	October 1976
Part 4b	Piezoelectric ceramics, Permanent magnet materials		December 1976
Part 5	Ferrite core memory products Ferroxcube memory cores Matrix planes and stacks	Core memory systems	July 1975
Part 6	Electric motors and accessories Small synchronous motors Stepper motors	Miniature direct current motors	April 1977
Part 7	Circuit blocks Circuit blocks 100 kHz-Series Circuit blocks 1-Series Circuit blocks 10-Series	Circuit blocks for ferrite core memory drive	September 1971
Part 8	Variable mains transformers		February 1977
Part 9	Piezoelectric quartz devices		March 1976
Part 10	Connectors		November 1975

General section



TRANSMITTING TUBES FOR COMMUNICATION

TUBES FOR R.F. HEATING

LIST OF SYMBOLS

1. Symbols denoting electrodes and electrode connections

Anode	a
Beam plates	bp
Filament or heater	f
Filament or heater tap or starpoint of three star-connected filaments	f_c
Filament (and cathode) R.F. connection	f(k)
Grid	g
Tube pin which must not be connected externally	i.c.
Cathode	k
External conductive coating	m
Internal shield	s

Remarks

- a. Similar electrodes of the same electrode system are distinguished by means of an additional numeral; the electrode nearest to the cathode has the smallest number. Example: with pentodes: g_1, g_2, g_3 .
- b. Equivalent electrodes of a multi-unit tube are distinguished by means of an apostrophe; e.g. the anodes of a double tetrode are indicated by a and a'.

2. Symbols denoting voltages

Remarks

- a. In the case of indirectly heated tubes the voltages on the various electrodes are with respect to the cathode; in case of d.c. fed, directly heated tubes with respect to the negative side of the filament, and in case of a.c. fed, directly heated tubes with respect to the electrical centre of the filament, unless otherwise stated.
- b. The symbols quoted below represent the average, or mean, values of the concerning voltages, unless otherwise stated.

Anode voltage	V_a
Anode a.c. voltage	$V_{a\sim}$
Anode voltage in cut-off or cold condition	V_{a_0}
Supply voltage of tube electrodes	V_b

2. Symbols denoting voltages (continued)

Filament or heater voltage	V_f
Grid voltage	V_g
Grid a. c. voltage	$V_{g\sim}$
A.C. input voltage	V_i
Voltage between cathode and heater	V_{kf}
Peak value of a voltage	V_p
RMS value of a voltage	V_{RMS}, V_{rms}
Secondary transformer voltage	V_{tr}

3. Symbols denoting currents

Remarks

a. The direction of positive electrical current flow is opposite to that of electron flow.

b. The symbols quoted below represent the average values of the currents concerned, unless otherwise stated.

Anode current	I_a
Filament or heater current	I_f
Grid current	I_g
Cathode current	I_k
Peak value of a current	I_p
RMS value of a current	I_{RMS}, I_{rms}
Saturation current	I_{sat}

4. Symbols denoting powers

Anode dissipation	W_a
Driver output power, Driving power	W_{dr}
Grid dissipation	W_g
Anode d. c. supply power	W_{ia}
Input power	W_i
Output power in the load	W_l
Modulation power	W_{mod}
Tube output power	W_o
Peak envelope output power	W_{oPEP}
Oscillator output power	W_{osc}

5. Symbols denoting capacitances

In general the published capacitance values refer to the cold tube

Capacitance between the anode and all other elements except the control grid	C_a
Capacitance between anode and filament (all other elements being earthed)	C_{af}
Capacitance between anode and grid (all other elements being earthed)	C_{ag}
Capacitance between anode and cathode (all other elements not connected to the cathode being earthed)	C_{ak}
Capacitance between grid and filament (all other elements being earthed)	C_{gf}
Capacitance between control grid and all other elements except anode	C_g
Capacitance between two grids (all other elements being earthed)	C_{g1g2}
Capacitance between grid and cathode (all other elements not connected to the cathode being earthed)	C_{gk}
Input capacitance of a push-pull circuit	C_i
Capacitance between cathode and all other elements	C_k
Output capacitance of a push-pull circuit	C_o

6. Symbols denoting resistances

External a. c. resistance in an anode lead or matching resistance	$R_{a\sim}$
Matching resistance of a push-pull amplifier (anode to anode)	$R_{aa\sim}$
Filament or heater resistance	R_f
Filament or heater resistance in cold condition	R_{f0}
External resistor in a grid lead	R_g
External resistor in a cathode lead	R_k

7. Symbols denoting various quantities

Bandwidth	B
Harmonic distortion factor	d
n-th harmonic distortion	d_n
Total harmonic distortion	d_{tot}

7Z2 4156

7. Symbols denoting various quantities (continued)

Intermodulation distortion	d_i
n-th order intermodulation distortion	d_{in}
Frequency	f
Pulse repetition rate	f_{imp}
Height above sea level, altitude	h
Modulation factor	m
Pressure drop of cooling air or cooling water	P_i
Rate of flow of cooling air or cooling water	q
Thermal resistance	R_{th}
Transconductance	S
Temperature of anode block	t_a
Ambient temperature	t_{amb}
Bulb temperature	t_{bulb}
Envelope temperature	t_{env}
Cathode heating time	T_h
Waiting time (time which has to pass between switching on of the filament or heater voltage and switching on of the other voltages)	T_w
Inlet temperature of cooling air or cooling water	t_i
Outlet temperature of cooling air or cooling water	t_o
Pulse duration	T_{imp}
Seal temperature	t_s
Duty factor	δ
Efficiency	η
Wavelength	λ
Amplification factor	μ
Amplification factor of grid no. 2 with respect to grid no. 1	μ_{g2g1}

GENERAL OPERATIONAL RECOMMENDATIONS TRANSMITTING TUBES FOR COMMUNICATION TUBES FOR R.F. HEATING

1. GENERAL

1.1 In this Handbook data and curves are given for transmitting tubes and tubes for R.F. heating.

1.2 The tubes are classified into groups:

- Preferred types - Recommended for new equipment design.
- Current types - Available for equipment production and maintenance.
No longer recommended for new equipment design.
- Maintenance types - Available for equipment maintenance.
No longer recommended for equipment production.
- Obsolescent types - Available until present stocks are exhausted.
- Obsolete types - No longer available.

For the status of each type please refer to the "Catalogue Transmitting tubes" or consult your tube supplier.

Full details are given of Preferred types and Current types, Data on maintenance and obsolescent types is generally given in condensed form.

2. CHARACTERISTIC DATA

2.1 The characteristic data given in the data sheets is general and independent of specific application. This data (e.g. filament/heater current, amplification factor, trans-conductance, capacitances etc.) is applicable to a typical tube and deviations from the stated value are likely to occur in practice.

2.2 Filament/heater supply.

The published value of filament/heater voltage is generally that which should be present directly at the tube terminals. Filaments fed with direct current should have their supply polarity reversed at regular intervals (say monthly), to ensure uniform wear of the filament with consequent longer life.

Reduction of filament/heater voltage is sometimes recommended to compensate e.g. the heating by back-bombardment at high frequencies; see the relevant data sheets. Special precautions must be taken when operating the filaments/heaters of transmitting tubes in series and the manufacturer should be consulted before doing so.

2.2.1 Pure tungsten cathodes (filaments)

The published value of filament voltage is the maximum voltage required for a new tube to supply the rated output power. A lower voltage (giving longer life) will often suffice and every tube with a pure tungsten cathode is supplied together with a list stating the saturation current at various filament voltages. Thus, knowing the required emission current, the most suitable filament voltage can be selected. Alternatively the filament voltage can be adjusted until the required output power, or maximum distortion, is reached

and, (to obtain peak output power) further adjusted after modulation is applied. Regular adjustment (say monthly) will be necessary to maintain the required conditions and, towards the end of tube life, the filament voltage may be raised above the nominal.

To compensate for mains supply fluctuations, automatic or manual control of the filament voltage should be exercised, especially when operating at nominal, or higher than nominal, filament voltage.

2.2.2 Thoriated tungsten cathodes (filaments)

The maximum working life from these cathodes is obtained when the filament voltage is held within 1% of the nominal. Underheating and overheating may be harmful so temporary deviations from the nominal voltage must not exceed $\pm 5\%$, unless otherwise specified.

2.2.3 Quick heating cathodes (filaments)

In general, tubes with quick heating cathodes should have their filaments in parallel only. When a sinusoidal voltage is used for heating the filament, the frequency must not be in the range 200 Hz to 5000 Hz.

When a non-sinusoidal voltage from a d.c. -a.c. converter is used the r.m.s. value should be adjusted to the published value of filament voltage.

If required the heating time can be further reduced by applying a higher value for a short time. The manufacturer should be consulted before doing so.

2.2.4 Indirectly heated oxide coated cathodes

For maximum life the heater voltage should be as near as possible to the nominal value and the maximum permissible deviation must not exceed 10%, unless otherwise specified.

R.F. voltages between heater and cathode may induce faulty r.f. insulation with resultant r.f. power losses. To overcome these losses an increase in the driving power would be required resulting in an increase of cathode temperature with a consequent reduction of tube life. Such r.f. voltages should therefore be avoided e.g. by using one of the following techniques:

- by-passing the heater to cathode insulation and decoupling the heater at v.h.f. and u.h.f.
- r.f. blocking with series chokes in heater supply leads and decoupling with capacitors.

2.2.5 Switching on the filament voltage

Unless a maximum switch-on value of filament current is stated in the data sheet, switching on at full filament voltage is permissible. The published values of the maximum permissible filament current during switch on, refer to the absolute maximum of the instantaneous value under worst case conditions. With a.c. feed this will exist when switching on at the instantaneous peak voltage of the highest mains voltage that may occur. In practice the filament current during switching on can be limited by means of a filament transformer with high magnetic leakage or a series choke or resistor in the primary of the

transformer. If necessary this choke or resistor may be short circuited by means of a relay after a delay of, say, 15 seconds.

2.2.6 By-passing the filament

Tubes with directly heated cathodes must have the filament terminals at the same r.f. potential. For this purpose it is usual to connect a capacitor, that has low reactance with respect to the operating frequency, near to and between the filament terminals. As an added safety precaution it should be established that the resonance of this capacitor together with the inductance of the filament structure falls well below the operating frequency.

2.3 Switching on of the electrode voltages

Unless prescribed otherwise simultaneous switching on of filament, anode, control-grid, and screen-grid voltages is permissible for tubes with an internal anode. Tubes with an external anode should in general not have their positive voltages applied until the cathode has reached its operating temperature. This can be checked by monitoring the filament current.

2.4 Effective cathode

If both filament limbs are marked "f" in the data sheets, the filament may be regarded as being symmetrical in its function as cathode. If such a filament is fed with d.c. the anode return lead should be connected to the negative end of the filament. All other decoupling and circuit returns must then also be connected to this point.

If the filament is fed with a.c. the anode return lead should be connected to the centre tap of the filament transformer or to a tapped resistor shunted across the filament. The filament decoupling will then be symmetrical with regard to this point and all other circuit returns must also be made to this point.

If one filament limb is marked "f" and the other "f(k)", only the one marked "f(k)" may be used as the circuit cathode. If such a filament is fed with d.c., the negative side of the filament supply should be connected to this point.

For either d.c. or a.c. filament supply, the anode supply as well as de-coupling and other circuit returns must be connected to "f(k)" only.

2.5 Inter-electrode capacitances

The published values of capacitances are average values measured on the cold tube with no operating voltages; individual deviations may however occur.

The definitions of the capacitance symbols are given in the appropriate list in I.E.C. Publication 100.

2.6 Amplification factor μ and transconductance S

The published values are average values and individual deviations may occur. Normally the conditions at which the values have been measured, are stated.

2.7 Saturation current I_{sat}

Each large tube with a pure tungsten cathode is marked with the value of filament voltage at which the saturation current has the value specified in the data sheet.

2.8 Accessories

Proper functioning of the tubes can be guaranteed only if accessories (sockets, cooling devices etc.) have been supplied, or approved, by the tube manufacturer.

3. LIMITING VALUES

3.1 Limiting values mean the maximum, or minimum, permissible values of the parameters listed. These limits are given either for all operating conditions together, or for a particular application.

3.2 The limiting values are applicable up to the maximum frequency stated. When operating at higher frequencies the limiting values must be decreased in accordance with the published data or curves.

3.3 Derating the limiting values

If no limiting values have been published for a specific application the derating factors listed in the following table must be applied. The values for class C telegraphy have been expressed as unity; the limiting values for other applications have been expressed as a factor of this unity.

A rectified 3-phase supply with or without filtering is equivalent to a d.c. supply.

The derating factors are determined by the physical limits of the tube and contain no safety margins. Where mains voltage fluctuations occur further derating must be applied (see section 3.5). The nature of operation, e.g. the industrial application of heating generators may necessitate further safety derating (see section 5.4).

Wo = tungsten filament

Th = thoriated tungsten filament

		V _a	I _a	I _g	W _{ia}	W _a	W _{g2}
R.F. class C telegraphy		1	1	1	1	1	1
Anode mod.	Th	0.8	0.833	1	0.67	0.67	0.67
	Wo	0.8	0.5	1	0.4	0.4	0.4
R.F. class B	Th	1	0.833	1	0.833 ¹⁾	1	0.67
	Wo	1	0.5	1	0.5	1	0.5
A.F. class B		1	1	1	1	1	1
A.F. class AB		1	1	1	1	1	1
A.F. class A		1	1		W _a	1	1
Self-rectifying oscillator	Th	1.13	0.53	0.53	0.665	1	
	Wo	1.13	0.32	0.32	0.4	1	
Two-phase half-wave without filter	Th	0.9	0.89	0.89	1	1	
	Wo	0.9	0.6	0.6	1	1	

1) or 1.5 W_a.

3.4 Rating system

The limiting values should be used in accordance with the "Absolute maximum rating system" as defined by I.E.C. Publication 134.

3.5 Absolute maximum rating system

Absolute maximum ratings are limiting values of operating and environmental conditions applicable to any electronic device of a specified type as defined by its published data, and should not be exceeded under the worst probable conditions.

These values are chosen by the device manufacturer to provide acceptable serviceability of the device, taking no responsibility for equipment variations, environmental variations, and the effects of changes in operating conditions due to variations in the characteristics of the device under consideration and of all other electronic devices in the equipment.

The equipment manufacturer should design so that, initially and throughout life, no absolute maximum value for the intended service is exceeded with any device under the worst probable operating conditions with respect to supply voltage variation, equipment components variation, equipment control adjustment, load variations, signal variation, environmental conditions, and variations in characteristics of the device under consideration and of all other electronic devices in the equipment.

- 3.6 Each limiting value should be regarded independently of other values; under no circumstances is any limiting value to be exceeded (e.g. if the anode voltage is decreased to a value lower than its limiting value, it is not permissible to exceed the limiting value of anode current or anode dissipation). Unless otherwise stated, the limiting values for currents and voltages are measured with a moving coil instrument.

3.7 Electrode voltages

The voltages (V_a , V_{g1} , V_{g2} etc.) listed under limiting values should not be exceeded even with a cold tube. Special attention should be paid to this point when a screen-grid is supplied via a series resistor.

When designing equipment to be supplied from non-stabilized mains, the maximum mains voltage occurring determines the nominal operating voltages of the tube. These nominal voltages must be lower than the limiting values. Should the transmitting tubes, and thus the voltage supply, be temporarily under a lower load their voltages will increase and these increased values, occurring at the highest mains voltage, determine the nominal operating voltages.

The limiting values of voltage are d.c. values. If an a.c. or an unsmoothed d.c. supply is used, the limiting values must be decreased in accordance with the derating factors shown in the table (section 3.3).

3.8 Anode dissipation

The limiting value of the anode dissipation W_a should not be exceeded when mains voltage fluctuations occur, or when grid drive fails. To prevent damage to the tube, in the latter case, adequate fixed bias or a quick action relay in the anode lead should be provided. When forced-air or water-cooling is sufficient only for an anode dissipation smaller than the absolute maximum, the smaller value must be regarded as the limiting value.

3.9 Anode input power

Usually the data sheets show the limiting value of input power W_{i_a} to be smaller than the product of limiting values of anode voltage and anode current; the latter two limits should not therefore occur simultaneously.

In practice the input power W_{i_a} is not always the product of the d.c. values of I_a and V_a . For pulsating supply voltages the form factor should be taken into account.

3.10 For the screen-grid dissipation the product of screen-grid voltage and current can always be taken.

The screen-grid should be protected against failure of anode voltage.

3.11 Control-grid dissipation

The control-grid dissipation W_g or W_{g1} can be approximated, by taking the power supplied to the grid bias source ($-V_g \times I_g$) from the grid driving power (approx. $0.95 \times V_{g_p} \times I_g$). When an a.c., or unsmoothed d.c., voltage supply is used the form factor should be taken into account.

3.12 Grid resistance

By the maximum permissible grid resistance R_g is meant the d.c. resistance in the grid circuit. A higher value may cause instability.

4. OPERATING CONDITIONS

4.1 General

In the published data, operating conditions for various applications have been given, stating the maximum frequency at which the conditions apply. If it is required to operate a tube at higher frequencies the manufacturer should be consulted. The published values of operating conditions are average values derived from measurements made on nominal tubes working under optimum conditions. Thus, small deviations from the published value can occur if measurements are made on a particular tube. However some of the measured values of voltage or current must be adjusted to give the published figure. As an example, the published value of output power is an average value which can be reached in practice by adjusting e.g. the r.f. or a.f. input voltage V_{gp} , when the published value of output power is not obtained at the nominal value of V_{gp} . When designing a multi-stage transmitter it is good practice to leave a margin in the output power and input voltage to allow for adjustments similar to that just described. The published output power W_o of transmitting tubes is the tube output, which means the anode dissipation W_a taken from the anode input W_{ia} . When a tube is used in a common grid circuit (grounded grid circuit), the published value of the output power includes the power transferred from the input. Unless otherwise stated losses in the anode circuit and coupling losses are not taken into account.

The quoted grid input power is assumed to be $0.9 \times$ the product of the average grid current I_g and the peak value of the grid voltage V_{gp} . Losses in the grid circuit and the bleeder are sometimes accounted for by stating the required driver output power.

At high frequencies where reduced ratings have to be applied, the required driving power will often be considerably higher than the grid input power, and in some cases, may be determined almost exclusively by circuit losses.

4.2 R.F. class C telegraphy and F.M. telephony

A class C amplifier or oscillator is one in which the grid bias is appreciably greater than the cut-off voltage so that current flows for less than one half of each cycle of the alternating grid voltage. Working to the values published in the data sheets will ensure good output power and efficiency.

If a grid resistor is used for obtaining automatic bias, care must be taken that the anode current does not become too high if the r.f. driving power should fail. A safety device in the anode or screen-grid lead should be incorporated for this purpose.

4.3 R.F. class C anode and screen-grid modulation

In an r.f. class C anode modulated stage the anode voltage is modulated with a.f., and at 100% modulation the voltage is varied from zero to twice the d.c. value. With tetrodes or pentodes the screen-grid should also be modulated to prevent it being overloaded. The average values of the grid bias and r.f. driving voltage remain constant during modulation. With 100% modulation the average anode dissipation is 1.5 times the value without modulation and this is taken into account although the published limiting value of anode dissipation refers to the unmodulated power. Automatic grid bias by means of a grid leak can be used, but, to obtain minimum distortion, some fixed bias is recommended.

The modulation power published is the power required by the modulated r.f. stage. When the modulating stage is being calculated 5% to 10% must be added to allow for losses in transformer and choke.

4.4 R.F. class B telephony

A class B amplifier is one in which the grid is biased to the cut-off voltage so that the anode current flows for approximately one half of each cycle of the alternating grid voltage. The published data for r.f. class B telephony has been determined, by trial and error, to give a straight modulation characteristic.

4.5 R.F. class AB SSB amplifier

The given operating conditions are from measurements made in a circuit without feedback and with constant screen-grid voltage. They show the best compromise between output power and linearity. Linearity is measured with a double tone test signal in which the two tones have equal amplitude and lie 1000 Hz apart in frequency. The amplitudes of the distortion products d_3 and d_5 are in dB referred to the amplitude of either of the two equal tones. The published values of d_3 and d_5 are the worst encountered at any driving level and occur usually slightly below full output power. Distortion products of orders other than d_3 and d_5 are, in general, negligible. If the amplitudes of the distortion products are referred to the peak envelope amplitude, the figures for d_3 and d_5 go down 6 dB.

4.6 A.F. class B amplifier

With this amplifier the anode dissipation is dependent on the input signal voltage so that maximum anode dissipation is obtained when the signal is about 60% of the value at full drive. When this is not present continuously, as is the case with broadcast and telephony services, it is permissible for the limiting value of anode dissipation to be exceeded by 10%.

To suppress even harmonics, separate controllable grid bias for each tube, or a balancing circuit, should be incorporated. This data is purely arbitrary, i.e. the same output can be obtained with less modulation of the anode current (with smaller load resistance and lower peak grid current) although the efficiency would be lower. The requirements of the complete a.f. amplifier determines which kind of operation is preferred.

4.7 Industrial operating conditions

Section 5.4 gives some general information on the application of power tubes in industrial apparatus. With a single phase mains connection a hum filter will sometimes be omitted as is normal in three phase mains connection. Operating conditions and derating factors are given for this kind of operation (section 3.3). It must be ensured that no limiting values are exceeded because of fluctuations in the mains supply or by tolerances in other components. The published value of W_0 is the actual tube output power. The output power of a self-oscillating circuit W_{osc} is obtained by deducting the grid dissipation W_g and the losses in the grid resistor W_{Rg} from the output power W_0 . The power in the load W_1 is obtained by deducting the losses in the output circuit from W_{osc} . A favourable load output characteristic may be obtained by automatically controlling the grid voltage and current, depending on the matching. A non-linear device e.g. a tungsten lamp or an P.T.C. resistor may perform this function

adequately and help to prevent overloading the grid.

With self oscillating circuits the frequency must be held within the available frequency band. This may be done by having large circuit capacitance, small stable self inductance, undercritical inductive coupling with the output circuit, electrostatic screening between oscillator and output circuit etc.

If the frequency of an industrial oscillator has to be limited to a narrow frequency band, crystal controlled driving stages may be used, then however, it is rather difficult to obtain matching between the tube input and output. A greater safety margin in the tube will be necessary with the output still depending on the load, or special measures, such as automatic tuning and/or matching control, will have to be taken.

For smaller tubes in industrial applications operating conditions have been given for when power is supplied from a single phase full-wave rectifier, a three phase half-wave rectifier (which is nearly equivalent to d.c.) and with raw a.c. In the latter case the output is about 0.6 times that obtained with d.c. and the peak inverse voltage is equal to the full anode voltage (this is of special importance as the grid voltage is in anti-phase to the anode voltage). With a single-phase, half-wave rectified anode voltage the useful output is nearly equal to that with a d.c. supply. To obtain the most favourable mains loading when using a self rectifying oscillator, a quasi push-pull circuit can be used, in which two tubes function alternately on each half wave. The best mains loading for three-phase, self rectification is obtained by using 6 tubes in a triple push-pull circuit.

4.8 Intermittent service

When data concerning intermittent service is published it is conditional that, although the cathode may be heated continuously, the on-period is no more than 5 minutes and that the off-period is equally long or longer.

5. APPLICATION OF THE OPERATING CONDITIONS

5.1 General

It is not always possible to operate the tube under the specified operating conditions. In some applications deviations from the published values are likely to occur causing the limiting values to be exceeded. Depending on the kind of service the following classification can be made:

- Fixed transmitters for broadcasting and telecommunication service, operated by a trained staff. (5.2)
- Mobile transmitters. (5.3)
- Equipment for industrial applications (r.f. heating, supersonics etc.) (5.4)
- Amateur transmitters and special applications. (5.5)
- Pulse operated equipment. (5.6)

5.2 Fixed transmitters

With fixed transmitters it is usually possible to use the tubes under ideal working conditions viz.

- only very small mains voltage deviations as the supply is derived from a special high tension line.
 - stabilized mains voltage supply.
 - a fairly constant and optimum transmitter load.
 - the presence of safety devices which prevent tube damage under any circumstances.
 - the presence of a well trained staff for the immediate repair of faults.
- and thus it is permissible to operate near the limiting values.

5.3 Mobile transmitters

Mobile transmitters are transmitters which can be operated whilst mobile; they often have to function with widely varying supply voltages and with loads that are neither constant nor optimum. Safety devices are usually poor, especially in small transmitters, so the use of the tube at the published maximum operating conditions is not recommended. The actual operating conditions chosen will depend upon specific circumstances. Because the electrode system in the smaller quick heating or oxide coated transmitting tubes is rugged and can withstand the vibration and occasional shocks experienced in normally used road vehicles the tubes are ideal for mobile transmitters.

However in aircraft and vehicles used over rough ground it is advisable to shockmount the tubes. The oxide coated cathode is fairly insensitive to heater voltage variation and the high specific emission allows lower anode voltages to be used. Generally, when used in any apparatus that is likely to be subjected to shocks or vibration, tubes with thoriated tungsten cathodes require shock damping. If a special device is used to clamp a tube into its socket it must be ensured that the maximum permissible temperature is not exceeded in any part of the envelope.

5.4 Industrial application, r.f. heating, supersonics etc.

For the following reasons, in industrial equipment the tube seldom operates under ideal conditions.

- Large, uncompensated mains voltage fluctuations.
- Voltage supply with no provision against hum.
- Variable load.
- Relative large tolerances on the stability of the operating frequency.
- Intermittent service.
- Service personnel often untrained in the servicing of the electronic power equipment.

Thus the design of industrial equipment differs from that of fixed transmitters and generally demands the use of self oscillating triodes. The most reliable operation of the tube, and hence the equipment, is obtained by selecting a nominal supply potential which, at the maximum mains voltage, does not exceed the limiting value.

In equipment powered by a.c. or unsmoothed d.c., the pulsating waveform is such that the average values of voltage and current chosen must be lower than if they were supplied by a normal d.c. supply.

Special attention should be paid to the grid current and dissipation since, in most cases, they are critical values.

Special cases of intermittent service make it possible to increase the limiting values and information on these possibilities will be supplied on request.

5.4.1 Multiple tube operation

Since industrial generators are largely self oscillating, single tube operation is generally preferred. This mode of operation minimizes the risk of interaction between the tube and circuit stray reactances that could lead to parasitic oscillations. Whenever, for various reasons, such as the suppression of the even harmonics or the need for higher power at higher frequencies, push-pull or parallel operation is chosen, increased attention must be paid to the prevention of interaction between the tubes, be they in push-pull or parallel, through their connections or other stray circuit reactances.

5.5 Amateur transmitters and special adjustments

The maximum permissible load of a tube is determined by the physical maxima of the tube incorporated in the limiting values. No guaranteed tube life can be given if the limiting values are exceeded although this does not imply that exceeding the limits will always result in an immediate breakdown of the tube. In the case of I.C.A.S. (Intermittent Commercial and Amateur Service) for instance, higher operating conditions have been given (see section 4.8) but generally no guarantee of tube life is given. Information about special circuits, adjustments and operating conditions will be supplied on request.

5.6 Pulsed operation

When a tube is used under pulsed operation the pulse duration must be so short that no part of the tube reaches an abnormally high temperature and flash-overs do not develop. In general the average load will be considerably less than the maximum limiting load value.

General information on this kind of information is not available but, if requested, information will be given on specific applications.

6. Conditioning

After transit or a period of storage it is recommended that power tubes should be operated for not less than 15 minutes with only the filaments/heaters energized before putting into full service.

In addition, for tubes operating normally with anode voltages in excess of 5 kV, it is recommended that the anode voltage and input power should be increased gradually or in several steps for a further period of 15 minutes, or longer, until normal operation is achieved.

This treatment will remove any traces of gases which might cause premature failure of the tube.

Transmitting tubes for communication
Tubes for r.f. heating



R.F. POWER TRIODE

Triodes intended for use as H.F. amplifier, oscillator, and modulator.

The YD1000 is water cooled.

The YD1001 is forced-air cooled.

The YD1002 is vapour cooled.

QUICK REFERENCE DATA

Frequency (MHz)	C telegraphy		C anode mod.		R. F. class B		A. F. class B Two tubes	
	V _a (kV)	W _o (kW)	V _a (kV)	W _o (kW)	V _a (kV)	W _o (kW)	V _a (kV)	W _o (kW)
10	15	120			15	110	10	78
30	12	90	11	66	12	110	10	78

HEATING: direct by a. c. or d. c. ; thoriated tungsten filament.

Filament voltage	V _f	12,6	V
Filament current	I _f	160	A

CAPACITANCES

Grid to filament	C _{gf}	120	pF
Anode to filament	C _{af}	1,4	pF
Anode to grid	C _{ag}	50	pF

TYPICAL CHARACTERISTICS

Anode voltage	V _a	3	kV
Anode current	I _a	1	A
Amplification factor	μ	58	
Transconductance	S	60	mA/V

TEMPERATURE LIMITS

Absolute max. bulb temperature	t _{bulb}	220	°C
Absolute max. seal temperature	t _s	220	°C

COOLING

At frequencies higher than 10 MHz a low-velocity air flow should be directed to the grid and filament seals.

YD1000

See cooling curves.

For water inlet temperatures between 20 °C and 50 °C the required quantity of water can be found by proportional interpolation.

YD1001

See cooling curves.

At higher temperatures the amount of air should be increased so that the outlet air temperature is not higher than that at $t_i = 25$ °C. At lower temperatures the amount of air should be the same as that at $t_i = 25$ °C.

YD1002

Cooling data for anode dissipation $W_a = 60$ kW

Total dissipation to be transferred by cooling system

$$(W_a + W_g + 0,8 W_f)$$

equivalent to

63	kW
3768	kJ/min
(900)	kcal/min)

Volume of produced vapour

at back-flow water temperature of 20 °C	2,5	m ³ /min
at back-flow water temperature of 90 °C	2,8	m ³ /min

Amount of back-flowing water

at back-flow water temperature of 20 °C	1,5	ℓ/min
at back-flow water temperature of 90 °C	1,7	ℓ/min

ACCESSORIES

Filament connector with cable	type	40670	
Filament/cathode connector with cable	type	40670	
Water jacket (YD1000 only)	type	K 724	net mass 5 kg
Insulating pedestal (YD1001 only)	type	40672	net mass 9,2 kg
Vapour cooling system (vapour jacket) (YD1002 only)	type	K 728	net mass 8 kg
Tube extractor	type	221 L	




MECHANICAL DATA

Dimensions in mm

YD1000

Net mass : 6,2 kg

Mounting position : vertical with anode down

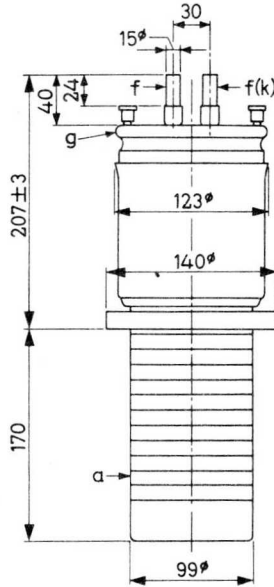


YD1000
YD1001
YD1002

YD1001

Net mass : 39 kg


Mounting position : vertical with anode down

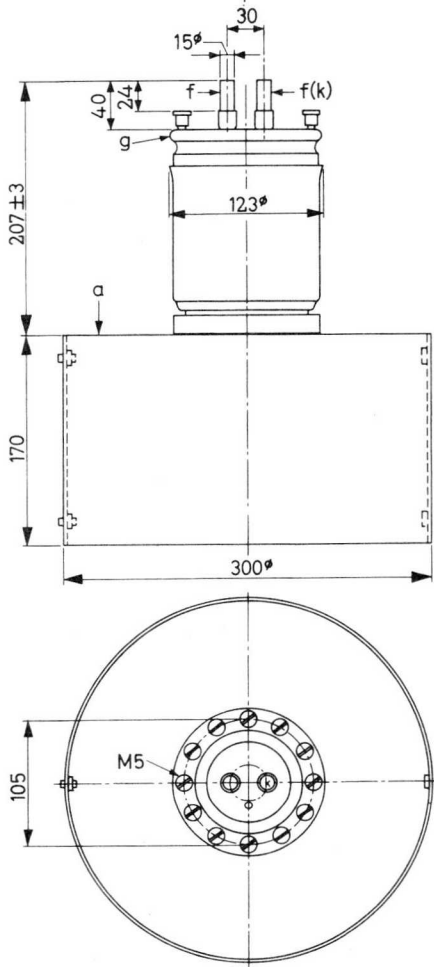

YD1002

Net mass : 17 kg

Mounting position : vertical with anode down

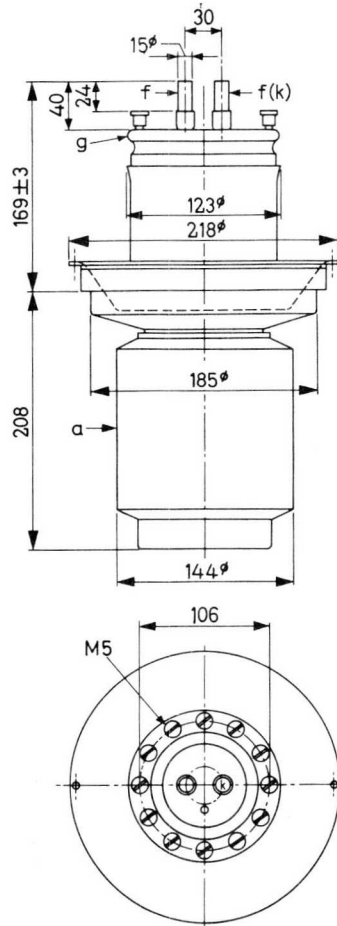

R.F. CLASS-C TELEGRAPHY or F.M. TELEPHONY

LIMITING VALUES (Absolute limits)

Frequency	f	up to	10	up to	30	MHz
Anode voltage	V_a	max.	16	max.	12,5	kV
Anode dissipation	(YD1000) W_a	max.	45	max.	45	kW
	(YD1001) W_a	max.	35	max.	35	kW
	(YD1002) W_a	max.	60	max.	60	kW
Grid voltage, negative	$-V_g$	max.	1000	max.	1000	V
Grid dissipation	W_g	max.	1,3	max.	1,3	kW
Anode current	I_a	max.	13	max.	13	A
Grid current	I_g	max.	3,3	max.	3,3	A

OPERATING CONDITIONS

Frequency	f	10	30	30	30	MHz
Anode voltage	V_a	15	12	10	8	kV
Grid voltage	V_g	-600	-550	-500	-450	V
Anode current	I_a	9,75	9,25	9,0	8,75	A
Grid current	I_g	2,2	2,2	2,1	1,85	A
Grid driving voltage, peak	V_{gp}	1000	940	875	810	V
Driving power	W_{dr}	2,1	1,9	1,7	1,55	kW
Anode input power	W_{ia}	146	111	90	70	kW
Anode dissipation	W_a	26	21	18	15	kW
Output power	W_o	120	90	72	55	kW
Efficiency	η	82	81	80	78,5	%

R.F. CLASS-B AMPLIFIER

LIMITING VALUES (Absolute limits)

Frequency	f	up to	10	up to	30	MHz
Anode voltage	V_a	max.	16	max.	12,5	kV
Anode dissipation	(YD1000) W_a	max.	45	max.	45	kW
	(YD1001) W_a	max.	35	max.	35	kW
	(YD1002) W_a	max.	60	max.	60	kW
Grid voltage, negative	$-V_g$	max.	1000	max.	1000	V
Grid dissipation	W_g	max.	1,3	max.	1,3	kW
Anode current	I_a	max.	13	max.	13	A
Grid current	I_g	max.	3,3	max.	3,3	A

OPERATING CONDITIONS

Frequency	f	10	10	30	30	MHz
Anode voltage	V_a	15	15	12	12	kV
Grid voltage	V_g	-260	-260	-210	-210	V
Anode current	I_a	10,1	7,75	12,7	9,85	A
Grid current	I_g	2,0	1,3	3,0	1,9	A
Grid driving voltage, peak	V_{gp}	600	520	650	520	V
Driving power	W_{dr}	1080	610	1770	880	W
Anode input power	W_{ia}	151	116,3	153	118	kW
Anode dissipation	W_a	41	31,3	43	33	kW
Output power	W_o	110	85	110	85	kW
Efficiency	η	73	73	72	72	%

R.F. CLASS-C ANODE MODULATION

LIMITING VALUES (Absolute limits)

Frequency	f	up to	30	MHz
Anode voltage	V_a	max.	11,5	kV
Anode dissipation	W_a	max.	30	kW
Grid voltage, negative	$-V_g$	max.	1000	V
Grid dissipation	W_g	max.	1,3	kW
Anode current	I_a	max.	9	A
Grid current	I_g	max.	3,3	A

OPERATING CONDITIONS

Frequency	f	30	30	MHz
Anode voltage	V_a	11	10	kV
Grid voltage	V_g	-480	-440	V ¹⁾
Anode current	I_a	7,6	6,9	A
Grid current	I_g	3,1	3,1	A
Grid resistor	R_g	90	80	Ω
Grid driving voltage, peak	V_{gp}	880	810	V
Driving power	W_{dr}	2,7	2,4	kW
Anode input power	W_{ia}	83,6	69	kW
Anode dissipation	W_a	17,6	14	kW
Output power	W_o	66	55	kW
Efficiency	η	79	79	%
Modulation depth	m	100	100	%
Modulation power	W_{mod}	41,8	34,5	kW

¹⁾ Partially obtained by the grid resistor and grid current.

A.F. CLASS-B AMPLIFIER AND MODULATOR


LIMITING VALUES (Absolute limits)

Anode voltage	V_a	max.	12	kV
Anode dissipation	W_a	max.	45	kW
Grid voltage, negative	$-V_g$	max.	1000	V
Grid dissipation	W_g	max.	1, 3	kW
Anode current	I_a	max.	13	A
Grid current	I_g	max.	3, 3	A



OPERATING CONDITIONS (two tubes in push-pull)

Anode voltage	V_a	12	10	kV
Grid voltage	V_g	-205	-170	V
Load resistance	$R_{aa\sim}$	2720	1810	Ω
Grid driving voltage, peak	V_{ggp}	0 710	0 710	V
Anode current	I_a	2x0, 4 2x4, 75	2x0, 4 2x5, 75	A
Grid current, average	I_g	0 2x0, 45	0 2x0, 72	A
Grid current, peak	I_{gp}	0 2x2, 9	0 2x4, 0	A
Driving power	W_{dr}	0 2x150	0 2x235	W
Anode input power	W_{ia}	2x4, 0 2x57	2x4, 0 2x57, 5	kW
Anode dissipation	W_a	2x4, 0 2x18	2x4, 0 2x18, 5	kW
Output power	W_o	0 78	0 78	kW
Efficiency	η	- 68, 5	- 68	%

7Z05348-25.4.ajjj.

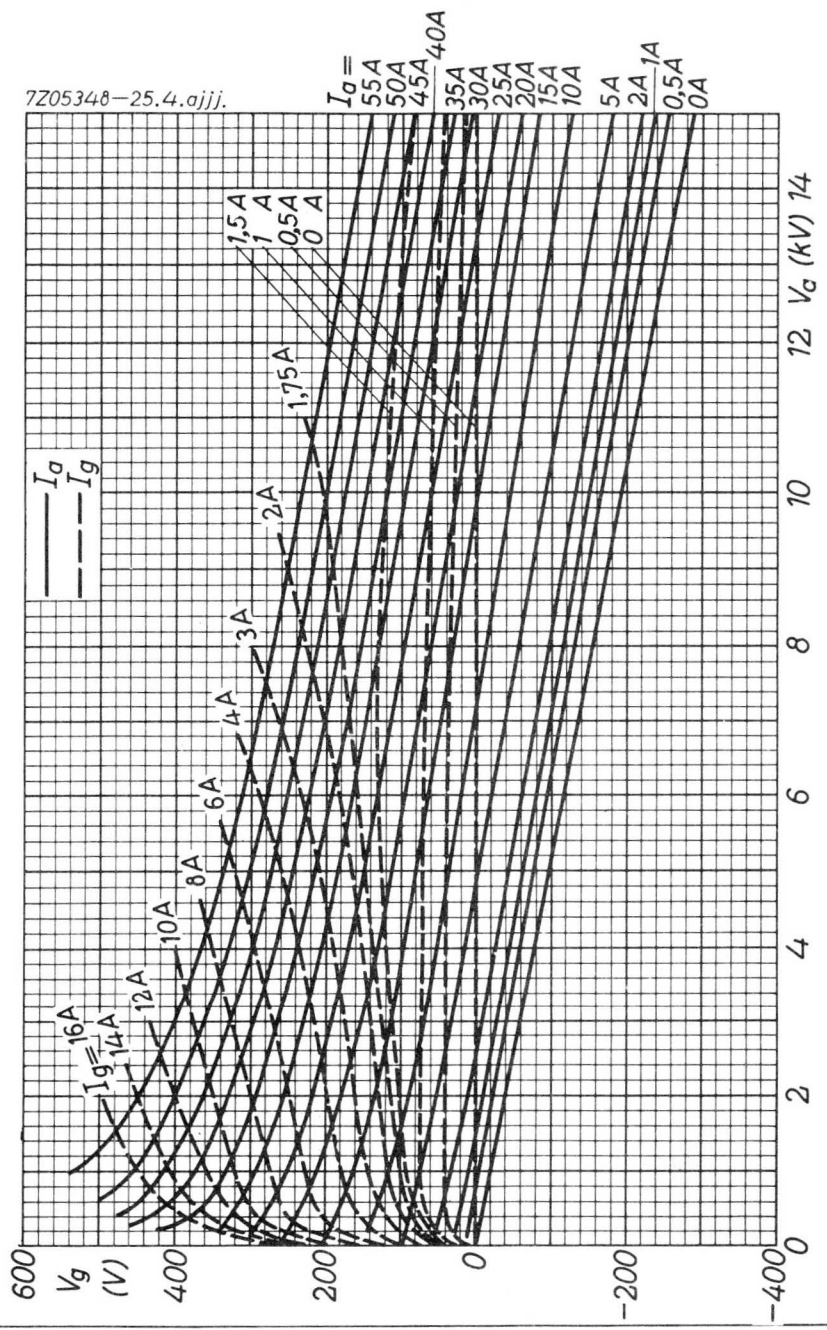


YD1001

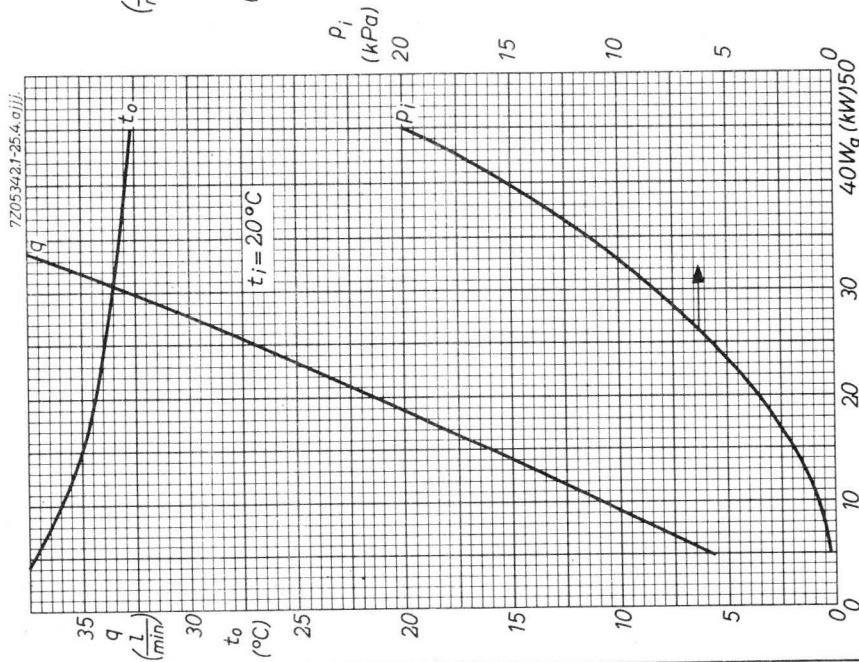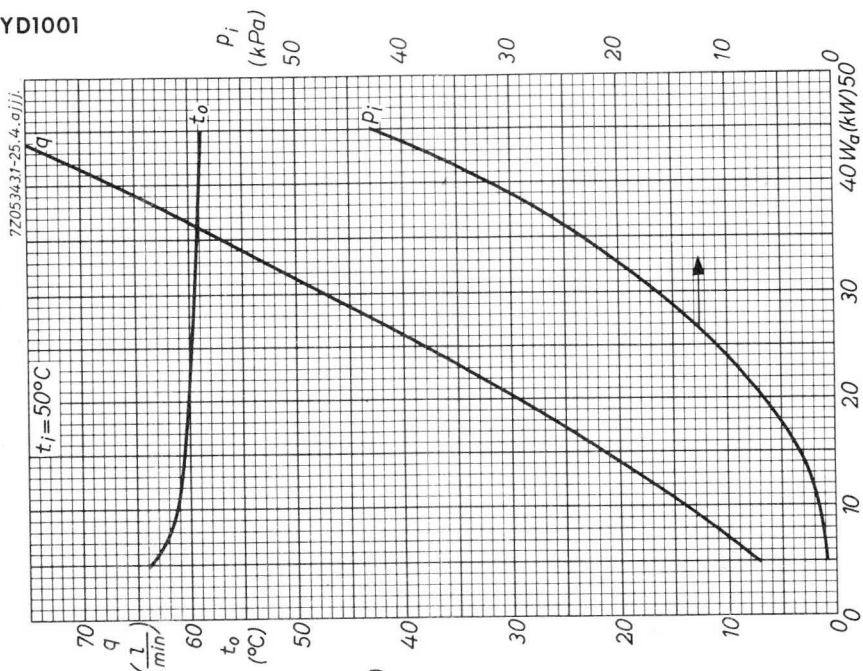

100 kPa \approx 1 at.



YD1001

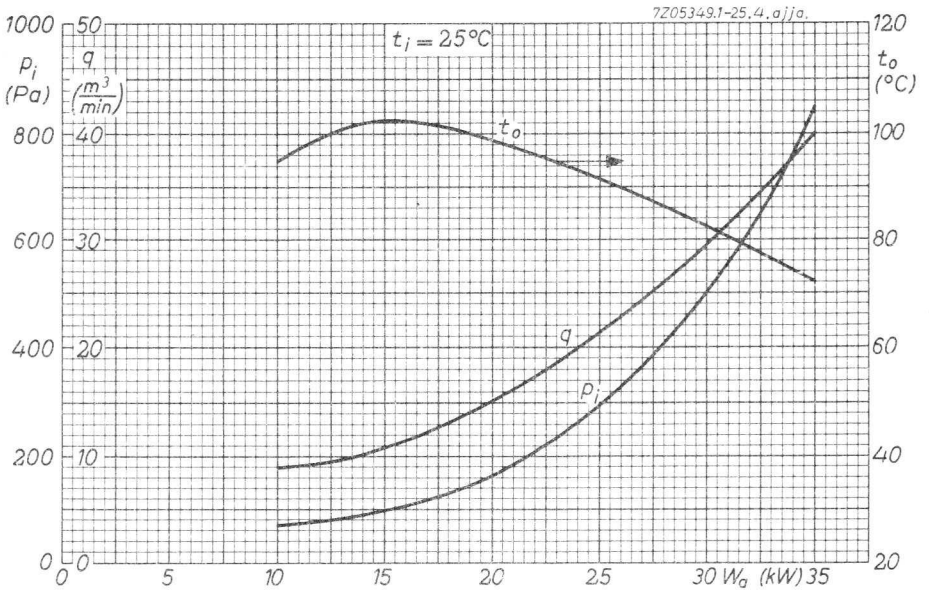

1 Pa \approx 0,1 mmH₂O.

R.F. POWER TRIODES

Power triodes in metal-glass construction intended for use as h.f. amplifier, a.f. amplifier, or oscillator at frequencies up to 30 MHz. The YD1010 is water cooled. The YD1012 is vapour cooled.

QUICK REFERENCE DATA

R.F. class-C telegraphy

Frequency	10	30	MHz
Anode voltage	15	12	kV
Output power	360	285	kW

R.F. class-C anode modulation

Frequency	30	30	30	MHz
Anode voltage	11	10	8	kV
Output power	165	135	110	kW

R.F. class-B telephony

Frequency	30	30	30	MHz
Anode voltage	10	8	6	kV
Output power	60	50	35	kW

A.F. class-B amplifier (two tubes)

Anode voltage	12	10	8	6	kV
Output power	450	400	300	200	kW

HEATING: direct by a.c. or d.c.; thoriated tungsten filament.

Filament voltage	V_f	18	V
Filament current	I_f	280	A

CAPACITANCES

Anode to filament	C_{af}	7,5	pF
Grid to filament	C_{gf}	240	pF
Anode to grid	C_{ag}	120	pF

TYPICAL CHARACTERISTICS

Anode voltage	V_a	4 kV
Anode current	I_a	5 A
Transconductance	S	130 mA/V
Amplification factor	μ	55

TEMPERATURE LIMITS

Absolute maximum bulb and seal temperature	t max	180 °C
--	-------	--------

COOLING

YD1010

W_a kW	t_i °C	q_{min} ℓ/min	P_i kPa *
10	20	12	0,3
	50	17	0,5
40	20	37	3
	50	54	7
80	20	75	12
	50	112	26
120	20	120	30
	50	179	60

For inlet temperatures between 20 °C and 50 °C the required quantity of water can be found by proportional interpolation. At frequencies higher than 10 MHz a low velocity air flow should be directed to the seals of grid and filament.

YD1012

Cooling data for anode dissipation $W_a = 180$ kW

Total dissipation to be transferred by cooling system

$(W_a + W_g + 0,8W_f)$
equivalent to

188 kW
2700 kcal/min

Volume of produced vapour

at back flow water temperature of 20 °C
at back flow water temperature of 90 °C

7,3 m³/min
8,3 m³/min

Amount of back flowing water

at back flow water temperature of 20 °C
at back flow water temperature of 90 °C

4,4 ℓ/min
5,1 ℓ/min

* 100 kPa ≈ 1 at.


MECHANICAL DATA

Dimensions in mm

YD1010

Net mass of tube: 32,5 kg

Net mass of water jacket: 40,5 kg

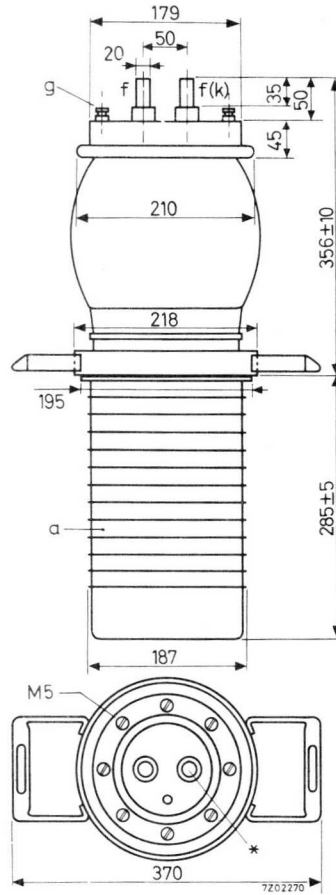

Mounting position: vertical with anode down

ACCESSORIES

Water jacket

type K723

Filament connectors with cable



type 40667

* This pin should be used for connecting the anode return lead.

YD1010
YD1012

YD1012

Net mass: 51,5 kg

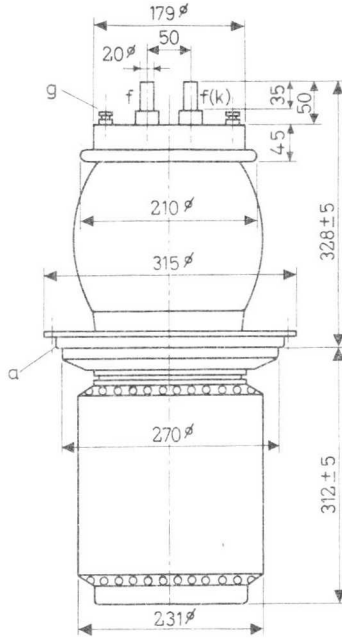

Mounting position: vertical with anode down

ACCESSORIES

Vapour cooling system

Filament connectors with cable

type K729

type 40667

* This pin should be used for connecting the anode return lead.

R.F. CLASS-C TELEGRAPHY

LIMITING VALUES (Absolute maximum rating system)

Frequency	f	up to	10	up to	30 MHz
Anode voltage	V_a	max	15		12 kV
Anode dissipation YD1010	W_a	max	120		120 kW
Anode dissipation YD1012	W_a	max	180		180 kW
Grid voltage	$-V_g$	max	1200		1200 V
Grid dissipation	W_g	max	4		4 kW
Anode current	I_a	max	33		33 A
Grid current	I_g	max	8		8 A

OPERATING CONDITIONS

Frequency	f	10	10	30	30 MHz
Anode voltage	V_a	15	15	12	12 kV
Grid voltage	V_g	-520	-800	-480	-720 V
Anode current	I_a	29,3	24,7	29,3	24,7 A
Grid current	I_g	5,4	5,2	5,9	5,5 A
Peak driving voltage	V_{gp}	1090	1370	1050	1290 V
Driving power	W_{dr}	5,5	6,6	5,7	6,6 kW
Anode input power	W_{ia}	440	371	353	296 kW
Anode dissipation	W_a	80	61	68	51 kW
Output power	W_o	360	310	285	245 kW
Efficiency	η	81,8	83,5	80,8	82,6 %

R.F. CLASS-C ANODE MODULATION

LIMITING VALUES (Absolute maximum rating system)

Frequency	f	up to	30 MHz
Anode voltage	V_a	max	11 kV
Anode dissipation YD1010	W_a	max	80 kW
Anode dissipation YD1012	W_a	max	120 kW
Grid voltage	$-V_g$	max	1000 V
Grid dissipation	W_g	max	4 kW
Anode current	I_a	max	22 A
Grid current	I_g	max	8 A

OPERATING CONDITIONS

Frequency	f	30	30	30 MHz
Anode voltage	V_a	11	10	8 kV
Grid voltage	V_g	-170	-140	-100 V
Grid resistor	R_g	40	44	33 Ω
Anode current	I_a	19	17,3	18 A
Grid current	I_g	7,4	6,9	7,6 A
Peak driving voltage	V_{gp}	1000	930	855 V
Driving power	W_{dr}	7,1	6	6 kW
Anode input power	W_{ia}	209	173	144 kW
Anode dissipation	W_a	44	38	34 kW
Output power	W_o	165	135	110 kW
Efficiency	η	79	78	76,5 %
Modulation depth	m	100	100	100 %
Modulation power	W_{mod}	105	87	72 kW

R.F. CLASS-B TELEPHONY

LIMITING VALUES (Absolute maximum rating system)

Frequency	f	up to	10	up to	30 MHz
Anode voltage	V_a	max	15		12 kV
Anode dissipation YD1010	W_a	max	120		120 kW
Anode dissipation YD1012	W_a	max	180		180 kW
Grid voltage	$-V_g$	max	800		800 V
Grid dissipation	W_g	max	4		4 kW
Anode current	I_a	max	27		27 A
Grid current	I_g	max	8		8 A

OPERATING CONDITIONS

Frequency	f	30	30	30 MHz
Anode voltage	V_a	10	8	6 kV
Grid voltage	V_g	-150	-115	-82 V
Anode current	I_a	17	18,2	17,9 A
Grid current	I_g	0,8	1,2	1,5 A
Peak driving voltage	V_{gp}	338	338	321 V
Driving power	W_{dr}	0,25	0,36	0,43 kW
Anode input power	W_{ia}	170	146	108 kW
Anode dissipation	W_a	110	96	73 kW
Output power	W_o	60	50	35 kW
Efficiency	η	35,3	34,3	32,6 %
Modulation depth	m	100	100	100 %
Grid current	I_g	5,9	6,8	7,2 A
Driving power	W_{dr}	3,6	4,1	4,1 kW

A.F. CLASS-B AMPLIFIER


LIMITING VALUES (Absolute maximum rating system)

Anode voltage	V_a	max	12	kV
Anode dissipation YD1010	W_a	max	120	kW
Anode dissipation YD1012	W_a	max	180	kW
Grid voltage	$-V_g$	max	800	V
Grid dissipation	W_g	max	4	kW
Anode current	I_a	max	33	A
Grid current	I_g	max	8	A

OPERATING CONDITIONS, two tubes in push-pull

Anode voltage	V_a	12	10	kV
Grid voltage	V_g	-180	-150	V
Load resistance	$R_{aa\sim}$	552	410	Ω
Peak driving voltage	V_{ggp}	0 1210	0 1205	V
Anode current	I_a	2 x 2 2 x 26	2 x 1,8 2 x 28	A
Grid current	I_g	0 2 x 4,4	0 2 x 4,8	A
Peak grid current	I_{gp}	0 2 x 23	0 2 x 24	A
Driving power	W_{dr}	0 2 x 2,4	0 2 x 2,6	kW
Anode input power	W_{ia}	2 x 24 2 x 312	2 x 18 2 x 280	kW
Anode dissipation	W_a	2 x 24 2 x 87	2 x 18 2 x 80	kW
Output power	W_o	0 450	0 400	kW
Efficiency	η	- 72	- 71,4	%
Anode voltage	V_a	8	6	kV
Grid voltage	V_g	-115	-82	V
Load resistance	$R_{aa\sim}$	338	268	Ω
Peak driving voltage	V_{ggp}	0 1110	0 990	V
Anode current	I_a	2 x 1,6 2 x 27	2 x 1,4 2 x 25	A
Grid current	I_g	0 2 x 5	0 2 x 4,9	A
Peak grid current	I_{gp}	0 2 x 24	0 2 x 22	A
Driving power	W_{dr}	0 2 x 2,5	0 2 x 2,2	kW
Anode input power	W_{ia}	2 x 12,8 2 x 216	2 x 8,4 2 x 150	kW
Anode dissipation	W_a	2 x 12,8 2 x 66	2 x 8,4 2 x 50	kW
Output power	W_o	0 300	0 200	kW
Efficiency	η	- 69,5	- 67	%

7Z05640-25.4 a₁a₂

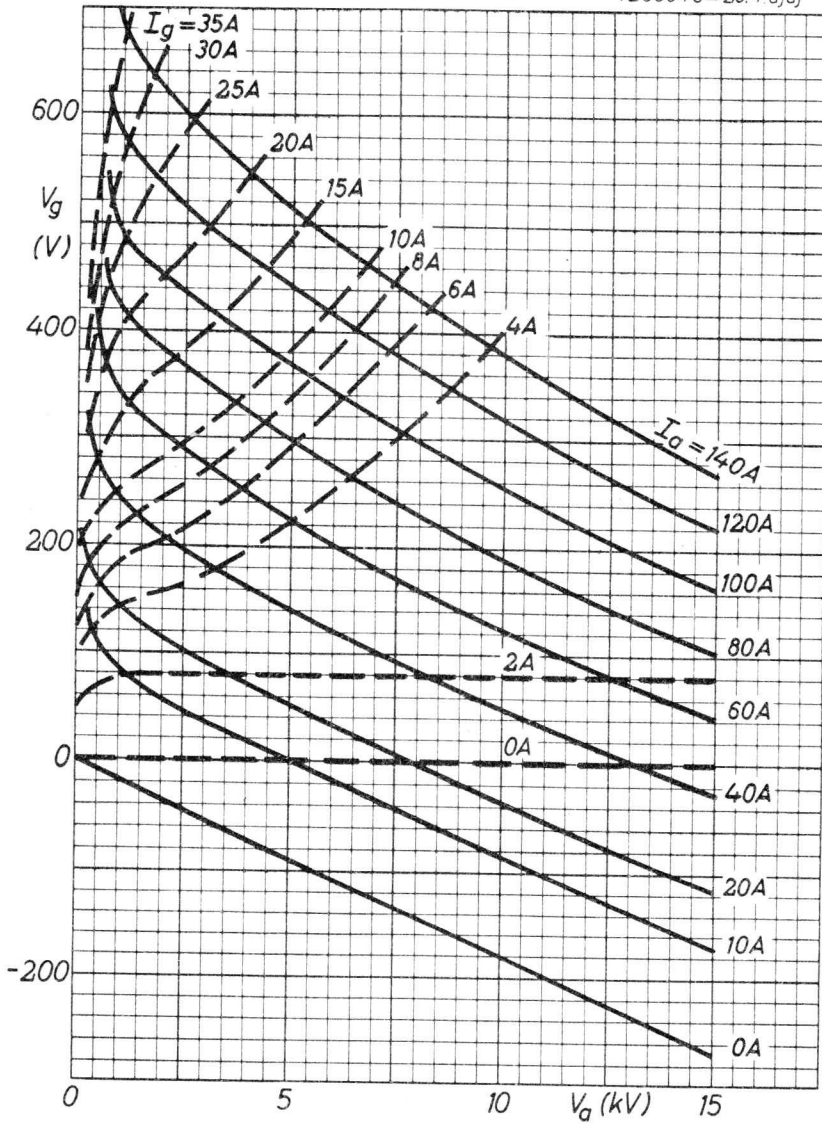

R.F. POWER TRIODE

R.F. zero bias power triode intended for use as linear S.S.B. amplifier and A.F. class B amplifier

QUICK REFERENCE DATA				
Class B SSB			B mod. Two tubes	
Frequency (MHz)	V_a (V)	W_{load} (PEP) (W)	V_a (V)	W_o (W)
30	2500	580	3000	1310

HEATING: direct by A.C. or D.C.; filament thoriated tungsten

Filament voltage $V_f = 5.0$ V

Filament current $I_f = 14.1$ A

CAPACITANCES

Anode to filament $C_{af} = 0.033$ pF

Grid to filament $C_{gf} = 8.0$ pF

Anode to grid $C_{ag} = 5.0$ pF

TYPICAL CHARACTERISTICS

Anode voltage $V_a = 5$ kV

Anode current $I_a = 80$ mA

Mutual conductance $S = 11$ mA/V

Amplification factor $\mu = 350$

TEMPERATURE LIMITS (Absolute limits)

Anode seal temperature $t = \text{max. } 220$ °C

Pin seal temperature $t = \text{max. } 180$ °C

Bulb temperature $t = \text{max. } 350$ °C




COOLING

Radiation and low velocity air flow

MECHANICAL DATA

Net weight: 210 g

Base : Giant 5p.

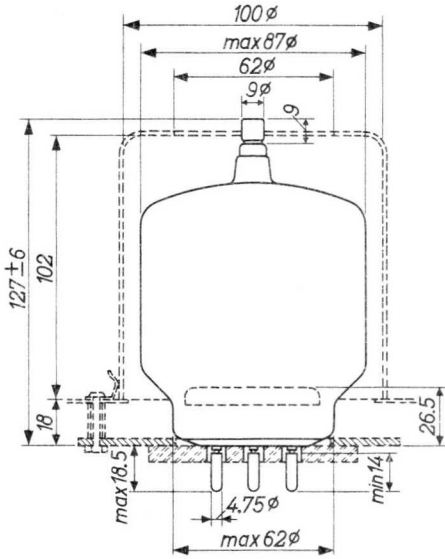

Mounting suggestion of tube with chimney

Dimensions in mm

Mounting position: vertical with base up or down

In order to prevent overheating of the grid pins by high-frequency current it is recommended to include the three grid socket connections in the circuit.

ACCESSORIES

Anode connector	40624
Socket	2422 512 01001
Chimney	40666

R. F. CLASS B LINEAR POWER AMPLIFIER SINGLE SIDE BAND

suppressed carrier, zero bias, grounded grid

LIMITING VALUES (Absolute limits)

Frequency	f	up to	110	MHz
Anode voltage	V_a	=	max. 3000	V
Anode input power	W_{i_a}	=	max. 1200	W
Anode dissipation	W_a	=	max. 400	W
Anode current	I_a	=	max. 400	mA
Grid dissipation	W_g	=	max. 20	W

OPERATING CHARACTERISTICS

Frequency	f	=	30	MHz		
Anode voltage	V_a	=	2500	V		
Grid voltage	V_g	=	0	V		
			zero signal	single tone signal	double tone signal	
Peak cathode driving voltage	V_{k_p}	=	0	91	91	V
Anode current	I_a	=	72	400	270	mA
Grid current	I_g	=	-	140	80	mA
Driver output power	W_{dr}	=	-	35	35 (PEP)	W
Anode input power	W_{i_a}	=	180	1000	675	W
Anode dissipation	W_a	=	180	385	368	W
Output power	W_o	=	0	640 ¹⁾	640 (PEP) ²⁾	W
Output power in load	W_{load}	=	0	580	580 (PEP)	W ³⁾
Overall efficiency	η	=	-	58	43	%
Intermodulation distortion						
of the 3rd order	d_3	=	-	-	-29	dB ⁴⁾
of the 5th order	d_5	=	-	-	-34	dB ⁴⁾

1) Inclusive 25 W feedthrough power

2) Inclusive 25 W peak envelope feedthrough power

3) Measured in a circuit having an efficiency of 91 %

4) Maximum distortion level encountered at any driving level up to full drive, referred to the amplitude of either of the two tones in a double tone test signal at full drive.

A.F. CLASS B AMPLIFIER AND MODULATOR


LIMITING VALUES (Absolute limits)


Anode voltage	V_a	=	max. 3000	V
Anode input power	W_{i_a}	=	max. 1200	W
Anode dissipation	W_a	=	max. 400	W
Anode current	I_a	=	max. 400	mA
Grid dissipation	W_g	=	max. 20	W

OPERATING CONDITIONS Class B, two tubes in push-pull

Anode voltage	V_a	=	3000	V
Load resistance	$R_{aa\sim}$	=	9500	Ω
Peak grid driving voltage	V_{ggp}	=	0	176 V
Anode current	I_a	=	2x90	2x333 mA
Grid current	I_g	=	0	2x120 mA
Driving power	W_{dr}	=	0	26 W
Anode input power	W_{i_a}	=	2x270	2x1000 W
Anode dissipation	W_a	=	2x270	2x345 W
Output power	W_o	=	0	1310 W
Efficiency	η	=	-	65 %

7Z06416-25.4.aacj.

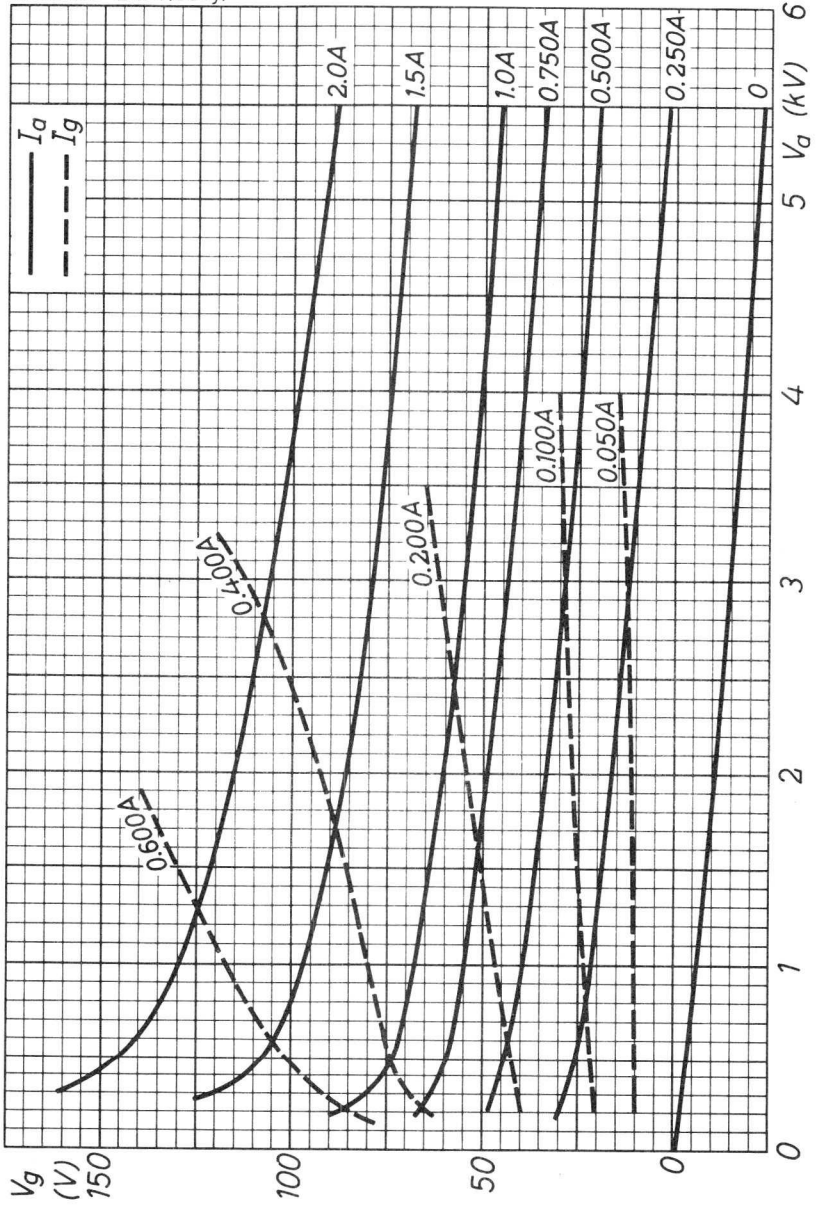

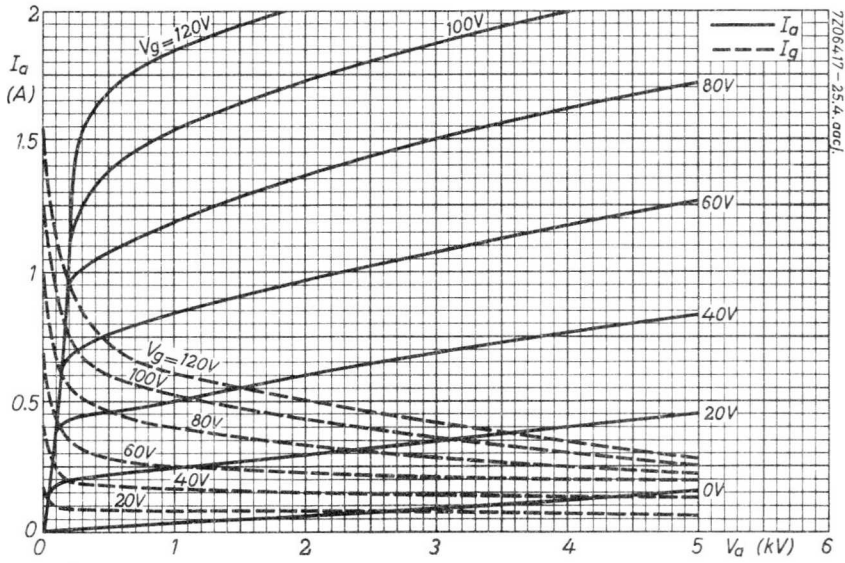

R.F. POWER TRIODES

Power triodes in metal-glass construction intended for use as h.f. amplifier, a.f. amplifier, or oscillator at frequencies up to 30 MHz. The YD1140 is water cooled. The YD1141 is air cooled.

QUICK REFERENCE DATA

R.F. Class-C telegraphy

Frequency	f	30	30	MHz
Anode voltage	V_a	12	10	kV
Output power	W_o	108	75	kW

R.F. Class-C anode modulation

Frequency	f	30	30	MHz
Anode voltage	V_a	10	10	kV
Output power	W_o	83	58	kW

R.F. Class-C oscillator for industrial use

Frequency	f	30	30	30	MHz
Anode voltage	V_a	12	10	10	kV
Output power	W_o	124	108	75	kW

A.F. Class-B amplifier (two tubes)

Anode voltage	V_a	10	10	kV
Output power	W_o	106	64	kW

HEATING: direct; thoriated tungsten filament

Filament voltage	V_f	17,5	V
Filament current	I_f	196	A
Peak filament starting current	I_{fp}	max 420	A
Cold filament resistance	R_{fo}	12	m Ω

CAPACITANCES

Anode to all except grid	$C_{a(g)}$	2,2	pF
Grid to all except anode	$C_{g(a)}$	122	pF
Anode to grid	C_{ag}	75	pF

TYPICAL CHARACTERISTICS

Anode voltage	V_a	3	10	kV
Anode current	I_a	50	5	A
Transconductance	S	140	60	mA/V
Amplification factor		25	25	

TEMPERATURE LIMITS

Absolute maximum bulb and seal temperature t max 180 °C

COOLING

YD1140

W_a kW	t_i °C	q_{min} ℓ/min	P_i kPa *
30	20	25	15
	50	45	45
50	20	32	25
	50	65	85
100	20	55	60
	50	120	300

At water inlet temperatures between 20 and 50 °C the required quantity of water can be found by linear interpolation.

At frequencies below 6 MHz forced air cooling of the seals will, as a rule, not be necessary. Above 6 MHz air cooling must be used to keep the anode and grid seal temperatures below 180 °C. The seals can be cooled by connecting a blower of suitable size to the air inlet of the anti-corona ring, attached to the tube. At maximum frequency (30 MHz) and published operating conditions, an air flow of 2,5 m³/min with a pressure loss of about 5 kPa will in general be sufficient. The air flow must be started upon or before the application of filament voltage.

When using the special filament connectors type 40628, together with connecting leads of adequate cross-section, additional air cooling of the filament terminals is, as a rule, not necessary.

Care should be taken to ensure firm contact of the filament terminals in order to obtain equal distribution of current over these terminals.

* 100 kPa ≈ 1 at.

YD1141

W_a kW	h m	t_j °C	q_{min} m^3/min	p_i Pa*
30	0	35	35	1140
	0	45	40	1430
	1500	35	42	1360
	3000	25	44	1320
45	0	35	54	2750
	0	45	62,5	3350
	1500	35	64,5	3220
	3000	25	68	3190

When the tube is used at frequencies above 6 MHz special attention must be paid to the anode and grid seal temperatures. For frequencies below 20 MHz cooling of these seals can be effected by air flowing through the slots at the top of the cooler. In certain cases, e.g. at low dissipation and cooling with the minimum quantity of air, the air flow to the seals will not be sufficient to maintain the seal temperatures below 180 °C. In these cases, and also if it is preferred to close the slots, cooling of the seals should be effected by a separate air flow to the seals.

When using the filament connectors type 40628, together with connecting leads of adequate cross-section, additional air cooling of the filament terminals is, as a rule, not necessary.

Care should be taken to ensure firm contact of the filament terminals in order to obtain equal distribution of current over these terminals.

* 1 Pa \approx 0,1 mm H₂O.


YD1140
YD1141

MECHANICAL DATA

Dimensions in mm

YD1140

Net mass: 13,5 kg

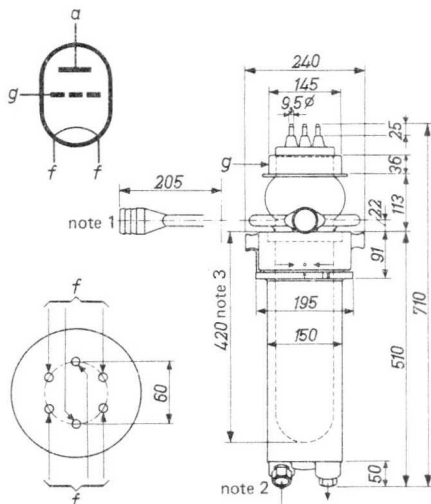

Mounting position: vertical with anode down

When connecting the filament the three pins of each group must be joined.

ACCESSORIES

Water jacket type K714 mass 20,5 kg

Filament connectors type 40628


O-ring cat. no. 2622 080 30916

Notes

1. Use connecting hose with an inner diameter of $1\frac{3}{4}$ ".
2. Coupling for metal tubing with an outer diameter of 28 mm.
3. To remove the tube from its water-jacket, the free height above the tube must be at least 420 mm.

YD1141

Net mass: 26 kg

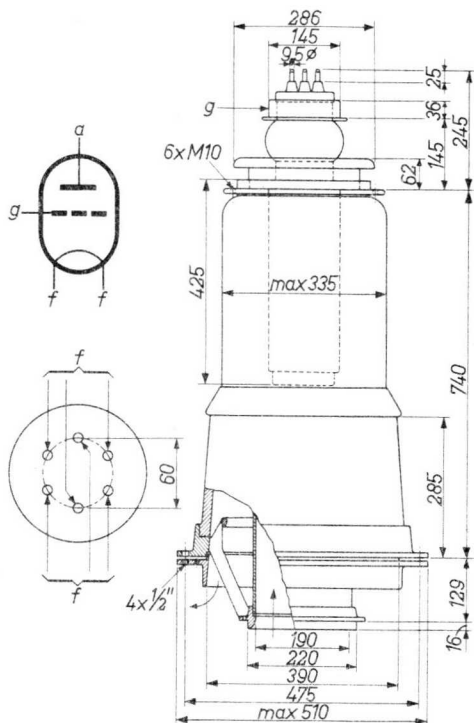

Tube mounted in cooler housing type K506.

Mounting position: vertical with anode down

When connecting the filament the three pins of each group must be joined.

ACCESSORIES

Cooler housing type K506 mass 72 kg

Filament connectors type 40628

R.F. CLASS-C TELEGRAPHY

LIMITING VALUES (Absolute maximum rating system)

Frequency	f	up to	4	15	30 MHz
Anode voltage	V_a	max	15	13,5	12,5 kV
Anode current	I_a	max	12,5	12,5	12,5 A
Anode input power	W_{ia}	max	165	165	150 kW
Anode dissipation YD1140	W_a	max	100	100	100 kW
Anode dissipation YD1141	W_a	max	45	45	45 kW
Grid voltage	$-V_g$	max	1200	1200	1200 V
Grid current	I_g	max	1,2	1,2	1,2 A

OPERATING CONDITIONS

Frequency	f		30	30 MHz
Anode voltage	V_a		12	10 kV
Grid voltage	V_g		-1000	-800 V
Peak grid driving voltage	V_{gp}		1500	1200 V
Anode current	I_a		12	10 A
Grid current	I_g		0,75	0,75 A
Anode input power	W_{ia}		144	144 kW
Anode dissipation	W_a		36	25 kW
Driving power	W_{dr}		1100	850 W
Output power	W_o		108	75 kW
Efficiency	η		75	75 %

R.F. CLASS-C ANODE MODULATION

LIMITING VALUES (Absolute maximum rating system)

Frequency	f	up to	30 MHz
Anode voltage	V_a	max	10,5 kV
Anode current	I_a	max	10,5 A
Anode input power	W_{ia}	max	110 kW
Anode dissipation YD1140	W_a	max	66 kW
Anode dissipation YD1141	W_a	max	30 kW
Grid voltage	$-V_g$	max	1200 V
Grid current	I_g	max	1,3 A

OPERATING CONDITIONS

Frequency	f	30	30 MHz
Anode voltage	V_a	10	10 kV
Grid voltage	V_g	-1050	-1050 V *
Peak grid driving voltage	V_{gn}	1550	1450 V
Anode current	I_a	10,5	7,4 A
Grid current	I_g	1,1	0,8 A
Anode input power	W_{ia}	105	74 kW
Anode dissipation	W_a	22	16 kW
Driving power	W_{dr}	1650	1100 W
Output power	W_o	83	58 kW
Efficiency	η	79	79 %
<hr/>			
Modulation depth	m	100	100 %
Modulation power	W_{mod}	53	37 kW

* Grid bias partly obtained by a grid resistor.

R.F. CLASS-C OSCILLATOR FOR INDUSTRIAL USE

Anode voltage from a three-phase rectifier without filter

LIMITING VALUES(Absolute maximum rating system)

Frequency	f	up to	30 MHz
Anode voltage	V_a	max	13 kV
Anode current	I_a	max	15 A
Anode input power	W_{ia}	max	180 kW
Anode dissipation YD1140	W_a	max	100 kW
Anode dissipation YD1141	W_a	max	45 kW
Grid voltage	$-V_g$	max	1600 V
Grid current, loaded	I_g	max	1,0 A
Grid current, unloaded	I_g	max	1,4 A
Grid circuit resistance	R_g	max	10 k Ω

OPERATING CONDITIONS

Frequency	f	30	30	30 MHz
Anode voltage	V_a	12	12	10 kV
Anode current	I_a	14	12	10 A
Grid current	I_g	0,9	0,75	0,75 A
Grid circuit resistance	R_g	1100	1350	1100 Ω
Feedback ratio	$V_{g\sim}/V_{a\sim}$	15	14	14 %
Anode input power	W_{ia}	168	144	100 kW
Anode dissipation	W_a	44	36	25 kW
Output power	W_o	124	108	75 kW
Efficiency	η	74	75	75 %
Output power in the load	W_l	104	91	63 kW*

* Useful power in the load measured in a circuit having an efficiency of 85%.

A.F. CLASS-B AMPLIFIER

LIMITING VALUES (Absolute maximum rating system)


Anode voltage	V_a	max	15	kV
Anode current	I_a	max	12	A
Anode input power	W_{ia}	max	162	kW
Anode dissipation YD1140	W_a	max	100	kW
Anode dissipation YD1141	W_a	max	45	kW
Grid voltage	$-V_g$	max	1200	V
Grid current	I_g	max	1,2	A

OPERATING CONDITIONS, two tubes in push-pull

Anode voltage	V_a	10	10	kV		
Grid voltage	V_g	-540	-540	V*		
Load resistance	R_{aa}	1360	1440	Ω		
Driving voltage	V_{gpp}	0	1550	0	1300	V
Anode current	I_a	2 x 0,3	2 x 8	2 x 0,3	2 x 5,8	A
Grid current	I_g	0	2 x 0,2	0	2 x 0,15	A
Anode input power	W_{ia}	2 x 3	2 x 80	2 x 3	2 x 58	kW
Anode dissipation	W_a	2 x 3	2 x 27	2 x 3	2 x 26	kW
Driving power	W_{dr}	0	2 x 150	0	2 x 100	W
Output power	W_o	0	106	0	64	kW
Efficiency	η	-	67	-	56	%

* To be adjusted for a zero signal anode current of 0,3 A.

7Z02388-.25.4.oadj.

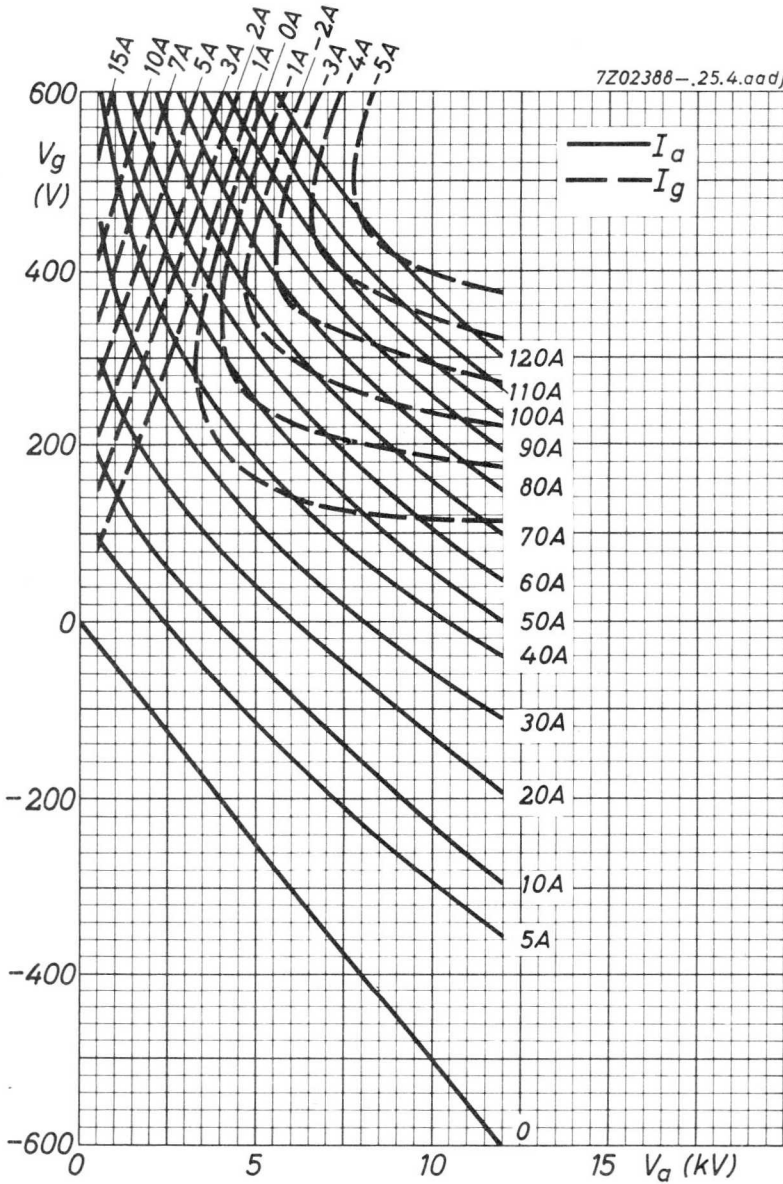

INDUSTRIAL R.F. TRIODE

Triodes in metal-ceramic construction, intended for use as industrial oscillators. The YD1150 is forced-air cooled, with integral cooler. The YD1151 is water cooled by means of a separate jacket. The YD1152 has an integral helical water cooler.

QUICK REFERENCE DATA

Oscillator output power ($W_o - W_{\text{feedb}}$), typical	W_{osc}	4,75	kW
Frequency for full ratings	f	max.	85 MHz

To be read in conjunction with "General Operational Recommendations Transmitting Tubes for Communication, Tubes for R.F. Heating".

R.F. CLASS-C OSCILLATOR FOR INDUSTRIAL USE OPERATING CONDITIONS

Frequency	f	160	27, 12	27, 12	MHz
Filament voltage	V_f	6, 0	6, 3	6, 3	V
Oscillator output power ($W_o - W_{\text{feedb}}$)	W_{osc}	3, 75	4, 75	3, 85	kW
Anode voltage	V_a	5	6	5	kV
Anode current	I_a	1	1	1	A
Anode input power	W_{ia}	5	6	5	kW
Anode dissipation	W_a	1, 03	1, 0	0, 93	kW
Anode output power	W_o	3, 97	5, 0	4, 07	kW
Anode efficiency	η_a	79, 4	83, 3	81, 4	%
Oscillator efficiency	η_{osc}	75, 0	79, 1	77, 0	%
Feedback ratio	V_{gp}/V_{ap}	17	17	17	%
Grid resistor	R_g	2, 0	2, 5	2, 0	k Ω
Grid current, on load	I_g	260	250	260	mA
Grid voltage, negative	$-V_g$	520	625	520	V
Grid dissipation	W_g	80	90	80	W
Grid resistor dissipation	W_{Rg}	135	156	135	W

LIMITING VALUES (Absolute max. rating system)

Frequency	f	up to	85	160	MHz
Anode voltage	V_a	max.	7,2	6,0	kV
Anode current	I_a	max.	1,1	1,1	A
Anode input power	W_{ia}	max.	6,5	6,0	kW
Anode dissipation	W_a	max.	2,5	2,5	kW
Grid voltage	$-V_g$	max.	1	1	kV
Grid current, on load	I_g	max.	280	280	mA
off load	I_g	max.	400	400	mA
Grid dissipation	W_g	max.	150	150	W
Grid circuit resistance	R_g	max.	20	20	k Ω
Cathode current, mean	I_k	max.	1,4	1,4	A
peak	I_{kp}	max.	7,5	7,5	A
Envelope temperature	t_{env}	max.		240	$^{\circ}\text{C}$

HEATING: direct; thoriated tungsten filament

Filament voltage (< 120 MHz)	V_f		6,3	V
(> 120 MHz)	V_f		6,0	V
Filament current at $V_f = 6,3$ V	I_f		33	A

The filament is designed to accept temporary fluctuations of +5% and -10%.

It is extremely important that the filament be properly decoupled. This should be so done that the resonance of the circuit formed by the filament and decoupling elements remains below the fundamental oscillator frequency. In grounded-grid circuits this resonance should be below the grid-cathode resonance. For further information please see Application Book "Tubes for R.F. heating" or contact the manufacturer.

CAPACITANCES

Anode to filament	C_{af}		0,4	pF
Grid to filament	C_{gf}		17	pF
Anode to grid	C_{ag}		14	pF

CHARACTERISTICS measured at $V_a = 2,0$ kV, $I_a = 0,5$ A

Transconductance	S		10	mA/V
Amplification factor	μ		20	

COOLING

See also cooling curves.

To obtain optimum life, the temperature of the seals and of the envelope should, under normal operating conditions, be kept below 200 °C.

YD1150

With insulating pedestal type 40630

Anode + grid dissipation $W_a + W_g$ (kW)	Altitude h (m)	Inlet temperature t_i (°C)	Rate of flow q_{min} (m ³ /min)	Pressure drop P_i (Pa *)	Outlet temperature t_o (°C)
1	0	35	1, 25	32	83
	0	45	1, 9	50	78
3	0	35	5, 7	170	64
	0	45	6, 1	184	73

YD1151

With jacket K713

Anode + grid dissipation $W_a + W_g$ (kW)	Inlet temperature t_i (°C)	Rate of flow q_{min} (ℓ/min)	Pressure drop P_i (kPa *)
1	20	2, 5	11
	50	3, 0	12
3	20	3, 0	14
	50	6, 8	38

Absolute max. water inlet temperature t_i max. 50 °C

A low velocity air flow may be required for cooling of the seals at frequencies above 4 MHz.

*) 1 Pa ≈ 0,1 mm H₂O ; 100k Pa ≈ 1 at.

YD1152

Anode + grid dissipation $W_a + W_g$ (kW)	Inlet temperature t_i (°C)	Rate of flow q_{min} (l/min)	Pressure drop P_i (kPa *)
1	20	0,9	5
	50	1,4	6
3	20	2,2	14
	50	4,1	27

Absolute max. water inlet temperature t_i max. 50 °C

Absolute max. water pressure p max. 600 kPa (abs)

A low-velocity air flow may be required for cooling of the seals at frequencies above 4 MHz.

ACCESSORIES

Filament connector		type 40688
Filament/cathode connector		type 40689
Grid connector	$f \leq 30$ MHz	type 40686
	$f > 30$ MHz	type 40687
Insulating pedestal (YD1150 only)		type 40630 net mass 2,1 kg
Water jacket (YD1151 only)		type K713 net mass 0,52 kg
Gasket (YD1151 only)		code 3322 026 82801

*) 100 kPa \approx 1 at.



MECHANICAL DATA

Dimensions in mm

YD1150

Mounting position: vertical with anode up or down

Net mass : 3 kg

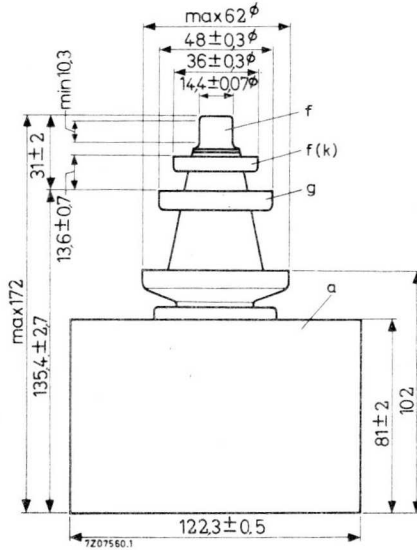


YD1150
YD1151
YD1152

YD1151

Mounting position: vertical with anode down


Net mass : 0,65 kg

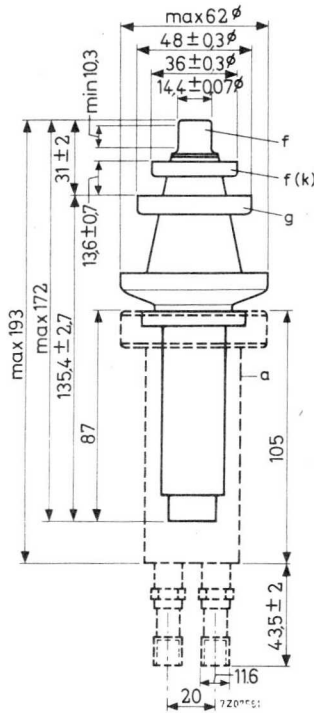


YD1152

Mounting position: vertical with anode down



Net mass : 0,85 kg

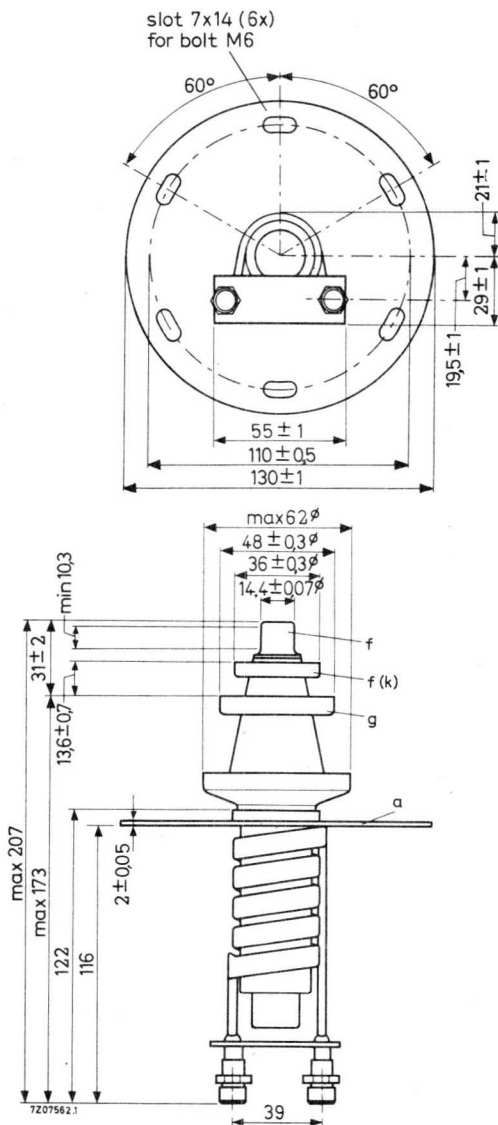


Thread of water connections BSP $\frac{1}{4}$ in.

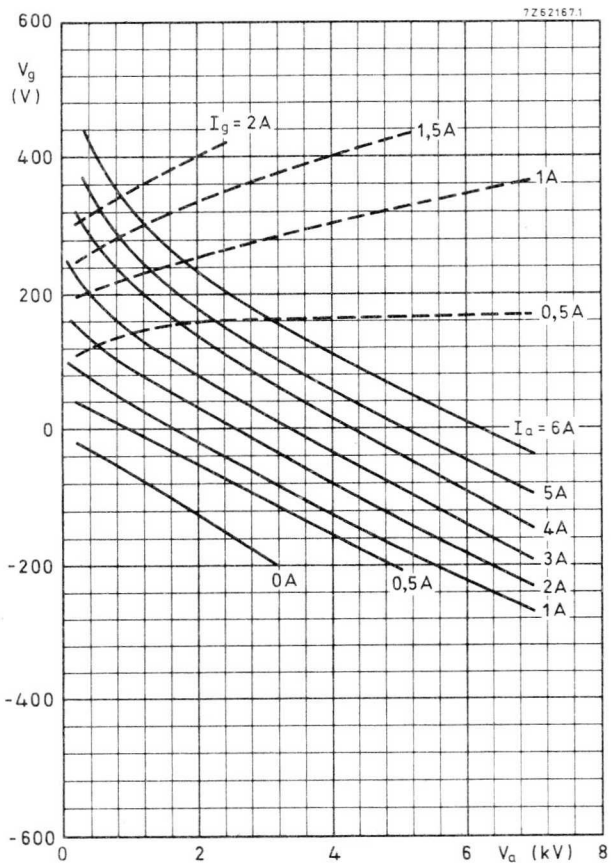


YD1150

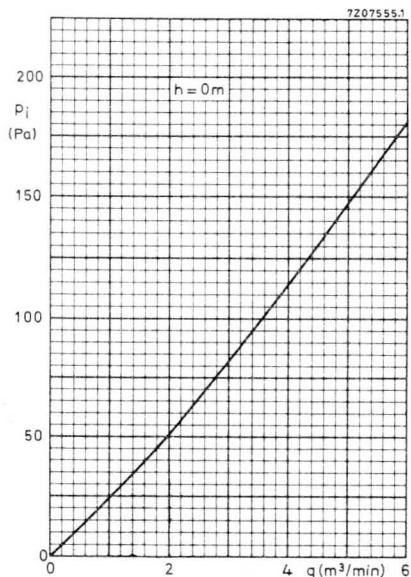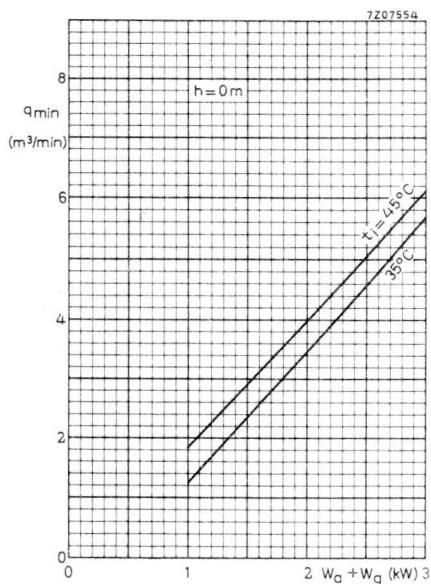

YD1151


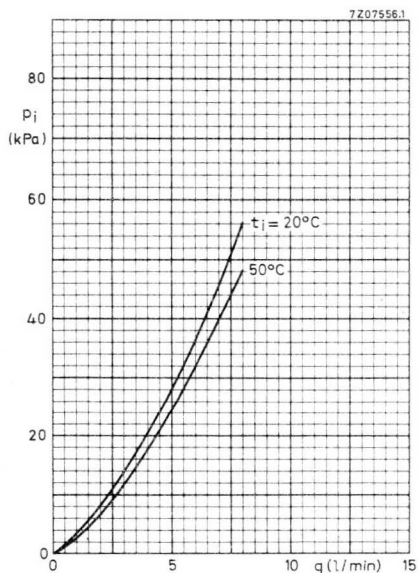


1 Pa \approx 0,1 mm H₂O; 100 kPa \approx 1 at.

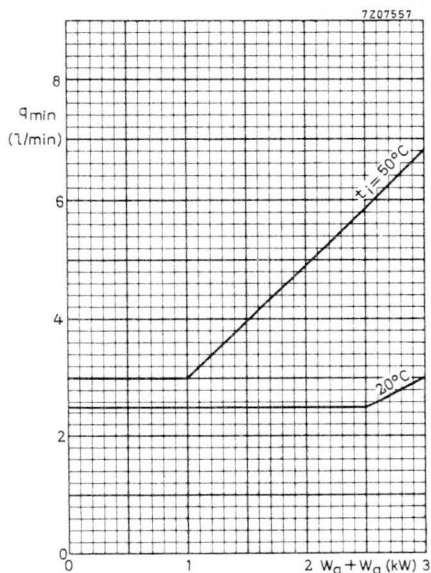

YD1150
YD1151
YD1152

YD1152

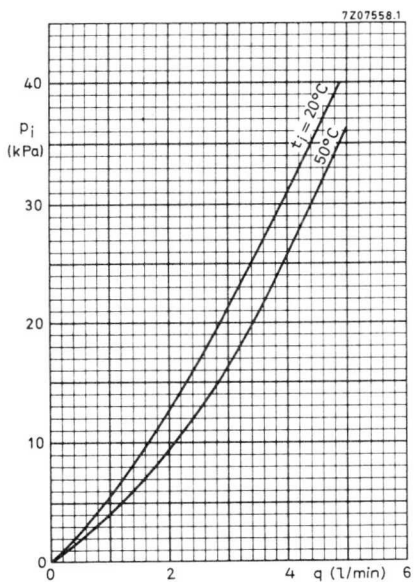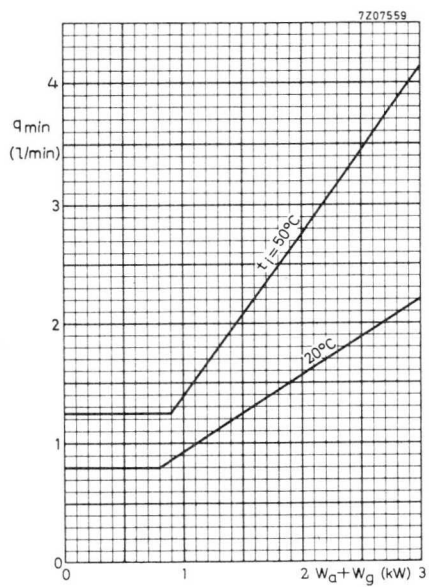

100 kPa \approx 1 at.

INDUSTRIAL R.F. TRIODE

Triodes in metal-ceramic construction intended for use as industrial oscillators. The YD1160 is forced-air cooled, with integral cooler. The YD1161 is water cooled by means of a separate jacket. The YD1162 has an integral helical water cooler.

QUICK REFERENCE DATA

Oscillator output power ($W_o - W_{feedb}$), typical	W_{osc}	8,8	kW
Frequency for full ratings	f	max.	85 MHz

To be read in conjunction with "General Operational Recommendations Transmitting Tubes for Communication, Tubes for R.F. Heating"

R.F. CLASS C OSCILLATOR FOR INDUSTRIAL USE

OPERATING CONDITIONS

Frequency	f	150	27, 12	27, 12	MHz
Filament voltage	V_f	5, 8	6, 3	6, 3	V
Oscillator output power ($W_o - W_{feedb}$)	W_{osc}	7, 15	8, 8	7, 5	kW
Anode voltage	V_a	5, 0	6, 5	6, 0	kV
Anode current	I_a	2, 0	1, 8	1, 6	A
Anode input power	W_{ia}	10, 0	11, 7	9, 6	kW
Anode dissipation	W_a	2, 45	2, 5	1, 7	kW
Anode output power	W_o	7, 55	9, 2	7, 9	kW
Anode efficiency	η_a	75, 5	78, 6	82, 3	%
Oscillator efficiency	η_{osc}	71, 5	75, 2	78, 1	%
Feedback ratio	V_{gp}/V_{ap}	15	16	15	%
Grid resistor	R_g	1, 0	1, 6	1, 3	k Ω
Grid current, on load	I_g	480	430	480	mA
Grid voltage, negative	$-V_g$	480	688	624	V
Grid dissipation	W_g	100	110	120	W
Grid resistor dissipation	W_{Rg}	230	296	300	W

LIMITING VALUES (Absolute max. rating system)

Frequency	f	up to	85	150	MHz
Anode voltage	V_a	max.	7, 2	6, 0	kV
Anode current	I_a	max.	2, 2	2, 2	A
Anode input power	W_{ia}	max.	12, 5	11	kW
Anode dissipation	W_a	max.	5	5	kW
Grid voltage	$-V_g$	max.	1	1	kV
Grid current, on load off load	I_g	max.	550	550	mA
	I_g	max.	750	750	mA
Grid dissipation	W_g	max.	250	250	W
Grid circuit resistance	R_g	max.	20	20	k Ω
Cathode current, mean peak	I_k	max.	2, 8	2, 8	A
	I_{kp}	max.	15	15	A
Envelope temperature	t_{env}	max.	240	240	$^{\circ}C$

HEATING : direct: filament thoriated tungsten

Filament voltage (f = 150 MHz) (f < 150 MHz)	V_f	5, 8	V
	V_f	6, 3	V

Filament current at $V_f = 6, 3$ V	I_f	66	A
------------------------------------	-------	----	---

The filament is designed to accept temporary fluctuations of + 5% and -10%.

It is extremely important that the filament be properly decoupled. This should be so done that the resonance of the circuit formed by the filament and decoupling elements remains below the fundamental oscillator frequency. In grounded-grid circuits this resonance should be below the grid-cathode resonance. For further information please see Application Book "Tubes for R.F. heating" or contact the manufacturer.

CAPACITANCES

Anode to filament	C_{af}	0, 5	pF
Grid to filament	C_{gf}	16	pF
Anode to grid	C_{ag}	19	pF

CHARACTERISTICS measured at $V_a = 2$ kV, $I_a = 1$ A.

Transconductance	S	22	mA/V
Amplification factor	μ	20	

COOLING

See also cooling curves.

To obtain optimum life, the temperature of the seals and of the envelope should, under continuously loaded conditions, be kept below 200 °C.

YD1160

Anode + grid dissipation $W_a + W_g$ (kW)	Altitude h (m)	Inlet temperature t_i (°C)	Rate of flow q_{min} (m ³ /min)	Pressure drop P_i (Pa*)	Outlet temperature t_o (°C)
3	0	35	3,6	90	82
3	0	45	4,2	110	87

YD1161

With jacket K726

Anode + grid dissipation $W_a + W_g$ (kW)	Inlet temperature t_i (°C)	Rate of flow q_{min} (ℓ/min)	Pressure drop P_i (kPa*)
3	20	3	16
	50	7	52
5	20	5	34
	50	11,5	140

Absolute max. water inlet temperature t_i max. 50 °C

A low-velocity air flow may be required for cooling of the seals.

YD1162

Anode + grid dissipation $W_a + W_g$ (kW)	Inlet temperature t_i (°C)	Rate of flow q_{min} (ℓ/min)	Pressure drop P_i (kPa*)
3	20	2,2	18
	50	4,3	38
5	20	4,0	40
	50	8,0	140

* 1 Pa ≈ 0,1 mm H₂O; 100 kPa ≈ 1 at.

YD1160
YD1161
YD1162

Absolute max. water inlet temperature t_i max. 50 °C
 Absolute max. water pressure p max. 600 kPa(abs) *
 A low-velocity air flow may be required for cooling of the seals.

ACCESSORIES

Filament connector	type	40688			
Filament/cathode connector	type	40689			
Grid connector $f \leq 30$ MHz	type	40686			
	$f > 30$ MHz	type	40687		
Insulating pedestal (YD1160 only)	type	40630	net mass	2,1	kg
Water jacket (YD1161 only)	type	K726	net mass	0,73	kg
Gasket (YD1161 only)	code	3322 026 82801			



MECHANICAL DATA

Dimensions in mm

YD1160

Mounting position : vertical, with anode up or down

Net mass : approx. 3,9 kg

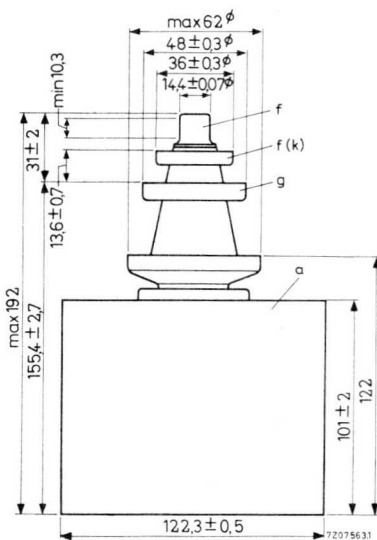


* 100 kPa ≈ 1 at.

YD1161

Mounting position : vertical with anode down


Net mass : approx. 0,66 kg

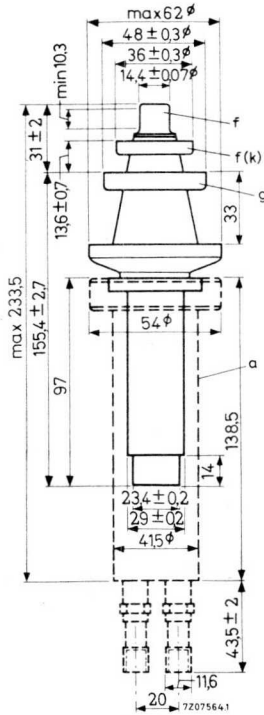


YD1162

Mounting position : vertical with anode up or down



Net mass : approx. 1 kg

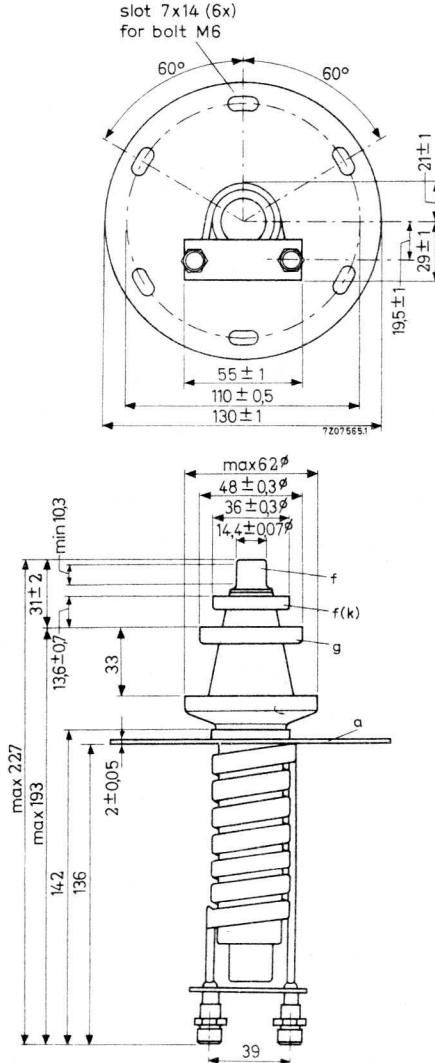



Thread of water connections BSP 3/8 in.

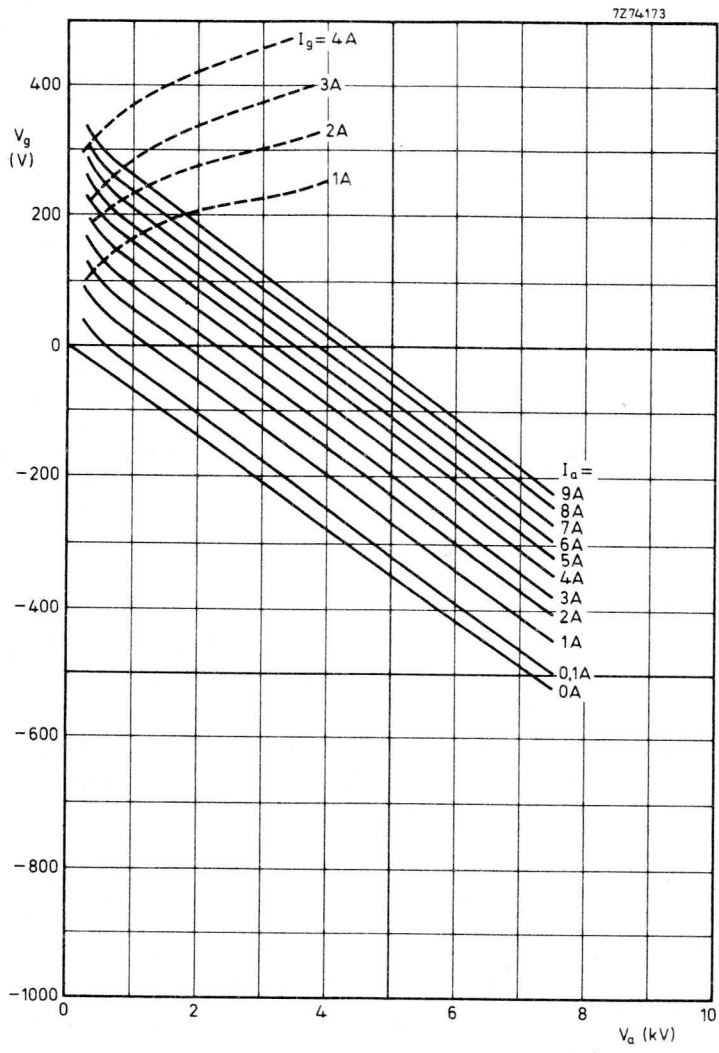

YD1160

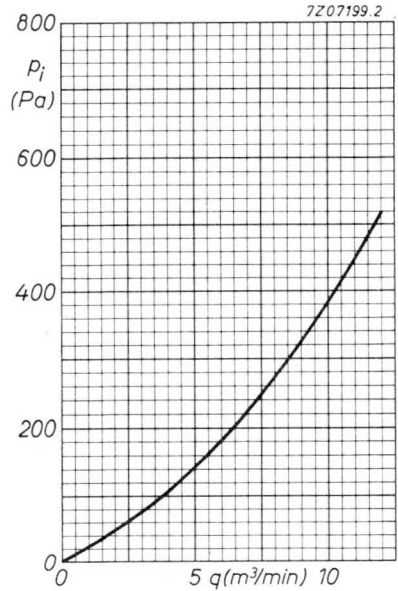
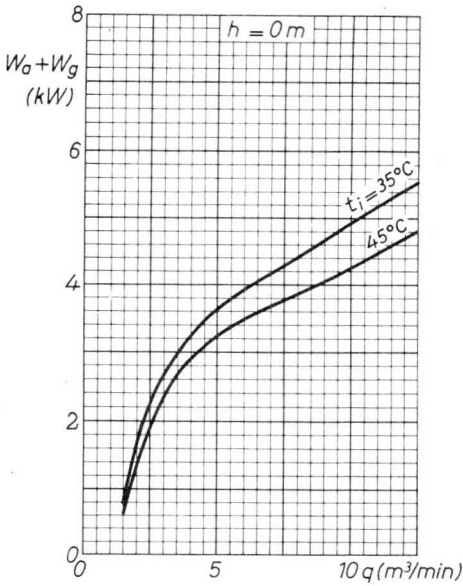


YD1161

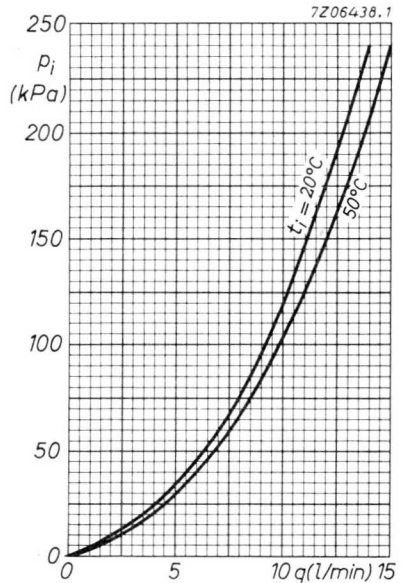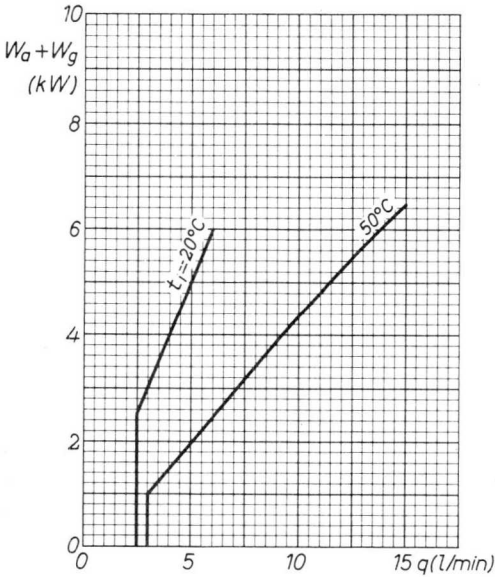

1 Pa \approx 0,1 mm H₂O; 100 kPa \approx 1 at.

YD1162

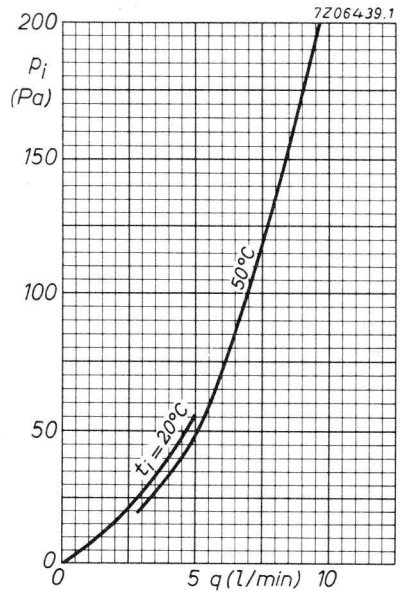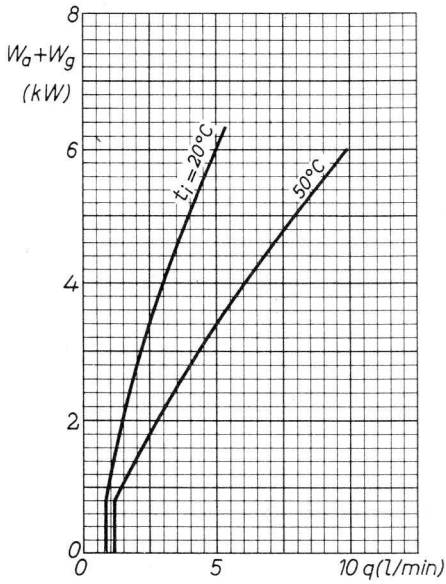

100 kPa \approx 1 at.



INDUSTRIAL R.F. TRIODE

Triodes in metal-ceramic construction intended for use as industrial oscillators.
The YD1170 is forced-air cooled.
The YD1172 has an integral helical water cooler.

QUICK REFERENCE DATA

Oscillator output power ($W_o - W_{\text{feedb}}$)	W_{osc}	15,4	kW
Frequency for full ratings	f max.	120	MHz

To be read in conjunction with "General Operational Recommendations Transmitting Tubes for Communication; Tubes for R. F. Heating".

R.F. CLASS C OSCILLATOR FOR INDUSTRIAL USE

OPERATING CONDITIONS

Frequency	f	120	MHz
Filament voltage	V_f	See under "HEATING"	
Oscillator output power ($W_o - W_{\text{feedb}}$)	W_{osc}	15,4	kW
Anode voltage	V_a	6	kV
Anode current	I_a	3,4	A
Anode input power	W_{ia}	20,4	kW
Anode dissipation	W_a	4,3	kW
Anode output power	W_o	16,1	kW
Anode efficiency	η_a	78,9	%
Oscillator efficiency	η_{osc}	75,5	%
Feedback ratio	V_{gp}/V_{ap}	15,5	%
Grid resistor	R_g	500	Ω
Grid current, on load	I_g	920	mA
Grid voltage, negative	$-V_g$	460	V
Grid dissipation	W_g	280	W
Grid resistor dissipation	W_{Rg}	423	W

LIMITING VALUES (Absolute max. rating system)

Frequency for full ratings	f	up to	120	MHz
Anode voltage	V_a	max.	7, 2	kV
Anode current	I_a	max.	4	A
Anode input power	W_{ia}	max.	24	kW
Anode dissipation	W_a	max.	10	kW
Grid voltage	$-V_g$	max.	1, 5	kV
Grid current, on load off load	I_g	max.	1	A
	I_g	max.	1, 5	A
Grid dissipation	W_g	max.	350	W
Grid circuit resistance	R_g	max.	10	k Ω
Cathode current, mean peak	I_k	max.	5	A
	I_{kp}	max.	25	A
Envelope temperature	t_{env}	max.	240	$^{\circ}C$

HEATING : direct; thoriated tungsten filament

Filament voltage	V_f		5, 8	V
Filament current	I_f		130	A
Peak filament starting current	I_{fp}	max.	800	A
Cold filament resistance	R_{fo}		5, 6	m Ω

The filament is designed to accept temporary fluctuations of +5% and -10%.

To ensure that the cathode temperature remains constant irrespective of the operating frequency, it may be necessary to reduce the filament voltage at higher frequencies. When doing so it must be borne in mind that the filament voltage-to-current ratio measured with only the filament voltage applied should remain constant under all operating conditions.

It is extremely important that the filament be properly decoupled. This should be so done that the resonance of the circuit formed by the filament and decoupling elements remains below the fundamental oscillator frequency. In grounded-grid circuits this resonance should be below the grid-cathode resonance. For further information please see Application Book "Tubes for R.F. heating" or contact the manufacturer.

CAPACITANCES

Anode to filament	C_{af}		1	pF
Grid to filament	C_{gf}		61	pF
Anode to grid	C_{ag}		32	pF

CHARACTERISTICS measured at $V_a = 6 \text{ kV}$, $I_a = 2 \text{ A}$

Transconductance	S	40 mA/V
Amplification factor	μ	30

COOLING

To obtain optimum life, the temperature of the seals and of the envelope should, under normal operating conditions, be kept below 200 °C.

To maintain these temperatures additional cooling may be necessary. At frequencies higher than about 4 MHz cooling of the seals becomes mandatory.

YD1170

See also cooling curves

Anode + grid dissipation $W_a + W_g$ (kW)	Altitude h (m)	Inlet temperature t_i (°C)	Rate of flow q_{min} (m ³ /min)	Pressure drop P_i (Pa *)	Outlet temperature t_o (°C)
10	0	35	9,5	550	94
8	0	35	6,5	280	105
6	0	35	4,5	150	113
4	0	35	3,0	80	117
10	0	45	11,0	690	98
8	0	45	7,6	350	108
6	0	45	5,2	190	115
4	0	45	3,5	100	119
10	1500	35	11,4	630	94
8	1500	35	7,8	320	105
6	1500	35	5,5	170	113
4	1500	35	3,6	90	117
10	3000	25	12,0	620	90
8	3000	25	8,2	320	102
6	3000	25	5,7	170	111
4	3000	25	3,8	90	116

Absolute max. air inlet temperature t_i max. 45 °C

Direction of airflow arbitrary

* 1 Pa \approx 0,1 mm H₂O.

YD1172

See also cooling curves

Anode + grid dissipation $W_a + W_g$ (kW)	Inlet temperature t_i (°C)	Rate of flow q_{min} (l/min)	Pressure drop P_i (kPa*)	Outlet temperature t_o (°C)
10	20	6,0	25	46
	50	9,0	52	67
8	20	4,5	15	49
	50	6,7	31	69
6	20	3,0	7	53
	50	4,5	15	72

Absolute max. water inlet temperature

t_i max. 50 °C

Absolute max. water pressure

p max. 600 kPa(abs)

*100 kPa \approx 1 at.

ACCESSORIES

Filament connector with cable	40692A	net mass	450	g
Filament/cathode connector with cable	40693A	net mass	490	g
Grid connector	40690	net mass	55	g
		$f \leq 4$ MHz		
Insulating pedestal (YD1170 only)	40691	net mass	240	g
		$f > 4$ MHz		
	40654	net mass	4,25	g


MECHANICAL DATA

Dimensions in mm

YD1170

Mounting position : vertical with anode up or down

Net mass : approx. 7,5 kg

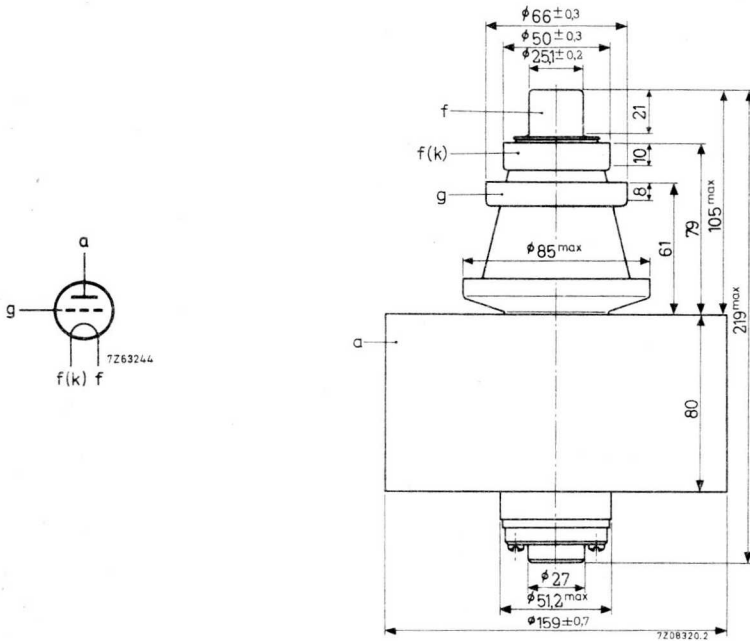


YD1170
YD1172


YD1172

Mounting position : vertical with anode up or down



Net mass : approx. 2 kg

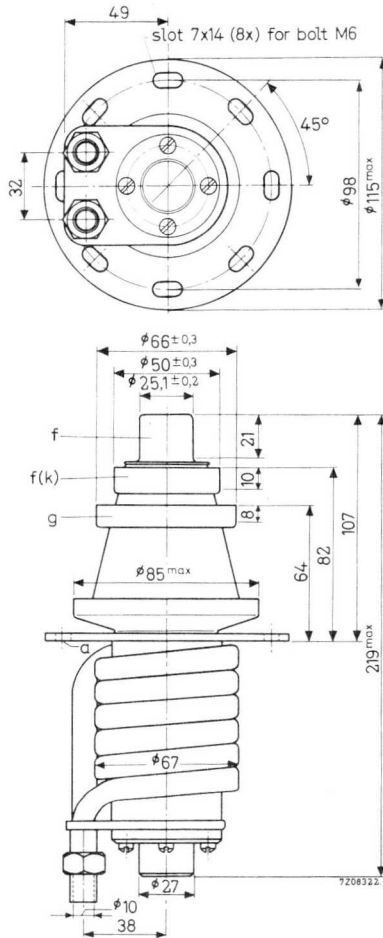



Thread of water connections BSP 3/8 in

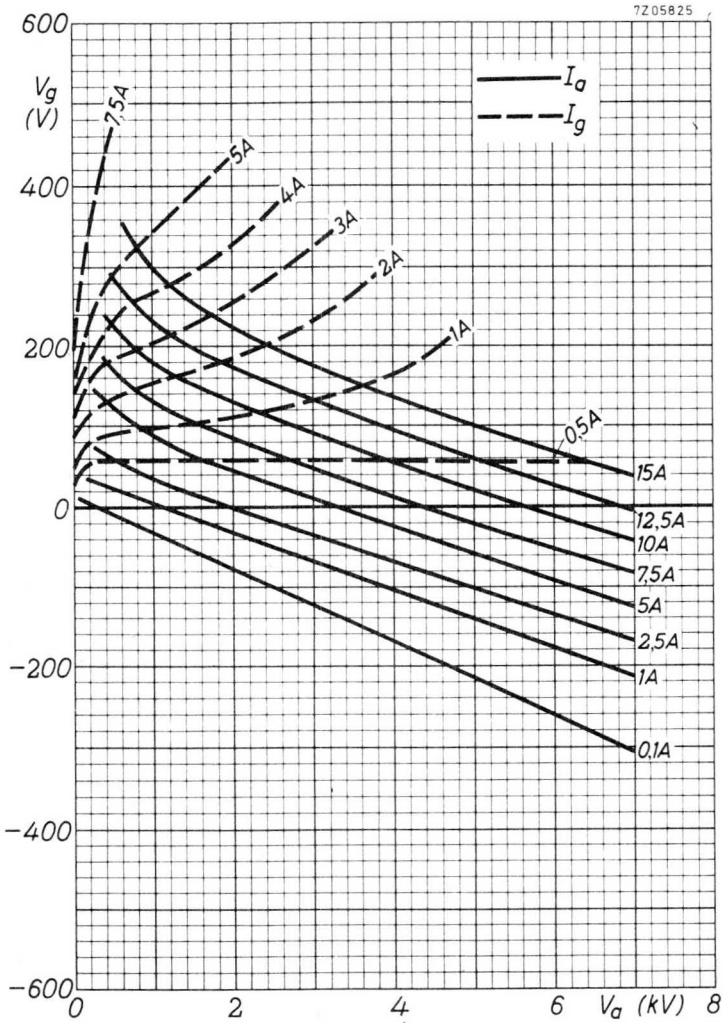

YD1170

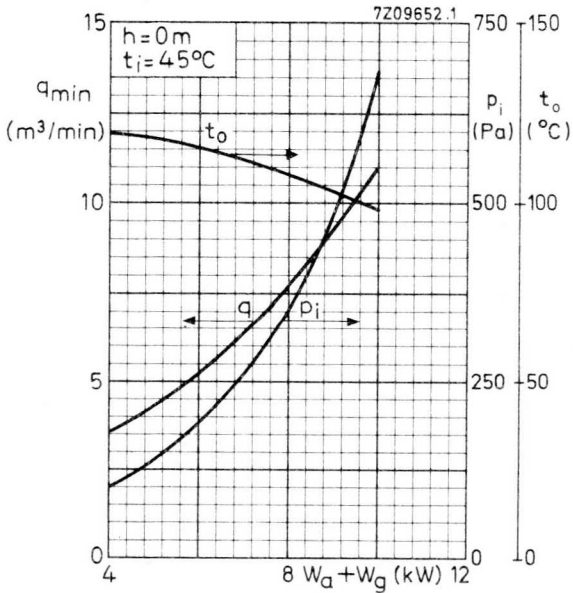
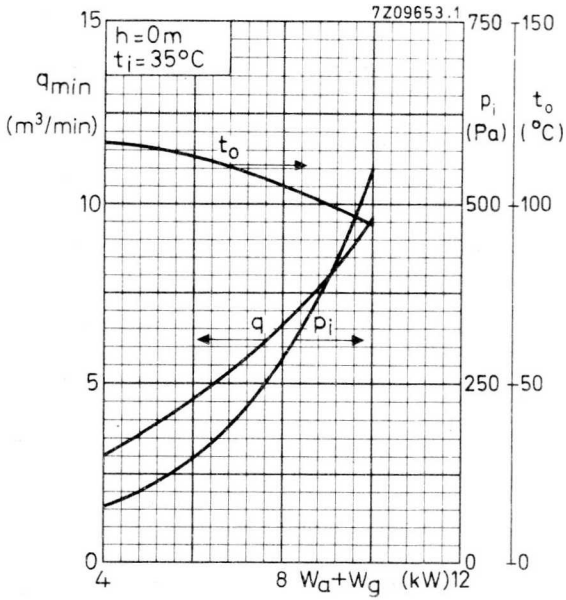


1 Pa \approx 0,1 mm H₂O.

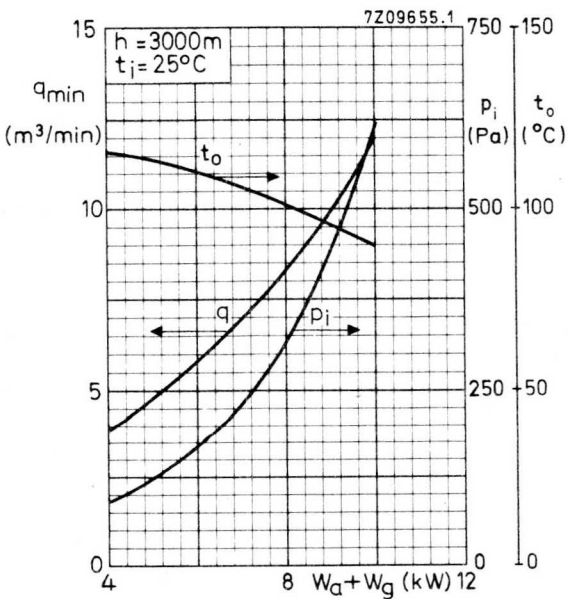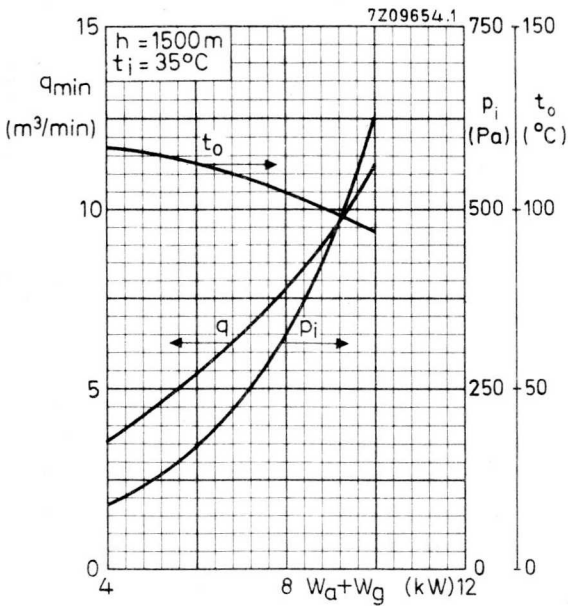

1 Pa \approx 0,1 mm H₂O

YD1172

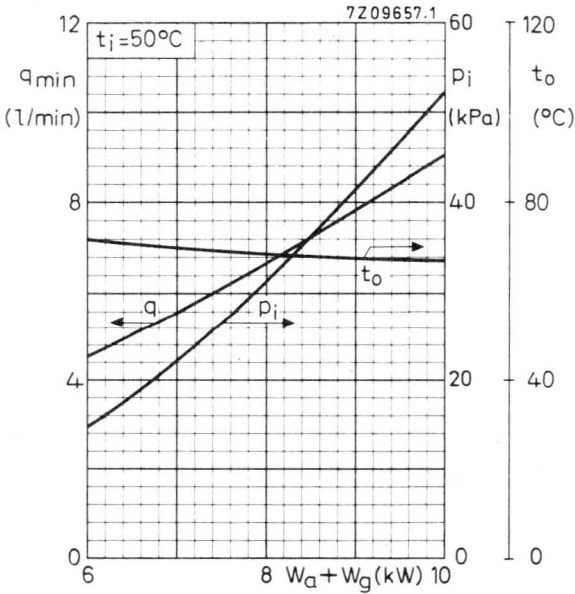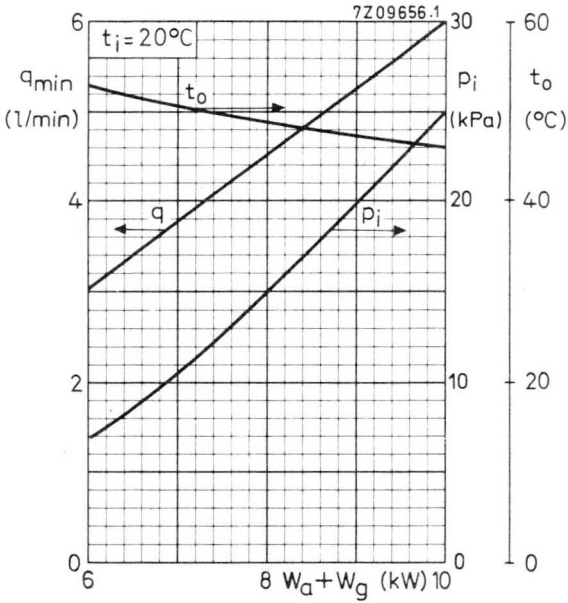

100 kPa \approx 1 at

AIR COOLED R.F. INDUSTRIAL TRIODE

Forced air cooled triode of metal-ceramic construction with integral cooler intended for use as an industrial oscillator.

QUICK REFERENCE DATA

Oscillator output power ($W_o - W_{\text{feedb}}$), typical	W_{osc}	13.22	kW
Frequency for full ratings	f	max. 50	MHz

To be read in conjunction with "General Recommendations Transmitting tubes. Tubes for R. F. heating".

R.F. CLASS C OSCILLATOR FOR INDUSTRIAL USE

OPERATING CONDITIONS

Frequency	f	50	MHz
Oscillator output power ($W_o - W_{\text{feedb}}$)	W_{osc}	13.22	kW
Anode voltage	V_a	10.0	kV
Anode current	I_a	1.75	A
Anode input power	W_{ia}	17.5	kW
Anode dissipation	W_a	3.8	kW
Anode output power	W_o	13.7	kW
Anode efficiency	η_a	78.3	%
Oscillator efficiency	η_{osc}	75.6	%
Feedback ratio	$V_{\text{gp}}/V_{\text{ap}}$	12.0	%
Grid resistor	R_g	1.5	k Ω
Grid current, on load	I_g	450	mA
Grid voltage, negative	$-V_g$	675	V
Grid dissipation	W_g	180	W
Grid resistor dissipation	W_{Rg}	304	W

LIMITING VALUES (Absolute max. rating system)

Frequency for full ratings	f	up to	50	MHz
Anode voltage	V_a	max.	12	kV
Anode current	I_a	max.	2.0	A
Anode input power	W_{ia}	max.	20	kW
Anode dissipation	W_a	max.	10	kW
Grid voltage	$-V_g$	max.	1.5	kV
Grid current, on load	I_g	max.	0.6	A
off load	I_g	max.	0.8	A
Grid dissipation	W_g	max.	250	W
Grid circuit resistance	R_g	max.	10	$k\Omega$
Cathode current, mean	I_k	max.	2.5	A
peak	I_{kp}	max.	10	A
Envelope temperature	t_{env}	max.	240	$^{\circ}C$

HEATING : direct; filament thoriated tungsten

Filament voltage	V_f		5.4	V
Filament current	I_f		65	A
Peak filament starting current	I_{fp}	max.	400	A
Cold filament resistance	R_{fo}		10	$m\Omega$

The filament is designed to accept temporary fluctuations of +5% and -10%.

It is extremely important that the filament be properly decoupled. This should be so done that the resonance of the circuit formed by the filament and decoupling elements remains below the fundamental oscillator frequency. In grounded-grid circuits this resonance should be below the grid-cathode resonance. For further information please see Application Book "Tubes for R.F. heating" or contact the manufacturer.

CAPACITANCES

Anode to filament	C_{af}		0.4	pF
Grid to filament	C_{gf}		42	pF
Anode to grid	C_{ag}		17	pF

CHARACTERISTICS measured at $V_a = 10$ kV, $I_a = 0.8$ A

Transconductance	S		14	mA/V
Amplification factor	μ		45	

COOLING

See also cooling curves.

With insulating pedestal type 40654.

Anode + grid dissipation $W_a + W_g$ (kW)	Altitude h (m)	Inlet temperature t_i (°C)	Rate of flow q_{min} (m ³ /min)	Pressure drop P_i (Pa)*	Outlet temperature t_o (°C)
10	0	35	9,5	550	94
8	0	35	6,5	280	105
6	0	35	4,5	150	113
4	0	35	3,0	80	117
10	0	45	11	690	98
8	0	45	7,6	350	108
6	0	45	5,2	190	115
4	0	45	3,5	100	119
10	1500	35	11,4	630	94
8	1500	35	7,8	320	105
6	1500	35	5,5	170	113
4	1500	35	3,6	90	117
10	3000	25	12	620	90
8	3000	25	8,2	320	102
6	3000	25	5,7	170	111
4	3000	25	3,8	90	116

To obtain optimum life, the temperatures of the seals and of the envelope should, under normal operating conditions, be kept below 200 °C.

ACCESSORIES

Filament connector with cable	type	40692A	net mass	450	g
Filament/cathode connector with cable	type	40693A	net mass	490	g
Grid connector	f ≤ 4 MHz	type	40690	net mass	55
		f > 4 MHz	type	40691	net mass
Insulating pedestal	type	40654	net mass	4,25	kg



* 1 Pa ≈ 0,1 mmH₂O.


MECHANICAL DATA



Dimensions in mm



Mounting position : vertical with anode up or down

Net mass : approx. 7 kg

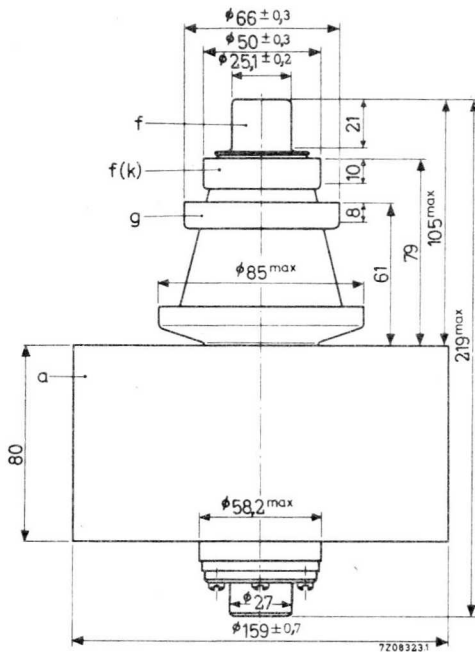

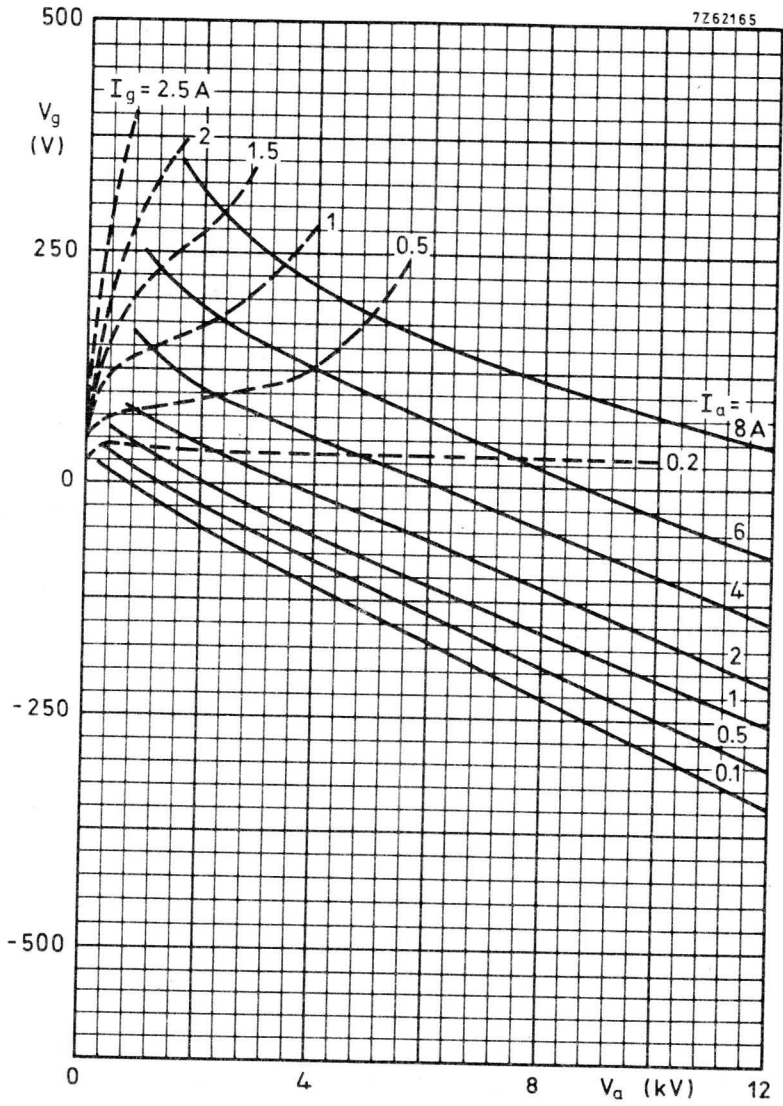

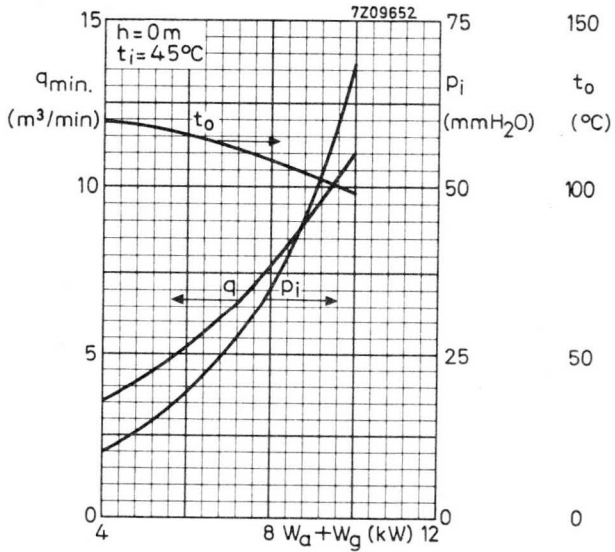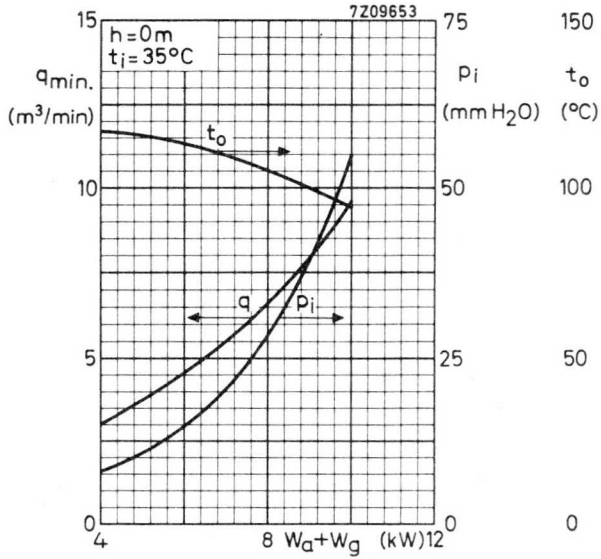

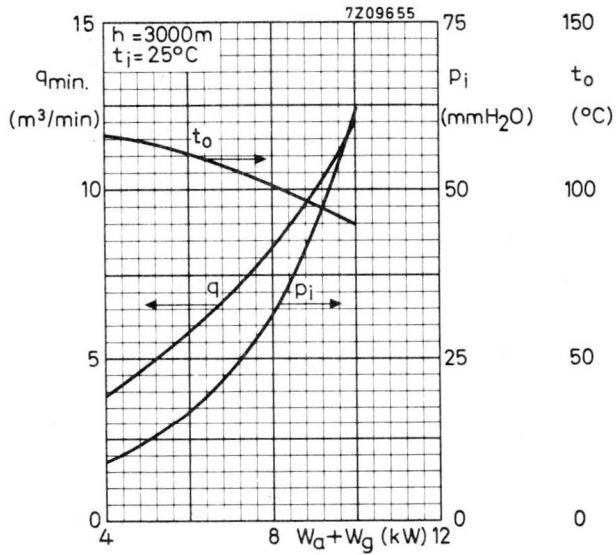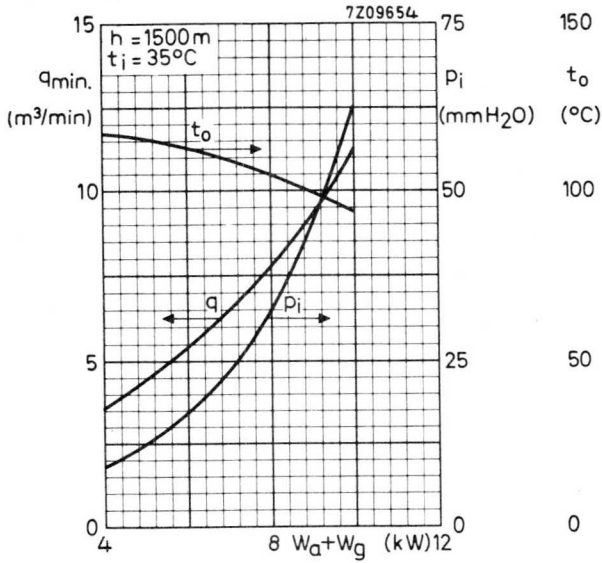



INDUSTRIAL R.F. TRIODE

Triodes in metal-ceramic construction intended for use as industrial oscillators.

The YD1175 is forced-air cooled.

The YD1177 has an integral helical water cooler.

QUICK REFERENCE DATA

Oscillator output power ($W_o - W_{\text{feedb}}$), typical	W_{osc}	26,5	kW
Frequency for full ratings	f max	120	MHz

To be read in conjunction with "General Operational Recommendations Transmitting Tubes for Communication; Tubes for R. F. Heating".

R.F. CLASS C OSCILLATOR FOR INDUSTRIAL USE

OPERATING CONDITIONS

	f	120	120	120	MHz
Oscillator output power ($W_o - W_{\text{feedb}}$)	W_{osc}	15,6	22,0	26,5	kW
Anode voltage	V_a	6	8	10	kV
Anode current	I_a	3,6	3,6	3,4	A
Anode input power	W_{ia}	21,6	28,8	34,0	kW
Anode dissipation	W_a	5,4	6,1	6,8	kW
Anode output power	W_o	16,2	22,7	27,2	kW
Anode efficiency	η_a	75	78,8	80	%
Oscillator efficiency	η_{osc}	72,2	76,3	78,0	%
Feedback ratio	$V_{\text{gp}}/V_{\text{ap}}$	12	10	9	%
Grid resistor	R_g	300	400	560	Ω
Grid current, on load	I_g	1,0	1,0	0,9	A
Grid voltage, negative	$-V_g$	300	400	500	V
Grid dissipation	W_g	290	290	240	W
Grid resistor dissipation	W_{Rg}	300	400	450	W

LIMITING VALUES (Absolute max. rating system)

Frequency for full ratings	f	up to	120	MHz ¹⁾
Anode voltage	V_a	max.	12	kV
Anode current	I_a	max.	4	A
Anode input power	W_{ia}	max.	40	kW
Anode dissipation	W_a	max.	15	kW
Grid voltage	$-V_g$	max.	1,5	kV
Grid current, on load off load	I_g	max.	1,1	A
	I_g	max.	1,6	A
Grid dissipation	W_g	max.	350	W
Grid circuit resistance	R_g	max.	10	k Ω
Cathode current, mean peak	I_k	max.	5	A
	I_{kp}	max.	25	A
Envelope temperature	t_{env}	max.	240	$^{\circ}C$

HEATING : direct; filament thoriated tungsten.

Filament voltage	V_f		5,8	V
Filament current	I_f		130	A
Peak filament starting current	I_{fp}	max.	800	A
Cold filament resistance	R_{f0}		5,6	m Ω

The filament is designed to accept temporary fluctuations of + 5 % and - 10 %

To ensure that the cathode temperature remains constant irrespective of the operating frequency it may be necessary to reduce the filament voltage at higher frequencies.

When doing so it must be borne in mind that the filament voltage-to-current ratio, as measured with only the filament voltage applied, should remain constant under all operating conditions

It is extremely important that the filament be properly decoupled. This should be so done that the resonance of the circuit formed by the filament and decoupling elements remains below the fundamental oscillator frequency. In grounded-grid circuits this resonance should be below the grid-cathode resonance. For further information please see Application Book "Tubes for R. F. heating" or contact the manufacturer.

¹⁾ When the tubes are to be used at frequencies above 30 MHz the manufacturer should be consulted for more detailed information.

CAPACITANCES

Anode to filament	C_{af}	0,4	pF
Grid to filament	C_{gf}	47	pF
Anode to grid	C_{ag}	17	pF

CHARACTERISTICS

Transconductance	S	33	mA/V
Amplification factor	μ	44	

COOLING

To obtain optimum life, the temperatures of the seals and of the envelope should, under normal operating conditions, be kept below 200 °C.

To maintain these temperatures additional cooling may be necessary. At frequencies higher than about 4 MHz, cooling of the seals becomes mandatory.

YD1175

See also cooling curves

Anode + grid dissipation $W_a + W_g$ (kW)	Altitude h (m)	Inlet temperature t_i (°C)	Rate of flow q min. (m ³ /min)	Pressure drop P_i (Pa*)	Outlet temperature t_o (°C)
10	0	35	9,5	550	94
8	0	35	6,5	280	105
6	0	35	4,5	150	113
4	0	35	3,0	80	117
10	0	45	11,0	690	98
8	0	45	7,6	350	108
6	0	45	5,2	190	115
4	0	45	3,5	100	119
10	1500	35	11,4	630	94
8	1500	35	7,8	320	105
6	1500	35	5,5	170	113
4	1500	35	3,6	90	117
10	3000	25	12,0	620	90
8	3000	25	8,2	320	102
6	3000	25	5,7	170	111
4	3000	25	3,8	90	116

Absolute max. air inlet temperature t_i max. 45 °C

Direction of airflow : arbitrary.

*1Pa ≈ 0,1 mmH₂O

YD1177

See also cooling curves

Anode + grid dissipation $W_a + W_g$ (kW)	Inlet temperature t_i (°C)	Rate of flow Q_{min} (l/min)	Pressure drop P_i (kPa *)	Outlet temperature t_o (°C)
15	20	7,5	50	50
	50	11,0	100	71
10	20	5,0	24	51
	50	7,2	47	72
5	20	2,5	7	53
	50	3,7	17	73

Absolute max. water inlet temperature

t_i max 50 °C

→ ACCESSORIES

Filament connector with cable	type	40692A	net mass	450 g
Filament/cathode connector with cable	type	40693A	net mass	490 g
Grid connector $f \leq 4$ MHz	type	40690	net mass	55 g
	$f > 4$ MHz	type	40691	net mass
Insulating pedestal (YD1175 only)	type	40654	net mass	4,25 kg

* 100 kPa \approx 1 at.



MECHANICAL DATA

Dimensions in mm

YD1175

Mounting position : vertical with anode up or down



Net weight : mass 7,5 kg

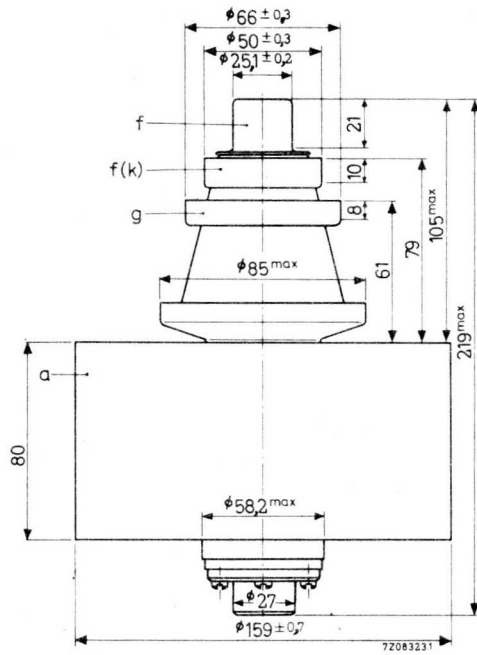

YD1177


Mounting position : Vertical with anode up or down

Net weight : approx. 6,5 kg



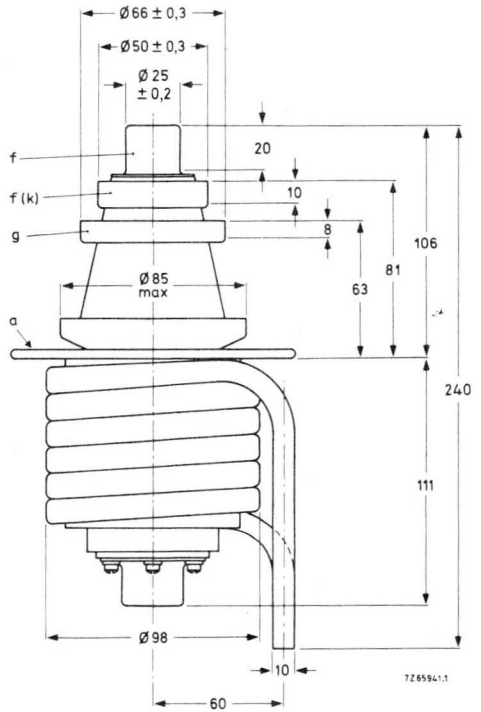
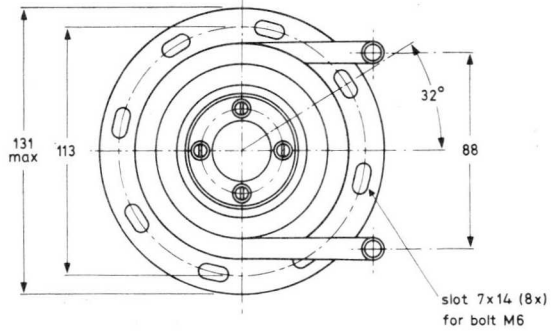


With the anode up the water connections should be interchanged

7Z65762


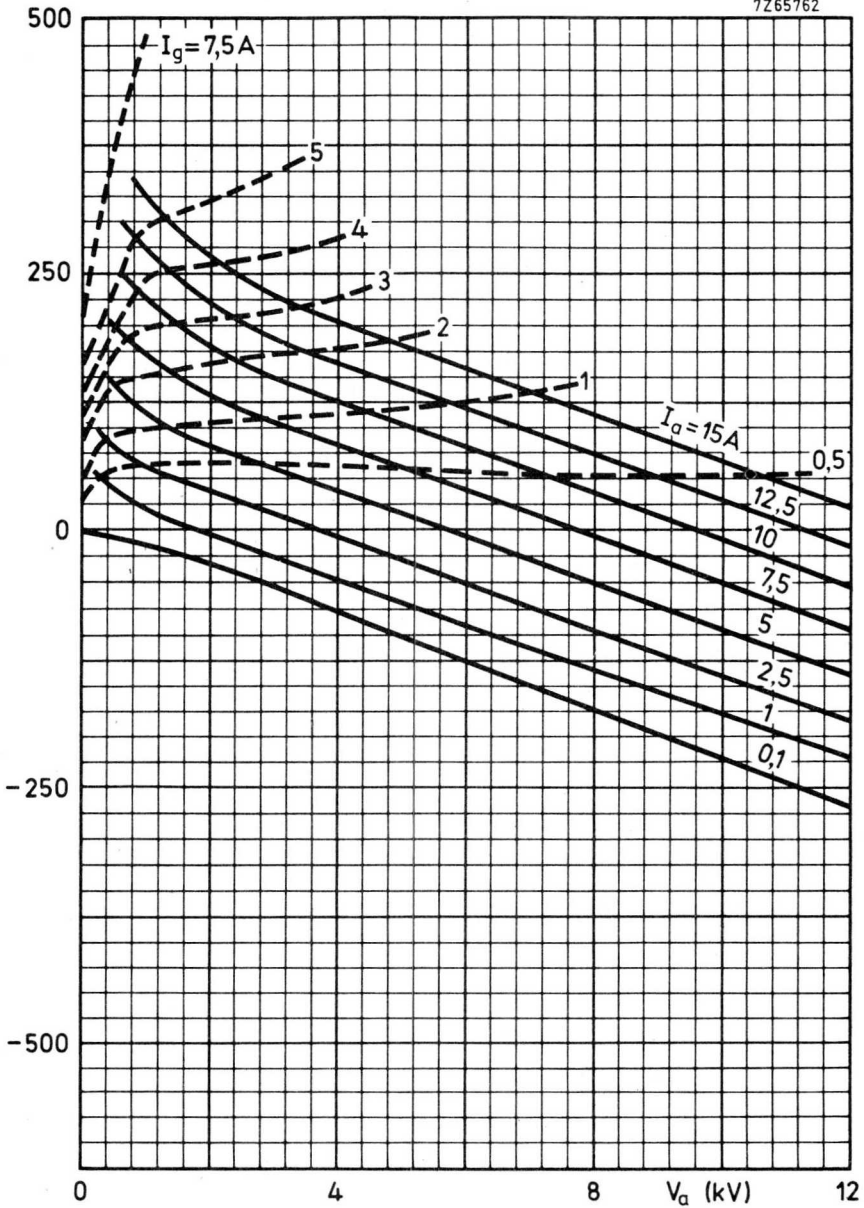


YD1175

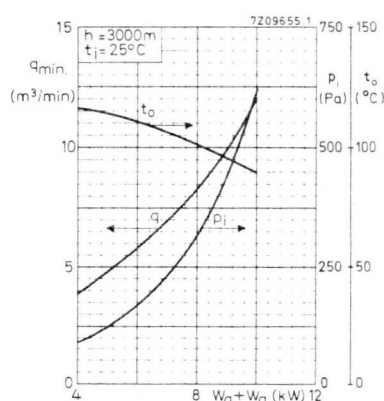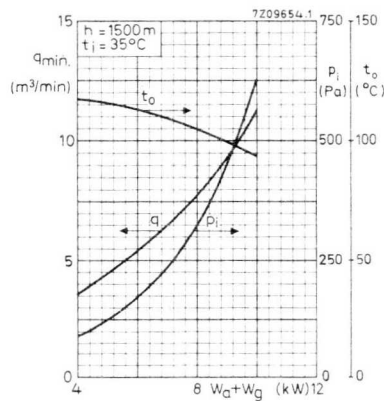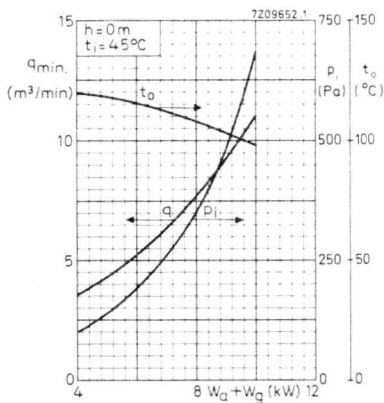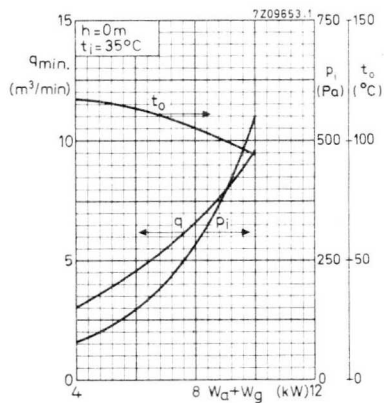


* 1 Pa ≈ 0,1 mmH₂O

YD1177

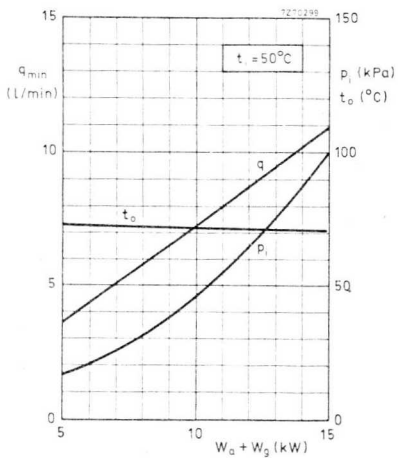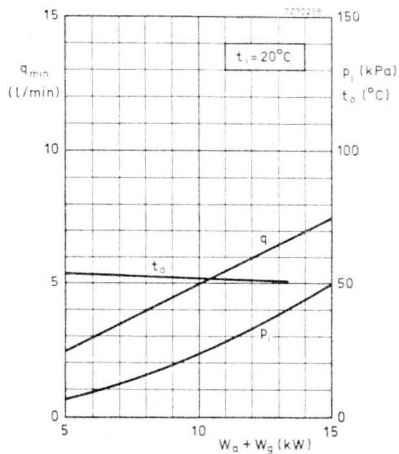

* 100 kPa \approx 1 at

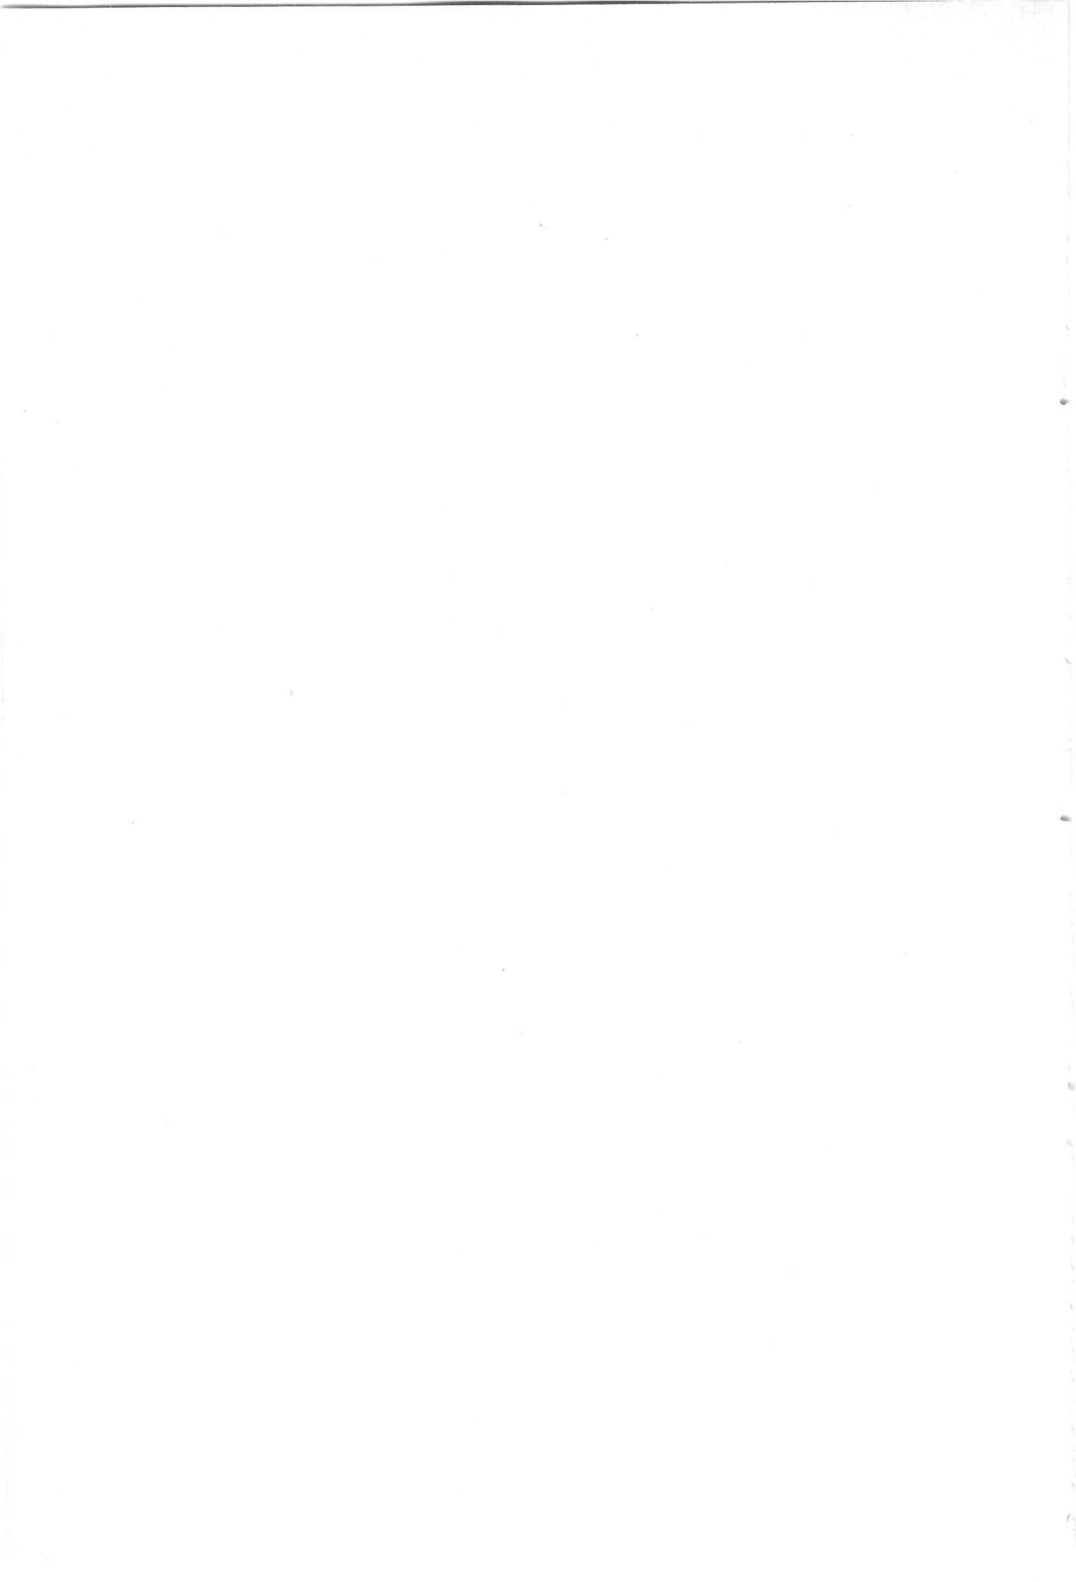

INDUSTRIAL R.F. TRIODE

Triodes in metal-ceramic construction intended for use as industrial oscillators.

The YD1180 is forced-air cooled

The YD1182 is water cooled by an integral cooler.

QUICK REFERENCE DATA

Oscillator output power ($W_o - W_{\text{feedb}}$), typical	W_{osc}	31,6	kW
Frequency for full ratings	f	max. 100	MHz

To be read in conjunction with "General Operational Recommendations Transmitting Tubes for Communication, Tubes for R.F. Heating".

R.F. CLASS C OSCILLATOR FOR INDUSTRIAL USE OPERATING CONDITIONS

Frequency	f	90	MHz
Oscillator output power ($W_o - W_{\text{feedb}}$)	W_{osc}	31,6	kW
Anode voltage	V_a	7,5	kV
Anode current	I_a	5,4	A
Anode input power	W_{ia}	40,5	kW
Anode dissipation	W_a	7,5	kW
Anode output power	W_o	33	kW
Anode efficiency	η_a	81,5	%
Oscillator efficiency	η_{osc}	78	%
Feedback ratio	V_{gp}/V_{ap}	14,8	%
Grid resistor	R_g	450	Ω
Grid current, on load	I_g	1,45	A
Grid voltage, negative	$-V_g$	652	V
Grid dissipation	W_g	450	W
Grid resistor dissipation	W_{Rg}	946	W

LIMITING VALUES (Absolute max. rating system)

Frequency	f	up to	100	MHz	
Anode voltage	V _a	max.	9	kV	
Anode current	I _a	max.	6	A	
Anode input power	W _{ia}	max.	45	kW	
Anode dissipation: continuous service	(YD1180) (YD1182)	W _a	max.	15	kW
			max.	20	kW
Grid voltage	-V _g	max.	1,25	kV	
Grid current, on load of load	I _g	max.	1,6	A	
	I _g	max.	2,4	A	
Grid dissipation	W _g	max.	500	W	
Grid circuit resistance	R _g	max.	10	kΩ	
Cathode current, mean peak	I _k	max.	7,5	A	
	I _{kp}	max.	40	A	
Envelope temperature	t _{env}	max.	240	°C	

HEATING : direct; thoriated tungsten filament, mesh construction

Filament voltage	V _f		7	V
Filament current	I _f		175	A
Peak filament starting current	I _{fp}	max.	1000	A
Cold filament resistance	R _{fo}		4,2	mΩ

The filament is designed to accept temporary fluctuations of +5% and -10%. To ensure that the cathode temperature remains constant irrespective of the operating frequency, it may be necessary to reduce the filament voltage at higher frequencies. When doing so it must be borne in mind that the filament voltage-to-current ratio measured with only the filament voltage applied should remain constant under all operating conditions.

It is extremely important that the filament be properly decoupled. This should be so done that the resonance of the circuit formed by the filament and decoupling elements remains below the fundamental oscillator frequency. In grounded-grid circuits this resonance should be below the grid-cathode resonance. For further information please see Application Book "Tubes for R.F. heating" or contact the manufacturer.

CAPACITANCES

Anode to filament	C _{af}		1	pF
Grid to filament	C _{gf}		61	pF
Anode to grid	C _{ag}		32	pF

CHARACTERISTICS measured at $V_a = 7$ kV, $I_a = 2, 4$ A

Transconductance	S	40 mA/V
Amplification factor	μ	33

COOLING

To obtain optimum life, the temperature of the seals and of the envelope should, under normal operating conditions, be kept below 200 °C.

To maintain these temperatures additional cooling may be necessary.

At frequencies higher than about 4 MHz cooling of the seals becomes mandatory.

YD1180

Direction of airflow: see outline drawing.

See also cooling curves

With insulating pedestal type 40648

Anode+grid dissipation W_a+W_g (kW)	Altitude h (m)	Inlet temperature t_i (°C)	Rate of flow q_{min} (m ³ /min)	Pressure drop P_i (Pa*)	Outlet temperature t_o (°C)
15	0	35	15	850	92
10	0	35	9,3	320	99
8	0	35	7	200	104
15	0	45	17,3	1060	98
10	0	45	10,7	400	104
8	0	45	8,1	250	108
15	1500	35	18	970	93
10	1500	35	11,2	460	100
8	1500	35	8,4	230	104
15	3000	25	19	950	90
10	3000	25	11,8	450	95
8	3000	25	8,9	230	99

* 1 Pa \approx 0,1 mm H₂O

YD1182

See also cooling curves

Anode + grid dissipation $W_a + W_g$ (kW)	Inlet temperature t_i (°C)	Rate of flow q_{min} (ℓ/min)	Pressure drop P_i (kPa*)	Outlet temperature t_o (°C)
20	20	10	40	51
	50	15	80	71
15	20	7,5	22	54
	50	10,5	43	73
10	20	4,5	10	58
	50	6,7	20	75

Absolute max. water inlet temperature t_i max. 50 °C
 Absolute max. water pressure p max. 600 kPa(abs)

→ **ACCESSORIES**

Filament connector with cable	type 40708A net mass	600 g
Filament /cathode connector with cable	type 40709A net mass	640 g
Grid connector $f \leq 4$ MHz	type 40710 net mass	60 g
	$f > 4$ MHz	type 40711 net mass
Insulating pedestal (YD1180 only)	type 40648 net mass	7,15 kg

* 100 kPa \approx 1 at.


MECHANICAL DATA

Dimensions in mm

YD1180

Mounting position : vertical with anode up or down


Net mass : approx. 12 kg

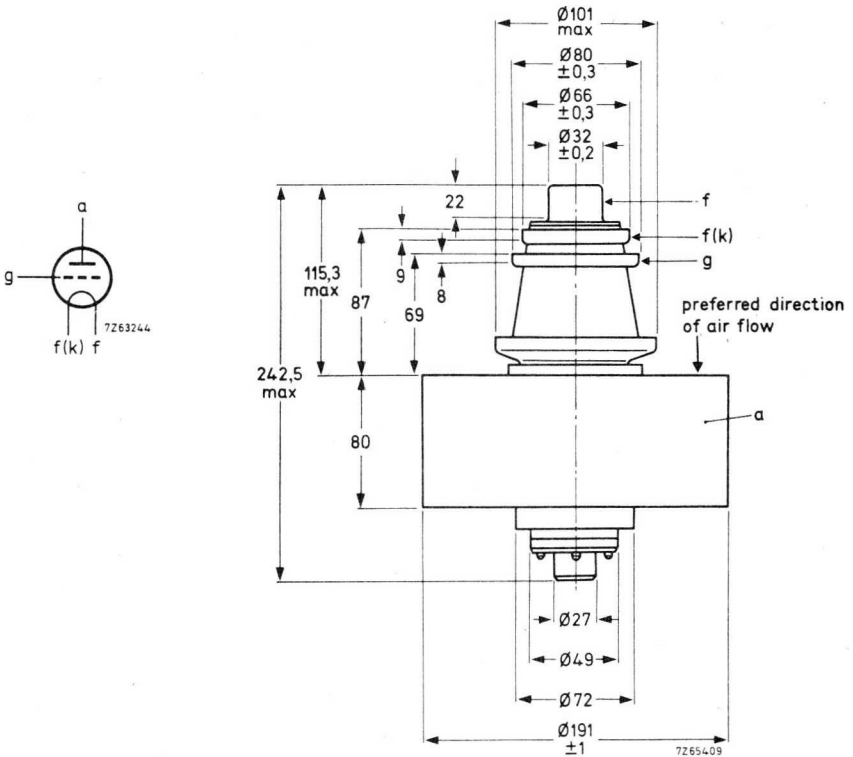

YD1182


Mounting position : vertical with anode up or down

Net mass : approx. 3,5 kg


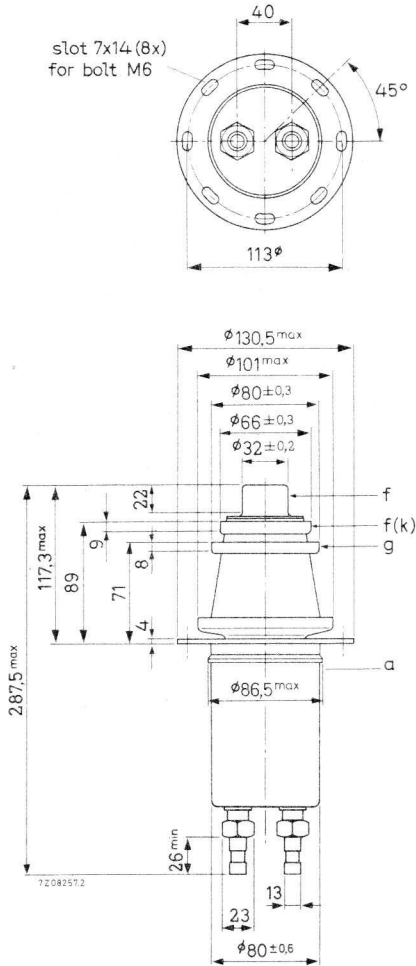


Thread of water connections BSP 1/2 in

With anode up the inlet and outlet connections should be interchanged.


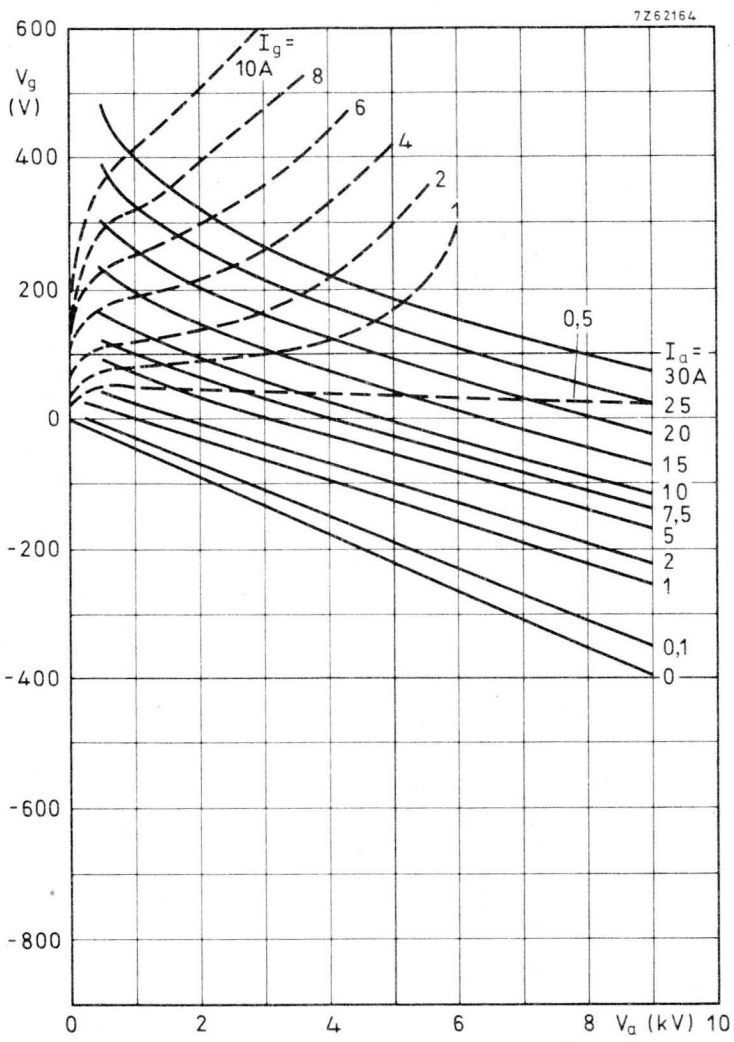


YD1180

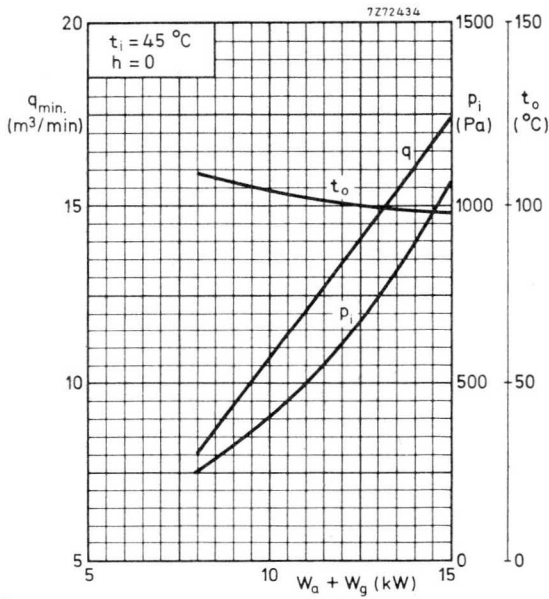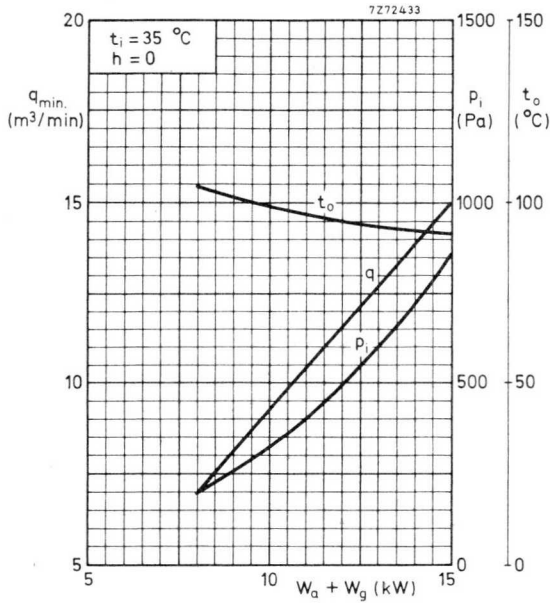



1 Pa \approx 0, 1 mm H₂O

YD1180

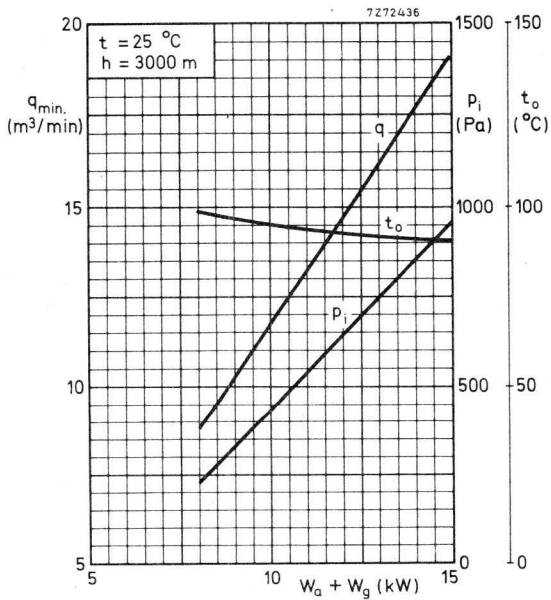
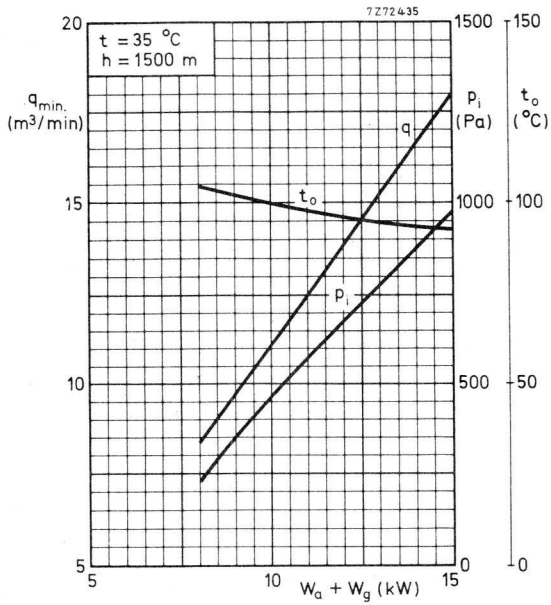


YD1180

7262463.2

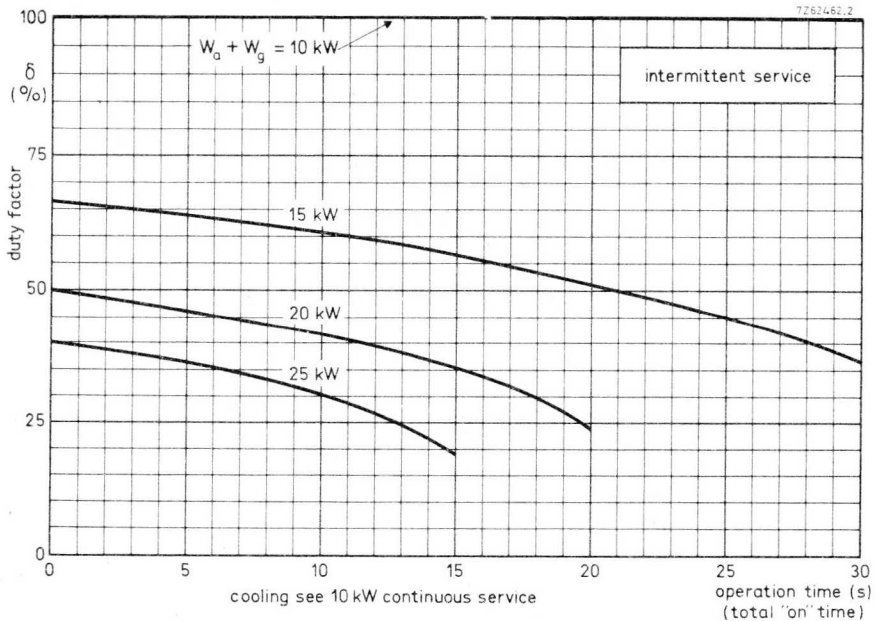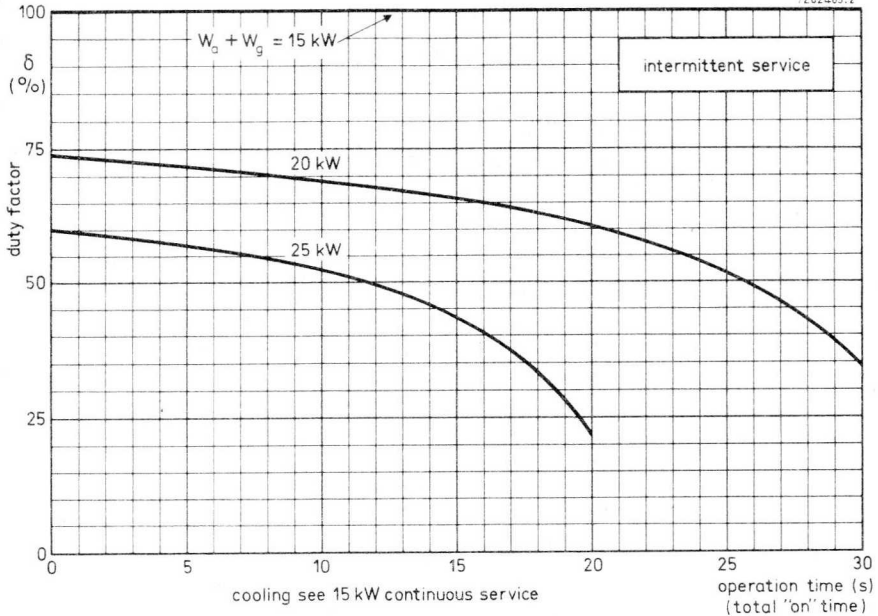

YD1182

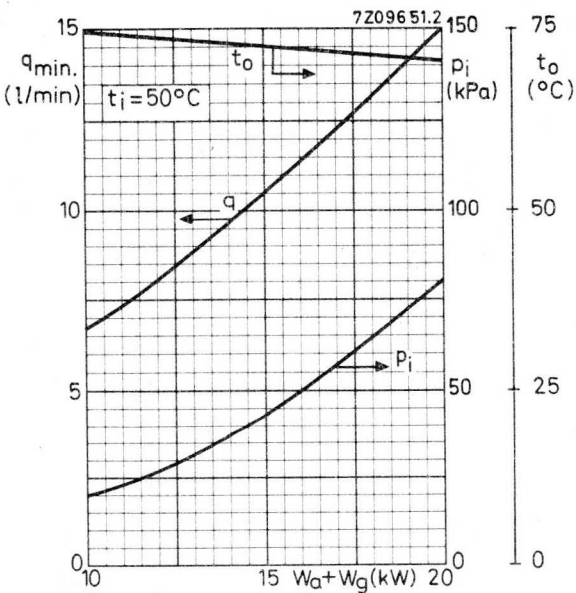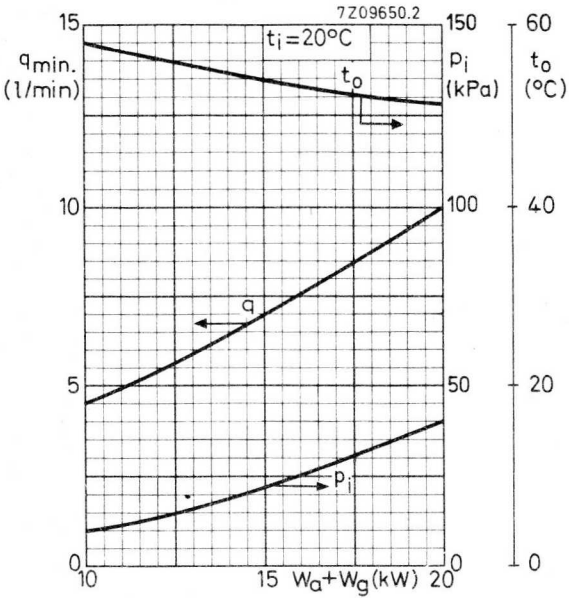

100 kPa \approx 1 at.

INDUSTRIAL R.F. TRIODE

Triodes in metal-ceramic construction intended for use as industrial oscillators.
The YD1185 is forced-air cooled
The YD1187 is water cooled by an integral cooler.

QUICK REFERENCE DATA			
Oscillator output power ($W_o - W_{\text{feedb}}$), typical	W_{osc}	50	kW
Frequency for full ratings	f	max. 100	MHz

To be read in conjunction with "General Operational Recommendations Transmitting Tubes for Communication , Tubes for R.F. Heating"

R.F. CLASS C OSCILLATOR FOR INDUSTRIAL USE

OPERATING CONDITIONS

Frequency	f	90	90	90	MHz
Oscillator output power ($W_o - W_{\text{feedb}}$)	W_{osc}	33,4	40	50	kW
Anode voltage	V_a	8,5	10	12	kV
Anode current	I_a	5,4	5,33	5,33	A
Anode input power	W_{ia}	45,9	53,3	64	kW
Anode dissipation	W_a	11,4	12,1	12,8	kW
Anode output power	W_o	34,5	41,2	51,2	kW
Anode efficiency	η_a	75,1	77,3	80,0	%
Oscillator efficiency	η_{osc}	72,7	75,0	78,1	%
Feedback ratio	V_{gp}/V_{ap}	11	10,2	9	%
Grid resistor	R_g	330	400	430	Ω
Grid current, on load	I_g	1,5	1,45	1,4	A
Grid voltage, negative	$-V_g$	495	580	600	V
Grid dissipation	W_g	400	380	360	W
Grid resistor dissipation	W_{Rg}	740	840	840	W

LIMITING VALUES (Absolute max. rating system)

Frequency for full ratings	f	up to	100	MHz
Anode voltage	V_a	max.	14,4	kV
Anode current	I_a	max.	6	A
Anode input power	W_{i_a}	max.	72	kW
Anode dissipation, continuous service (YD1185) (YD1187)	W_a	max.	15	kW
	W_a	max.	20	kW
Grid voltage	$-V_g$	max.	1,5	kV
Grid current, on load off load	I_g	max.	1,6	A
	I_g	max.	2,4	A
Grid dissipation	W_g	max.	500	W
Grid circuit resistance	R_g	max.	10	k Ω
Cathode current, mean peak	I_k	max.	7,5	A
	I_{k_p}	max.	40	A
Envelope temperature	t_{env}	max.	240	$^{\circ}C$

HEATING : direct; thoriated tungsten filament, mesh construction

Filament voltage	V_f		7	V
Filament current	I_f		175	A
Peak filament starting current	I_{f_p}	max.	1000	A
Cold filament resistance	R_{f_0}		4,2	m Ω

The filament is designed to accept temporary fluctuations of +5% and -10%.

To ensure that the cathode temperature remains constant irrespective of the operating frequency, it may be necessary to reduce the filament voltage at higher frequencies. When doing so it must be borne in mind that the filament voltage-to-current ratio measured with only the filament voltage applied should remain constant under all operating conditions

It is extremely important that the filament be properly decoupled. This should be so done that the resonance of the circuit formed by the filament and decoupling elements remains below the fundamental oscillator frequency. In grounded-grid circuits this resonance should be below the grid-cathode resonance. For further information please see Application Book "Tubes for R.F. heating" or consult the manufacturer.

CAPACITANCES

Anode to filament	C_{af}		1	pF
Grid to filament	C_{gf}		61	pF
Anode to grid	C_{ag}		22	pF

CHARACTERISTICS measured at $V_a = 11$ kV, $I_a = 1,5$ A

Transconductance	S	40	mA/V
Amplification factor	μ	50	

COOLING

To obtain optimum life, the temperature of the seals and of the envelope should, under normal operating conditions, be kept below 200 °C.

To maintain these temperatures additional cooling may be necessary.
At frequencies higher than about 4 MHz cooling of the seals becomes mandatory.

YD1185

See also cooling curves

With insulating pedestal type 40648

Anode + grid dissipation $W_a + W_g$ (kW)	Altitude h (m)	Inlet temperature t_i (°C)	Rate of flow q_{min} (m ³ /min)	Pressure drop P_i (Pa *)	Outlet temperature t_o (°C)
15	0	35	15	850	92
10	0	35	9,3	350	99
8	0	35	7	220	104
15	0	45	17,3	1060	98
10	0	45	10,7	440	104
8	0	45	8,1	270	108
15	1500	35	18	970	93
10	1500	35	11,2	400	100
8	1500	35	8,4	250	104
15	3000	25	19	950	90
10	3000	25	11,8	390	95
8	3000	25	8,9	250	99

* 1 Pa \approx 0,1 mm H₂O

YD1187

See also cooling curves

Anode + grid dissipation $W_a + W_g$ (kW)	Inlet temperature t_i (°C)	Rate of flow q_{min} (l/min)	Pressure drop p_i (kPa*)	Outlet temperature t_o (°C)
20	20	10	40	51
	50	15	80	71
15	20	7	22	54
	50	10,5	43	73
10	20	4,5	10	58
	50	6,7	20	75

Absolute max. water inlet temperature

t_i 50 °C

Absolute max. water pressure

p 600 kPa* (abs)

→ **ACCESSORIES**

Filament connector with cable	type	40708A	net mass	600	g
Filament/cathode connector with cable	type	40709A	net mass	640	g
Grid connector ≤ 4 MHz	type	40710	net mass	60	g
Grid connector > 4 MHz	type	40711	net mass	310	g
Insulating pedestal (YD1185 only)	type	40648	net mass	7,15	kg

* 100 kPa \approx 1 at.



MECHANICAL DATA

Dimensions in mm

YD1185

Mounting position : vertical with anode up or down


Net mass : approx. 11,3 kg

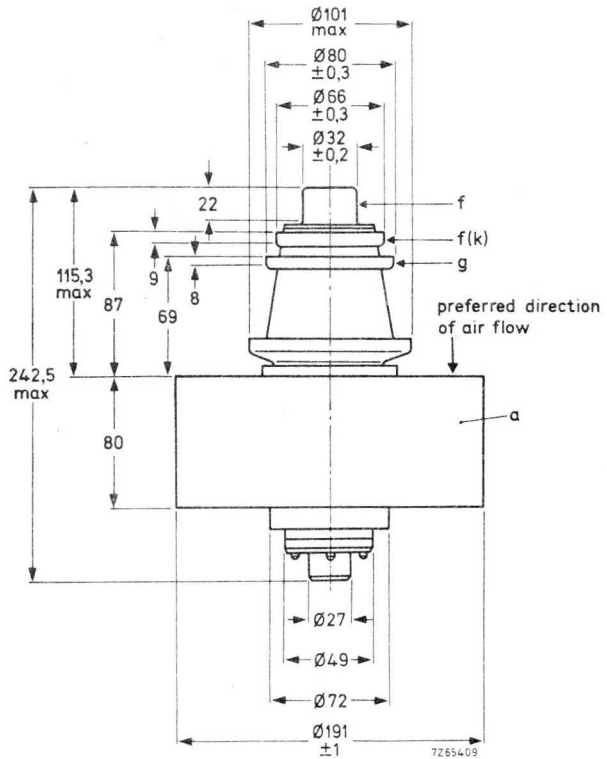

YD1187


Mounting position : vertical, with anode up or down

Net mass : approx. 3,4 kg


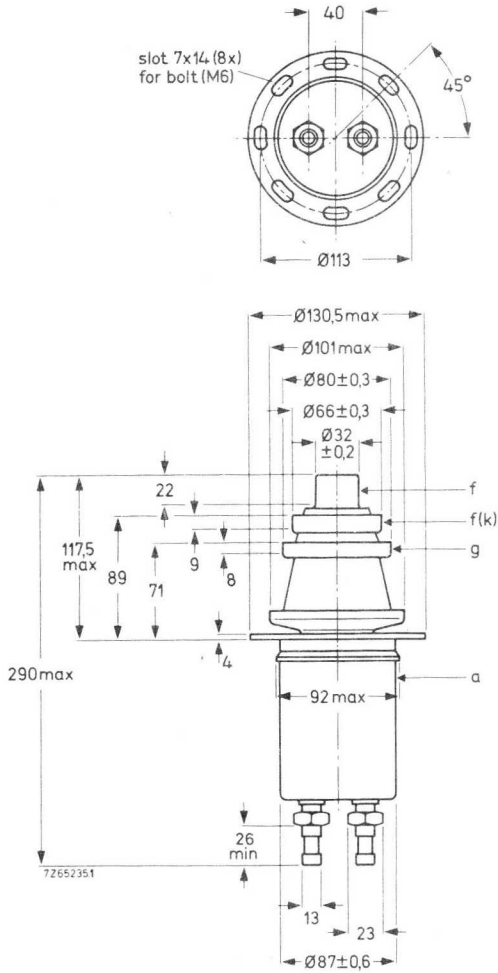


Thread of water connections BSP 1/2 in

With the anode up the inlet and outlet connections should be interchanged.


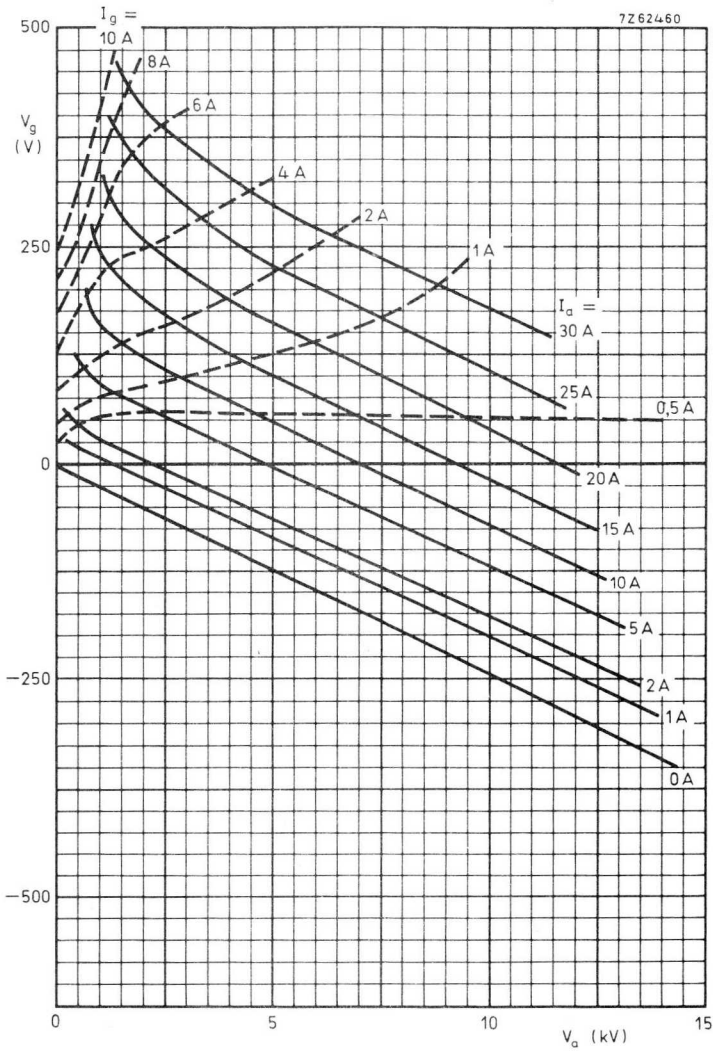


YD1185

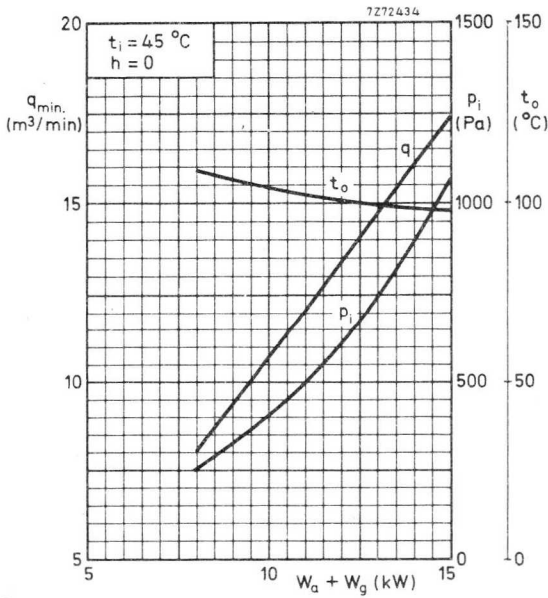
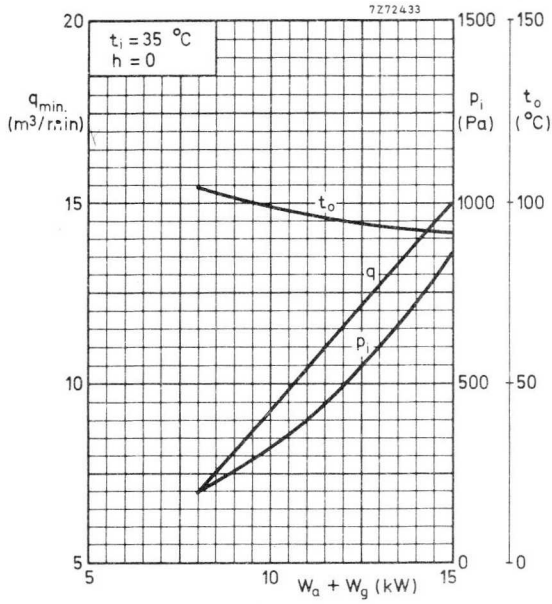


1 Pa \approx 0,1 mm H₂O



YD1185

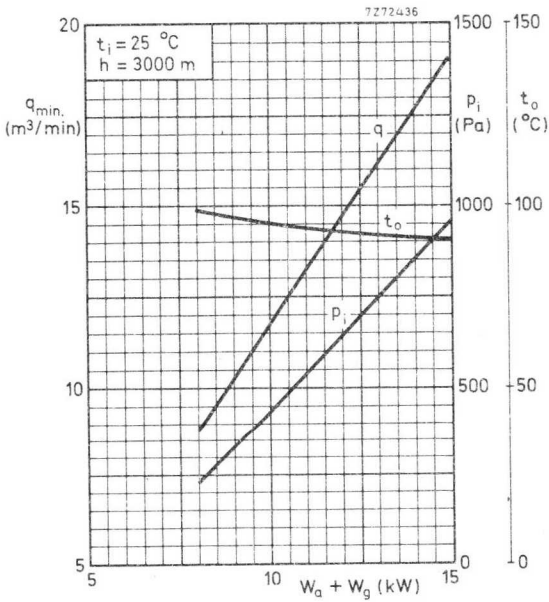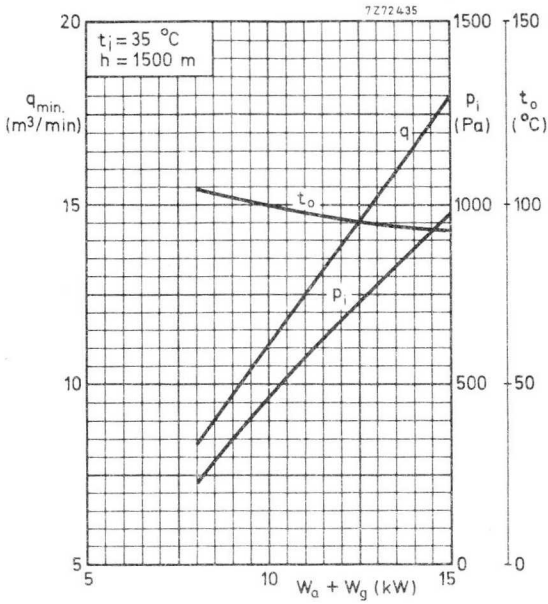

YD1185

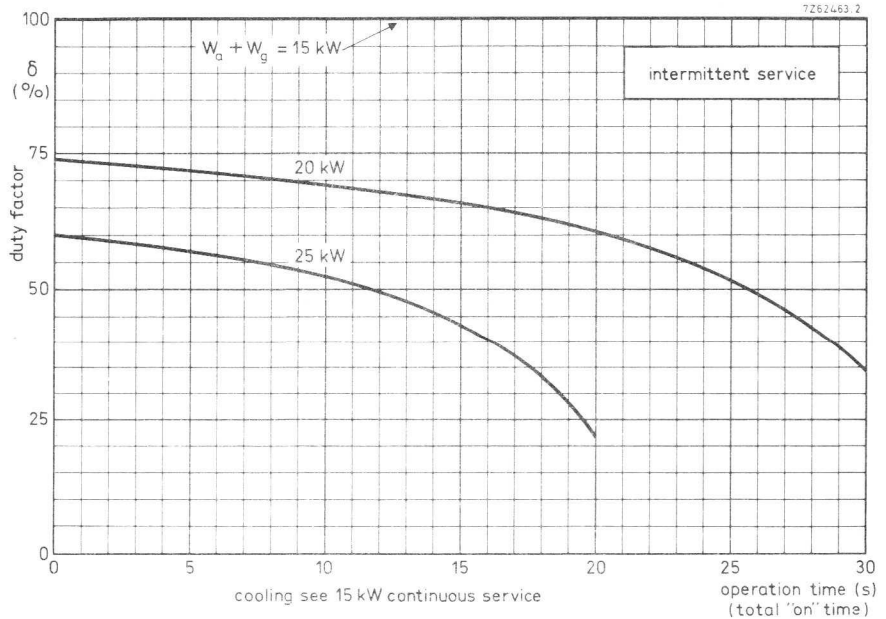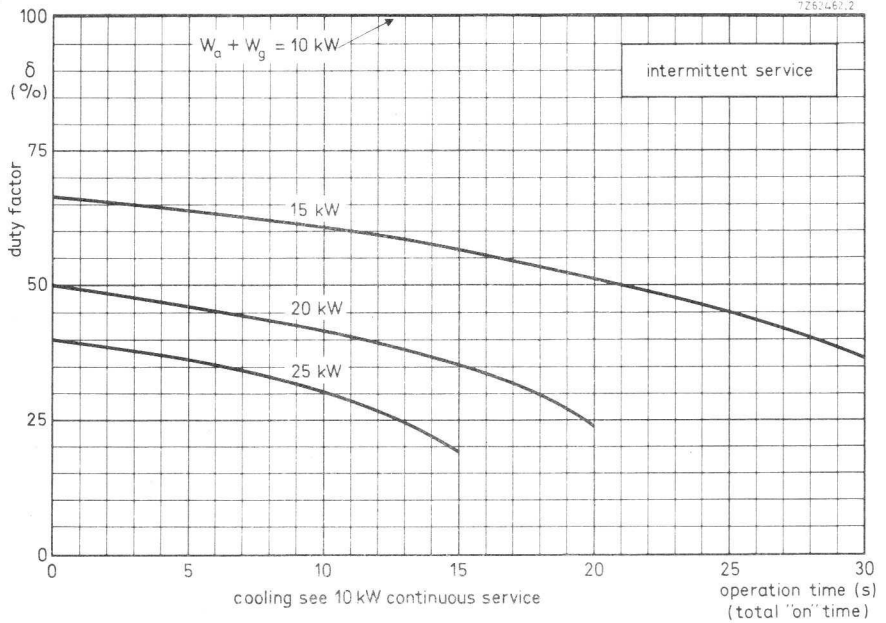

YD1187

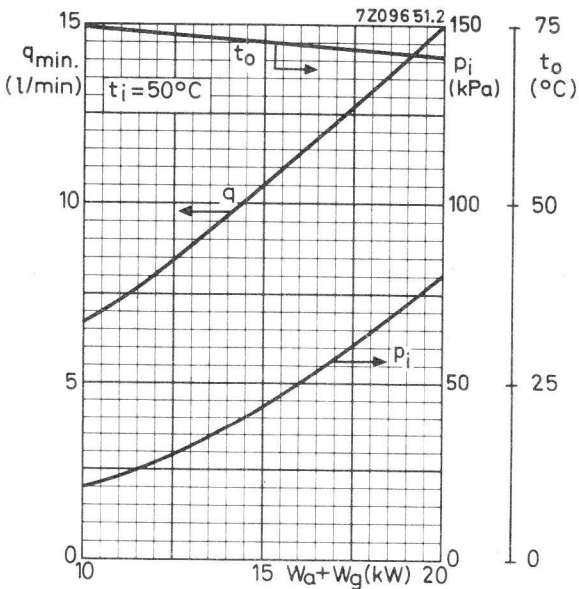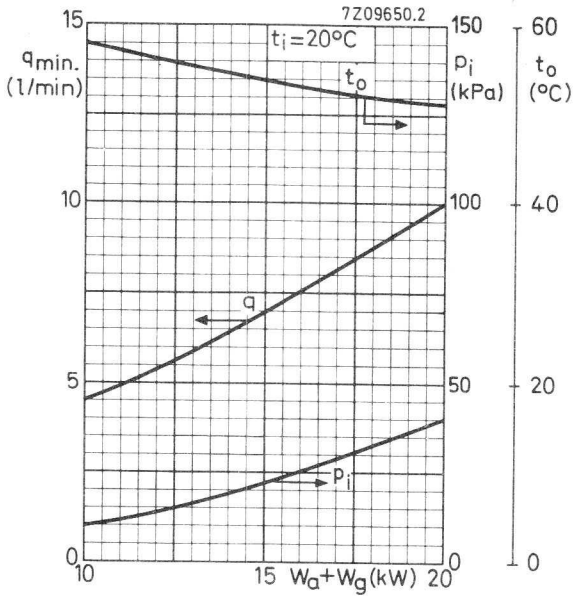

INDUSTRIAL R.F. TRIODE

Triode in metal-ceramic construction intended for use as industrial oscillator. The YD1192 has an integral water cooler.

QUICK REFERENCE DATA

Oscillator output power ($W_O - W_{\text{feedb}}$)	W_{Osc}	62,7 kW
Frequency for full ratings	f max	100 MHz

To be read in conjunction with "General Operational Recommendations Transmitting Tubes for Communication; Tubes for R.F. Heating".

R.F. CLASS-C OSCILLATOR FOR INDUSTRIAL USE

OPERATING CONDITIONS

Frequency	f	30 MHz
Oscillator output power ($W_O - W_{\text{feedb}}$)	W_{Osc}	62,7 kW
Anode voltage	V_a	8 kV
Anode current	I_a	10 A
Anode input power	W_{i_a}	80 kW
Anode dissipation	W_a	15 kW
Anode output power	W_O	65 kW
Anode efficiency	η_a	81,2 %
Oscillator efficiency	η_{Osc}	78,4 %
Feedback ratio	$V_{\text{gp}}/V_{\text{ap}}$	14,6 %
Grid resistor	R_g	300 Ω
Grid current, on load	I_g	2,25 A
Grid voltage, negative	$-V_g$	675 V
Grid dissipation	W_g	750 W
Grid resistor dissipation	W_{Rg}	1,52 kW

LIMITING VALUES (Absolute maximum rating system)

Frequency for full ratings	f	up to	100 MHz *
Anode voltage	V_a	max	9,6 kV
Anode current	I_a	max	12 A
Anode input power	W_{ia}	max	96 kW
Anode dissipation	W_a	max	40 kW
Grid voltage	$-V_g$	max	1,5 kV
Grid current, on load	I_g	max	2,5 A
Grid current, off load	I_g	max	3,5 A
Grid dissipation	W_g	max	1 kW
Grid circuit resistance	R_g	max	10 k Ω
Cathode current, mean	I_k	max	14 A
Cathode current, peak	I_{kp}	max	70 A
Envelope temperature	t_{env}	max	240 °C

HEATING: direct; thoriated tungsten filament

Filament voltage	V_f		8,4 V
Filament current	I_f		235 A
Peak filament starting current	I_{fp}	max	1500 A
Cold filament resistance	R_{fo}		3,9 m Ω

The filament is designed to accept temporary fluctuations of +5% and -10%.

To ensure that the cathode temperature remains constant irrespective of the operating frequency, it may be necessary to reduce the filament voltage at higher frequencies. When doing so it must be borne in mind that the filament voltage-to-current ratio measured with only the filament voltage applied should remain constant under all operating conditions.

It is extremely important that the filament be properly decoupled. This should be so done that the resonance of the circuit formed by the filament and decoupling elements remains below the fundamental oscillator frequency. In grounded-grid circuits this resonance should be below the grid-to-cathode resonance. For further information please see Application Book "Tubes for R.F. heating" or contact the manufacturer.

* When the tube has to be used at frequencies above 30 MHz the manufacturer should be consulted for more detailed information.

CAPACITANCES

Anode to filament	C_{af}	1,3 pF
Grid to filament	C_{gf}	100 pF
Anode to grid	C_{ag}	45 pF

CHARACTERISTICS measured at $V_a = 8$ kV, $I_a = 6$ A

Transconductance	S	90 mA/V
Amplification factor	μ	35

COOLING

To obtain optimum life, the temperature of the seals and the envelope should, under normal operating conditions, be kept below 200 °C. At low frequencies the seals are sufficiently cooled when the filament connectors are water cooled by a flow of about 0,5 l/min. At higher frequencies, however, an additional air flow of about 1 m³/min must be led along the seals from a 30 mm diameter nozzle positioned at a distance of 200 mm from the tube header.

See also cooling curves

Anode + grid dissipation $W_a + W_g$ kW	Inlet temperature t_i °C	Rate of flow q_{min} l/min	Pressure drop p_i kPa *	Outlet temperature t_o °C
40	20	20	40	51
	50	30	80	71
30	20	14	21	53
	50	21	43	72
20	20	9	10	56
	50	13,5	20	74

Absolute maximum water inlet temperature	t_i max	50 °C
Absolute maximum water pressure	p max	600 kPa *

ACCESSORIES

Filament connector with cable	type 40705A	net mass	700 g
Filament/cathode connector with cable	type 40706A	net mass	830 g
Grid connector $f \leq 4$ MHz	type 40707	net mass	75 g
	$f > 4$ MHz	type 40736	net mass




* 100 kPa \approx 1 at.

MECHANICAL DATA

Dimensions in mm


Mounting position: Vertical with anode up or down



Net mass: $\approx 5,8$ kg

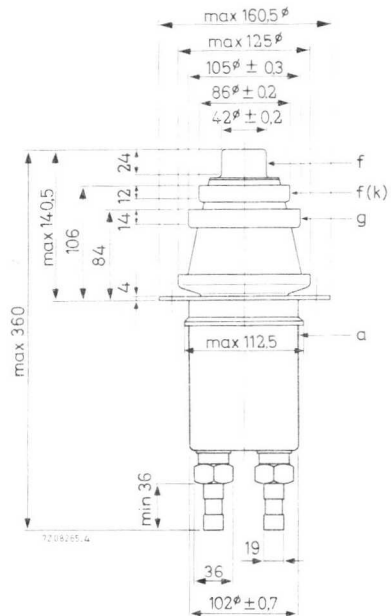

Thread of water connections BSP 1 in

With anode up the inlet and outlet connections should be interchanged.

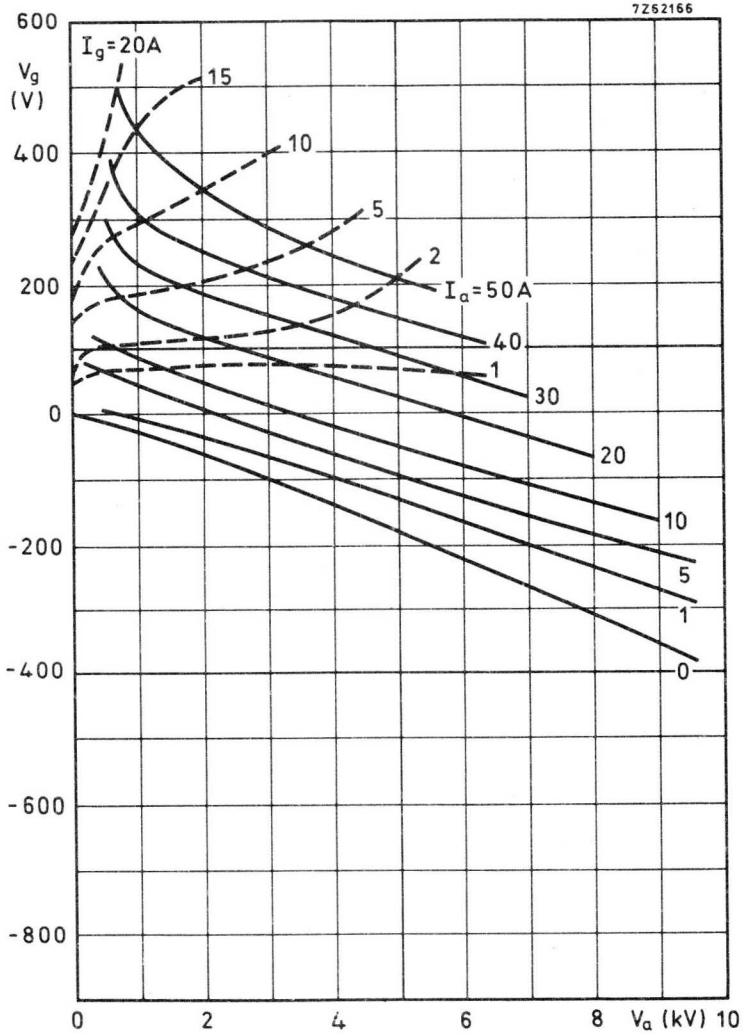

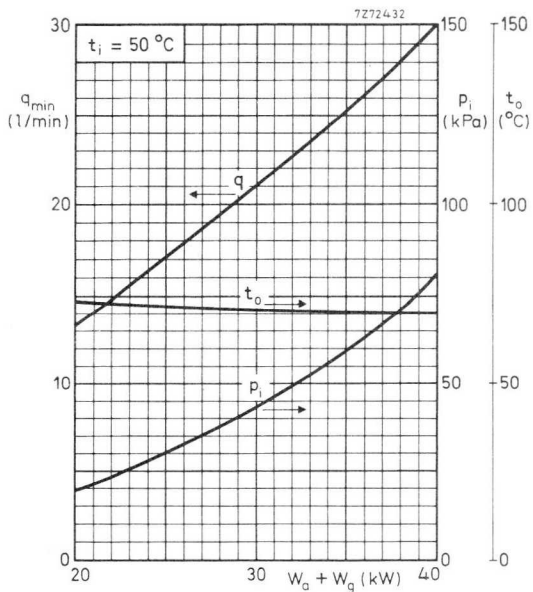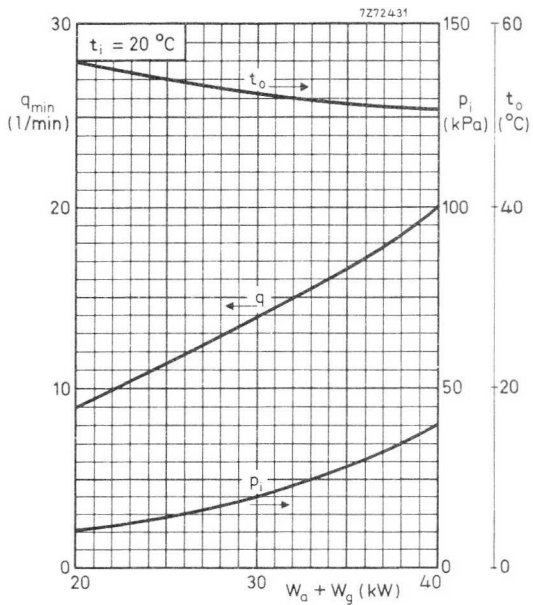

INDUSTRIAL R.F. TRIODE

Triodes in metal-ceramic construction intended for use as industrial oscillators.
The YD1195 is forced-air cooled.
The YD1197 has an integral water cooler.

QUICK REFERENCE DATA

Oscillator output power ($W_o - W_{\text{feedb}}$), typical	YD1195	W_{osc}	90	kW
	YD1197	W_{osc}	107,6	kW
Frequency for full ratings		f	max.	30 MHz

R.F. CLASS C OSCILLATOR FOR INDUSTRIAL USE

OPERATING CONDITIONS

Frequency	f	30	30	30	30	MHz
Oscillator output power ($W_o - W_{\text{feedb}}$)	W_{osc}	60,6	74	90	107,6	kW
Anode voltage	V_a	8,5	10	12	12	kV
Anode current	I_a	10	10	9,75	12	A
Anode input power	W_{ia}	85	100	117	144	kW
Anode dissipation	W_a	22,4	24	24,9	34	kW
Anode output power	W_o	62,6	76	92,1	110	kW
Anode efficiency	η_a	73,6	76	78,8	76,4	%
Oscillator efficiency	η_{osc}	71,2	74	77	74,7	%
Feedback ratio	$V_{\text{gp}}/V_{\text{ap}}$	12,5	10,9	9,4	11	%
Grid resistor	R_g	210	240	260	230	Ω
Grid current, on load	I_g	2,4	2,3	2,3	2,6	A
Grid voltage, negative	$-V_g$	500	550	600	600	V
Grid dissipation	W_g	760	730	720	840	W
Grid resistor dissipation	W_{Rg}	1,2	1,27	1,38	1,56	kW

LIMITING VALUES (Absolute max. ratings system)

Frequency		f	up to	100	MHz ¹⁾
Anode voltage		V_a	max.	14,4	kV
Anode current	YD1195	I_a	max.	12	A
	YD1197	I_a	max.	15	A
Anode input power	YD1195	W_{ia}	max.	144	kW
	YD1197	W_{ia}	max.	150	kW
Anode dissipation, continuous service intermittent service	YD1195	W_a	max.	30	kW
	YD1195		see curves		
Anode dissipation	YD1197	W_a	max.	50	kW
Grid voltage		$-V_g$	max.	1,5	kV
Grid current, on load off load on load off load	YD1195	I_g	max.	2,5	A
		I_g	max.	3,5	A
	YD1197	I_g	max.	2,8	A
		I_g	max.	3,8	A
Grid dissipation	YD1195	W_g	max.	1	kW
Grid circuit resistance		R_g	max.	10	k Ω
Cathode current, mean peak mean peak	YD1195	I_k	max.	14	A
		I_{kp}	max.	70	A
	YD1197	I_k	max.	17,5	A
		I_{kp}	max.	70	A
Envelope temperature		t_{env}	max.	240	$^{\circ}C$

HEATING : direct; thoriated tungsten filament, mesh construction

Filament voltage	V_f	8,4	V
Filament current	I_f	235	A
Peak filament starting current	I_{fp}	max. 1500	A
Cold filament resistance	R_{fo}	3,9	m Ω

The filament is designed to accept temporary fluctuations of +5% and -10%.

1) When the tubes are to be used at frequencies above 30 MHz the manufacturer should be consulted for more detailed information.

To ensure that the cathode temperature remains constant irrespective of the operating frequency it may be necessary to reduce the filament voltage at higher frequencies. When doing so it must be borne in mind that the filament voltage-to-current ratio measured with only the filament voltage applied should remain constant under all operating conditions.

It is extremely important that the filament be properly decoupled. This should be so done that the resonance of the circuit formed by the filament and decoupling elements remains below the fundamental oscillator frequency. In grounded-grid circuits this resonance should be below the grid-cathode resonance. For further information please see Application Book "Tubes for R.F. heating" or contact the manufacturer.

CAPACITANCES

Anode to filament	C_{af}	1, 2	pF
Grid to filament	C_{gf}	100	pF
Anode to grid	C_{ag}	33	pF

CHARACTERISTICS measured at $V_a = 12$ kV, $I_a = 3$ A

Transconductance	S	80	mA/V
Amplification factor	μ	50	

COOLING

YD1195

Anode + grid dissipation $W_a + W_g$ (kW)	Altitude h (m)	Inlet temperature t_i (°C)	Rate of flow q_{min} (m ³ /min)	Pressure drop P_i (Pa*)	Outlet temperature t_o (°C)
30	0	35	34	1200	84
25	0	35	27, 2	780	87
20	0	35	21, 4	480	89
30	0	45	38	1500	91
25	0	45	30, 4	980	93
20	0	45	23, 9	600	95
30	1500	35	41	1380	84
25	1500	35	32, 7	900	87
20	1500	35	25, 7	550	89
30	3000	25	43	1350	79
25	3000	25	34, 4	880	83
20	3000	25	27	540	85

* 1 Pa \approx 0, 1 mm H₂O.

The above cooling conditions apply to the air flow direction as indicated in the outline drawing. In case of reversed flow direction a larger air volume will be required to keep the anode temperature below the limiting value.

To obtain optimum life, the temperature of the seals and the envelope should, under normal operating conditions, be kept below 200 °C.

YD1197

See also cooling curves

Anode + grid dissipation $W_a + W_g$ (kW)	Inlet temperature t_i (°C)	Rate of flow q_{min} (ℓ /min)	Pressure drop P_i (kPa ^{*)})	Outlet temperature t_i (°C)
50	20	26	60	49
	50	39	123	69
40	20	20	40	51
	50	30	80	71
30	20	14	24	53
	50	21	43	72
20	20	9	10	56
	50	13,5	20	74

Absolute max. water inlet temperature t_i max. 50 °C

Absolute max. water pressure p max. 600 kPa(abs)

To obtain optimum life, the temperature of the seals and the envelope should, under continuously loaded conditions, be kept below 200 °C.

At low frequencies the seals are sufficiently cooled when the filament connectors are water cooled with a flow of about 0,5 ℓ/min. At higher frequencies, however, an additional air flow of about 1 m³/min must be led along the seals from a 30 mm diameter nozzle positioned at a distance of 200 mm from the tube header.

→ **ACCESSORIES**

Filament connector with cable	type	40705A	net mass	700 g
Filament/cathode connector with cable	type	40706A	net mass	830 g
Grid connector	type	40736	net mass	450 g
Insulating pedestal (YD1195 only)	type	40729	net mass	8,2 g

*100 kPa ≈ 1 at.


YD1195

MECHANICAL DATA

Dimensions in mm

Mounting position : vertical with anode up or down

Net mass : approx. 20 kg

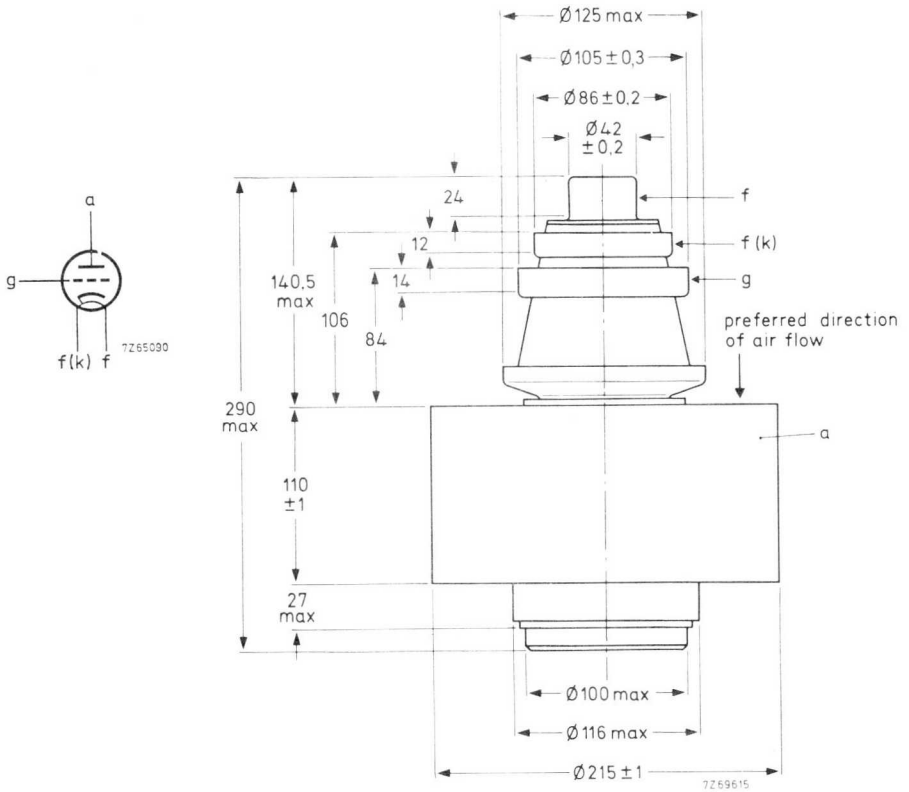

YD1195
YD1197


YD1197

MECHANICAL DATA

Dimensions in mm


Mounting position : vertical with anode up or down

Net mass : approx. 6,5 kg

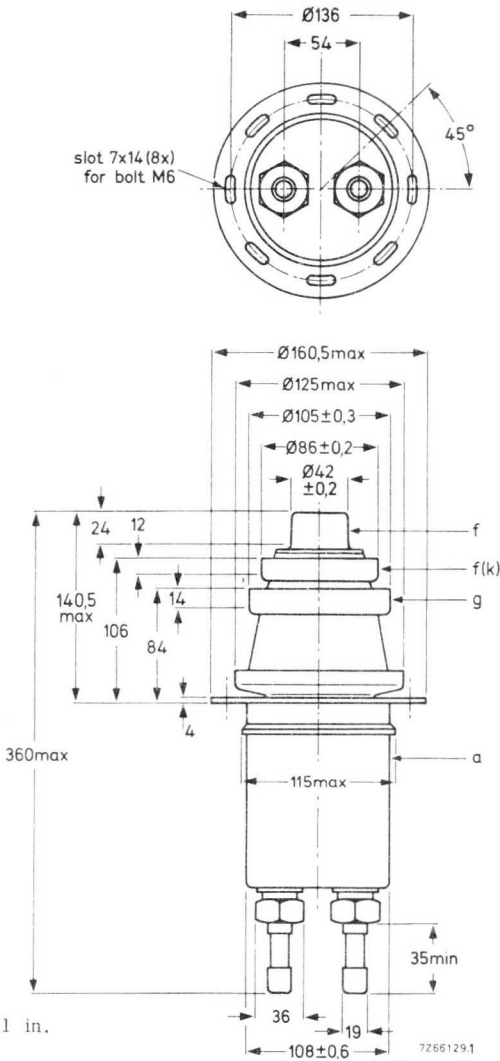


Thread of water connections BSP 1 in.

With the anode up the water connections should be interchanged.

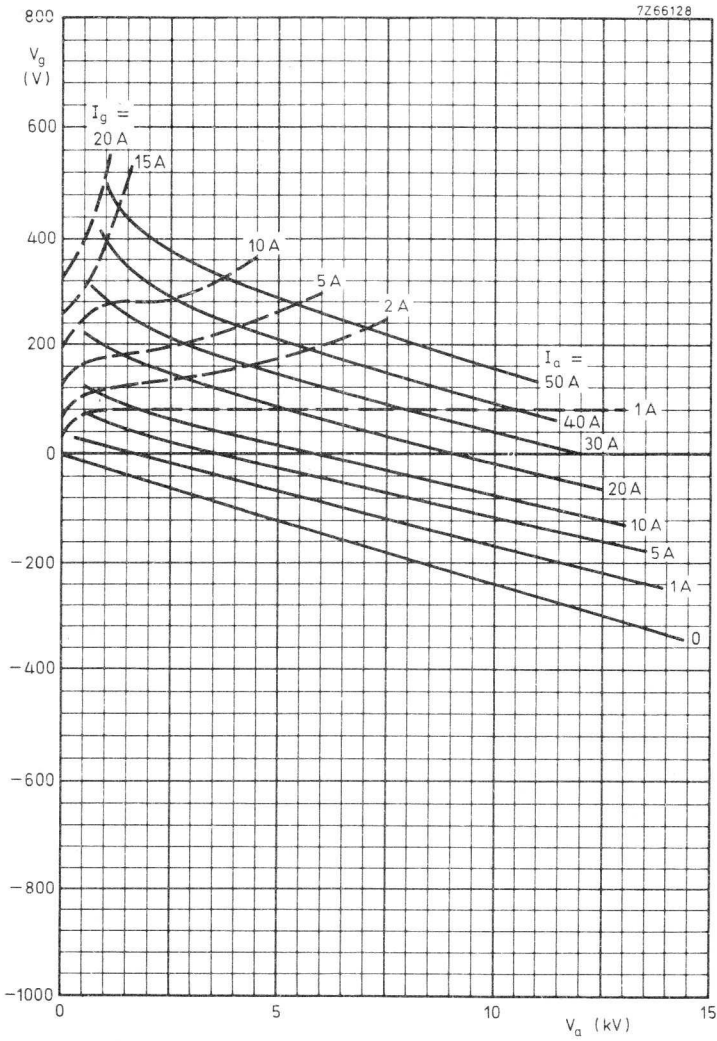


YD1195


7265309


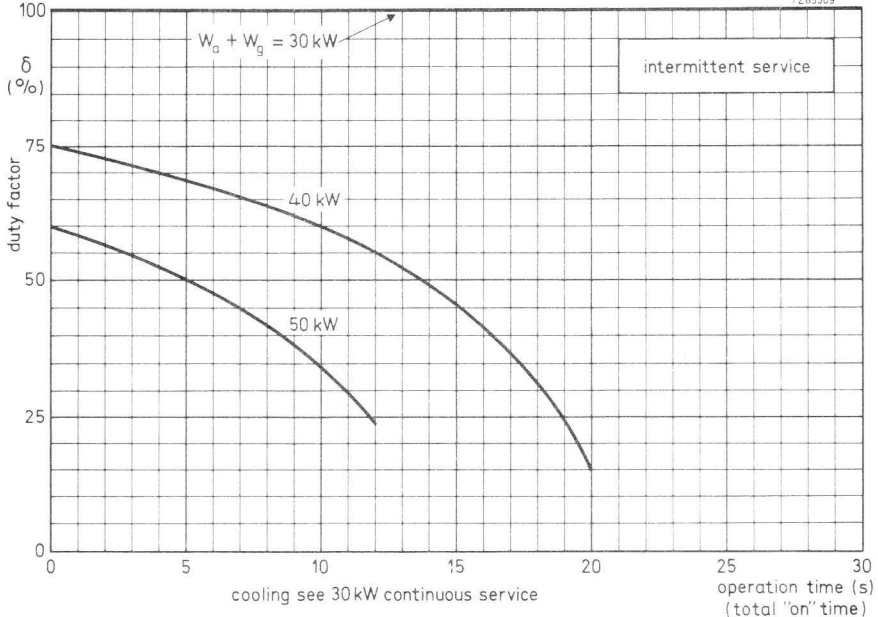


7265308

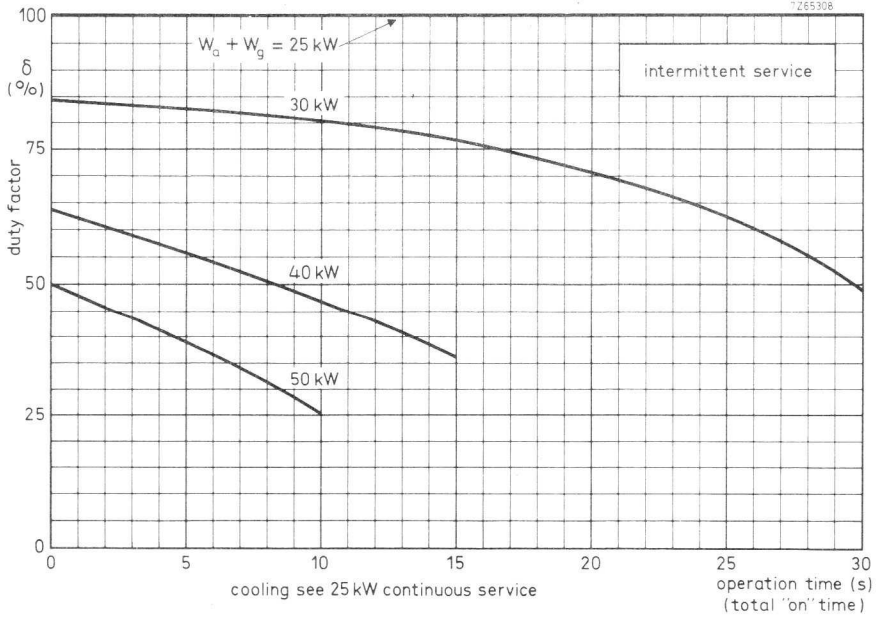

YD1195

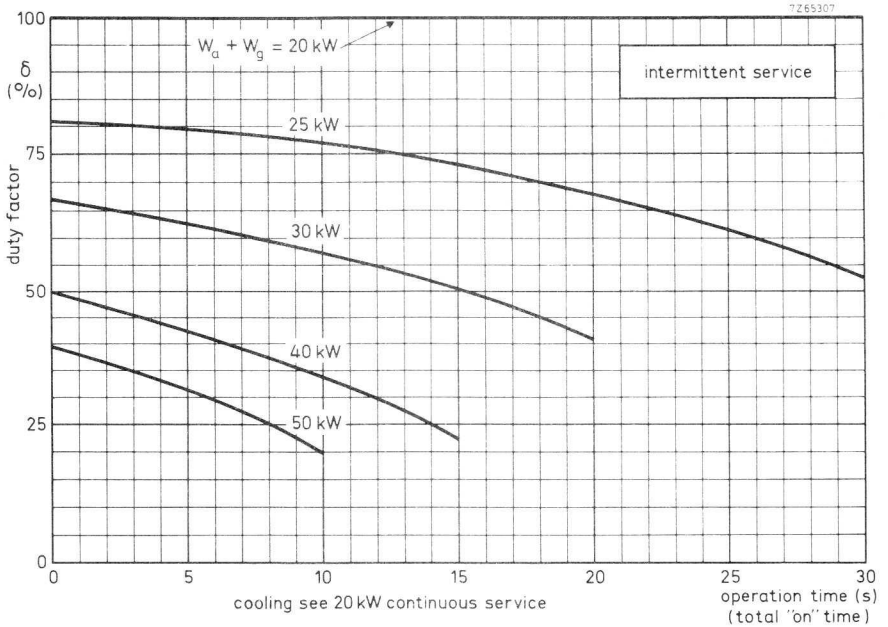

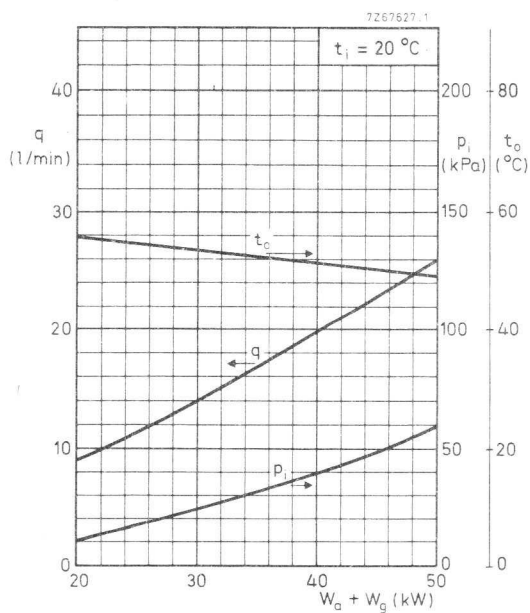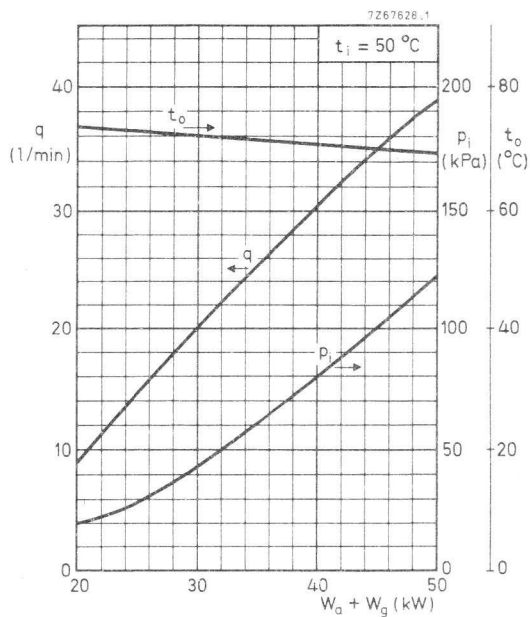

100 kPa \approx 1 at

INDUSTRIAL R.F. TRIODES

Triodes in metal-ceramic construction intended for use as industrial oscillators. The YD1202 has an integral water cooler. The YD1203 is vapour cooled.

QUICK REFERENCE DATA

Oscillator output power ($W_o - W_{\text{feedb}}$), typical	W_{osc}	163 kW
Frequency for full ratings	f max	30 MHz

To be read in conjunction with "General Operational Recommendations Transmitting Tubes for Communication, Tubes for R.F. Heating".

R.F. CLASS-C OSCILLATOR FOR INDUSTRIAL USE

OPERATING CONDITIONS

Frequency	f	30	30 MHz
Oscillator output power ($W_o - W_{\text{feedb}}$)	W_{osc}	120	163 kW
Anode voltage	V_a	10	12 kV
Anode current	I_a	16	18 A
Anode input power	W_{ia}	160	216 kW
Anode dissipation	W_a	36	47 kW
Anode output power	W_o	124	169 kW
Anode efficiency	η_a	77,5	78 %
Oscillator efficiency	η_{osc}	75	75,4 %
Feedback ratio	V_{gp}/V_{ap}	12,8	14 %
Grid resistor	R_g	200	225 Ω
Grid current, on load	I_g	3,5	4 A
Grid voltage, negative	$-V_g$	700	900 V
Grid dissipation	W_g	1,5	2 kW
Grid resistor dissipation	W_{Rg}	2,45	3,6 kW

LIMITING VALUES (Absolute maximum rating system)

Frequency for full ratings	f	up to	100 MHz*
Anode voltage	V_a	max	15 kV
Anode current	I_a	max	19 A
Anode input power	W_{ia}	max	220 kW
Anode dissipation	W_a	max	80 kW
Grid voltage	$-V_g$	max	2 kV
Grid current, on load	I_g	max	5 A
Grid current, off load	I_g	max	7 A
Grid dissipation	W_g	max	2,5 kW
Grid circuit resistance	R_g	max	10 k Ω
Cathode current, mean	I_k	max	24 A
Cathode current, peak	I_{kp}	max	100 A
Envelope temperature	t_{env}	max	240 °C

HEATING: direct; thoriated tungsten filament

Filament voltage	V_f		12,2 V
Filament current	I_f		250 A
Peak filament starting current	I_{fp}	max	1500 A
Cold filament resistance	R_{f0}		5,3 m Ω

The filament is designed to accept temporary fluctuations of +5% and -10%.

To ensure that the cathode temperature remains constant irrespective of the operating frequency, it may be necessary to reduce the filament voltage at higher frequencies. When doing so it must be borne in mind that the filament voltage-to-current ratio measured with only the filament voltage applied should remain constant under all operating conditions.

It is extremely important that the filament be properly decoupled. This should be so done that the resonance of the circuit formed by the filament and decoupling elements remains below the fundamental oscillator frequency. In grounded-grid circuits this resonance should be below the grid-cathode resonance. For further information please see Application Book "Tubes for R.F. heating" or contact the manufacturer.

* When the tubes are to be used at frequencies above 30 MHz the manufacturer should be consulted for more detailed information.

CAPACITANCES

Anode to filament
Grid to filament
Anode to grid

C_{af} 2,7 pF
 C_{gf} 170 pF
 C_{ag} 55 pF

CHARACTERISTICS measured at $V_a = 10$ kV, $I_a = 8$ A

Transconductance
Amplification factor

S 150 mA/V
 μ 30

COOLING

To obtain optimum life, the temperature of the seals and the envelope should, under continuously loaded conditions, be kept below 200 °C.

At frequencies up to about 4 MHz the seals are sufficiently cooled if the filament connectors are water-cooled by a flow of about 0,5 ℓ/min.

At higher frequencies however, an additional airflow of about 4 m³/min must be led along the seals from a 50 mm diameter nozzle positioned at a distance of 250 mm from the tube header.

YD1202

See also cooling curves

anode + grid dissipation $W_a + W_g$ kW	inlet temperature t_i °C	rate of flow q_{min} ℓ/min	pressure drop p_i kPa*	outlet temperature t_o °C
100	20	52	55	49
	50	78	105	69
80	20	39	32	51
	50	60	65	70
60	20	29	19	52
	50	42	32	72
40	20	18	8	54
	50	27	15	73

Absolute maximum water inlet temperature

t_i max 50 °C

Absolute maximum water pressure

p max 600 kPa*

* 100 kPa \approx 1 at.

YD1203

See also cooling curves.

With integrated boiler condenser type K735.

anode + grid dissipation $W_a + W_g$ kW	inlet temperature t_i °C	rate of flow q_{min} ℓ/min	pressure drop p_i kPa*	outlet temperature t_o °C
80	20	29	20	60
	35	48	51	59
60	20	16	8	75
	35	24	14	72
	50	45	45	70
40	20	10	4	80
	35	13,5	6	80
	50	20	10	80

Absolute maximum water inlet temperature

t_i 50 °C

ACCESSORIES

Filament connector with cable	type 40695A	net mass	1,4 kg
Filament/cathode connector with cable	type 40696A	net mass	1,6 kg
Grid connector	type 40737	net mass	525 g
Boiler condenser (YD1203 only)	type K735	net mass	70 kg
Water level control (YD1203 only)	type 40735	net mass	8,5 kg




* 100 kPa \approx 1 at.

MECHANICAL DATA

YD1202

Mounting position: vertical, anode up or down

Net mass: approx. 11,5 kg

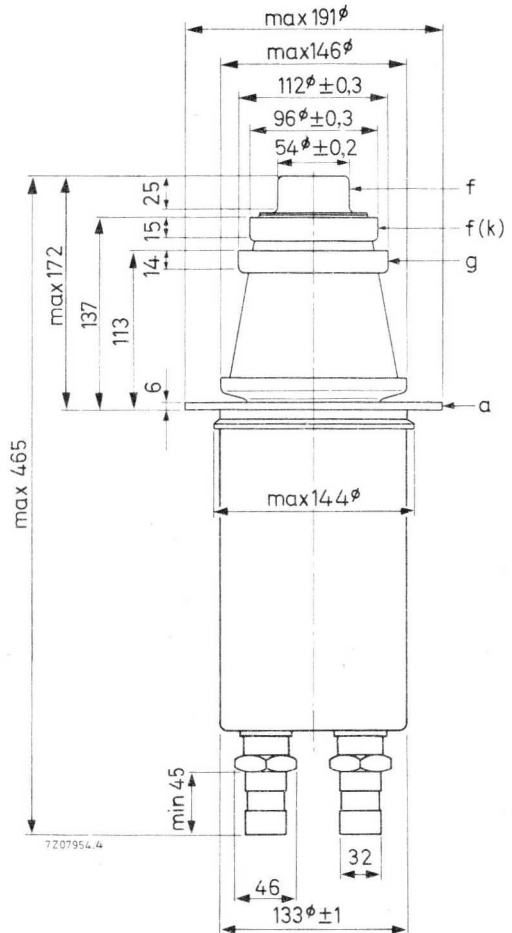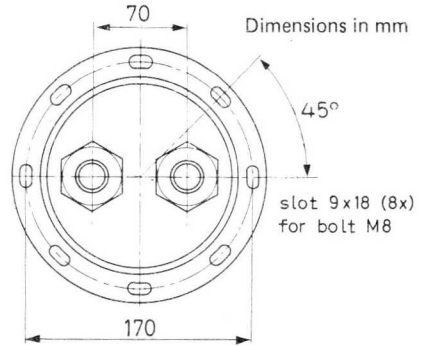

Thread of water connections 1 1/4 in.


With the anode up the water inlet and outlet connections should be interchanged.

YD1202
YD1203


YD1203



Mounting position: vertical with anode down

Net mass: approx. 19,8 kg

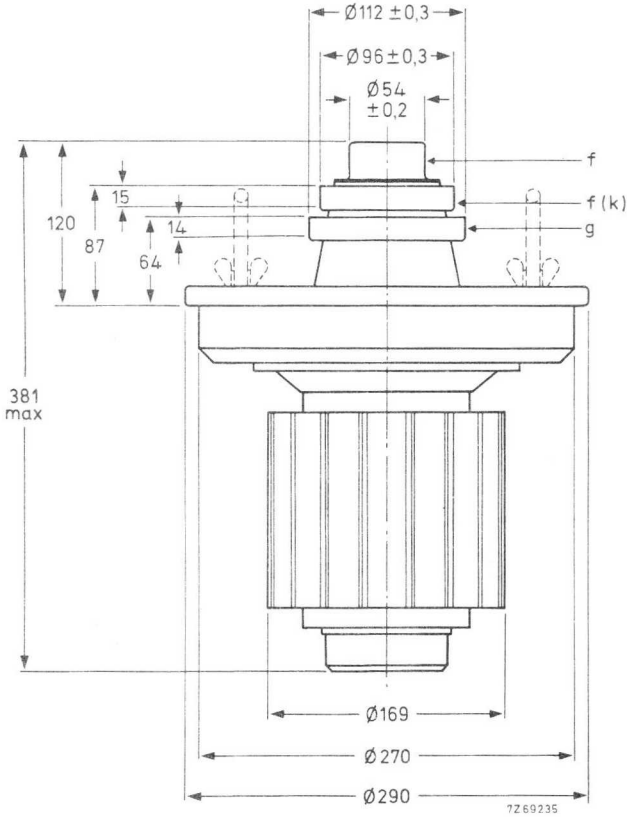

Note: The handles should be removed before switching on the tube.

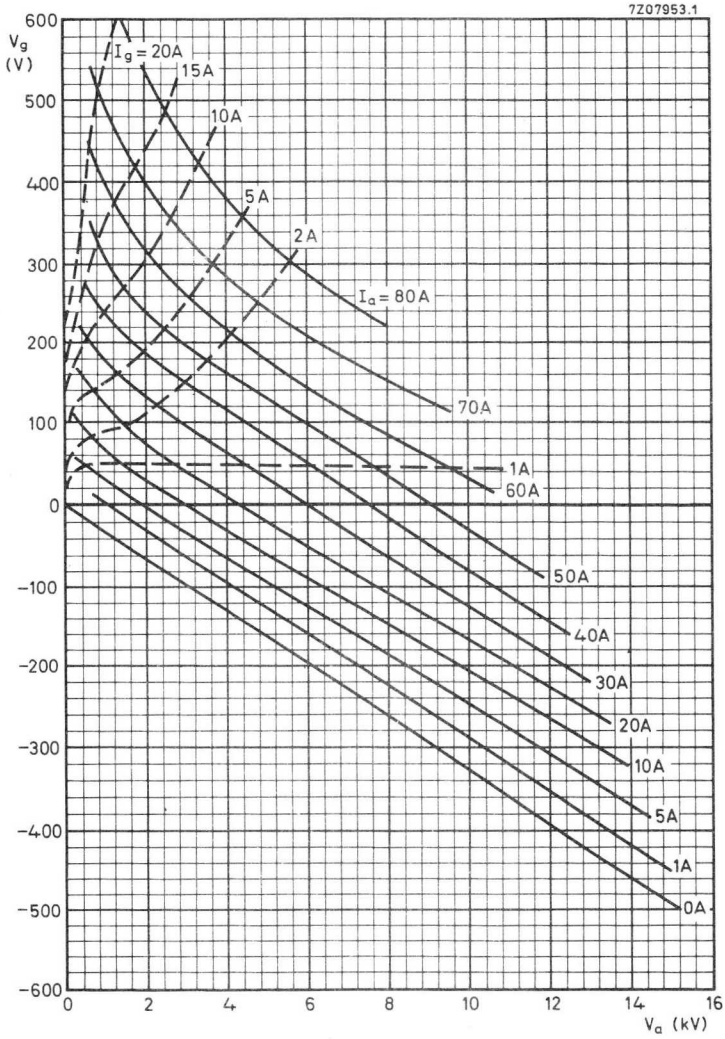


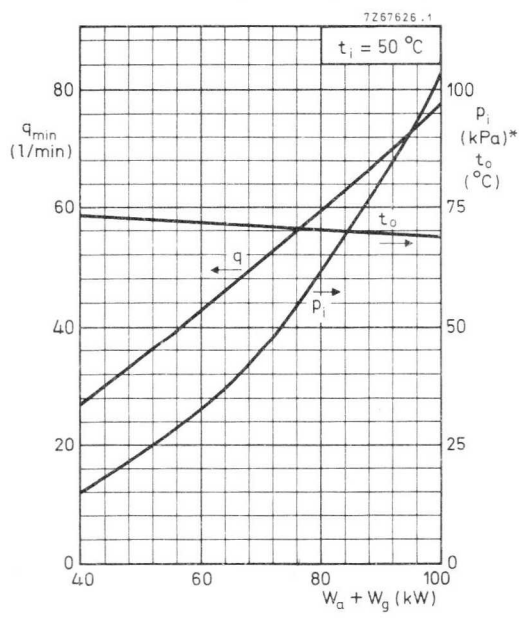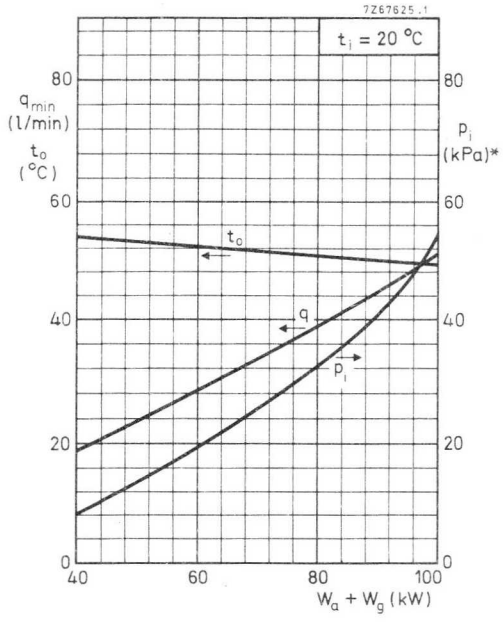


* 100 kPa \approx 1 at.

YD1203


7Z10655.1

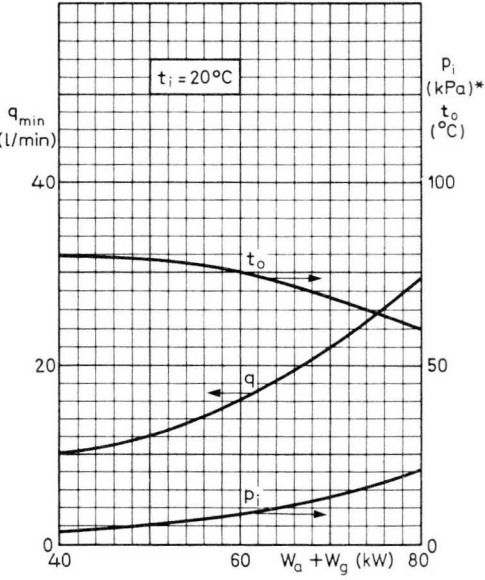

7Z10656.1

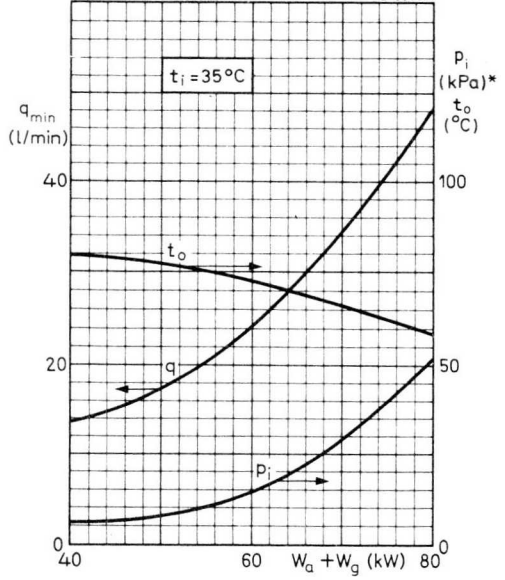

7Z10657.1

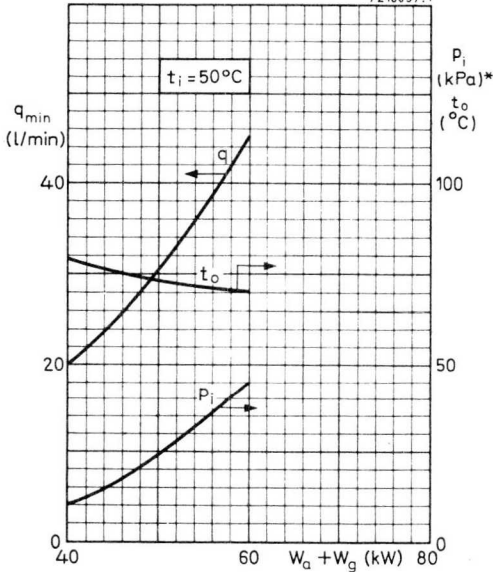

* 100 kPa \approx 1 at.

INDUSTRIAL R.F. TRIODE

Triodes in metal-ceramic construction intended for use as industrial oscillators.
The YD1212 has an integral water cooler.
The YD1213 is vapour cooled.

QUICK REFERENCE DATA

Oscillator output power ($W_o - W_{\text{feedb}}$), typical	W_{osc}	240	kW
Frequency for full ratings	f	max. 100	MHz

To be read in conjunction with "General Operational Recommendations Transmitting Tubes for Communication, Tubes for R. F. Heating".

R.F. CLASS C OSCILLATOR FOR INDUSTRIAL USE

OPERATING CONDITIONS

Frequency	f	30	MHz
Oscillator output power ($W_o - W_{\text{feedb}}$)	W_{osc}	240	kW
Anode voltage	V_a	14	kV
Anode current	I_a	23,5	A
Anode input power	W_{ia}	329	kW
Anode dissipation	W_a	81,5	kW
Anode output power	W_o	247,5	kW
Anode efficiency	η_a	75,2	%
Oscillator efficiency	η_{osc}	73	%
Feedback ratio	$V_{\text{gp}}/V_{\text{ap}}$	10,4	%
Grid resistor	R_g	135	Ω
Grid current, on load	I_g	6	A
Grid voltage, negative	V_g	-810	V
Grid dissipation	W_g	2,6	kW
Grid resistor dissipation	W_{Rg}	4,86	kW

LIMITING VALUES (Absolute max. rating system)

Frequency for full ratings	f	up to	100	MHz ¹⁾
Anode voltage	V _a	max.	16,8	kV
Anode current	I _a	max.	25	A
Anode input power	W _{ia}	max.	375	kW
Anode dissipation	W _a	max.	120	kW
Grid voltage	-V _g	max.	2	kV
Grid current, on load off load	I _g	max.	7	A
	I _g	max.	8,5	A
Grid dissipation	W _g	max.	3	kW
Grid circuit resistance	R _g	max.	10	kΩ
Cathode current, mean peak	I _k	max.	31	A
	I _{kp}	max.	175	A
Envelope temperature	t _{env}	max.	240	°C

HEATING : direct; filament thoriated tungsten

Filament voltage	V _f		12,6	V
Filament current	I _f		380	A
Peak filament starting current	I _{fsp}	max.	2000	A
Cold filament resistance	R _{f0}		3,6	mΩ

The filament is designed to accept temporary fluctuations of +5% and -10%.

To ensure that the cathode temperature remains constant irrespective of the operating frequency, it may be necessary to reduce the filament voltage at higher frequencies. When doing so it must be borne in mind that the filament voltage-to-current ratio measured with only the filament voltage applied should remain constant under all operating conditions.

It is extremely important that the filament be properly decoupled. This should be so done that the resonance of the circuit formed by the filament and decoupling elements remains below the fundamental oscillator frequency. In grounded-grid circuits this resonance should be below the grid-cathode resonance. For further information please see Application Book "Tubes for R. F. heating" or contact the manufacturer.

CAPACITANCES

Anode to filament	C _{af}		3	pF
Grid to filament	C _{gf}		185	pF
Anode to grid	C _{ag}		60	pF

¹⁾ When the tubes are to be used at frequencies above 30 MHz the manufacturer should be consulted for more detailed information.

CHARACTERISTICS measured at $V_a = 14$ kV, $I_a = 10$ A

Transconductance	S	190 mA/V
Amplification factor	μ	40

COOLING

To obtain optimum life, the seal/envelope temperature under normal operating conditions should be kept below 200 °C.

At low frequencies the seals are sufficiently cooled if the filament connectors are water-cooled by a flow of about 0,5 ℓ /min. At higher frequencies, however, an additional airflow of about 4 m^3 /min must be led along the seals from a 50 mm diameter nozzle positioned at a distance of 250 mm from the tube header.

YD1212

See also cooling curves

Anode + grid dissipation $W_a + W_g$ (kW)	Inlet temperature t_i (°C)	Rate of flow q_{min} (ℓ /min)	Pressure drop P_i (kPa*)	Outlet temperature t_o (°C)
120	20	60	70	50
	50	90	130	77
80	20	34	30	54
	50	54	55	72
40	20	15	7	60
	50	24	13	70

Absolute max. water inlet temperature t_i 50 °C

Absolute max. water pressure p 600 kPa(abs)

YD1213

See also cooling curves

With integrated boiler condenser type K733

Anode + grid dissipation $W_a + W_g$ (kW)	Inlet temperature t_i (°C)	Rate of flow q_{min} (ℓ /min)	Pressure drop P_i (kPa*)	Outlet temperature t_o (°C)
120	20	59	84	50
	20	29	20	61
80	35	48	51	61
	20	10	4	81
40	35	13,5	6	81
	50	20	10	81

*100 kPa \approx 1 at.

→ ACCESSORIES

Filament connector with cable	type	40695A	net mass	1,4 kg
Filament/cathode connector with cable	type	40696A	net mass	1,6 kg
Grid connector $f \leq 4$ MHz $f > 4$ MHz	type	40694	net mass	270 g
	type	40737	net mass	525 g
Boiler condenser (YD1213 only)	type	K733	net mass	70 kg




MECHANICAL DATA

Dimensions in mm

YD1212

Mounting position : vertical with
anode up or down

Net mass : approx. 15,6 kg

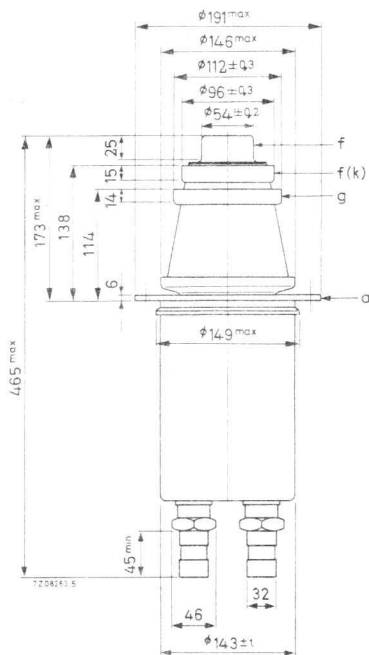


Thread of water connections BSP $1\frac{1}{4}$ in.

With anode up the water inlet and outlet connections should be interchanged.


YD1213

Mounting position : vertical with anode down



Net mass : approx. 19,8 kg

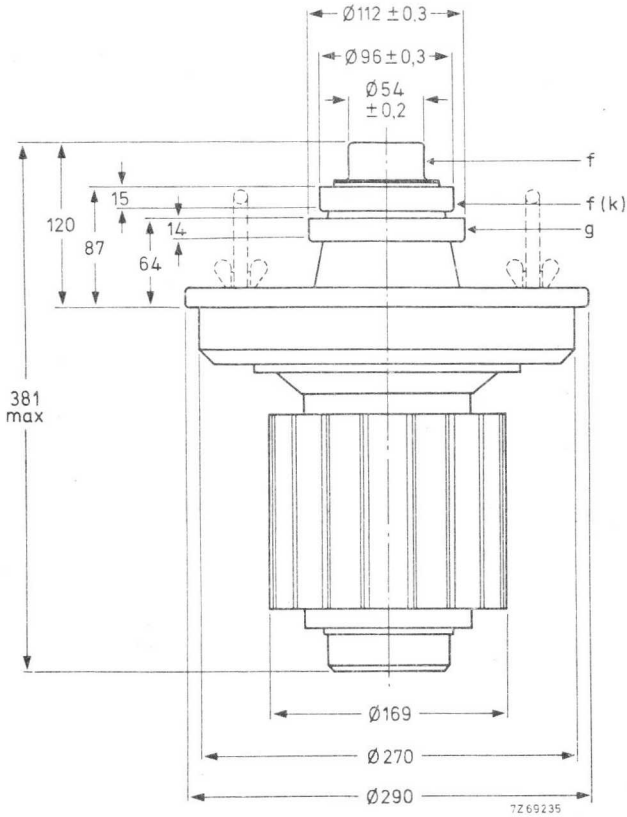

Note: The handles should be removed before switching on the tube.


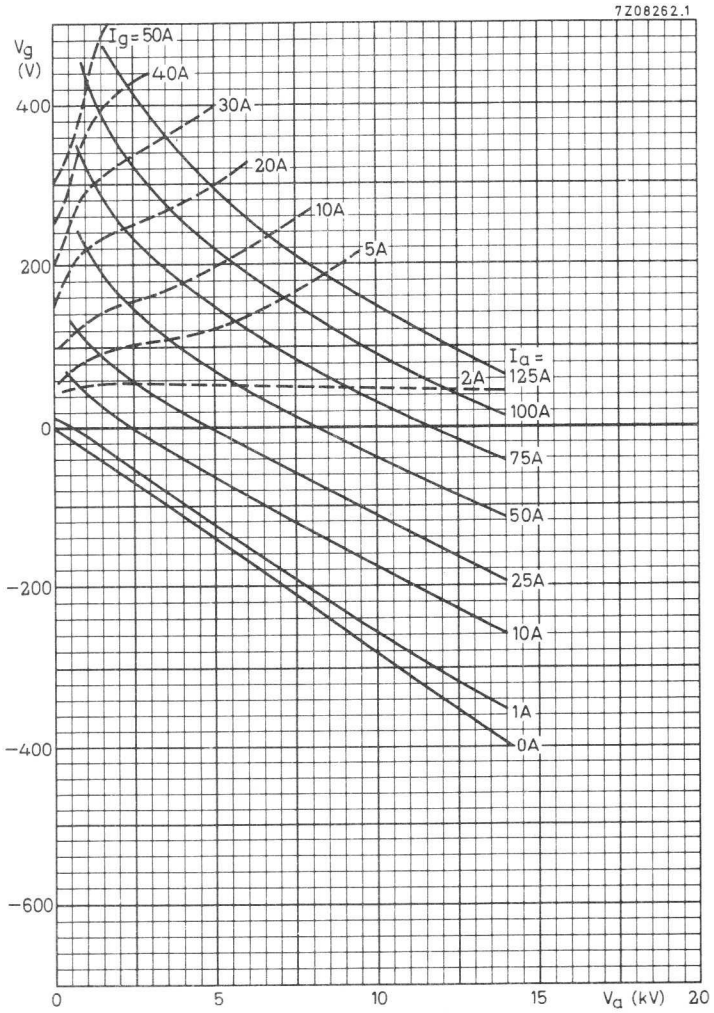


YD1212

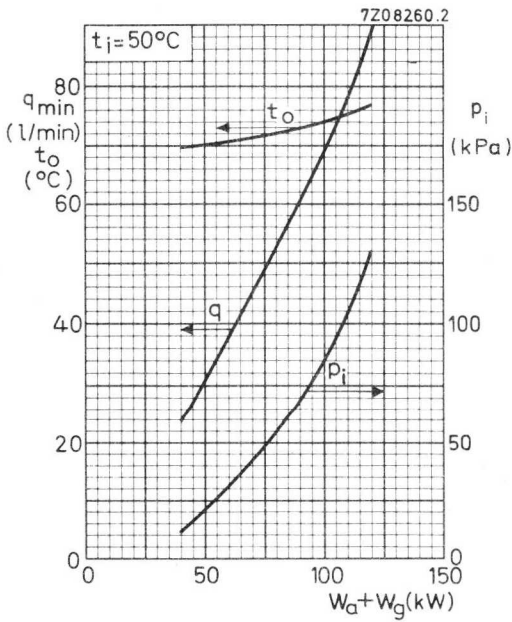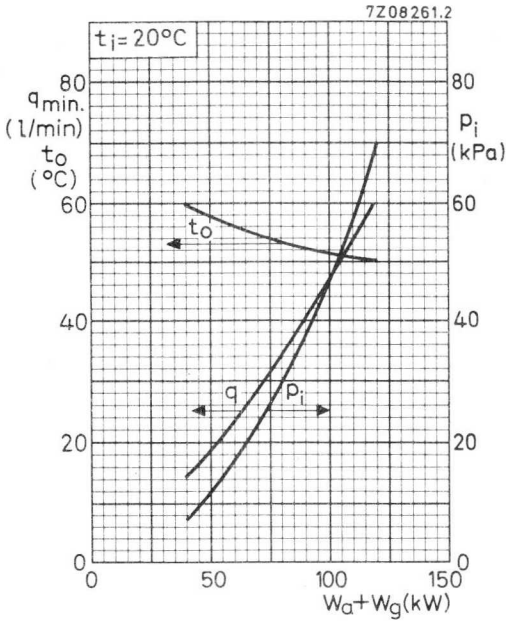

100 kPa \approx 1 at.

YD1213

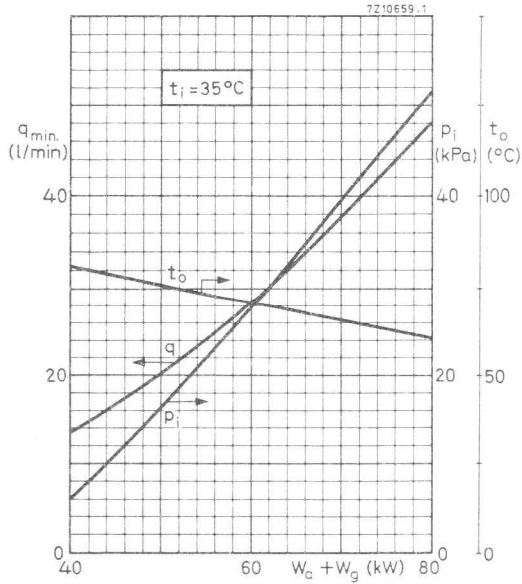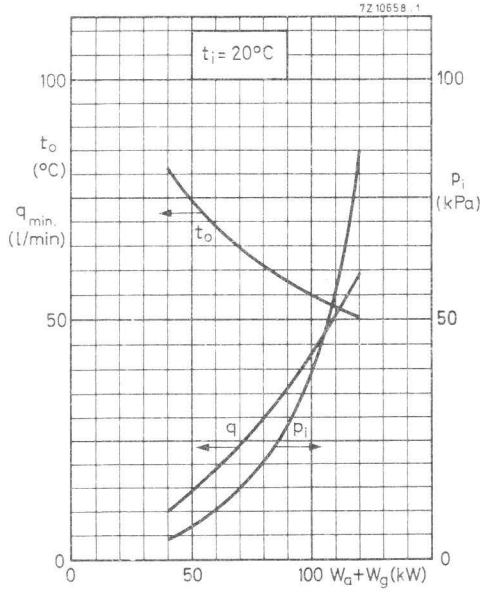

100 kPa \approx 1 at.

AIR COOLED R.F. INDUSTRIAL TRIODE

Air-cooled triode of metal-ceramic construction with integral cooler intended for use as an industrial oscillator.

QUICK REFERENCE DATA

Oscillator output power ($W_o - W_{\text{feedb}}$), typical	W_{osc}	2.67	kW
Frequency for full ratings	f	max. 250	MHz

To be read in conjunction with "General Recommendations Transmitting tubes, Tubes for R.F. heating".

R.F. CLASS C OSCILLATOR FOR INDUSTRIAL USE

OPERATING CONDITIONS

Frequency	f	160	27.12	MHz
Filament voltage	V_f	6.0	6.3	V
Oscillator output power ($W_o - W_{\text{feedb}}$)	W_{osc}	2.22	2.67	kW
Anode voltage	V_a	4.5	5.0	kV
Anode current	I_a	700	750	mA
Anode input power	W_{ia}	3.15	3.75	kW
Anode dissipation	W_a	0.75	0.83	kW
Anode output power	W_o	2.4	2.9	kW
Anode efficiency	η_a	76	78	%
Oscillator efficiency	η_{osc}	71	71	%
Feedback ratio	V_{gp}/V_{ap}	17	17	%
Grid resistor	R_g	2.2	2.2	k Ω
Grid current, on load	I_g	225	235	mA
Grid voltage, negative	$-V_g$	495	517	V
Grid dissipation	W_g	70	80	W
Grid resistor dissipation	W_{Rg}	111	121	W

LIMITING VALUES (Absolute max. rating system)

Frequency for full ratings	f	up to	250	MHz
Anode voltage	V_a	max.	5.5	kV
Anode current	I_a	max.	1.1	A
Anode input power	W_{ia}	max.	6.0	kW
Anode dissipation	W_a	max.	1.5	kW
Grid voltage	$-V_g$	max.	1.0	kV
Grid current, on load	I_g	max.	280	mA
off load	I_g	max.	400	mA
Grid dissipation	W_g	max.	150	W
Grid circuit resistance	R_g	max.	20	k Ω
Cathode current, mean	I_k	max.	1.4	A
peak	I_{kp}	max.	8	A
Envelope temperature	t_{env}	max.	240	$^{\circ}\text{C}$

HEATING :direct; filament thoriated tungsten

Filament voltage	$(f \leq 120 \text{ MHz})$	V_f	6.3	V
	$(f > 120 \text{ MHz})$	V_f	6.0	V
Filament current at $V_f = 6.3 \text{ V}$		I_f	33	A

The filament is designed to accept temporary fluctuations of +5 % and -10 %.

It is extremely important that the filament be properly decoupled. This should be so done that the resonance of the circuit formed by the filament and decoupling elements remains below the fundamental oscillator frequency. In grounded-grid circuits this resonance should be below the grid-cathode resonance. For further information please see Application Book "Tubes for R.F. heating" or contact the manufacturer.

CAPACITANCES

Anode to filament	C_{af}	0.4	pF
Grid to filament	C_{gf}	17	pF
Anode to grid	C_{ag}	14	pF

CHARACTERISTICS measured at $V_a = 2.0 \text{ kV}$, $I_a = 0.5 \text{ A}$

Transconductance	S	10	mA/V
Amplification factor	μ	20	

COOLING

See cooling curves.

A low velocity air flow directed to the seals may be required.

To obtain optimum life, the temperature of the seals and of the envelope should, under normal operating conditions, be kept below 200 °C.

To maintain these temperatures additional cooling maybe necessary. At frequencies higher than about 4 MHz cooling of the seals becomes mandatory.

ACCESSORIES



Filament connector		type	40688
Filament/cathode connector		type	40689
Grid connector	f < 30 MHz	type	40686
	f > 30 MHz	type	40687

MECHANICAL DATA


Dimensions in mm

Mounting position: vertical with anode up or down.


Net weight: approx. 1.13 kg

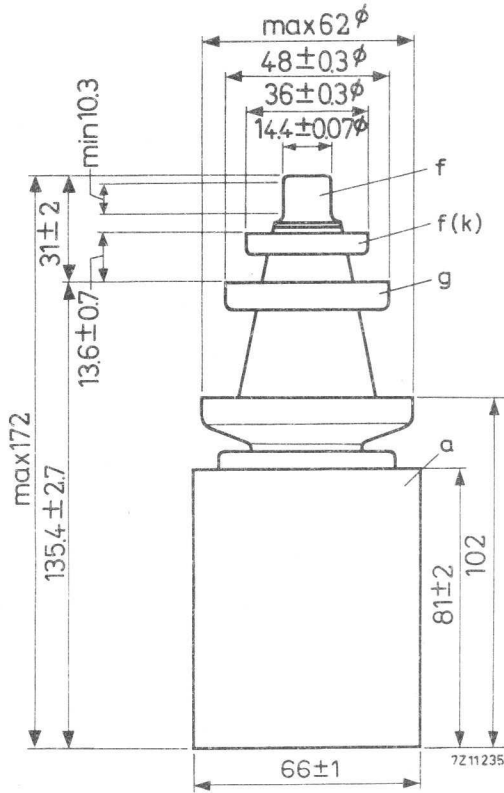


7Z07552

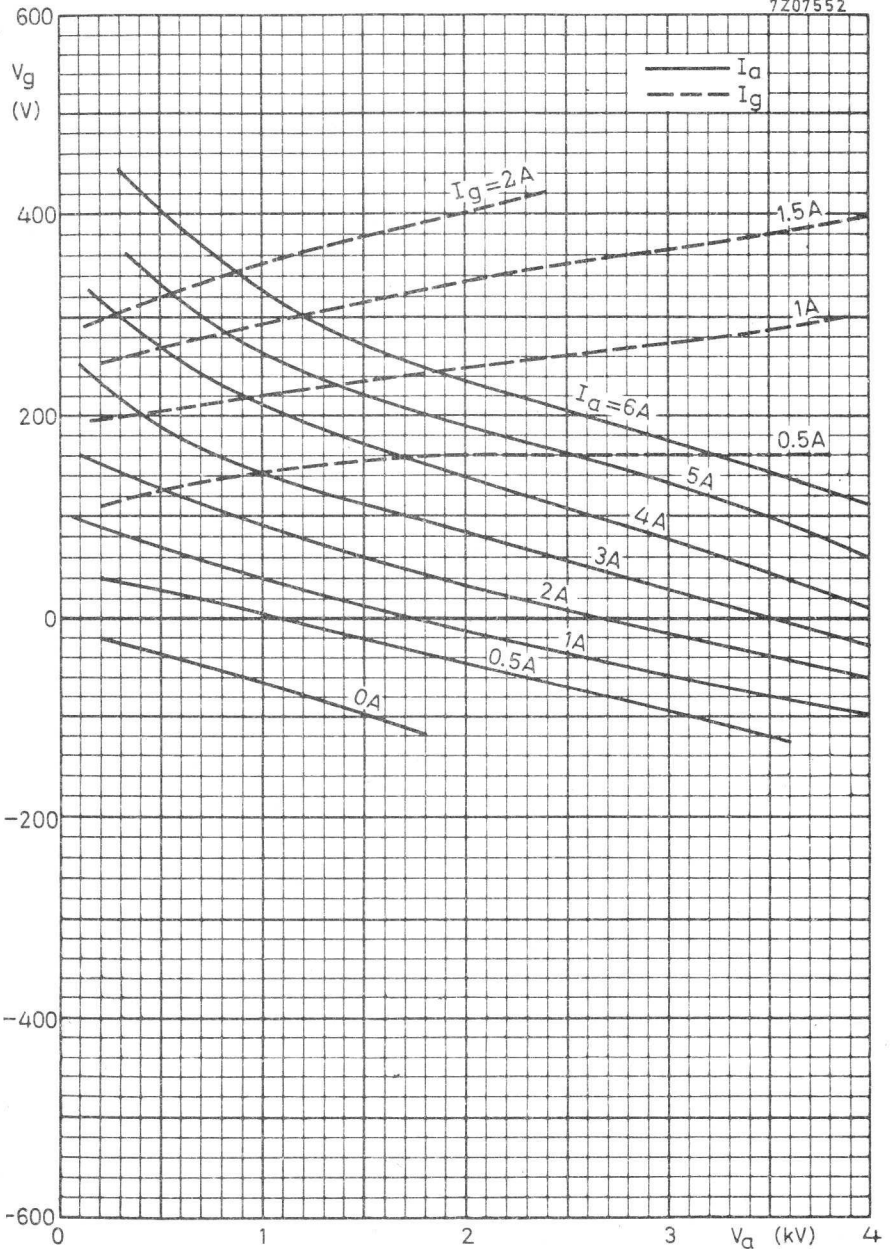

airflow to header

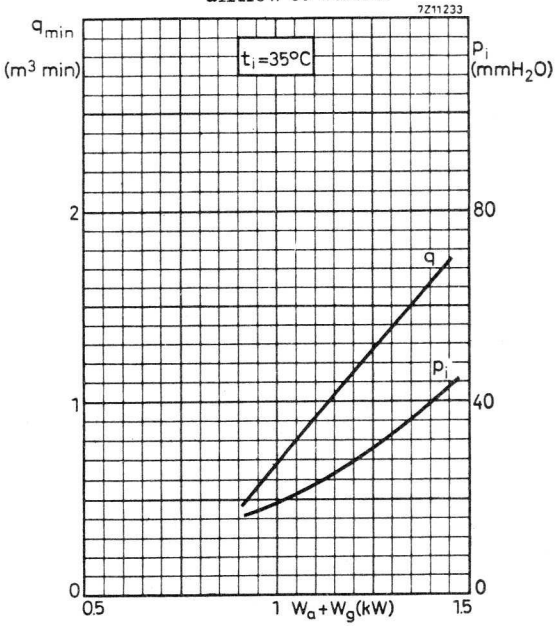

airflow from header

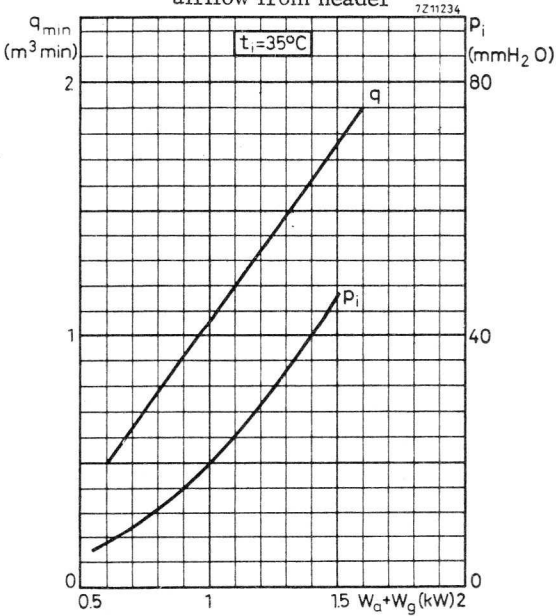

AIR-COOLED R.F. POWER TRIODE

Forced-air cooled coaxial power triode in metal-ceramic construction primarily intended for use as an r.f. class AB linear broad-band amplifier in TV transposer service at frequencies up to 1000 MHz.

QUICK REFERENCE DATA

Transposer service (combined sound and vision)

Frequency	f	470 to 860	470 to 860 MHz
Anode voltage	V_a	1200	1500 V
Output power in load (sync)	W_{ℓ}	15	25 W
Power gain	G	20	20 dB

Vision amplifier

Frequency	f	470 to 860	470 to 860 MHz
Anode voltage	V_a	1200	1500 V
Output power in load (sync)	W_{ℓ}	15	25 W
Power gain	G	20	20 dB

HEATING: indirect by a.c. or d.c.; oxide coated cathode.

Heater voltage*	V_f	5 V $\pm 5\%^{**}$
Heater current	I_f	2 A
Cathode heating time	T_h	min 120 s

CAPACITANCES

Anode to grid	C_{ag}	3,5 pF
Grid to cathode and heater	$C_{g/kf}$	17 pF
Anode to cathode and heater	$C_{a/kf}$	< 0,05 pF

TYPICAL CHARACTERISTICS

Anode voltage	V_a	1700 V
Anode current	I_a	170 mA
Transconductance	S	60 mA/V
Amplification factor	μ	200

* After the circuit has been adjusted for proper tube operation, heater voltage reduction could be necessary (depending on frequency and operating conditions) to prevent overheating of the cathode by back bombardment (resulting in short life).

** For optimum transposer performance (linearity) $\pm 2\%$.

TEMPERATURE LIMITS

Absolute maximum seal temperature

t_s max 150 °C

Absolute maximum anode temperature at reference point

t_a max 100 °C

COOLING

Forced air

W_a W	t_i °C	q_{min} l/min	P_i Pa**
300	up to	550	850
250	45	400	520

Recommended air duct see page 4.

MECHANICAL DATA

Dimensions in mm


Net mass: \approx 180 g

Accessory

Band IV and V amplifier circuit assembly: type 40770

reference point for anode temperature measurement

	min	max
A	52,2	55,2
B	32,2	34,2
C	0,9	2,3
D	25,0	26,4
E	19,9	21,9
F	14	15
G	13,5	14,5
H	20	21
J	44,6	45,4
K	1,9	2,1
L*	8	
M	11,3	11,7
N	15,8	16,4
P	22,6	23,0
Q	35,8	36,2
R	38	39
S	44,6	45,4
T	7,5	

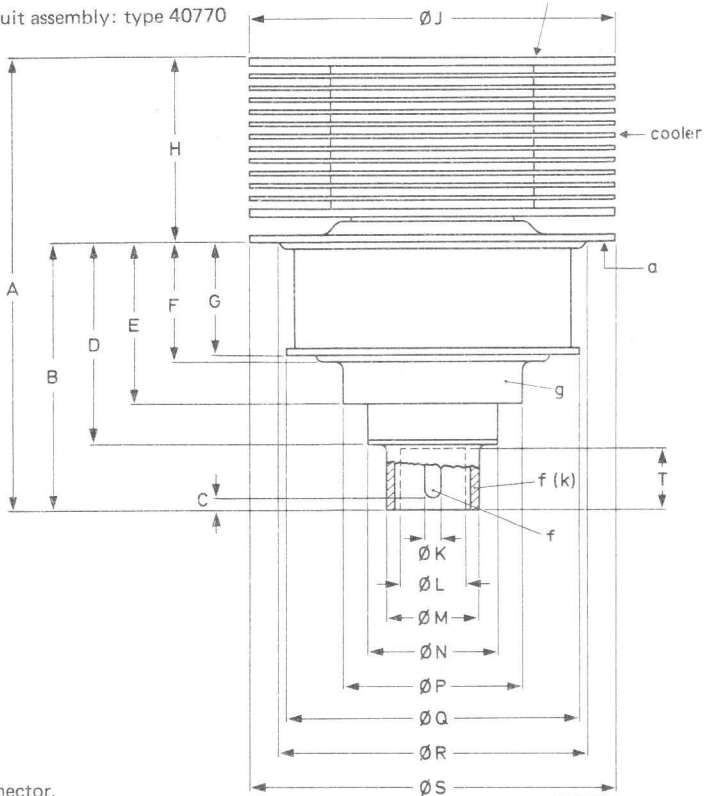

* Available for heater connector.

** 10 Pa \approx 1 mm H₂O.

R.F. CLASS AB AMPLIFIER FOR TV TRANSFORMER SERVICE, grounded grid

LIMITING VALUES (Absolute maximum rating system)

Frequency	f	up to	1000 MHz
Anode voltage	V_a	max	2000 V
Grid voltage	$-V_g$	max	50 V
Anode dissipation	W_a	max	300 W
Grid current	I_g	max	5 mA
Cathode current	I_k	max	200 mA

OPERATING CONDITIONS, grounded grid

CCIR standard G (note 1) and L (note 2)

Frequency	f	470 to 860		MHz
Bandwidth (-1 dB)	B	9	9	9 MHz
Anode voltage	V_a	1200	1500	1700 V
Grid voltage (note 3)	V_g	-3,5	-4,5	-5,5 V
Grid current	I_g	≈ 0	≈ 0	≈ 0 mA
Anode current, no signal	I_a	100	130	130 mA
Anode current at zero dB level (vision carrier)	I_a	125	160	170 mA
Driver power (sync)	W_{dr}	0,2	0,3	0,4 W
Output power in load (sync)	W_{ℓ}	15	25	35 W
Power gain	G	20	20	20 dB
Intermodulation products with respect to peak sync level (notes 4, 5)	d	≤ -57	≤ -57	≤ -57 dB
Differential phase (note 6)		< 2	< 2	< 2 deg
Differential gain (note 6)		> 96	> 96	> 96 %

1. Negative modulation, positive synchronization, combined sound and vision.

2. Positive modulation, negative synchronization, sound and vision separate.

3. To be adjusted for the stated no-signal anode current.




4. Three-tone test method (vision carrier -8 dB, sound carrier -10 dB, sideband signal -16 dB with respect to peak sync level).


5. For a vision-to-sound power ratio of 5 : 1 : IM products ≤ -54 dB.

6. Measured with a sawtooth amplitude running from 17% to 75% of the peak sync value, with a superimposed 4,43 MHz sinewave with a 10% peak-to-peak value.

Recommended air duct

Dimensions in mm

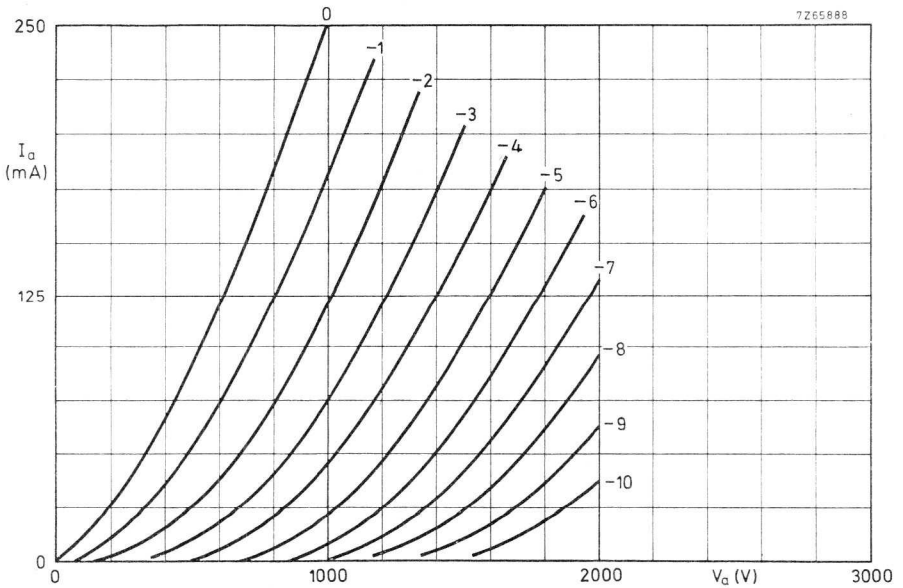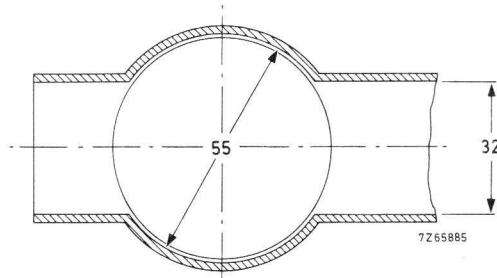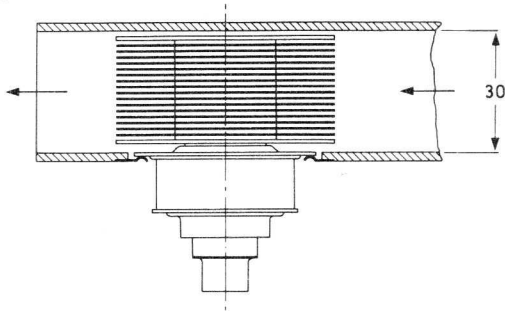

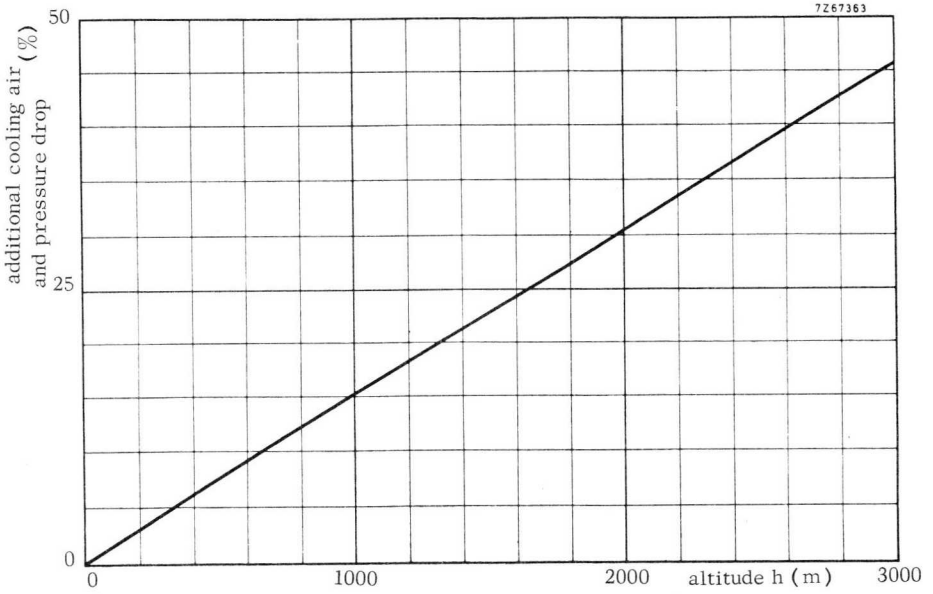

AIR-COOLED R.F. POWER TRIODE

Forced-air cooled coaxial power triode in metal-ceramic construction primarily intended for use as an r.f. class-AB linear broadband amplifier in TV transposer service at frequencies up to 1000 MHz.

QUICK REFERENCE DATA

Transposer service (combined sound and vision)

Frequency	f	470 to 860	470 to 860 MHz
Anode voltage	V_a	1500	1700 V
Output power in load (sync)	W_ℓ	25	35 W
Power gain	G	20	20 dB

HEATING: indirect by a.c. or d.c.; oxide coated cathode.

Heater voltage*	V_f	5 V \pm 5%**
Heater current	I_f	2 A
Cathode heating time	T_h	min 120 s

CAPACITANCES

Anode to grid	C_{ag}	3,5 pF
Grid to cathode and heater	$C_{g/kf}$	17 pF
Anode to cathode and heater	$C_{a/kf}$	< 0,05 pF

TYPICAL CHARACTERISTICS

Anode voltage	V_a	1700 V
Anode current	I_a	170 mA
Transconductance	S	60 mA/V
Amplification factor	μ	200

TEMPERATURE LIMITS

Absolute maximum seal temperature	t_s	max 150 °C
Absolute maximum anode temperature at reference point	t_a	max 100 °C

* After the circuit has been adjusted for proper tube operation, heater voltage reduction could be necessary (depending on frequency and operating conditions) to prevent overheating of the cathode by back bombardment (resulting in short life).

** For optimum transposer performance (linearity) \pm 2%.

COOLING

Forced air

W_a W	t_i °C	q_{min} l/min	p_i Pa**
325	up to	550	560
250	45	400	330

Recommended air duct see page 4.


MECHANICAL DATA

Net mass: \approx 290 g

Dimensions in mm

reference point for anode temperature measurements

	min	max
A	61,2	64,2
B	32,2	34,2
C	0,9	2,3
D	25,0	26,4
E	19,9	21,9
F	14	15
G	13,5	14,5
H	29	30
J	53,9	54,1
K	1,9	2,1
L*	8	
M	11,3	11,7
N	15,8	16,4
P	22,6	23,0
Q	35,8	36,2
R	38	39
S	44,6	45,4
T*	7,5	

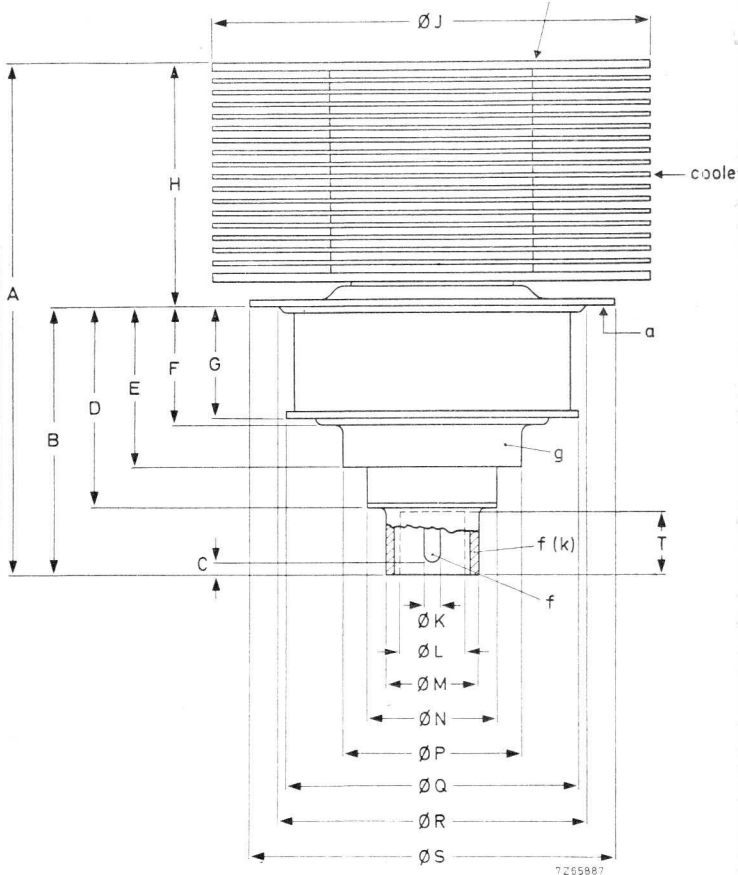

* Available for heater connector.

** 10 Pa \approx 1 mm H₂O.

R.F. CLASS-AB AMPLIFIER FOR TV TRANSPOSER SERVICE, grounded grid

LIMITING VALUES (Absolute maximum rating system)

Frequency	f	max	1000 MHz
Anode voltage	V_a	max	2000 V
Grid voltage	$-V_g$	max	50 V
Anode dissipation	W_a	max	325 W
Grid current	I_g	max	5 mA
Cathode current	I_k	max	250 mA

OPERATING CONDITIONS, grounded grid



CCIR standard G (note 1)


Frequency	f	470 to 860		MHz
Bandwidth (-1 dB)	B	9	9	9 MHz
Anode voltage	V_a	1200	1500	1700 V
Grid voltage (note 2)	V_g	-3,5	-4,5	-5,5 V
Grid current	I_g	≈ 0	≈ 0	≈ 0 mA
Anode current, no signal	I_a	100	130	130 mA
Anode current at zero dB level (vision carrier)	I_a	125	160	170 mA
Driver power (sync)	W_{dr}	0,2	0,3	0,4 W
Output power in load (sync)	W	15	25	35 W
Power gain	G	20	20	20 dB
Intermodulation products with respect to peak sync level (note 3, 4)	d	≤ -57	≤ -57	≤ -57 dB
Differential phase (note 5)			< 2	< 2 deg
Differential gain (note 5)			> 96	> 96 %

1. Negative modulation, positive synchronization, combined sound and vision.
2. To be adjusted for the stated no-signal anode current.
3. Three-tone test method (vision carrier -8 dB, sound carrier -10 dB, sideband signal -16 dB with respect to peak sync level).
4. For a vision-to-sound power ratio of 5 : 1 : IM products ≤ -54 dB.
5. Measured with a sawtooth amplitude running from 17% to 75% of the peak sync value, with a superimposed 4,43 MHz sinewave with a 10% peak-to-peak value.

Recommended air duct

Dimensions in mm

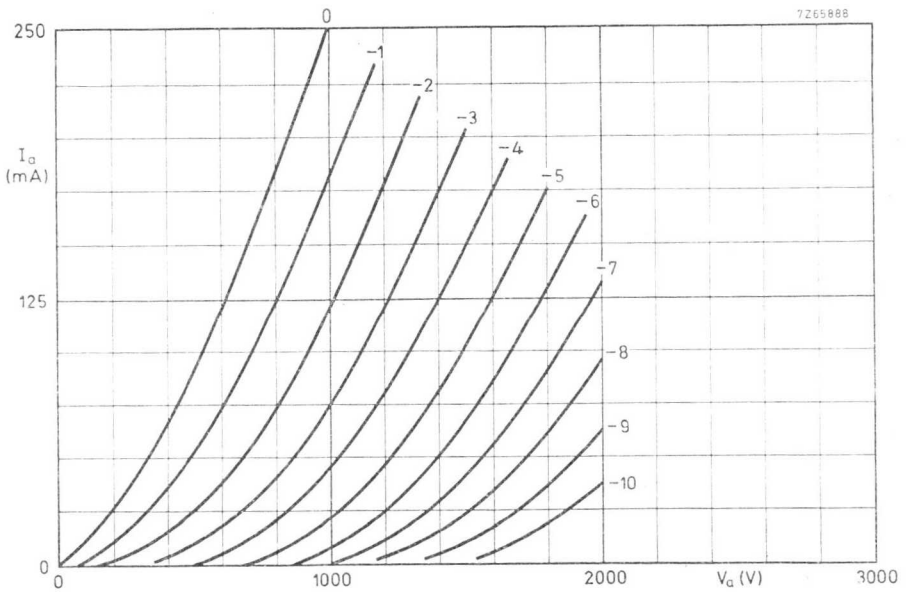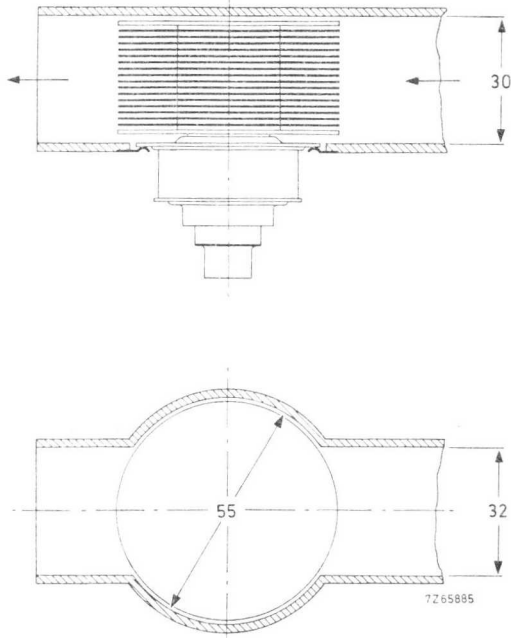

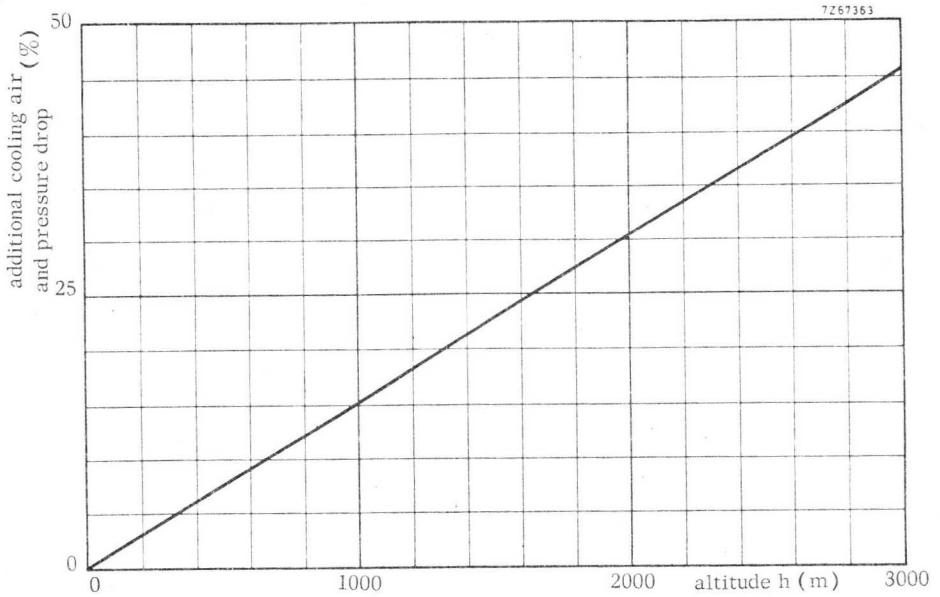

CONDUCTION-COOLED R.F. POWER TRIODE

Conduction-cooled coaxial power triode in metal-ceramic construction primarily intended for use as an r.f. class-AB linear broad-band amplifier in TV transposer service at frequencies up to 1000 MHz.

QUICK REFERENCE DATA

Transposer service (combined sound and vision)

Frequency	f	470 to 860 MHz
Anode voltage	V_a	1200 V
Output power in load (sync)	$W_{\bar{L}}$	25 W
Power gain	G	20 dB

HEATING: indirect by a.c. or d.c.; oxide-coated cathode

Heater voltage*	V_f	5 V \pm 5%**
Heater current	I_f	2 A
Cathode heating time	T_h	min 120 s

CAPACITANCES

Anode to grid	C_{ag}	3,5 pF
Grid to cathode and heater	$C_{g/kf}$	17 pF
Anode to cathode and heater	$C_{a/kf}$	< 0,05 pF

TYPICAL CHARACTERISTICS

Anode voltage	V_a	1200 V
Anode current	I_a	150 mA
Transconductance	S	60 mA/V
Amplification factor	μ	200

TEMPERATURE LIMITS

Absolute maximum seal temperature	t_s	max 150 °C
Absolute maximum anode temperature at reference point		see curve page 4

* After the circuit has been adjusted for proper tube operation, the heater voltage should be reduced (depending on frequency and operating conditions) to prevent overheating of the cathode by back bombardment (resulting in short life).

** For optimum performance (linearity) \pm 2%.

COOLING

Anode cooling

conduction-convection


The anode is fitted with an aluminium flange, which permits the mounting of a radiator for convection cooling.

MECHANICAL DATA

Dimensions in mm

Mounting position: any

Net mass: ≈ 290 g

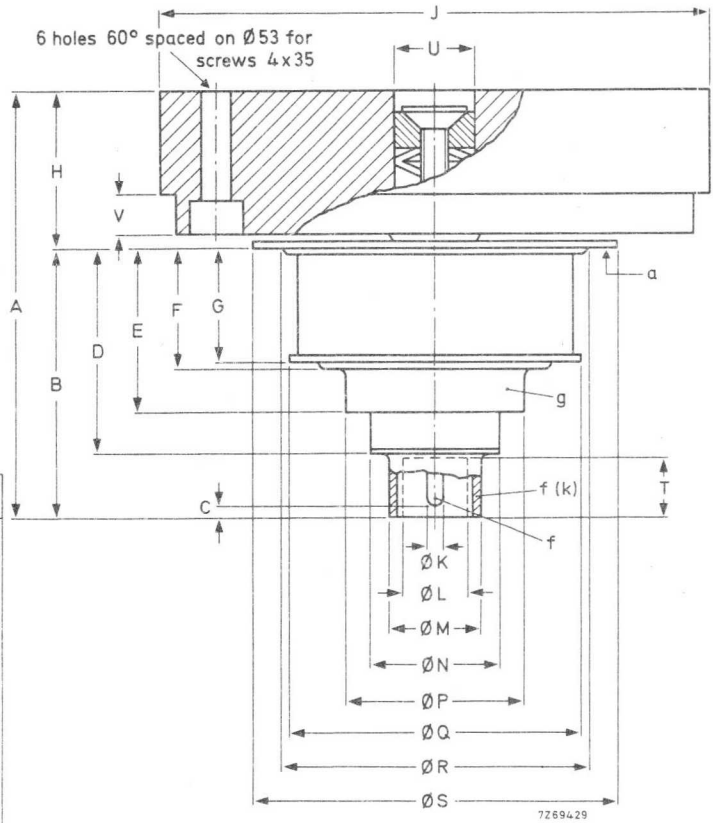

	min	max
A	52,5	55,5
B	32,2	34,2
C	0,9	2,3
D	25,0	26,4
E	19,9	21,9
F	14	15
G	13,5	14,5
H	20,3	21,3
J	67,9	68,1
K	1,9	2,1
L*	8	
M	11,3	11,7
N	15,8	16,4
P	22,6	23,0
Q		34,0
R	38	39
S	44,6	45,4
T	7,5	
U		10,6

* Available for heater connector.

R.F. CLASS-AB AMPLIFIER FOR TV TRANSPOSER SERVICE, grounded grid

LIMITING VALUES (Absolute maximum rating system)

Frequency	f	up to	1000 MHz
Anode voltage	V_a	max	2000 V
Grid voltage	$-V_g$	max	50 V
Anode dissipation	W_a	max	150 W
Grid current	I_g	max	5 mA
Cathode current	I_k	max	200 mA

OPERATING CONDITIONS, grounded grid

CCIR standard G (note 1)

Frequency	f	470 to 860		MHz
Bandwidth (-1 dB)	B	9	9	9 MHz
Anode voltage	V_a	1000	1200	1500 V
Grid voltage (note 2)	V_g	-2,5	-3,5	-4,5 V
Grid current	I_g	≈ 0	≈ 0	≈ 0 mA
Anode current, no signal	I_a	100	100	100 W
Driver power (sync)	W_{dr}	0,2	0,3	0,3 W
Output power in load (sync)	W_ℓ	15	25	25 W
Power gain	G	20	20	20 dB
Intermodulation products with respect to peak sync level	d (note 4)	≤ -57	≤ -57	≤ -57 dB
	d (note 4)			≤ -54 dB



1. Negative modulation, positive synchronization, combined sound and vision.

2. To be adjusted for the stated no-signal anode current.


3. Three-tone test method (vision carrier -8 dB, sound carrier -10 dB, sideband signal -16 dB with respect to peak sync level).

4. Intermodulation product for a vision to sound ratio of 5 : 1.

7265888

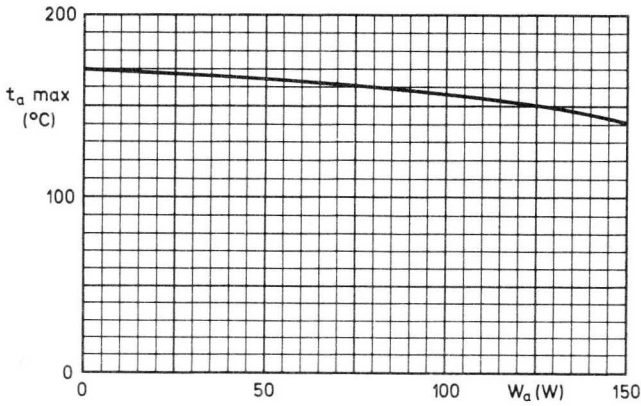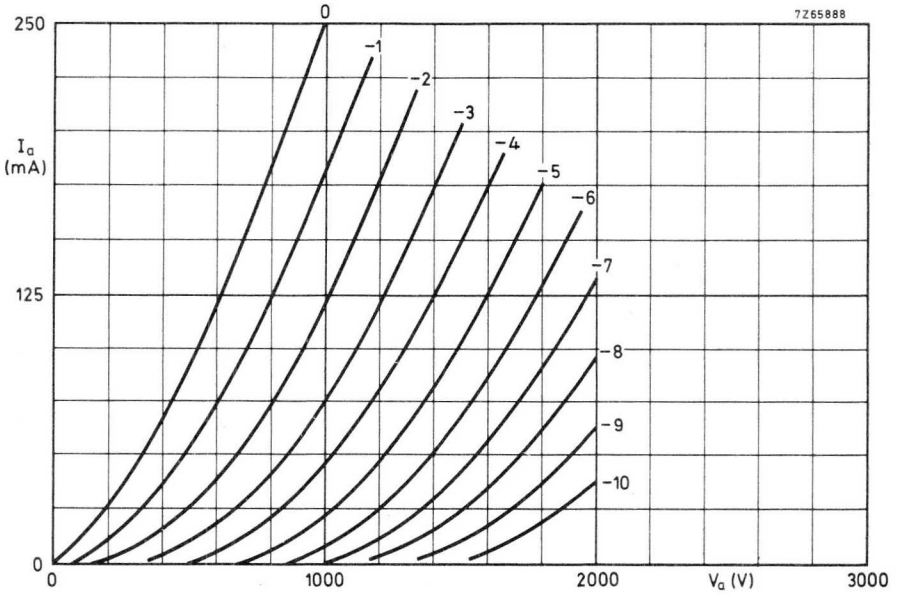

reference point for temperature measurements



7269428

AIR-COOLED R.F. POWER TRIODE

Forced-air cooled coaxial power triode in metal-ceramic construction primarily intended for use as an r.f. class-AB linear broadband amplifier in TV transposer service at frequencies up to 1000 MHz.

QUICK REFERENCE DATA

Transposer service (combined sound and vision)

Frequency	f	470 to 860 MHz
Anode voltage	V_a	1800 V
Output power in load (sync)	W_ℓ	55 W
Power gain	G	19 dB

HEATING: indirect by a.c. or d.c.; oxide coated cathode.

Heater voltage*	V_f	5 V \pm 5%**
Heater current	I_f	2,2 A
Cathode heating time	T_h	min 120 s

CAPACITANCES

Anode to grid	C_{ag}	3,5 pF
Grid to cathode and heater	$C_{g/kf}$	20 pF
Anode to cathode and heater	$C_{a/kf}$	< 0,05 pF

TYPICAL CHARACTERISTICS

Anode voltage	V_a	1800 V
Anode current	I_a	180 mA
Transconductance	S	70 mA/V
Amplification factor	μ	200

TEMPERATURE LIMITS

Absolute maximum seal temperature	t_s	max 150 °C
Absolute maximum anode temperature at reference point	t_a	max 100 °C

* After the circuit has been adjusted for proper tube operation heater voltage reduction could be necessary (depending on frequency and operating conditions) to prevent overheating of the cathode by back bombardment (resulting in short life).

** For optimum transposer performance (linearity) \pm 2%.

COOLING

Forced air

W_a W	t_i °C	q_{min} l/min	P_i Pa**
325	up to	550	560
275	45	400	330


Recommended air duct see page 4.

MECHANICAL DATA

Dimensions in mm

Net mass: ≈ 290 g

	min	max
A	61,2	64,2
B	32,2	34,2
C	0,9	2,3
D	25,0	26,4
E	19,9	21,9
F	14	15
G	13,5	14,5
H	29	30
J	53,9	54,1
K	1,9	2,1
L*	8	
M	11,3	11,7
N	15,8	16,4
P	22,6	23,0
Q	35,8	36,2
R	38	39
S	44,6	45,4
T*	7,5	

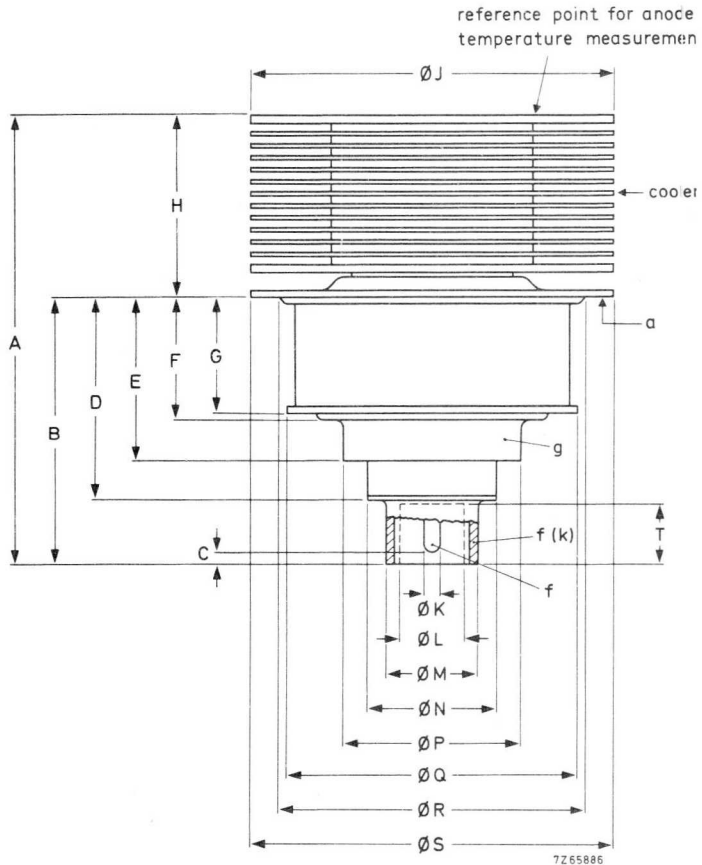

* Available for heater connector.

** 10 Pa ≈ 1 mm H₂O.

R.F. CLASS-AB AMPLIFIER FOR TV TRANSPOSER SERVICE, grounded grid

LIMITING VALUES (Absolute maximum rating system)

Frequency	f	up to	1000 MHz
Anode voltage	V_a	max	2000 V
Grid voltage	$-V_g$	max	50 V
Anode dissipation	W_a	max	325 W
Grid current	I_g	max	5 mA
Cathode current	I_k	max	250 mA

OPERATING CONDITIONS, grounded grid




CCIR standard G (note 1)


Frequency	f	470 to 860 MHz
Bandwidth (-1 dB)	B	9 MHz
Anode voltage	V_a	1800 V
Grid voltage (note 2)	V_g	-6,5 V
Anode current, no signal	I_a	130 mA
Anode current at zero dB level (vision carrier)	I_a	185 mA
Output power at $I_g = 0$	W_o	100 W
Driving power (sync)	W_{dr}	0,7 W
Output power in load (sync)	W_ℓ	55 W
Power gain	G	19 dB
Intermodulation products with respect to peak sync level (notes 3, 4)	d	-56 dB
Differential phase (note 5)		< 2 deg
Differential gain (note 5)		> 96 %

1. Negative modulation, positive synchronization, combined sound and vision.
2. To be adjusted for the stated no-signal anode current.
3. Three-tone test method (vision carrier -8 dB, sound carrier -10 dB, sideband signal -16 dB with respect to peak sync level).
4. For a vision to sound power ratio of 5 : 1 : IM products ≤ -54 dB.
5. Measured with a sawtooth amplitude running from 17% to 75% of the peak sync value, with a superimposed 4,43 MHz sinewave with a 10% peak-to-peak value.

Recommended air duct

Dimensions in mm

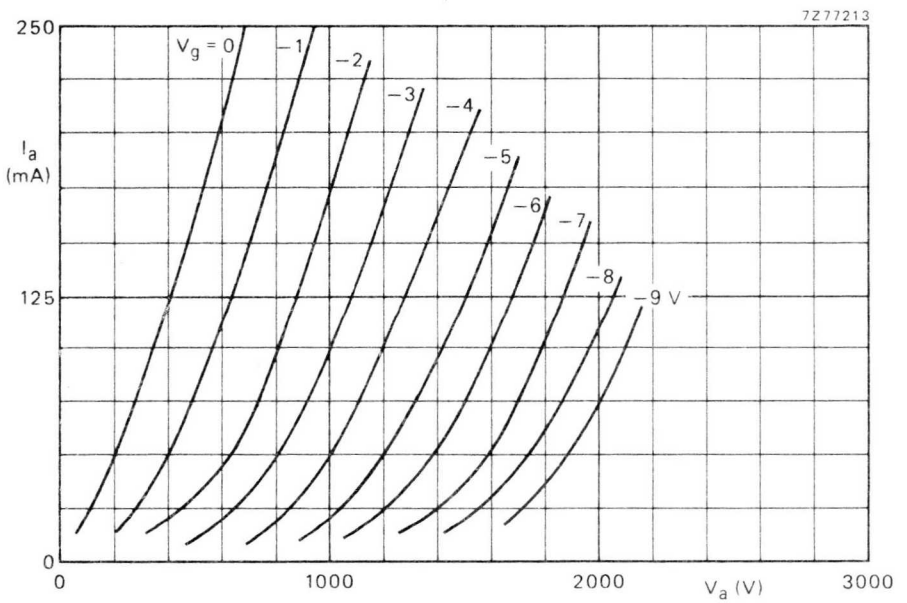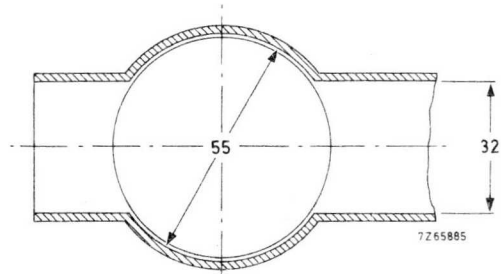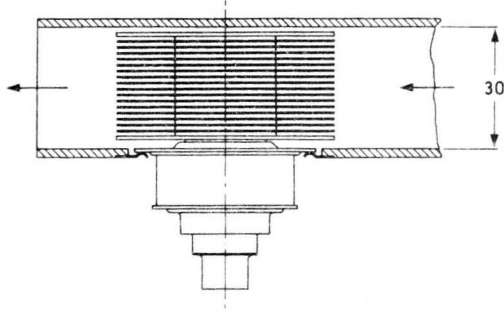

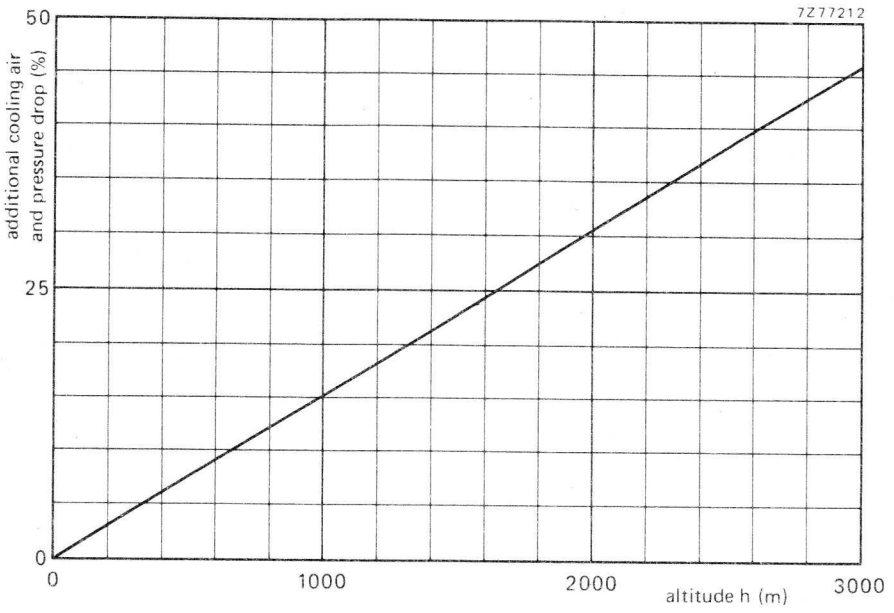

AIR COOLED R.F. POWER TRIODE

Forced-air cooled coaxial power triode in metal-ceramic construction primarily intended for use as R.F. class AB linear broadband amplifier in TV transposer service at frequencies up to 1000 MHz.

QUICK REFERENCE DATA

Frequency	f	370 to 860	MHz
Anode voltage	V_a	3000	V
Output power in load	W_l	220	W
Power gain	G	16,5	dB

HEATING : indirect, by a.c. (50 Hz to 400 Hz) or d.c.; oxide coated cathode.

Heater voltage	V_f	6,0 to 6,3	$V \pm 5\%$ 1)
Heater current	I_f	4,8 to 5,8	A
Cathode heating time	T_h	min. 180	s

CAPACITANCES

Anode to grid	C_{ag}	6,8 to 8,0	pF
Grid to cathode and heater	$C_{g/kf}$	20 to 30	pF
Anode to cathode and heater	$C_{a/kf}$	90 to 180	fF

TYPICAL CHARACTERISTICS

Anode voltage	V_a	3	kV
Anode current	I_a	400	mA
Transconductance	S	70	mA/V
Amplification factor	μ	90	

TEMPERATURE LIMITS

Absolute max. temperature measured at reference points t_{max} 250 °C

To obtain optimum life, this temperature should not exceed 200 °C.

1) The heater voltage must be adjusted between 6,0 and 6,3 V.

For optimum performance (linearity) the voltage set must be maintained within $\pm 2\%$ for transposer service, or $\pm 5\%$ for other applications.

COOLING

Anode: forced air

W_a (W)	t_i (°C)	q_{min} (m ³ /min)	p_i (mm H ₂ O)
1800	25	2	180


Other terminals: low velocity air flow.

When only the heater voltage is applied, the heater and heater/cathode terminals should also be cooled.

Cooling air and voltages may be switched off simultaneously.

MECHANICAL DATA

Dimensions in mm

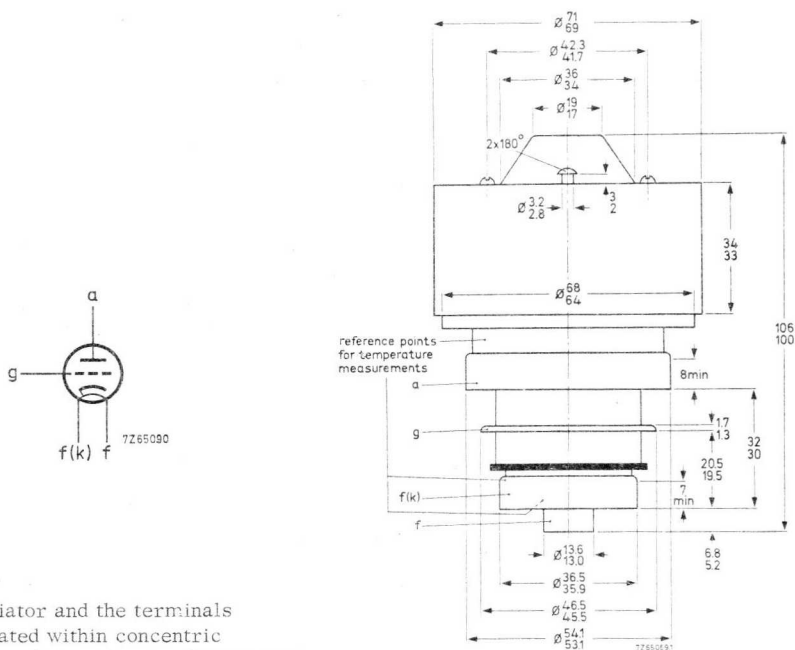

The radiator and the terminals are situated within concentric cylinders of the following dimensions:

Radiator	72,0 dia
Anode terminal	55,1 dia
grid terminal	47,0 dia
Heater/cathode terminal	37,0 dia
Heater terminal	14,5 dia

R.F. CLASS AB AMPLIFIER FOR TV TRANSPOSER SERVICE

LIMITING VALUES (Absolute max. rating system)

Frequency	f	up to	1000	MHz
Anode voltage	V_a	max.	3500	V
Grid voltage	$-V_{g_g}$	max.	200	V
Anode dissipation	W_a	max.	1800	W
Grid current	I_g	max.	5	mA
Cathode current	I_k	max.	550	mA ¹⁾

OPERATING CONDITIONS , grounded grid

Standard		<u>CCIR -G</u>		^{2) 3)}
Frequency	f	470 to	860	MHz
Anode voltage	V_a		3000	V
Grid voltage ⁴⁾	V_g		-30	V
Anode current, no signal	I_a		420	mA
Anode current at zero dB level (vision carrier)	I_a		650	mA
Grid current	I_g		≈ 0	mA
Driver output power (sync)	W_{dr}		7	W
Output power in load (sync)	W_l		220	W
Power gain	G		16,5	dB
Intermodulation products ⁵⁾	d		-55	dB
			< -53	dB
Intermodulation products ⁶⁾	d		-57	dB
			< -55	dB

1) During a short period, for adjustment of the transmitter, I_k max. = 700 mA.

2) Negative modulation, positive synchronization, combined sound and vision.


3) R.F. driving power should be applied after the heater and electrode voltages.

4) To be adjusted for the stated no-signal anode current. Range values for equipment design -15 to -45 V.


5) Three-tone test method (vision carrier -8 dB, sound carrier -7 dB, sideband signal -17 dB with respect to peak sync level = 0 dB).



6) Three-tone test method (vision carrier -8 dB, sound carrier -10 dB, sideband signal -16 dB with respect to peak sync level = 0 dB).



7264829

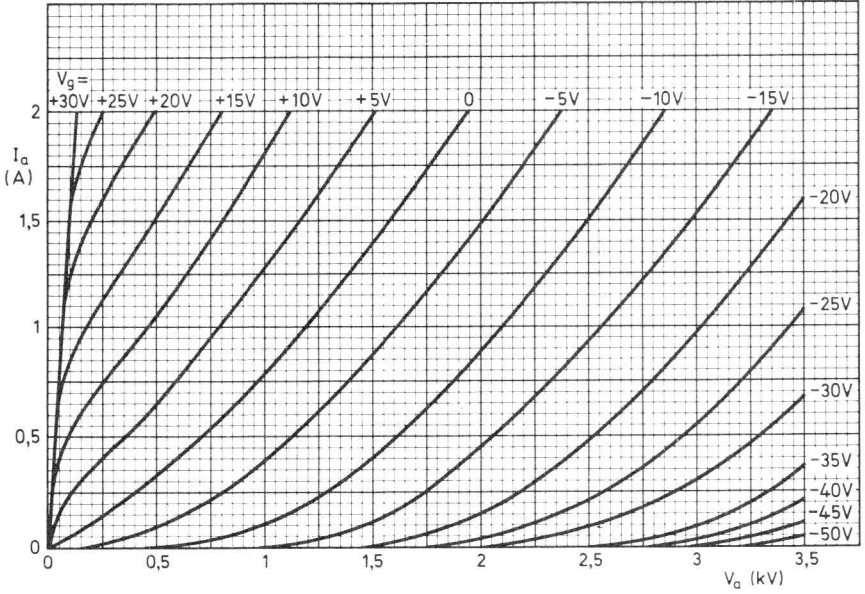

7270218

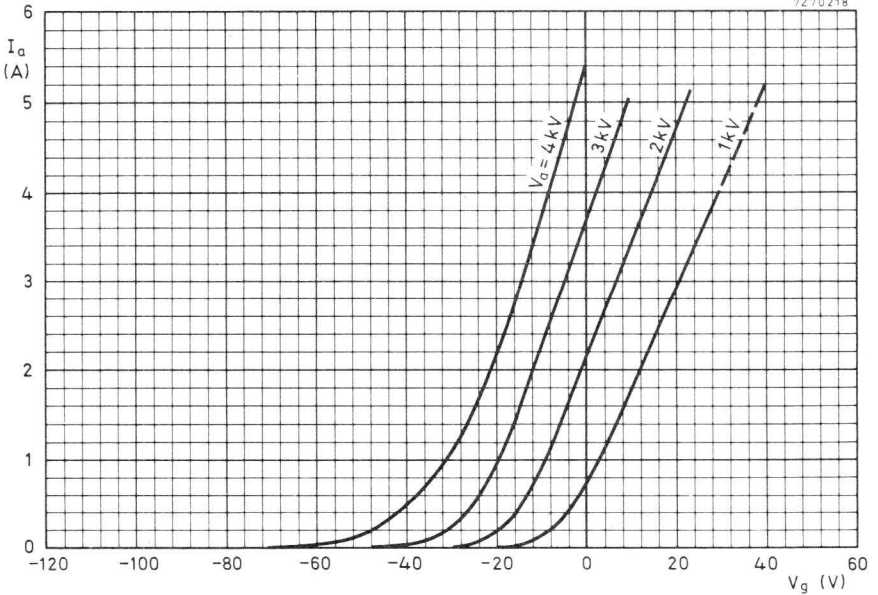

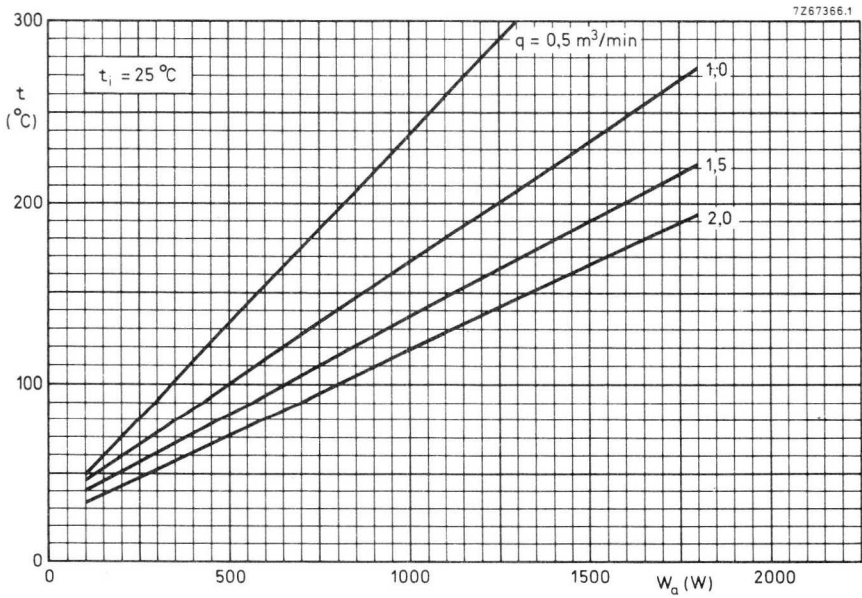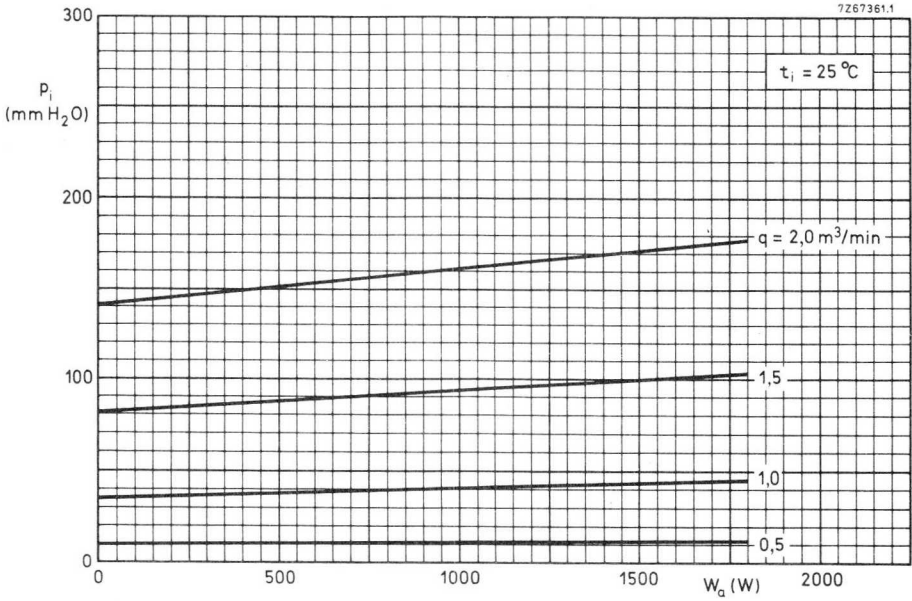

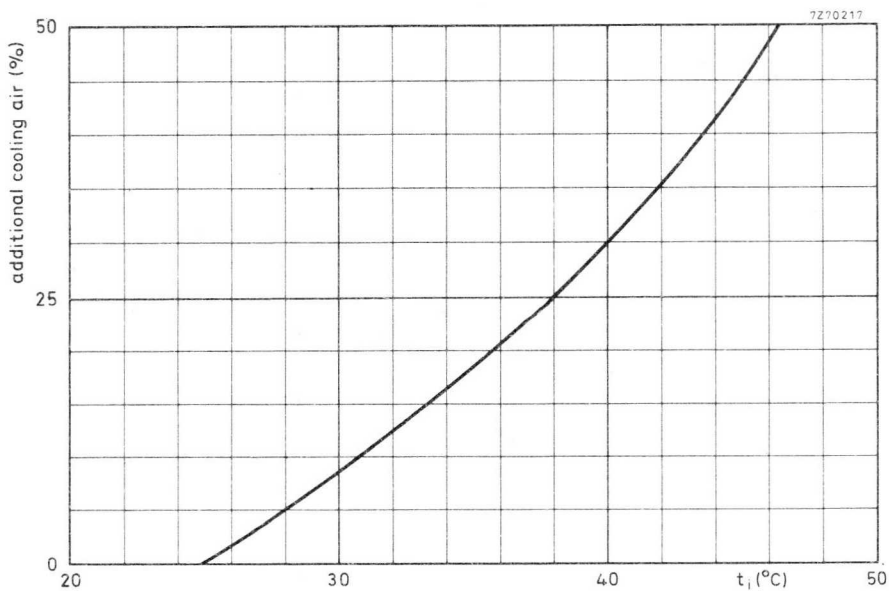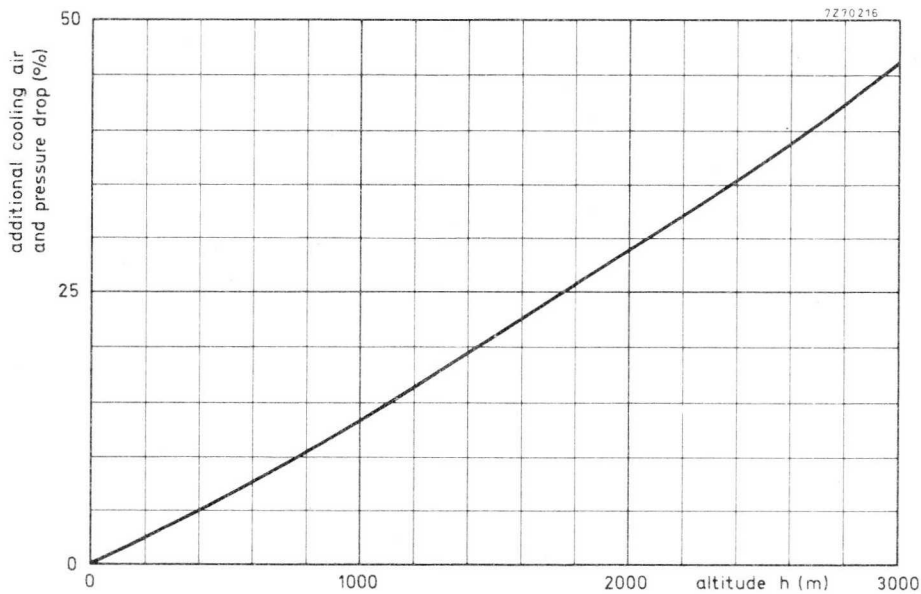

AIR COOLED R.F. POWER TRIODE

Forced-air cooled coaxial power triode in metal-ceramic construction primarily intended for use as R. F. class AB linear broadband amplifier in TV transposer service at frequencies up to 1000 MHz.

QUICK REFERENCE DATA

Transposer service (combined sound and vision)			
Frequency	f	470 to 860	MHz
Anode voltage	V_a	2500	V
Output power in load (sync)	W_l	110	W
Power gain	G	16	dB

HEATING : indirect by a. c. (50 Hz to 400 Hz) or d. c. ; oxide coated cathode.

Heater voltage	V_f	6.0 to 6.3	V $\pm 5\%$ 1)
Heater current	I_f	4.8 to 5.8	A
Cathode heating time	T_h	min. 180	s

CAPACITANCES

Anode to grid	C_{ag}	6.8 to 8.0	pF
Grid to cathode and heater	$C_{g/kf}$	20 to 30	pF
Anode to cathode and heater	$C_{a/ki}$	90 to 180	fF

TYPICAL CHARACTERISTICS

Anode voltage	V_a	2	kV
Anode current	I_a	250	mA
Transconductance	S_c	60	mA/V
Amplification factor	μ	90	

TEMPERATURE LIMITS

Absolute max. temperature measured at reference points	t	max. 250	$^{\circ}\text{C}$
--	---	----------	--------------------

To obtain optimum life, this temperature should not exceed 200 $^{\circ}\text{C}$.

1) The heater voltage must be adjusted between 6.0 and 6.3 V.

For optimum performance (linearity) the voltage set must be maintained within $\pm 2\%$ for transposer service, or $\pm 5\%$ for other applications.

COOLING

Anode: forced air



W_a (W)	t_i (°C)	q_{min} (m ³ /min)	P_i (mm H ₂ O)
900	25	1,5	31

Other terminals: low velocity airflow.

When only the heater voltage is applied the heater and heater/cathode terminals should also be cooled.

Cooling air and voltages may be switched off simultaneously.

MECHANICAL DATA

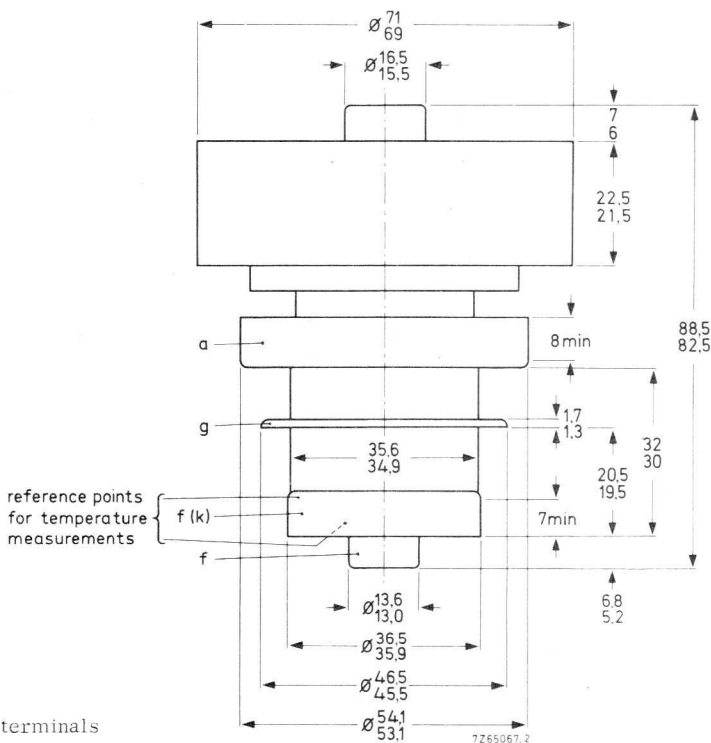

The radiator and the terminals are situated within concentric cylinders of the following dimensions:

Radiator	72,0 dia
Anode terminal	55,1 dia
Grid terminal	47,0 dia
Heater/cathode terminal	37,0 dia
Heater terminal	14,5 dia

R.F. CLASS AB AMPLIFIER FOR TV TRANSPOSER SERVICE

grounded grid

LIMITING VALUES (Absolute max. rating system)

Frequency	f	up to	1000	MHz
Anode voltage	V_a	max.	3500	V
Grid voltage	$-V_g$	max.	200	V
Anode dissipation	W_a	max.	900	W
Grid current	I_g	max.	5	mA
Cathode current	I_k	max.	550	mA

OPERATING CONDITIONS , grounded grid

Standard		CCIR-G		1) 2)
Frequency	f	470 to 860	470 to 860	MHz
Anode voltage	V_a	2500	1800	V
Grid voltage ³⁾	V_g	-24	-14	V
Anode current, no signal	I_a	250	330	mA
Anode current at zero dB level (vision carrier)	I_a	420	450	mA
Grid current	I_g	≈ 0	≈ 0	mA
Driver output power (sync)	W_{dr}	3,5	3,5	W
Output power in load (sync)	W_l	110	110	W
Power gain	G	16	16	dB
Intermodulation products ⁴⁾	d	-58 < -56	-56 < -54	dB dB

1) Negative modulation, positive synchronization, combined sound and vision.

2) R. F. driving power should be applied after the heater and electrode voltages.

3) To be adjusted for the stated no-signal anode current. Range values for equipment design : -10 to -40 V, -5 to -35 V respectively.

4) Three-tone test method (vision carrier -8 dB, sound carrier -10 dB, sideband signal -16 dB with respect to peak sync level = 0 dB).

R.F. CLASS AB AMPLIFIER FOR TV SOUND SERVICE

LIMITING VALUES (Absolute max. rating system)

Frequency	f	up to	1000	MHz
Anode voltage	V_a	max.	3500	V
Grid voltage	$-V_g$	max.	200	V
Anode dissipation	W_a	max.	900	W
Grid current	I_g	max.	5	mA
Cathode current	I_k	max.	550	mA


OPERATING CONDITIONS 1)

Frequency	f	174 to	860	MHz
Anode voltage	V_a		2700	V
Grid voltage 2)	V_g		-28	V
Anode current, no signal	I_a		200	mA
Anode current	I_a		350	mA
Grid current	I_g		0	mA
Driver output power	W_{dr}		8	W
Output power in load	W_l		300	W
Power gain	G		16	dB


1) R.F. driving power should be applied after the heater and electrode voltages.



2) To be adjusted for the stated no-signal anode current. Range values for equipment design -15 to -40 V. For "automatic bias" the cathode resistor range is 80 to 180 Ω .



7264829

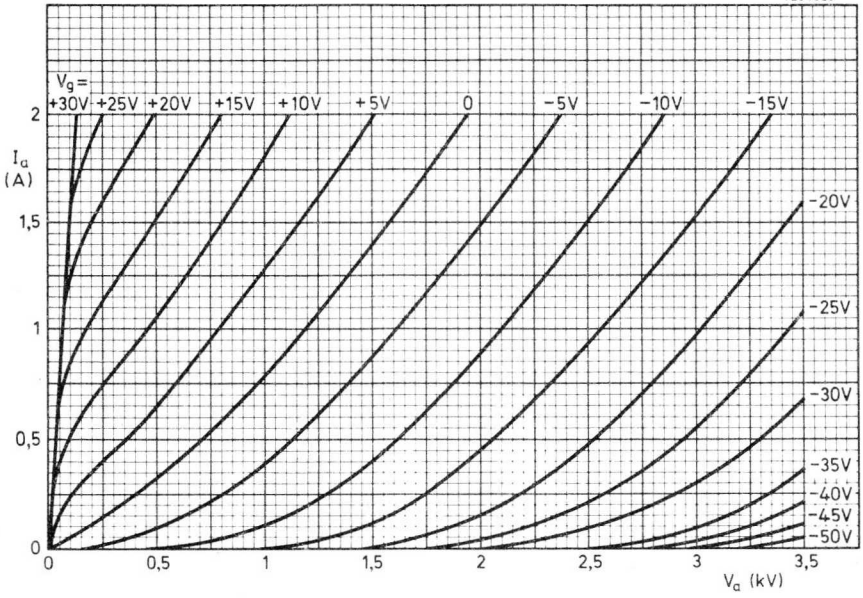

7270218

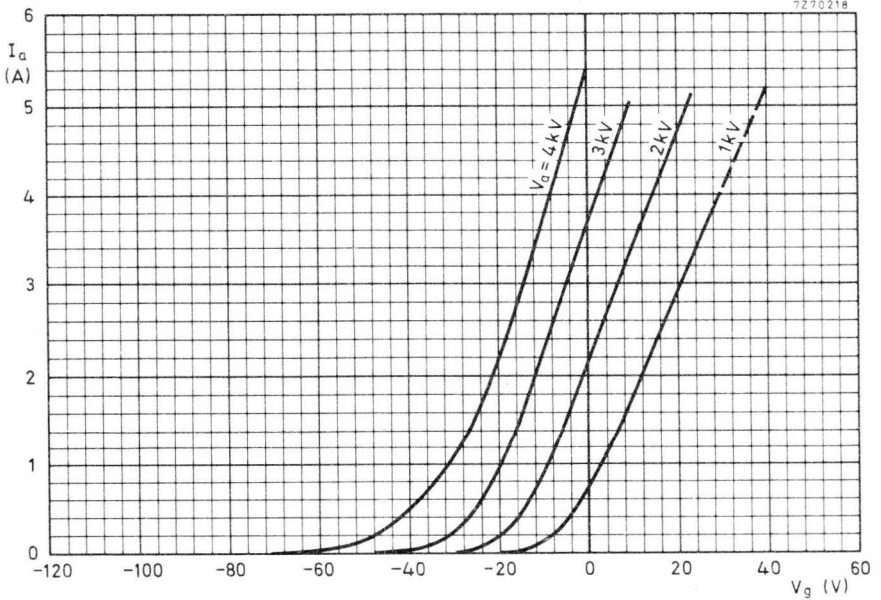

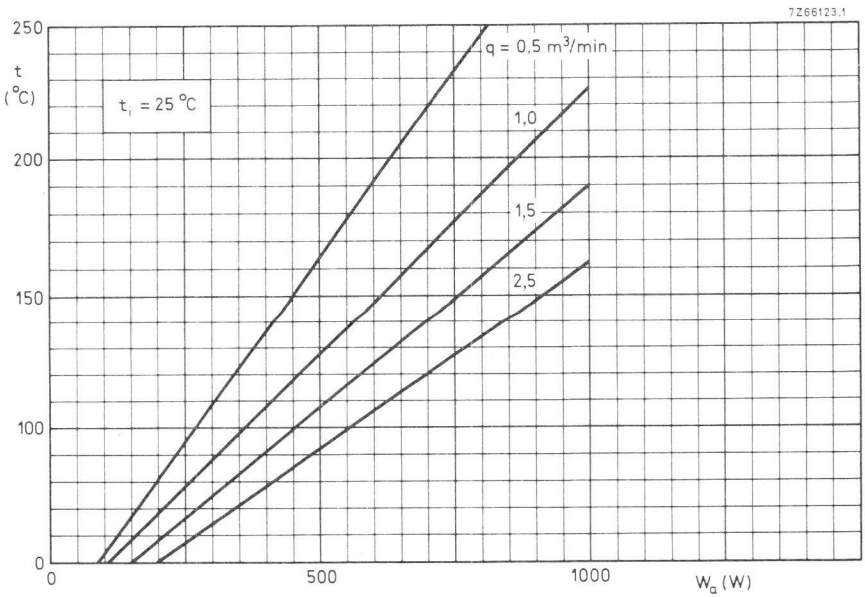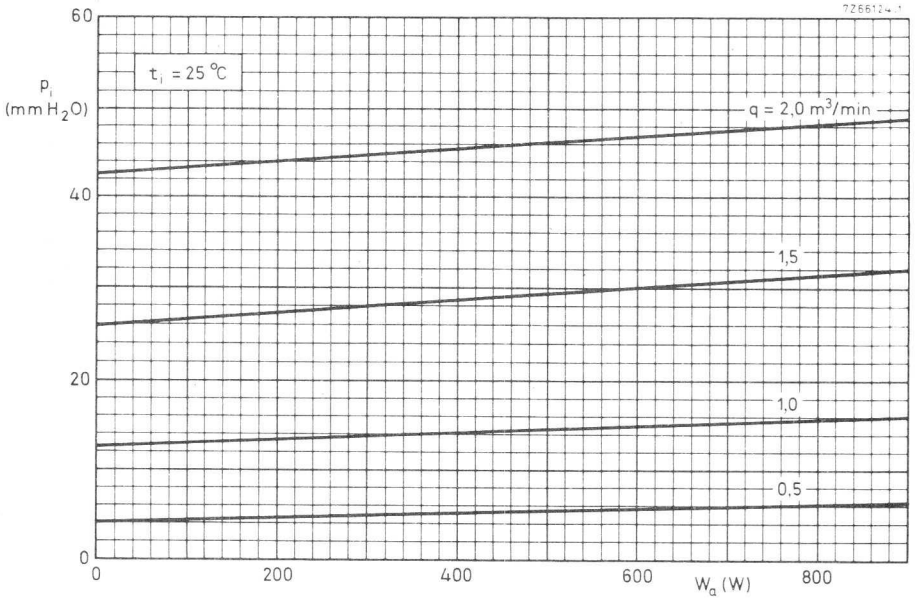

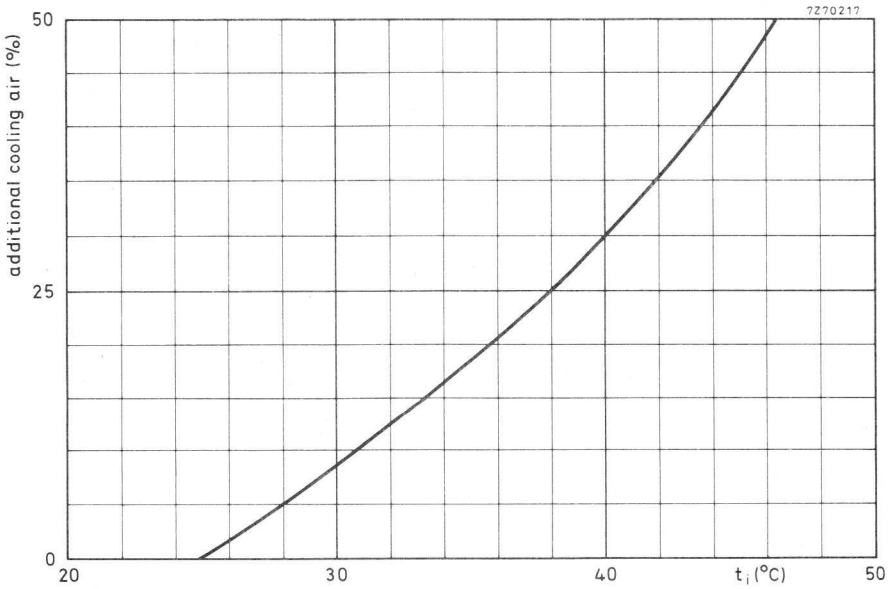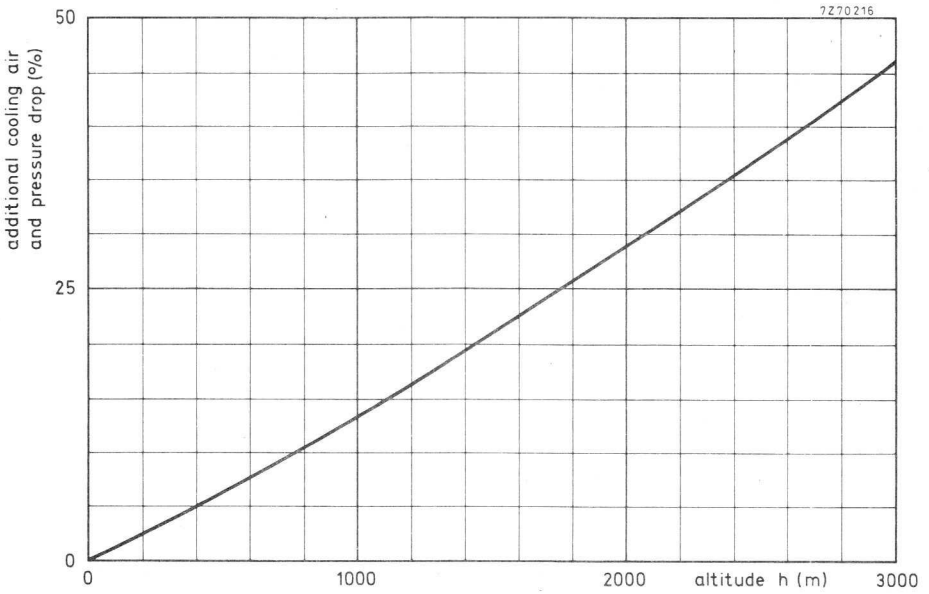

AIR COOLED R.F. POWERTRIODE

Forced-air cooled coaxial power triode in metal-ceramic construction primarily intended for use as R. F. class AB linear broadband amplifier in TV transposer service at frequencies up to 1000 MHz.

QUICK REFERENCE DATA

Transposer service (combined sound and vision)			
Frequency	f	470 to 860	MHz
Anode voltage	V_a	2500	V
Output power in the load (sync)	W_l	110	W
Power gain	G	16,5	dB

HEATING : indirect, by a.c. (50 Hz to 400 Hz) or d.c. ; oxide coated cathode.

Heater voltage	V_f	6,0 to 6,3	V $\pm 5\%$ 1)
Heater current	I_f	4,8 to 5,8	A
Cathode heating time	T_h	min. 180	s

CAPACITANCES

Anode to grid	C_{ag}	6,8 to 8	pF
Grid to cathode and heater	$C_{g/kf}$	20 to 30	pF
Anode to cathode and heater	$C_{a/kf}$	90 to 180	fF

TYPICAL CHARACTERISTICS

Anode voltage	V_a	2	kV
Anode current	I_a	400	mA
Transconductance	S	70	mA/V
Amplification factor	μ	90	

TEMPERATURE LIMITS

Absolute max. temperature measured at reference points	t	max. 250	$^{\circ}\text{C}$
--	-----	----------	--------------------

To obtain optimum life, this temperature should not exceed 200 $^{\circ}\text{C}$.

- 1) The heater voltage must be adjusted between 6,0 and 6,3 V.
For optimum performance (linearity) the voltage set must be maintained within $\pm 2\%$ for transposer service, or $\pm 5\%$ for other applications.

COOLING

Anode: forced air

W_a (W)	t_i (°C)	q_{min} (m ³ /min)	P_i (mm H ₂ O)
1000	25	0,7	2

Other terminals: low velocity air flow.

When only the heater voltage is applied, the heater and heater/cathode terminals should also be cooled.

Cooling air and voltages may be switched off simultaneously.

MECHANICAL DATA



Dimensions in mm

Net mass: approx. 1000 g

Mounting position: any

Accessories:

Band IV and V amplifier circuit assembly type 40771

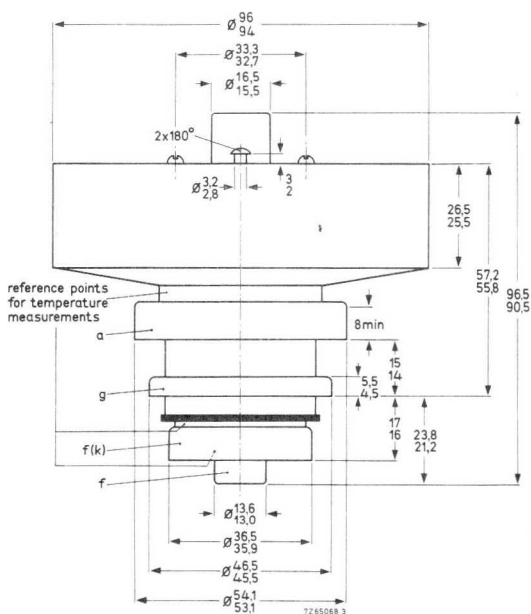

The radiator and the terminals are situated within concentric cylinders of the following dimensions:

Radiator	97,0 dia
Anode terminal	55,1 dia
Grid terminal	47,0 dia
Heater/cathode terminal	37,0 dia
Heater terminal	14,5 dia

R.F. CLASS AB AMPLIFIER FOR TV TRANSPOSER SERVICE

grounded grid

LIMITING VALUES (Absolute max. rating system)

Frequency	f	up to	1000	MHz
Anode voltage	V_a	max.	3500	V
Grid voltage	$-V_g$	max.	200	V
Anode dissipation	W_a	max.	1800	W
Grid current	I_g	max.	± 5	mA
Cathode current	I_k	max.	550	mA ¹⁾

OPERATING CONDITIONS, grounded grid ²⁾³⁾

Standard			CCIR-G	
Frequency	f		470 to 860	MHz
Anode voltage	V_a		2500	V
Grid voltage ⁴⁾	V_g		-25	V
Anode current, no signal ⁴⁾	I_a		200 to 300	mA
Anode current at zero dB level (vision carrier)	I_a		420 (<500)	mA
Grid current	I_g		≈ 0	mA
Driver output power (sync)	W_{dr}		4	W
Output power in load (sync)	W_ℓ		110	W
Power gain	G		16,5	dB
Intermodulation products	d		-60 < -58	dB dB

¹⁾ During a short period, for adjustment of the transmitter, I_k max. = 700 mA.

²⁾ Negative modulation, positive synchronization, combined sound and vision.

³⁾ R.F. driving power should be applied after the heater and electrode voltages.


⁴⁾ To be adjusted for the zero-signal anode current stated on the measuring report supplied with each tube.

Range values for equipment design -10 to -40 V.


The stated no-signal anode current results in optimum linearity.



⁵⁾ Three-tone method (vision carrier -8 dB, sound carrier -10 dB, sideband signal -16 dB with respect to peak sync level = 0 dB).



7264829

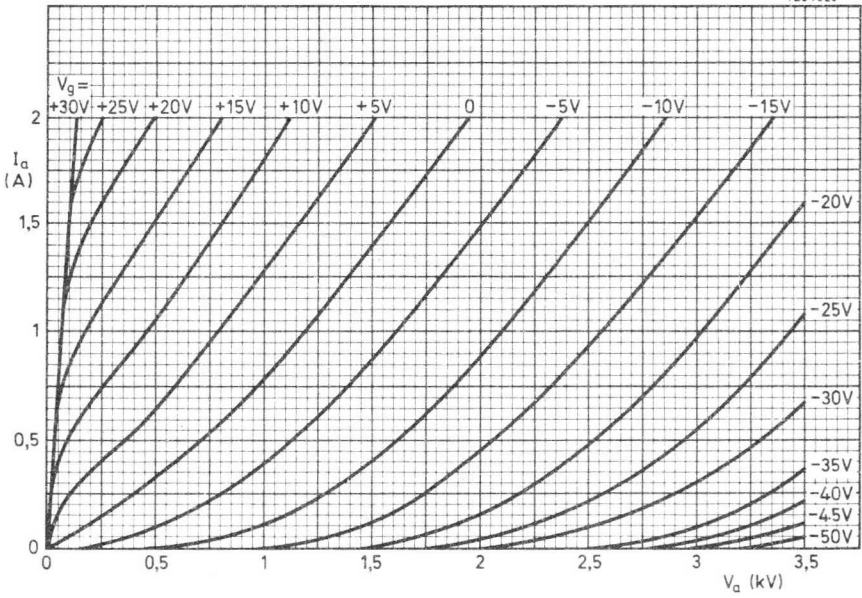

7270218

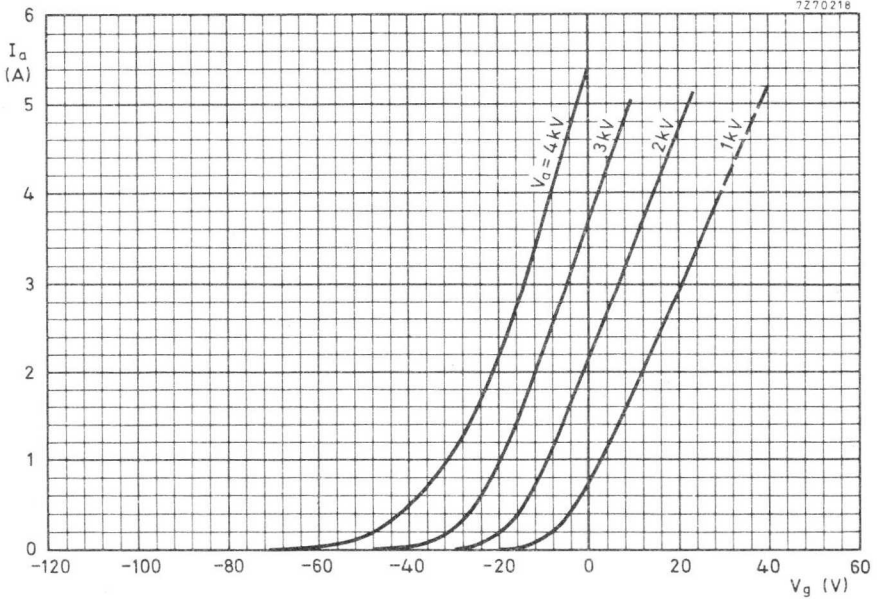

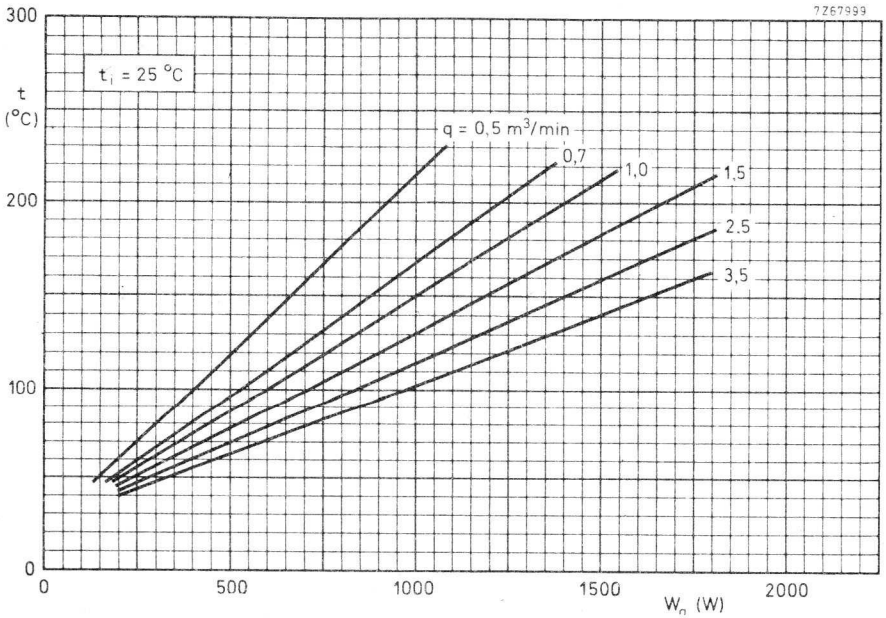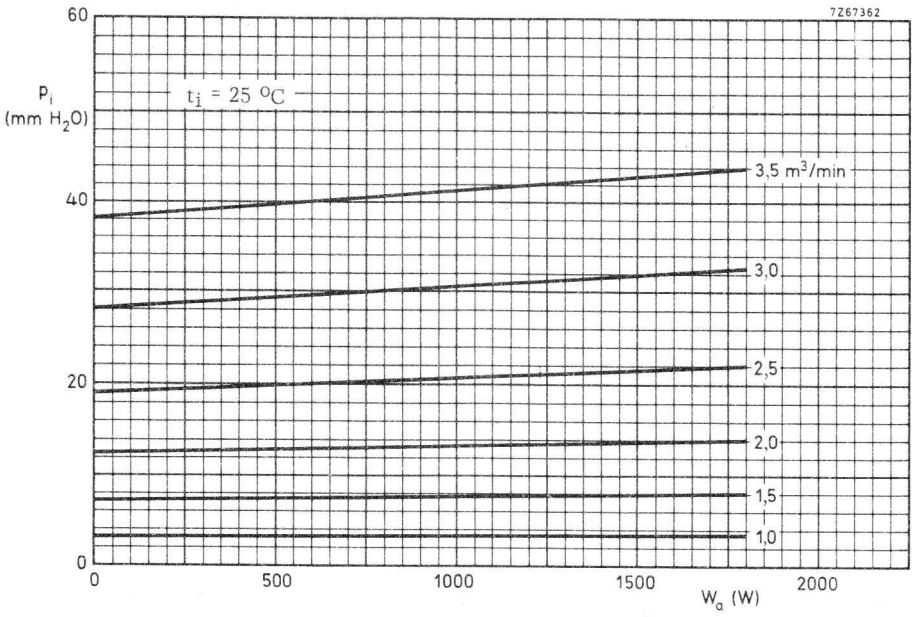

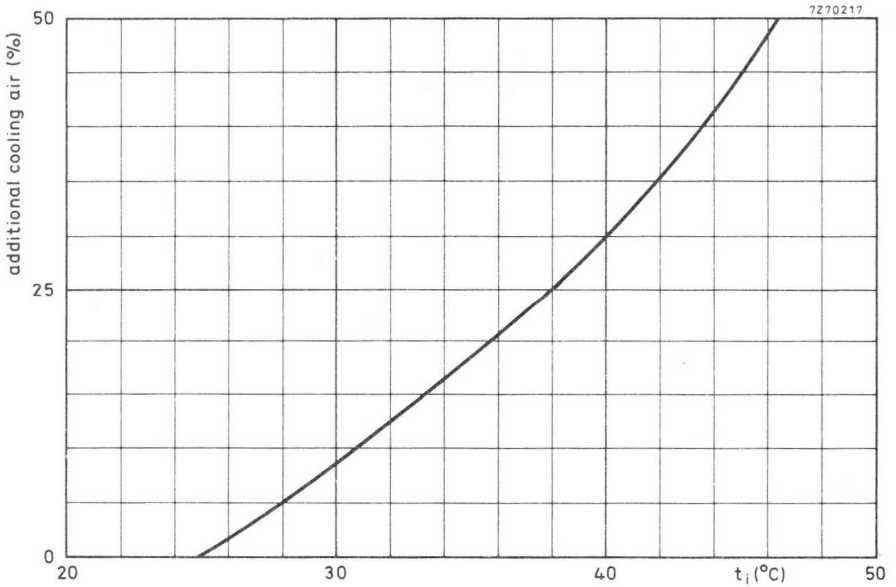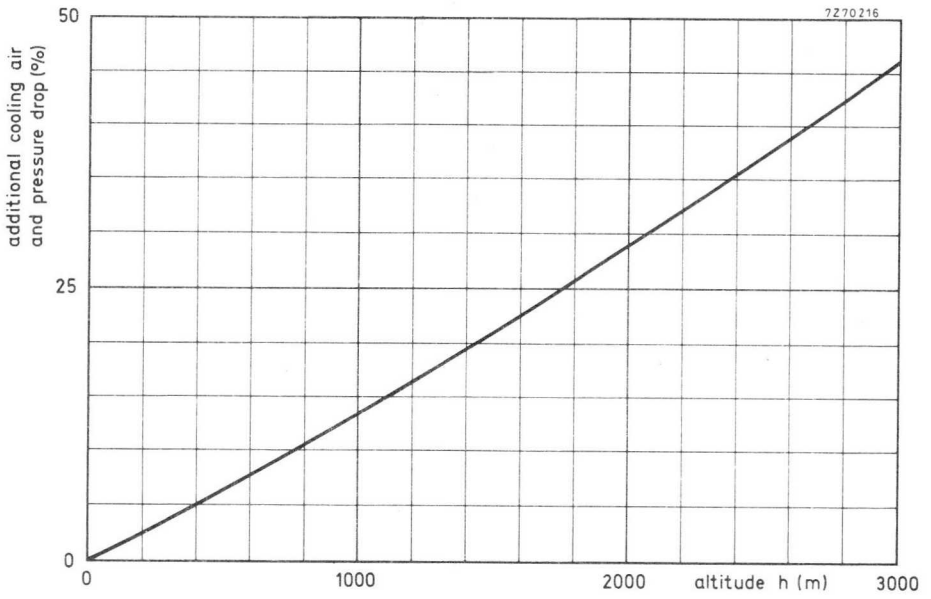

AIR COOLED R.F. POWER TRIODE

Forced-air cooled coaxial power triode in metal-ceramic construction primarily intended for use as R.F. class AB linear broadband amplifier in TV sound and vision service at frequencies up to 1000 MHz.

QUICK REFERENCE DATA

Frequency	f	470 to 860	MHz
Anode voltage	V_a	3500	V
Output power in the load (sync - CCIR-G) (peak white - CCIR - L)	W_ℓ	550	W
	W_ℓ	550	W
Power gain	G	15	dB

HEATING : indirect by a.c. (50 Hz to 400 Hz) or d.c.; oxide coated cathode.

Heater voltage	V_f	6,0 to 6,3	$V \pm 5\%^{1)}$
Heater current	I_f	4,8 to 5,8	A
Cathode heating time	T_h	min. 180	s

CAPACITANCES

Anode to grid	C_{ag}	6,8 to 8	pF
Grid to cathode and heater	$C_{g/kf}$	20 to 30	pF
Anode to cathode and heater	$C_{a/kf}$	90 to 180	fF

TYPICAL CHARACTERISTICS

Anode voltage	V_a	3	kV
Anode current	I_a	400	mA
Transconductance	S	70	mA/V
Amplification factor	μ	90	

TEMPERATURE LIMITS

Absolute max. temperature measured at reference points	t	max. 250	°C
---	---	----------	----

To obtain optimum life this temperature should not exceed 200 °C.

¹⁾ For optimum performance as TV broadband amplifier (linearity) the voltage set must be maintained within $\pm 2\%$.

Data based on pre-production tubes.

COOLING

Anode: forced air

W_a (W)	t_i (°C)	Q_{min} (m ³ /min)	P_i (mm H ₂ O)
1800	25	2,5	22

Other terminals: low velocity air flow.

When only the heater voltage is applied, the heater and heater/cathode terminals should also be cooled.

Cooling air and voltages may be switched off simultaneously.

MECHANICAL DATA



Dimensions in mm

Net mass: approx. 1000 g

Mounting position: any

Accessories:

Band IV and V amplifier circuit
assembly type 40771

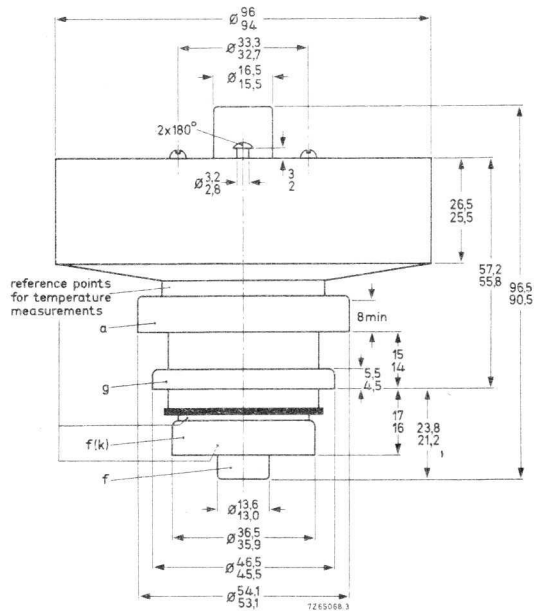

The radiator and the terminals are situated within concentric cylinders of the following dimensions :

Radiator	97,0 dia
Anode terminal	55,1 dia
Grid terminal	47,0 dia
Heater/cathode terminal	37,0 dia
Heater terminal	14,5 dia

R.F. CLASS AB AMPLIFIER FOR TELEVISION SERVICE , grounded grid

LIMITING VALUES (Absolute max. rating system)

Frequency	f	up to	1000	MHz
Anode voltage	V_a	max.	3800	V
Grid voltage	$-V_g$	max.	200	V
Anode dissipation	W_a	max.	1900	W ¹⁾
Grid current	I_g	max.	± 5	mA
Cathode current	I_k	max.	700	mA ¹⁾

OPERATING CONDITIONS grounded grid ²⁾

Standard		CCIR-G	CCIR-L	
Frequency	f	470 to 860	470 to 860	MHz
Anode voltage	V_a	3500	3500	V
Grid voltage ³⁾	V_g	-38	-38	V
Anode current, no signal	I_a	250	250	mA
Anode current at average grey level	I_a	≈ 500	≈ 500	mA
Grid current	I_g	≈ 0	≈ 0	mA
Driver output power, sync	W_{dr}	21		W
peak white	W_{dr}		21	W
Output power in load, sync	W_{ℓ}	550		W
peak white	W_{ℓ}		550	W
Power gain	G	15	15	dB
Differential gain		95	95	% ⁴⁾

¹⁾ During a short period, for adjustment of the transmitter, $W_a = \text{max. } 2200 \text{ W}$, and $I_k = \text{max. } 800 \text{ mA}$.


²⁾ R. F. driving power should be applied after the heater and electrode voltages.

³⁾ To be adjusted for the stated no-signal anode current. Range values for equipment design -20 to -50 V.


⁴⁾ Standard CCIR-G: Measured with a saw-tooth drive of 15% to 80% of peak sync amplitude with a superimposed 4,43 MHz signal with a peak-to-peak value of 10% of the peak sync amplitude adjusted at picture white level.



Standard CCIR-L: Measured on white level with a sawtooth drive of 30% to 100% of peak white amplitude with a superimposed 3 MHz signal with a peak-to-peak value of 30% of the picture white amplitude.



7264829

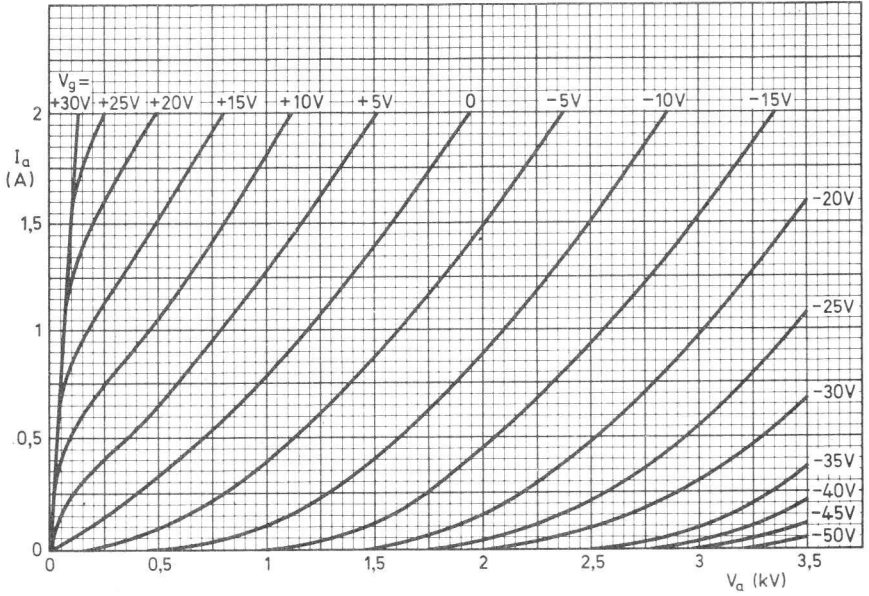

7270218

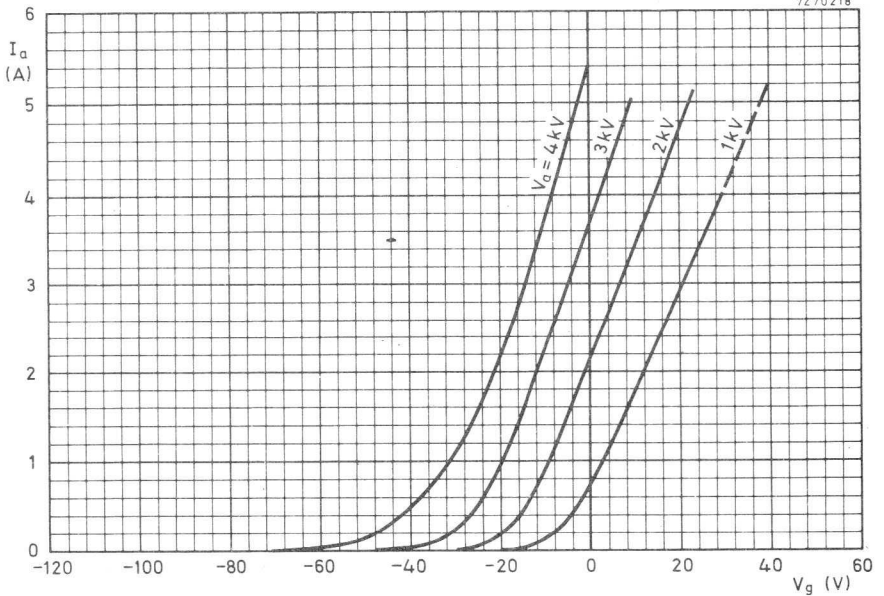

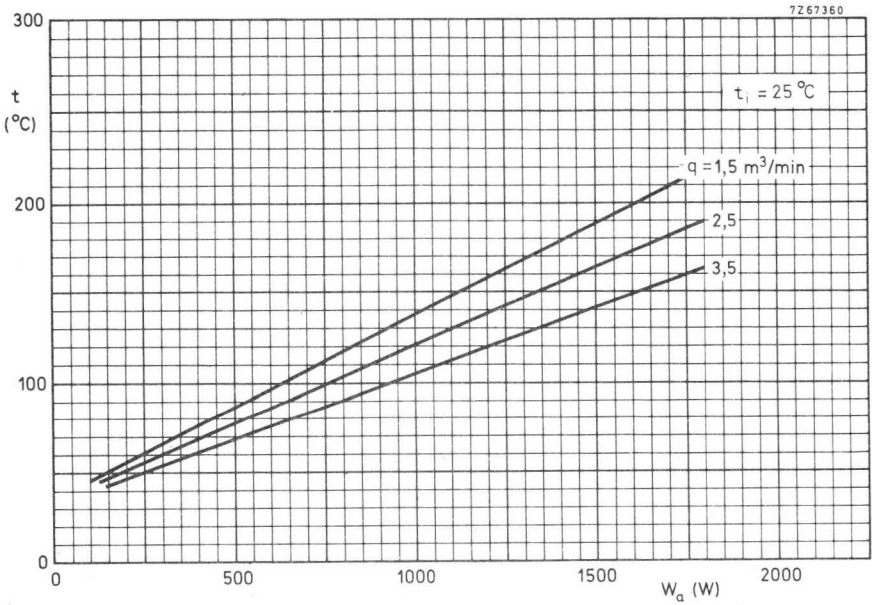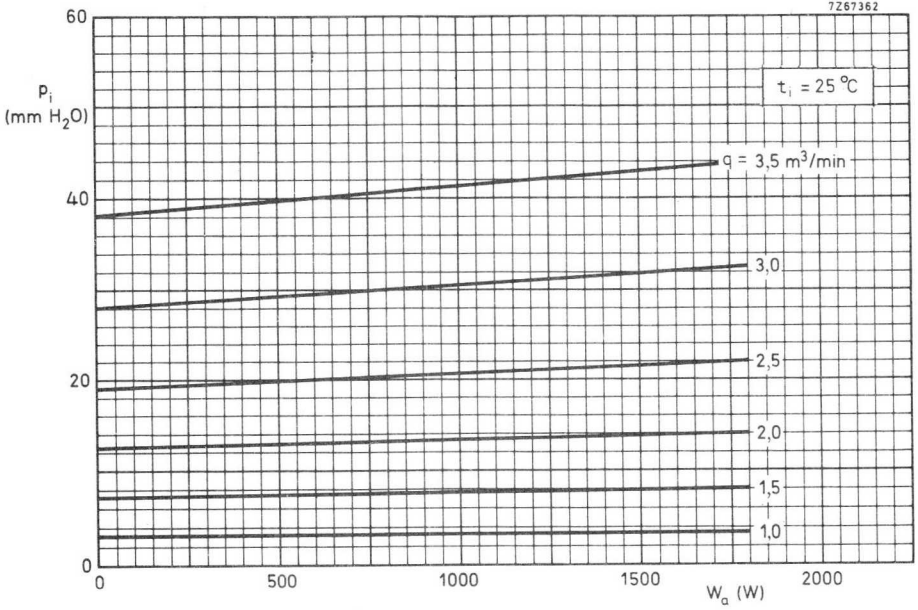

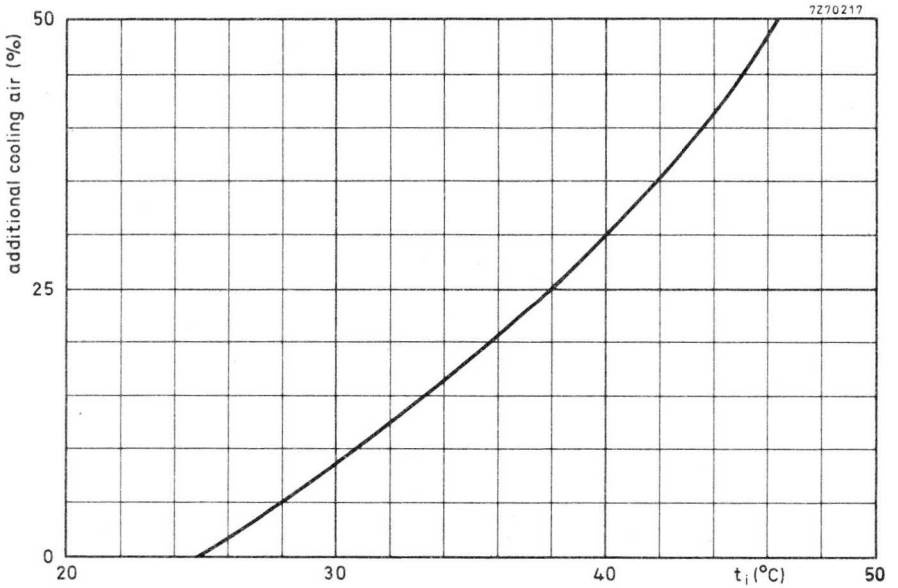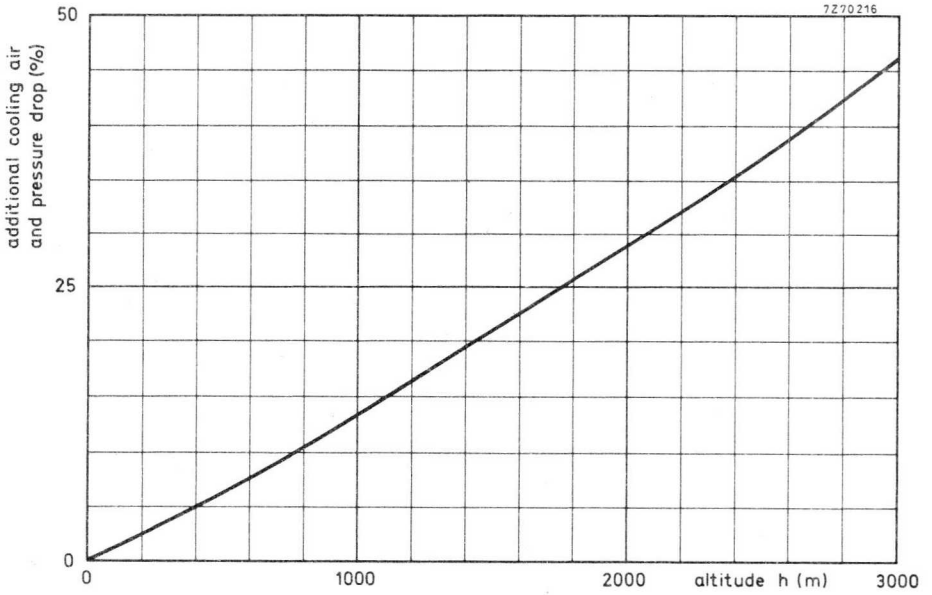

AIR COOLED R.F. POWER TRIODE

Forced-air cooled coaxial power triode in metal-ceramic construction primarily intended for use as R.F. class AB linear broadband amplifier in TV transposer service at frequencies up to 1000 MHz.

QUICK REFERENCE DATA

Transposer service (combined sound and vision)			
Frequency	f	470 to 860	MHz
Anode voltage	V_a	3000	V
Output power in the load (sync)	W_ℓ	220	W
Power gain	G	16,5	dB

HEATING : indirect, by a.c. (50 Hz to 400 Hz) or d.c. ; oxide coated cathode.

Heater voltage	V_f	6,0 to 6,3	$V \pm 5\%$ ¹⁾
Heater current	I_f	4,8 to 5,8	A
Cathode heating time	T_h	min. 180	s

CAPACITANCES

Anode to grid	C_{ag}	6,8 to 8	pF
Grid to cathode and heater	$C_{g/kf}$	20 to 30	pF
Anode to cathode and heater	$C_{a/kf}$	90 to 180	fF

TYPICAL CHARACTERISTICS

Anode voltage	V_a	3	kV
Anode current	I_a	400	mA
Transconductance	S	70	mA/V
Amplification factor	μ	90	

TEMPERATURE LIMITS

Absolute max. temperature measured at reference points	t	max. 250	°C
--	---	----------	----

To obtain optimum life, this temperature should not exceed 200 °C.

¹⁾ The heater voltage must be adjusted between 6,0 and 6,3 V.

For optimum performance (linearity) the voltage set must be maintained within $\pm 2\%$ for transposer service, or $\pm 5\%$ for other applications.

COOLING

Anode: forced air

W_a (W)	t_i (°C)	q_{min} (m ³ /min)	P_i (mm H ₂ O)
1800	25	2,5	22

Other terminals: low velocity air flow.

When only the heater voltage is applied, the heater and heater/cathode terminals should also be cooled.

Cooling air and voltages may be switched off simultaneously.

MECHANICAL DATA



Dimensions in mm

Net mass: approx. 1000g

Mounting position: any

Accessories:

Band IV and V amplifier circuit assembly type 40771

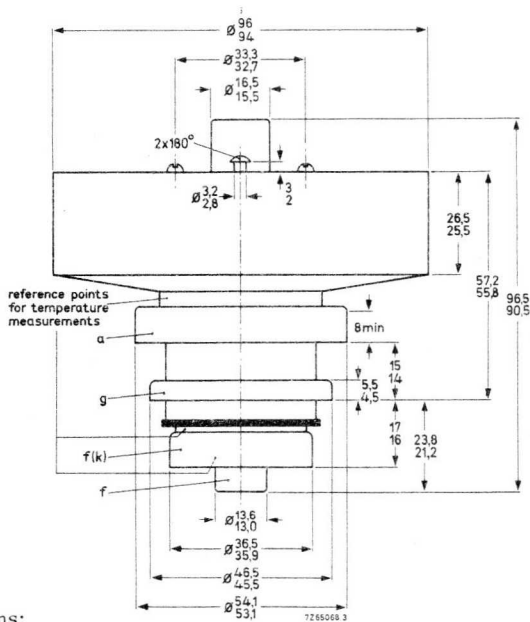

The radiator and the terminals are situated within concentric cylinders of the following dimensions:

Radiator	97,0 dia
Anode terminal	55,1 dia
Grid terminal	47,0 dia
Heater/cathode terminal	37,0 dia
Heater terminal	14,5 dia

R.F. CLASS AB AMPLIFIER FOR TV TRANSPOSER SERVICE grounded grid

LIMITING VALUES (Absolute max. rating system)

Frequency	f	up to	1000	MHz
Anode voltage	V_a	max.	3500	V
Grid voltage	$-V_g$	max.	200	V
Anode dissipation	W_a	max.	1800	W
Grid current	I_g	max.	± 5	mA
Cathode current	I_k	max.	550	mA ¹⁾

OPERATING CONDITIONS, grounded grid ²⁾³⁾

Standard		C. C. I. R-G	C. C. I. R-G	C. C. I. R-I	
Frequency	f	470 to 860	470 to 860	470 to 860	MHz
Anode voltage	V_a	3000	3000	3000	V
Grid voltage ⁴⁾	V_g	-30	-30	-30	V
Anode current, no signal	I_a	420	350	420	mA
Anode current at zero dB level (vision carrier)	I_a	650	550	650	mA
Grid current	I_g	≈ 0	≈ 0	≈ 0	mA
Driver output power (sync)	W_{dr}	7	8	7	W
Output power in load (sync)	W_l	220	220	220	W
Output power at $I_g = 0$	W_o	≥ 390	≥ 390	≥ 390	W
Power gain	G	16,5	16,0	16,5	dB
Intermodulation products	d	-57 ⁵⁾ < -55	-56 ⁵⁾ < -54	-55 ⁶⁾ < -53	dB

¹⁾ During a short period, for adjustment of the transmitter, I_k max. = 700 mA

²⁾ Negative modulation, positive synchronization, combined sound and vision.



³⁾ R.F. driving power should be applied after the heater and electrode voltages.



⁴⁾ To be adjusted for the stated no. signal anode current. Range values for equipment design -15 to -45 V.



⁵⁾ Three-tone test method (vision carrier -8 dB, sound carrier -10 dB, sideband signal -16 dB with respect to peak sync level = 0 dB.).

⁶⁾ Three-tone test method (vision carrier -8 dB, sound carrier -7 dB, sideband signal -17 dB with respect to peak sync level = 0 dB.).

7254829

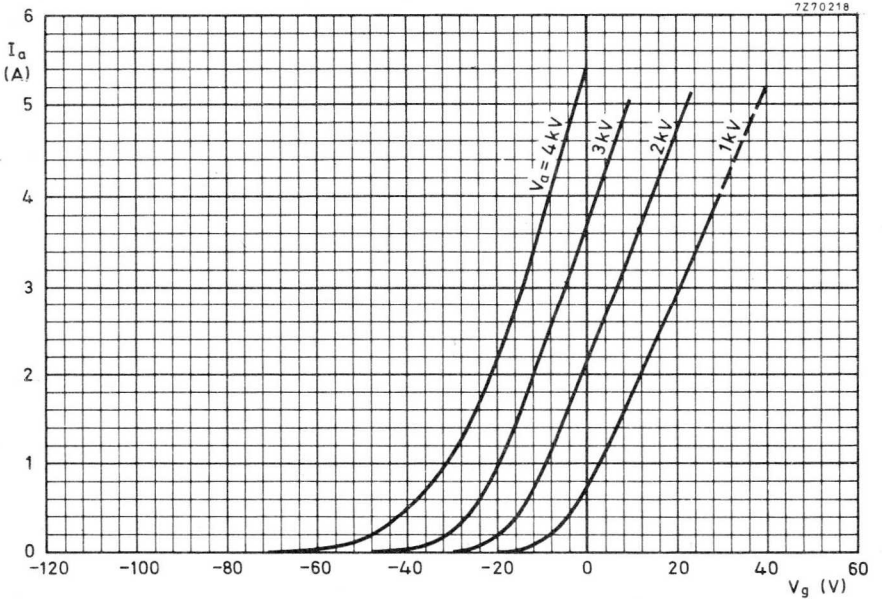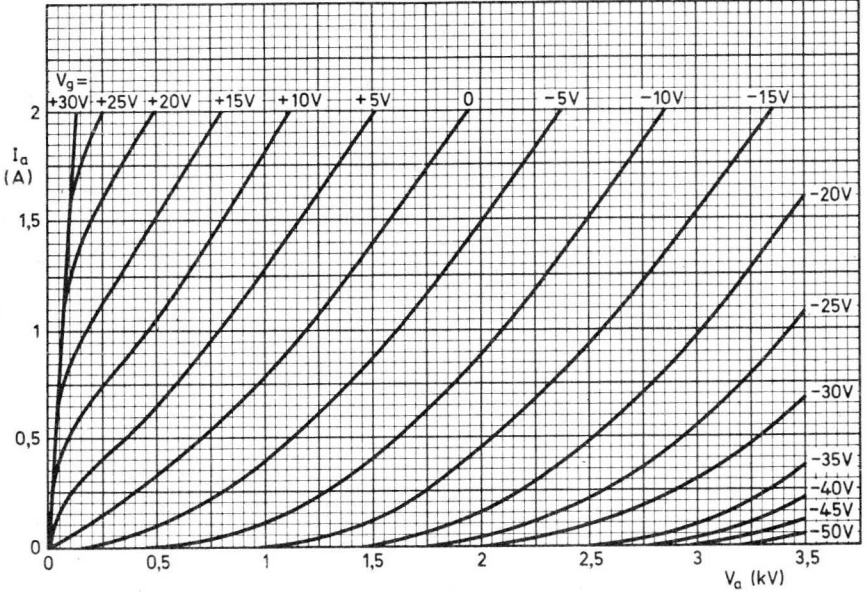

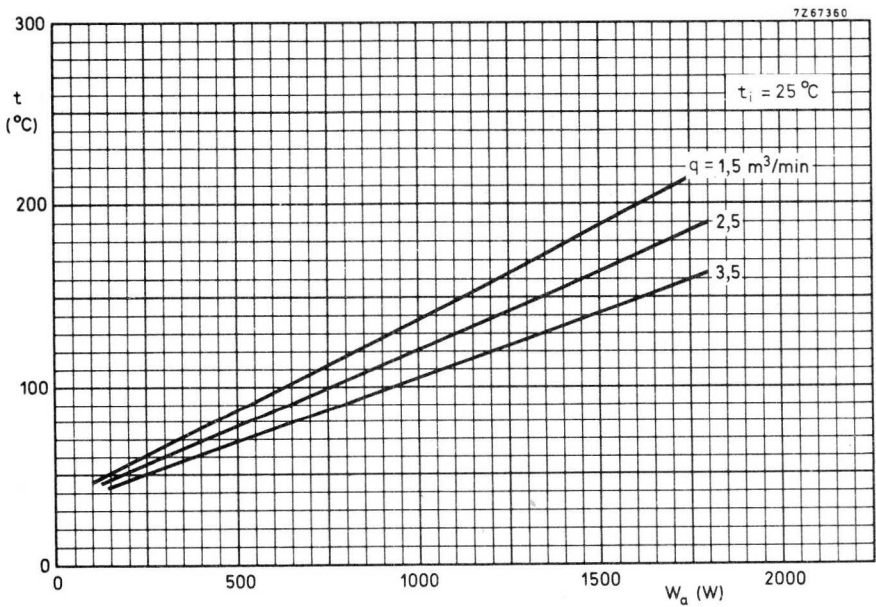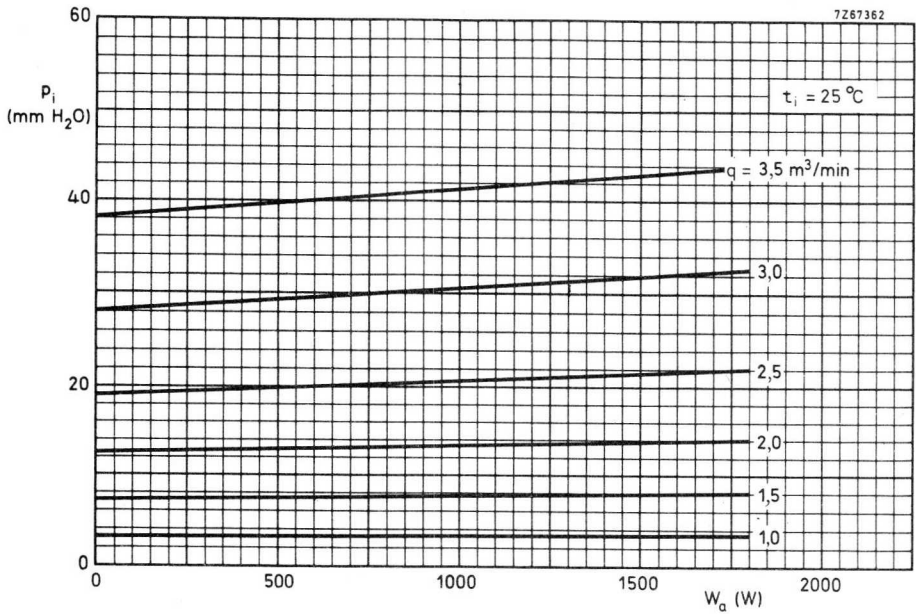

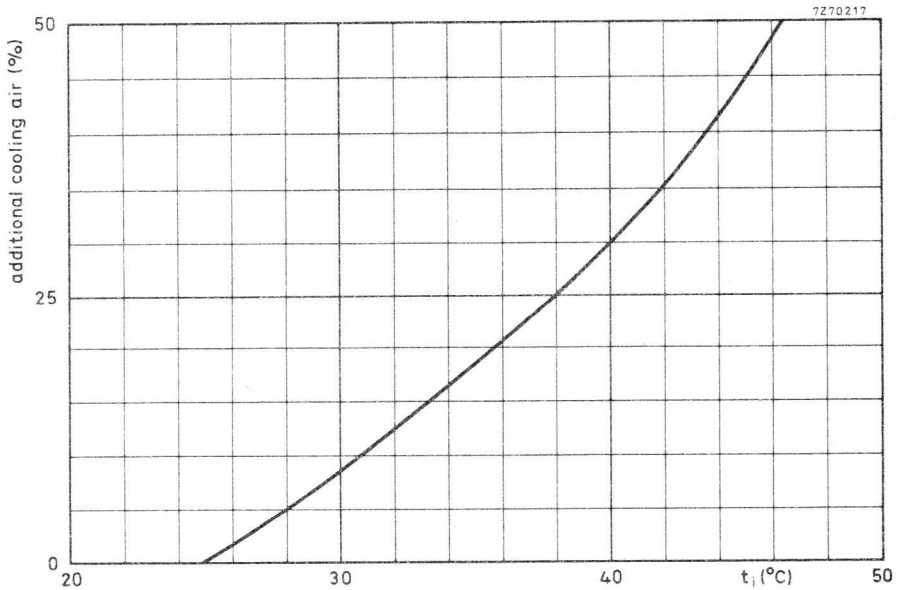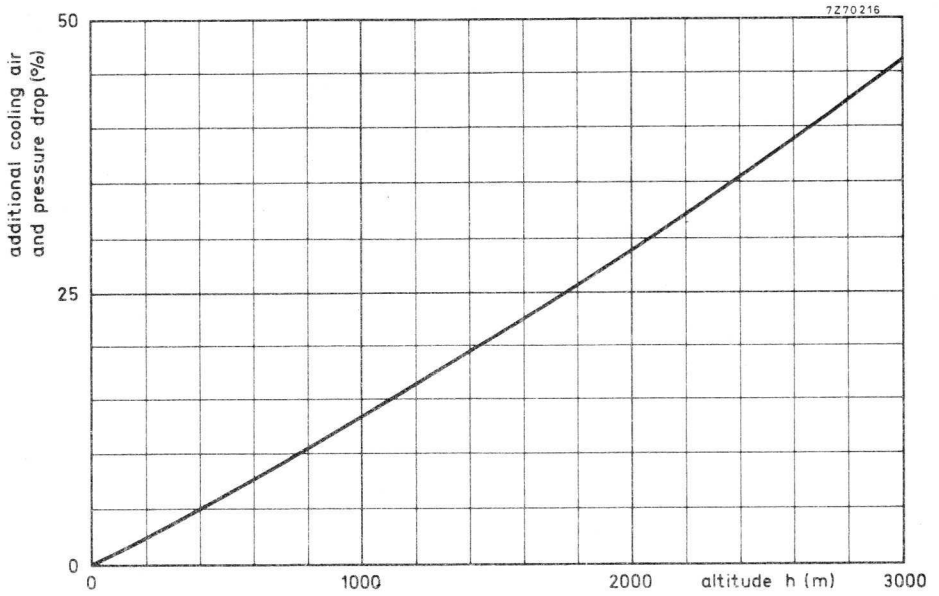

INDUSTRIAL R.F. TRIODE

Triodes in metal-ceramic construction intended for use as industrial oscillators.
The YD1342 has an integral water cooler.
The YD1343 is vapour cooled.

QUICK REFERENCE DATA

Oscillator output power ($W_o - W_{\text{feedb}}$)	W_{osc}	480	kW
Frequency for full ratings	f	max. 30	MHz

To be read in conjunction with "General Recommendations Transmitting Tubes for Communication, Tubes for R.F. Heating".

R.F. CLASS C OSCILLATOR FOR INDUSTRIAL USE

OPERATING CONDITIONS

Frequency	f	30	MHz
Oscillator output power ($W_o - W_{\text{feedb}}$)	W_{osc}	480	kW
Anode voltage	V_a	16	kV
Anode current	I_a	42	A
Anode input power	W_{ia}	672	kW
Anode dissipation	W_a	183	kW
Anode output power	W_o	489	kW
Anode efficiency	η_a	73	%
Oscillator efficiency	η_{osc}	71,5	%
Feedback ratio	V_{gp}/V_{ap}	9,3	%
Grid resistor	R_g	100	Ω
Grid current, on load	I_g	7,5	A
Grid voltage, negative	$-V_g$	750	V
Grid dissipation	W_g	3,4	kW
Grid resistor dissipation	W_{Rg}	5,6	kW

LIMITING VALUES (Absolute max. rating system)

Frequency for full ratings	f	up to	30	MHz
Anode voltage	V_a	max.	19,5	kV
Anode current	I_a	max.	45	A
Anode input power	W_{ia}	max.	750	kW
Anode dissipation	W_a	max.	240	kW
Grid voltage	$-V_g$	max.	2,5	kV
Grid current, on load off load	I_g	max.	9	A
	I_g	max.	11	A
Grid dissipation	W_g	max.	6	kW
Grid circuit resistance	R_g	max.	10	$k\Omega$
Cathode current, mean peak	I_k	max.	55	A
	I_{kp}	max.	250	A
Envelope temperature	t_{env}	max.	240	$^{\circ}C$

HEATING : direct; thoriated tungsten filament, mesh construction

Filament voltage	V_f		14	V
Filament current	I_f		555	A
Peak filament starting current	I_{fp}	max.	3500	A
Cold filament resistance	R_{f0}		2,6	$m\Omega$
Waiting time	T_w	min.	5	s

The filament is designed to accept temporary fluctuations of +5% and - 10%.

It is extremely important that the filament be properly decoupled. This should be so done that the resonance of the circuit formed by the filament and decoupling elements remains below the fundamental oscillator frequency. In grounded-grid circuits this resonance should be below the grid-cathode resonance. For further information please see Application Book "Tubes for R.F. heating" or contact the manufacturer.

CAPACITANCES

Anode to filament	C_{af}		3,9	pF
Grid to filament	C_{gf}		225	pF
Anode to grid	C_{ag}		70	pF

CHARACTERISTICS measured at $V_a = 16$ kV, $I_a = 18$ A

Transconductance	S		230	mA/V
Amplification factor	μ		35	

COOLING

To obtain optimum life, the temperature of the seals and of the envelope should, under normal operating conditions, be kept below 200 °C.

At low frequencies the seals are sufficiently cooled if the filament connectors are water-cooled by a flow of about 1 l/min. At high frequencies, however, an additional airflow of about 6 m³/min must be led along the seals from a 60 mm diameter nozzle positioned at a distance of 300 mm from the tube header.

YD1342

Anode + grid dissipation $W_a + W_g$ (kW)	Inlet temperature t_i (°C)	Rate of flow q_{min} (l/min)	Pressure drop P_i (kPa*)	Outlet temperature t_o (°C)
240	20	120	100	50
	50	180	180	70
200	20	95	65	52
	50	144	120	71
160	20	72	42	54
	50	110	75	72

Absolute max. water inlet temperature	t_i	max.	50	°C
Absolute max. water pressure	p	max.	600	kPa *

* 100 kPa \approx 1 at.

YD1343

With integrated boiler-condenser type K738

Anode + grid dissipation $W_a + W_g$ (kW)	Inlet temperature t_i (°C)	Rate of flow q_{min} (l/min)	Pressure drop P_i (kPa *)	Outlet temperature t_o (°C)
240	20	80	38	64
	35	122	75	64
200	20	61	33	69
	35	88	44	69
	50	158	118	69
160	20	42	13	77
	35	58	22	76
	50	95	50	75

→ ACCESSORIES

Filament connector with cable	type	40695A	net mass	1,4	kg
Filament/cathode connector with cable	type	40696A	net mass	1,6	kg
Grid connector	type	$f \leq 4$ MHz	40694	net mass	270 g
		$f > 4$ MHz	40737	net mass	525 g
Boiler-condenser (YD1343 only)	type	K738	net mass	150	kg

* 100 kPa \approx 1 at.


MECHANICAL DATA

Dimensions in mm

YD1342

Mounting position : vertical with anode up or down

Net mass : approx. 30 kg

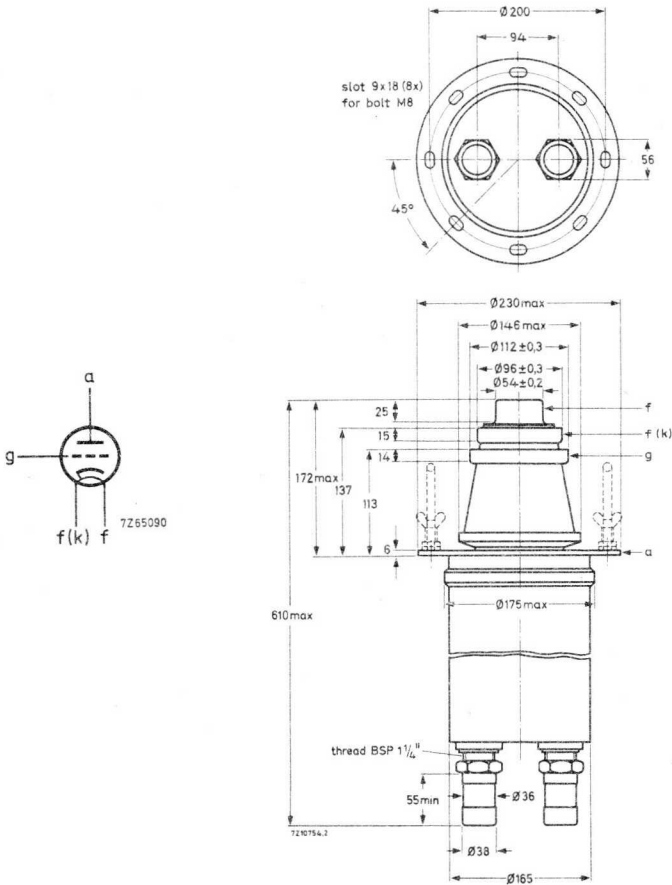

The handles should be removed before switching on the tube


When using the tube in the anode up position the input and output water connections should be reversed.

YD1342
YD1343


YD1343

Mounting position : vertical with anode up or down

Net mass : approx. 45 kg

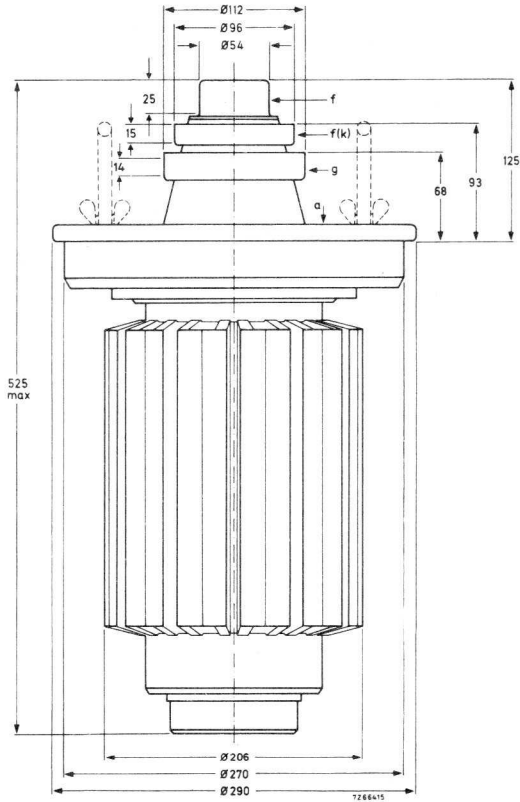

The handles should be removed before switching on the tube.

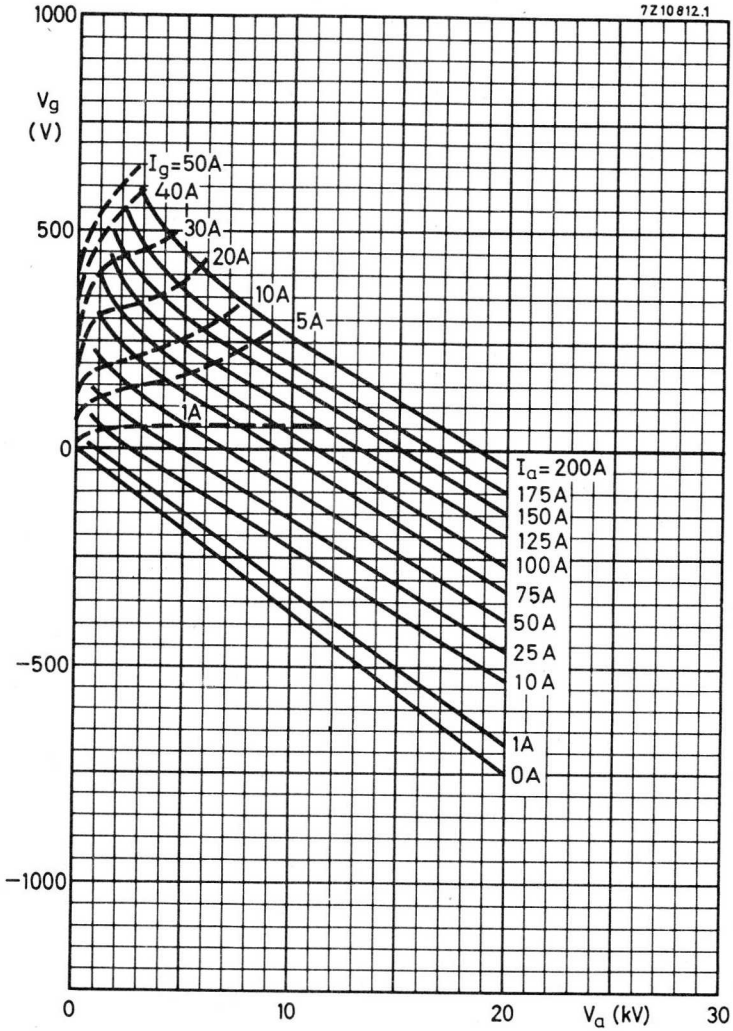

WATER-COOLED MAGNETICALLY BEAMED INDUSTRIAL R.F. TRIODE

Water-cooled magnetically focused triode of metal-ceramic construction with integral water jacket intended for use as industrial oscillator.

QUICK REFERENCE DATA

Oscillator output power ($W_o - W_{\text{feedb}}$), typical	W_{osc}	3	kW
Frequency for full ratings	f max.	5	MHz

To be read in conjunction with "General Operational Recommendations Transmitting Tubes for Communication, Tubes for R. F. Heating".

R.F. CLASS.C OSCILLATOR FOR INDUSTRIAL USE

Anode voltage single phase, full-wave rectified, unfiltered

OPERATING CONDITIONS

Frequency	f	5	MHz
Oscillator output power ($W_o - W_{\text{feedb}}$)	W_{osc}	3094	W
Transformer voltage	$V_{\text{tr rms}}$	5000	V
Anode voltage, mean	V_a	4500	V
Anode current, mean	I_a	720	mA
Anode input power	W_{ia}	4000	W
Anode dissipation	W_a	900	W
Anode output power	W_o	3100	W
Anode efficiency	η_a	78	%
Oscillator efficiency	η_{osc}	77.4	%
Feedback ratio	$V_{\text{gp}}/V_{\text{ap}}$	33	%
Grid resistor	R_g	80	k Ω
Grid current, on load	I_g	4,5	mA
off load	I_g	9,0	mA
Grid voltage, negative	$-V_g$	360	V ¹⁾
Grid dissipation	W_g	4,4	W
Grid resistor dissipation	W_{Rg}	1,6	W

1) Max. -565 V.

LIMITING VALUES (Absolute max. rating system)

Frequency for full ratings	f	max.	5	MHz
Anode voltage, mean	V_a	max.	4500	V
Anode current, mean	I_a	max.	725	mA
Anode input power	W_{ia}	max.	4	kW
Anode dissipation	W_a	max.	2	kW
Grid voltage	V_g	max.	2400	V
Grid current	I_g	max.		see 1)
Grid dissipation	W_g	max.	25	W
Grid circuit resistance	R_g	max.	88	k Ω
Cathode current, mean	I_k	max.	730	mA
Seal temperature	t	max.	200	$^{\circ}\text{C}$

HEATING : indirect; nickel-oxide cathode, dispenser type

Heater voltage	V_f		5	V
Heater current	I_f		6, 1	A
Waiting time	T_w min.		2	min.

The filament is designed to accept temporary fluctuations of +10 % and -10 %.

CAPACITANCES

Anode to cathode	C_{ak}		0, 3	pF
Grid to cathode	C_{gk}		9, 8	pF
Anode to grid	C_{ag}		11, 5	pF

CHARACTERISTICS measured at $V_a = 3$ kV, $I_a = 500$ mA

Transconductance	S		4	mA/V
Amplification factor	μ		25	
Magnetic flux density	B	min.	115	mT (= 1150 Gs)

Care should be taken that the magnetic flux density is not influenced by external magnetic materials.

1) Limited by W_g max. and I_k max.

COOLING

Anode + grid dissipation $W_a + W_g$ (kW)	Inlet temperature t_i (°C)	Rate of flow q min (ℓ/min)	Pressure drop P_i (kPa*)
2	20	3,8	31
	50	5,7	62

The water flow must be maintained for at least 1 minute after anode power is removed. Additional air cooling of the seals may be necessary to keep the temperature below the limiting value. The direction of the water flow must be such that the inflow is below the outlet for either of the two vertical mounting positions.

ACCESSORIES


Magnet assembly (magnetic nest)

type 40765 net mass 2,3 kg

Grid connector

40766

Dimensions in mm

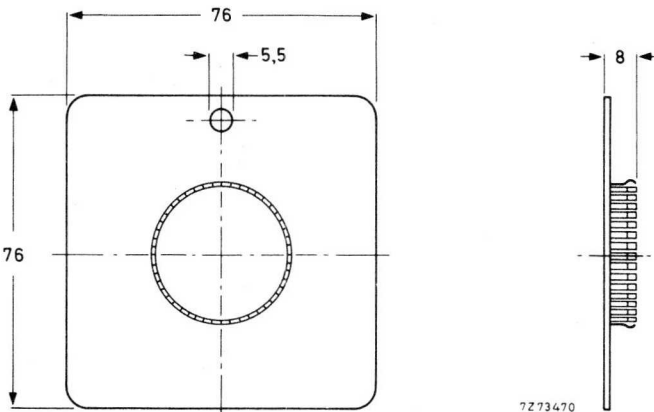

Grid connector 40766


* 100 Pa ≈ 1 at.

MECHANICAL DATA


Dimensions in mm

Mounting position : vertical


Net mass : approx. 0,45 kg

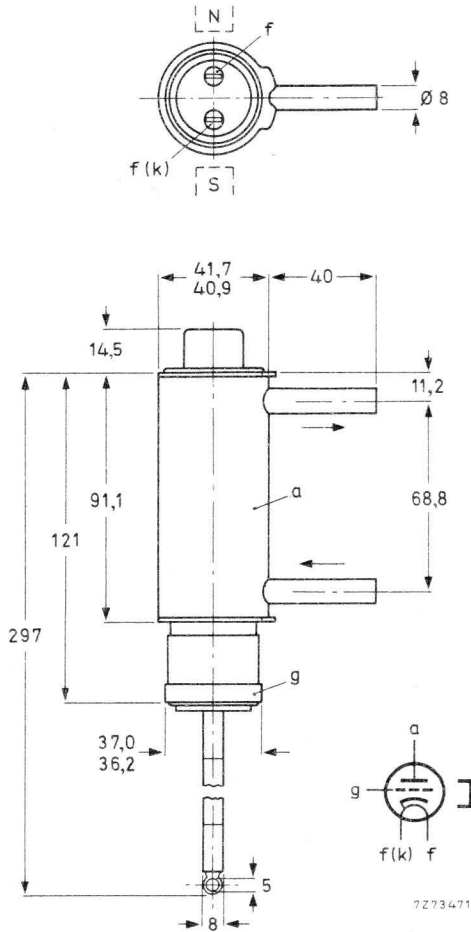

Due to the very rugged construction of this type, generally it can be shipped mounted in the equipment.

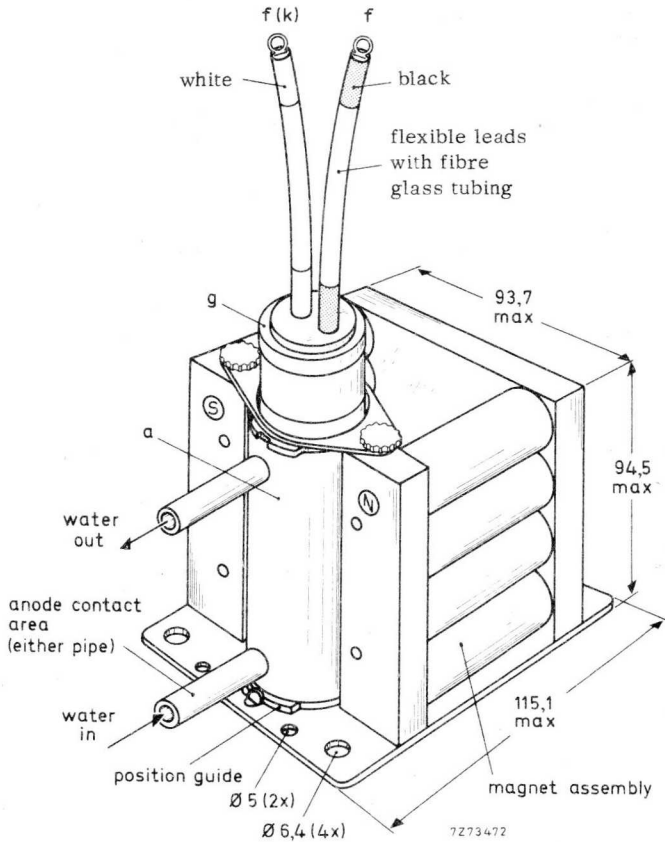

Tube mounted in magnet assembly 40765

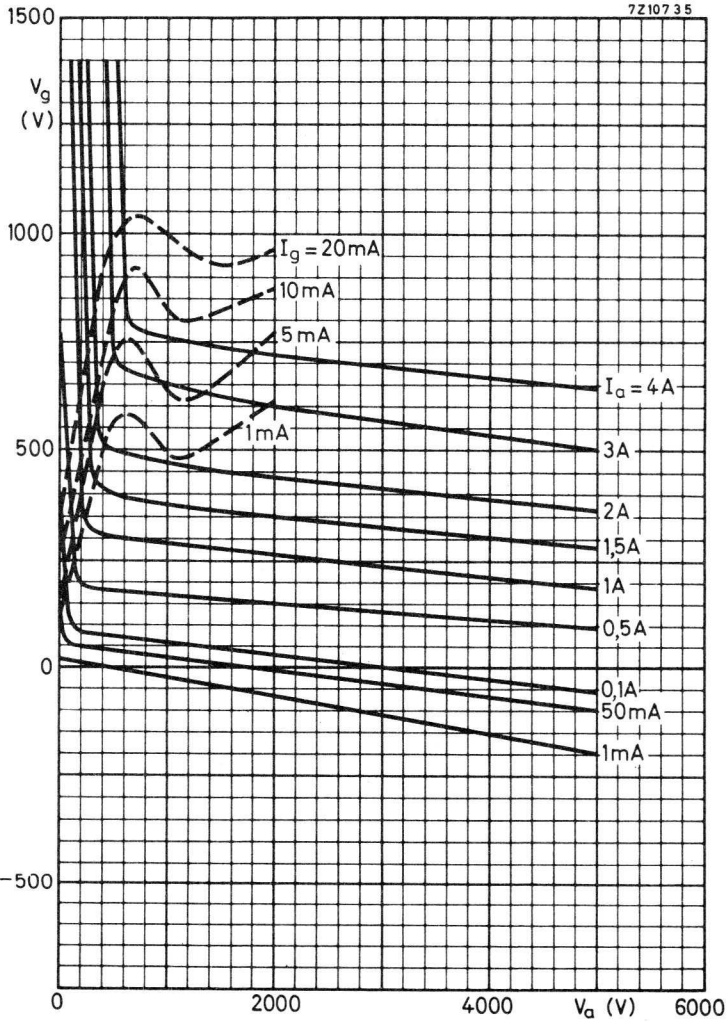

R.F. POWER TETRODES

R.F. power tetrodes in coaxial metal-ceramic construction intended for use as v.h.f. amplifier and s.s.b. amplifier. The YL1010 is water cooled. The YL1011 is air cooled. The YL1012 is vapour cooled.

QUICK REFERENCE DATA

R.F. class-AB amplifier, single-sideband

Frequency	f	30	30 MHz
Anode voltage	V_a	8	10 kV
Output power (P.E.P.)	W_o	30	33 kW

R.F. class-C telegraphy, F.M. telephony

Frequency	f		220 MHz
Anode voltage	V_a		5,5 kV
Output power	W_o		25 kW

R.F. class-C anode and screen grid modulation

Frequency	f		30 MHz
Anode voltage	V_a		10 kV
Output power	W_o		55 kW

HEATING: direct, thoriated tungsten filament

Filament voltage	V_f		9 V
Filament current	I_f		200 A

CAPACITANCES

Anode to all except grid 1	$C_a(g1)$		42 pF
Grid 1 to all except anode	$C_{g1(a)}$		260 pF
Anode to grid 1	C_{ag1}		1,5 pF

TYPICAL CHARACTERISTICS

Anode voltage	V_a		3 kV
Grid 2 voltage	V_{g2}		1,2 kV
Anode current	I_a		2,5 A
Transconductance	S		65 mA/V
Amplification factor	μ_{g2g1}		6,6

TEMPERATURE LIMITS AND COOLING

YL1010

Absolute maximum envelope and seal temperature

t_{env} max 220 °C

Absolute maximum water inlet temperature

t_i max 50 °C

Required quantity of water

see cooling curves Fig.1, Fig.2

For temperatures between 20 °C and 50 °C the required quantity of water can be found by linear interpolation.

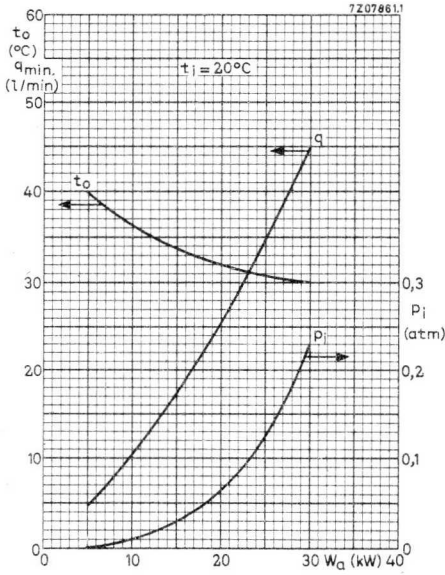


Fig.1

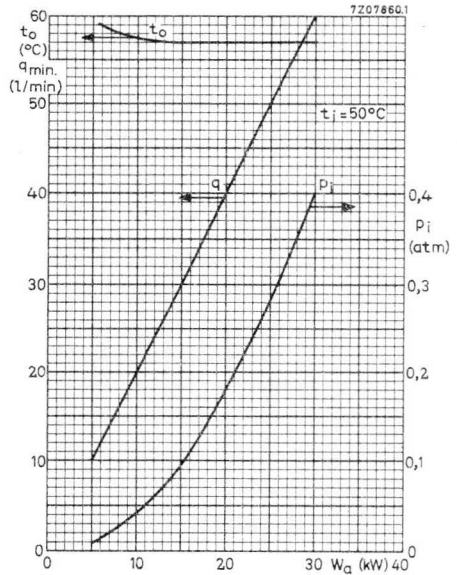


Fig.2

YL1011

Absolute maximum envelope and seal temperature
Required quantity of air

t_{env} max 220 °C
see cooling curve below

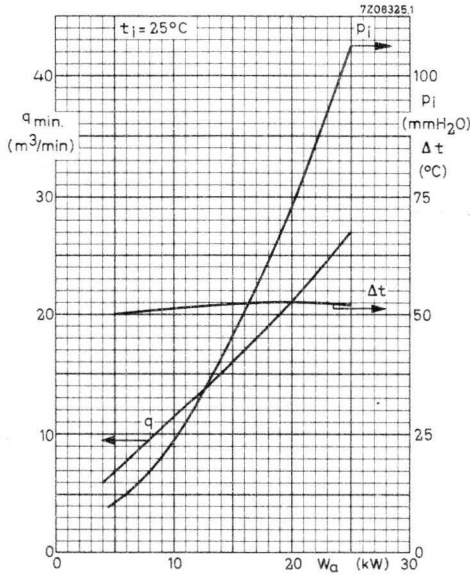


Fig.3

YL1012

Absolute maximum envelope and seal temperature

t_{env} max 220 °C

YL1010
YL1011
YL1012


MECHANICAL DATA

Dimensions in mm

YL1010

Net mass: ≈ 7 kg

Mounting position: Vertical with anode down.

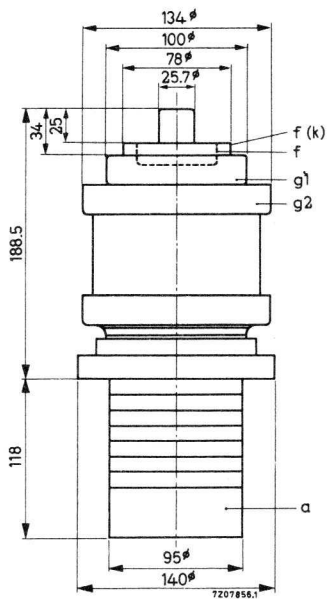


ACCESSORIES

Water-jacket	type K732
Inner filament connector	type 40725
Outer filament connector	type 40726
Grid 1 connector	type 40727
Grid 2 connector	type 40728

YL1011

Net mass: $\approx 13,5$ kg

Mounting position: Vertical with anode down

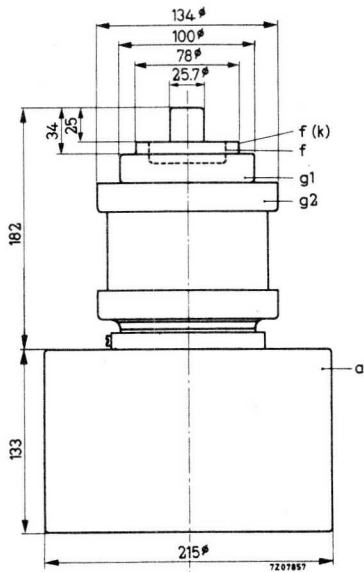

ACCESSORIES


Insulating pedestal	type 40729
Inner filament connector	type 40725
Outer filament connector	type 40726
Grid 1 connector	type 40727
Grid 2 connector	type 40728

YL1010
 YL1011
 YL1012

YL1012

Net mass: $\approx 14,7$ kg

Mounting position: Vertical with anode down

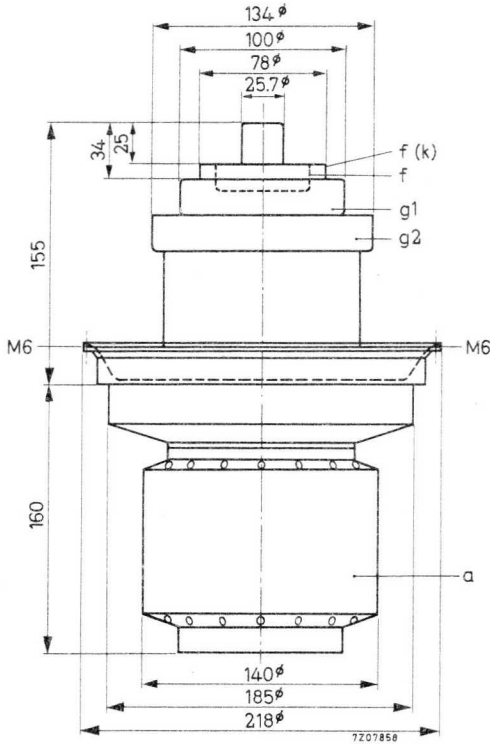

ACCESSORIES

Boiler	type K728
Inner filament connector	type 40725
Outer filament connector	type 40726
Grid 1 connector	type 40727
Grid 2 connector	type 40728

R.F. CLASS-AB LINEAR AMPLIFIER, SINGLE-SIDEBAND, suppressed carrier

LIMITING VALUES (Absolute maximum rating system)

Frequency	f	up to	30	MHz
Anode voltage	V_a	max	12	kV
Grid 2 voltage	V_{g2}	max	1,4	kV
Grid 1 voltage	$-V_{g1}$	max	350	V
Anode current	I_a	max	10	A
Anode input power	W_{ia}	max	72	kW
Anode dissipation YL1010, YL1011	W_a	max	30	kW
Anode dissipation YL1012	W_a	max	45	kW
Grid 2 dissipation	W_{g2}	max	600	W
Grid 1 dissipation	W_{g1}	max	300	W

OPERATING CONDITIONS

Frequency	f		30	MHz
Anode voltage	V_a		8	kV
Grid 2 voltage	V_{g2}		1,2	kV
Grid 1 voltage	V_{g1}		-175	V *
		zero signal	single tone	double tone
Grid 1 driving voltage, peak	V_{g1p}	0	175	175 V
Anode current	I_a	2	5,9	3,8 A
Grid 2 current	I_{g2}	0	250	100 mA
Grid 1 current	I_{g1}	0	0	0 mA
Anode input power	W_{ia}	16	47,2	30,4 kW
Anode dissipation	W_a	16	17,2	15,4 kW
Grid 2 dissipation	W_{g2}	0	300	120 W
Output power (P.E.P.)	W_o	0	30	30 kW
Efficiency	η	—	63,5	49 %
Intermodulation distortion				
3rd order	d_3	—	—	41 dB **
5th order	d_5	—	—	54 dB **

Notes see page 8.

YL1010
YL1011
YL1012

		zero signal	single tone	double tone	
Frequency	f		30		MHz
Anode voltage	V_a		10		kV
Grid 2 voltage	V_{g2}		1,2		kV
Grid 1 voltage	V_{g1}		-185		V *
Grid 1 driving voltage, peak	V_{g1p}	0	185	185	V
Anode current	I_a	2	5,2	3,3	A
Grid 2 current	I_{g2}	0	250	80	mA
Grid 1 current	I_{g1}	0	0	0	mA
Anode input power	W_{ia}	20	52	33	kW
Anode dissipation	W_a	20	19	16,5	kW
Grid 2 dissipation	W_{g2}	0	300	96	W
Output power (P.E.P.)	W_o	0	33	33	kW
Efficiency	η	-	63	50	%
Intermodulation distortion					
3rd order	d_3	-	-	-41	dB **
5th order	d_5	-	-	-54	dB **

* Adjust to give the zero signal anode current.

** Maximum values encountered at any level of drive voltage up to full drive referred to the amplitude of either of the two equal tones at that level.

R.F. CLASS-C TELEGRAPHY OR F.M. TELEPHONY, grounded grid

LIMITING VALUES (Absolute maximum rating system)

Frequency	f	up to	220 MHz
Anode voltage	V_a	max	5,6 kV
Grid 2 voltage	V_{g2}	max	1 kV
Grid 1 voltage	$-V_{g1}$	max	250 V
Anode current	I_a	max	10 A
Anode input power	W_{ia}	max	72 kW
Anode dissipation YL1010, YL1011	W_a	max	30 kW
Anode dissipation YL1012	W_a	max	45 kW
Grid 2 dissipation	W_{g2}	max	300 W
Grid 1 dissipation	W_{g1}	max	200 W

OPERATING CONDITIONS

Frequency	f	220 MHz
Anode voltage	V_a	5,5 kV
Grid 2 voltage	V_{g2}	800 V
Grid 1 voltage	V_{g1}	-200 V
Anode current	I_a	7 A
Grid 2 current	I_{g2}	250 mA
Grid 1 current	I_{g1}	150 mA
Driver output power	W_{dr}	2 kW
Anode input power	W_{ia}	38,5 kW
Anode dissipation	W_a	9 kW
Output power in load	W_{ℓ}	25 kW *
Efficiency	η	77 %

* Feed-through power included. Measured in a circuit having an efficiency of approx. 85%.


R.F. CLASS-C ANODE AND SCREEN GRID MODULATION (carrier conditions)

LIMITING VALUES (Absolute maximum rating system)

Frequency	f	up to	30 MHz
Anode voltage	V_a	max	10 kV
Anode input power	W_{ia}	max	74 kW
Anode dissipation YL1010, YL1011	W_a	max	20 kW
Anode dissipation YL1012	W_a	max	30 kW
Anode current	I_a	max	8,5 A
Grid 2 voltage	V_{g2}	max	900 V
Grid 2 dissipation	W_{g2}	max	600 W
Grid 1 voltage	$-V_{g1}$	max	350 V
Grid 1 dissipation	W_{g1}	max	300 W

OPERATING CONDITIONS

Frequency	f	30 MHz
Anode voltage	V_a	10 kV
Grid 2 voltage	V_{g2}	800 V
Grid 1 voltage	V_{g1}	-150 V
Grid 1 resistor	R_{g1}	500 Ω
Anode current	I_a	7,4 A
Grid 2 current	I_{g2}	340 mA
Grid 1 current	I_{g1}	310 mA
Driver output power	W_{dr}	120 W
Anode input power	W_{ia}	74 kW
Anode dissipation	W_a	19 kW
Output power	W_o	55 kW
Efficiency	η	74,4 %
Modulation depth	m	100 %
Modulation power	W_{mod}	37 kW
Grid 2 voltage, peak	V_{g2p}	700 V

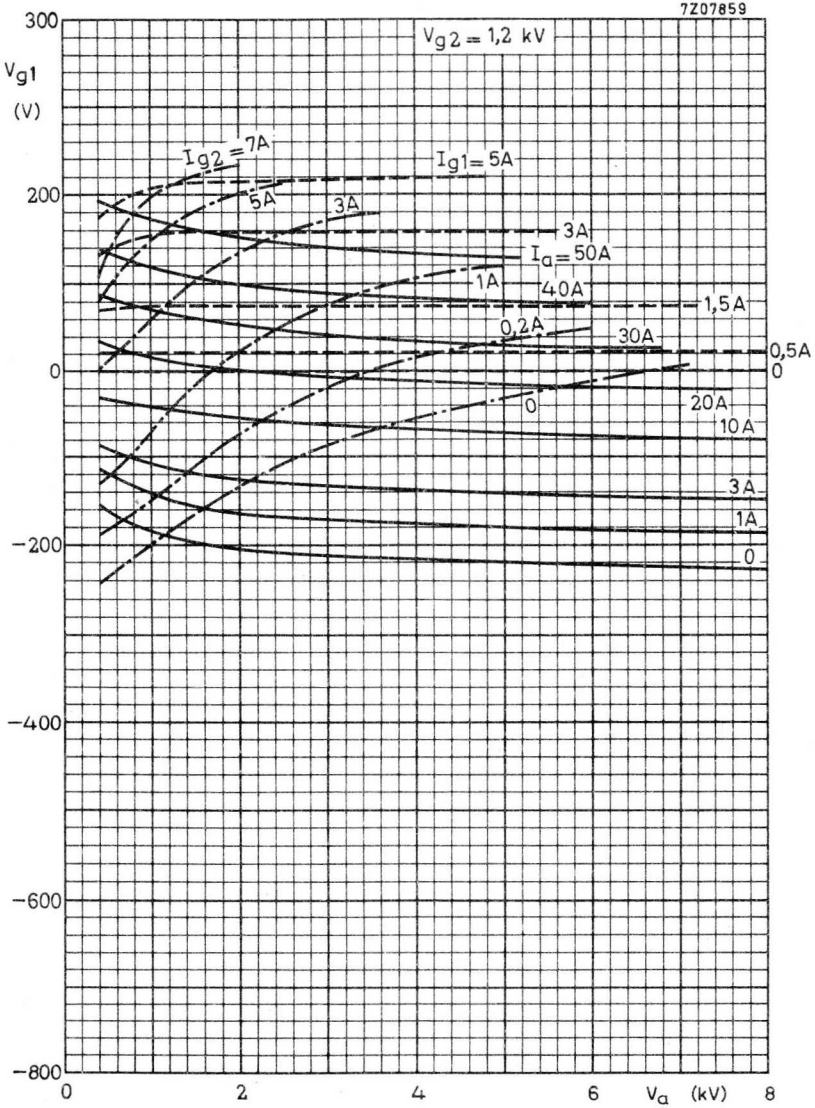



Available for equipment maintenance. No longer recommended for equipment production.

QUICK-HEATING R.F. DOUBLE TETRODE

Quick-heating double tetrode for use as r.f. amplifier and frequency multiplier up to 500 MHz. Designed for intermittent service in transistorized mobile equipment.

QUICK REFERENCE DATA

freq. MHz	R.F. class-C telegr.		R.F. class-C ag ₂ mod.		R.F. class-C freq. tripler	
	V _a V	W ₀ W	V _a V	W ₀ W	V _a V	W ₀ W
200	300	16	300 500	13		
	400	22		22		
	600	35				
460	400	17				
66,7/200 153/460					300 300	7 5,5

HEATING: direct by a.c. or d.c.; oxide coated filament

Filament voltage

V_f max 1,6 V

Filament current at V_f = 1,6 V

I_f 4 A

Heating time for W₀ = 70% of full output power

T_h < 0,5 s

The filament has been designed to accept temporary variations in supply voltage of -25%.

The frequency of the a.c. filament supply may be

max 200 Hz

for sinusoidal supply voltages

for square wave supply voltages

any

CAPACITANCES in push-pull connection

Input capacitance

C_i 4 pF

Output capacitance

C_o 1,5 pF

The tube is internally neutralized

TYPICAL CHARACTERISTICS (each system)

Filament voltage	$V_f = 1,4 \text{ V}$
Anode voltage	$V_a = 300 \text{ V}$
Grid No.2 voltage	$V_{g_2} = 250 \text{ V}$
Anode current	$I_a = 40 \text{ mA}$
Mutual conductance	$S = 4.0 \text{ mA/V}$
Amplification factor	$\mu_{g_2g_1} = 9$

TEMPERATURE LIMITS (Absolute limits)

Bulb and anode seal temperature = max. 250 °C

Base seal temperature = max. 180 °C

Anode connectors providing a high degree of heat transfer by radiation or conduction should be used

MECHANICAL DATA



Dimensions in mm

Net weight 50 g

Base : Septar

Socket : 2422 513 00001

Anode connector: 40623



Mounting position: any

If the tube is mounted with its main axis horizontally it is recommended that the plane of the anodes be vertical

Contacts 1 and 7 should be strapped together externally to reduce the effective contact resistance

1) Location of the anode pins within these circles.

R.F. CLASS C TELEGRAPHY OR F.M. TELEPHONY. Two systems in push-pull intermittent mobile service

LIMITING VALUES (Absolute limits)

Frequency	f	up to 200	up to 500	MHz
Anode voltage	V_a	= max. 600	max. 450	V
Anode input power	W_{ia}	= max. 70	max. 50	W
Anode dissipation	W_a	= max. 2x10	max. 2x10	W
Grid No.2 voltage	V_{g_2}	= max. 300	max. 300	V
Grid No.2 dissipation	W_{g_2}	= max. 2x1.5	max. 2x1.5	W
Negative grid No.1 voltage	$-V_{g_1}$	= max. 75	max. 75	V
Grid No.1 current	I_{g_1}	= max. 2x2.5	max. 2x2.5	mA
Grid No.1 dissipation	W_{g_1}	= max. 2x0.5	max. 2x0.5	W
Cathode current	I_k	= max. 2x60	max. 2x60	mA

OPERATING CHARACTERISTICS

Frequency	f	= 200	200	200	460	MHz
Anode voltage	V_a	= 300	400	600	400	V
Grid No.2 voltage	V_{g_2}	= 250	250	250	250	V
Grid No.1 voltage	V_{g_1}	= -40	-50	-60	-50	V
Driving voltage	$V_{g_1g_1'p}$	= 106	136	156	-	V
Anode current	I_a	= 2x50	2x50	2x50	2x50	mA
Grid No.2 current	I_{g_2}	= 2x4	2x3.5	2x3.0	2x3.0	mA
Grid No.1 current	I_{g_1}	= 2x1.5	2x1.5	2x1.0	2x0.6	mA
Driver output power	W_{dr}	= 1.2	1.3	1.5	5.0	W
Anode input power	W_{ia}	= 30	40	60	40	W
Anode dissipation	W_a	= 2x5.5	2x6.0	2x7.5	2x9.5	W
Output power	W_o	= 19	28	45	21	W
Efficiency	η	= 63	70	75	52.5	%
Output power in load	W_l	= 16	22	35	17	W

R.F. CLASS C ANODE AND SCREEN GRID MODULATION. Two systems in push-pull; intermittent mobile service

LIMITING VALUES (Absolute limits)

Frequency	f	up to	200	up to	500	MHz
Anode voltage	V_a	= max.	500	max.	373	V
Anode input power	W_{ia}	= max.	50	max.	37	W
Anode dissipation	W_a	= max.	2x7	max.	2x7	W
Grid No.2 voltage	V_{g2}	= max.	300	max.	300	V
Grid No.2 dissipation	W_{g2}	= max.	2x1.2	max.	2x1.2	W
Negative grid No.1 voltage	$-V_{g1}$	= max.	100	max.	100	V
Grid No.1 current	I_{g1}	= max.	2x2.5	max.	2x2.5	mA
Grid No.1 dissipation	W_{g1}	= max.	2x0.5	max.	2x0.5	W
Cathode current	I_k	= max.	2x55	max.	2x55	mA

OPERATING CHARACTERISTICS

Frequency	f	=	200	200	MHz
Anode voltage	V_a	=	300	500	V
Grid No.2 voltage	V_{g2}	=	250	250	V
Grid No.1 voltage	V_{g1}	=	-50	-80	V
Driving voltage	$V_{g1g1'p}$	=	166	220	V
Anode current	I_a	=	2x40	2x40	mA
Grid No.2 current	I_{g2}	=	2x3.5	2x4.0	mA
Grid No.1 current	I_{g1}	=	2x1.5	2x1.5	mA
Anode input power	W_{ia}	=	24	40	W
Anode dissipation	W_a	=	2x4	2x5.5	W
Output power	W_o	=	16	29	W
Efficiency	η	=	67	73	%
Output power in load	W_l	=	13	22	W

R.F. CLASS C FREQUENCY TRIPLER. Two systems in push-pull, intermittent mobile service.


LIMITING VALUES (Absolute limits)

Frequency	f	up to	500	MHz
Anode voltage	V_a	= max.	600	V
Anode input power	W_{ia}	= max.	54	W
Anode dissipation	W_a	= max.	2x10	W
Grid No.2 voltage	V_{g2}	= max.	250	V
Grid No.2 dissipation	W_{g2}	= max.	2x1.5	W
Negative grid No.1 voltage	$-V_{g1}$	= max.	200	V
Grid No.1 current	I_{g1}	= max.	2x4.5	mA
Grid No.1 dissipation	W_{g1}	= max.	2x0.5	W
Cathode current	I_k	= max.	2x55	mA


OPERATING CHARACTERISTICS

Frequency	f	=	66.7/200	153/460	MHz
Anode voltage	V_a	=	300	300	V
Grid No.2 voltage	V_{g2}	=	250	250	V
Grid No.1 voltage	V_{g1}	=	-175	-175	V
Driving voltage	$V_{g1g1'p}$	=	410	410	V
Anode current	I_a	=	2x45	2x45	mA
Grid No.2 current	I_{g2}	=	2x4.0	2x3.5	mA
Grid No.1 current	I_{g1}	=	2x3.0	2x2.5	mA
Driver output power	W_{dr}	=	3	5	W
Anode input power	W_{ia}	=	27	27	W
Anode dissipation	W_a	=	2x9	2x10	W
Output power	W_o	=	9	7	W
Efficiency	η	=	33	26	%
Output power in load	W_l	=	7	5.5	W

7Z01486-25.12.a,bj

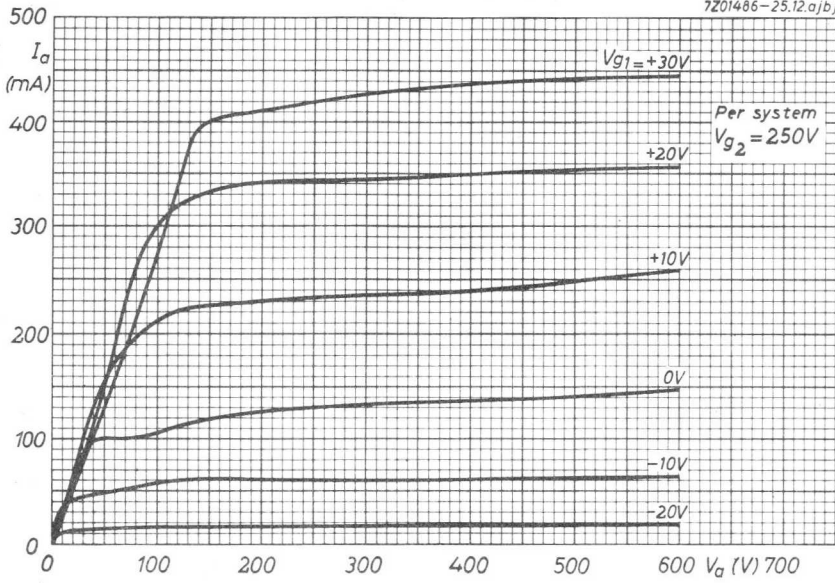

7Z01488-25.12.a,bj

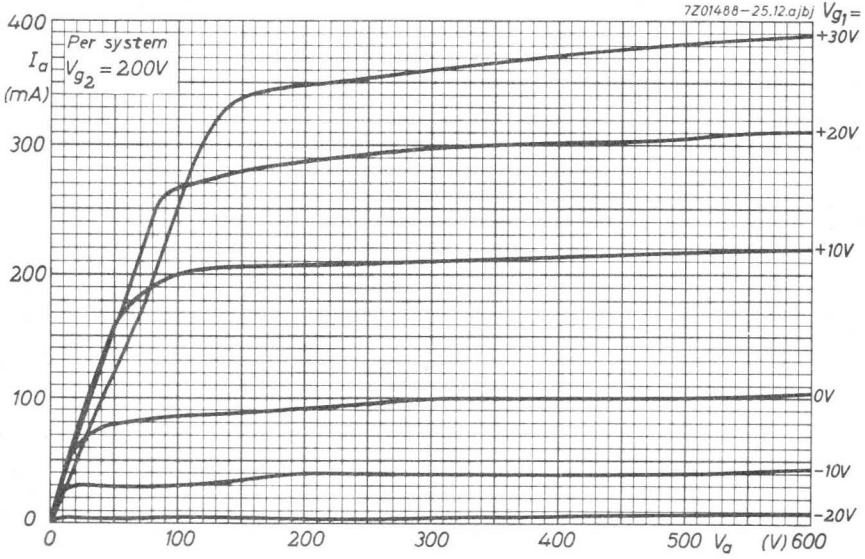



Available for equipment maintenance. No longer recommended for equipment production.

QUICK-HEATING R.F. DOUBLE TETRODE

Quick-heating, radiation and convection cooled double tetrode for use as r.f. power amplifier or frequency multiplier in mobile transmitters.

QUICK REFERENCE DATA

freq. (MHz)	R.F. class-C telegr.		R.F. class-C ag2 mod.		frequency multiplier	
	CCS W_{ℓ} (W)	ICAS W_{ℓ} (W)	CCS W_{ℓ} (W)	ICAS W_{ℓ} (W)	CCS W_{ℓ} (W)	ICAS W_{ℓ} (W)
180 50/150 157/470	45	75	32	53	16	12

HEATING: direct by a.c. or d.c.; oxide coated filament

Filament voltage	V_f	2,1 V
Filament current	I_f	4,5 A
Heating time for $W_o = 70\%$ of full output power	T_h	< 0,5 s
The frequency of the a.c. filament supply may be with sinusoidal supply voltages		max 200 Hz
with square-wave supply voltages	any	

The filament has been designed to accept temporary fluctuations of supply voltage of $\pm 15\%$.

CAPACITANCES in push-pull connection

Input capacitance	C_i	6 pF
Output capacitance	C_o	2 pF

TYPICAL CHARACTERISTICS; each section

Anode voltage	V_a	600 V
Grid 2 voltage	V_{g2}	250 V
Anode current	I_a	40 mA
Mutual conductance	S	4,5 mA/V
Amplification factor	μ_{g2g1}	8

TEMPERATURE LIMITS (Absolute limits)

Bulb temperature	=	max. 250 °C
Temperature of all seals	=	max. 250 °C
Pin temperature	=	max. 180 °C

COOLING



Radiation and convection

Anode connectors providing a high degree of heat transfer by radiation or conduction should be used.

MECHANICAL DATA

Dimensions in mm

Base	:	Septar
Socket	:	2422 513 00001
Anode connector	:	40623
Net weight	:	16 g

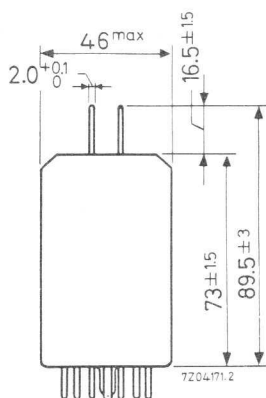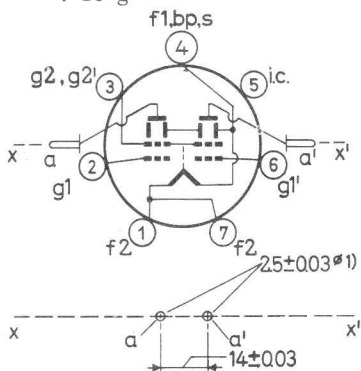

Mounting position: any

Contacts 1 and 7 should be strapped together externally to reduce the effective contact resistance.

1) Location of anode pins within these circles.

R.F. CLASS C TELEGRAPHY OR F.M. TELEPHONY

LIMITING VALUES (Each system; absolute limits)

Frequency	f	up to	200	500	MHz
Anode voltage	V_a	= max.	750	500	V
Anode input power	W_{ia}	= max.	72	48	W
Anode dissipation	W_a	= max.	20	20	W
Grid No.2 voltage	V_{g2}	= max.	300	300	V
Grid No.2 dissipation	W_{g2}	= max.	3.5	3.5	W
Negative grid No.1 voltage	$-V_{g1}$	= max.	100	100	V
Grid No.1 current	I_{g1}	= max.	5.0	5.0	mA
Grid No.1 dissipation	W_{g1}	= max.	1.0	1.0	W
Grid No.1 circuit resistance					
with fixed bias	R_{g1}	= max.	50	50	k Ω
with automatic bias	R_{g1}	= max.	100	100	k Ω
Cathode current	I_k	= max.	120	120	mA

OPERATING CONDITIONS; two systems in push-pull

Frequency	f	CCS		ICAS	MHz
		180	475		
Anode voltage	V_a	= 400	350	600	V
Grid No.2 voltage	V_{g2}	= 250	250	250	V
Grid No.1 voltage	V_{g1}	= -60	-45	-80	V
Anode current	I_a	= 2x100	2x100	2x100	mA
Grid No.2 current	I_{g2}	= 2x8	2x4.5	2x9	mA
Grid No.1 current	I_{g1}	= 2x3.0	2x2.0	2x3.5	mA
Driving power	W_{dr}	= 3	10	4	W
Anode input power	W_{ia}	= 2x40	2x35	2x60	W
Anode dissipation	W_a	= 2x13.5	2x16	2x17.5	W
Output power	W_o	= 53	38	85	W
Tube efficiency	η	= 66	54	71	%
Output power in the load	W_l	= 45	-	75	W

R.F. CLASS C ANODE AND SCREEN GRID MODULATION

LIMITING VALUES (Each system; absolute limits)

Frequency	f	up to 200	500	MHz
Anode voltage	V_a	= max. 600	400	V
Anode input power	W_{i_a}	= max. 57.5	38.5	W
Anode dissipation	W_a	= max. 14	14	W
Grid No.2 voltage	V_{g_2}	= max. 300	300	V
Grid No.2 dissipation	W_{g_2}	= max. 2.3	2.3	W
Negative grid No.1 voltage	$-V_{g_1}$	= max. 175	175	V
Grid No.1 current	I_{g_1}	= max. 5.0	5.0	mA
Grid No.1 dissipation	W_{g_1}	= max. 1.0	1.0	W
Grid No.1 circuit resistance				
with fixed bias	R_{g_1}	= max. 50	50	k Ω
with automatic bias	R_{g_1}	= max. 100	100	k Ω
Cathode current	I_k	= max. 120	120	mA

OPERATING CONDITIONS; two systems in push-pull

		CCS	ICAS	
Frequency	f	= 180	180	MHz
Anode voltage	V_a	= 400	600	V
Grid No.2 voltage	V_{g_2}	= 250	250	V
Grid No.1 voltage	V_{g_1}	= -70	-80	V
Anode current	I_a	= 2x75	2x75	mA
Grid No.2 current	I_{g_2}	= 2x9	2x9	mA
Grid No.1 current	I_{g_1}	= 2x2	2x2	mA
Driving power	W_{dr}	= 4	5	W
Anode input power	W_{i_a}	= 2x30	2x45	W
Anode dissipation	W_a	= 2x10.5	2x13	W
Output power	W_o	= 39	64	W
Tube efficiency	η	= 65	71	%
Output power in the load	W_ℓ	= 32	53	W
Modulation depth	m	= 100	100	%
Modulation power	W_{mod}	= 47	47	W
Grid No.2 peak voltage	V_{g_2p}	= 185	185	V

R.F. CLASS C FREQUENCY MULTIPLIER


LIMITING VALUES (Each system; absolute limits)

Output frequency	f_{out}	up to	500	MHz
Anode voltage	V_a	=	max. 750	V
Anode input power	W_{ia}	=	max. 60	W
Anode dissipation	W_a	=	max. 20	W
Grid No.2 voltage	V_{g2}	=	max. 300	V
Grid No.2 dissipation	W_{g2}	=	max. 3.5	W
Negative grid No.1 voltage	$-V_{g1}$	=	max. 175	V
Grid No.1 dissipation	W_{g1}	=	max. 1.0	W
Grid No.1 circuit resistance				
with fixed bias	R_{g1}	=	max. 50	k Ω
with automatic bias	R_{g1}	=	max. 100	k Ω
Cathode current	I_k	=	max. 100	mA


OPERATING CONDITIONS; two systems in push-pull

		CCS		ICAS	MHz
		50/150	50/150	157/470	
Frequency	f	=	50/150	50/150	157/470
Anode voltage	V_a	=	400	500	400
Grid No.2 voltage	V_{g2}	=	250	250	250
Grid No.1 voltage	V_{g1}	=	-150	-150	-175
Peak grid No.1 driving voltage	V_{g1p}	=	360	360	360
Anode current	I_a	=	2x72	2x60	2x65
Grid No.2 current	I_{g2}	=	2x8	2x5	2x6
Grid No.1 current	I_{g1}	=	2x2.5	2x3.0	2x2.9
Driving power	W_{dr}	=	9	10	8
Anode input power	W_{ia}	=	2x29	2x30	2x26
Anode dissipation	W_a	=	2x20	2x20	2x18
Output power	W_o	=	18	20	16
Tube efficiency	η	=	31	33	31
Output power in the load	W_ℓ	=	14.5	16	12

7Z04175-2.512 ajc/j

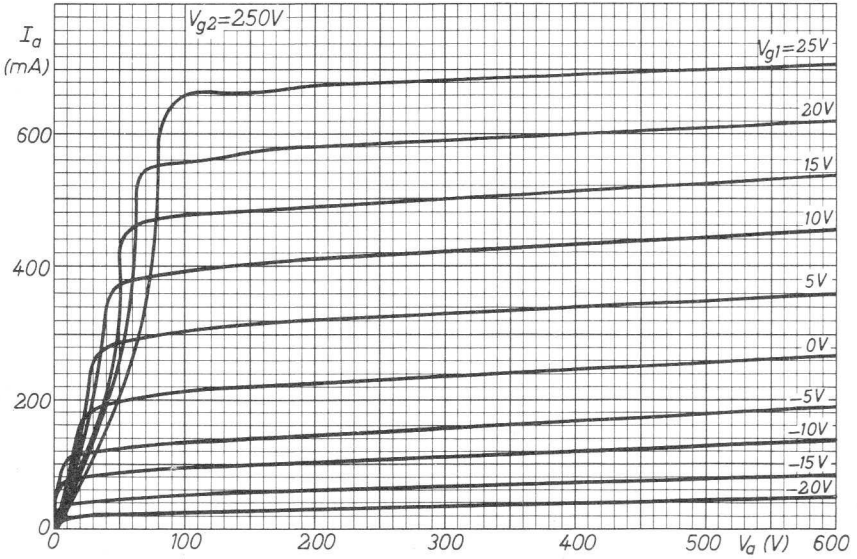

7Z04173-2.512 ajc/j

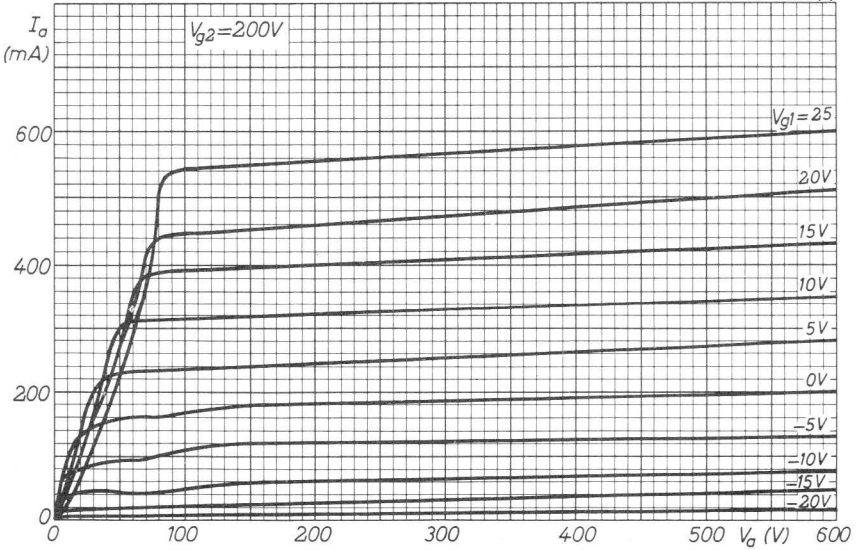

R.F. DOUBLE TETRODE

QUICK REFERENCE DATA								
Freq. (MHz)	C telegr.				C _{ag2} mod.			
	C.C.S.		I.C.A.S.		C.C.S.		I.C.A.S.	
	V _a (V)	W _ℓ ¹⁾ (W)	V _a (V)	W _ℓ ¹⁾ (W)	V _a (V)	W _ℓ ¹⁾ (W)	V _a (V)	W _ℓ ¹⁾ (W)
175	900	132	1000	163	750	85	800	107

HEATING: indirect by A.C. or D.C. Cathode oxide coated

Heater voltage	V _f = 6.3 V	12.6 V
Heater current	I _f = 1.8 A	0.9 A
Pins	5-(1+7)	1-7

CAPACITANCES (each system, the elements of the other system being earthed)

Anode to all other elements except grid No.1	C _a = 3.2 pF
Grid No.1 to all other elements except anode	C _{g1} = 10.5 pF
Anode to grid No.1	C _{ag1} < 0.09 pF

For internal neutralization (C_n, C_{n'}) please refer to the electrode connections

TYPICAL CHARACTERISTICS (each system)

Anode current	I _a = 30 mA
Mutual conductance	S = 4.5 mA/V
Amplification factor	μ _{g2g1} = 8.2

¹⁾ Useful power in the load

COOLING: radiation

When the tube is used near its limiting values it may be necessary to direct an air flow on the bulb and the anode seals. In general an air flow of approximately $0.56 \text{ m}^3/\text{min.}$ will be sufficient.



TEMPERATURE LIMITS (Absolute limits)

- Temperature of bulb and anode seals = max. 250 °C
- Temperature of base pin seals = max. 180 °C

MECHANICAL DATA

- Base : Septar
- Socket : 2422 513 00001
- Anode connector: 40681
- Net weight : 71 g

Dimensions in mm

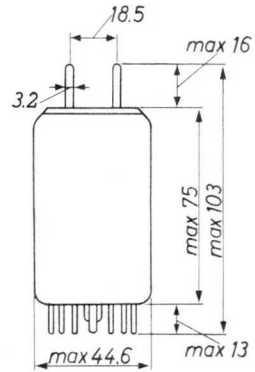

Mounting position: Vertical with base up or down
or horizontal with the anode pins in a horizontal plane

R.F. CLASS C TELEGRAPHY, two systems in push-pull

LIMITING VALUES (continuous service; absolute limits)

C. C. S.

Frequency	f	up to	175	MHz
Anode voltage	V_a	= max.	1000	V
Anode current	I_a	= max.	2x110	mA
Anode dissipation	W_a	= max.	2x30	W
Anode input power	W_{ia}	= max.	2x100	W
Grids No.2 voltage	$V_{g_2, g_2'}$	= max.	300	V
Grids No.2 dissipation	$W_{g_2+g_2'}$	= max.	7	W
Negative grid No.1 voltage	$-V_{g_1}$	= max.	175	V
Grid No.1 current	I_{g_1}	= max.	2x5	mA
Grid No.1 circuit resistance	R_{g_1}	= max.	50	$k\Omega$ ¹⁾
Heater to cathode voltage	V_{kf}	= max.	100	V

OPERATING CONDITIONS (continuous service)

C. C. S.

Frequency	f	=	175	175	MHz
Anode voltage	V_a	=	1000	900	V
Grids No.2 voltage	$V_{g_2, g_2'}$	=	230	245	V
Grid No.1 voltage	V_{g_1}	=	-85	-90	V
Common grids No.1 resistor	$R_{g_1, g_1'}$	=	15	15	$k\Omega$
Anode current	I_a	=	2x100	2x110	mA
Grids No.2 current	$I_{g_2+g_2'}$	=	11.2	12.5	mA
Grids No.1 current	$I_{g_1+g_1'}$	=	5.7	5.9	mA
Anode input power	W_{ia}	=	200	198	W
Anode dissipation	W_a	=	2x27	2x25	W
Grids No.2 dissipation	$W_{g_2+g_2'}$	=	2.5	3.0	W
Driver output power	W_{dr}	=	3.5	3.5	W
Output power	W_o	=	146	150	W
Efficiency	η	=	73	75	%
Useful power in the load	W_l	=	125	132	W

¹⁾ Each section

R.F. CLASS C TELEGRAPHY, two systems in push-pull (continued)

LIMITING VALUES (Intermittent service; absolute limits)

I. C. A. S.

Frequency	f	up to	175	MHz
Anode voltage	V_a	= max.	1000	V
Anode current	I_a	= max.	2x120	mA
Anode dissipation	W_a	= max.	2x34	W
Anode input power	W_{ia}	= max.	2x120	W
Grids No.2 voltage	$V_{g_2, g_2'}$	= max.	300	V
Grids No.2 dissipation	$W_{g_2+g_2'}$	= max.	8	W
Negative grid No.1 voltage	$-V_{g_1}$	= max.	175	V
Grid No.1 current	I_{g_1}	= max.	2x5	mA
Grid No.1 circuit resistance	R_{g_1}	= max.	50	$k\Omega$ ¹⁾
Heater to cathode voltage	V_{kf}	= max.	100	V

OPERATING CONDITIONS(Intermittent service)

I. C. A. S.

Frequency	f	=	175	175	MHz
Anode voltage	V_a	=	1000	900	V
Grids No.2 voltage	$V_{g_2, g_2'}$	=	260	260	V
Grid No.1 voltage	V_{g_1}	=	-85	-85	V
Common grids No.1 resistor	$R_{g_1, g_1'}$	=	15	15	$k\Omega$
Anode current	I_a	=	2x120	2x120	mA
Grids No.2 current	$I_{g_2+g_2'}$	=	16.5	17.0	mA
Grids No.1 current	$I_{g_1+g_1'}$	=	5.7	5.7	mA
Anode input power	W_{ia}	=	240	216	W
Anode dissipation	W_a	=	2x30	2x25	W
Grids No.2 dissipation	$W_{g_2+g_2'}$	=	4.3	4.5	W
Driver output power	W_{dr}	=	3.5	3.5	W
Output power	W_o	=	180	166	W
Efficiency	η	=	75	77	%
Useful power in the load	W_l	=	163	147	W

1) Each section

R.F. CLASS C ANODE AND SCREEN GRID MODULATION, two systems in push-pull

LIMITING VALUES (Absolute limits)


		C. C. S.	I. C. A. S.
Frequency	f	up to 175	up to 175 MHz
Anode voltage	V_a	= max. 800	max. 800 V
Anode current	I_a	= max. 2x90	max. 2x100 mA
Anode dissipation	W_a	= max. 2x21	max. 2x23.5 W
Anode input power	W_{ia}	= max. 140	max. 160 W
Grids No.2 voltage	$V_{g_2, g_2'}$	= max. 250	max. 250 V
Grids No.2 dissipation	$W_{g_2+g_2'}$	= max. 5.0	max. 5.5 W
Negative grid No.1 voltage	$-V_{g_1}$	= max. 175	max. 175 V
Grid No.1 current	I_{g_1}	= max. 2x5	max. 2x5 mA
Grid No.1 circuit resistance	R_{g_1}	= max. 50	max. 50 $k\Omega^1$)
Heater to cathode voltage	V_{kf}	= max. 100	max. 100 V

OPERATING CONDITIONS


		C. C. S.	I. C. A. S.
Frequency	f	= 175	175 MHz
Anode voltage	V_a	= 750	800 V
Grids No.2 voltage	$V_{g_2, g_2'}$	= 250	225 V
Grid No.1 voltage	V_{g_1}	= -66	-75 V
Common grids No.1 resistor	$R_{g_1, g_1'}$	= 15	15 $k\Omega$
Anode current	I_a	= 2x90	2x100 mA
Grids No.2 current	$I_{g_2+g_2'}$	= 10.2	8.8 mA
Grids No.1 current	$I_{g_1+g_1'}$	= 4.4	5.0 mA
Anode input power	W_{ia}	= 135	160 W
Anode dissipation	W_a	= 2x19	2x21 W
Grids No.2 dissipation	$W_{g_2+g_2'}$	= 2.6	2.0 W
Driver output power	W_{dr}	= 3.4	3.0 W
Output power	W_o	= 97	122 W
Efficiency	η	= 72	74 %
Useful power in the load	W_{Σ}	= 85	107 W
Modulation depth	m	= 100	100 %
Peak grids No.2 modulation voltage	$V_{g_2, g_2'p}$	= 90	80 V
Modulation power	W_{mod}	= 68	80 W

¹⁾ Each section

7201448 / 25.12.ajt

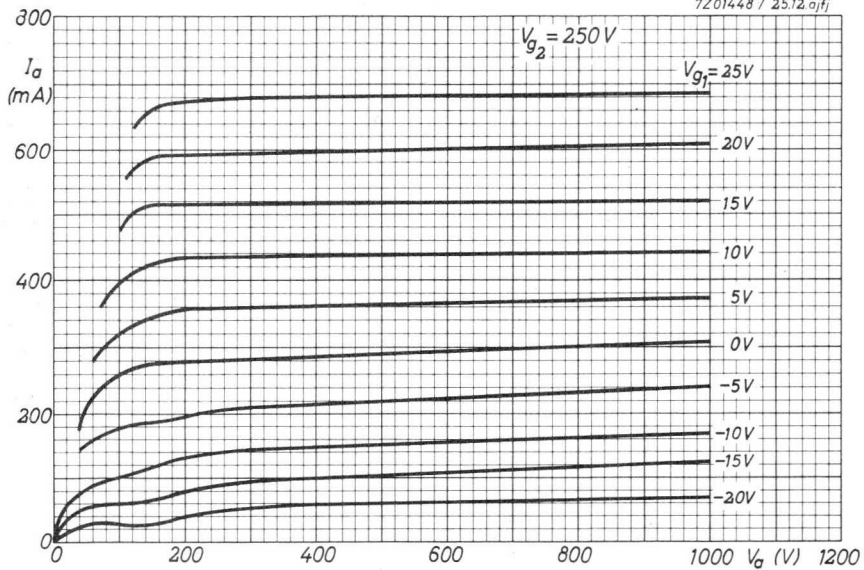

7201444 / 25.12.ajt

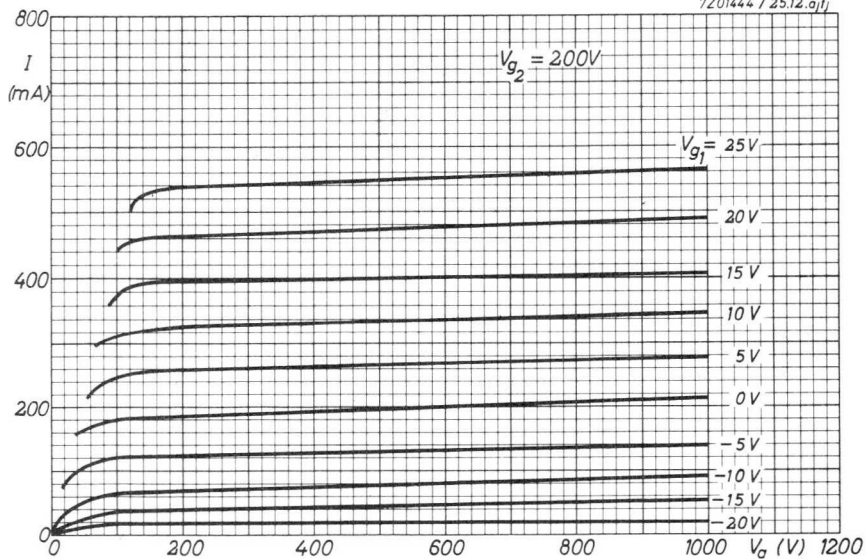

DOUBLE TETRODES

Double tetrodes for use as linear single side band amplifier.

The YL1071 is electrically identical to the YL1070 except for the heater, and has been designed to fit into heatsink cooling equipment.

QUICK REFERENCE DATA				
ABI linear S.S.B. amplifier, sections in parallel				
Freq. (MHz)	C.C.S.		I.C.A.S.	
	V_a (V)	W_{OPEP} (W)	V_a (V)	W_{OPEP} (W)
7	1000	141	1000	158

HEATING:

Indirect by A.C. or D.C.; parallel supply; oxide coated cathode

Pins 5-(1+7) 1-7

YL1070: Heater voltage $V_f = 6.3$ 12.6 V

Heater current $I_f = 1.8$ 0.9 A

YL1071: Heater voltage $V_f = 13.25$ 26.5 V

Heater current $I_f = 0.866$ 0.433 A

CAPACITANCES (each section)

Anode to all other elements except grid No.1 $C_a = 3.15$ pF

Grid No.1 to all other elements except anode $C_{g1} = 10.6$ pF

Anode to grid No.1 $C_{ag1} < 0.09$ pF


YL 1070
YL 1071

TYPICAL CHARACTERISTICS (each section)

Anode voltage	V_a	=	600	V
Grid No.2 voltage	V_{g_2}	=	250	V
Anode current	I_a	=	40	mA
Amplification factor of grid No.2 with respect to grid No.1	$\mu_{g_2g_1}$	=	7	

MECHANICAL DATA

Dimensions in mm

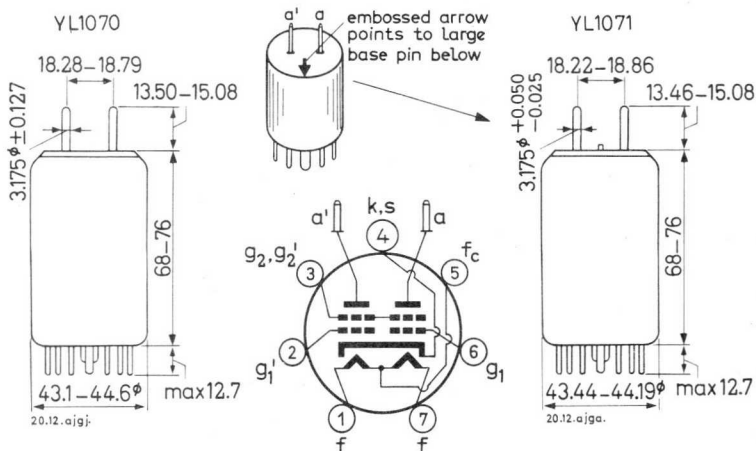

Base:	Septar		
Accessories:	Anode connector	40681	
	Socket	2422 513 00001	
Mounting position:	Vertical with base up or down Horizontal with anode pins in a horizontal plane		
Net weight:	70 g		

COOLING: Radiation and convection

When the tube is used at maximum permissible values it may be necessary to direct an air flow of approx. 0.6 m³/min to the bulb and to the anode seals. The YL1071 has a calibrated bulb held to close tolerances. This permits an accurate fit into heatsink cooling equipment.

7Z2 8844

TEMPERATURE LIMITS (Absolute limits)

Temperature of bulb and all seals max. 250 °C

R.F. CLASS C TELEGRAPHY AND F.M. TELEPHONY

LIMITING VALUES (Absolute limits) (each section)

Frequency	f	up to 60	up to 175	MHz
Anode voltage	V_a	= max. 850	max. 750	V
Anode input power	W_{ia}	= max. 90	max. 75	V
Anode dissipation	W_a	= max. 30	max. 30	W
Anode current	I_a	= max. 110	max. 110	mA
Grid No.2 voltage	V_{g2}	= max. 300	max. 300	V
Grid No.2 dissipation	W_{g2}	= max. 7	max. 7	W
Negative grid No.1 voltage	$-V_{g1}$	= max. 175	max. 175	V
Grid No.1 current	I_{g1}	= max. 5	max. 5	mA
Cathode to heater voltage	V_{kf}	= max. 100	max. 100	V

R. F. CLASS AB1 LINEAR S. S. B. AMPLIFIER suppressed carrier

LIMITING VALUES (Absolute limits) (each section)

Frequency	f	up to 60		MHz
		C.C.S.	I.C.A.S.	
Anode voltage	V_a	= max. 1000	max. 1000	V
Anode input power	W_{ia}	= max. 100	max. 110	W
Anode dissipation	W_a	= max. 30	max. 34	W
Anode current	I_a	= max. 110	max. 110	mA
Grid No.2 voltage	V_{g2}	= max. 360	max. 360	V
Grid No.2 dissipation	W_{g2}	= max. 3.5	max. 4	W
Negative grid No.1 voltage	$-V_{g1}$	= max. 175	max. 175	V
Grid No.1 current	I_{g1}	= max. 5	max. 5	mA
Cathode to heater voltage	V_{kf}	= max. 100	max. 100	V

7Z2 2885

OPERATING CONDITIONS (two sections in parallel)

Table A

		C.C.S.			
Frequency	f	=	7	MHz	
Anode voltage	V_a	=	1000	V	
Grid No.2 voltage	V_{g_2}	=	250	V	
Grid No.1 voltage	V_{g_1}	=	-34	V ¹⁾	
Load resistance	$R_{a\sim}$	=	3100	Ω	
			zero signal	single tone	two tone
Peak grid No.1 driving voltage	$V_{g_{1\sim p}}$	=	0	34	34 V
Anode current	$I_{a+a'}$	=	50	195	131 mA
Grid No.2 current	$I_{g_2+g_2'}$	=	1.2	26	11.5 mA
Grid No.1 current	$I_{g_1+g_1'}$	=	0	0.01	0.01 mA
Anode input power	$W_{ia+a'}$	=	50	195	131 W
Anode dissipation	$W_{a+a'}$	=	50	54	61 W
Output power	W_o	=	-	141	141 ²⁾ W
Intermodulation distortion					
of the third order	d_{i_3}	=	-	-	< -30 dB ³⁾
of the fifth order	d_{i_5}	=	-	-	< -45 dB ³⁾

¹⁾ Adjust to obtain the stated zero signal anode current.

²⁾ Peak envelope power value.

³⁾ Distortion level, referred to the amplitude of either of the tones, at full drive; also highest distortion encountered at any driving level up to full drive.

OPERATING CONDITIONS (two sections in parallel) (continued)

Table B

Frequency	f	=	7	MHz								
Anode voltage	V_a	=	800	V								
Grid No.2 voltage	V_{g_2}	=	250	V								
Grid No.1 voltage	V_{g_1}	=	-34	V ¹⁾								
Load resistance	R_a	=	2300	Ω								
			<table border="0" style="width: 100%;"> <tr> <td style="width: 33%;"></td> <td style="width: 33%; text-align: center;">zero</td> <td style="width: 33%; text-align: center;">single</td> <td style="width: 33%; text-align: center;">two</td> </tr> <tr> <td></td> <td style="text-align: center;">signal</td> <td style="text-align: center;">tone</td> <td style="text-align: center;">tone</td> </tr> </table>		zero	single	two		signal	tone	tone	
	zero	single	two									
	signal	tone	tone									
Peak grid No.1 driving voltage	$V_{g_1 \sim p}$	=	0 34	34 V								
Anode current	$I_{a+a'}$	=	50 197	130 mA								
Grid No.2 current	$I_{g_2+g_2'}$	=	1.2 26	12.5 mA								
Grid No.1 current	$I_{g_1+g_1'}$	=	0 0.01	0 mA								
Anode input power	$W_{ia+a'}$	=	40 158	104 W								
Anode dissipation	$W_{a+a'}$	=	40 46	43 W								
Output power	W_o	=	- 112	112 ²⁾ W								
Intermodulation distortion												
of the third order	d_{i_3}	=	- -	< -30 dB ³⁾								
of the fifth order	d_{i_5}	=	- -	< -45 dB ³⁾								

¹⁾ Adjust to obtain the stated zero signal anode current.

²⁾ Peak envelope power value

³⁾ Distortion level, referred to the amplitude of either of the tones, at full drive; also highest distortion encountered at any driving level up to full drive.

OPERATING CONDITIONS (two sections in parallel) (continued)

Table C		C. C. S.		
Frequency	f	=	7	MHz
Anode voltage	V_a	=	600	V
Grid No.2 voltage	V_{g_2}	=	250	V
Grid No.1 voltage	V_{g_1}	=	-32.5	V ¹⁾
Load resistance	R_a	=	1410	Ω
			<div style="border-top: 1px solid black; width: 100%; margin: 0 auto;"></div> zero single two signal tone tone	
Peak grid No.1 driving voltage	$V_{g_1 \sim p}$	=	0 32.5 32.5	V
Anode current	$I_{a+a'}$	=	60 212 144	mA
Grid No.2 current	$I_{g_2+g_2'}$	=	1.9 25 13.5	mA
Grid No.1 current	$I_{g_1+g_1'}$	=	0 0.01 0	mA
Anode input power	$W_{ia+a'}$	=	36 127 86	W
Anode dissipation	$W_{a+a'}$	=	36 88 48	W
Output power	W_o	=	- 76 76 ²⁾	W
Intermodulation distortion				
of the third order	d_{i_3}	=	- - < -30	dB ³⁾
of the fifth order	d_{i_5}	=	- - < -45	dB ³⁾

1) Adjust to obtain the stated zero signal anode current.

2) Peak envelope power value.

3) Distortion level, referred to the amplitude of either of the tones, at full drive; also highest distortion encountered at any driving level up to full drive.

OPERATING CONDITIONS (two sections in parallel) (continued)

Table D


I. C. A. S.

			I. C. A. S.		
Frequency	f	=	7 MHz		
Anode voltage	V_a	=	1000 V		
Grid No.2 voltage	V_{g_2}	=	250 V		
Grid No.1 voltage	V_{g_1}	=	-36 V ¹⁾		
Load resistance	R_a	=	3000 Ω		
			zero signal	single tone	two tone
Peak grid No.1 driving voltage	$V_{g_{1\sim p}}$	=	0	36	36 V
Anode current	$I_{a+a'}$	=	55	216	144 mA
Grid No.2 current	$I_{g_2+g_2'}$	=	1	25	13 mA
Grid No.1 current	$I_{g_1+g_1'}$	=	0	0.05	0.02 mA
Anode input power	$W_{ia+a'}$	=	55	216	144 W
Anode dissipation	$W_{a+a'}$	=	55	58	65 W
Output power	W_o	=	-	158	158 ²⁾ W
Intermodulation distortion					
of the third order	d_{i_3}	=	-	-	< -30 dB ³⁾
of the fifth order	d_{i_5}	=	-	-	< -45 dB ³⁾


¹⁾ Adjust to obtain the stated zero signal anode current.

²⁾ Peak envelope power value.

³⁾ Distortion level, referred to the amplitude of either of the tones, at full drive; also highest distortion encountered at any driving level up to full drive.

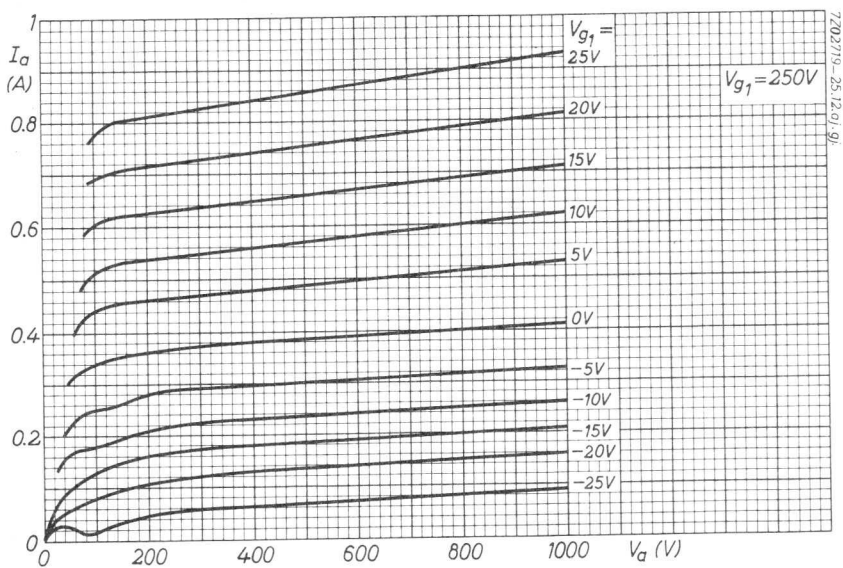

7202719-25, 12, 01, 91

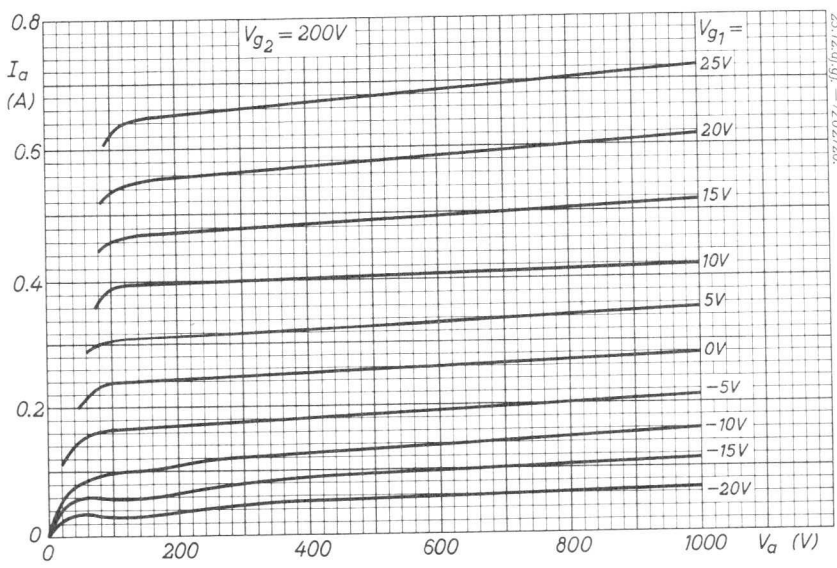

25, 12, 01, 91 - 7202720

VAPOUR COOLED R.F. POWER TETRODE

Vapour cooled power tetrode in coaxial construction intended for use as R.F. amplifier in SSB transmitters and as A.M. amplifier.

QUICK REFERENCE DATA

Frequency MHz	S.S.B.		Ca-g ₂ mod.		Class B mod.	
	V _a (kV)	W _o (kW) P. E. P.	V _a (kV)	W _o (kW)	V _a (kV)	W _o (kW)
30	9	120	11	220	11	320

HEATING: Direct, filament thoriated tungsten

Filament voltage	V _f	20 V
Filament current	I _f	345 A

CAPACITANCES

Anode to all except grid No.1	C _{a(g₁)}	120 pF
Grid No.1 to all except anode	C _{g₁(a)}	600 pF
Anode to grid No.1	C _{ag₁}	8.5 pF ¹⁾

TYPICAL CHARACTERISTICS

Anode voltage	V _a	3 kV
Grid No.2 voltage	V _{g₂}	1 kV
Anode current	I _a	10 A
Transconductance	S	130 mA/V
Amplification factor	μ _{g₂g₁}	4 -



1) Measured with a flat shield of 500 mm diameter in the plane of grid No.2

MECHANICAL DATA

Dimensions in mm

Net weight: approx. 51 kg

Mounting position: vertical with anode down

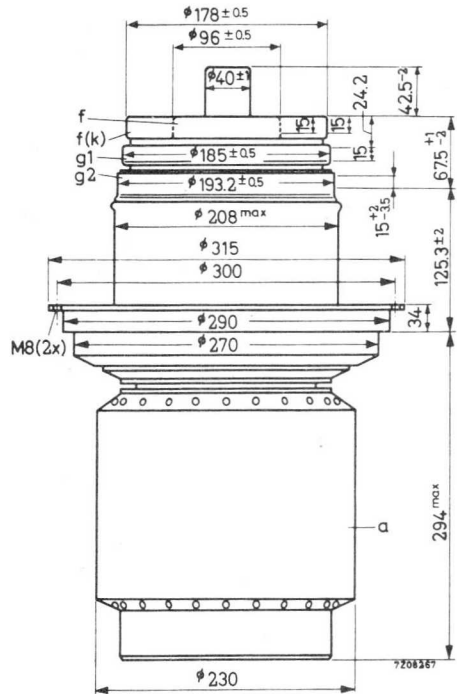

ACCESSORIES

- | | |
|---|------------|
| Boiler | type K729 |
| Filament connector (one required) | type 40732 |
| Grid No.1 connector | type 40733 |
| Grid No.2 connector | type 40734 |
| → Filament connector with cable (four required) | type 40670 |

R.F. CLASS AB LINEAR AMPLIFIER, SINGLE SIDE BAND, suppressed carrier

LIMITING VALUES (Absolute max. rating system)

Frequency	f	up to	30	MHz
Anode voltage	V_a	max.	15	kV
Grid No.2 voltage	V_{g2}	max.	1.6	kV
Grid No.1 voltage	$-V_{g1}$	max.	800	V
Anode current	I_a	max.	40	A
Grid No.1 current	I_{g1}	max.	3	A
Anode input power	W_{i_a}	max.	360	kW
Anode dissipation	W_a	max.	150	kW
Grid No.2 dissipation	W_{g2}	max.	2.7	kW
Grid No.1 dissipation	W_{g1}	max.	1.2	kW

OPERATING CONDITIONS

Frequency	f	30	MHz
Anode voltage	V_a	9	kV
Grid No.2 voltage	V_{g2}	1.5	kV
Grid No.1 voltage	V_{g1}	-450	V ¹⁾
		zero signal	single tone
			double tone
Grid No.1 driving voltage	V_{g1p}	0	450 450 V
Anode current	I_a	5	21 13.2 A
Grid No.2 current	I_{g2}	0	0.8 0.5 A
Anode input power	W_{i_a}	45	189 118.8 kW
Anode dissipation	W_a	45	69 58.8 kW
Grid No.2 dissipation	W_{g2}	0	1.2 0.75 kW
Output power (P.E.P.)	W_o	-	120 120 kW

¹⁾ Adjust to give the zero signal anode current.

R.F. CLASS C ANODE AND SCREEN GRID MODULATION (carrier conditions)

LIMITING VALUES (Absolute max. rating system)

Frequency	f	up to	30	MHz
Anode voltage	V_a	max.	11.5	kV
Grid No.2 voltage	V_{g2}	max.	1	kV
Grid No.1 voltage	$-V_{g1}$	max.	800	V
Anode current	I_a	max.	32	A
Grid No.1 current	I_{g1}	max.	3	A
Anode input power	W_{i_a}	max.	300	kW
Anode dissipation	W_a	max.	100	kW
Grid No.2 dissipation	W_{g2}	max.	2.7	kW
Grid No.1 dissipation	W_{g1}	max.	1.2	kW

OPERATING CONDITIONS

Frequency	f	30	MHz
Anode voltage	V_a	11	kV
Grid No.2 voltage	V_{g2}	800	V
Grid No.1 voltage	V_{g1}	-590	V
Grid No.1 resistor	R_{g1}	60	Ω
Grid No.1 driving voltage	V_{g1p}	960	V
Anode current	I_a	25	A
Grid No.2 current	I_{g2}	3	A
Grid No.1 current	I_{g1}	1.6	A
Driving power	W_{dr}	1.4	kW
Grid No.2 dissipation	W_{g2}	2.4	kW
Anode input power	W_{i_a}	275	kW
Output power	W_o	220	kW
Anode dissipation	W_a	55	kW
Efficiency	η	80	%
Modulation depth	m	100	%
Modulation power	W_{mod}	140	kW
Grid No.2 voltage, peak	V_{g2p}	700	V


A.F. CLASS B AMPLIFIER AND MODULATOR


LIMITING VALUES (Absolute max. rating system)

Anode voltage	V_a	max.	12	kV
Anode input power	W_{ia}	max.	300	kW
Anode dissipation	W_a	max.	150	kW
Cathode current	I_k	max.	50	A
Cathode current (peak)	I_{kp}	max.	280	A
Grid No. 2 voltage	V_{g2}	max.	1.7	kV
Grid No. 2 dissipation	W_{g2}	max.	2.7	kW
Grid No. 1 resistance	R_{g1}	max.	1	k Ω
Grid No. 1 dissipation	W_{g1}	max.	1.2	kW

OPERATING CONDITIONS; two tubes in push-pull

Anode voltage	V_a	11	11	kV		
Grid No. 2 voltage	V_{g2}	1.5	1.5	kV		
Grid No. 1 voltage	V_{g1}	-520	-520	V		
Load resistance	R_{aa}	500	670	Ω		
Peak driving voltage	V_{g1g1p}	0	1100	0	950	V
Anode current	I_a	2x3	2x22	2x3	2x16.5	A
Grid No. 2 current	I_{g2}	0	2x0.45	0	2x0.35	A
Grid No. 1 current	I_{g1}	0	2x0.04	0	0	A
Grid No. 2 dissipation	W_{g2}	0	2x680	0	2x530	W
Anode input power	W_{ia}	2x33	2x242	2x33	2x182	kW
Anode dissipation	W_a	2x33	2x82	2x33	2x62	kW
Output power	W_o	0	320	0	240	kW
Efficiency	η		66		66	%

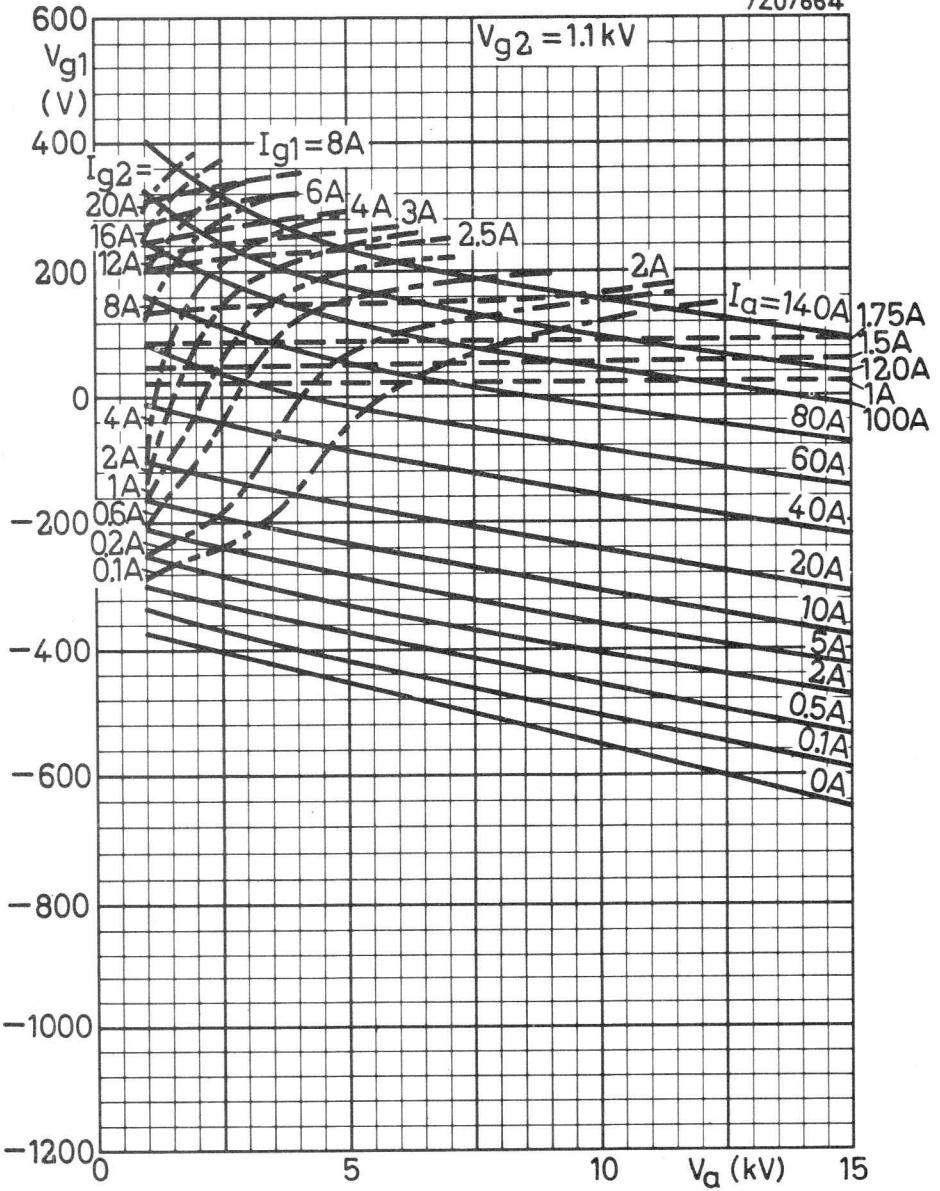

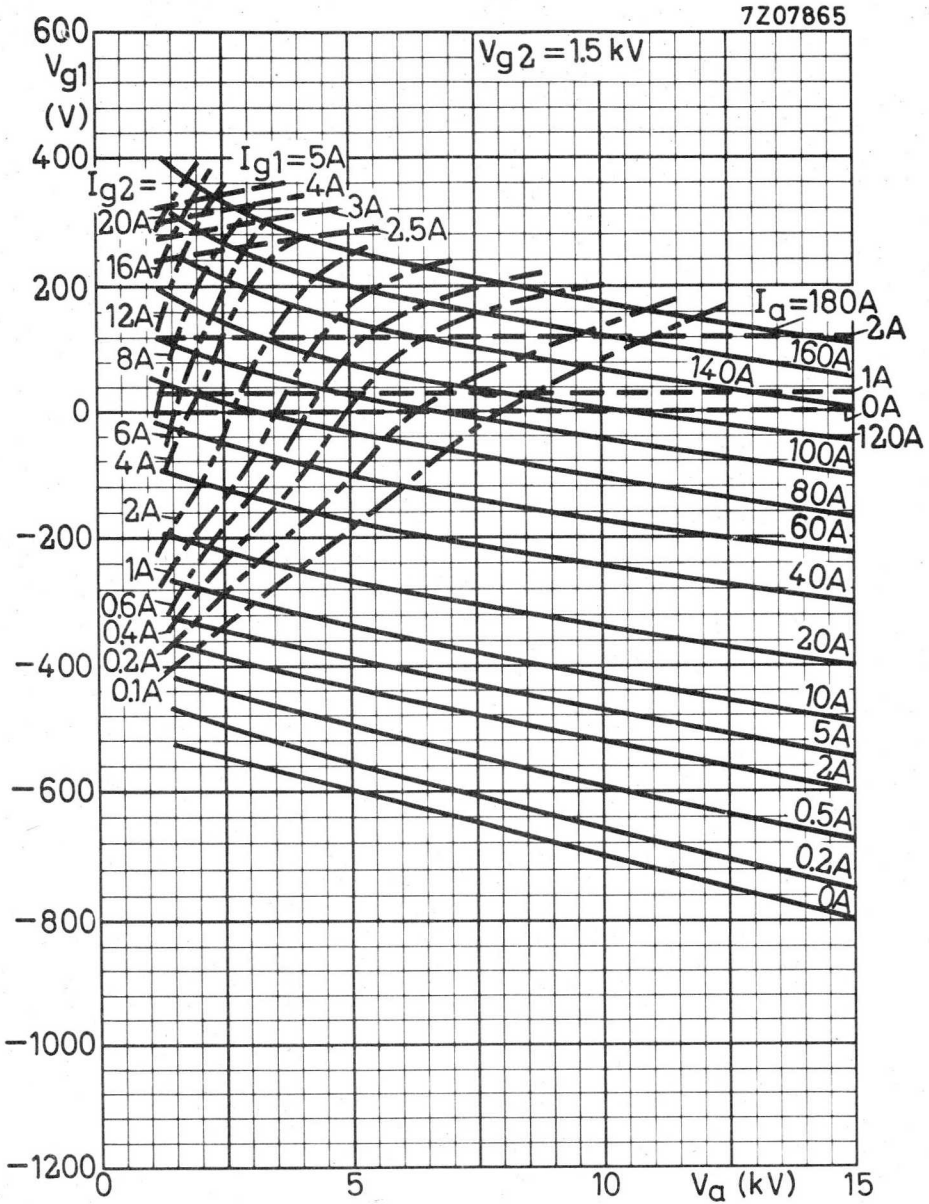

COAXIAL BEAM POWER TETRODES

Beam power tetrodes with ceramic-to-metal seals and coaxial arrangement of the terminals. The tubes are intended for use as R.F. power amplifier, oscillator and frequency multiplier, and as A.F. amplifier and modulator in A.M., F.M. and S.S.B. transmitters for frequencies up to 2000 MHz.

QUICK REFERENCE DATA

Frequency (MHz)	C telegr.		C ag ₂ mod.		S.S.B.	
	V _a (V)	W _o (W)	V _a (V)	W _o (W)	V _a (V)	W _o (W) ¹⁾
1200	900	40				
400	900	80	700	45		
60					850	40

COOLING

Forced air cooling of radiator and seals.

HEATING: indirect by a.c. or d.c.; oxide coated cathode.

YL1100

Heater voltage	V _f	26,5	V
Heater current	I _f	0,52	A
Heating time	T _h min.	60	s

YL1101

Heater voltage	V _f	6,3	V
Heater current	I _f	2,1	A
Heating time	T _h min.	60	s

The heater voltage must be reduced dependent on the operating conditions and the frequency.


¹⁾ single tone operation

MECHANICAL DATA

Dimensions in mm

Mounting position : any

Net weight : 60 g

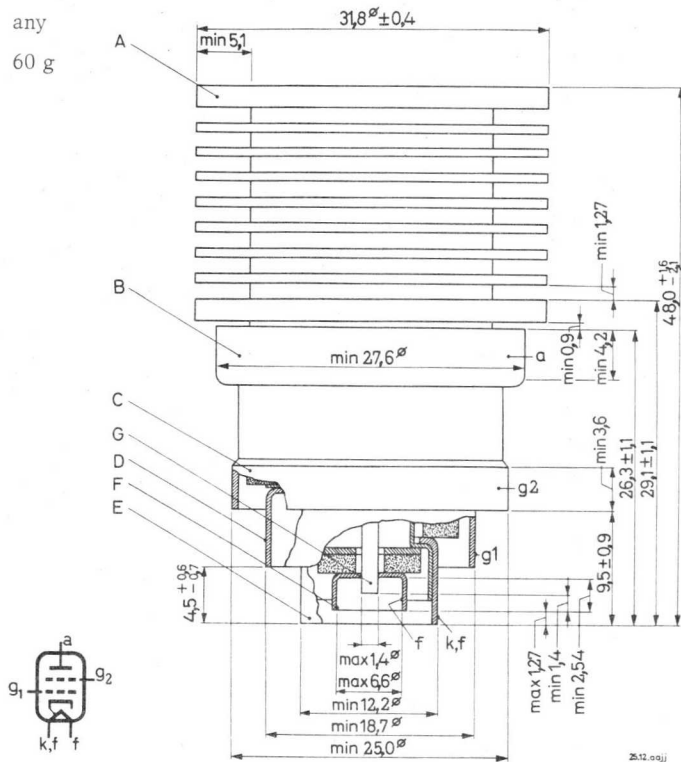

Radiator and terminals lie inside or outside concentric cylinders with the following diameters:

Radiator	:	A	inside	24,15	mm diameter
Anode terminal	:	B	inside	28,40	mm diameter
g_2 terminal	:	C	inside	25,86	mm diameter
g_1 terminal	:	D	inside	19,38	mm diameter
Cathode terminal	:	E	inside	13,16	mm diameter
Heater terminal	:	F	outside	6,07	mm diameter
		G	inside	1,78	mm diameter

CAPACITANCES

Anode to grid no.1	C_{ag1}	< 0,065	pF
Grid no.1 to cathode and heater	$C_{g1/kf}$	14	pF
Anode to cathode and heater	$C_{a/kf}$	< 0,015	pF
Grid no.2 to grid no.1	C_{g1g2}	19	pF
Anode to grid no.2	C_{ag2}	4,4	pF
Grid no.2 to cathode and heater	$C_{g2/kf}$	< 0,4	pF

TYPICAL CHARACTERISTICS

Anode voltage	V_a	1000	V
Grid no.2 voltage	V_{g2}	250	V
Anode current	I_a	100	mA
Amplification factor	μ_{g2g1}	18	

TEMPERATURE LIMITS. (Absolute limits)

Anode seal temperature	t	max. 250	°C
------------------------	---	----------	----

Notes to page 4

- 1) Fixed supply or supply derived from the anode supply by means of a voltage divider.
- 2) Power transferred from driving stage included.

R.F. CLASS C TELEGRAPHY or F.M. TELEPHONY

LIMITING VALUES (Absolute max. rating system)

Frequency	f	up to	1200	MHz
Anode voltage	V_a	max.	1000	V
Anode input power	W_{ia}	max.	180	W
Anode dissipation	W_a	max.	115	W
Anode current	I_a	max.	180	mA
Grid no.2 voltage	V_{g2}	max.	300	V
Grid no.2 dissipation	W_{g2}	max.	4, 5	W
Grid no.1 voltage, negative	$-V_{g1}$	max.	100	V
Grid no.1 current	I_{g1}	max.	30	mA
Grid no.1 circuit resistance	R_{g1}	max.	30	$k\Omega$

OPERATING CONDITIONS (grid drive)

Frequency	f	400	1200	MHz
Anode voltage	V_a	900	900	V
Grid no.2 voltage	V_{g2}	300	300	V ¹⁾
Grid no.1 voltage	V_{g1}	-30	-22	V
Anode current	I_a	170	170	mA
Grid no.2 current	I_{g2}	1	1	mA
Grid no.1 current	I_{g1}	10	4	mA
Driving power	W_{dr}	3	5	W
Output power in load	W_ℓ	80	40	W

OPERATING CONDITIONS (cathode drive)

Frequency	f	1200	MHz
Anode voltage	V_a	900	V
Grid no.2 voltage	V_{g2}	300	V
Grid no.1 voltage	V_{g1}	-31	V
Anode current	I_a	170	mA
Grid no.2 current	I_{g2}	3, 2	mA
Grid no.1 current	I_{g1}	3, 4	mA
Driving power	W_{dr}	8	W
Output power in load	W_ℓ	40	W ²⁾

Notes see page 3

R.F. CLASS C ANODE AND SCREEN GRID MODULATION

LIMITING VALUES (Absolute max. rating system)

(Carrier conditions with modulation up to 100%)

Frequency	f	up to	1200	MHz
Anode voltage	V_a	max.	800	V
Anode input power	W_{i_a}	max.	120	W
Anode dissipation	W_a	max.	75	W
Anode current	I_a	max.	150	mA
Grid no.2 voltage	V_{g_2}	max.	300	V
Grid no.2 dissipation	W_{g_2}	max.	3	W
Grid no.1 voltage, negative	$-V_{g_1}$	max.	100	V
Grid no.1 current	I_{g_1}	max.	30	mA
Grid no.1 circuit resistance	R_{g_1}	max.	30	$k\Omega$

OPERATING CONDITIONS

Frequency	f	400	MHz
Anode voltage	V_a	700	V
Grid no.2 voltage	V_{g_2}	250	V
Grid no.1 voltage	V_{g_1}	-50	V
Anode current	I_a	130	mA
Grid no.2 current	I_{g_2}	10	mA
Grid no.1 current	I_{g_1}	10	mA
Driving power	W_{dr}	3	W
Output power in load	W_l	45	W



R.F. CLASS AB 1 SINGLE SIDEBAND AMPLIFIER



LIMITING VALUES (Absolute max. rating system)


Frequency	f	up to	1200	MHz
Anode voltage	V_a	max.	1000	V
Anode input power	W_{ia}	max.	180	W
Anode dissipation	W_a	max.	115	W
Anode current	I_a	max.	180	mA
Grid no.2 voltage	V_{g2}	max.	300	V
Grid no.2 dissipation	W_{g2}	max.	4,5	W
Grid no.1 voltage, negative	$-V_{g1}$	max.	100	V
Grid no.1 circuit resistance	R_{g1}	max.	30	$k\Omega$



OPERATING CONDITIONS

Frequency	f	60	60	MHz		
Anode voltage	V_a	650	850	V		
Grid no.2 voltage	V_{g2}	300	300	V		
Grid no.1 voltage	V_{g1}	-15	-15	V		
		zero signal	double tone	zero signal	double tone	
Driving voltage, peak	V_{g1p}	0	15	0	15	V
Anode current	I_a	40	100	40	100	mA
Grid no.2 current	I_{g2}	0	10	0	10	mA
Grid no.1 current	I_{g1}	0	0	0	0	mA
Driving power	W_{dr}	0	0	0	0	W
Peak envelope output power	W_{oPEP}	0	25	0	40	W

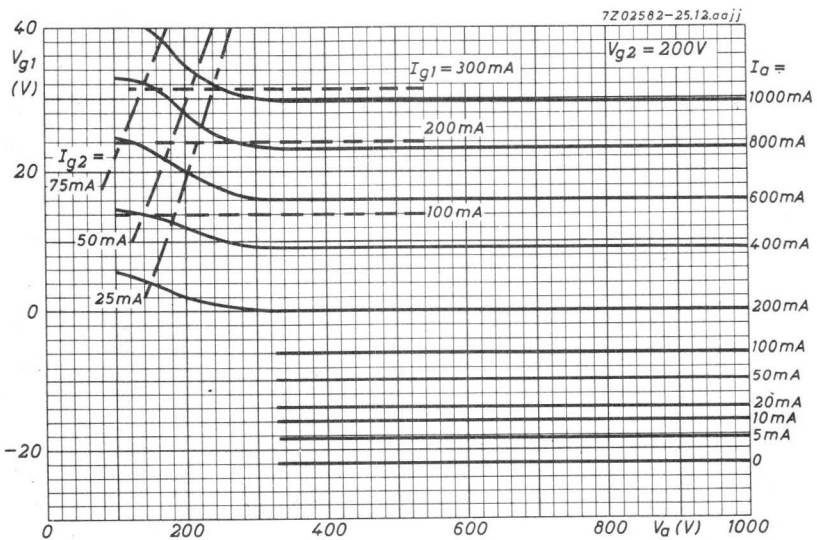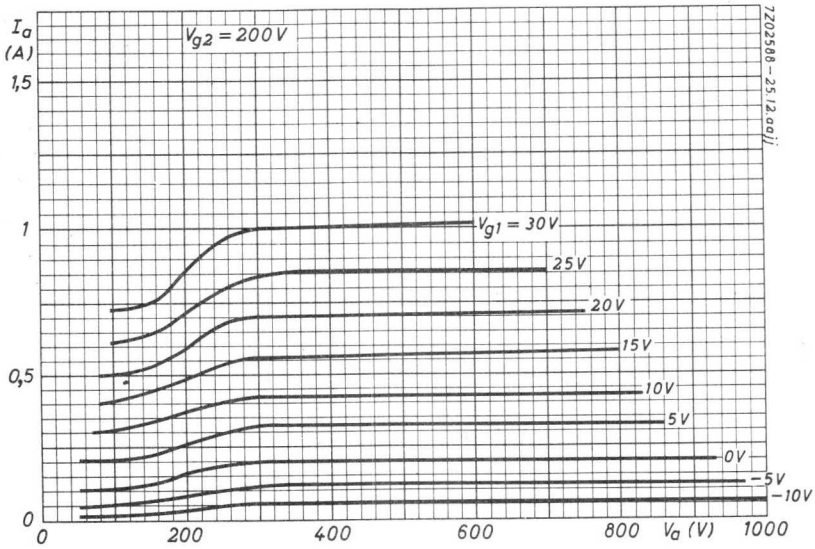

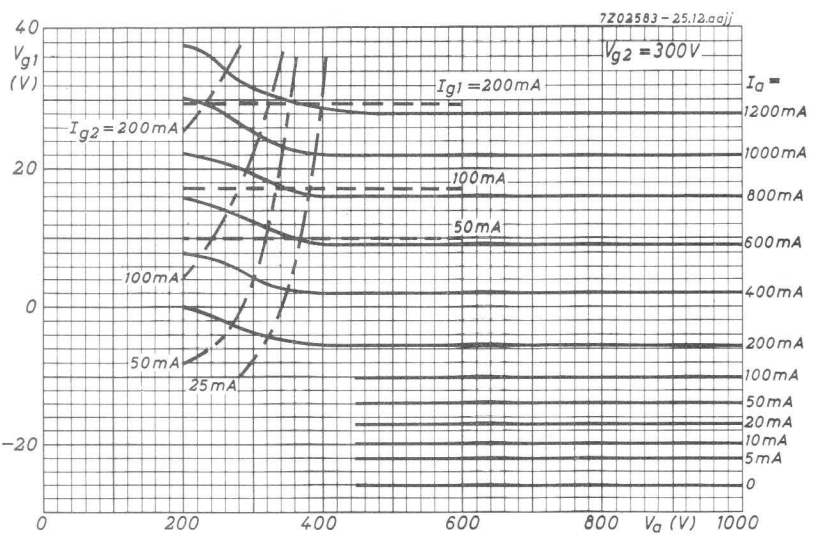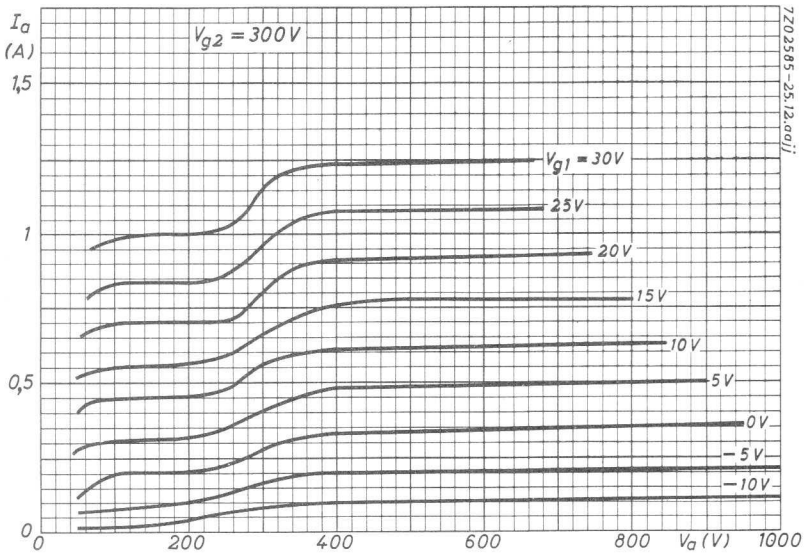

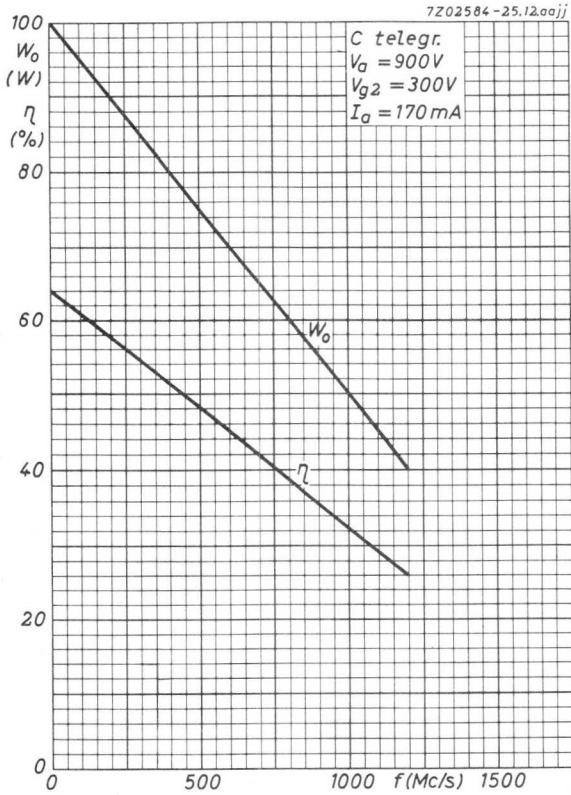

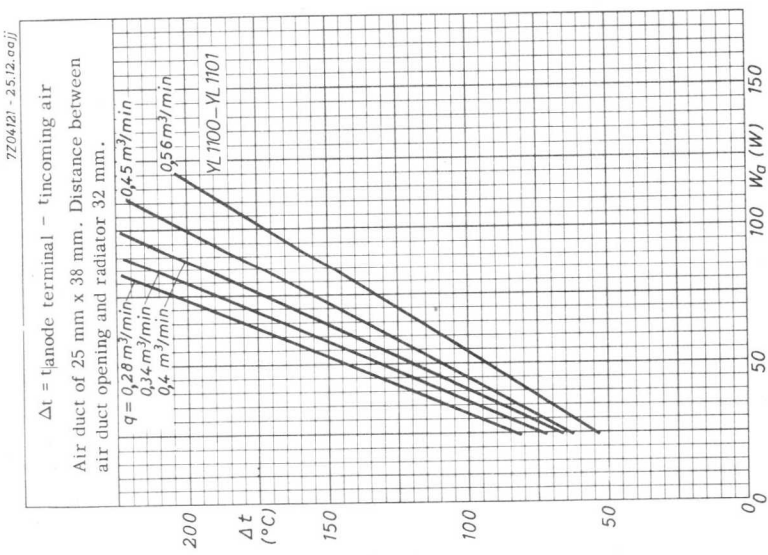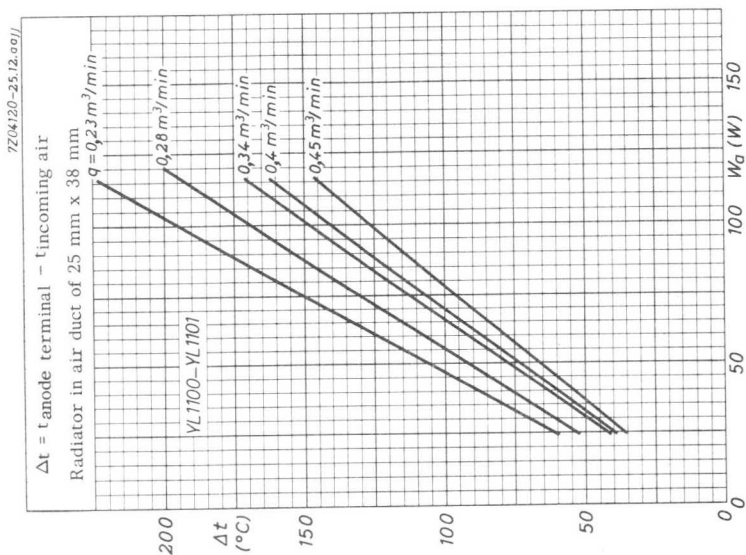



Available for equipment maintenance. No longer recommended for equipment production.

AIR-COOLED COAXIAL BEAM POWER TETRODE

Forced-air-cooled beam power tetrode with integral radiator and coaxial, ceramic insulated terminals. Intended for use as u.h.f. amplifier or oscillator at frequencies up to 1215 MHz.

QUICK REFERENCE DATA

Frequency MHz	Anode voltage	R.F. class-C telegraphy	R.F. class-A linear ampl.	R.F. class-B SSB	R.F. class-C ag ₂ mod.
	V _a (V)	W _ℓ (W)	W _ℓ (W)	W _o PEP (W)	W _ℓ (W)
790	2500	590	55	680	600
	1400				
470	2500	730			
400	2000				
30	2500				

HEATING: indirect by a.c. or d.c.; oxide coated cathode, matrix type

Heater voltage	V _f	6,3 V
Heater current	I _f	7,85 A
Heating time	T _h min	120 s

The heater voltage must be reduced depending on the operating conditions and frequency.

CAPACITANCES

Anode to grid	C _{ag1}	<	0,11 pF
Grid 1 to cathode and heater	C _{g1/kf}		29 pF
Anode to cathode and heater	C _{a/kf}	<	11 fF
Grid 1 to grid 2	C _{g1g2}		37 pF
Grid 2 to cathode and heater	C _{g2/kf}	<	1,1 pF



TYPICAL CHARACTERISTICS

Anode voltage	V_a	= 225	2500	V
Grid No.2 voltage	V_{g2}	= 225	400	V
Anode current	I_a	= 100	240	mA
Amplification factor	μ_{g2g1}	= 13	-	
Mutual conductance	S	= -	22	mA/V

MECHANICAL DATA

Dimensions in mm

Net weight: 340 g

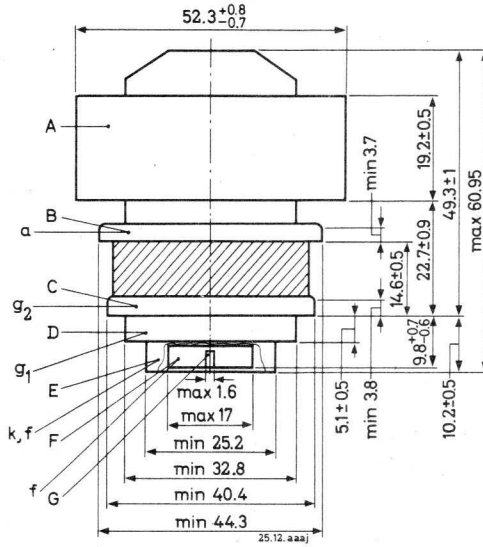

Radiator and terminals lie inside or outside concentric cylinders with the following diameters:

Radiator	:	A	inside	53.54	mm diameter
Anode terminal	:	B	inside	45.69	mm diameter
g_2 terminal	:	C	inside	40.87	mm diameter
g_1 terminal	:	D	inside	33.50	mm diameter
Cathode terminal	:	E	inside	25.88	mm diameter
Heater terminal	:	F	outside	15.72	mm diameter
		G	inside	2.51	mm diameter

Mounting position: any

TEMPERATURE LIMITS (Absolute limits)

Anode temperature = max. 250 °C

Temperature of all seals = max. 250 °C

COOLING CHARACTERISTICS

Forced air cooling of the anode at an air inlet temperature of 25 °C:

Anode dissipation	W_a	=	100	300	600	700	W
Min. required air flow	q_{min}	=	0.06	0.12	0.32	0.46	m ³ /min
Pressure loss	p_i	=	2	4	17	25	mm H ₂ O

A low velocity air flow is required for all electrodes and seals.

R.F. CLASS C TELEGRAPHY**LIMITING VALUES** (Absolute limits)

Frequency	f		up to	1215	MHz
Anode voltage	V_a	=	max.	2500	V
Anode input power	W_{i_a}	=	max.	1250	W
Anode dissipation	W_a	=	max.	700	W
Anode current	I_a	=	max.	500	mA
Grid No.2 voltage	V_{g_2}	=	max.	1200	V
Grid No.2 dissipation	W_{g_2}	=	max.	25	W
Negative grid No.1 voltage	$-V_{g_1}$	=	max.	250	V
Grid No.1 current	I_{g_1}	=	max.	100	mA
Grid No.1 circuit resistance	R_{g_1}	=	max.	15	k Ω

OPERATING CONDITIONS in grounded grid circuit

Frequency	f	=	790	470	MHz
Anode voltage	V_a	=	2500	2500	V
Grid No.2 voltage	V_{g_2}	=	400	400	V
Grid No.1 voltage	V_{g_1}	=	-45	-35	V
Anode current	I_a	=	500	500	mA
Grid No.2 current	I_{g_2}	=	7	8	mA
Grid No.1 current	I_{g_1}	=	10	12	mA
Driving power	W_{dr}	=	60	35	W
Output power in load	W_{load}	=	590	730	W

R.F. CLASS A LINEAR AMPLIFIER, T.V. TRANSLATOR SERVICE, SOUND AND VISION

LIMITING VALUES (Absolute limits)

Frequency	f	up to 1215	MHz
Anode voltage	V_a	= max.	2500 V
Anode input power	W_{ia}	= max.	1250 W
Anode dissipation	W_a	= max.	600 W
Anode current	I_a	= max.	500 mA
Grid No.2 voltage	V_{g2}	= max.	1200 V
Grid No.2 dissipation	W_{g2}	= max.	25 W
Negative grid No.1 voltage	$-V_{g1}$	= max.	250 V
Grid No.1 current	I_{g1}	= max.	100 mA
Grid No.1 circuit resistance	R_{g1}	= max.	15 k Ω

OPERATING CONDITIONS

Frequency	f	=	790	MHz
Bandwidth	B	>	6.5	MHz
Anode voltage	V_a	=	1400	V
Grid No.2 voltage	V_{g2}	=	400	V
Grid No.1 voltage	V_{g1}	=	-30	V
Anode current	I_a	=	400	mA
Grid No.2 current	I_{g2}	=	-10	mA
Driving power	W_{dr}	=	5	W
Output power in load	W_{load}	=	55	W

R.F. CLASS B SINGLE SIDE BAND AMPLIFIER

LIMITING VALUES (Absolute limits)

Frequency	f	up to	1215	MHz
Anode voltage	V_a	= max.	2500	V
Anode input power	W_{ia}	= max.	1250	W
Anode dissipation	W_a	= max.	600	W
Anode current	I_a	= max.	500	mA
Grid No.2 voltage	V_{g2}	= max.	1200	V
Grid No.2 dissipation	W_{g2}	= max.	25	W
Negative grid No.1 voltage	$-V_{g1}$	= max.	250	V
Grid No.1 current	I_{g1}	= max.	100	mA
Grid No.1 circuit resistance	R_{g1}	= max.	15	k Ω

OPERATING CONDITIONS

Frequency	f	=	30	MHz
Anode voltage	V_a	=	2500	V
Grid No.2 voltage	V_{g2}	=	450	V
Grid No.1 voltage	V_{g1}	=	-37	V
			zero signal	double tone signal
Anode current	I_a	=	160	350 mA
Grid No.2 current	I_{g2}	=	0	2.5 mA
Grid No.1 current	I_{g1}	=	0	0 mA
Driving power	W_{dr}	=	0	1 W
Peak envelope power output	W_{OPEP}	=	-	680 W
Intermodulation distortion: of the third order	d_{i3}	=	-	-31 dB
of the fifth order	d_{i5}	=	-	-36 dB

R.F. CLASS C ANODE AND SCREEN GRID MODULATION

LIMITING VALUES (Absolute limits)


Frequency	f	up to	1215	MHz
Anode voltage	V_a	=	max. 2000	V
Anode input power	W_{ia}	=	max. 1000	W
Anode dissipation	W_a	=	max. 400	W
Anode current	I_a	=	max. 500	mA
Grid No.2 voltage	V_{g2}	=	max. 1200	V
Grid No.2 dissipation	W_{g2}	=	max. 17	W
Negative grid No.1 voltage	$-V_{g1}$	=	max. 250	V
Grid No.1 current	I_{g1}	=	max. 100	mA
Grid No.1 circuit resistance	R_{g1}	=	max. 15	$k\Omega$

OPERATING CONDITIONS (cathode drive)

Frequency	f	=	400	MHz
Anode voltage	V_a	=	2000	V
Grid No.2 voltage	V_{g2}	=	400	V 1)
Grid No.1 voltage	V_{g1}	=	-35	V 2)
Anode current	I_a	=	500	mA
Grid No.2 current	I_{g2}	=	8	mA
Grid No.1 current	I_{g1}	=	12	mA
Driving power	W_{dr}	=	35	W
Output power in load	W_{load}	=	600	W

1) Obtained preferably from a separate source, modulated along with the anode supply.

2) Obtained from the grid resistor or from a combination of the grid resistor and either a fixed supply or a cathode resistor.

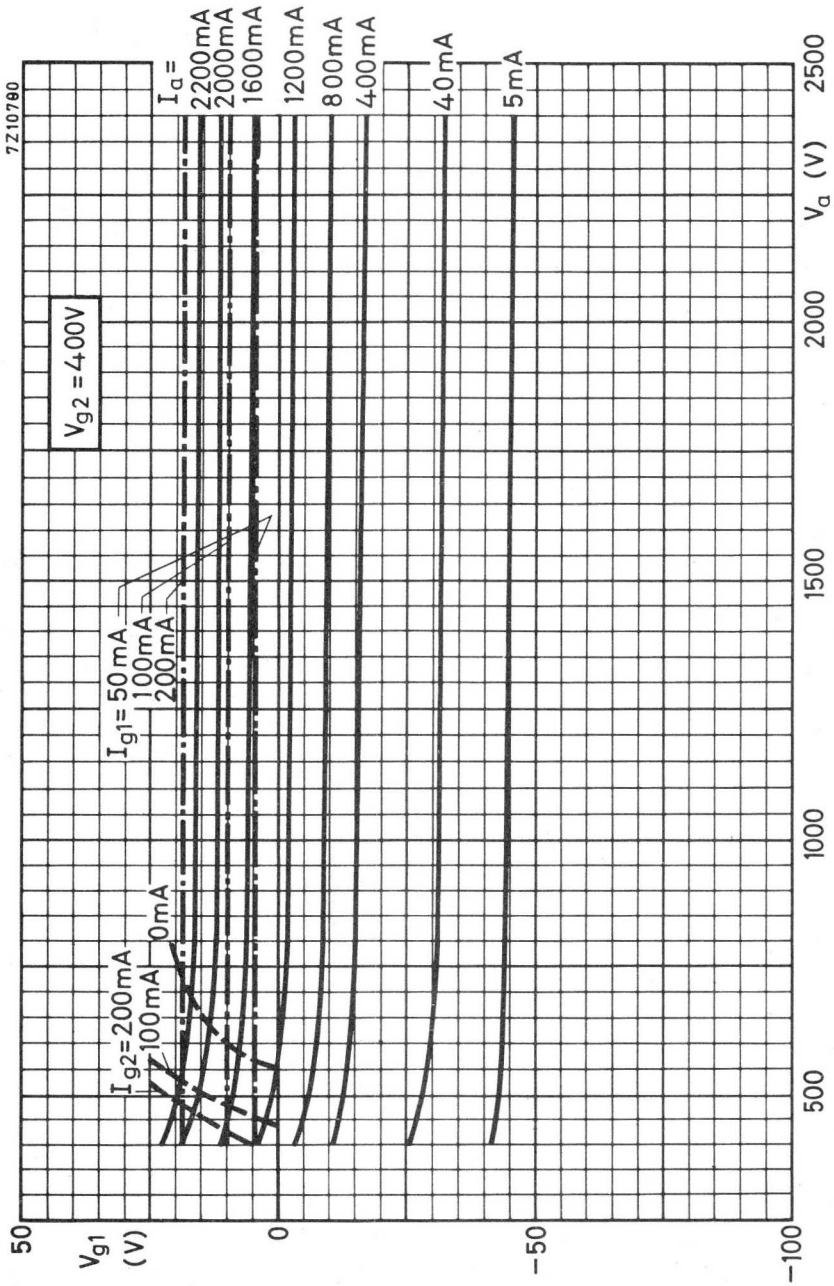

AIR COOLED COAXIAL R.F. POWER TETRODE

QUICK REFERENCE DATA		
Freq. (MHz)	Class AB1 linear SSB amplifier	
	V_a (V)	W_p ¹⁾ (kW, PEP)
13	5000	5.1
28	5000	5.1

HEATING: indirect. Cathode oxide-coated

Heater voltage	$V_f = 12.6 \text{ V} \pm 10\%$
Heater current	$I_f = 14.5 \text{ A}$
Heating time	$T_w = \text{min. } 10 \text{ min.}$

CAPACITANCES

Grid No.1 to all other elements except anode	$C_{g1} = 115 \text{ pF}$
Anode to all other elements except grid No.1	$C_a = 41 \text{ pF}$
Anode to grid No.1	$C_{ag1} = 0.2 \text{ pF}$

TYPICAL CHARACTERISTICS

Anode voltage	$V_a = 5 \text{ kV}$
Grid No.2 voltage	$V_{g2} = 700 \text{ V}$
Anode current	$I_a = 0.7 \text{ A}$
Amplification factor	$\mu_{g2g1} = 3.5$
Mutual conductance	$S = 45 \text{ mA/V}$

¹⁾ Useful power in the load

TEMPERATURE LIMITS (Absolute limits)

Envelope temperature = max. 200 °C

Air inlet temperature = max. 45 °C


AIR COOLING CHARACTERISTICS

	W_a (kW)	q_{min} (m ³ /min)	p_i (mm H ₂ O)
Anode radiator	4	6	20
Socket		0.5	20

MECHANICAL DATA

Socket	40682
Air duct or	40683
Insulating pedestal	40654
Net weight of tube	4.5 kg

Dimensions in mm

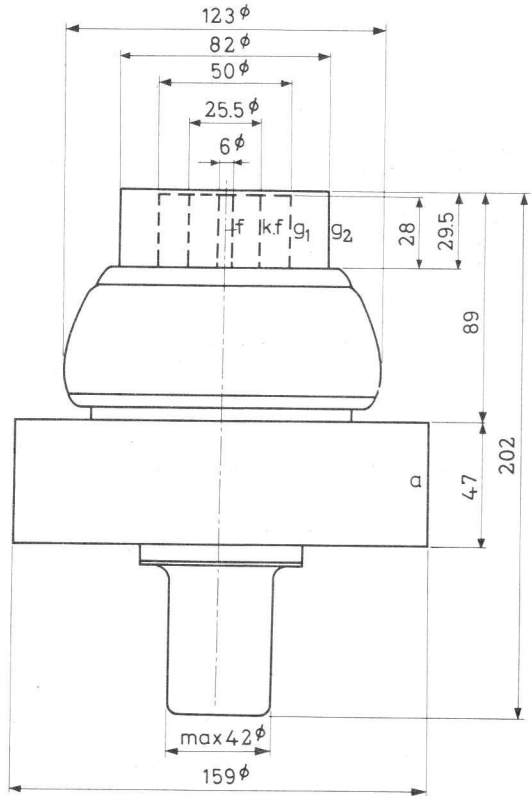

Mounting position: vertical with anode up or down

CLASS AB LINEAR S. S. B. AMPLIFIER, suppressed carrier service

LIMITING VALUES (Absolute limits)

Frequency	f	up to	60	MHz
Anode voltage	V_a	= max.	5.5	kV
Anode current	I_a	= max.	2	A
Anode input power	W_{i_a}	= max.	10	kW
Anode dissipation	W_a	= max.	4	kW
Grid No.2 voltage	V_{g_2}	= max.	1	kV
Grid No.2 dissipation	W_{g_2}	= max.	150	W
Negative grid No.1 voltage	$-V_{g_1}$	= max.	250	V
Grid No.1 current	I_{g_1}	= max.	25	mA

OPERATING CHARACTERISTICS

Frequency	f	=	13	MHz								
Anode voltage	V_a	=	5	kV								
Grid No.2 voltage	V_{g_2}	=	700	V								
Grid No.1 voltage	V_{g_1}	=	-150	V ¹⁾								
			<table border="0" style="margin-left: auto; margin-right: auto;"> <tr> <td style="text-align: center;">zero</td> <td style="text-align: center;">single tone</td> <td style="text-align: center;">double tone</td> <td></td> </tr> <tr> <td style="text-align: center;">signal</td> <td style="text-align: center;">signal</td> <td style="text-align: center;">signal</td> <td></td> </tr> </table>	zero	single tone	double tone		signal	signal	signal		
zero	single tone	double tone										
signal	signal	signal										
Peak driving voltage	$V_{g_{1p}}$	=	0	150	V							
Anode current	I_a	=	0.7	1.8	1.26 A							
Grid No.2 current	I_{g_2}	=	-10 to +10	120	40 mA							
Grid No.1 current	I_{g_1}	=	0	-1	-0.3 mA							
Anode input power	W_{i_a}	=	3.5	9	6.3 kW							
Anode dissipation	W_a	=	3.5	2.85	3.2 kW							
Output power in the load (PEP)	W_p	=	-	5.1	5.1 kW							
Total efficiency	η	=	-	57	45 %							
3 rd order intermodulation distortion	d_3	=	-	-	<-35 dB ²⁾							
5 th order intermodulation distortion	d_5	=	-	-	<-40 dB ²⁾							

1)2) See page 4

CLASS AB LINEAR S. S. B. AMPLIFIER, suppressed carrier service



OPERATING CHARACTERISTICS (continued)


Frequency	f	=	28	MHz		
Anode voltage	V_a	=	5	kV		
Grid No.2 voltage	V_{g2}	=	700	V		
Grid No.1 voltage	V_{g1}	=	-150	V ¹⁾		
			<div style="display: flex; justify-content: space-around; border-top: 1px solid black; border-bottom: 1px solid black;"> zero signal single tone signal double tone signal </div>			
Peak driving voltage	V_{g1p}	=	0	150	150	V
Anode current	I_a	=	0.7	1.8	1.26	A
Grid No.2 current	I_{g2}	=	-10 to +10	120	40	mA
Grid No.1 current	I_{g1}	=	0	-4	-1	mA
Anode input power	W_{i_a}	=	3.5	9	6.3	kW
Anode dissipation	W_a	=	3.5	2.85	3.2	kW
Output power in the load (PEP)	W_p	=	-	5.1	5.1	kW
Total efficiency	η	=	-	57	45	%
3rd order intermodulation distortion	d_3	=	-	-	<-35	dB ²⁾
5th order intermodulation distortion	d_5	=	-	-	<-40	dB ²⁾

1) To be adjusted for zero signal anode current.

2) Maximum values encountered at any level of drive voltage referred to the amplitude of either of the two equal tones at that level.

Relative to the peak envelope power these figures will be increased by 6 dB. Considerably better distortion figures can be achieved with I_a at zero signal = 0.8 A at the cost of higher zero signal anode dissipation. Efficiency for full drive is hardly deteriorated by this higher value of zero signal anode current.

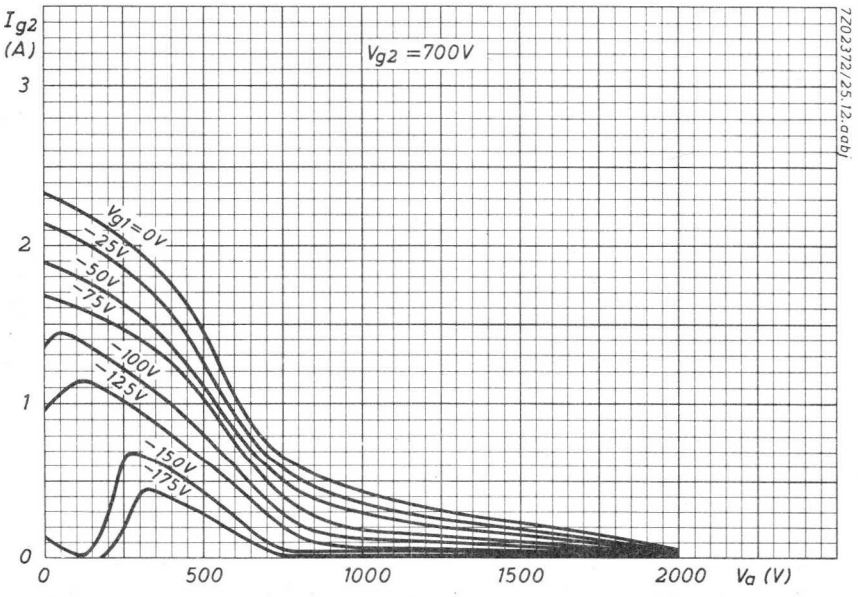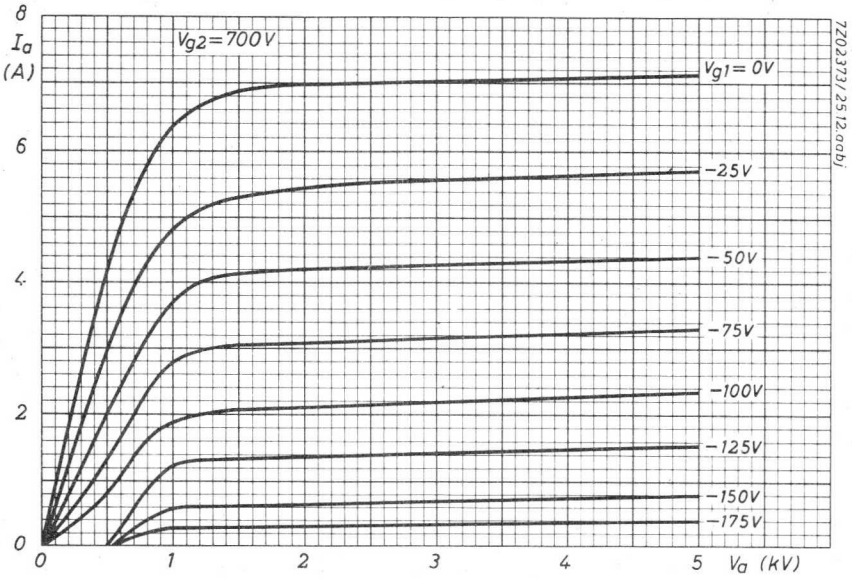

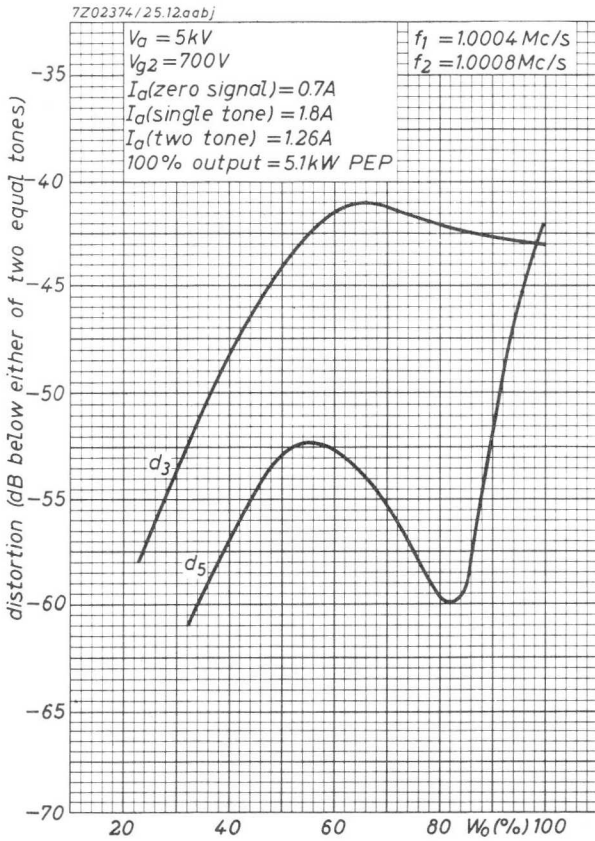



Available for equipment maintenance. No longer recommended for equipment production.

QUICK-HEATING R.F. DOUBLE TETRODE

Quick-heating radiation and convection cooled double tetrode for use as r.f. amplifier and frequency multiplier up to 500 MHz, designed for intermittent filament operation in transistorized mobile transmitters.

QUICK REFERENCE DATA

freq. MHz	R.F. class.C telegraphy			R.F. class.C frequency multiplier		
	V_a V	W_{dr}^* W	W_ℓ W	V_a V	W_{dr}^* W	W_ℓ W
200	275	0,7	12,5			
500	175	1,5	6,0			
167/500				175	1,5	2,0

HEATING: direct by a.c. or d.c. series or parallel supply; oxide coated filament

Filament voltage V_f 1,1 V

Filament current I_f 2,9 A

Heating time for $W_o = 70\%$ of full output power $T_h < 0,5$ s

The filament has been designed to accept temporary fluctuations of supply voltage of $\pm 15\%$.

The frequency of the a.c. filament supply may be

for sinusoidal supply voltage

max 200 Hz

for square wave supply voltage

any

CAPACITANCES in push-pull connection

Input capacitance C_i 4,1 pF

Output capacitance C_o 1,2 pF

* Driver output power.



TYPICAL CHARACTERISTICS

Anode voltage	V_a	=	175 V
Grid No.2 voltage	V_{g_2}	=	175 V
Anode current	I_a	=	40 mA
Amplification factor	$\mu_{g_2g_1}$	=	22
Mutual conductance	S	=	7 mA/V

COOLING: Radiation and convection


The use of a closed tube shield is not recommended

TEMPERATURE LIMITS (Absolute limits)


Bulb temperature = max. 230 °C

MECHANICAL DATA

Base : Noval
 Socket : 2422 502 01004 ¹⁾
 Net weight: 16 g



Dimensions in mm



Mounting position: any

If the tube is mounted with its main axis horizontally, it is recommended that the pins 3 and 7 be in a horizontal plane.

The filament connections (tags 3-7 and 2-8) should be connected in parallel on the socket.

¹⁾ Or equivalent type suitable for the high filament current

R.F. CLASS C TELEGRAPHY OR F.M. TELEPHONY; two systems in push-pull

LIMITING VALUES (Absolute limits)

Frequency	f	up to 200	500	MHz
Anode voltage	V_a	= max. 300	200	V
Anode current	I_a	= max. 2x50	2x50	mA
Anode input power	W_{i_a}	= max. 30	20	W
Anode dissipation	W_a	= max. 2x4	2x4	W
Grid No.2 voltage	V_{g_2}	= max. 200	200	V
Grid No.2 dissipation	W_{g_2}	= max. 3	3	W
Negative grid No.1 voltage	$-V_{g_1}$	= max. 150	150	V
Grid No.1 current	I_{g_1}	= max. 2x5	2x5	mA
Grid No.1 circuit resistance	R_{g_1}	= max. 100	100	k Ω

OPERATING CONDITIONS

Frequency	f	=	200	500	MHz
Anode voltage	V_a	=	275	175	V
Grid No.2 supply voltage	V_{bg_2}	=	275	175	V
Grid No.2 series resistor	R_{g_2}	=	6.8	0.1	k Ω
Grid No.1 voltage	V_{g_1}	=	-20	-22	V
Grid No.1 resistor	R_{g_1}	=	3.9 ¹⁾	9.4 ²⁾	k Ω
Driving voltage	$V_{g_1 g_1' p}$	=	65	65	V
Anode current	I_a	=	2x42.5	2x40	mA
Grid No.2 current	I_{g_2}	=	14	12	mA
Grid No.1 current	I_{g_1}	=	2x2.6	2x2.3	mA
Grid No.2 dissipation	W_{g_2}	=	2.5	2.1	W
Driver output power	W_{dr}	=	0.7	1.5	W
Anode input power	W_{i_a}	=	23.4	14	W
Anode dissipation	W_a	=	2x3.5	2x3	W
Output power	W_o	=	16	8	W
Efficiency	η	=	68	57	%
Output power in the load	W_l	=	13	6.5	W ³⁾

1) Common for both units.

2) It is recommended to use two fixed resistors, one for each unit, in series with a common adjustable resistor.

3) For optimum conditions R_{g_1} should be adjusted to obtain the desired anode current.

R.F. CLASS C FREQUENCY TRIPLER , two systems in push-pull

LIMITING VALUES (Absolute limits)



Frequency	f	up to	500	MHz
Anode voltage	V_a	= max.	200	V
Anode current	I_a	= max.	2x35	mA
Anode input power	W_{i_a}	= max.	12	W
Anode dissipation	W_a	= max.	2x4	W
Grid No.2 voltage	V_{g_2}	= max.	200	V
Grid No.2 dissipation	W_{g_2}	= max.	2.5	W
Negative grid No.1 voltage	$-V_{g_1}$	= max.	150	V
Grid No.1 current	I_{g_1}	= max.	2x3	mA
Grid No.1 circuit resistance	R_{g_1}	= max.	100	k Ω



OPERATING CONDITIONS

Frequency	f	=	167/500	MHz
Anode voltage	V_a	=	175	V
Grid No.2 supply voltage	V_{bg_2}	=	175	V
Grid No.2 series resistor	R_{g_2}	=	100	Ω
Grid No.1 resistor	R_{g_1}	=	56	k Ω ¹⁾
Driving voltage	$V_{g_1g_1'p}$	=	175	V
Anode current	I_a	=	2x30	mA
Grid No.2 current	I_{g_2}	=	9	mA
Grid No.1 current	I_{g_1}	=	2x1.2	mA
Grid No.2 dissipation	W_{g_2}	=	1.6	W
Driver output power	W_{dr}	=	1.5	W
Anode input power	W_{i_a}	=	10.5	W
Anode dissipation	W_a	=	2x3.5	W
Output power	W_o	=	3.5	W
Efficiency	η	=	33	%
Output power in the load	W_l	=	2	W ²⁾

1) It is recommended to use two fixed resistors, one for each unit, in series with a common adjustable resistor.

2) For optimum conditions R_{g_1} should be adjusted to obtain the desired anode current.

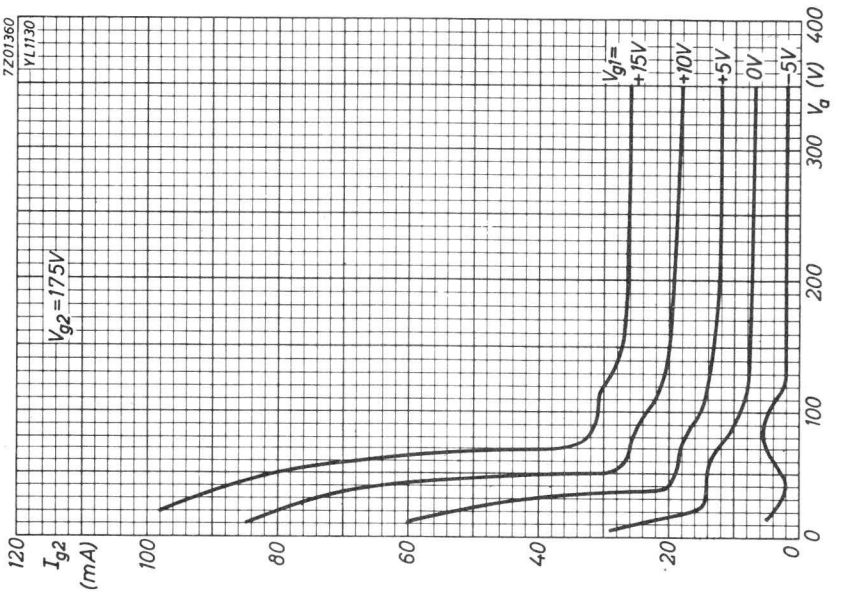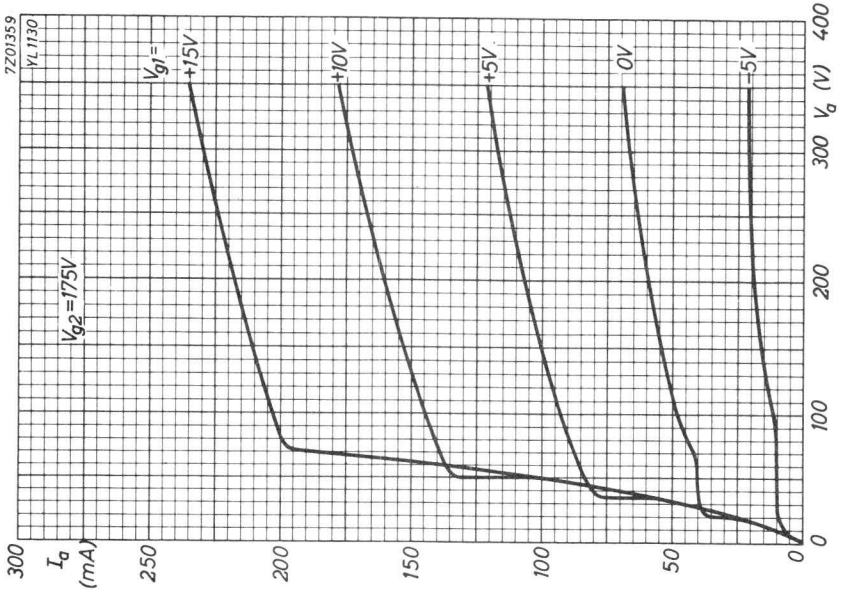

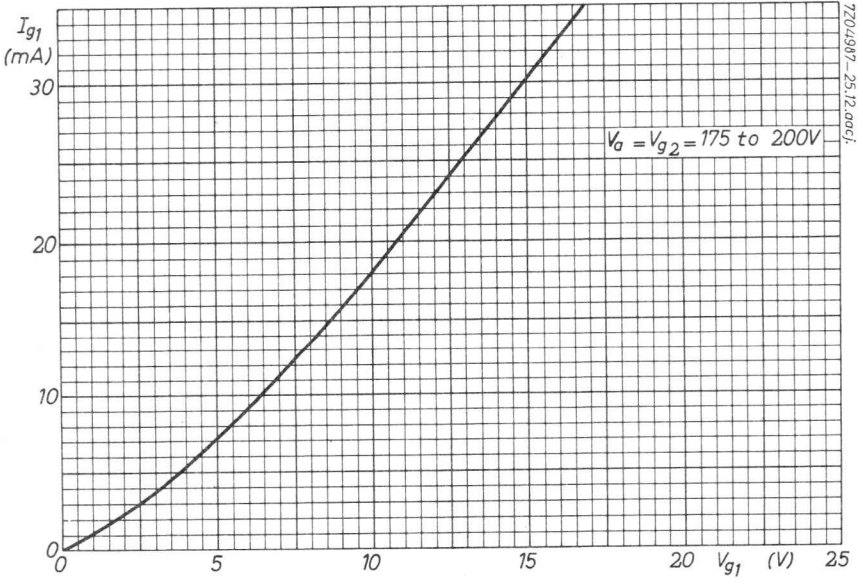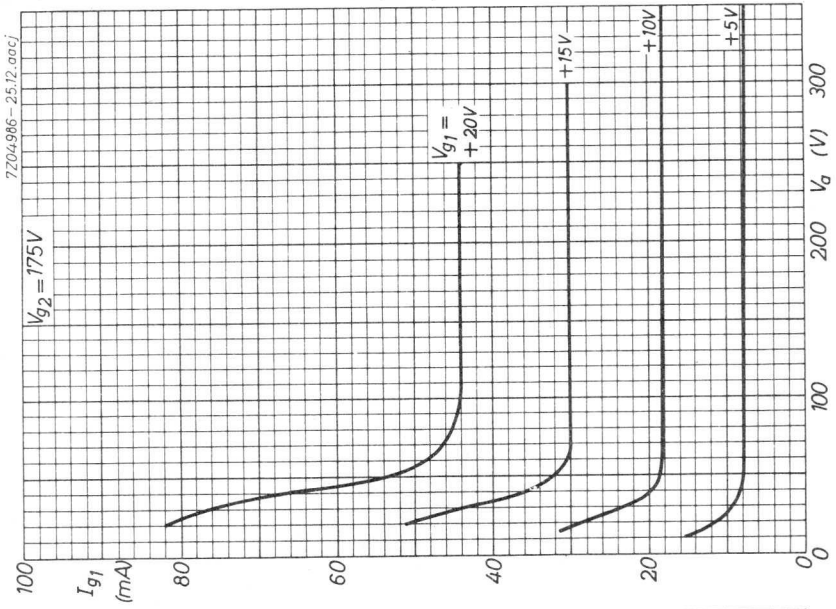

R.F. BEAM POWER TETRODE

QUICK REFERENCE DATA				
Freq. (MHz)	Class AB Single sideband		Class AB mod. Two tubes	
	V_a (V)	W_f 1) (W)	V_a (V)	W_o (W)
30	600	110	600	200
60	600	100		

HEATING: Indirect by A.C. or D.C.; cathode oxide coated

Heater voltage	$V_f =$	6.3 V	12.6 V
Heater current	$I_f =$	1.90 A	0.95 A
Pins		(5+6)-2	5-6
Heating time	$T_h =$	min. 30	sec

CAPACITANCES

Anode to all other elements except grid No.1	$C_a =$	10.7 pF
Grid No.1 to all other elements except anode	$C_{g1} =$	24.5 pF
Anode to grid No.1	$C_{ag1} =$	0.23 pF

TYPICAL CHARACTERISTICS

Anode voltage	$V_a =$	600 V
Grid No.2 voltage	$V_{g2} =$	250 V
Anode current	$I_a =$	100 mA
Amplification factor	$\mu_{g2g1} =$	4.0
Mutual conductance	$S =$	10 mA/V

1) Peak envelope power. Useful power in the load.

TEMPERATURE LIMITS (Absolute limits)

Bulb temperature	= max. 250 °C
Base pin seal temperature	= max. 180 °C
Anode seal temperature	= max. 220 °C



COOLING

Radiation and convection. In order to keep the temperatures below the maximum permitted values it may be necessary to direct an air flow to the bulb or seals.

MECHANICAL DATA

Dimensions in mm

Base	: Septar
Socket	: 2422 513 00001
Anode connector:	40634
Net weight	: 110 g

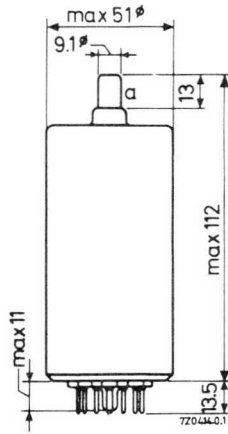

Mounting position: any

R. F. CLASS AB LINEAR AMPLIFIER , single sideband, suppressed carrier

LIMITING VALUES (Absolute limits)

Frequency	f	up to	60	MHz
Anode voltage	V_a	= max.	750	V
Anode current	I_a	= max.	350	mA
Anode dissipation	W_a	= max.	75	W
Grid No.2 voltage	V_{g2}	= max.	300	V
Grid No.2 dissipation	W_{g2}	= max.	7.5	W
Negative grid No.1 voltage	$-V_{g1}$	= max.	100	V
Grid No.1 dissipation	W_{g1}	= max.	0.5	W
Grid No.1 circuit resistance	R_{g1}	= max.	10	k Ω

OPERATING CONDITIONS

Frequency	f	=	30	MHz		
Anode voltage	V_a	=	600	V		
Grid No.2 voltage	V_{g2}	=	250	V		
Grid No.1 voltage	V_{g1}	=	-50	V 1)		
			<div style="display: flex; justify-content: space-around; border-top: 1px solid black; border-bottom: 1px solid black;"> zero signal single tone signal double tone signal </div>			
Peak driving voltage	V_{g1p}	=	0	50	50	V
Anode current	I_a	=	100	325	220	mA
Grid No.2 current	I_{g2}	=	3	22	12	mA
Grid No.1 current	I_{g1}	=	0	0	0	mA 2)
Grid No.2 dissipation	W_{g2}	=	0.75	7	3.5	W
Driving power	W_{dr}	=	-	2	2	W
Anode input power	W_{i_a}	=	60	195	132	W
Anode dissipation	W_a	=	60	71	70	W
Output power in the load	W_ℓ	=	-	110	110 3)	W
Efficiency	η	=	-	57	42	%
Intermodulation products						
third order	d_3	=	-	-	< 30	dB 4)
fifth order	d_5	=	-	-	< 40	dB 4)

1)2)3)4) See page 4

R. F. CLASS AB LINEAR AMPLIFIER , single sideband, suppressed carrier
(continued)

OPERATING CONDITIONS(continued)

		<div style="display: flex; justify-content: space-around; font-size: small;"> zero signal single tone signal double tone signal </div>				
Frequency	f	=	60		MHz	
Anode voltage	V_a	=	600		V	
Grid No.2 voltage	V_{g2}	=	250		V	
Grid No.1 voltage	V_{g1}	=	-50		V ¹⁾	
Peak driving voltage	V_{g1p}	=	0	50	50	V
Anode current	I_a	=	100	325	220	mA
Grid No.2 current	I_{g2}	=	3	22	12	mA
Grid No.1 current	I_{g1}	=	0	0	0	mA ²⁾
Grid No.2 dissipation	W_{g2}	=	0.75	7	3.5	W
Driving power	W_{dr}	=	-	2	2	W
Anode input power	W_{i_a}	=	60	195	132	W
Anode dissipation	W_a	=	60	75	72	W
Output power in the load	W_l	=	-	100	100 ³⁾	W
Efficiency	η	=	-	51	38	%
Intermodulation products						
third order	d_3	=	-	-	< 30	dB ⁴⁾
fifth order	d_5	=	-	-	< 40	dB ⁴⁾

1) To be adjusted for the stated value of the zero-signal anode current.

2) Due to transit-time effects this value can differ from 0 mA and vary between +1 mA and -1 mA. This value will increase with increasing frequency.

3) Peak envelope power.

4) Maximum values encountered at any level of drive voltage referred to the amplitude of either of the two equal tones at that level.

Relative to the peak envelope power these figures will be increased by 6 dB.

A.F. CLASS AB AMPLIFIER AND MODULATOR



LIMITING VALUES (Absolute limits)

Anode voltage	V_a	=	max.	750	V
Anode current	I_a	=	max.	350	mA
Anode dissipation	W_a	=	max.	75	W
Grid No.2 voltage	V_{g2}	=	max.	300	V
Grid No.2 dissipation	W_{g2}	=	max.	7.5	W
Negative grid No.1 voltage	$-V_{g1}$	=	max.	100	V
Grid No.1 current	I_{g1}	=	max.	10	mA
Grid No.1 circuit resistance	R_{g1}	=	max.	10	k Ω

OPERATING CONDITIONS, two tubes in push-pull

Anode voltage	V_a	=	600	V	
Grid No.2 voltage	V_{g2}	=	250	V	
Grid No.1 voltage	V_{g1}	=	-50	V ¹⁾	
Load resistance	$R_{aa\sim}$	=	2.8	k Ω	
Peak driving voltage	V_{g1g1p}	=	0	100	V
Anode current	I_a	=	2x100	2x260	mA
Grid No.2 current	I_{g2}	=	2x3	2x24	mA
Grid No.1 current	I_{g1}	=	0	0	mA
Grid No.2 dissipation	W_{g2}	=	2x0.75	2x6	W
Anode input power	W_{i_a}	=	2x60	2x156	W
Anode dissipation	W_a	=	2x60	2x56	W
Output power	W_o	=	0	200	W
Efficiency	η	=	-	64	%
Total harmonic distortion	d_{tot}	=	-	< 2	%

1) To be adjusted for the stated value of the zero-signal anode current

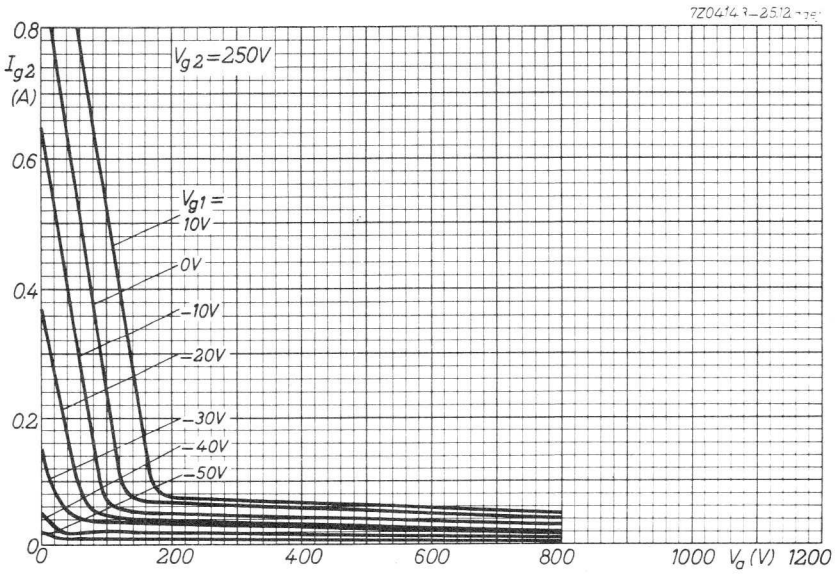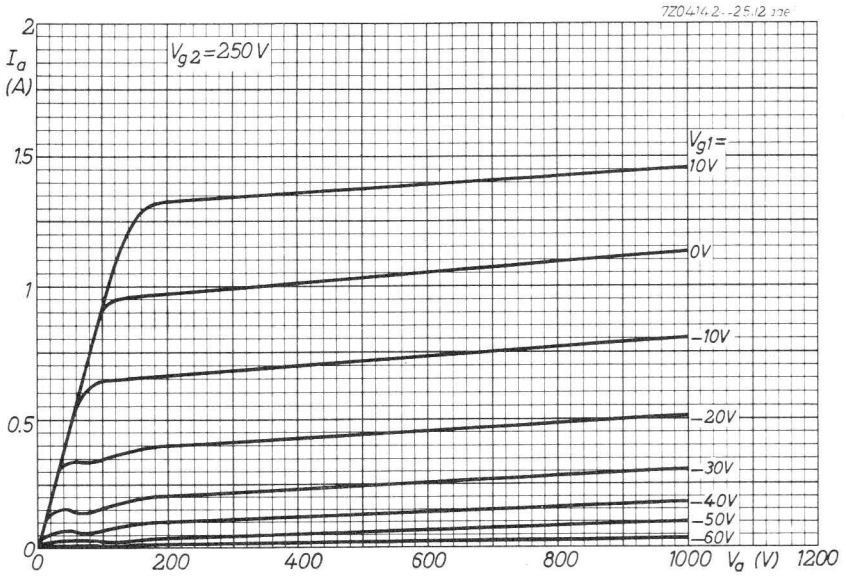

R.F. POWER TETRODES

Power tetrodes in metal-glass construction intended for use as s.s.b. amplifier and class-B amplifier in TV transmitters. The YL1181 is forced air cooled. The YL1182 is vapour cooled.

QUICK REFERENCE DATA

R.F. class-AB amplifier, single-sideband

Frequency	f	30 MHz
Anode voltage	V_a	4,5 kV
Output power (P.E.P.)	W_ℓ	3 kW

R.F. class-B amplifier for TV service

Frequency	f	230 MHz
Anode voltage	V_a	4 kV
Output power (sync)	W_ℓ	5,5 kW

HEATING: direct; thoriated tungsten filament

Filament voltage	V_f	5 V
Filament current	I_f	64 A

CAPACITANCES

Anode to all except grid 1	$C_{a(g1)}$	14 pF
Grid 1 to all except anode	$C_{g1(a)}$	78 pF
Anode to grid 1	C_{ag1}	0,23 pF

TYPICAL CHARACTERISTICS

Anode voltage	V_a	3 kV
Grid 2 voltage	V_{g2}	600 V
Anode current	I_a	1 A
Transconductance	S	22 mA/V
Amplification factor	μ_{g2g1}	5,2

TEMPERATURE LIMITS AND COOLING

YL1181

Absolute maximum envelope temperature

$t_{env} \text{ max } 220 \text{ }^\circ\text{C}$

Required quantity of air

W_a kW	h m	t_i $^\circ\text{C}$	q m^3/min	P_i Pa *
2,5	0	25	2,7	500
4	0	25	4,3	1300

See also cooling curve Fig.1.

A low velocity air flow ($> 0,5 \text{ m}^3/\text{min}$) should be directed to the filament and grid seals.

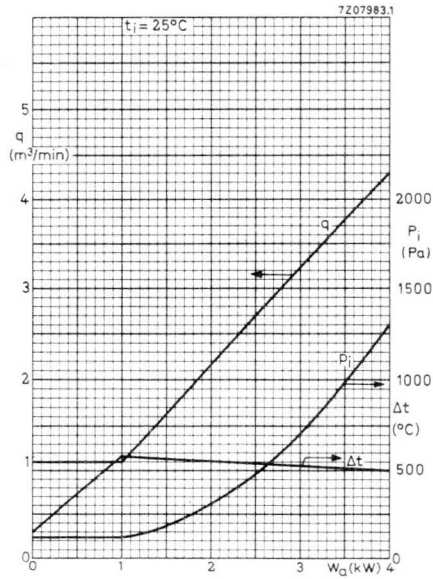


Fig.1

* $10 \text{ Pa} \approx 1 \text{ mm H}_2\text{O}$.

YL1182

Absolute maximum envelope temperature

 t_{env} max 220 °CA low velocity air flow ($> 0,5 \text{ m}^3/\text{min}$) should be directed to the filament and grid seals.


MECHANICAL DATA

Dimensions in mm

YL1181

Net mass: $\approx 2,5 \text{ kg}$

Mounting position: Vertical with anode up or down

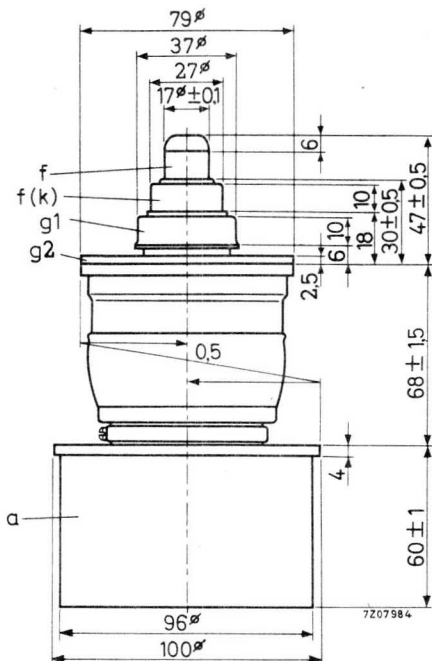

ACCESSORIES

Filament connector (1 required)

type 40721

Grid 1 connector

type 40722

Grid 2 connector

type 40723

Insulating pedestal


type 40724

YL1181
YL1182

YL1182

Net mass: $\approx 1,7$ kg

Mounting position: Vertical with anode down

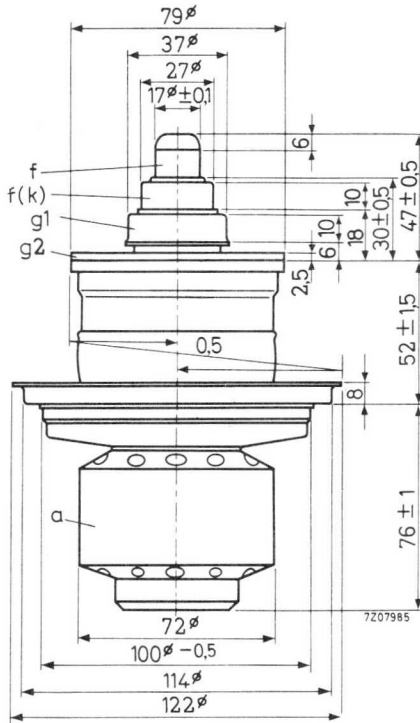

ACCESSORIES

Filament connector (1 required)

type 40721

Grid 1 connector

type 40722

Grid 2 connector

type 40723

Boiler

type K731

R.F. CLASS-AB LINEAR AMPLIFIER, SINGLE-SIDEBAND, suppressed carrier

LIMITING VALUES (Absolute maximum rating system)

Frequency	f	max	30	MHz
Anode voltage	V_a	max	6	kV
Grid 2 voltage	V_{g2}	max	800	V
Grid 1 voltage	$-V_{g1}$	max	400	V
Anode current	I_a	max	2,5	A
Grid 1 current	I_{g1}	max	0,2	A
Anode input power	W_{ia}	max	8	kW
Anode dissipation YL1181	W_a	max	4	kW
Anode dissipation YL1182	W_a	max	6	kW
Grid 2 dissipation	W_{g2}	max	120	W
Grid 1 dissipation	W_{g1}	max	40	W

OPERATING CONDITIONS

Frequency	f	30	MHz		
Anode voltage	V_a	4,5	kV		
Grid 2 voltage	V_{g2}	800	V		
Grid 1 voltage	V_{g1}	-140	V *		
		zero signal	single tone	double tone	
Grid 1 driving voltage, peak	V_{g1p}	0	140	140	V
Anode current	I_a	0,5	1,33	0,93	A
Grid 2 current	I_{g2}	0	30	8	mA
Grid 1 current	I_{g1}	0	0	0	mA
Anode input power	W_{ia}	2,25	6	4,2	kW
Anode dissipation	W_a	2,25	2,8	2,6	kW
Grid 2 dissipation	W_{g2}	0	24	6,4	W
Driver output power	W_{dr}	0	30	30	W **
Output power in load (P.E.P.)	W_{ℓ}	-	3	3	kW †

* Adjust to give the zero signal anode current.

** The indicated driver output power is required to compensate losses in damping resistors and circuit losses.

† Measured in a circuit having an efficiency of 95%.

R.F. CLASS-B LINEAR AMPLIFIER FOR TELEVISION SERVICE, grounded grid
Negative modulation, positive synchronization (CCIR and FCC system)

LIMITING VALUES (Absolute maximum rating system)

Frequency	f	max	230 MHz
Anode voltage	V_a	max	4,2 kV
Grid 2 voltage	V_{g2}	max	800 V
Grid 1 voltage	$-V_{g1}$	max	400 V
Anode current	I_a	max	2,5 A
Grid 1 current	I_{g1}	max	200 mA
Anode input power	W_{ia}	max	8 kW
Anode dissipation YL1181	W_a	max	4 kW
Anode dissipation YL1182	W_a	max	6 kW
Grid 2 dissipation	W_{g2}	max	100 W
Grid 1 dissipation	W_{g1}	max	30 W


OPERATING CONDITIONS


Frequency	f		230 MHz
Bandwidth (-3 dB)	B (-3 dB)		10 MHz *
Anode voltage	V_a		4 kV
Grid 2 voltage	V_{g2}		600 V
Grid 1 voltage	V_{g1}		-115 V
Grid 1 driving voltage, peak	V_{g1p} sync		280 V
Anode current	I_a black		1,5 A
Grid 2 current	I_{g2} black		40 mA
Grid 1 current	I_{g1} black		60 mA
Driver output power	W_{dr} sync		550 W
Output power in load	W_l sync		5,5 kW **
	W_l black		3 kW **
Anode dissipation	W_a black		3 kW

* Bandwidth obtained with secondary circuit.

** W_l represents the useful power in the load including feed-through power and assumes a circuit transfer efficiency of 90%.

7Z07981

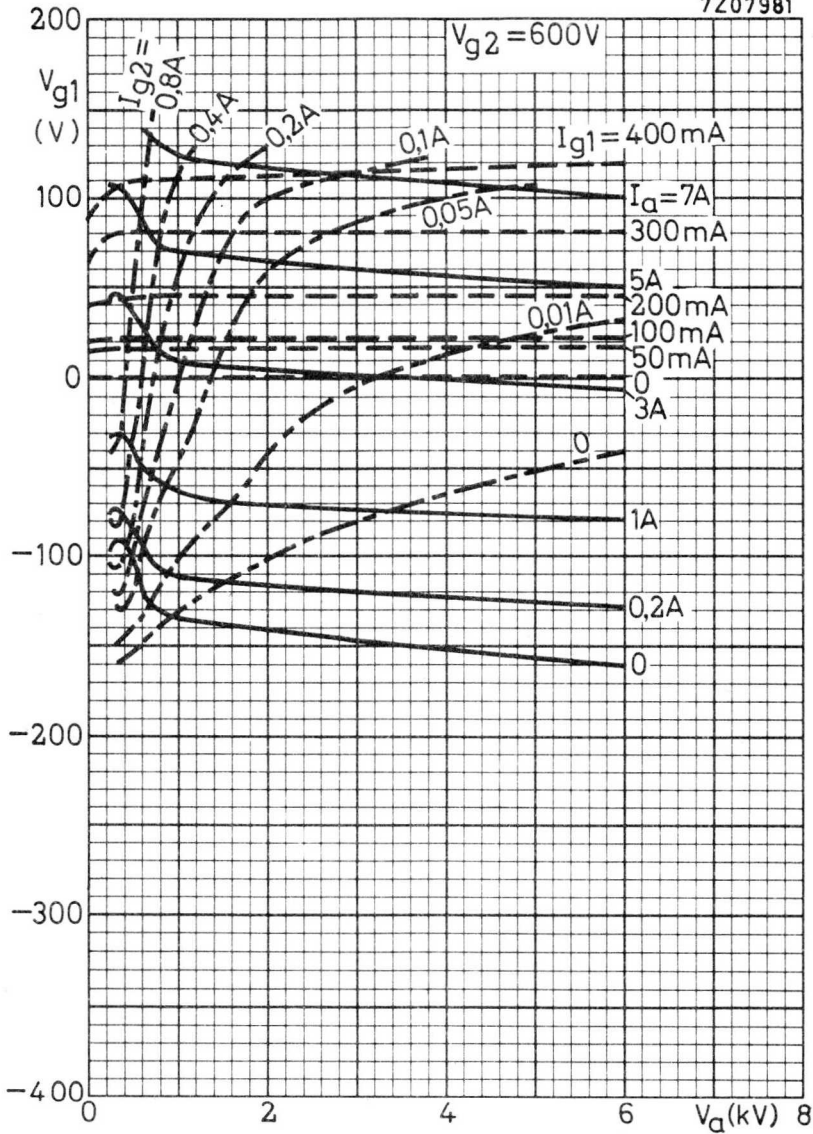

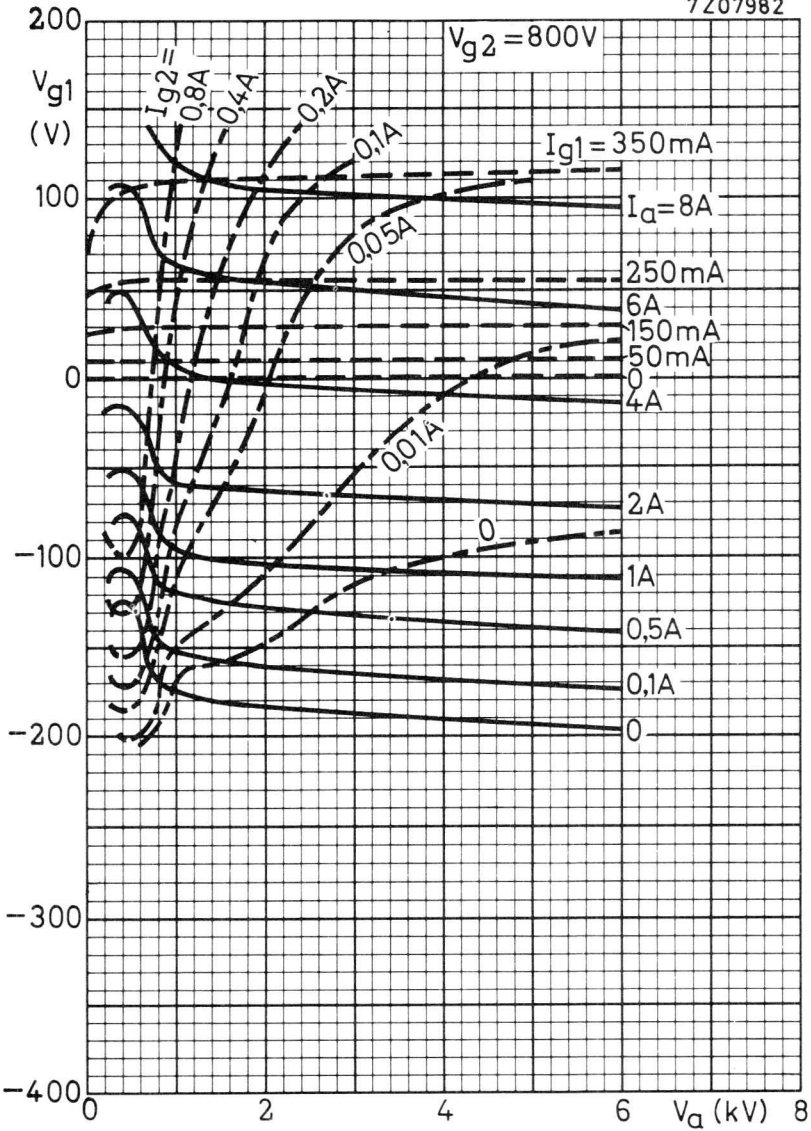



Available for equipment maintenance. No longer recommended for equipment production.

QUICK-HEATING R.F. DOUBLE TETRODE

Radiation and convection cooled double tetrode intended for use as r.f. amplifier and frequency multiplier up to 500 MHz, designed for intermittent filament operation in transistorized mobile transmitters.

QUICK REFERENCE DATA

R.F. class-C telegraphy	f	200 MHz	V _a	350 V
	W _{dr}	1,0 W	W _q	26 W
R.F. class-C telegraphy	f	500 MHz	V _a	250 V
	W _{dr}	2,5 W	W _q	14,5 W
R.F. class-C frequency multiplier	f	167/500 MHz	V _a	250 V
	W _{dr}	2,2 W	W _q	2,5 W
R.F. class-C ag ₂ mod.	f	175 MHz	V _a	280 V
	W _{dr}	1,5 W	W _q	15 W

HEATING: direct by a.c. or d.c., series or parallel supply; oxide coated filament.

Filament voltage	V _f	1,1 V
Filament current	I _f	4,2 A
Heating time for W ₀ = 70% of full output power	T _h	< 0,5 s

The filament has been designed to accept temporary fluctuations of supply voltage of ± 15%.

The frequency of the a.c. filament supply may be



for sinusoidal supply voltage	max	200 Hz
for square wave supply voltage	any	

CAPACITANCES in push-pull connection

Input	C _i	4,7 pF
Output	C _o	1,2 pF

DIMENSIONS AND CONNECTIONS

Base: Magnoval

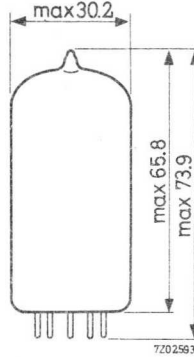

TYPICAL CHARACTERISTICS, each unit

Amplification factor

at $V_a = 150 \text{ V}$, $V_{g2} = 150 \text{ V}$, $I_a = 45 \text{ mA}$

$\mu_{g2g1} \quad 20$

Transconductance

at $V_a = 150 \text{ V}$, $V_{g2} = 150 \text{ V}$, $I_a = 45 \text{ mA}$

S 9.5 mA/V

MOUNTING POSITION any

If the tube is mounted with its main axis horizontally it is recommended that the pins 3 and 7 be in a horizontal plane.

ACCESSORIES

Socket: magnoval 2422 502 05001 or equivalent typesuitable for the high filament current.

Filament connections (tags 3-7 and 2-8) should be connected in parallel on the socket.

WEIGHT

Net weight 27 g

TEMPERATURE LIMITS AND COOLING

Radiation and convection cooling. The use of a closed tube shield is not recommended.

Absolute maximum bulb temperature

$t_{bulb} \quad \text{max. } 230 \text{ } ^\circ\text{C}$

R.F. CLASS C TELEGRAPHY AND F.M. TELEPHONY, two units in push-pull

LIMITING VALUES (Absolute limits). Intermittent service, ICAS

Frequency	f	max.	200	500	MHz
Anode voltage	V_a	max.	400	300	V
Grid No.2 voltage	V_{g2}	max.	200	200	V
Grid No.1 voltage	$-V_{g1}$	max.	150	100	V
Anode current	I_a	max.	2x75	2x75	mA
Grid No.1 current	I_{g1}	max.	2x7	2x7	mA
Anode input power	W_{ia}	max.	56	42	W
Anode dissipation	W_a	max.	2x8	2x8	W
Grid No.2 dissipation	W_{g2}	max.	3.5	3.5	W
Grid No.1 circuit resistance	R_{g1}	max.	100	100	k Ω

OPERATING CONDITIONS Intermittent service, ICAS

Frequency	f	200	200	500	MHz
Anode voltage	V_a	350	350	260	V
Grid No.2 supply voltage	V_{bg2}	350	350	260	V
Grid No.2 series resistor	R_{g2}	9	9	4.3	k Ω
Grid No.1 voltage	V_{g1}	-26	-13	-22.5	V
Grid No.1 circuit resistance	R_{g1}	4.7 ¹⁾	2 ¹⁾	6.9 ²⁾	k Ω
Driving voltage	$V_{g1g1'p}$	85	85	65	V
Anode current	I_a	2x70	2x70	2x70	mA
Grid No.2 current	I_{g2}	20	23.5	20	mA
Grid No.1 current	I_{g1}	2x6.5	2x6.5	2x3.25	mA
Anode input power	W_{ia}	49	49	36.5	W
Anode dissipation	W_a	2x8	2x8	2x8	W
Grid No.2 dissipation	W_{g2}	3.4	3.3	3.5	W
Driver output power	W_{dr}	1.0	1.0	2.5	W
Output power	W_o	33	33	19	W
Efficiency	η	67	67	52	%
Output power in load	W_ℓ	26	26	14	W ³⁾

¹⁾ Common for both units.

²⁾ It is recommended to use two fixed resistors, one for each unit, in series with a common adjustable resistor.

³⁾ For optimal conditions R_{g1} should be adjusted to obtain the desired anode current.

R.F. CLASS C FREQUENCY TRIPLER, two units in push-pull**LIMITING VALUES** (Absolute limits). Intermittent service, **ICAS**

Frequency	f	max.	500 MHz
Anode voltage	V_a	max.	300 V
Grid No.2 voltage	V_{g2}	max.	200 V
Grid No.1 voltage	$-V_{g1}$	max.	150 V
Anode current	I_a	max.	2x50 mA
Grid No.1 current	I_{g1}	max.	2x3 mA
Anode input power	W_{ia}	max.	27 W
Anode dissipation	W_a	max.	2x8 W
Grid No.2 dissipation	W_{g2}	max.	3.5 W
Grid No.1 circuit resistance	R_{g1}	max.	100 k Ω

OPERATING CONDITIONS Intermittent service. **ICAS**

Frequency	f	167/500 MHz
Anode voltage	V_a	250 V
Grid No.2 supply voltage	V_{bg2}	250 V
Grid No.2 series resistor	R_{g2}	5.6 k Ω
Grid No.1 circuit resistance-each unit	R_{g1}	27 k Ω ¹⁾
Driving voltage	$V_{g1g1'p}$	170 V
Anode current	I_a	2x45 mA
Grid No.2 current	I_{g2}	14 mA
Grid No.1 current	I_{g1}	2x2.5 mA
Anode input power	W_{ia}	22.5 W
Anode dissipation	W_a	2x8 W
Grid No.2 dissipation	W_{g2}	2.4 W
Driver output power	W_{dr}	2.2 W
Output power	W_o	6.5 W
Efficiency	η	29 %
Output power in load	W_l	3 W ²⁾

1) It is recommended to use two fixed resistors, one for each unit, in series with a common adjustable resistor.



2) For optimal conditions R_{g1} should be adjusted to obtain the desired anode current.

R.F. CLASS C ANODE AND SCREEN GRID MODULATION, two units in push-pull**LIMITING VALUES** (Absolute limits). Intermittent service, **ICAS**

Frequency	f	max.	200	500	MHz
Anode voltage	V_a	max.	330	260	V
Grid No.2 voltage	V_{g2}	max.	200	200	V
Grid No.1 voltage	$-V_{g1}$	max.	150	150	V
Anode current	I_a	max.	2x56	2x56	mA
Grid No.1 current	I_{g1}	max.	2x5	2x5	mA
Anode input power	W_{ia}	max.	40	40	W
Anode dissipation	W_a	max.	2x5.5	2x5.5	W
Grid No.2 dissipation	W_{g2}	max.	2x1.5	2x1.5	W
Grid No.1 circuit resistance	R_{g1}	max.	100	100	k Ω

OPERATING CONDITIONS ; intermittent service, **ICAS**

Frequency	f		175	500	MHz
Anode voltage	V_a		280	225	V
Grid No.2 voltage	V_{g2}		150	150	V
Grid No.1 voltage	$-V_{g1}$		35	25	V
Anode current	I_a		2x50	2x50	mA
Grid No.2 current	I_{g2}		19	17	mA
Grid No.1 current	I_{g1}		2x4	2x3	mA
Anode input power	W_{ia}		28	22.5	W
Anode dissipation	W_a		2x4.5	2x4.5	W
Driver output power	W_{dr}		1.5	3.0	W
Output power	W_o		19	13	W
Efficiency	η		68	58	%
Output power in load	W_l		15	10	W
Depth of modulation	m		100	100	%
Modulator output power	$W_{o\ mod}$		16	12.5	W
Grid No.2 peak modulator voltage	$V_{g2p\ mod}$		120	120	V

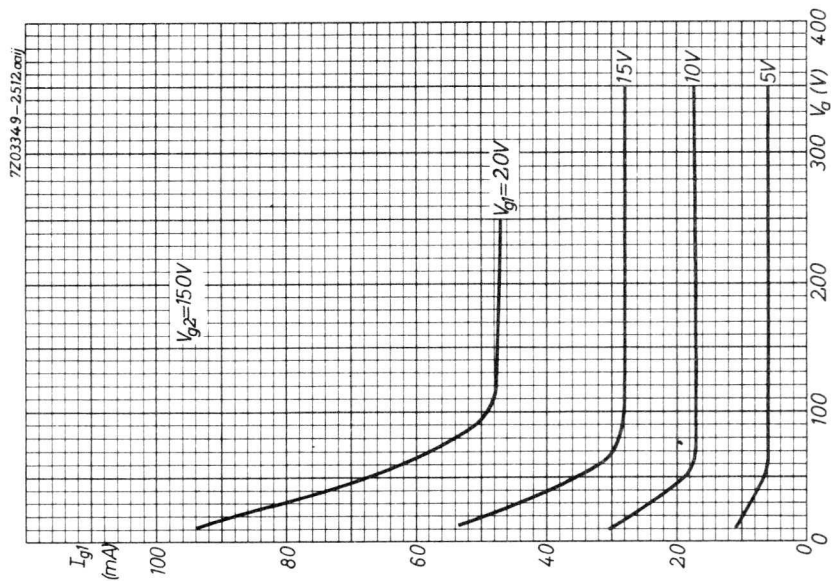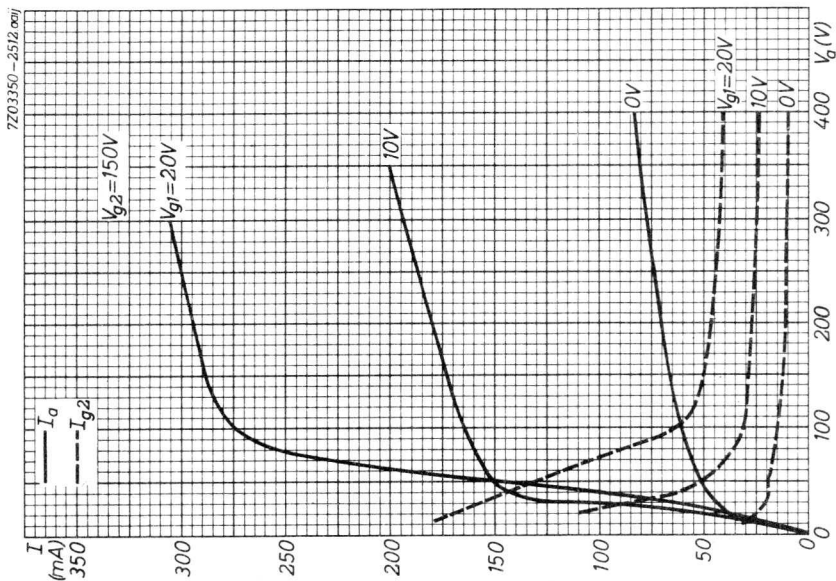

R.F. POWER PENTODE

QUICK REFERENCE DATA

Heater voltage	V_f	=	12.6 V
Amplification factor	$\mu_{g_2g_1}$	=	6.7
Mutual conductance	S	=	6 mA/V

HEATING: indirect by A.C. or D.C.; parallel supply

Cathode oxide coated

Heater voltage	V_f	=	12.6 V
Heater current	I_f	=	1.3 A

CAPACITANCES

Grid No. 1 to all other elements except anode	C_{g_1}	=	20.5 pF
Anode to all other elements except grid No. 1	C_a	=	12 pF
Anode to grid No. 1	C_{ag_1}	=	0.1 pF

TYPICAL CHARACTERISTICS

Anode voltage	V_a	=	1000 V
Grid No. 2 voltage	V_{g_2}	=	250 V
Anode current	I_a	=	40 mA
Amplification factor	$\mu_{g_2g_1}$	=	6.7
Mutual conductance	S	=	6 mA/V

TEMPERATURE LIMITS (Absolute limits)

Bulb temperature	=	max. 300 °C
Pin seal temperature	=	max. 180 °C




COOLING

Radiation and convection

MECHANICAL DATA

Base : Septar
 Socket : 2422 513 00001
 Net weight : 80 g

Dimensions in mm



Mounting position: any

LIMITING VALUES (Absolute limits)

Anode voltage without cathode current	V_{a_0}	= max.	3 kV
Anode voltage at $W_a = 45$ W	V_a	= max.	1 kV
Anode dissipation	W_a	= max.	45 W
Positive grid No. 3 voltage	V_{g_3}	= max.	200 V
Negative grid No. 3 voltage	$-V_{g_3}$	= max.	200 V
Grid No. 3 dissipation	W_{g_3}	= max.	1 W
Grid No. 3 circuit resistance	R_{g_3}	= max.	50 k Ω
Grid No. 2 voltage without cathode current	$V_{g_{20}}$	= max.	1 kV
Grid No. 2 voltage at $W_{g_2} = 7$ W	V_{g_2}	= max.	300 V
Grid No. 2 dissipation	W_{g_2}	= max.	7 W
Negative grid No. 1 voltage	$-V_{g_1}$	= max.	300 V
Grid No. 1 dissipation	W_{g_1}	= max.	0.5 W
Grid No. 1 circuit resistance	R_{g_1}	= max.	25 k Ω
Average cathode current	I_k	= max.	240 mA
Peak cathode current	I_{kp}	= max.	1.5 A
Cathode to heater voltage	V_{kf}	= max.	100 V
Heater voltage	V_f	= max.	13.9 V
		= min.	11.3 V

CHARACTERISTICS AND RANGE VALUES

Column I : Setting of the tube and typical (average) measuring results of new tubes

II : Characteristic range values for equipment design

III : Data indicating the end point of life

<u>Heater current</u>		I	II	III	
Heater voltage	V_f	= 12.6			V
Heater current	I_f	= 1.3	1.1-1.5	1.1-1.5	A
<u>Characteristics</u>					
Heater voltage	V_f	= 12.6			V
Anode voltage	V_a	= 100			V
Grid No.3 voltage	V_{g3}	= 0			V
Grid No.2 voltage	V_{g2}	= 250			V
Anode current	I_a	= 100			mA
Grid No.1 voltage	$-V_{g1}$	= 18	14 - 20	12 - 22	V
Grid No.2 current	I_{g2}	=	12 - 25	8 - 30	mA
Grid No.1 current	$-I_{g1}$	=		20	μ A
<u>Cut-off voltage</u>					
Heater voltage	V_f	= 12.6			V
Anode voltage	V_a	= 100			V
Grid No.3 voltage	V_{g3}	= 0			V
Grid No.2 voltage	V_{g2}	= 250			V
Anode current	I_a	= 0.2			mA
Cut-off voltage	$-V_{g1}$	=	<60	65	V
<u>Capacitances</u>					
Anode to all other elements except grid No.1	$C_{a(g1)}$	= 12	11 - 13		pF
Grid No.1 to all other elements except anode	$C_{g1(a)}$	= 20.5	19 - 22		pF
Anode to grid No.1	C_{ag1}	=	<0.22		pF

CHARACTERISTICS AND RANGE VALUES (continued)

Insulation between the electrodes

A leakage current of $10 \mu\text{A}$ is not exceeded when the following voltages, with polarity as indicated are applied to the indicated electrodes via a series resistor of $10 \text{ M}\Omega$

		I	II	III
Grid No. 1 (-) to grids No. 2 and 3 and anode (+)	$V_{g_1(-)/a, g_2, g_3(+)}$	= 1000		550
Grid No. 2 (+) to grid No. 3 (-)	$V_{g_2(+)/g_3(-)}$	= 1000		550
Anode (+) to grid No. 3 (-)	$V_{a(+)/g_3(-)}$	= 3000		1200
Cathode (+) to grid No. 1 (-)	$V_{k(+)/g_1(-)}$	= 200		150

LIFE EXPECTANCY

3000 hours under the following conditions:

Heater voltage	V_f	= 12.6	V
Anode voltage	V_a	= 100	V
Grid No. 3 voltage	V_{g_3}	= 0	V
Grid No. 2 voltage	V_{g_2}	= 250	V
Grid No. 1 voltage	V_{g_1}	= -20	V
Grid No. 1 pulse voltage (pulse substantially square)	$V_{g_{1p}}$	= 40	V
Pulse repetition frequency	f_{imp}	= 80	Hz
Pulse duration	T_{imp}	= 8	ms

AGEING

In order to detect "early failures" and to ensure that the tubes are properly stabilised, all tubes are aged prior to testing during 200 hours under the following conditions:

Heater voltage	V_f	= 12.6	V
Anode current	I_a	= 70	mA
Anode dissipation	W_a	= 20	W
Peak anode voltage	V_{ap}	= 515	V

STAND-BY PERFORMANCE ¹⁾

After 200 hours of operation with $V_f = 14$ V only, the tubes are criticised for Cathode interface resistance $>10 \Omega$ (continuous wave method IEC Publ. 151-9, two frequency method)

LIFE PERFORMANCE ¹⁾

After 3000 hours of operation under the following conditions

Heater voltage	V_f	=	12.6	V
Anode voltage	V_a	=	100	V
Grid No.3 voltage	V_{g3}	=	0	V
Grid No.2 voltage	V_{g2}	=	250	V
Grid No.1 voltage	V_{g1}	=	-20	V
Grid No.1 pulse voltage (pulse substantially square)	V_{g1p}	=	40	V
Pulse repetition frequency	f_{imp}	=	80	Hz
Pulse duration	T_{imp}	=	8	ms

the tubes are criticised for

Inoperatives

Control grid voltage for cut-off

Control grid current

Leakage current

} See section
"Characteristics and range values".



¹⁾ This test is performed on a sample taken from each production run.

VIBRATIONAL NOISE OUTPUT ¹⁾²⁾


Conditions:

Anode voltage	V_a	=	100	V
Grid No. 2 voltage	V_{g_2}	=	150	V
Grid No. 3 voltage	V_{g_3}	=	0	V
Anode current	I_a	=	10	mA
Vibrational acceleration		=	10	g
Duration	T	=	60	sec in each of the three directions
Frequency	f	=	25	Hz X₁, X₂ and Y
Anode load resistance	R_a	=	2	k Ω

Limit of the vibrational noise output $V_{noise} = \text{max. } 750 \text{ mV(RMS)}$ **FATIGUE** : 2.5 g ¹⁾²⁾Vibrational forces for a period of 32 hours at a frequency of 50 Hz in each of the three directions X₁, X₂ and Y**VIBRATION** : 5 g ¹⁾²⁾Vibrational forces for a period of 2 hours at a frequency of 25 Hz in each of the three directions X₁, X₂ and Y¹⁾ This test is performed on a sample taken from each production run.²⁾ These test conditions are only given for evaluation of the ruggedness of the tube and should by no means be interpreted as suitable operating conditions. Fatigue and vibration are destructive tests.

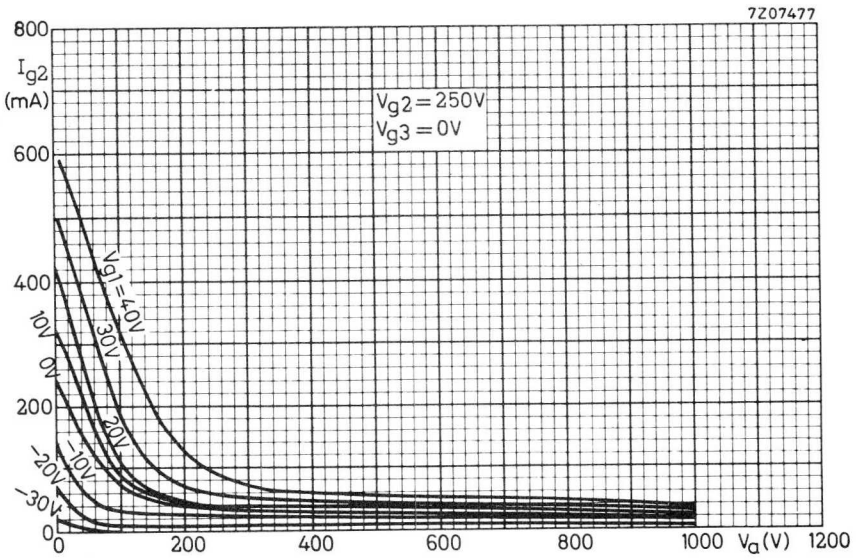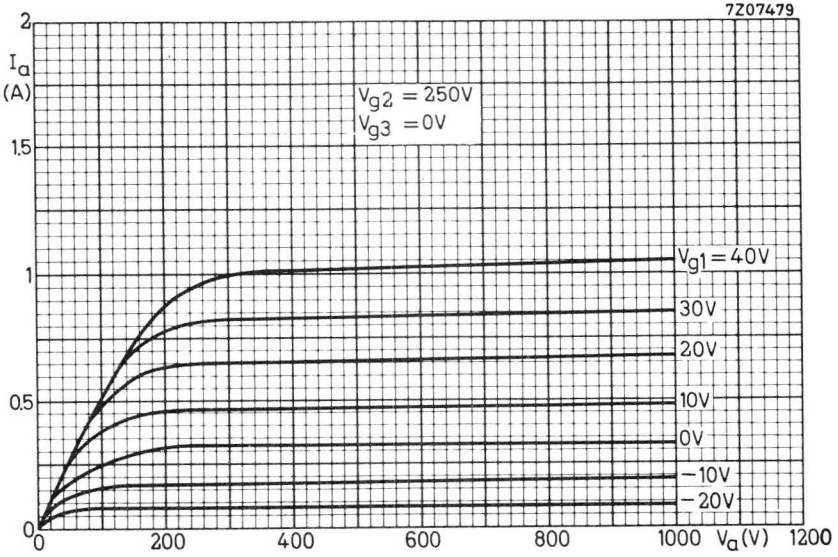

7Z07478

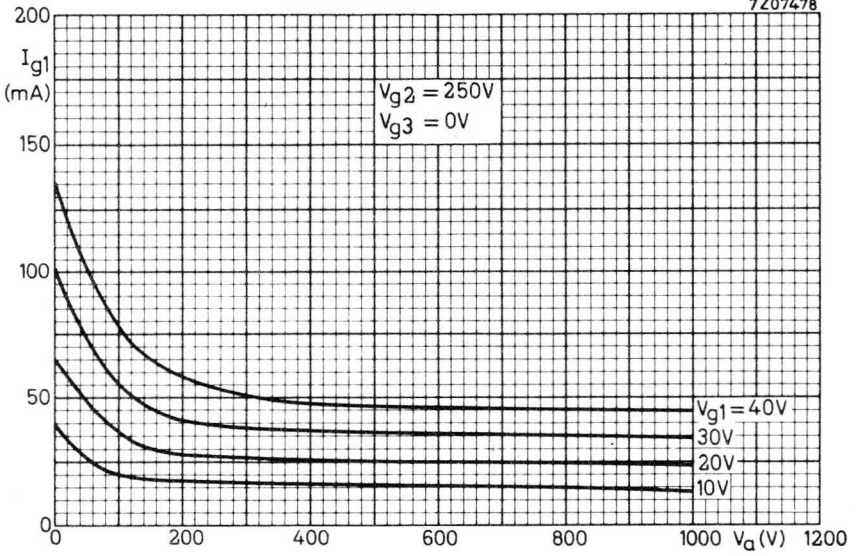



Available for equipment maintenance. No longer recommended for equipment production.

R.F. DOUBLE TETRODE

HEATING: indirect; oxide coated cathode.

Heater voltage	V_f	6,75	13,5 V
Heater current	I_f	720	360 mA
Pin connections		9-(4+5)	4-5

For further data and curves of this type
please refer to type QQE03/12



Available for equipment maintenance. No longer recommended for equipment production.

R.F. DOUBLE TETRODE

HEATING: indirect; oxide coated cathode

Heater voltage	V_f	6,75	13,5 V
Heater current	I_f	560	280 mA
Pin connections		9-(4 + 5)	4 - 5

For further data and curves of this type
please refer to type QQE02/5



Available for equipment maintenance. No longer recommended for equipment production.

R.F. DOUBLE TETRODE

Single-ended double tetrode, indirectly heated, with novar base. Designed for mobile service as class-C amplifier, oscillator or frequency multiplier up to 200 MHz. The tube is internally neutralized.

QUICK REFERENCE DATA

		R.F. class-C telegraphy or F.M. telephony	R.F. class-C ag ₂ modulator	R.F. class-C freq. tripler
		ICAS	ICAS	ICAS
Frequency	f	up to 200 MHz	up to 200 MHz	up to 200 MHz
Anode voltage	V _a max	450 V	360 V	450 V
Anode dissipation	W _a max	2 x 10 W	2 x 6,5 W	2 x 10 W
Frequency	f	175 MHz	175 MHz	58/174 MHz
Output power in load	W _l	30 W	19 W	10 W

HEATING: indirect by a.c. or d.c.; oxide coated cathode.

Heater voltage	V _f	6,75	13,5 V
Heater current	I _f	0,8	0,4 A
Pin connections		9-(4 + 5)	4 - 5

CAPACITANCES

Input capacitance, each unit	C _i	6,2 pF
Output capacitance, each unit	C _o	2,7 pF
Anode to grid 1, each unit	C _{ag1}	< 0,1 pF
Input capacitance, push-pull connection	C _i	5,1 pF
Output capacitance, push-pull connection	C _o	1,5 pF

TYPICAL CHARACTERISTICS

Anode current	I_a	=	30 mA
Amplification factor	$\mu_{g_2g_1}$	=	7.5
Mutual conductance	S	=	3.3 mA/V

TEMPERATURE LIMITS (Absolute limits)

Bulb temperature = max. 225 °C

Pin seal temperature = max. 120 °C



COOLING: radiation and convection

The use of a closed tube shield is not recommended

MECHANICAL DATA

Base : Novar

Net weight: 28,5 g

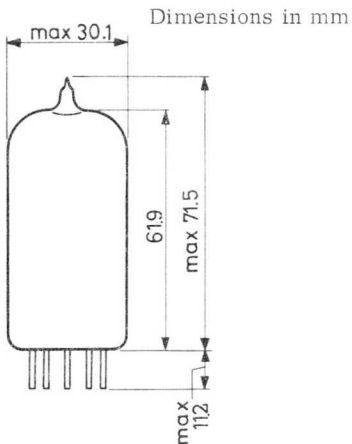

Mounting position: any

R.F. CLASS C TELEGRAPHY OR F.M. TELEPHONY

LIMITING VALUES (Each system; absolute limits)

Frequency	f	CCS		ICAS	
		up to 200	up to 200	up to 200	MHz
Anode voltage	V_a	= max. 400		max. 450	V
Anode current	I_a	= max. 45		max. 55	mA
Anode input power	W_{ia}	= max. 18		max. 25	W
Anode dissipation	W_a	= max. 7.5		max. 10	W
Grid No.2 voltage	V_{g2}	= max. 200		max. 200	V
Grid No.2 dissipation	W_{g2}	= max. 1		max. 1	W
Negative grid No.1 voltage	$-V_{g1}$	= max. 150		max. 150	V
Grid No.1 current	I_{g1}	= max. 3		max. 4	mA
Grid No.1 dissipation	W_{g1}	= max. 0.2		max. 0.2	W
Heater to cathode voltage	V_{kf}	= max. 100		max. 100	V

OPERATING CONDITIONS; two systems in push-pull

Frequency	f	CCS		ICAS	
		175	175	175	MHz
Anode voltage	V_a	= 400	400	450	V
Grid No.2 voltage	V_{g2}	= 180	190	190	V
Grid No.1 voltage	V_{g1}	= -50	-50	-50	V
Grid No.1 resistor	R_{g1}	= 31	28	26	k Ω
Anode current	I_a	= 2x45	2x55	2x55	mA
Grid No.2 current	$I_{g2+g2'}$	= 3.8	5.0	4.5	mA
Grid No.1 current	I_{g1}	= 2x0.8	2x0.9	2x0.95	mA
Grid No.2 dissipation	$W_{g2+g2'}$	= 0.68	0.95	0.85	W
Driving power	W_{dr}	= 1.0	1.1	1.2	W
Output power in the load	W_l	= 21	26.5	30	W
Overall efficiency	η	= 58	60	61	%

R.F. CLASS C ANODE AND SCREEN GRID MODULATION. Grid No.3 modulated by a tertiary winding with a number of turns equal to 44% of that of the anode winding.

LIMITING VALUES (Each system; absolute limits)

Frequency	f	CCS		ICAS	
		up to	200	up to	200 MHz
Anode voltage	V_a	= max.	320	max.	360 V
Anode current	I_a	= max.	37.5	max.	46 mA
Anode input power	W_{ia}	= max.	12	max.	16.5 W
Anode dissipation	W_a	= max.	5.0	max.	6.5 W
Grid No.2 voltage	V_{g2}	= max.	200	max.	200 V
Grid No.2 dissipation	W_{g2}	= max.	0.65	max.	0.65 W
Negative grid No.1 voltage	$-V_{g1}$	= max.	150	max.	150 V
Grid No.1 current	I_{g1}	= max.	3	max.	4 mA
Heater to cathode voltage	V_{kf}	= max.	100	max.	100 V

OPERATING CONDITIONS; two systems in push-pull

Frequency	f	CCS		ICAS	
					MHz
Anode voltage	V_a	=	320		360 V
Grid No.2 voltage	V_{g2}	=	140		160 V
Grid No.1 voltage	V_{g1}	=	-20		-25 V
Anode current	I_a	=	2x37.5		2x46 mA
Grid No.2 current	$I_{g2+g2'}$	=	5.0		6.0 mA
Grid No.1 current	I_{g1}	=	2x1.25		2x1.5 mA
Grid No.2 dissipation	$W_{g2+g2'}$	=	0.7		1.0 W
Driving power	W_{dr}	=	2.0		2.5 W
Output power in the load	W_{ℓ}	=	13.5		19 W 1)
Overall efficiency	η	=	56		57 %
Modulation depth	m	=	100		100 %
Modulation power	W_{mod}	=	12.5		17 W

1) Measured in a circuit having an efficiency of 80%.



R.F. CLASS C FREQUENCY TRIPLER

LIMITING VALUES (Each system; absolute limits)

Frequency	f	CCS		ICAS	
		up to	200	up to	200 MHz
Anode voltage	V_a	= max.	400	max.	450 V
Anode current	I_a	= max.	30	max.	44 mA
Anode input power	W_{ia}	= max.	11	max.	15 W
Anode dissipation	W_a	= max.	7.5	max.	10 W
Grid No.2 voltage	V_{g2}	= max.	200	max.	200 V
Grid No.2 dissipation	W_{g2}	= max.	1	max.	1 W
Negative grid No.1 voltage	$-V_{g1}$	= max.	150	max.	150 V
Grid No.1 current	I_{g1}	= max.	2	max.	3 mA
Heater to cathode voltage	V_{kf}	= max.	100	max.	100 V

OPERATING CONDITIONS ; two systems in push-pull

Frequency	f	ICAS	
		=	58/174 MHz
Anode voltage	V_a	=	350 V
Grid No.2 voltage	V_{g2}	=	165 V
Grid No.1 voltage	V_{g1}	=	-150 V
Grid No.1 resistor	R_{g1}	=	34 k Ω
Anode current	I_a	=	2x43 mA
Grid No.2 current	$I_{g2+g2'}$	=	5.0 mA
Grid No.1 current	I_{g1}	=	2x2.2 mA
Driving power	W_{dr}	=	2.0 W
Output power in the load	W_l	=	10 W
Overall efficiency	η	=	33 %

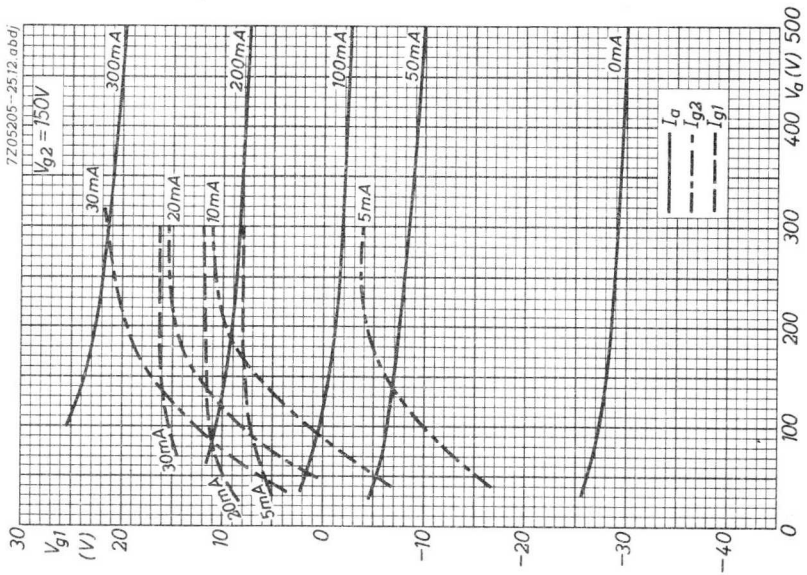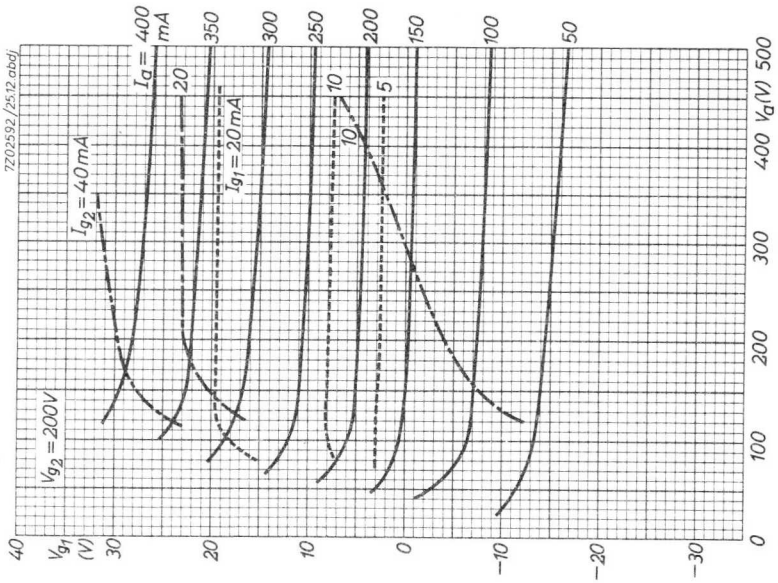



Available for equipment maintenance. No longer recommended for equipment production.

R.F.BEAM POWER TETRODE

Indirectly heated beam power tetrode designed for use as r.f. power amplifier, oscillator, frequency multiplier and a.f. amplifier or modulator for fixed or mobile equipment.

QUICK REFERENCE DATA

freq. MHz	R.F. class-C telegraphy		
	V_a V	W_o (W)	
		CCS	ICAS
75	550	52	58,5
	600		58,5
175	400	38	46
	450		
	500		
250	400		32

HEATING: indirect by a.c. or d.c.; oxide coated cathode.

Heater voltage	V_f	6,75	13,5 V
Heater current	I_f	1,2	0,6 A
Pin connections		3-(6+7)	6-7

CAPACITANCES

Grid 1 to all except anode	$C_{g1(a)}$	11,5 pF
Anode to all except grid 1	$C_{a(g1)}$	5 pF

TYPICAL CHARACTERISTICS

Anode current	I_a	80 mA
Amplification factor	μ_{g2g1}	8
Transconductance	S	7 mA/V

TEMPERATURE LIMITS (Absolute limits)

Bulb temperature = max. 250 °C
 Seal temperature = max. 230 °C

MECHANICAL DATA


Dimensions in mm

Base : Magnoval

The anode pin is brought out through the base separated from the magnoval pin circle for convenient under-chassis circuitry.

Socket : 40685

Net weight: 36 g

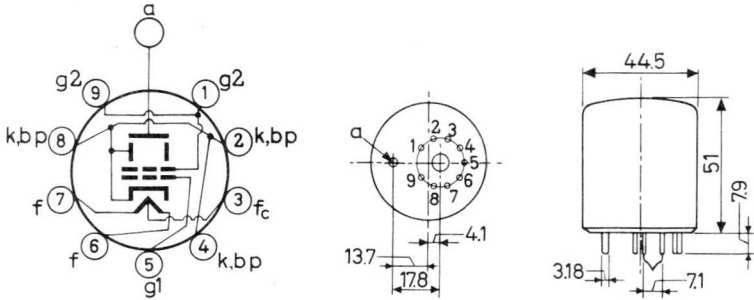

Mounting position: any

R.F. AMPLIFIER AND OSCILLATOR, CLASS C TELEGRAPHY

CCS Continuous service**LIMITING VALUES** (Absolute limits)

Frequency	f	up to 75	up to 175	MHz
Anode voltage	V_a	= max. 550	max. 450	V
Anode current	I_a	= max. 150	max. 150	mA
Anode input power	W_{ia}	= max. 75	max. 60	W
Anode dissipation	W_a	= max. 25	max. 25	W
Grid No.2 voltage	V_{g2}	= max. 300	max. 300	V
Grid No.2 input power	W_{ig2}	= max. 4	max. 4	W
Negative grid No.1 voltage	$-V_{g1}$	= max. 200	max. 200	V
Grid No.1 circuit resistance				
with fixed bias	R_{g1}	= max. 50	max. 50	k Ω
with automatic bias	R_{g1}	= max. 100	max. 100	k Ω
Cathode current	I_k	= max. 165	max. 165	mA
Heater to cathode voltage (any polarity)	V_{kf}	= max. 100	max. 100	V

OPERATING CONDITIONS **CCS** Continuous service

Frequency	f	= 75	175	175	MHz
Anode voltage	V_a	= 550	450	400	V
Grid No.2 voltage	V_{g2}	= 235	250	230	V
Grid No.1 voltage	V_{g1}	= -50	-55	-51	V
Grid No.1 resistor	R_{g1}	= 10	21	11	k Ω
Anode current	I_a	= 136	134	150	mA
Grid No.2 current	I_{g2}	= 11	11	10	mA
Grid No.1 current	I_{g1}	= 5.0	2.6	4.6	mA
Driving power	W_{dr}	= 0.5	1.5	1.5	W
Anode input power	W_{ia}	= 75	60	60	W
Output power in the load	W_ℓ	= 52	38	38	W
Overall efficiency	η	= 69	63.5	63.5	%

R.F. AMPLIFIER AND OSCILLATOR, CLASS C TELEGRAPHY


ICAS Intermittent service

LIMITING VALUES (Absolute limits)

Frequency	f	up to	75	175	250	MHz
Anode voltage	V_a	= max.	600	500	400	V
Anode current	I_a	= max.	150	150	150	mA
Anode input power	W_{ia}	= max.	90	75	60	W
Anode dissipation	W_a	= max.	30	30	30	W
Grid No.2 voltage	V_{g2}	= max.	300	300	300	V
Grid No.2 input power	W_{ig2}	= max.	4	4	4	W
Negative grid No.1 voltage	$-V_{g1}$	= max.	200	200	200	V
Grid No.1 circuit resistance						
with fixed bias	R_{g1}	= max.	50	50	50	k Ω
with automatic bias	R_{g1}	= max.	100	100	100	k Ω
Cathode current	I_k	= max.	165	165	165	mA
Heater to cathode voltage (any polarity)	V_{kf}	= max.	100	100	100	V

OPERATING CONDITIONS **ICAS** Intermittent service

Frequency	f	=	75	175	250	MHz
Anode voltage	V_a	=	600	500	400	V
Grid No.2 voltage	V_{g2}	=	255	225	235	V
Grid No.1 voltage	V_{g1}	=	-50	-55	-54	V
Grid No.1 resistor	R_{g1}	=	10	11	11	k Ω
Anode current	I_a	=	150	150	150	mA
Grid No.2 current	I_{g2}	=	10	10	4	mA
Grid No.1 current	I_{g1}	=	5.0	5.0	4.9	mA
Driving power	W_{dr}	=	0.7	1.5	2.0	W
Anode input power	W_{ia}	=	90	75	60	W
Output power in the load	W_ℓ	=	58.5	46	32	W
Overall efficiency	η	=	65	61.5	53.5	%

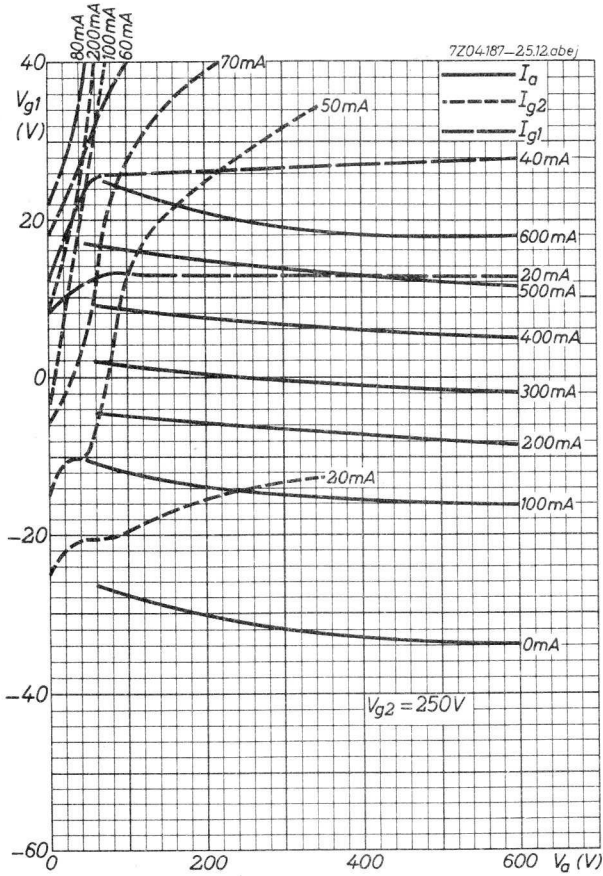

R.F. BEAM POWER TETRODE**HEATING:** indirect; cathode oxide coated

Heater voltage

 $V_f = 19 \text{ V}$

Heater current

 $I_f = 2.3 \text{ A}$

For further data and curves of this type
please refer to type QE08/200



AIR COOLED R.F. POWER TETRODE

Forced air cooled beam power tetrode in ceramic-metal construction intended for use in Class AB audio or R.F. amplifier service.

QUICK REFERENCE DATA				
Freq. (MHz)	S.S.B.		AB Mod.	
	V_a (V)	W_o (W)	V_a (V)	W_o (W) ¹⁾
30	2200	318		
A.F.			2200	770
			1000	190

HEATING: indirect; oxide coated cathode

Heater voltage	V_f	6.0	V
Heater current	I_f	3.2	A
Waiting time	T_w min.	30	s

CAPACITANCES

Grounded cathode

Grid No. 1 to all except anode	$C_{g1(a)}$	24.2	pF
Anode to all except grid No. 1	$C_{a(g1)}$	5.5	pF
Anode to grid No. 1	C_{ag1}	0.05	pF

Grounded grid

Input	$C_{kf(a)}$	19.9	pF
Output	$C_{a(kf)}$	5.5	pF
Anode to cathode	$C_{a/kf}$	0.01	pF

TYPICAL CHARACTERISTICS

Anode voltage	V_a	2200	V
Grid No. 2 voltage	V_{g2}	400	V
Anode current	I_a	150	mA
Transconductance	S	22	mA/V
Amplification factor	μ_{g2g1}	13	

TEMPERATURE LIMITS (Absolute max. rating system)

Temperature of all seals	t_s max.	250	°C
Temperature of anode core	t_a max.	250	°C

¹⁾ Two tubes

COOLING: Forced air

Above dissipation	Height above sea level	Inlet temperature	Min. required air flow	Pressure drop
W_a (W)	h (m)	t_i ($^{\circ}\text{C}$)	q min. ($\text{m}^3/\text{min.}$)	P_i (mm H_2O)
250	0	50	0.15	15.5
300	0	50	0.19	23
350	0	50	0.22	31
250	3000	50	0.22	22
300	3000	50	0.27	32
350	3000	50	0.34	48

ACCESSORIES

Air system socket

Johnson 124-110-1

Air system chimney


Johnson 124-111-1 or equivalent

MECHANICAL DATA

Dimensions in mm

Net weight: 120 g

Mounting position: any

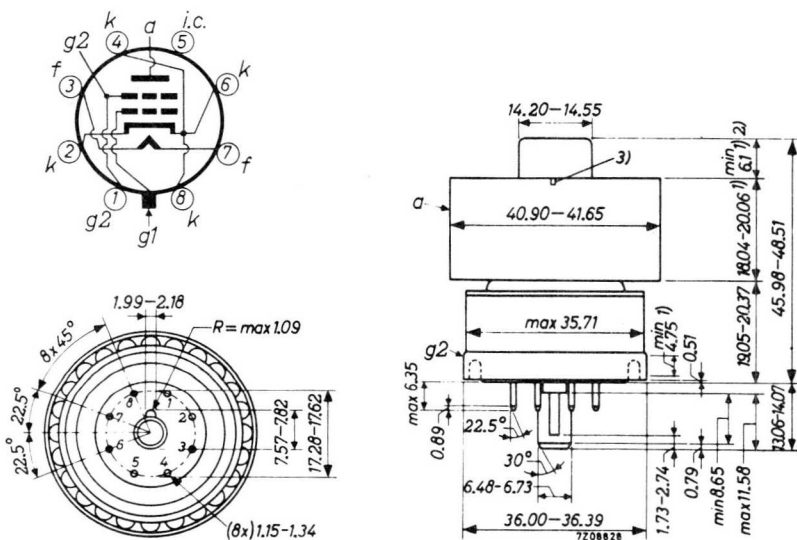

1) Contact surface

2) Use this contact surface for frequencies up to 30 MHz only

3) Index aligned with grid No. 1 guide lug

A.F. CLASS AB AMPLIFIER AND MODULATOR

LIMITING VALUES (Absolute max. rating system)

Anode voltage	V_a	max.	2500	V
Anode current	I_a	max.	300	mA
Anode dissipation	W_a	max.	350	W
Grid No. 2 voltage	V_{g2}	max.	400	V
Grid No. 2 dissipation	W_{g2}	max.	8	W
Grid No. 1 voltage	$-V_{g1}$	max.	250	V
Grid No. 1 current	I_{g1}	max.	2	mA
Cathode to heater voltage, peak	V_{kfp}	max.	150	V

OPERATING CONDITIONS two tubes in push-pull

Anode voltage	V_a	1000	1500	2200	V			
Grid No. 2 voltage	V_{g2}	400	400	400	V			
Grid No. 1 voltage	V_{g1}	-27	-27	-27	V ¹⁾			
Load resistance	R_{aa}	2600	5000	7800	Ω			
Driving voltage, peak	V_{g1p}	0	21	0	21	0	50	V
Anode current	I_a	2x100	2x260	2x100	2x265	2x100	2x290	mA
Grid No. 2 current	I_{g2}	-	2x -4	-	2x -5	-	2x -3	mA
Driving power	W_{dr}	-	0	-	0	-	0	
Anode input power	W_{ia}	2x100	2x260	2x150	2x400	2x220	2x640	W
Output power	W_o	0	190	0	400	0	770	W

¹⁾ To be adjusted for zero signal anode current.

R.F. SINGLE SIDE BAND AMPLIFIER

LIMITING VALUES (Absolute max. rating system)

Frequency	f	up to	175	MHz
Anode voltage	V_a	max.	2500	V
Anode current	I_a	max.	300	mA
Anode dissipation	W_a	max.	350	W
Grid No.2 voltage	V_{g2}	max.	400	V
Grid No.2 dissipation	W_{g2}	max.	8	W
Grid No.1 voltage	$-V_{g1}$	max.	250	V
Grid No.1 current	I_{g1}	max.	2	mA
Cathode to heater voltage, peak	V_{kfp}	max.	150	V

OPERATING CONDITIONS

Frequency	f	30	MHz
Anode voltage	V_a	2200	V
Grid No.2 voltage	V_{g2}	300	V
Grid No.1 voltage	V_{g1}	-20	V 1)
Load resistance	$R_{a\sim}$	6000	Ω


		zero signal	single tone	double tone	
Driving voltage, peak	V_{g1p}	0	18	18	V
Anode current	I_a	100	215	167	mA
Grid No.2 current	I_{g2}	-	-2.5	-6	mA
Grid No.1 current	I_{g1}	0	0	0	mA
Anode input power	W_{i_a}	220	473	430	W
Output power in the load	$W_l(PEP)$	0	318	318	W 2)
Intermodulation distortion of the 3 ^d order	d_3			29	dB 3)
of the 5 th order	d_5			30	dB 3)


1) To be adjusted for zero signal anode current.

2) Measured in a typical circuit having an efficiency of 85%.

3) Maximum values encountered at any level of drive voltage up to full drive referred to the amplitude of either of the two equal tones at that level.

7Z08830

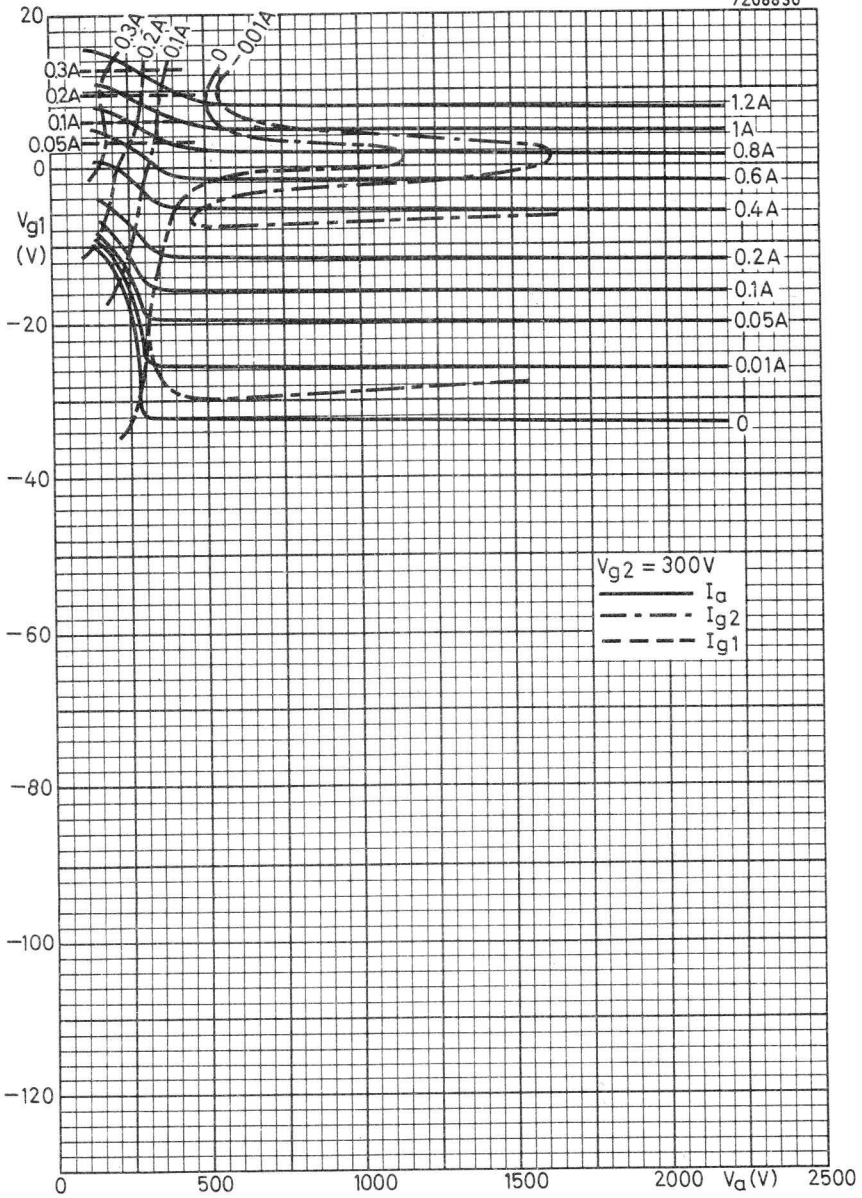

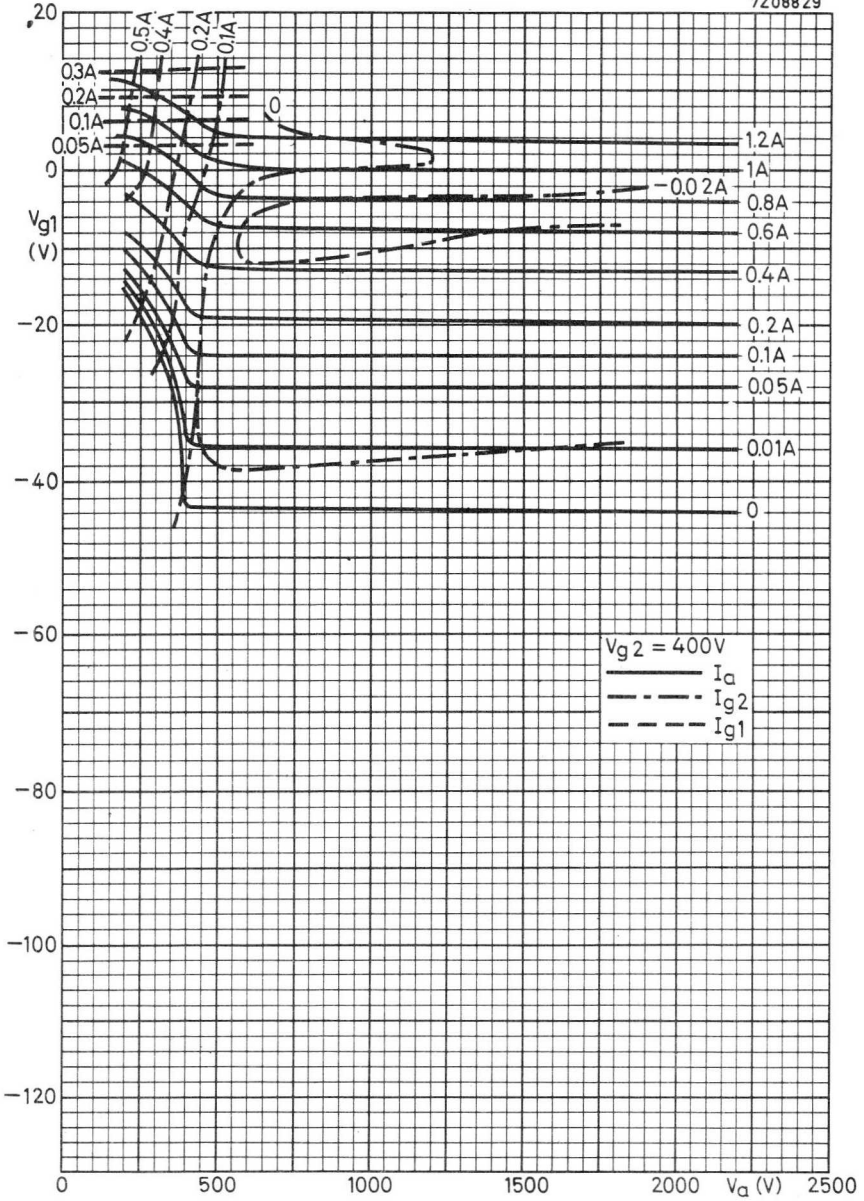

AIR COOLED R.F. POWER TETRODE

Forced air cooled beam power tetrode in ceramic-metal construction intended for use in Class AB audio or R.F. amplifier service.

HEATING: Indirect; oxide coated cathode

Heater voltage	V_f	26.5	V
Heater current	I_f	730	mA
Waiting time	T_w	min. 30	s

For further data please refer to type YL1340



Available for equipment maintenance. No longer recommended for equipment production.

R.F. DOUBLE TETRODE

HEATING: indirect; oxide coated cathode

Heater voltage

13,5 V

Heater current

280 mA

Pin connections

1 - 8

For further data and curves of this type
please refer to type QQE04/5





Available for equipment maintenance. No longer recommended for equipment production.

R.F. BEAM POWER TETRODE

R.F. beam power tetrode intended for use as r.f. power amplifier, oscillator, a.f. power amplifier and modulator in both mobile and fixed equipment.

QUICK REFERENCE DATA

R.F. class-C telegr.				R.F. class-C _{ag2} mod.			R.F. class-AB SSB			
freq. MHz	V _a V	W _O (W)		V _a V	W _O (W)		freq. MHz	V _a V	W _O P.E.P. (W)	
		CCS	ICAS		CCS	ICAS			CCS	ICAS
60	750		85	600		62	30	750		61
60	600	63		475	42		30	600	49	
175	400		40							
175	320	29								

A.F. class-AB *			A.F. class-AB **		
V _a V	W _O (W)		V _a V	W _O (W)	
	CCS	ICAS		CCS	ICAS
750		124	750		150
60	96		600	110	130
			500	100	

HEATING: indirect by a.c. or d.c.; oxide coated cathode

Heater voltage

V_f 6,3 V

Heater current

I_f 1125 mA

Cathode heating time

T_h min 60 s

See "Special performance data" for heater operation in stationary and mobile equipment.

* Two tubes without grid current.

** Two tubes with grid current.



CAPACITANCES

Grid No. 1 to all except anode	$C_{g1(a)}$	13.0 pF
Anode to all except grid No. 1	$C_{a(g1)}$	8.5 pF
Anode to grid No. 1	C_{ag1}	< 0.22 pF

TYPICAL CHARACTERISTICS

Anode voltage	V_a	200 V
Grid No. 2 voltage	V_{g2}	200 V
Anode current	I_a	100 mA
Transconductance	S	7 mA/V
Amplification factor	μ_{g2g1}	4.5 -



MECHANICAL DATA

Dimensions in mm

Base: octal 8 pin

Socket: 2422 501 03001

Net weight: 65 g



Mounting position: any

TEMPERATURE LIMIT (Absolute limit)

Bulb temperature t_{bulb} max. 260 °C

R.F. CLASS C TELEGRAPHY AND FM TELEPHONY

LIMITING VALUES (Absolute max. rating system)

(For maximum anode voltage and maximum anode input power at $f > 60$ MHz see page 18).

		C.C.S.	I.C.A.S.	
Frequency	f	up to 60		MHz
Anode voltage	V_a	max. 600	max. 750	V
Anode input power	W_{i_a}	max. 90	max. 120	W
Anode dissipation	W_a	max. 27	max. 35	W
Anode current	I_a	max. 175	max. 220	mA
Grid No.2 voltage	V_{g_2}	max. 250	max. 250	V
Grid No.2 dissipation	W_{g_2}	max. 3	max. 3	W
Grid No.1 voltage	$-V_{g_1}$	max. 150	max. 150	V
Grid No.1 current	I_{g_1}	max. 3.5	max. 4	mA
Cathode to heater voltage, peak	$V_{k_f p}$	max. 135	max. 135	V
Grid No.1 circuit resistance	R_{g_1}	max. 30	max. 30	$k\Omega$ ¹⁾

OPERATING CONDITIONS

		up to 60		MHz
Frequency	f			
Anode voltage	V_a	600	750	V
Grid No.2 voltage	V_{g_2}	200	200	V ²⁾
Grid No.1 voltage	V_{g_1}	-70	-77	V ³⁾
Grid No.1 resistor	R_{g_1}	24	28	$k\Omega$
Grid No.1 current	I_{g_1}	2.8	2.7	mA
Grid No.1 driving voltage	$V_{g_1 p}$	90	95	V
Driving power	W_{dr}	0.3	0.3	W
Anode current	I_a	150	160	mA
Grid No.2 current	I_{g_2}	10	10	mA
Anode input power	W_{i_a}	90	120	W
Anode dissipation	W_a	27	35	W
Output power	W_o	63	85	W
Efficiency	η	70	71	%

Notes see page 11

R.F. CLASS C TELEGRAPHY AND FM TELEPHONY

OPERATING CONDITIONS(continued)

Frequency	f	up to	175	MHz
Anode voltage	V_a	320	400	V
Grid No.2 voltage	V_{g2}	210	220	V ²⁾
Grid No.1 voltage	V_{g1}	-52	-55	V ³⁾
Grid No.1 resistor	R_{g1}	26	30	k Ω
Grid No.1 current	I_{g1}	2	1.9	mA
Grid No.1 driving voltage	V_{g1p}	65	67	V
Driving power	W_{dr}	2	2	W
Anode current	I_a	170	180	mA
Grid No.2 current	I_{g2}	12	12	mA
Anode input power	W_{i_a}	55	72	W
Anode dissipation	W_a	26	32	W
Output power	W_o	29	40	W
Efficiency	η	53	56	%

Notes see page 11

R.F. CLASS C ANODE AND SCREEN GRID MODULATION

LIMITING VALUES (Absolute max. rating system)

(For maximum anode voltage and maximum anode input power at $f > 60$ MHz see page 18)

		C.C.S.	I.C.A.S.
		up to 60	MHz
Frequency	f		
Anode voltage	V_a	max. 480	max. 600 V
Anode input power	W_{i_a}	max. 60	max. 85 W
Anode dissipation	W_a	max. 18	max. 23 W
Anode current	I_a	max. 145	max. 180 mA
Grid No.2 voltage	V_{g_2}	max. 250	max. 250 V
Grid No.2 dissipation	W_{g_2}	max. 2	max. 2 W
Grid No.1 voltage	$-V_{g_1}$	max. 150	max. 150 V
Grid No.1 current	I_{g_1}	max. 3.5	max. 4 mA
Cathode to heater voltage, peak	V_{kfp}	max. 135	max. 135 V
Grid No.1 circuit resistance	R_{g_1}	max. 30	max. 30 $k\Omega$ ¹⁾

OPERATING CONDITIONS

		C.C.S.	I.C.A.S.
		up to 60	MHz
Frequency	f		
Anode voltage	V_a	475	600 V
Grid No.2 voltage	V_{g_2}	165	175 V ⁴⁾
Grid No.1 voltage	V_{g_1}	-86	-92 V ³⁾
Grid No.1 resistor	R_{g_1}	26	27 $k\Omega$
Grid No.1 current	I_{g_1}	3.3	3.4 mA
Grid No.1 driving voltage	V_{g_1p}	106	114 V
Driving power	W_{dr}	0.4	0.5 W
Anode current	I_a	125	140 mA
Anode input power	W_{i_a}	60	84 W
Anode dissipation	W_a	18	22 W
Output power	W_o	42	62 W
Efficiency	η	70	74 %
Modulation factor	m	100	100 %
Modulation power	W_{mod}	25	37 W

Notes see page 11

R.F. CLASS AB LINEAR AMPLIFIER, SINGLE SIDE BAND, suppressed carrier
LIMITING VALUES (Absolute max. rating system)

		C.C.S.	I.C.A.S.	
Frequency	f	up to 30		MHz
Anode voltage	V_a	max. 600	max. 750	V
Anode input power	W_{i_a}	max. 90	max. 126	W
Anode dissipation	W_a	max. 27	max. 35	W
Anode current	I_a	max. 175	max. 220	mA
Grid No.2 voltage	V_{g_2}	max. 250	max. 250	V
Grid No.2 dissipation	W_{g_2}	max. 3	max. 3	W
Grid No.1 voltage	$-V_{g_1}$	max. 150	max. 150	V
Cathode to heater voltage, peak	V_{kf_p}	max. 135	max. 135	V
Grid No.1 circuit resistance (fixed bias)	R_{g_1}	max. 30	max. 30	k Ω

OPERATING CONDITIONS

		C.C.S.		
Frequency	f	30		
Anode voltage	V_a	600		
Grid No.2 voltage	V_{g_2}	200		
Grid No.1 voltage	V_{g_1}	-47		
		zero signal	single tone signal	double tone signal
Grid No.1 driving voltage	$V_{g_{1p}}$	0	47	47 V
Anode current	I_a	24	125	86 mA
Grid No.2 current	I_{g_2}		7.4	5 mA
Grid No.1 current	I_{g_1}	0	0	0 mA
Anode input power	W_{i_a}	14.4	75	51.5 W
Anode dissipation	W_a	14.4	26	27 W
Output power (PEP)	W_o	-	49	49 W
Efficiency	η	-	65.5	47.5 %
Intermodulation distortion of the 3rd order	d3			24.5 dB ⁶⁾
of the 5th order	d5			30 dB ⁶⁾

Notes see page 11

R.F. CLASS AB LINEAR AMPLIFIER, SINGLE SIDE BAND, suppressed carrier

OPERATING CONDITIONS (continued)

I.C.A.S.

		I.C.A.S.		
Frequency	f	30	MHz	
Anode voltage	V_a	750	V	
Grid No. 2 voltage	V_{g2}	200	V ⁵⁾	
Grid No. 1 voltage	V_{g1}	-48	V ⁵⁾	
		zero signal	single tone signal	double tone signal
Grid No. 1 driving voltage	V_{g1p}	0	48	48 V
Anode current	I_a	25	125	86 mA
Grid No. 2 current	I_{g2}		6.3	3.9 mA
Grid No. 1 current	I_{g1}	0	0	0 mA
Anode input power	W_{i_a}	18.8	94	64.5 W
Anode dissipation	W_a	18.8	33	34 W
Output power (PEP)	W_o	-	61	61 W
Efficiency	η	-	65	47 %
Intermodulation distortion of the 3rd order	d_3			26 dB ⁶⁾
of the 5th order	d_5			31 dB ⁶⁾

Notes see page 11

A.F. CLASS AB AMPLIFIER (without grid current)

LIMITING VALUES (Absolute max. rating system)

		C.C.S.	I.C.A.S.
Anode voltage	V_a	max. 600	max. 750 V
Anode dissipation	W_a	max. 27	max. 35 W
Anode current	I_a	max. 175	max. 220 mA
Grid No.2 voltage	V_{g2}	max. 250	max. 250 V
Grid No.2 dissipation	W_{g2}	max. 3	max. 3 W
Grid No.1 voltage	$-V_{g1}$	max. 150	max. 150 V
Grid No.1 current	I_{g1}	max. 0	max. 0 mA
Grid No.1 circuit resistance	R_{g1}	max. 100	max. 100 k Ω
Cathode to heater voltage, peak	V_{kfp}	max. 135	max. 135 V

OPERATING CONDITIONS two tubes in push-pull

		C.C.S.		I.C.A.S.	
Anode voltage	V_a	600		750 V	
Grid No.2 voltage	V_{g2}	200		200 V ⁷⁾	
Grid No.1 voltage	V_{g1}	-47		-48 V	
Load resistance	$R_{aa} \sim$	5600		7200 Ω	
Grid to grid voltage, peak	V_{g1g1p}	0	94	0	96 V
Anode current	I_a	2 x 24	2 x 125	2 x 25	2 x 125 mA
Grid No.2 current	I_{g2}	-	2 x 7.4	-	2 x 6.3 mA
Anode input power	W_{i_a}	2 x 14.4	2 x 75	2 x 19	2 x 94 W
Anode dissipation	W_a	2 x 14.4	2 x 27	2 x 19	2 x 32 W
Output power	W_o	0	96	0	124
Efficiency	η	-	64	-	66 %

Notes see page 11

A.F. CLASS AB AMPLIFIER (with grid current)

LIMITING VALUES (Absolute max. rating system)

		C.C.S.	I.C.A.S.
Anode voltage	V_a	max. 600	max. 750 V
Anode dissipation	W_a	max. 27	max. 35 W
Anode current	I_a	max. 175	max. 220 mA
Grid No.2 voltage	V_{g2}	max. 250	max. 250 V
Grid No.2 dissipation	W_{g2}	max. 3	max. 3 W
Grid No.1 voltage	$-V_{g1}$	max. 150	max. 150 V
Grid No.1 current	I_{g1}	max. 3.5	max. 4 mA
Grid No.1 circuit resistance	R_{g1}	max. 30	max. 30 $k\Omega^1$)
Cathode to heater voltage, peak	V_{kf_p}	max. 135	max. 135 V

OPERATING CONDITIONS, two tubes in push-pull

		C.C.S.			
Anode voltage	V_a	500	600	V	
Grid No.2 voltage	V_{g2}	200	200	V ⁷⁾	
Grid No.1 voltage	V_{g1}	-46	-48	V	
Load resistance	$R_{aa\sim}$	3620	5200	Ω	
Grid to grid voltage, peak	V_{g1g1p}	0	108	0	106 V
Anode current	I_a	2 x 25	2 x 154	2 x 20	2 x 135 mA
Grid No.2 current	I_{g2}	-	2 x 13	-	2 x 13.5 mA
Grid No.1 current	I_{g1}	0	2 x 1.35	0	2 x 0.65 mA
Driving power	W_{dr}	0	0.2	0	0.7 W
Anode input power	W_{i_a}	2 x 12.5	2 x 77	2 x 12	2 x 81 W
Anode dissipation	W_a	2 x 12.5	2 x 27	2 x 12	2 x 26 W
Output power	W_o	0	100	0	110 W
Efficiency	η	-	65	-	68 %

Notes see page 11

OPERATING CONDITIONS(continued)

I.C.A.S.

Anode voltage	V_a	600	750	V		
Grid No.2 voltage	V_{g2}	200	150	V		
Grid No.1 voltage	V_{g1}	-47	-39	V		
Load resistance	$R_{aa\sim}$	4160	6050	Ω		
Grid to grid voltage, peak	V_{g1g1p}	0	114	0	110	V
Anode current	I_a	2 x 25	2 x 164	2 x 20	2 x 147	mA
Grid No.2 current	I_{g2}	-	2 x 13	-	2 x 14	mA
Grid No.1 current	I_{g1}	0	2 x 1.7	0	2 x 3.8	mA
Driving power	W_{dr}	0	0.2	0	0.5	W
Anode input power	W_{i_a}	2 x 12	2 x 98	2 x 15	2 x 110	W
Anode dissipation	W_a	2 x 12	2 x 33	2 x 15	2 x 35	W
Output power	W_o	0	130	0	150	W
Efficiency	η	-	66	-	68	%

Notes pages 3 through 9

1. For operation at maximum ratings.
For operation at less than maximum ratings:
 $R_{g_1} = \text{max. } 100 \text{ k}\Omega$.
2. Obtained preferably from a separate source, or from the anode supply voltage with a voltage divider, or through a series resistor.
A series resistor should be used only when the tube is used in a circuit which is not keyed. Grid No.2 voltage must not exceed 435 V under key-up conditions.
3. V_{g_1} may be obtained from a separate supply, or from R_{g_1} or R_k , or by combination methods.
4. Obtained preferably from a separate source modulated with the anode supply, or from the anode supply through a series resistor.
5. Obtained from a separate source.
6. Maximum values encountered at any level of drive voltage up to full drive referred to the amplitude of either of the two equal tones at that level.
7. Obtained preferably from a separate source or from the anode voltage supply with a voltage divider.

SPECIAL PERFORMANCE DATA

Stationary equipment operation

	min.	nom.	max.		
Heater voltage	V_f	-	6.3	-	V ¹⁾
Heater current at $V_f = 6.3$ V	I_f	1050	-	1200	mA
Grid No.2 current	I_{g2}	-	-	15	mA ²⁾
Output power in load	W_ℓ	59	-	-	W ²⁾

Mobile equipment operation

	min.	design range	max.		
Heater voltage	V_f	-	6.0 to 7.5	-	V ³⁾
Heater current at $V_f = 6.75$ V	I_f	1100	-	1230	mA
Grid No.2 current	I_{g2}	-	-	15	mA ²⁾
Output power in load	W_ℓ	59	-	-	W ²⁾
Decrease output power in load	ΔW_ℓ	-	-	10	% ⁴⁾

Notes

- Recommended design centre heater voltage 6.3 V. To ensure long life the heater voltage should not fluctuate more than 10%.
- In a self-excited oscillator circuit and

Heater voltage	V_f	6.3	V
Anode voltage	V_a	600	V
Grid No.2 voltage	V_{g2}	200	V
Grid No.1 resistor	R_{g1}	24	k Ω $\pm 10\%$
Anode current	I_a	max. 150	mA
Grid No.1 current	I_{g1}	2.5 to 3	mA
Frequency	f	15	MHz
- Recommended heater voltage within the range V_f 6.0 to 7.5 V
 In battery operation within the range V_f 5.0 to 8.0 V
- With the conditions of note 2, reduce the heater voltage to 5.0 V. The decrease in output power $\Delta W_\ell = \text{max. } 10\%$.

Over voltage heater life tests

Continuous heater life tests are performed periodically on sample lots of tubes with 8 V on the heater, all electrodes floating.

Intermittent heater life tests are performed periodically on sample lots of tubes with 11 V on the heater, a cycle of 1 minute "on" and 4 minutes "off".

After 1000 h of continuous heater life test, and after 48 h of entermittent life test the following measurements are performed:

Cathode to heater leakage

at $V_f = 6.75$ V; $V_{kf} = \pm 100$ V

I_{kf} max. 100 μ A

Leakage resistance grid No. 1

at $V_f = 6.75$ V; $V_{g1} = -200$ V;

$V_a = V_{g2} = V_k = 0$ V



r_{ins} min. 10 $M\Omega$

Leakage resistance anode

at $V_f = 6.75$ V; $V_a = -200$ V

$V_{g2}, V_{g1}, V_k = 0$ V

r_{ins} min. 10 $M\Omega$

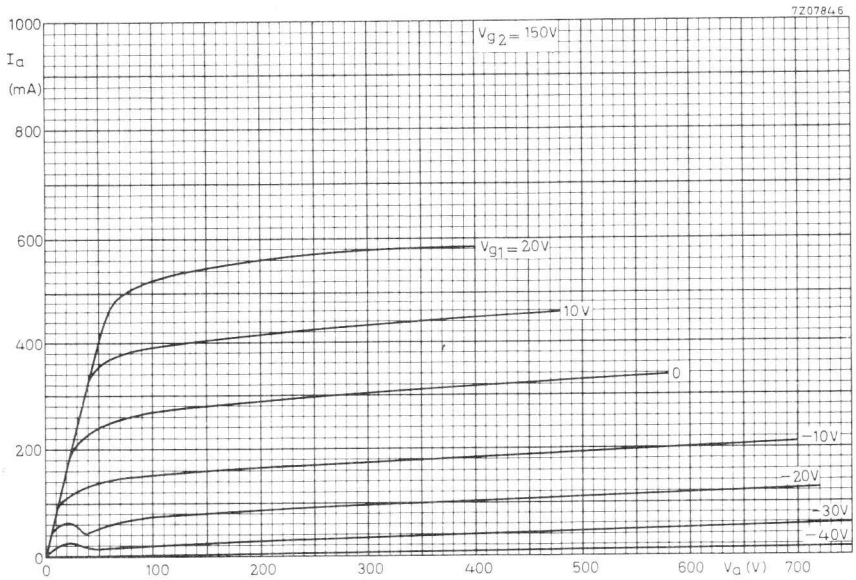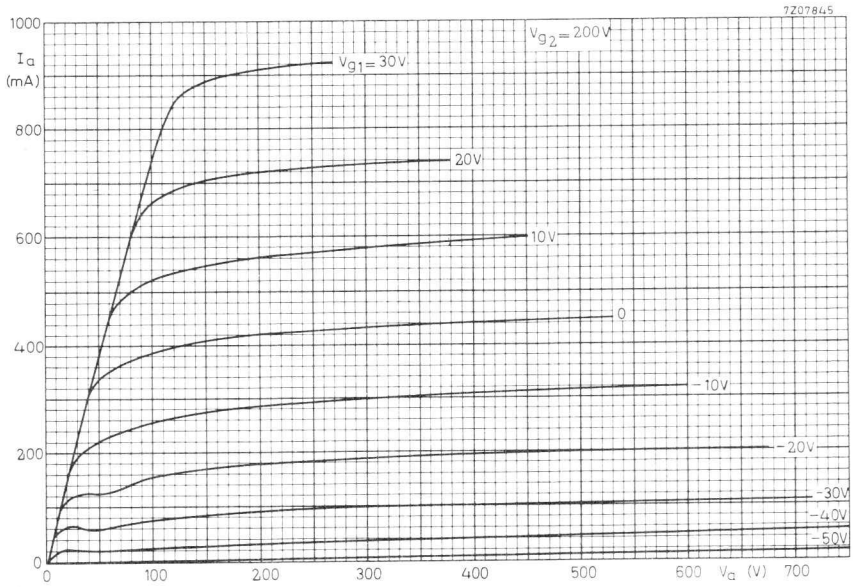



Available for equipment maintenance. No longer recommended for equipment production.

R.F. BEAM POWER TETRODE

R.F. beam power tetrode intended for use as r.f. power amplifier, oscillator, a.f. power amplifier and modulator in both mobile and fixed equipment.

HEATING: indirect by a.c. or d.c.; oxide coated cathode.

Heater voltage	V_f	12,6 V
Heater current	I_f	562 mA
Cathode heating time	T_h	min 60 s

CAPACITANCES

Grid 1 to all except anode	$C_{g1(a)}$	13 pF
Anode to all except grid 1	$C_{a(g1)}$	8,5 pF
Anode to grid 1	C_{ag1}	max 0,24 pF

SPECIAL PERFORMANCE DATA

STATIONARY EQUIPMENT OPERATION

	min	nom	max	
Heater voltage	—	12,6	—	V note 1
Heater current at $V_f = 12,6$ V	525	—	600	mA
Output power in load	59	—	—	W note 2

MOBILE EQUIPMENT OPERATION

	min	design range	max	
Heater voltage	—	12 to 15	—	V note 3
Heater current at $V_f = 13,5$ V	550	—	620	mA
Output power in load	59	—	—	W note 2
Decrease output power in load	ΔW_ℓ	—	10	% note 4

Notes see page 2.



NOTES

1. Recommended design centre heater voltage 12.6 V.
To ensure long life the heater voltage should not fluctuate more than 10%.
2. In a self-excited oscillator circuit and

Heater voltage	V_f	12.6	V
Anode voltage	V_a	600	V
Grid No.2 voltage	V_{g2}	200	V
Grid No.1 resistor	R_{g1}	24	$k\Omega \pm 10\%$
Anode current	I_a	max. 150	mA
Grid No.1 current	I_{g1}	2.5 to 3	mA
Frequency	f	15	MHz
3. Recommended heater voltage within the range 12.0 to 15.0 V.
In battery operation within the range 10 to 15 V.
4. With the conditions of note 2, reduce the heater voltage to 10 V. The decrease in output power $\Delta W_\ell = \text{max. } 10\%$.

Overvoltage life tests

Continuous heater life tests are performed periodically on sample lots of tubes with 16 V on the heater, all electrodes floating.

Intermittent heater life tests are performed periodically on sample lots of tubes with 22 V on the heater, a cycle of 1 minute "on" and 4 minutes "off".

After 1000 h of continuous heater life test, and after 48 h of intermittent life test the following measurements are performed:

Cathode to heater leakage I_{kf} max. 100 μA
 at $V_f = 13.5 \text{ V}; V_{kf} = \pm 100 \text{ V}$

Leakage resistance grid No.1 r_{ins} min. 10 $M\Omega$
 at $V_f = 13.5 \text{ V}; V_{g1} = -200 \text{ V}$
 $V_a = V_{g2} = V_k = 0 \text{ V}$

Leakage resistance anode r_{ins} min. 10 $M\Omega$
 at $V_f = 13.5 \text{ V}; V_a = -200 \text{ V}$
 $V_{g2} = V_{g1} = V_k = 0 \text{ V}$

 For further data and curves please refer to type YL1370



Available for equipment maintenance. No longer recommended for equipment production.

R.F. BEAM POWER TETRODE

R.F. beam power tetrode intended for use as r.f. power amplifier, oscillator, a.f. power amplifier and modulator in both mobile and fixed equipment.

HEATING: indirect by a.c. or d.c.; oxide coated cathode.

Heater voltage	V_f	26,5 V
Heater current	I_f	300 mA
Cathode heating time	T_h	min 60 s

CAPACITANCES

Grid 1 to all except anode	$C_{g1(a)}$	13 pF
Anode to all except grid 1	$C_{a(g1)}$	8,5 pF
Anode to grid 1	C_{ag1}	min 0,24 pF

SPECIAL PERFORMANCE DATA

STATIONARY EQUIPMENT OPERATION

	min	nom	max	
Heater voltage	—	26,5	—	V note 1
Heater current at $V_f = 26,5$ V	280	—	320	mA
Output power in load	59	—	—	W note 2

MOBILE EQUIPMENT OPERATION

	min	design range	max	
Heater voltage	—	24 to 29	—	V note 3
Heater current at $V_f = 26,5$ V	280	—	320	mA
Output power in load	59	—	—	W note 2
Decrease output power in load	—	—	10	% note 4

Notes see page 2.



NOTES

1. Recommended design centre heater voltage 26.5 V.
To ensure long life the heater voltage should not fluctuate more than 10%.
2. In a self excited oscillator circuit and

Heater voltage	V_f	26.5	V
Anode voltage	V_a	600	V
Grid No.2 voltage	V_{g2}	200	V
Grid No.1 resistor	R_{g1}	24	$k\Omega \pm 10\%$
Anode current	I_a	max. 150	mA
Grid No.1 current	I_{g1}	2.5 to 3	mA
Frequency	f	15	MHz
3. Recommended heater voltage within the range 24 to 29 V.
In battery operation within the range 21 to 31 V.
4. With the conditions of note 2, reduce the heater voltage to 10 V. The decrease in output power $\Delta W_f = \text{max. } 10\%$.

Overvoltage life tests

Continuous heater life tests are performed periodically on sample lots of tubes with 31 V on the heater, all electrodes floating.

Intermittent heater life tests are performed periodically on sample lots of tubes with 43 V on the heater, a cycle of 1 minute "on" and 4 minutes "off".

After 1000 h of continuous heater life test, and after 48 h of intermittent life test the following measurements are performed:

Cathode to heater leakage I_{kf} max. 150 μ A
 at $V_f = 26.5$ V; $V_{kf} = \pm 100$ V

Leakage resistance grid No.1 r_{ins} min. 10 $M\Omega$
 at $V_f = 26.5$ V; $V_{g1} = -200$ V
 $V_a = V_{g2} = V_k = 0$ V

Leakage resistance anode r_{ins} min. 10 $M\Omega$
 at $V_f = 26.5$ V; $V_a = -200$ V
 $V_{g2} = V_{g1} = V_k = 0$ V

 For further data and curves please refer to type YL1370

AIR COOLED V.H.F. POWER TETRODE

Forced air cooled coaxial power tetrode in metal-ceramic construction primarily intended for use as a linear broad-band amplifier in T V transmitters in the bands I and III. This type is also very suitable for A.M. and F.M. broadcast, A.F. modulator applications and in T V transposer service.

QUICK REFERENCE DATA			
Class AB linear amplifier (vision)			
Frequency	f	175, 25	MHz
Anode voltage	V_a	5	kV
Output power in load	W_ℓ	8, 6	kW
Power gain	G	24	
Class B amplifier			
Frequency	f	260	MHz
Anode voltage	V_a	7	kV
Output power in load	W_ℓ	10, 5	kW
Power gain	G	32	
R.F. Class C telegraphy or F.M. telephony			
Frequency	f	260	MHz
Anode voltage	V_a	7	kV
Output power in load	W_ℓ	11	kW
Power gain	G	32	
TV transposer service			
Frequency	f	175 to 225	MHz
Anode voltage	V_a	4	kV
Output power in load	W	2, 5	kW
Power gain	G	30	

HEATING: direct; filament thoriated tungsten, mesh type

Filament voltage	V_f	6, 3	V
Filament current	I_f	120	A
Filament peak starting current	I_{fp}	max. 750	A
Cold filament resistance	R_{f0}	6	$m\Omega$
Waiting time	T_w	min. 1	s

The filament is designed to accept temporary fluctuations of $\pm 5\%$.

TYPICAL CHARACTERISTICS

Anode voltage	V_a	5	kV
Grid no. 2 voltage	V_{g2}	600	V
Anode current	I_a	1, 45	A
Transconductance	S	30	mA/V
Amplification factor	μ_{g2g1}	7, 5	

CAPACITANCES

	(grounded cathode)		(grounded grid)	
Input	$C_{g1(a)}$	90	$C_{f(a)}$	48 pF
Output	$C_{a(g1)}$	16	$C_{a(f)}$	16, 4 pF
Anode to grid no. 1	C_{ag1}	0, 55		pF
Anode to filament			C_{af}	0, 15 pF

TEMPERATURE LIMITS

Absolute max. envelope temperature	t_{env}	max.	240	°C
Recommended max. seal temperature	t	max.	200	°C

COOLING

See curves
 Direction of air flow: see drawing.

→ To obtain optimum life the temperature of the seals and of the envelope should be kept below 200 °C.

ACCESSORIES


Band I amplifier circuit assembly (vision)	type 40757
Band I amplifier circuit assembly (sound)	type 40758
Band III amplifier circuit assembly (vision)	type 40745
Band III amplifier circuit assembly (sound)	type 40746

MECHANICAL DATA

Dimensions in mm

Net weight: approx. 3,1 kg

Mounting position: Vertical with anode up or down.

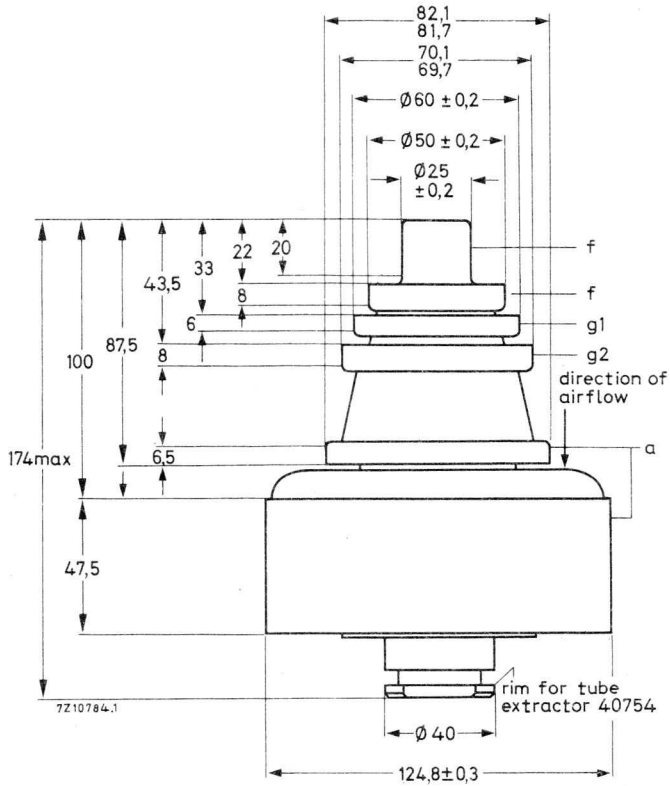

R.F. CLASS B SERVICE

Unless otherwise stated the voltages are specified with respect to cathode

LIMITING VALUES (Absolute max. rating system)

Frequency	f	up to	260	MHz
Anode voltage	V_a	max.	8,5	kV
Grid no.2 voltage	V_{g2}	max.	1	kV
Grid no.1 voltage	$-V_{g1}$	max.	500	V
Anode current	I_a	max.	4	A
Anode input power	W_{ia}	max.	18,5	kW
Anode dissipation	W_a	max.	6	kW
Grid no.2 dissipation	W_{g2}	max.	80	W
Grid no.1 dissipation	W_{g1}	max.	40	W
Cathode current	I_k	max.	4,5	A

OPERATING CONDITIONS : grounded grid

Frequency	f	up to	260	MHz
Anode voltage	V_a		7	kV
Grid no.2 voltage	V_{g2}		600	V
Grid no.1 voltage	V_{g1}		-120	V ¹⁾
Anode current, no signal condition	I_a		0,2	A
Anode current	I_a		2,2	A
Grid no.2 current	I_{g2}		80	mA
Grid no.1 current	I_{g1}		125	mA
Anode input power	W_{ia}		15,4	kW
Anode dissipation	W_a		4,3	kW
Output power in load	W_l		10,5	kW
Efficiency, total	η		68	%
Driving power	W_{dr}		325	W
Power gain	$\frac{W_l}{W_{dr}}$		32	

Note see page 8

OPERATING CONDITIONS (continued)

Frequency of vision carrier	f	83, 25	55, 25	MHz
Bandwidth (-1 dB)	B	7	7	MHz 2)
Anode voltage	V _a	4	4	kV
Grid no. 2 voltage	V _{g2}	600	600	V
Grid no. 1 voltage	V _{g1}	-65	-65	V 1)
Anode current, no signal condition	I _a	750	750	mA
Anode current, black	I _{ab1}	2, 1	2, 3	A 3)
Grid no. 2 current, black	I _{g2b1}	45	45	mA 3)
Grid no. 1 current, black	I _{g1b1}	75	85	mA 3)
Output power in load, sync	W _{ℓ sync}	6, 25	6, 25	kW
black	W _{ℓ black}	3, 75	3, 75	kW
Driving power, sync	W _{dr sync}	340	385	W
black	W _{dr black}	180	210	W
Gain, sync	G sync	18, 5	16	2)
black	G black	21, 5	18	2)
Sync compression	sync in/out	30/25	29/25	4)
Differential phase		< 3	< 3	o 5)
Differential gain		≥ 85	≥ 85	% 5)
Anode resistance	R _{a~}	810	690	Ω 2)

R.F. CLASS AB AMPLIFIER FOR TELEVISION TRANSPOSER SERVICE, grounded grid

LIMITING VALUES

see page 5

OPERATING CONDITIONS , grounded grid

Negative modulation, positive synchronization, combined sound and vision (CCIR standard G)

Frequency	f	175 to 225	MHz
Bandwidth (-1 dB)	B	8	MHz
Anode voltage	V _a	4	kV
Grid no. 2 voltage	V _{g2}	700	V
Grid no. 1 voltage 1)	V _{g1}	-65	V
Anode current, no signal condition	I _a	1	A
Anode current 6)	I _a	1, 65	A
Grid no. 2 current 6)	I _{g2}	25	mA
Grid no. 1 current 6)	I _{g1}	10	mA
Driving power, sync	W _{dr}	85	W
Output power in load, sync	W _ℓ	2, 5	kW
Power gain	G	30	-
Intermodulation products 7)	d	-52	dB

Notes: see page 8

R.F. CLASS C TELEGRAPHY or F.M. TELEPHONY

LIMITING VALUES (Absolute max. rating system)

Frequency	f	up to	260	MHz
Anode voltage	V_a	max.	8,5	kV
Grid no. 2 voltage	V_{g2}	max.	1	kV
Grid no. 1 voltage	$-V_{g1}$	max.	500	V
Anode current	I_a	max.	4	A
Anode input power	W_{ia}	max.	18,5	kW
Anode dissipation	W_a	max.	6	kW
Grid no. 2 dissipation	W_{g2}	max.	80	W
Grid no. 1 dissipation	W_{g1}	max.	40	W
Cathode current	I_k	max.	4,5	A


OPERATING CONDITIONS





Frequency	f	260	MHz
Anode voltage	V_a	7	kV
Grid no. 2 voltage	V_{g2}	600	V
Grid no. 1 voltage	V_{g1}	-120	V ¹⁾
Anode current, no signal condition	I_a	200	mA
Anode current	I_a	2,3	A
Grid no. 2 current	I_{g2}	80	mA
Grid no. 1 current	I_{g1}	150	mA
Anode input power	W_{ia}	16,1	kW
Anode dissipation	W_a	5	kW
Output power in load	W_ℓ	11	kW
Efficiency, total	η	68	%
Driving power	W_{dr}	325	W
Power gain	$\frac{W_\ell}{W_{dr}}$	32	


¹⁾ See page 8

NOTES

- 1) To be adjusted for the stated no signal anode current.
- 2) With double tuned circuit.
- 3) Black signal including line sync pulses
- 4) A picture/sync ratio of 75/25 for the outgoing signal requires a ratio of max. 70/30 for the incoming signal in which case the sync compression sync in/out = 30/25.
- 5) Measured with a saw tooth amplitude, running from 17% to 75% of the peak sync value, with superimposed a 4,43 MHz sine wave with a 10% peak to peak value.
- 6) At c.w. output power = 2,5 kW
- 7) Three-tone test method (vision carrier -8 dB, sound carrier -7 dB, sideband signal -17 dB with respect to peak sync = 0 dB).

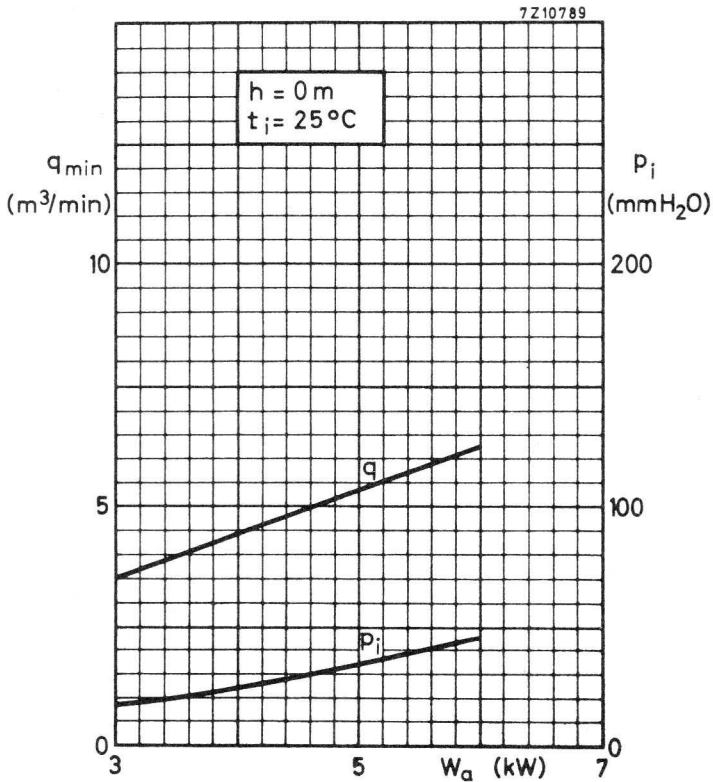


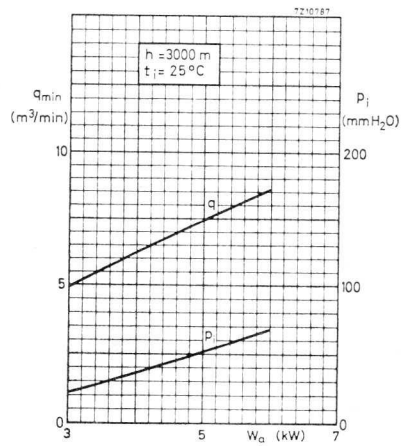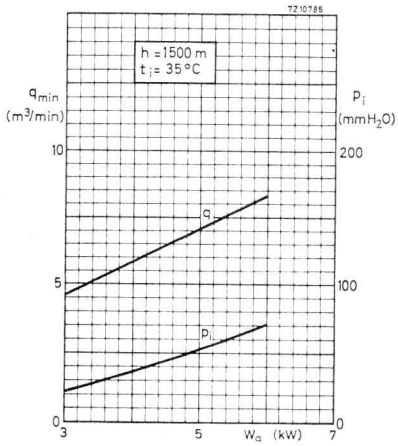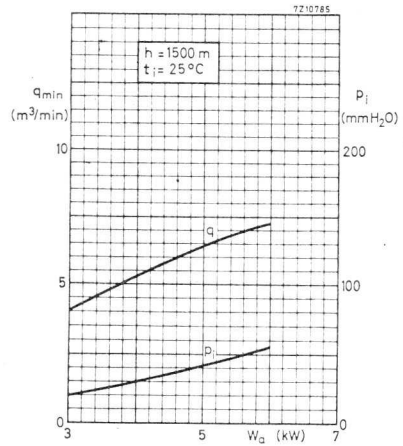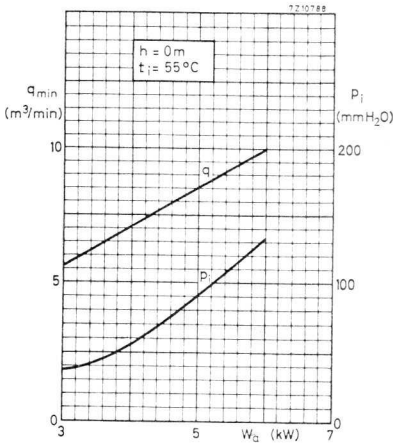


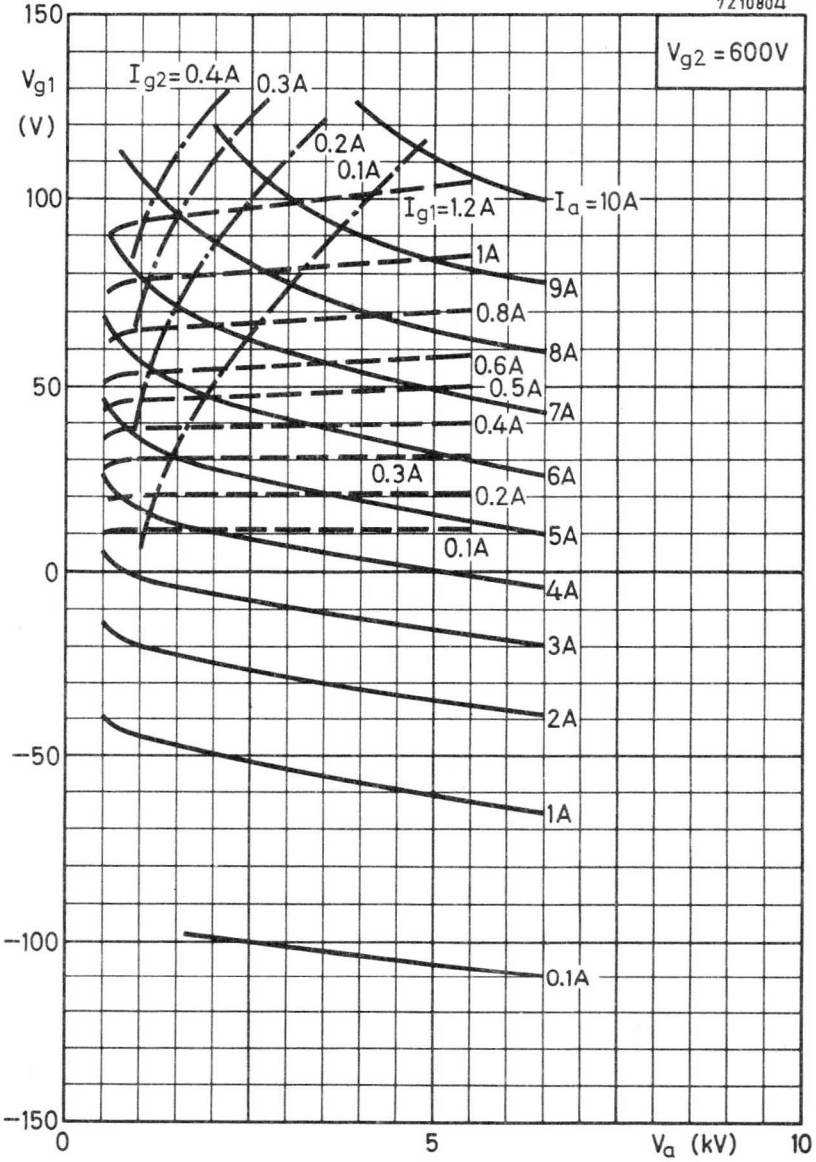

7Z10805

$V_{g2} = 700V$

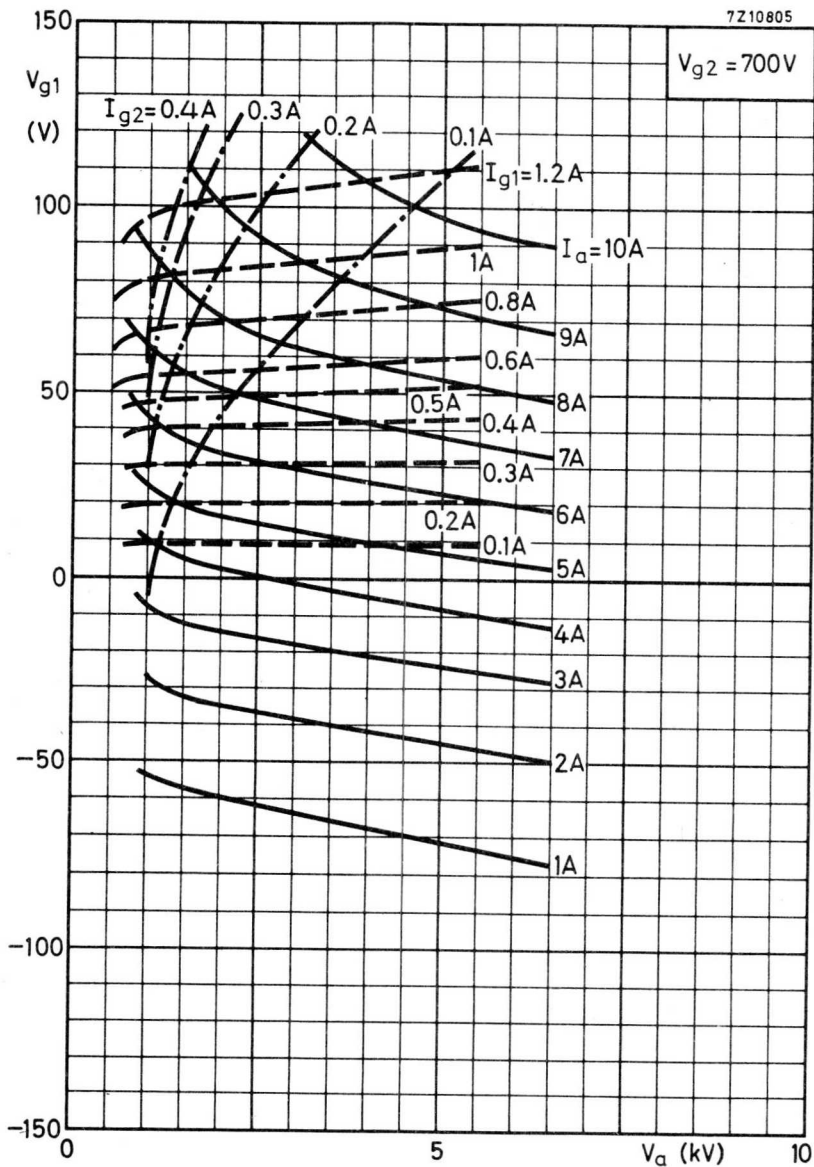

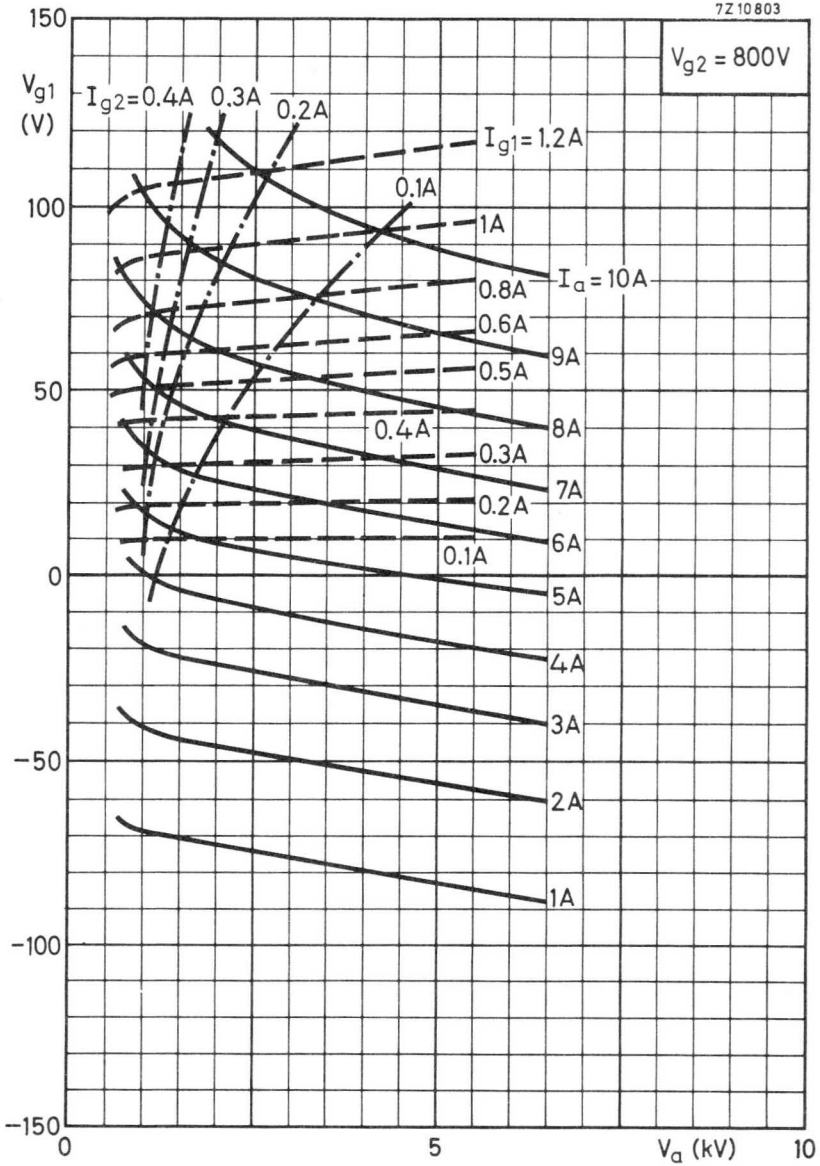

AIR COOLED V.H.F. POWER TETRODE

Forced air cooled coaxial power tetrode in metal-ceramic construction primarily intended for use as a linear broad-band amplifier in T V transmitters in the bands I and III. This type is also very suitable for A.M. and F.M broadcast, A.F. modulator applications, and in T V transposer service.

QUICK REFERENCE DATA			
Frequency	f	175, 25	MHz
Anode voltage	V_a	7	kV
Output power in load	W_ℓ	18, 4	kW
Power gain	G	25	
Class B amplifier			
Frequency	f	260	MHz
Anode voltage	V_a	7, 5	kV
Output power in load	W_ℓ	13	kW
Power gain	G	32, 5	
R.F. Class C telegraphy or F.M. telephony			
Frequency	f	260	MHz
Anode voltage	V_a	8	kV
Output power in load	W_ℓ	18	kW
Power gain	G	30	
TV transposer service			
Frequency	f	175 to 225	MHz
Anode voltage	V_a	6	kV
Output power in load	W_ℓ	7	kW
Power gain	G	32	

HEATING : direct; filament thoriated tungsten, mesh type.

Filament voltage	V_f	8	V
Filament current	I_f	120	A
Filament peak starting current	I_{fp}	max. 750	A
Cold filament starting current	R_{fo}	7, 5	m Ω
Waiting time	T_w	min. 1	s

The filament is designed to accept temporary fluctuations of $\pm 5\%$.

TYPICAL CHARACTERISTICS

Anode voltage	V_a	6	kV
Grid no. 2 voltage	V_{g2}	650	V
Anode current	I_a	2, 4	A
Transconductance	S	45	mA/V
Amplification factor	μ_{g2g1}	8, 5	

CAPACITANCES

	grounded cathode		grounded grid	
Input	$C_{g1(a)}$	110	$C_{f(a)}$	55 pF
Output	$C_{a(g1)}$	17, 5	$C_{a(f)}$	18 pF
Anode to grid no. 1	C_{ag1}	0, 7		pF
Anode to filament			C_{af}	0, 2 pF

TEMPERATURE LIMITS

Absolute max. envelope temperature	t_{env}	max.	240	$^{\circ}C$
Recommended max. seal temperature	t	max.	200	$^{\circ}C$

COOLING

See curves.

Direction of air flow: see drawing.

→ To obtain optimum life the temperature of the seals and of the envelope should be kept below 200 $^{\circ}C$.

ACCESSORIES


Band I amplifier circuit assembly (vision)	type 40759
Band II amplifier circuit assembly (sound)	type 40760
Band III amplifier circuit assembly (vision)	type 40747
Band III amplifier circuit assembly (sound)	type 40748

MECHANICAL DATA

Dimensions in mm

Net weight: approx. 11 kg

Mounting position: vertical with anode up or down

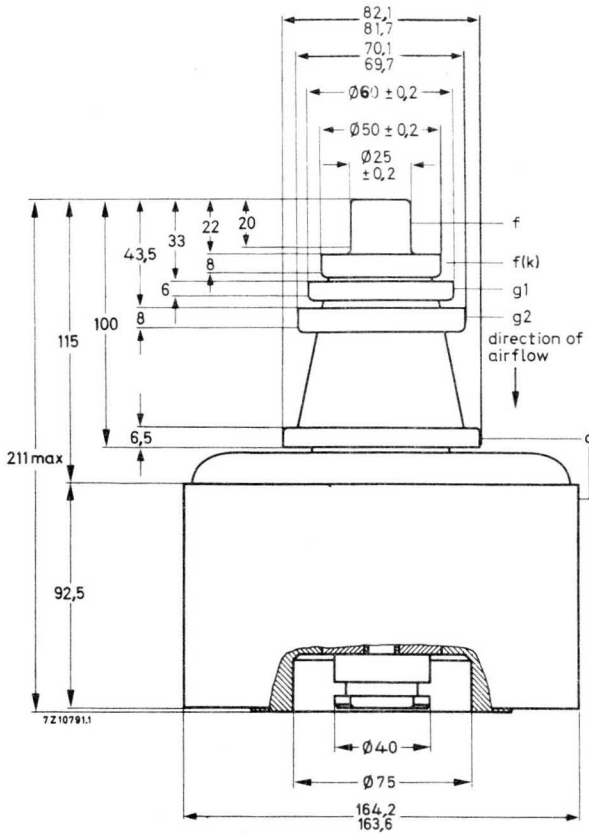

R.F. CLASS B SERVICE

Unless otherwise stated the voltages are specified with respect to cathode

LIMITING VALUES (Absolute max. rating system)

Frequency	f	up to	260	MHz
Anode voltage	V_a	max.	9	kV
Grid no. 2 voltage	V_{g2}	max.	1	kV
Grid no. 1 voltage	$-V_{g1}$	max.	500	V
Anode current	I_a	max.	5	A
Anode input power	W_{ia}	max.	24	kW
Anode dissipation	W_a	max.	12	kW
Grid no. 2 dissipation	W_{g2}	max.	100	W
Grid no. 1 dissipation	W_{g1}	max.	50	W
Cathode current	I_k	max.	6	A

OPERATING CONDITIONS , grounded grid

Frequency	f	up to	260	MHz
Anode voltage	V_a		7,5	kV
Grid no. 2 voltage	V_{g2}		650	V
Grid no. 1 voltage	V_{g1}		-125	V ¹⁾
Anode current, no signal condition	I_a		0,1	A
Anode current	I_a		2,5	A
Grid no. 2 current	I_{g2}		80	mA
Grid no. 1 current	I_{g1}		90	mA
Anode input power	W_{ia}		18,75	kW
Anode dissipation	W_a		5	kW
Output power in load	W_l		13	kW
Efficiency, total	η		69,3	%
Driving power	W_{dr}		400	W
Power gain	$\frac{W_l}{W_{dr}}$		32,5	

Note see page 9

R.F. CLASS AB AMPLIFIER FOR TELEVISION TRANSPOSER SERVICE , grounded grid

LIMITING VALUES

See page 5

OPERATING CONDITIONS , grounded grid

Negative modulation, positive synchronization, combined sound and vision
(CCIR standard G)

Frequency		f	175 to 225	MHz
Bandwidth (-1 dB)		B	8	MHz
Anode voltage		V_a	6	kV
Grid no. 2 voltage		V_{g2}	800	V
Grid no. 1 voltage	1)	V_{g1}	-80	V
Anode current, no signal condition		I_a	1,2	A
Anode current	6)	I_a	2,5	A
Grid no. 2 current	6)	I_{g2}	30	mA
Grid no. 1 current	6)	i_{g1}	50	mA
Driving power, sync		W_{dr}	220	W
Output power in load, sync		W_f	7	kW
Power gain		G	32	
Intermodulation products	7)	d	-52	dB

Notes: see page 9

R.F. CLASS C TELEGRAPHY or F.M. TELEPHONY

LIMITING VALUES (Absolute max. rating system)

Frequency	f	up to	260	MHz
Anode voltage	V_a	max.	9,5	kV
Grid no. 2 voltage	V_{g2}	max.	1	kV
Grid no. 1 voltage	$-V_{g1}$	max.	500	V
Anode current	I_a	max.	5	A
Anode input power	W_{ia}	max.	30	kW
Anode dissipation	W_a	max.	12	kW
Grid no. 2 dissipation	W_{g2}	max.	100	W
Grid no. 1 dissipation	W_{g1}	max.	50	W
Cathode current	I_k	max.	6	A


OPERATING CONDITIONS





Frequency	f	260	MHz
Anode voltage	V_a	8	kV
Grid no. 2 voltage	V_{g2}	700	V
Grid no. 1 voltage	V_{g1}	-115	V ¹⁾
Anode current, no signal condition	I_a	300	mA
Anode current	I_a	3,5	A
Grid no. 2 current	I_{g2}	100	mA
Grid no. 1 current	I_{g1}	300	mA
Anode input power	W_{ia}	20	kW
Anode dissipation	W_a	10	kW
Output power in load	W_f	18	kW
Efficiency, total	η	64,3	%
Driving power	W_{dr}	600	W
Power gain	$\frac{W_f}{W_{dr}}$	30	


¹⁾ see page 9


NOTES


- 1) To be adjusted for the stated no signal anode current.
- 2) With double tuned circuit.
- 3) Black signal including line sync pulses.
- 4) A picture/sync ratio of 72/25 for the outgoing signal requires a ratio of max. 70/30 for the incoming signal in which case the sync compression sync in/out = 30/25.
- 5) Measured with a saw tooth amplitude, running from 17% to 75% of the peak sync value, with superimposed a 4,43 MHz sine wave with a 10% peak to peak value.
- 6) At c.w. output power = 7 kW
- 7) Three-tone test method (vision carrier -8 dB, sound carrier -7 dB, sideband signal -17 dB with respect to peak sync = 0 dB).

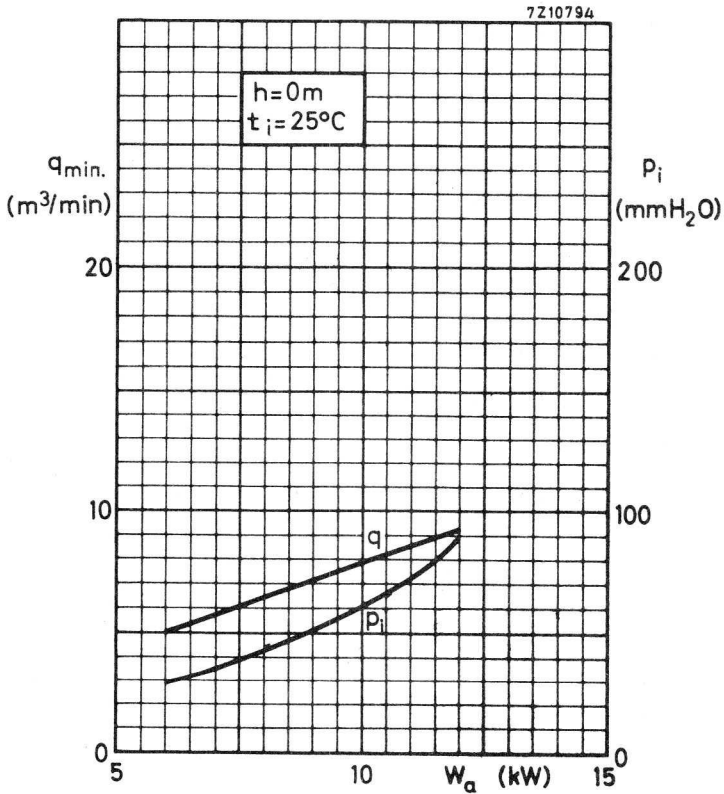

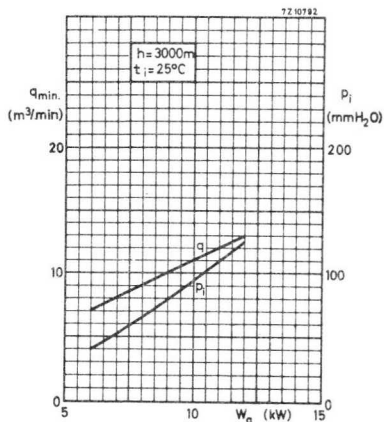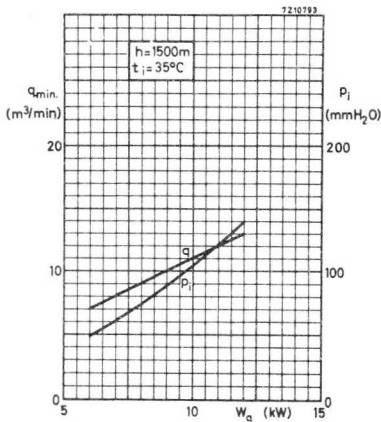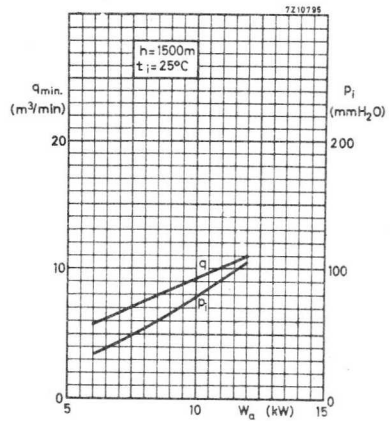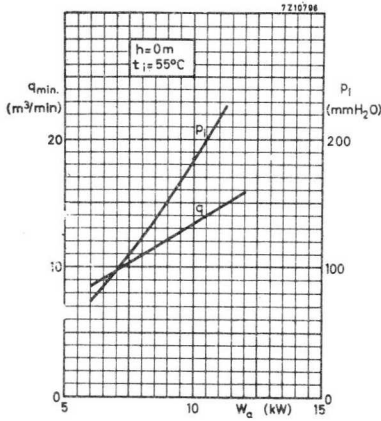

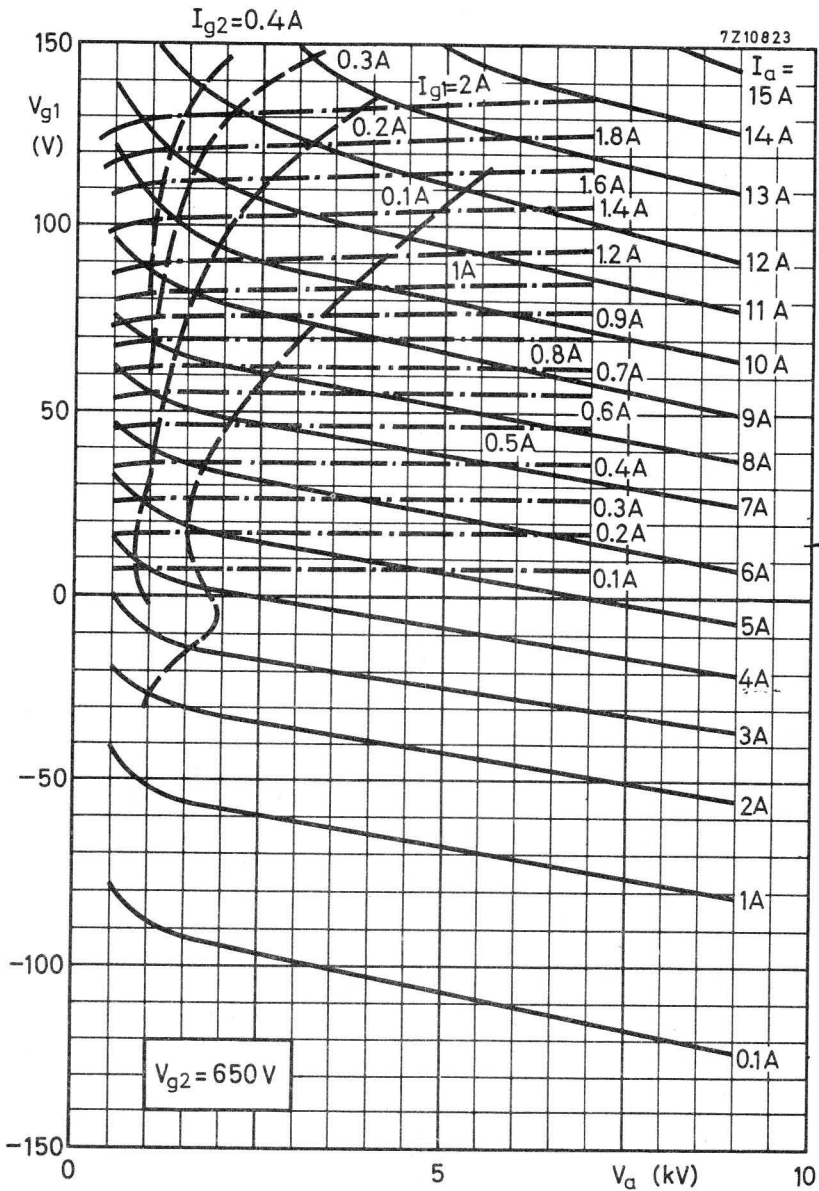

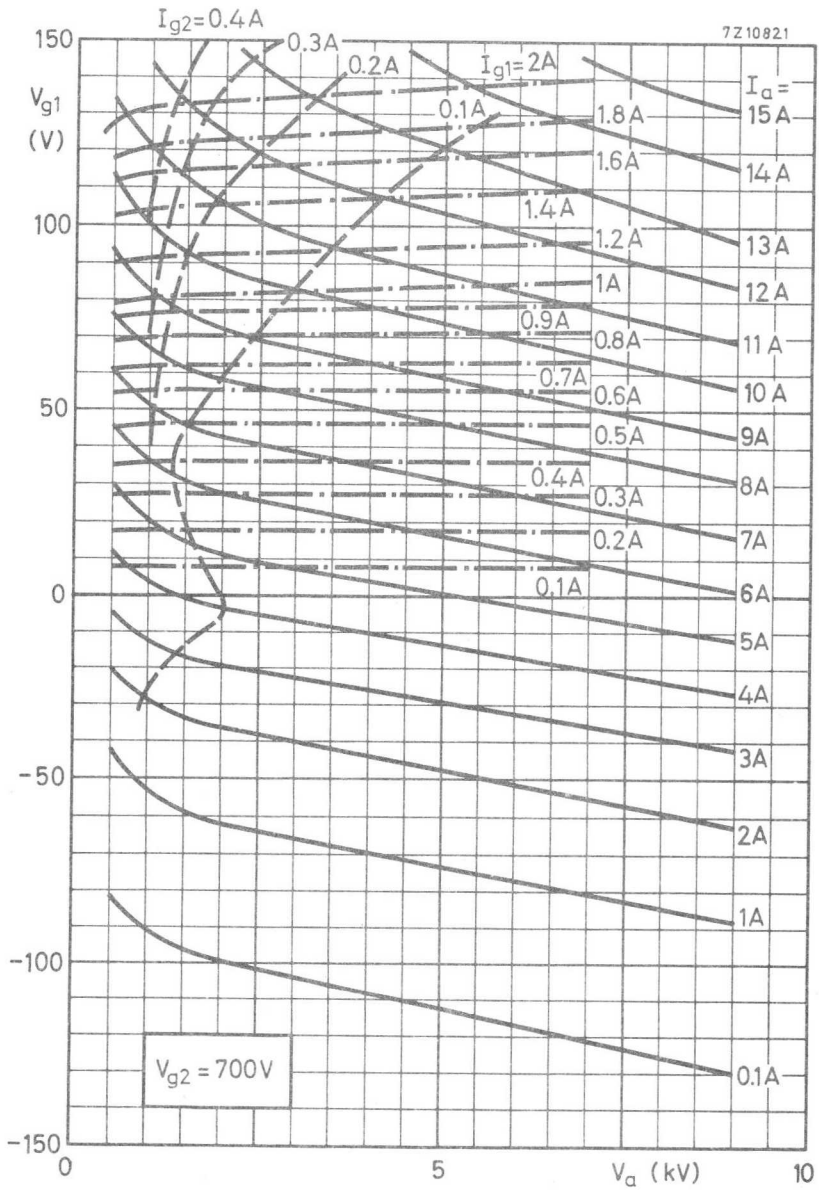

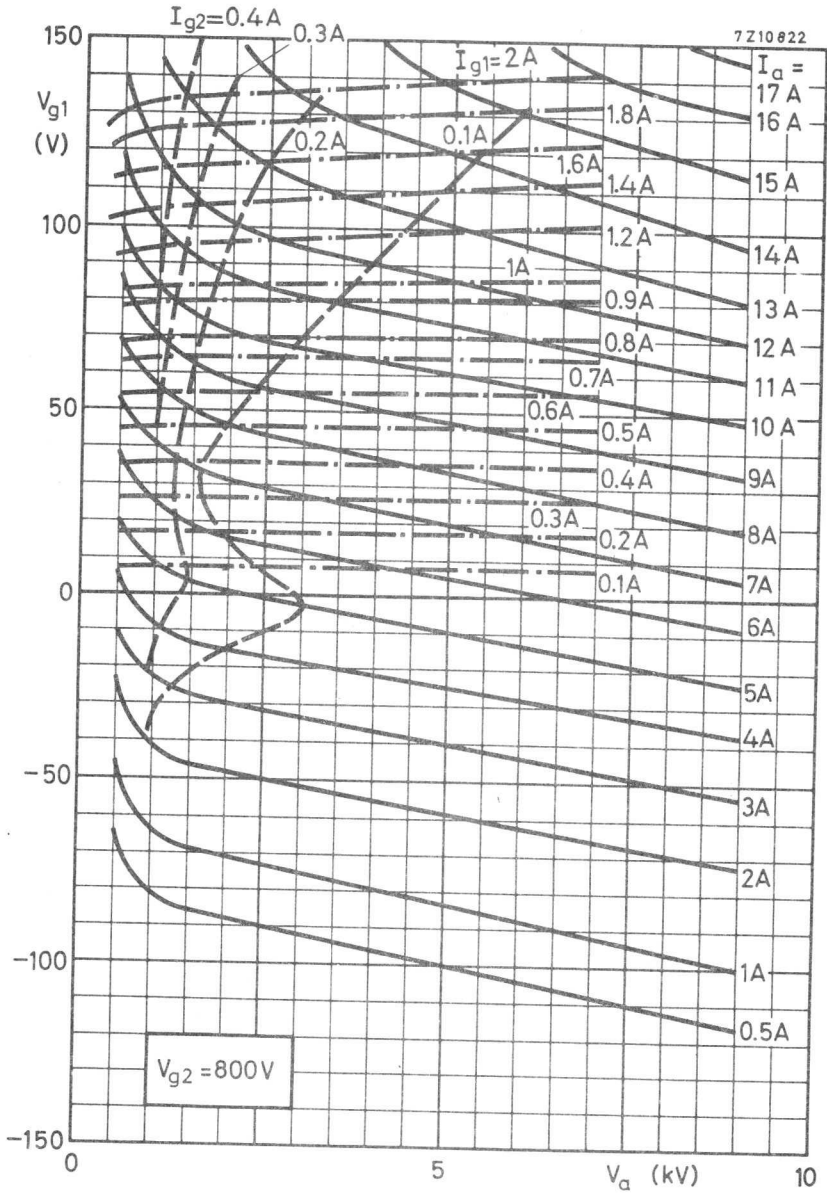

AIR COOLED V.H.F. POWER TETRODE

Forced air cooled coaxial power tetrode in metal-ceramic construction primarily intended for use as a linear broad-band amplifier in T V transmitters in the bands I and III. This type is also very suitable for A. M. and F. M. broadcast, A. F. modulator applications, and in T V transposer service.

QUICK REFERENCE DATA

Class AB linear amplifier (vision)			
Frequency	f	175, 25	MHz
Anode voltage	V _a	3	kV
Output power in load	W _ℓ	1, 55	kW
Power gain	G	26	
Class B amplifier			
Frequency	f	260	MHz
Anode voltage	V _a	3, 5	kV
Output power in load	W _ℓ	2, 4	kW
Power gain	G	26	
TV transposer service			
Frequency	f	175 to 225	MHz
Anode voltage	V _a	2, 5	kV
Output power in load	W _ℓ	0, 55	kW
Power gain	G	30	

HEATING: direct; filament thoriated tungsten, mesh type.

Filament voltage	V _f	4, 2	V
Filament current	I _f	53	A
Filament peak starting current	I _{fp} max.	300	A
Cold filament resistance	R _{f0}	8, 5	mΩ
Waiting time	T _w min.	1	s

The filament is designed to accept temporary fluctuations of ±5%.

TYPICAL CHARACTERISTICS

Anode voltage	V _a	4	kV
Grid no. 2 voltage	V _{g2}	500	V
Anode current	I _a	0, 4	A
Transconductance	S	25	mA/V
Amplification factor	μ _{g2g1}	16	

CAPACITANCES

	grounded cathode		grounded grid		
Input	$C_{g1(a)}$	47	$C_{f(a)}$	24	pF
Output	$C_{a(g1)}$	9	$C_{a(f)}$	9	pF
Anode to grid no. 1	C_{ag1}	0, 1			pF
Anode to filament			C_{af}	< 0, 1	pF

TEMPERATURE LIMITS

Absolute max. envelope temperature	t_{env}	max.	240	°C
Recommended max. seal temperature	t	max.	200	°C

→ **COOLING**

See curves.

Direction of air flow: see drawing.

To obtain optimum life the temperature of the seals and of the envelope should be kept below 200 °C.

ACCESSORIES



Band I amplifier circuit assembly (vision)	type 40755
Band I amplifier circuit assembly (sound)	type 40756
Band III amplifier circuit assembly (vision)	type 40743
Band III amplifier circuit assembly (sound)	type 40744

MECHANICAL DATA

Dimensions in mm

Net mass : approx. 0,55 kg

Mounting position: vertical with anode up or down.

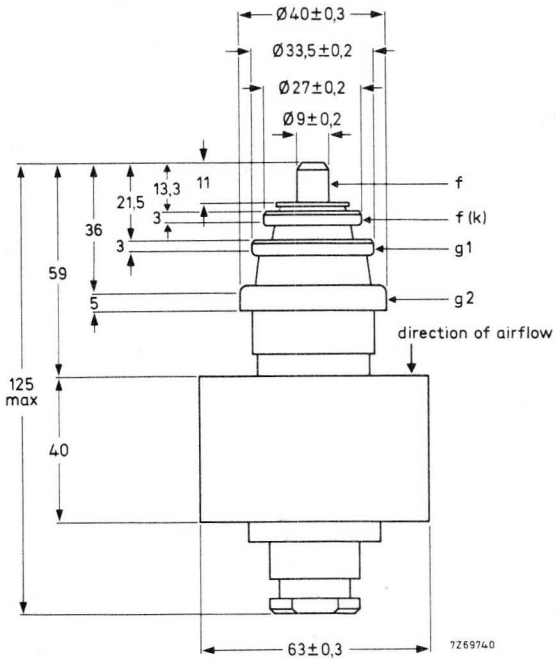

R.F. CLASS B SERVICE

Unless otherwise specified the voltages are given with respect to the cathode.

LIMITING VALUES (Absolute max. rating system)

Frequency	f	up to	260	MHz
Anode voltage	V_a	max.	4	kV
Grid no. 2 voltage	V_{g2}	max.	700	V
Grid no. 1 voltage	$-V_{g1}$	max.	100	V
Anode current	I_a	max.	1, 2	A
Anode input power	W_{i_a}	max.	4	kW
Anode dissipation	W_a	max.	1, 5	kW
Grid no. 2 dissipation	W_{g2}	max.	50	W
Grid no. 1 dissipation	W_{g1}	max.	30	W
Cathode current	I_k	max.	1, 5	A
Grid no. 1 circuit resistance	R_{g1}	max.	10	k Ω

OPERATING CONDITIONS grounded grid

Frequency	f	up to	260	MHz
Anode voltage	V_a		3, 5	kV
Grid no. 2 voltage	V_{g2}		600	V
Grid no. 1 voltage	V_{g1}		-30	V ²⁾
Anode current, no signal condition	I_a		100	mA
Anode current	I_a		980	mA
Grid no. 2 current	I_{g2}		70	mA
Grid no. 1 current	I_{g1}		120	mA
Anode input power	W_{i_a}		3, 43	kW
Anode dissipation	W_a		0, 9	kW
Output power in load	W_l		2, 4	kW
Efficiency, total	η		70	%
Driving power	W_{dr}		90	W
Power gain	$\frac{W_l}{W_{dr}}$		≈ 26	

²⁾ See page 8

R.F. CLASS AB LINEAR AMPLIFIER FOR TELEVISION SERVICE

Negative modulation, positive synchronization (C.C.I.R. system).

Unless otherwise specified the voltages are given with respect to the cathode.

LIMITING VALUES (Absolute max. rating system)

Frequency	f	up to	260	MHz
Anode voltage	V_a	max.	4	kV
Grid no. 2 voltage	V_{g2}	max.	700	V
Grid no. 1 voltage	$-V_{g1}$	max.	100	V
Anode current, black	I_a black	max.	1	A
Anode input power, black	W_{i_a} black	max.	4	kW
Anode dissipation	W_a	max.	1,5	kW
Grid no. 2 dissipation	W_{g2}	max.	50	W
Grid no. 1 dissipation	W_{g1}	max.	30	W
Cathode current	I_k	max.	1,5	A
Grid no. 1 circuit resistance	R_{g1}	max.	10	$k\Omega$

OPERATING CONDITIONS grounded grid.

Frequency of vision carrier	f		175, 25	MHz
Bandwidth (-1 dB)	B	7	8	MHz ¹⁾
Anode voltage	V_a	3	2,5	kV
Grid no. 2 voltage	V_{g2}	500	500	V
Grid no. 1 voltage	V_{g1}	-23	-14	V ²⁾
Anode current, no signal condition	I_a	200	400	mA
Anode current, black	I_a black	700	600	mA ³⁾
Grid no. 2 current, black	I_{g2} black	50	40	mA ³⁾
Grid no. 1 current, black	I_{g1} black	60	30	mA ³⁾
Output power in load, sync	W_l sync	1550	700	W
black	W_l black	930	420	W ³⁾
Driving power, sync	W_{dr} sync	60	30	W
black	W_{dr} black	32,5	17	W
Gain, sync	G_{sync}	26	23	
black	G_{black}	28,6	24,7	
Sync compression	sync in/out	28/25	27/25	⁴⁾
Diferential phase		< 3	< 3	o ⁵⁾
Differential gain		≥ 85	≥ 85	%
Anode resistance	$R_a \sim$	1,8	1,6	$k\Omega$ ¹⁾

Notes: see page 8

+ Detailed information on definitions of terms and application suggestions are available on request.

R.F. CLASS AB AMPLIFIER FOR TELEVISION TRANSPOSER SERVICE , grounded grid

LIMITING VALUES

See page 5


OPERATING CONDITIONS , grounded gridNegative modulation, positive synchronization, combined sound and vision
(CCIR standard G)





Frequency	f	175 to 225	MHz
Bandwidth (-1 dB)	B	8	MHz
Anode voltage	V_a	2,5	kV
Grid no. 2 voltage	V_{g2}	600	V
Grid no. 1 voltage ²⁾	V_{g1}	-13,5	V
Anode current, no signal condition	I_a	550	mA
Anode current ⁶⁾	I_a	730	mA
Grid no. 2 current ⁶⁾	I_{g2}	50	mA
Grid no. 1 current ⁶⁾	I_{g1}	35	mA
Driving power, sync	W_{dr}	18	W
Output power in load, sync	W_{ℓ}	0,55	kW
Power gain	G	30	-
Intermodulation products ⁷⁾	d	-52	dB

Notes: see page 8


NOTES

- 1) With double tuned circuit.
- 2) To be adjusted for the stated no signal anode current.
- 3) Black signal including line sync pulses.
- 4) A picture/sync ratio of 75/25 for the outgoing signal requires a ratio of max. 70/30 for the incoming signal in which case the sync compression sync in/out = 30/25.
- 5) Measured with a saw tooth amplitude, running from 17% to 75% of the peak sync value, with superimposed a 4, 43 MHz sine wave with a 10 % peak to peak value.
- 6) At c.w. output power = 550 W
- 7) Three-tone test method (vision carrier -8 dB, sound carrier -7 dB, sideband signal -17 dB with respect to peak sync = 0 dB).

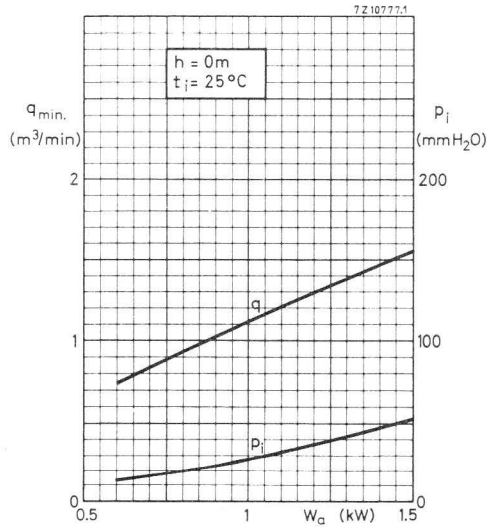


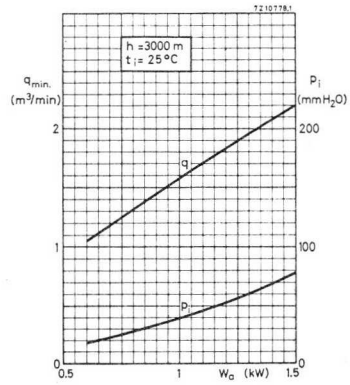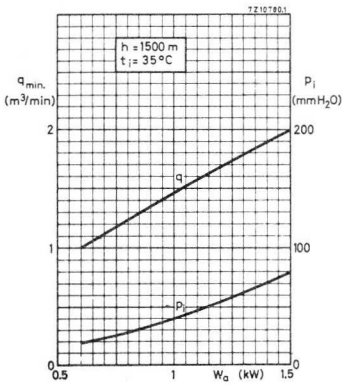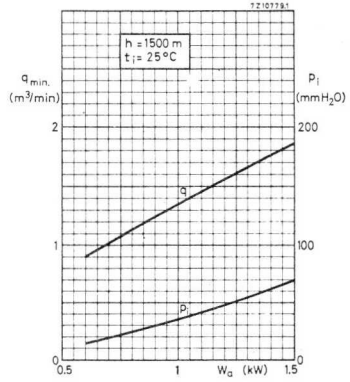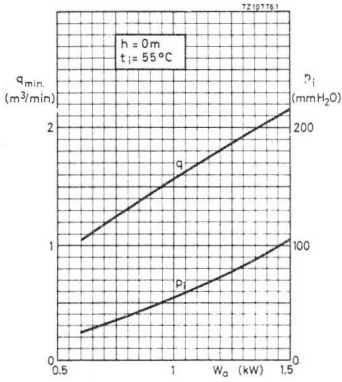


7Z10781

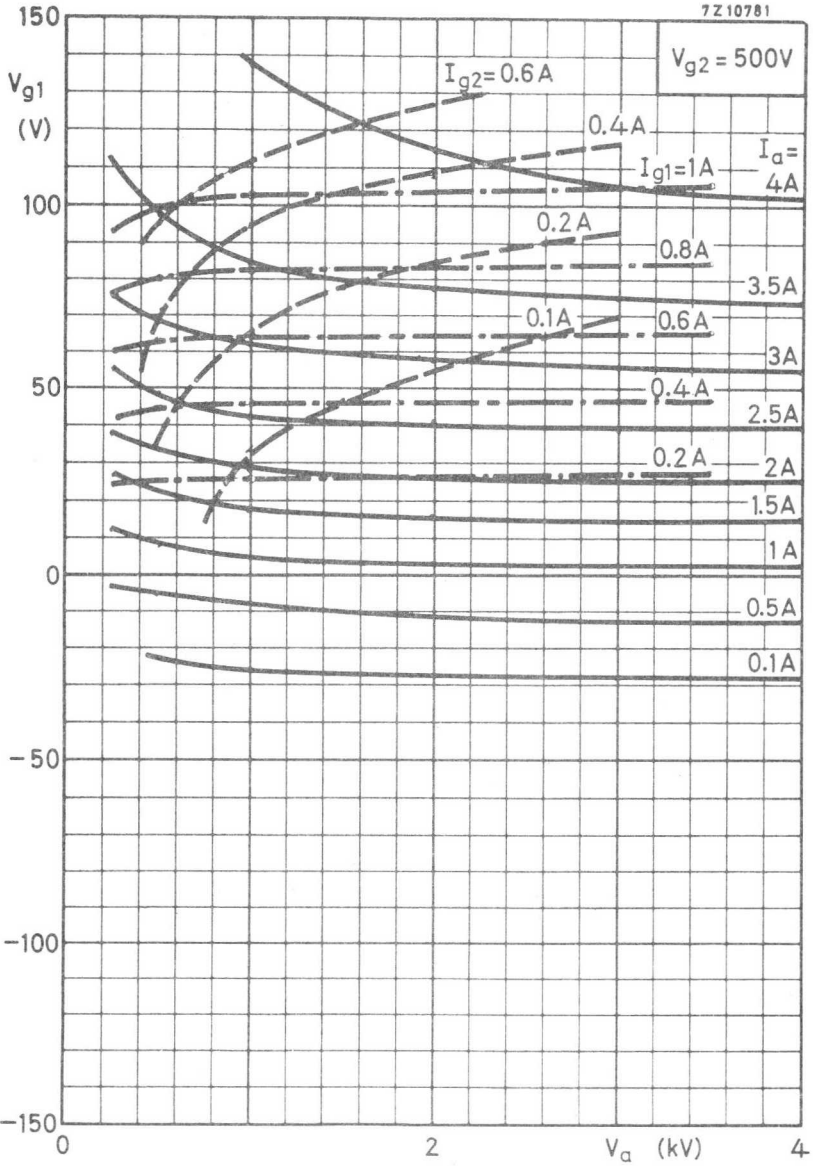

7Z10782

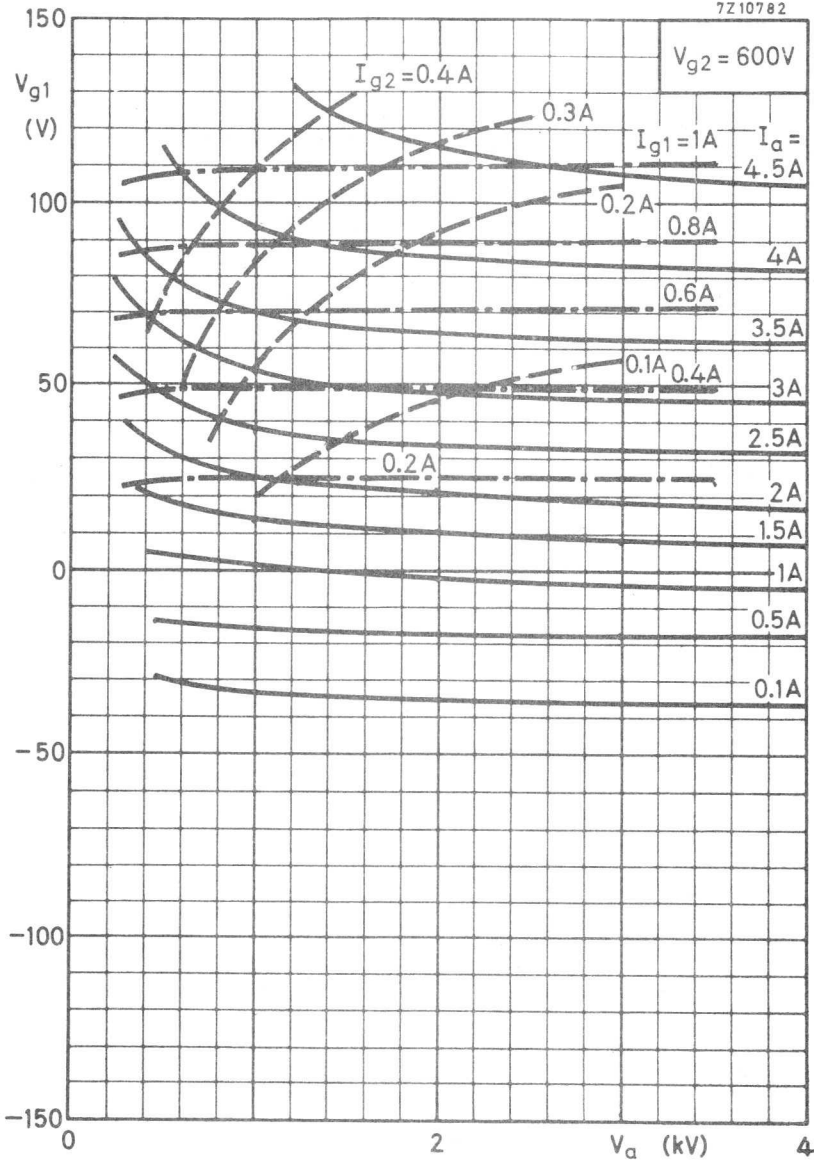

7Z10783

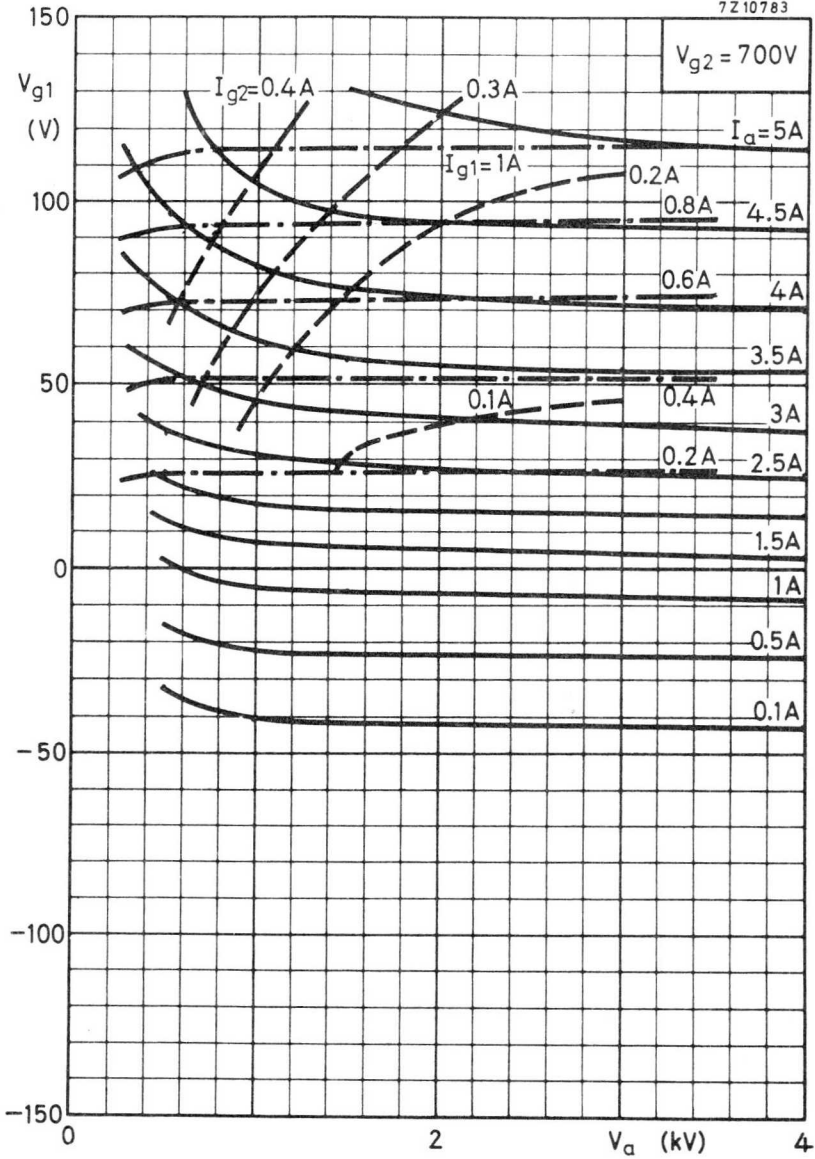

R.F. POWER TETRODE

Mesh-type cathode version of QB4/1100.

With this tube in centre-tapped filament transformer arrangement the hum level is reduced to better than -60 dB.

For data and curves of this type please refer to type QB4/1100.

R.F. POWER TETRODE

Mesh-type cathode version of QB4/1100GA.

With this tube in centre-tapped filament transformer arrangement the hum level is reduced to better than -60 dB.

For data and curves of this type please refer to type QB4/1100GA.

AIR COOLED V.H.F. POWER TETRODE

Forced air cooled coaxial power tetrode in metal-ceramic construction primarily intended for use as final amplifier in F.M. transmitters in band II in grounded cathode circuits.

QUICK REFERENCE DATA			
Frequency (MHz)	H.F. Class-B amplifier		
	V_a (kV)	W_ℓ (kW)	Power gain (dB)
110	6	6	23
	7	11	22

HEATING : Direct; filament thoriated tungsten, mesh type

Filament voltage	V_f	6,3	V
Filament current	I_f	120	A
Filament peak starting current	I_{fP} max.	750	A
Cold filament resistance	R_{fO}	6	m Ω
Waiting time	T_w min.	1	s

The filament is designed to accept temporary fluctuations of $\pm 5\%$.

CAPACITANCES

Input	$C_{g1(a)}$	87	pF
Output	$C_a(g_1)$	20	pF
Anode to grid no.1	C_{ag1}	0,5	pF

TYPICAL CHARACTERISTICS

Anode voltage	V_a	5	kV
Grid no.2 voltage	V_{g2}	600	V
Anode current	I_a	1,2	A
Transconductance	S	30	mA/V
Amplification factor	μ_{g2g1}	7,2	-

TEMPERATURE LIMITS

Absolute max. envelope temperature	t_{env} max.	240	$^{\circ}C$
Recommended max. seal temperature	t max.	200	$^{\circ}C$

→ COOLING

To obtain optimum life the temperature of the seals and of the envelope should be kept below 200 °C.

To keep the temperature of the seals below the maximum permissible value, it may be necessary to direct an air flow to the seals.

Anode cooling: see cooling curves.


Direction of air flow: see outline drawing.

MECHANICAL DATA

Dimensions in mm

Net mass : approx. 3,1 kg

Mounting position: vertical with anode up or down.

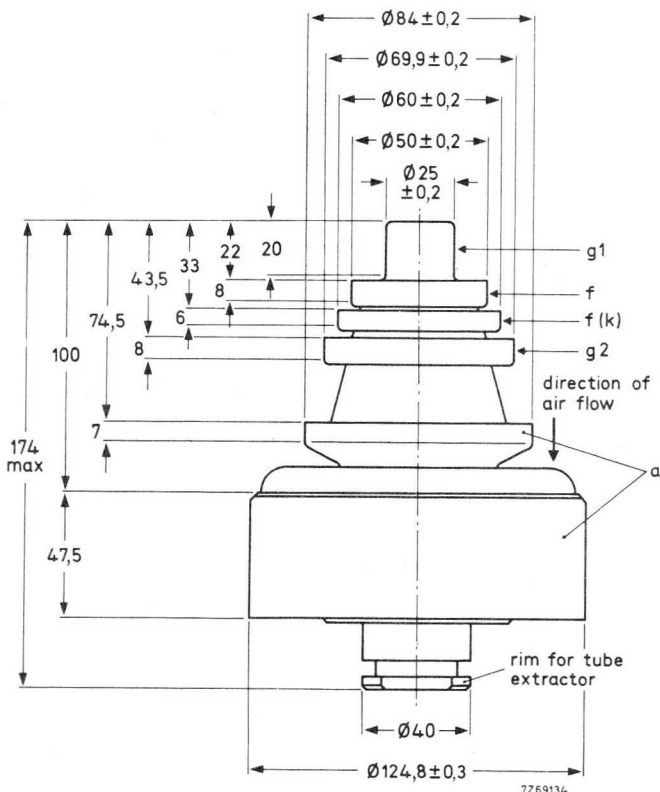

ACCESSORIES

Band II amplifier circuit assembly

type

40775

R.F. CLASS-B AMPLIFIER





LIMITING VALUES (Absolute max. rating system)

Frequency	f	up to	200	MHz
Anode voltage	V_a	max.	8,5	kV
Grid no.2 voltage	V_{g2}	max.	1	kV
Grid no.1 voltage	$-V_{g1}$	max.	500	V
Anode current	I_a	max.	4	A
Anode input power	W_{ia}	max.	18,5	kW
Anode dissipation	W_a	max.	8	kW
Grid no.2 dissipation	W_{g2}	max.	80	W
Grid no.1 dissipation	W_{g1}	max.	40	W
Cathode current	I_k	max.	4,5	A


OPERATING CONDITIONS grounded cathode

Frequency	f	87 to 110	87 to 110	MHz
Anode voltage	V_a	7	6	kV
Grid no.2 voltage	V_{g2}	700	700	V
Grid no.1 voltage	V_{g1}	-105	100	V ¹⁾
Anode current, no-signal condition	I_a	600	600	mA
Anode current	I_a	2,3	1,6	A
Grid no.2 current	I_{g2}	40	70	mA
Grid no.1 current	I_{g1}	150	90	mA
Anode input power	W_{ia}	16,1	9,6	kW
Anode dissipation	W_a	4,6	3,5	kW
Output power in load	W_ℓ	11	6	kW
Efficiency, total	η	68	63	%
Driving power	W_{dr}	70	30	W
Power gain	$\frac{W_\ell}{W_{dr}}$	22	23	dB


¹⁾ To be adjusted for the stated no-signal anode current.

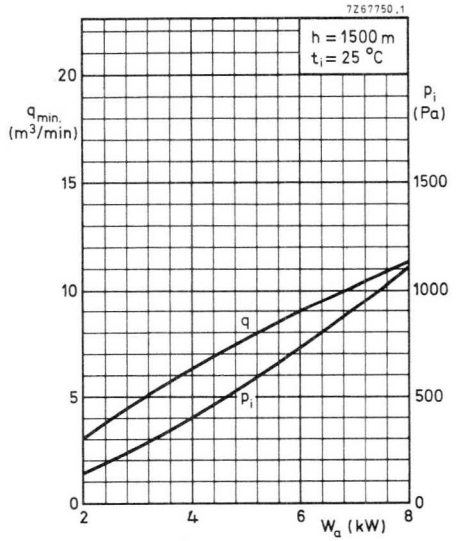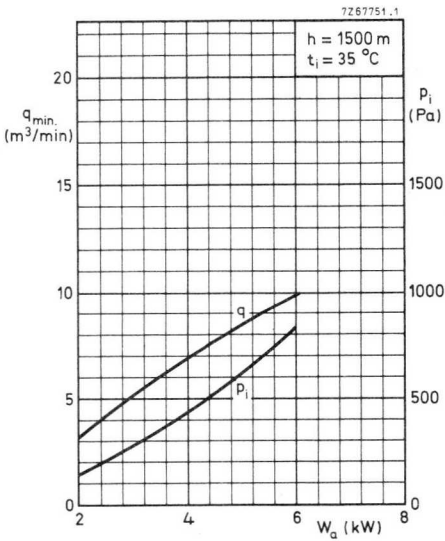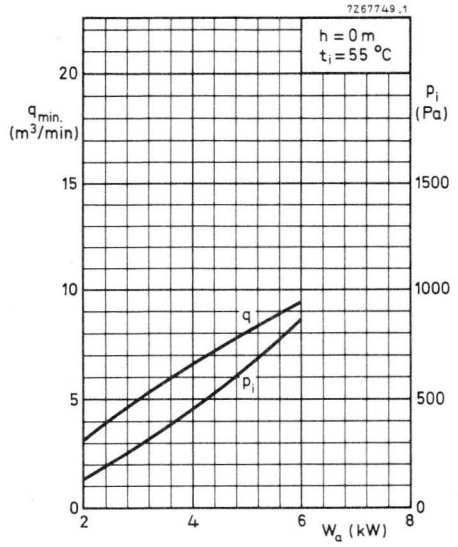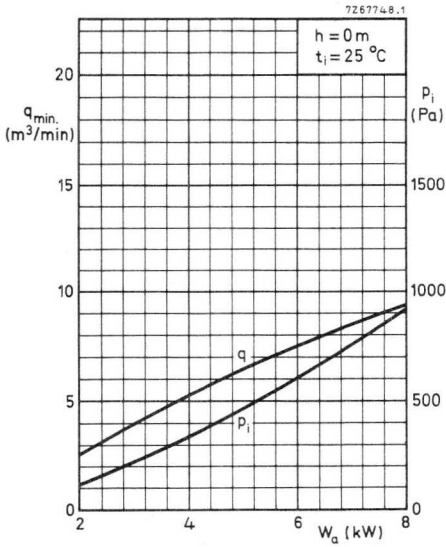


1 Pa \approx 0,1 mm H₂O.

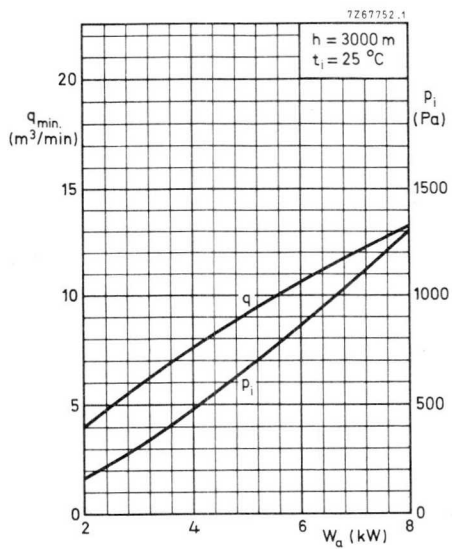

1 Pa \approx 0, 1 mm H₂O.

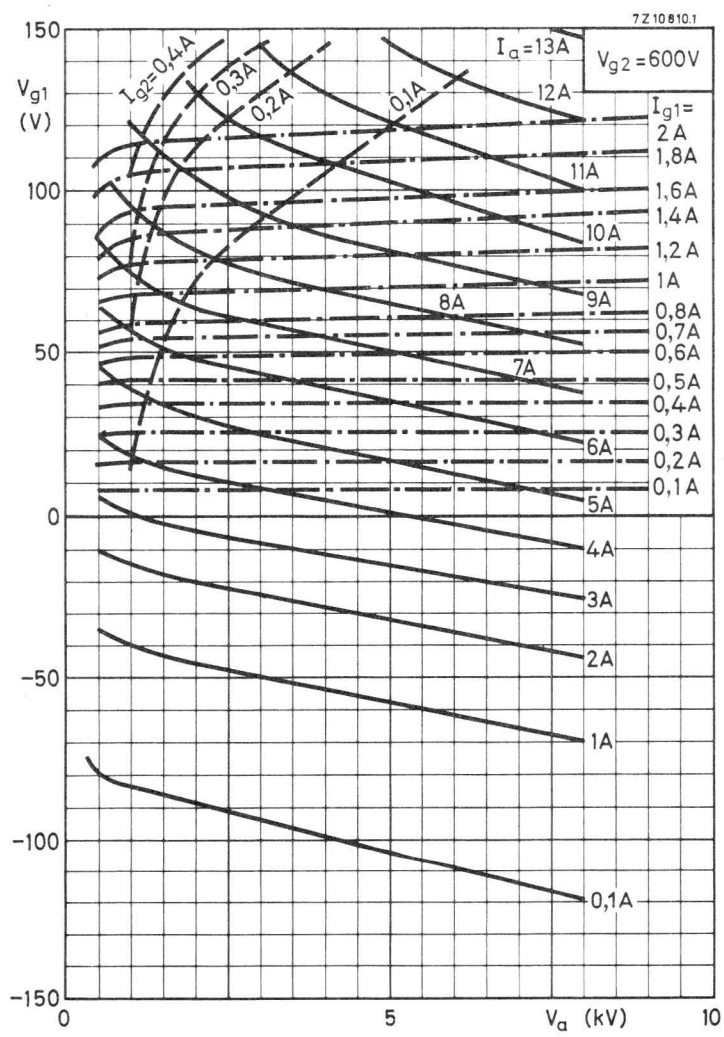

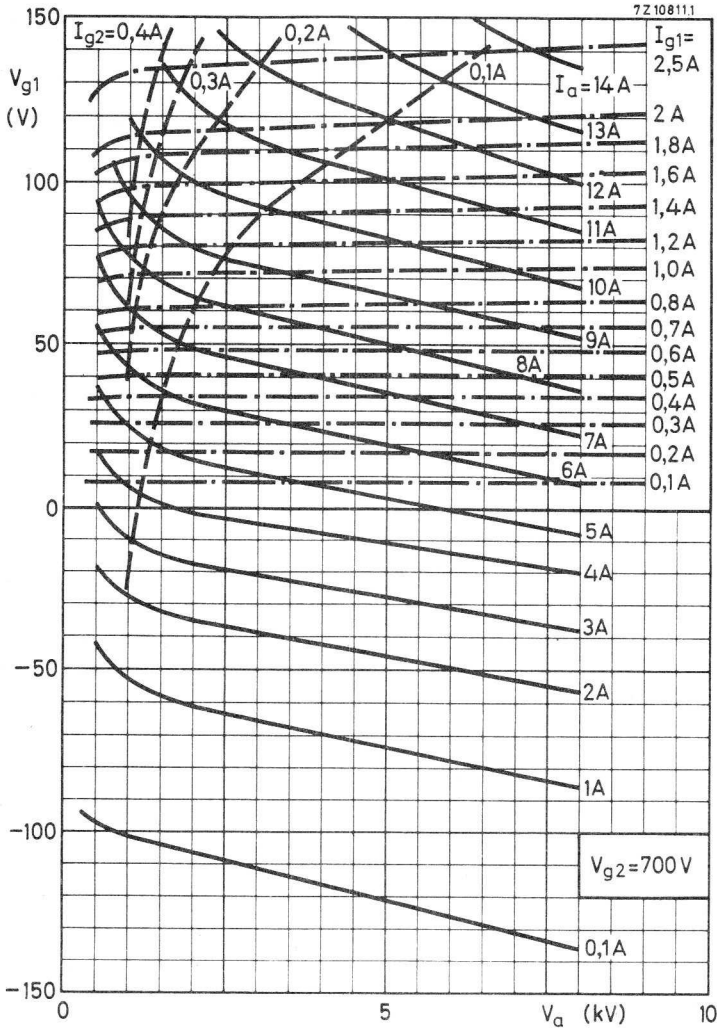

AIR COOLED V.H.F. POWER TETRODE

Forced air cooled coaxial power tetrode in metal-ceramic construction primarily intended for use as a linear broad-band amplifier in TV transmitters in the bands I and III. This type is also very suitable for A.M. and F.M. broadcast and A.F. modulator applications, and in TV transposer service.

QUICK REFERENCE DATA

QUICK REFERENCE DATA				
Class AB linear amplifier (vision)				
Frequency	f	175, 25	MHz	
Anode voltage	V_a	8	kV	
Output power in load	W_l	27, 5	kW	
Power gain	G	28, 5		
Class C telegraphy or F.M. telephony				
Frequency	f	260	MHz	
Anode voltage	V_a	8, 5	kV	
Output power in load	W_l	25	kW	
Power gain	G	31		
Television transposer service				
Frequency	f	175 to 225	MHz	
Anode voltage	V_a	8	kV	
Output power in load	W_l	10, 5	kW	
Power gain	G	42		

HEATING : direct; filament thoriated tungsten, mesh type.

Filament voltage	V_f	10, 4	V	←
Filament current	I_f	120	A	
Filament peak starting current	I_{fp}	max. 750	A	
Cold filament resistance	R_{f_0}	10, 5	m Ω	
Waiting time	T_w	min. 1	s	

The filament is designed to accept temporary fluctuations of $\pm 5\%$. ←

TYPICAL CHARACTERISTICS

Anode voltage	V_a	8	kV
Grid no. 2 voltage	V_{g2}	700	V
Anode current	I_a	2,4	A
Transconductance	S	60	mA/V
Amplification factor	μ	8,5	

CAPACITANCES

	grounded cathode		grounded grid	
Input	$C_{g1(a)}$	135	$C_{f(a)}$	69 pF
Output	$C_{a(g1)}$	23	$C_{a(f)}$	23 pF
Anode to grid no. 1	C_{ag1}	0,85		pF
Anode to filament			C_{af}	0,25 pF

TEMPERATURE LIMITS

Absolute max. envelope temperature	t_{env}	max.	240	$^{\circ}C$
Recommended max. seal temperature	t	max.	200	$^{\circ}C$

→ **COOLING**

See cooling curves.

Direction of airflow: see outline drawing.

To obtain optimum life the temperature of the seals and of the envelope should be kept below 200 $^{\circ}C$.

ACCESSORIES


Band I amplifier circuit assembly (vision)	type	40759
Band I amplifier circuit assembly (sound)	type	40760
Band III amplifier circuit assembly (vision)	type	40768
Band III amplifier circuit assembly (sound)	type	40769

MECHANICAL DATA

Dimensions in mm

Net weight : approx. 11 kg

Mounting position : vertical with anode up or down

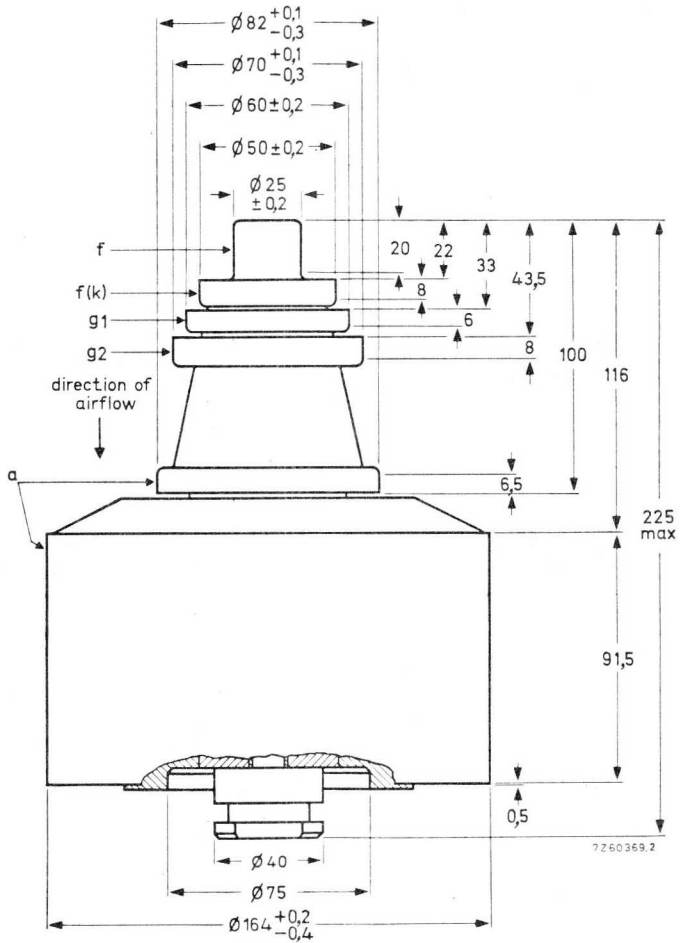

R.F. CLASS AB AMPLIFIER FOR TELEVISION TRANSPOSER SERVICE , grounded grid

LIMITING VALUES

See page 4

OPERATING CONDITIONS , grounded grid

Negative modulation, positive synchronization, combined sound and vision
(CCIR standard G)

Frequency	f	175 to 225	MHz
Bandwidth (-1 dB)	B	8	MHz
Anode voltage	V_a	8	kV
Grid no. 2 voltage	V_{g2}	900	V
Grid no. 1 voltage	V_{g1}	-95	V
Anode current, no signal condition	I_a	1,8	A
Anode current	I_a	3,3	A
Grid no. 2 current	I_{g2}	35	mA
Grid no. 1 current	I_{g1}	20	mA
Driving power, sync	W_{dr}	250	W
Output power in load, sync	W_{ℓ}	10,5	kW
Power gain	G	42	-
Intermodulation products	d	-55	dB

Notes: See page 5.

R.F. CLASS C TELEGRAPHY or F.M. TELEPHONY




LIMITING VALUES (Absolute max. rating system)


Frequency	f	up to	260 MHz
Anode voltage	V_a	max.	9,5 kV
Grid no. 2 voltage	V_{g2}	max.	1 kV
Grid no. 1 voltage	$-V_{g1}$	max.	500 V
Anode current	I_a	max.	7 A
Anode input power	W_{ia}	max.	42 kW
Anode dissipation	W_a	max.	18 kW
Grid no. 2 dissipation	W_{g2}	max.	100 W
Grid no. 1 dissipation	W_{g1}	max.	50 W
Cathode current	I_k	max.	9 A


OPERATING CONDITIONS

Frequency	f	260 MHz
Anode voltage	V_a	8,5 kV
Grid no. 2 voltage	V_{g2}	700 V
Grid no. 1 voltage	V_{g1}	-106 V ¹⁾
Anode current, no signal condition	I_a	300 mA
Anode current	I_a	4,6 A
Grid no. 2 current	I_{g2}	100 mA
Grid no. 1 current	I_{g1}	325 mA
Anode input power	W_{ia}	39,1 kW
Anode dissipation	W_a	14 kW
Output power in load	W_ℓ	25 kW
Efficiency, total		64 %
Driving power	W_{dr}	800 W
Power gain	$\frac{W_\ell}{W_{dr}}$	31

Note : See page 5

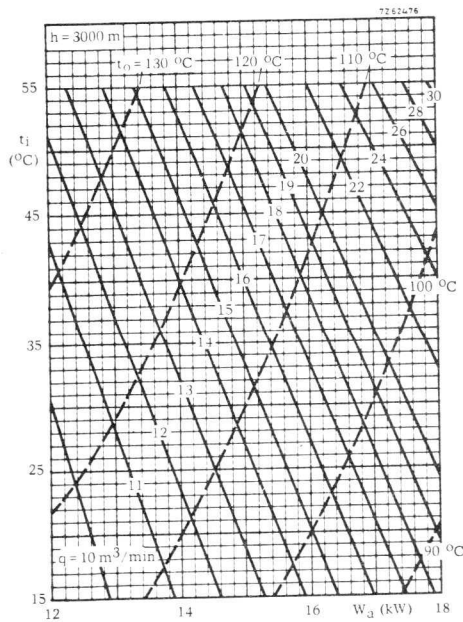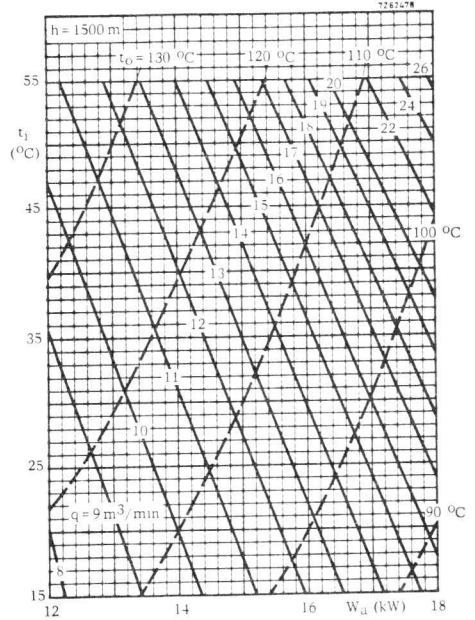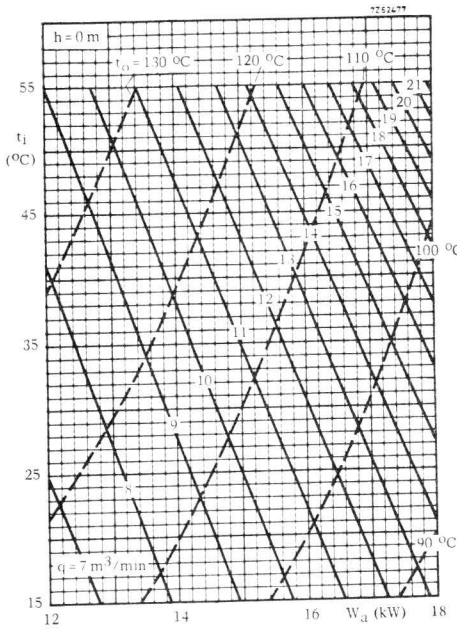

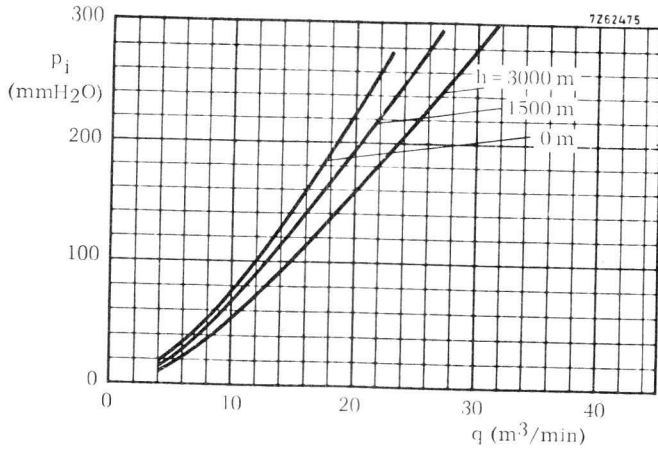

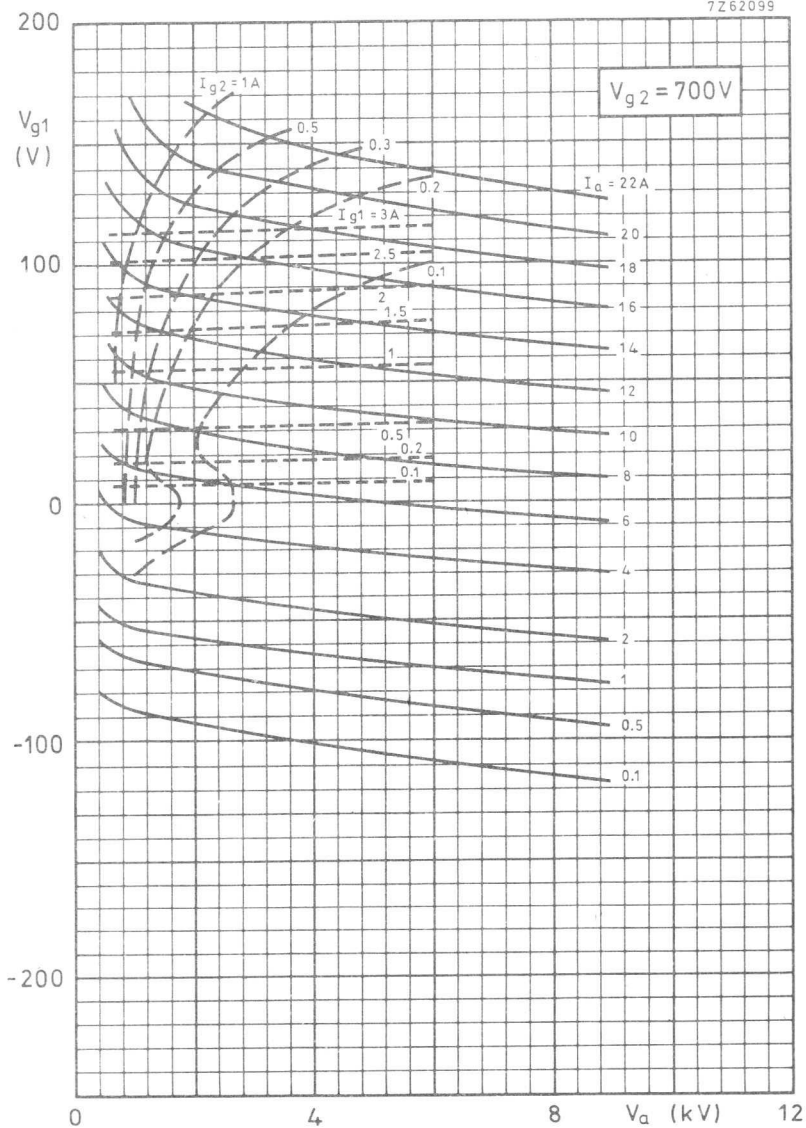

AIR COOLED V.H.F. POWER TETRODE

Forced air cooled coaxial power tetrode in metal-ceramic construction primarily intended for use as grid-driven linear broadband amplifier with high power gain in TV band I and III transmitters and transposers. The type is also very suitable for FM broadcast applications.

QUICK REFERENCE DATA

Class-AB linear amplifier (vision)			
Frequency	f	175,25	MHz
Anode voltage	V_a	3	kV
Output power in load (sync)	W_l	1,1	kW
Power gain	G	20	dB
Class-AB F.M. telephony			
Frequency	f	260	MHz
Anode voltage	V_a	4	kV
Output power in load	W_l	2,2	kW
Power gain	G	22	dB

HEATING : direct; filament thoriated tungsten, mesh type

Filament voltage	V_f	4,2	V
Filament current	I_f	53	A
Filament peak starting current	I_{fp}	max. 300	A
Cold filament resistance	R_{fo}	8,5	$m\Omega$
Waiting time	T_w	min. 1	s

The filament is designed to accept temporary fluctuations of $\pm 5\%$.

TYPICAL CHARACTERISTICS

Anode voltage	V_a	3	kV
Grid no. 2 voltage	V_{g2}	700	V
Anode current	I_a	500	mA
Transconductance	S	25	mA/V
Amplification factor	u_{g2g1}	10	

CAPACITANCES, grounded cathode

Input	$C_{g1(a)}$	54	pF
Output	$C_{a(g1)}$	8	pF
Anode to grid no. 1	C_{ag1}	0,1	pF

TEMPERATURE LIMITS

Absolute max. envelope temperature	t_{env}	max.	240	°C
Recommended max. seal temperature	t	max.	200	°C

→ COOLING

Direction of airflow: see drawing

W_a (W)	h (m)	t_i (°C)	q (m ³ /min)	p_i (Pa *)	t_o (°C)
2000	0	35	2,00	530	92
1500	0	35	1,30	280	103
1000	0	35	0,80	140	113
2000	0	55	2,40	670	107
1500	0	55	1,55	340	118
1000	0	55	0,95	180	127
2000	1500	35	2,58	670	89
1500	1500	35	1,68	340	99
1000	1500	35	1,03	180	109
2000	3000	25	2,78	690	81
1500	3000	25	1,80	350	91
1000	3000	25	1,11	190	101

To obtain optimum life the temperature of the seals and of the envelope should be kept below 200 °C.

ACCESSORIES

Band III amplifier circuit assembly (vision)	type 40776
Band III amplifier circuit assembly (sound)	type 40777
Band II amplifier circuit assembly (sound)	type 40778


*) 1 Pa ≈ 0,1 mm H₂O.

MECHANICAL DATA

Dimensions in mm

Net mass : 0,55 kg

Mounting position : vertical with anode up or down

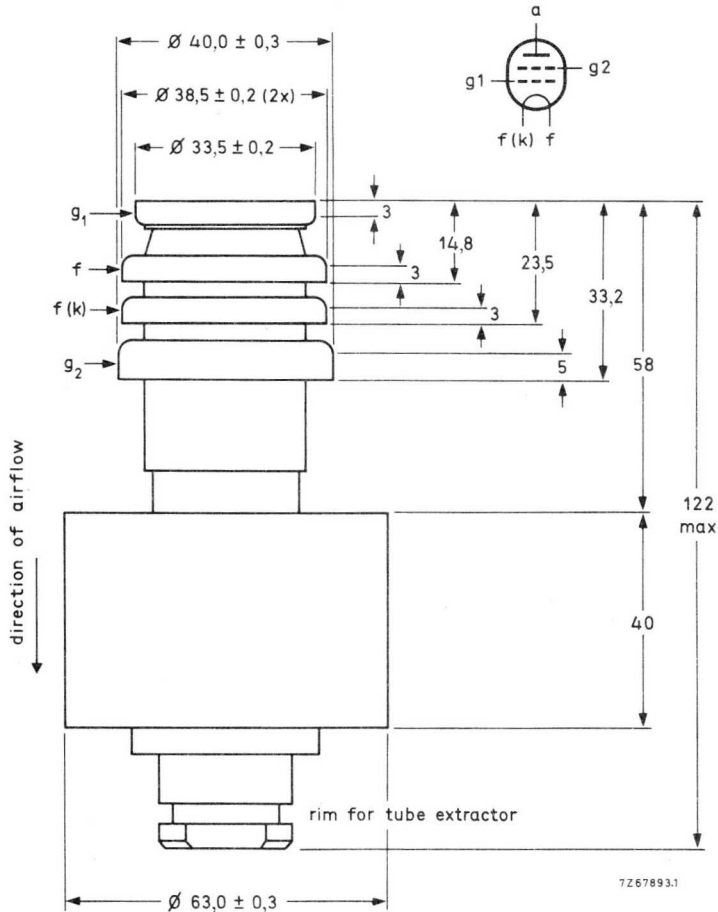

Tube extractor type 40750; catalogue number 7322 120 02140.

RF CLASS-AB F.M. TELEPHONY


LIMITING VALUES (Absolute max. rating system)





Frequency	f	up to	260	MHz
Anode voltage	V_a	max.	4,2	kV
Grid no. 2 voltage	V_{g2}	max.	750	V
Grid no. 1 voltage	$-V_{g1}$	max.	100	V
Anode current, black	I_a	max.	1,2	A
Anode input power, black	W_{ia}	max.	4	kW
Anode dissipation	W_a	max.	2	kW
Grid no. 2 dissipation	W_{g2}	max.	70	W
Grid no. 1 dissipation	W_{g1}	max.	30	W
Cathode current	I_k	max.	1,5	A
Grid no. 1 circuit resistance	R_{g1}	max.	10	$k\Omega$

OPERATING CONDITIONS, grid driven

Frequency	f	260	MHz
Anode voltage	V_a	4	kV
Grid no. 2 voltage	V_{g2}	700	V
Grid no. 1 voltage	V_{g1}	-60	V ¹⁾
Anode current, no-signal condition	I_a	200	mA
Anode current	I_a	1	A
Grid no. 2 current	I_{g2}	80	mA
Grid no. 1 current	I_{g1}	30	mA
Anode input power	W_{ia}	4	kW
Anode dissipation	W_a	1,8	kW
Output power in load	W_f	2,2	kW
Efficiency, total	η	55	%
Power gain	G	22	dB

1) Voltage range -50 to -70 V.

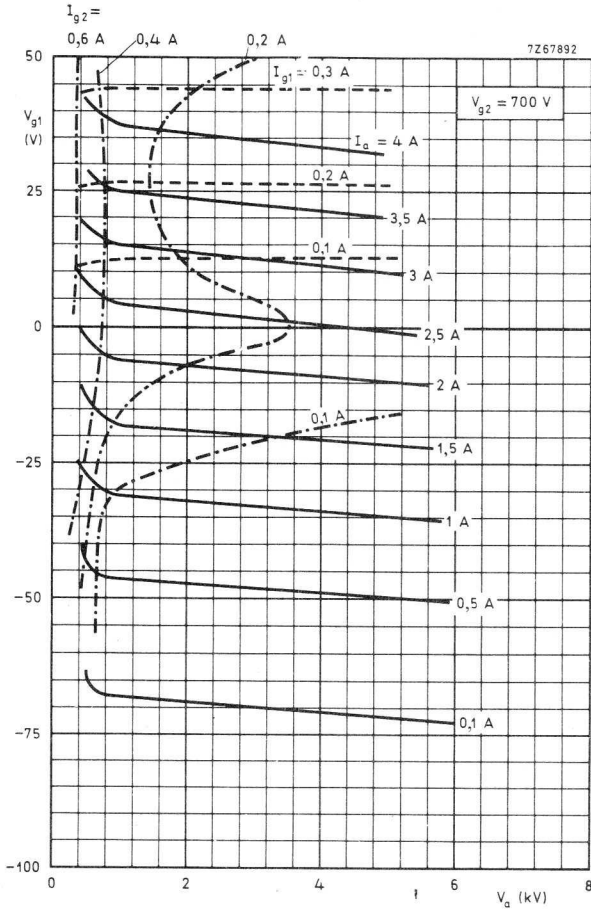

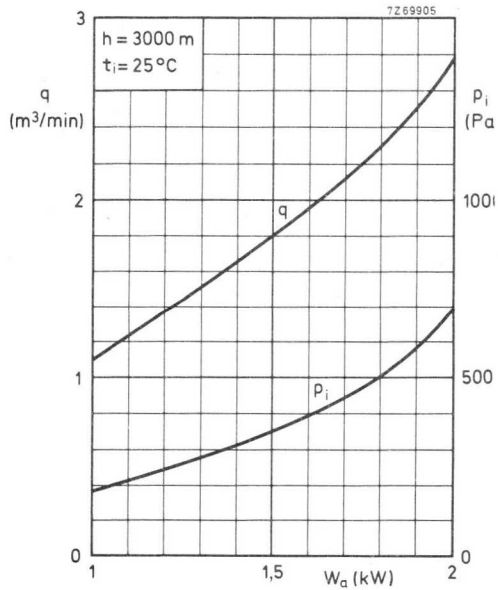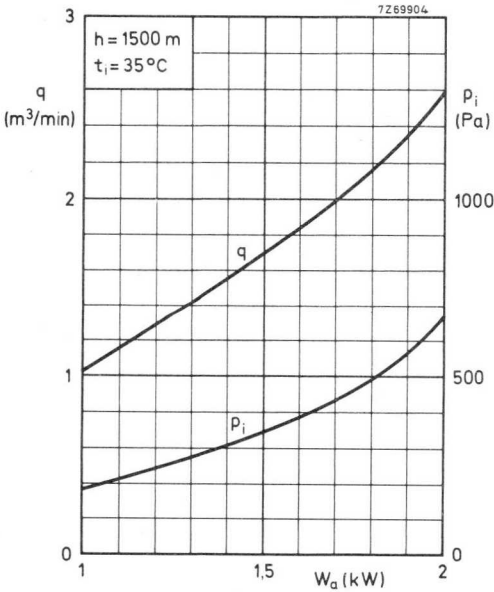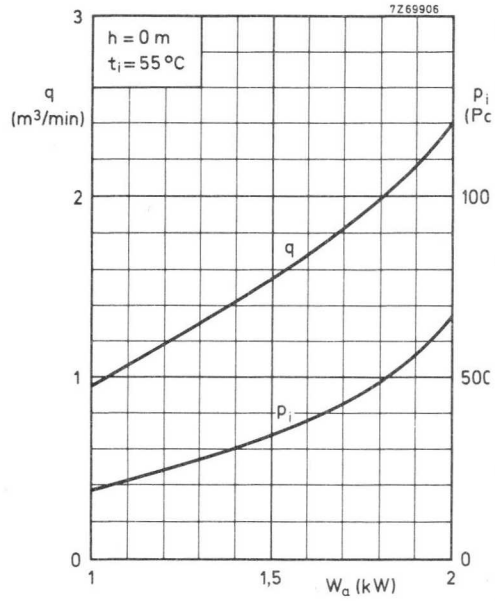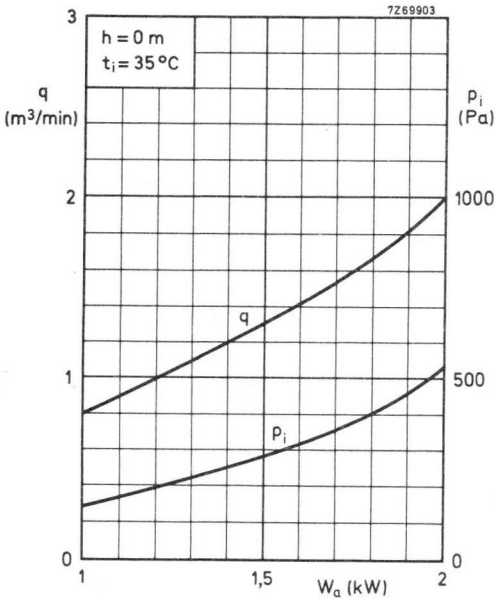

AIR COOLED U.H.F POWER TETRODE

Forced-air cooled coaxial power tetrode in metal-ceramic construction. The tube features a high gain and a high linearity and is primarily intended for use as linear broad-band amplifier in band IV/V TV transmitters and transposers.

QUICK REFERENCE DATA		
Class AB linear amplifier		
Frequency	f	860 MHz
Anode voltage	V_a	5,5 kV
Output power in load, sync	$W_l(\text{sync})$	6 kW
Power gain	G	17 dB
TV transposer service		
Frequency	f	470 to 860 MHz
Anode voltage	V_a	5,5 kV
Output power in load, sync	$W_l(\text{sync})$	2,2 kW
Power gain	G	16,5 dB

HEATING : direct; thoriated tungsten filament

Filament voltage	V_f	5 V
Filament current	I_f	130 A
Filament peak starting current	I_{fp} max.	800 A
Cold filament resistance	R_{f0}	4,5 $m\Omega$
Waiting time	T_w min.	1 s

The filament is designed to accept temporary fluctuations of $\pm 5\%$.

TYPICAL CHARACTERISTICS

Anode voltage	V_a	2 kV
Grid no. 2 voltage	V_{g2}	800 V
Anode current	I_a	6 A
Transconductance	S	140 mA/V
Amplification factor	μ_{g2g1}	8

Data based on pilot-production tubes.

CAPACITANCES , grounded-grid

Input	$C_{f(a)}$	62	pF
Output	$C_{a(f)}$	12	pF
Anode to filament	C_{af}	< 0,1	pF

TEMPERATURE LIMITS

Absolute max. envelope temperature	t_{env}	240	°C
Recommended max. seal temperature	t_s	200	°C

→ COOLING


Anode dissipation W_a (kW)	Inlet temperature t_i (°C)	Height h (m)	Rate of flow q_{min} (m ³ /min)	Pressure drop P_i (Pa *)
6	35	0	5,4	520

To obtain optimum life the temperature of the seals and of the envelope should be kept below 200 °C.

For direction of air flow see outline drawing.

* 1 Pa ≈ 0,1 mm H₂O.

The air should be ducted so that sufficient air is directed to the seals to keep the seal temperature below the limit.

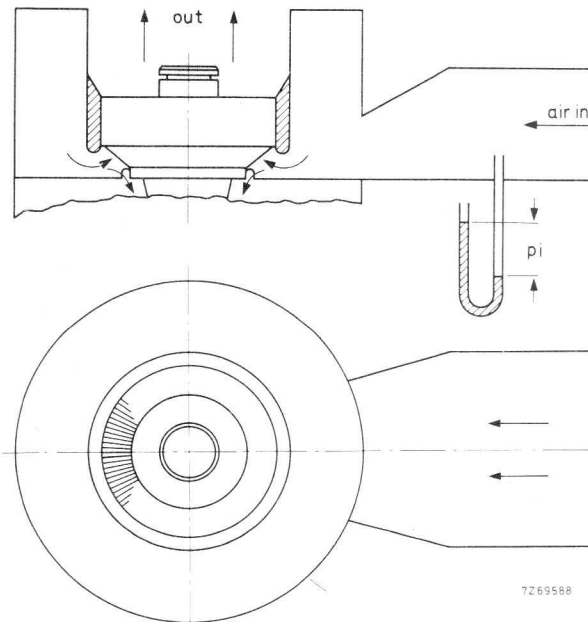


7269588

MECHANICAL DATA

Dimensions in mm

Net mass: $\approx 2,5$ kg

Mounting position: vertical with anode up or down

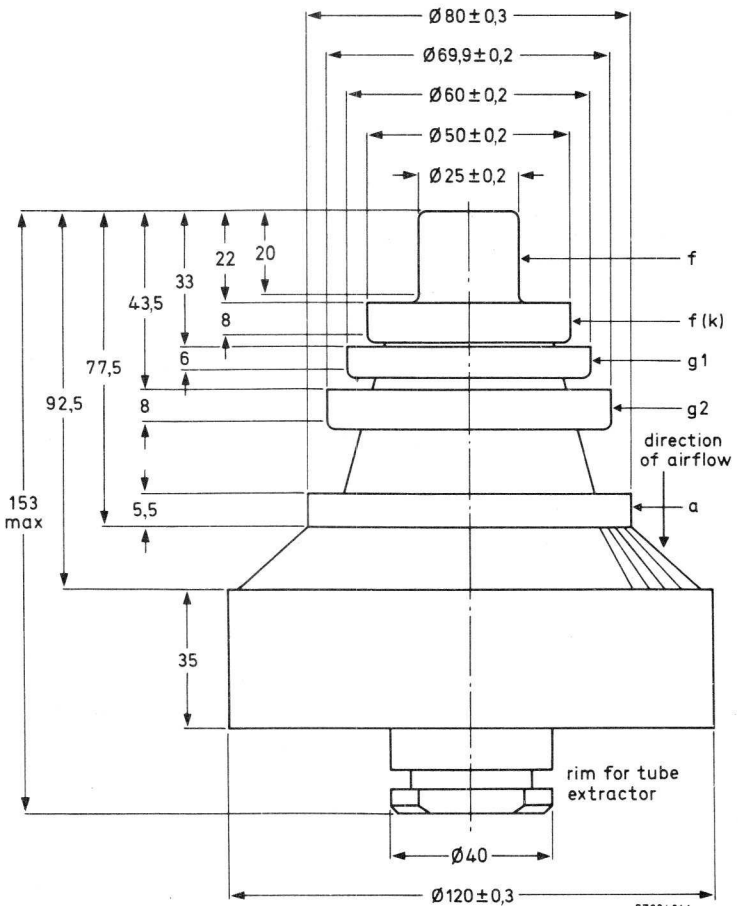

R.F. CLASS AB AMPLIFIER FOR TELEVISION TRANSPOSER SERVICE

LIMITING VALUES

Frequency	f	up to	1000	MHz
Anode voltage	V_a	max.	6	kV
Grid no. 2 voltage	V_{g2}	max.	1000	V
Grid no. 1 voltage	$-V_{g1}$	max.	200	V
Anode current, 0 dB	I_a	max.	2,5	A
Anode input power, 0 dB	W_{ia}	max.	10	kW
Anode dissipation	W_a	max.	6	kW
Grid no. 2 dissipation	W_{g2}	max.	100	W
Grid no. 1 dissipation	W_{g1}	max.	100	W
Cathode current	I_k	max.	4	A

OPERATING CONDITIONS


Negative modulation, positive synchronization, combined sound and vision
(CCIR standard G)

Frequency	f	470 to 860	MHz
Bandwidth (-1 dB)	B	9	MHz
Anode voltage	V_a	5,5	kV
Grid no. 2 voltage	V_{g2}	800	V
Grid no. 1 voltage	V_{g1}	≈ -85	V 1)
Anode current, no-signal condition	I_a	0,8	A
Anode current	I_a	1,45	A 6)
Grid no. 2 current	I_{g2}	≈ 10	mA 6)
Grid no. 1 current	I_{g1}	0	mA 6)
Output power in load, sync	W_l sync	2,2	kW 9)
Power gain	G	16,5	dB 8) 9)
Intermodulation products	d	≤ -55	dB 7)

NOTES

- 1) To be adjusted for the stated no-signal anode current. Voltage range -70 to -100 V.
- 2) With double-tuned circuit.
- 3) Black signal including line sync pulses.
- 4) A picture/sync ratio of 75/25 for the outgoing signal requires a ratio of max. 70/30 for the incoming signal, in which case the sync compression is 30/25.
- 5) Measured with a saw-tooth amplitude, running from 17% to 75% of the peak sync value, with a superimposed 4,43 MHz sine-wave having a 10% peak-to-peak value.
- 6) At a CW output power = 2,2 kW.
- 7) Three-tone test method (vision carrier -8 dB, sound carrier -10 dB, sideband carrier -16 dB with respect to peak sync = 0 dB).
- 8) Losses in input circuit taken into account.
- 9) Losses in output circuit taken into account.

7Z69622

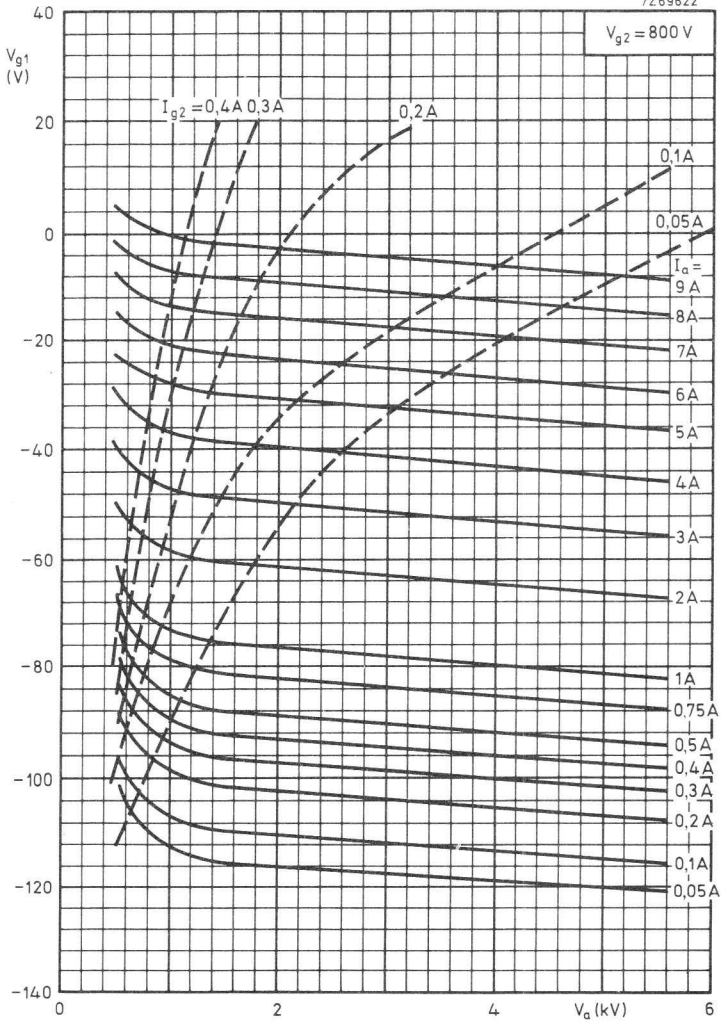

R.F. POWER TETRODE

Forced-air cooled tetrode intended for use as R.F. power amplifier and oscillator. The 7609 is shock and vibration resistant.

QUICK REFERENCE DATA							
Freq. (MHz)	C teleg.		Cag ₂ mod.		AB mod.		
	V _a (V)	W _o (W)	V _a (V)	W _o (W)	V _a (V)	W _o (W) ¹	W _o (W) ²
< 150	2000	370	1600	230	2000	580	630
	1500	260	1200	160	1500	400	440
165	1250	195	1000	140	1000	230	270
	1000	150	800	100	800	170	215
	750	110	600	80			
500	600	85	400	55	Freq. (MHz)	B television	
	1250	140				V _a (V)	W _o sync (W)
	1000	120			216	1250	250
	800	95				1000	200
	600	50				750	135

HEATING: Indirect by A.C. or D.C.; cathode oxide coated

Heater voltage	V _f	26.5 V
Heater current	I _f	570 mA
Waiting time	T _w	min. 30 s

CAPACITANCES

Grid No. 1 to all except anode	C _{g1(a)}	15.5 pF
Anode to all except grid No. 1	C _{a(g1)}	4.0 pF
Anode to grid No. 1	C _{ag1}	0.03 pF

¹) Without grid current, two tubes.

²) With grid current, two tubes.

TYPICAL CHARACTERISTICS

Anode voltage	V_a	500 V
Grid No.2 voltage	V_{g_2}	250 V
Anode current	I_a	200 mA
Transconductance	S	12 mA/V
Amplification factor	$\mu_{g_2g_1}$	5 -

TEMPERATURE LIMITS (Absolute max. rating system)

Anode temperature measured on base end of anode surface at junction with fins	t_a	max. 250 °C
Anode seal temperature	t_s	max. 200 °C
Base seals and grid No.2 seal temperature	t_s	max. 175 °C

COOLING air inlet temperature $t_i = 20$ °C, altitude $h = 0$ m ¹⁾

With an air system socket

Air flow	q	0.16 m ³ /min
Pressure drop	p_i	7 mm H ₂ O

Without an air system socket

Air flow	q	0.15 m ³ /min
Pressure drop	p_i	7 mm H ₂ O

¹⁾ At higher altitudes and ambient temperatures, an increase in air flow is necessary to maintain the respective seal temperatures and the anode temperature within the maximum ratings.

With an air system socket

The air is directed over the base seals, past the grid No.2 seal, glass envelope and anode seal, and through the radiator to provide effective cooling with minimum air flow.

Without air system socket

Adequate cooling air must be directed over the base seals, past the envelope, and through the radiator.

ACCESSORIES

Socket Johnson 124-110-1
 Chimney Johnson 124-111-1 or equivalent

SHOCK AND VIBRATION RESISTANCE

Shock

The tube is subjected 5 times in each of 4 positions to an acceleration of 500 g supplied by an NRL shock machine with the hammer lifted over an angle of 30°.

Vibration



The tube is subjected to vibration frequencies from 25 Hz to 2000 Hz with an acceleration of 10 g.

MECHANICAL DATA

Dimensions in mm

Net weight : approx. 140 g

Mounting position: any

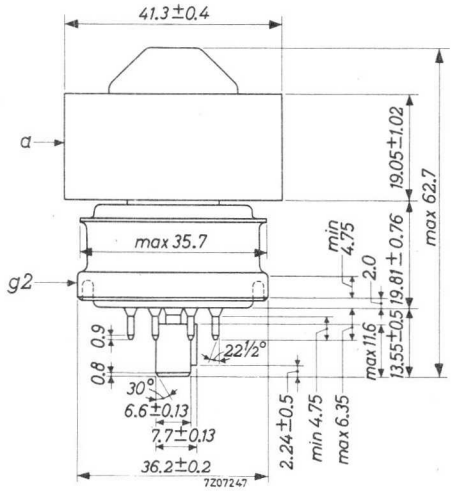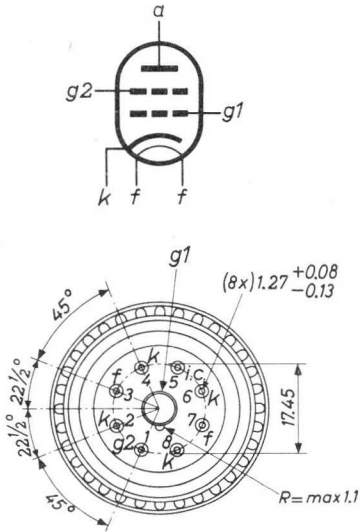

R.F. CLASS C TELEGRAPHY OR F.M. TELEPHONY

LIMITING VALUES (Absolute max. rating system)

Frequency	f	up to 150	150 to 500	MHz
Anode voltage	V_a	max. 2000	1250	V
Anode current	I_a	max. 250	250	mA
Anode dissipation	W_a	max. 250	250	W
Grid No. 2 voltage	V_{g2}	max. 300	300	V
Grid No. 2 dissipation	W_{g2}	max. 12	12	W
Grid No. 1 voltage, negative	$-V_{g1}$	max. 250	250	V
Grid No. 1 dissipation	W_{g1}	max. 2	2	W
Grid No. 1 circuit resistance	R_{g1}	max. 25	25	k Ω
Cathode to heater voltage, peak	V_{kf_p}	max. 150	150	V

OPERATING CONDITIONS

Frequency	f	up to 150	150	MHz
Anode voltage	V_a	2000	1500	V
Grid No. 2 voltage	V_{g2}	250	250	V
Grid No. 1 voltage	V_{g1}	-88	-88	V
Grid No. 1 driving voltage	V_{g1p}	110	110	V
Anode current	I_a	250	250	mA
Grid No. 2 current	I_{g2}	24	24	mA
Grid No. 1 current	I_{g1}	8	8	mA
Driving power	W_{dr}	2.5	1.5	W
Anode input power	W_{i_a}	500	375	W
Output power	W_o	370	260	W

OPERATING CONDITIONS (continued)

Frequency	f	165	165	165	165	MHz
Anode voltage	V_a	1250	1000	750	600	V
Grid No.2 voltage	V_{g_2}	250	250	250	250	V
Grid No.1 voltage	V_{g_1}	-90	-80	-80	-75	V
Grid No.1 driving voltage	$V_{g_{1p}}$	106	95	96	91	V
Anode current	I_a	200	200	200	200	mA
Grid No.2 current	I_{g_2}	20	31	37	37	mA
Grid No.1 current	I_{g_1}	11	10	11	11	mA
Driving power	W_{dr}	1.2	1	1	1	W
Anode input power	W_{i_a}	250	200	150	120	W
Output power	W_o	195	150	110	85	W

OPERATING CONDITIONS with coaxial cavity

Frequency	f	500	500	500	500	MHz
Anode voltage	V_a	1250	1000	800	600	V
Grid No.2 voltage	V_{g_2}	280	250	250	250	V
Grid No.1 voltage	V_{g_1}	-115	-110	-110	-110	V
Anode current	I_a	200	200	200	170	mA
Grid No.2 current	I_{g_2}	5	7	7	6	mA
Grid No.1 current	I_{g_1}	10	10	10	6	mA
Driving power	W_{dr}	30	25	20	15	W
Anode input power	W_{i_a}	250	200	160	100	W
Output power	W_o	140	120	95	50	W

R.F. CLASS C ANODE AND SCREEN GRID MODULATION

LIMITING VALUES (Absolute max. rating system)

Frequency	f	up to 150	150 to 500	MHz
Anode voltage	V_a	max. 1600	1000	V
Anode current	I_a	max. 200	200	mA
Anode dissipation	W_a	max. 165	165	W
Grid No. 2 voltage	V_{g2}	max. 300	300	V
Grid No. 2 dissipation	W_{g2}	max. 10	10	W
Grid No. 1 voltage, negative	$-V_{g1}$	max. 250	250	V
Grid No. 1 dissipation	W_{g1}	max. 2	2	W
Grid No. 1 circuit resistance	R_{g1}	max. 25	25	k Ω
Cathode to heater voltage, peak	V_{kfp}	max. 150	150	V

OPERATING CONDITIONS

Frequency	f	up to 150	150	MHz
Anode voltage	V_a	1600	1200	V
Grid No. 2 voltage	V_{g2}	250	250	V
Grid No. 1 voltage	V_{g1}	-118	-118	V ¹⁾
Anode current	I_a	200	200	mA
Grid No. 2 current	I_{g2}	23	23	mA
Grid No. 1 current	I_{g1}	5	5	mA
Driving power	W_{dr}	3	2	W
Anode input power	W_{ia}	320	240	W
Output power	W_o	230	160	W
Modulation depth	m	100	100	%
Modulator output power	$W_{o\ mod}$	115	80	W
Grid No. 2 mod. voltage, peak	$V_{g2p\ mod}$	200	180	V

¹⁾ Obtained from a grid resistor or from a combination of grid resistor with either fixed supply or cathode resistor.

OPERATING CONDITIONS (continued)

Frequency	f	165	165	165	165	MHz
Anode voltage	V_a	1000	800	600	400	V
Grid No.2 voltage	V_{g2}	250	250	250	250	V
Grid No.1 voltage	V_{g1}	-105	-100	-95	-90	V
Anode current	I_a	200	200	200	200	mA
Grid No.2 current	I_{g2}	20	25	35	40	mA
Grid No.1 current	I_{g1}	15	10	8	7	mA
Driving power	W_{dr}	2	1.5	1	1	W
Anode input power	W_{ia}	200	160	120	80	W
Output power	W_o	140	100	80	55	W
Modulation depth	m	100	100	100	100	%
Modulator output power	$W_{o\text{mod}}$	70	50	40	27.5	W
Grid No.2 mod.voltage, peak	$V_{g2p\text{mod}}$	170	160	150	140	V

A.F. CLASS AB AMPLIFIER AND MODULATOR

LIMITING VALUES (Absolute max. rating system)

Anode voltage	V_a	max. 2000	V
Anode current	I_a	max. 250	mA
Anode dissipation	W_a	max. 250	W
Grid No.2 voltage	V_{g2}	max. 400	V
Grid No.2 dissipation	W_{g2}	max. 12	W
Grid No.1 dissipation	W_{g1}	max. 2	W
Grid No.1 circuit resistance	R_{g1}	max. 100	$k\Omega$
Cathode to heater voltage, peak	$V_{kf\text{p}}$	max. 150	V

OPERATING CONDITIONS two tubes in push-pull

Anode voltage	V_a	1000		800	V
Grid No.2 voltage	V_{g_2}	300		300	V
Grid No.1 voltage	V_{g_1}	-43		-40	V
Load resistance	$R_{aa\sim}$	4250		4400	Ω
Driving voltage	V_{ggp}	0	86	0	80 V
Anode current	I_a	2x82.5	2x225	2x105	2x218 mA
Grid No.2 current	I_{g_2}	-	2x26	-	2x38 mA
Grid No.1 current	I_{g_1}	0	0	0	0 mA
Anode input power	W_{i_a}	2x82.5	2x225	2x84	2x175 W
Anode dissipation	W_a	2x82.5	2x110	2x84	2x90 W
Output power	W_o	0	230	0	170 W
Anode voltage	V_a	2000		1500	V
Grid No.2 voltage	V_{g_2}	300		300	V
Grid No.1 voltage	V_{g_1}	-50		-50	V
Load resistance	$R_{aa\sim}$	8760		6570	Ω
Driving voltage	V_{ggp}	0	100	0	100 V
Anode current	I_a	2x50	2x235	2x50	2x228 mA
Grid No.2 current	I_{g_2}	-	2x18	-	2x21 mA
Grid No.1 current	I_{g_1}	0	0	0	0 mA
Anode input power	W_{i_a}	2x100	2x470	2x75	2x340 W
Anode dissipation	W_a	2x100	2x180	2x75	2x140 W
Output power	W_o	0	580	0	400 W

OPERATING CONDITIONS (continued)

Anode voltage	V_a	1000		800	V
Grid No.2 voltage	V_{g_2}	300		300	V
Grid No.1 voltage	V_{g_1}	-45		-40	V
Load resistance	$R_{aa\sim}$	3950		3140	Ω
Driving voltage	V_{ggp}	0	98	0	90 V
Driving power	W_{dr}	-	0.15	-	0.15 W
Anode current	I_a	2x83	2x247	2x105	2x250 mA
Grid No.2 current	I_{g_2}	-	2x29	-	2x40 mA
Anode input power	W_{i_a}	2x83	2x247	2x84	2x200 W
Anode dissipation	W_a	2x83	2x112	2x84	2x93 W
Output power	W_o	0	270	0	215 W
<hr/>					
Anode voltage	V_a	2000		1500	V
Grid No.2 voltage	V_{g_2}	300		300	V
Grid No.1 voltage	V_{g_1}	-50		-50	V
Load resistance	$R_{aa\sim}$	8100		5970	Ω
Driving voltage	V_{ggp}	0	106	0	106 V
Driving power	W_{dr}	-	0.2	-	0.2 W
Anode current	I_a	2x50	2x250	2x50	2x250 mA
Grid No.2 current	I_{g_2}	-	2x18	-	2x18 mA
Anode input power	W_{i_a}	2x100	2x500	2x75	2x375 W
Anode dissipation	W_a	2x100	2x185	2x75	2x155 W
Output power	W_o	0	630	0	440 W

R.F. CLASS B AMPLIFIER FOR TELEVISION SERVICE, negative modulation, positive synchronisation

LIMITING VALUES (Absolute max. rating system)


Frequency	f	54 to 216	MHz
Anode voltage	V_a	max.	1250 V
Anode current	I_a	max.	250 mA
Anode dissipation	W_a	max.	250 W
Grid No.2 voltage	V_{g2}	max.	250 V
Grid No.2 dissipation	W_{g2}	max.	12 W
Grid No.1 voltage, negative	$-V_{g1}$	max.	400 V
Grid No.1 dissipation	W_{g1}	max.	2 W
Grid No.1 circuit resistance	R_{g1}	max.	25 $k\Omega$ ¹⁾
Cathode to heater voltage, peak	V_{kf_p}	max.	150 V

OPERATING CONDITIONS


Bandwidth	B (-1.5 dB)	5	5	5	MHz
Anode voltage	V_a	1250	1000	750	V
Grid No.2 voltage	V_{g2}	300	300	300	V
Grid No.1 voltage	V_{g1}	-70	-65	-60	V
Driving voltage, peak to peak	V_{g1pp} sync	100	95	85	V
	V_{g1pp} black	75	70	65	V
Anode current	I_a sync	305	330	335	mA
	I_a black	230	240	245	mA
Grid No.2 current	I_{g2} sync	45	45	50	mA
	I_{g2} black	10	15	20	mA
Grid No.1 current	I_{g1} sync	25	20	15	mA
	I_{g1} black	4	4	4	mA
Driving power	W_{dr} sync	9	8	7	W
	W_{dr} black	5.5	4.7	4.25	W
Output power in load	W_l sync	250	200	135	W
	W_l black	140	110	75	W


¹⁾ Cathode bias is not recommended.


7Z07255

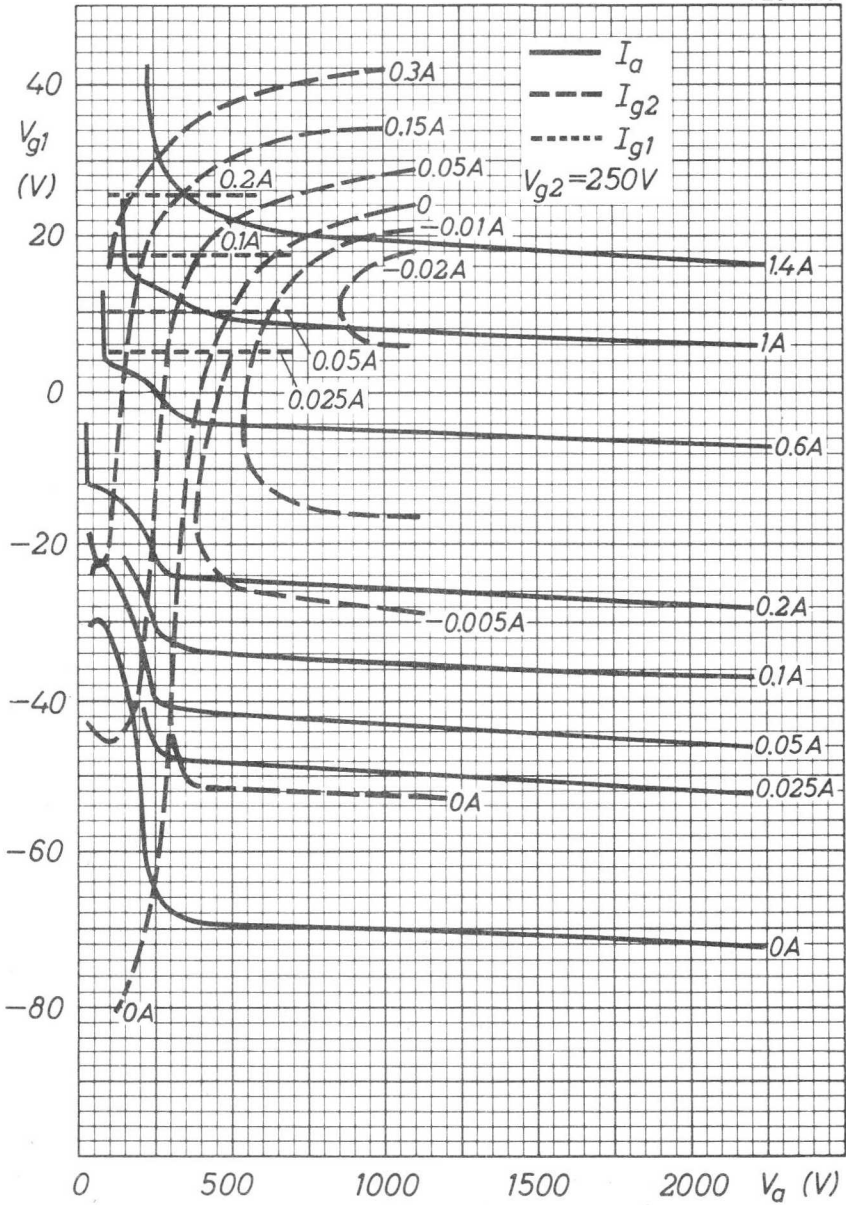

7Z07248

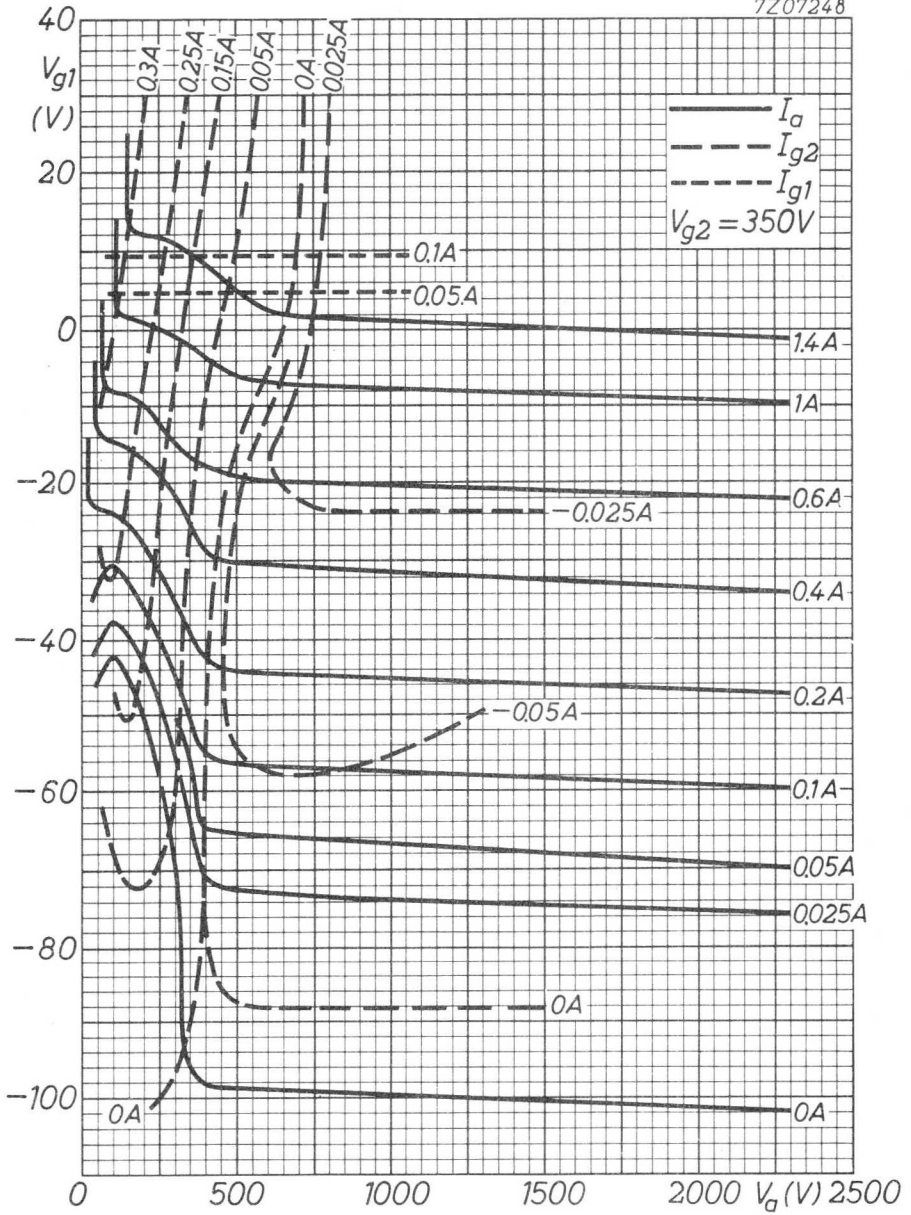

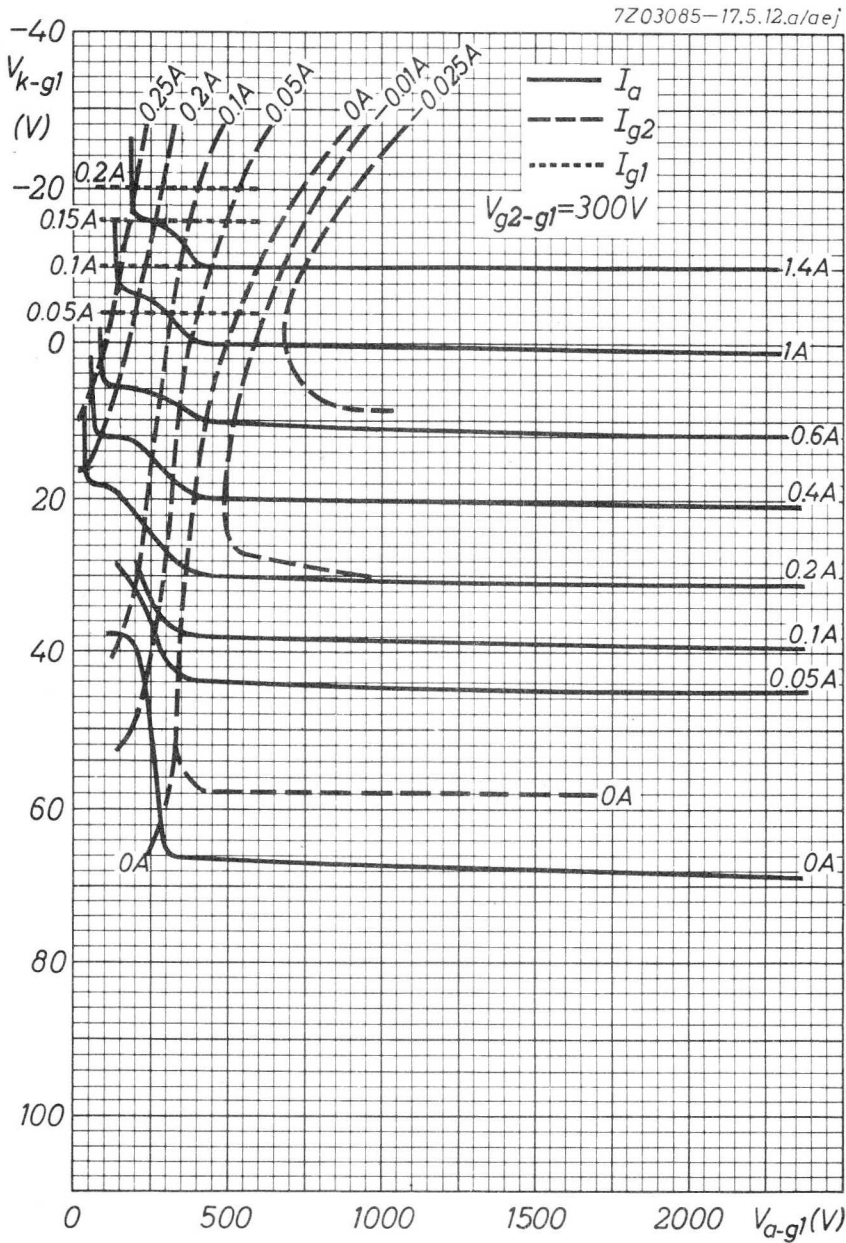

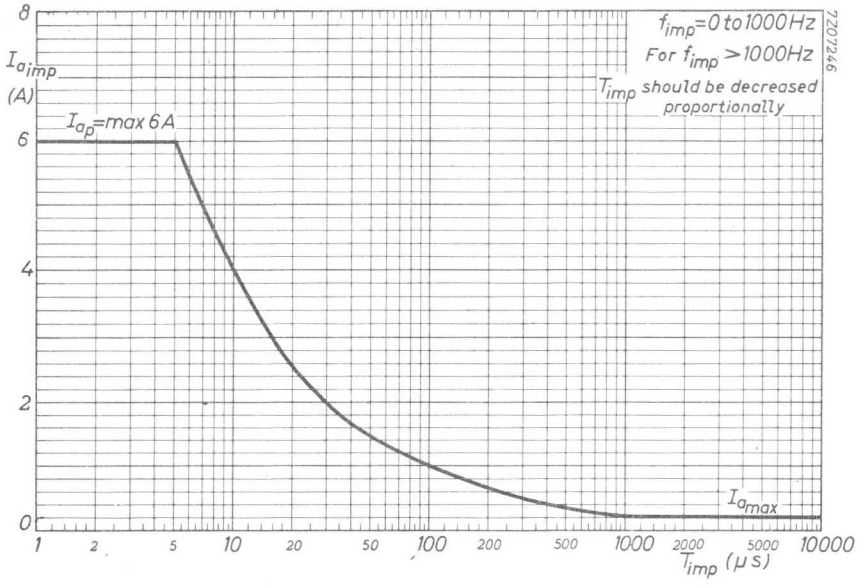

R.F. POWER TETRODE

Forced-air cooled tetrode in ceramic-metal construction intended for use in S.S.B. transmitters.

Freq. (MHz)	QUICK REFERENCE DATA		
	S. S. B.		
	V_a (V)	W_f (W) PEP	d_3 (dB)
7	2000	271	-26
7	2000	436	-23

HEATING: indirect; oxide coated cathode

Heater voltage	V_f	25.6	V $\pm 5\%$ ¹⁾
Heater current	I_f	560	mA
Waiting time	T_w	min. 30	s

CAPACITANCES

Grid No.1 to all except anode	$C_{g_1(a)}$	17.0	pF
Anode to all except grid No.1	$C_{a(g_1)}$	4.7	pF
Anode to grid No.1	C_{ag_1}	0.06	pF

TYPICAL CHARACTERISTICS

Anode voltage	V_a	500	V
Grid No.2 voltage	V_{g_2}	250	300 V
Anode current	I_a	200	mA
Grid No.2 current	I_{g_2}	-	50 mA
Transconductance	S	12	- mA/V
Amplification factor	$\mu_{g_2g_1}$	5.2	

TEMPERATURE LIMITS (Absolute max. rating system)

Temperature of all seals	t_s	max. 250	°C
Temperature of anode core	t_a	max. 250	°C

¹⁾ Short term variations of $\pm 10\%$ will not damage the tube, but variations in performance must be expected.

COOLING: Forced air

Anode dissipation	Height above sea level	Inlet temperature	Min. required air flow	Pressure drop
W_a	h	t_i	q min	p_i
250 W	0 m	50 °C	0.15 m ³ /min	15 mm H ₂ O
250 W	3000 m	50 °C	0.19 m ³ /min	22 mm H ₂ O

ACCESSORIES

Socket

Johnson 124-110-1



Chimney

Johnson 124-111-1 or equivalent

MECHANICAL DATA

Net weight: 120 g

Mounting position: any

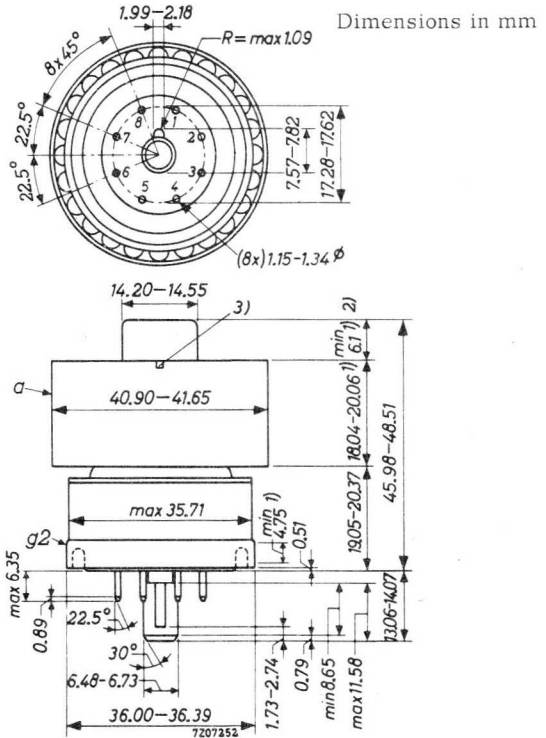

- 1) Contact surface
- 2) Use this contact surface for frequencies up to 30 MHz only
- 3) Index aligned with grid No. 1 guide lug

R.F. SINGLE SIDE BAND AMPLIFIER

LIMITING VALUES (Absolute max. rating system)

Frequency	f	up to	500 MHz
Anode voltage	V_a	max.	2000 V
Anode current	I_a	max.	250 mA
Anode dissipation	W_a	max.	250 W
Grid No. 2 voltage	V_{g_2}	max.	400 V
Grid No. 2 dissipation	W_{g_2}	max.	12 W
Grid No. 1 voltage, negative	$-V_{g_1}$	max.	150 V
Cathode to heater voltage, peak	V_{kf_p}	max.	150 V



OPERATING CONDITIONS

Frequency	f	7	MHz
Anode voltage	V_a	2000	V
Grid No. 2 voltage	V_{g_2}	350	V
Grid No. 1 voltage	V_{g_1}	-57.5	V
Load resistance	$R_{a \sim}$	4000	Ω
		zero signal	single tone
Driving voltage, peak	$V_{g_{1p}}$	0	45.3 V
Anode current	I_a	100	250 mA
Grid No. 2 current	I_{g_2}	-1.22	-4.1 mA
Anode input power	W_{i_a}	200	500 W
Output power in the load	W_l (PEP)	-	271 W
Third order intermodulation distortion	d_3	-	-26 dB
Fifth order intermodulation distortion	d_5	-	-54 dB

OPERATING CONDITIONS (continued)

		zero signal	single tone ¹⁾	double tone	
Frequency	f		7		MHz
Anode voltage	V_a		2000		V
Grid No.2 voltage	V_{g2}		350		V
Grid No.1 voltage	V_{g1}		-72		V
Load resistance	$R_a \sim$		3570		Ω
Driving voltage, peak	V_{g1p}	0	62	62	V
Anode current	I_a	75	310	204	mA
Grid No.2 current	I_{g2}	-0.85	14	2.4	mA
Anode input power	W_{i_a}	150	620	407	W
Output power in the load	W_l (PEP)	-	436	436	W
Third order intermodulation distortion	d3	-	-	-23	dB
Fifth order intermodulation distortion	d5	-	-	-37	dB

¹⁾ Conditions in this column are permissible only for a signal having a peak to average power ratio which equals or exceeds 2 to 1 (e.g. two tone conditions) and for tune up during maximum 2 min.

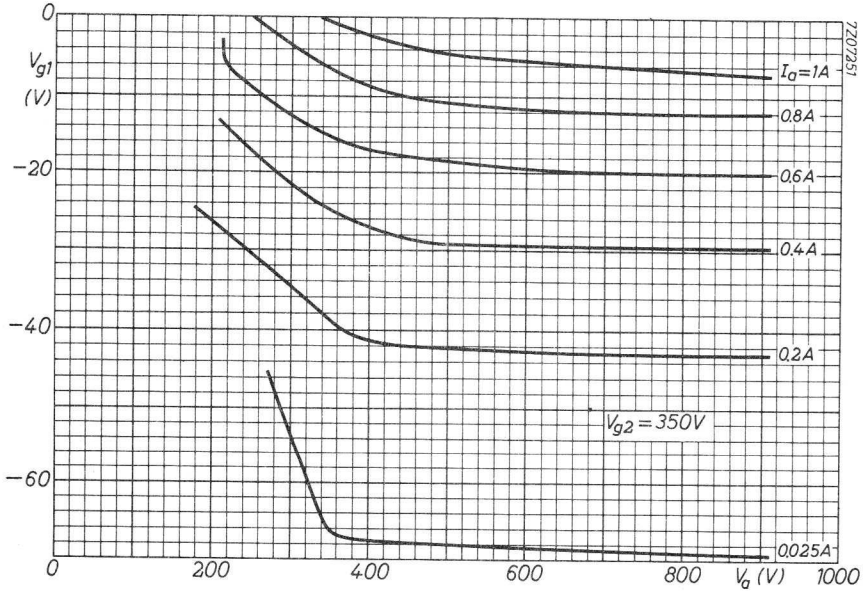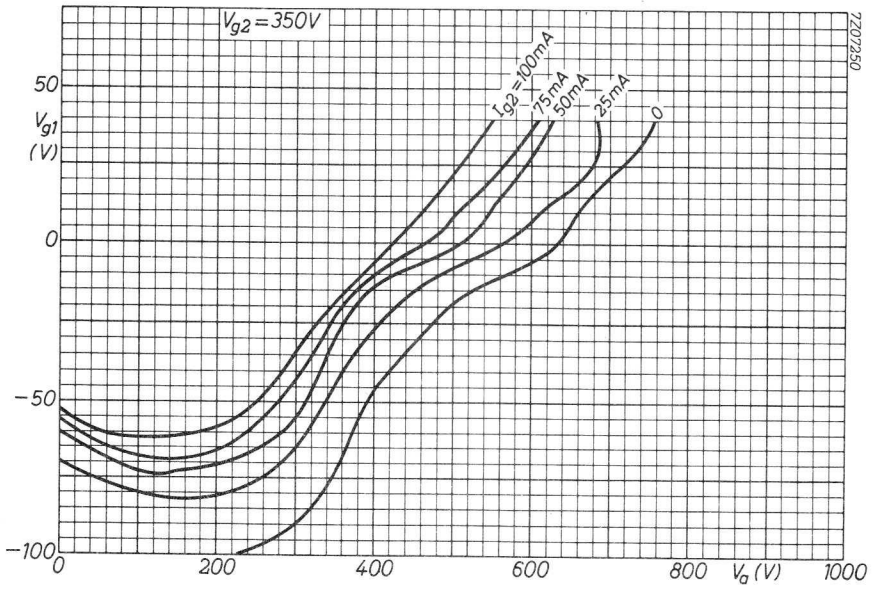

Amplifier circuit assemblies



AMPLIFIER CIRCUIT ASSEMBLIES

COOLING: forced air

type	band	output power	carrier frequency range	power gain	tube used	dimensions in mm
		kW	MHz	x		
Vision						
40771	IV + V	0,5	470 to 860	32	YD1335	627 x 239 x 182
40776	III	1,15	170 to 260	96	YL1540	600 x 345 x 320
40755	I	1,2	48 to 83	14	YL1440	516 x 323 x 323
40743	III	1,55	170 to 260	23	YL1440	673 x 333 x 323
40757	I	6,25	55,25 to 67,25 77,25 to 83,25	16 18,5	YL1420	700 x 500 x 500
40745	III	8,6	170 to 230	24	YL1420	600 x 620 x 370
40747	III	18,4	170 to 230	25	YL1430	600 x 620 x 370
40759	I	13,2	55,25 to 67,25	20	YL1430	700 x 500 x 500
	I	20	77,25 to 83,25	24	YL1520	
40768	III	27,5	170 to 230	28,5	YL1520	685 x 415 x 650
Sound						
40756	I	2,4	53 to 88	26	YL1440	516 x 323 x 323
40778	II	2,4	88 to 108	200	YL1540	330 x 300 x 300
40777	III	2,4	170 to 260	200	YL1540	600 x 345 x 320
40744	III	2,4	170 to 260	26	YL1440	673 x 333 x 323
40758	I	10,5	53 to 88	32	YL1420	700 x 500 x 500
40775	II	10,5	88 to 108	200	YL1470	400 x 360 x 555
40746	III	10,5	170 to 230	32	YL1420	600 x 620 x 370
40760	I	13	53 to 88	32,5	YL1430	700 x 500 x 500
	I	25		31	YL1520	
40748	III	13	170 to 230	33	YL1430	600 x 620 x 370
Vision and sound						
40770	IV + V	35 W	470 to 860	100	YD1300	482 x 246 x 88
		55 W	470 to 860	63	YD1302	
40771	IV + V	0,11	470 to 860	40	YD1334	525 x 340 x 148
		0,22	470 to 860	40	YD1336	
40743	III	0,55	175 to 225	30	YL1440	673 x 333 x 323
40745	III	2,5	175 to 225	30	YL1420	600 x 620 x 370
40747	III	7	175 to 225	32	YL1430	600 x 620 x 370
40768	III	10,5	175 to 225	42	YL1520	685 x 415 x 650

BAND III AMPLIFIER CIRCUIT ASSEMBLY FOR YL1440 VISION AND COMBINED SOUND AND VISION

Continuously tunable cavity-type circuit assembly to be used with YL1440 to form a broad-band grounded-grid linear amplifier for television signals in Band III.

The unit thus obtained can be put to good use in any of the principal monochrome and colour television systems.

QUICK REFERENCE DATA

QUICK REFERENCE DATA			
Class AB linear amplifier (vision)			
Frequency	170	to 260	MHz
Anode voltage		3	kV
Output power in load, sync		1,55	kW
Power gain		26	
Frequency	170	to 260	MHz
Anode voltage		2,5	kV
Output power in load, sync		0,7	kW
Power gain		23	
Class AB amplifier for television transposer service			
Frequency	175	to 225	MHz
Anode voltage		2,5	kV
Output power in load, sync		0,55	kW
Power gain		30	

FREQUENCY RANGE

170 to 247 MHz continuously tunable. Up to 260 MHz with minor, channel dependent, modifications.

OPERATING CONDITIONS (For YL1440)


For detailed operating conditions reference is made to the data sheets for tube type YL1440.

MECHANICAL DATA

Dimensions in mm

Dimensions : approx. 673 x 333 x 323 mm³

Net weight : approx. 38 kg

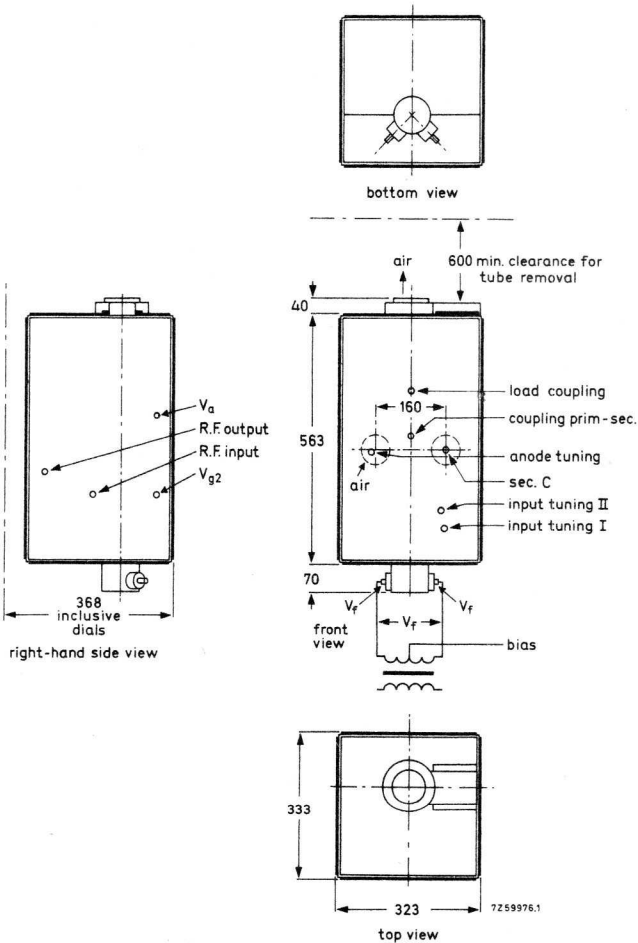

COOLING

See cooling curves.

Direction of airflow: see drawing page 6.

Either sucking and blowing is possible via connections on the top panel and the rear panel.

IMPEDANCES

Input : 50 Ω (coaxial female connector type N)

Output : 50 Ω (coaxial female connector type HN)

ENVIRONMENTAL DATA

Ambient temperature : 0 $^{\circ}\text{C}$ to +55 $^{\circ}\text{C}$

Altitude : max. 3000 m

Relative humidity : up to 90 %

VOLTAGE STANDING-WAVE RATIO

Input : max. permissible 1.3 for acceptable performance

Output : max. permissible 1.3 for acceptable performance


ADDITIONAL COMPONENTSa) Delivered with the assembly

Tube extractor	7322 120 02140
Mating male input connector	Radiall type N
Mating male output connector	Radiall type R7050
Mating connector for anode voltage	Radiall type R13060
Mating connector for screen grid voltage	Radiall type R9510




b) Recommended



The use of circulator 2722 162 01191 (170 to 200 MHz) or 2722 162 1201 (200 to 230 MHz) is recommended.

CIRCUIT DIAGRAM

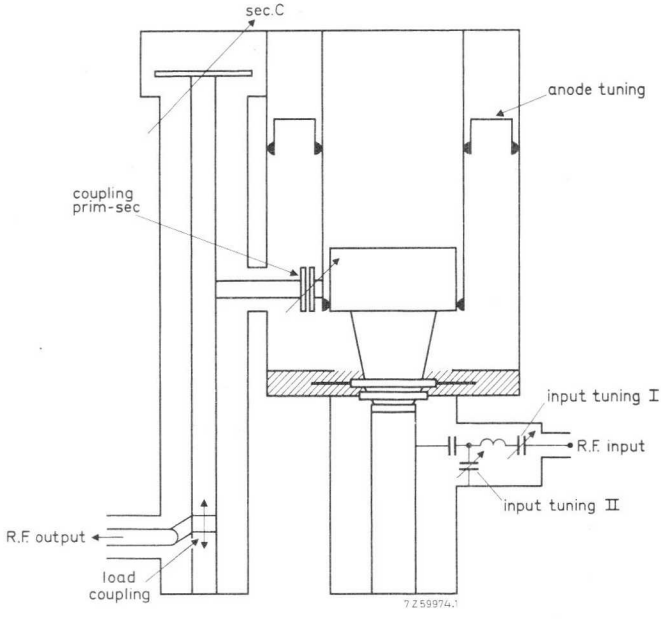

Cooling curves

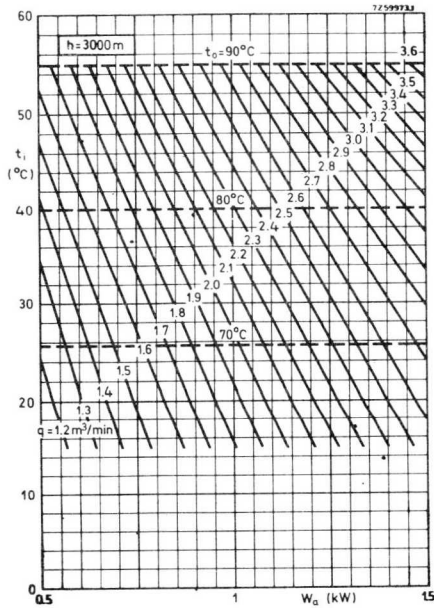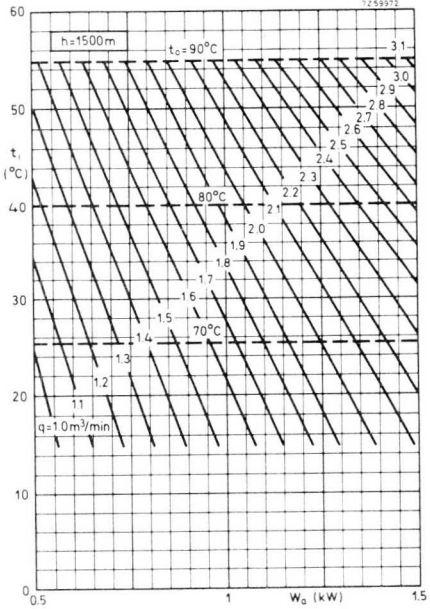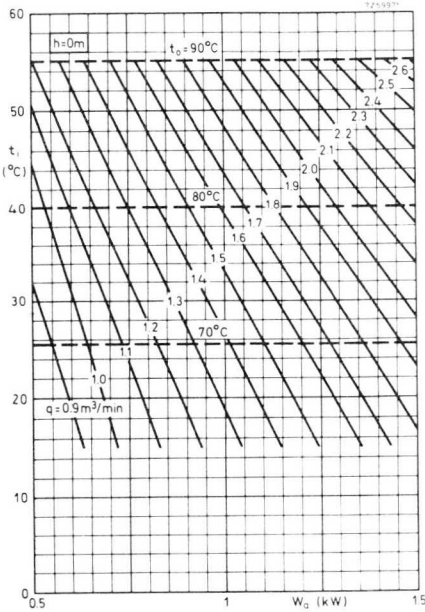

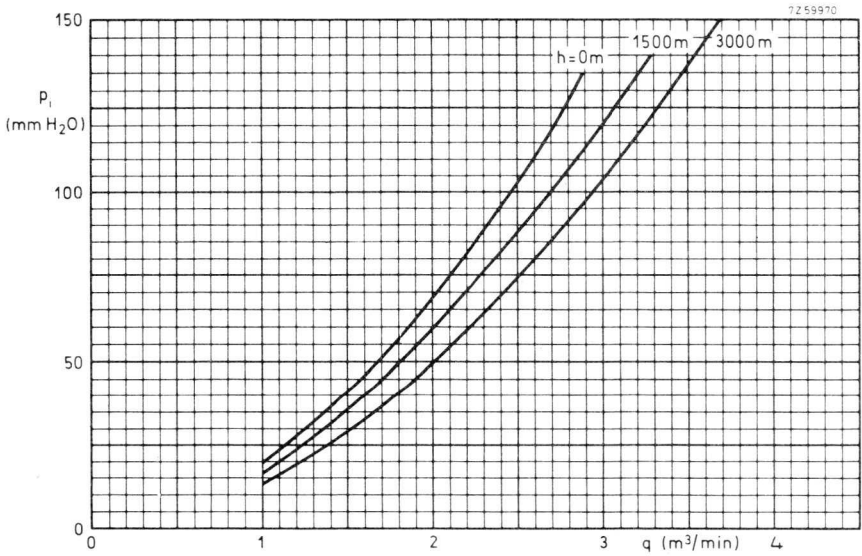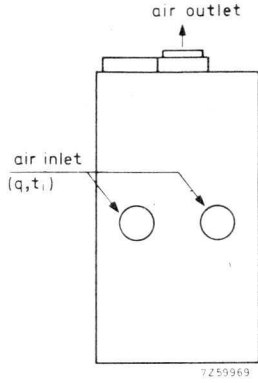

BAND III AMPLIFIER CIRCUIT ASSEMBLY FOR YL1440 SOUND

Continuously tunable cavity-type circuit assembly to be used with YL1440 to form a grounded-grid amplifier of frequency-modulated signals in Band III.

QUICK REFERENCE DATA			
Frequency (MHz)	Class B amplifier (sound)		
	V_a (kV)	W_l (kW) CCIR system	Power gain
70 to 260	3.5	2.4	26

FREQUENCY RANGE

170 to 260 MHz, continuously tunable.


OPERATING CONDITIONS (For tube YL1440)

For detailed operating conditions reference is made to the data sheets for tube type YL1440.

MECHANICAL DATA

Dimensions in mm

Dimensions : approx. 673 x 333 x 323 mm³
Net weight : approx. 33 kg

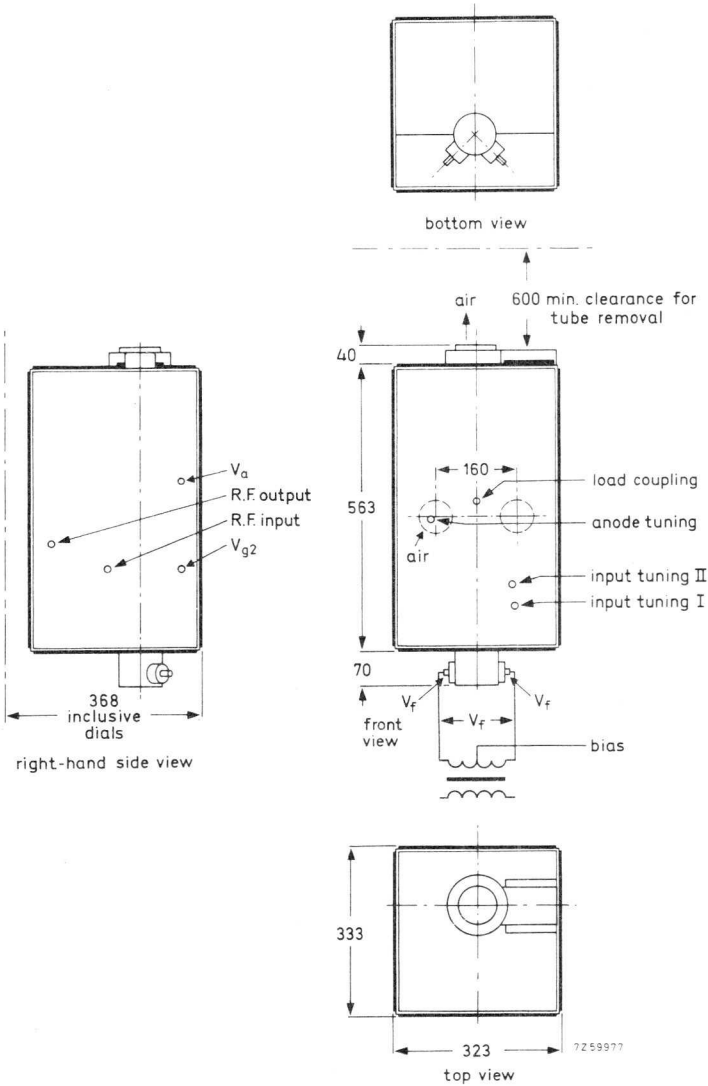

COOLING

See cooling curves.

Direction of airflow: see drawing page 6.

Either sucking and blowing is possible via connections on the top panel and the rear panel.

IMPEDANCES

Input : 50 Ω (coaxial female connector type N)

Output : 50 Ω (coaxial female connector type HN)

ENVIRONMENTAL DATA

Ambient temperature : 0 °C to +55 °C

Altitude : max. 3000 m

Relative humidity : up to 90 %

VOLTAGE STANDING-WAVE RATIO

Input : max. permissible 1.3 for acceptable performance

Output : max. permissible 1.3 for acceptable performance


ADDITIONAL COMPONENTSa) Delivered with the assembly

Tube extractor	7322 120 02140
Mating male input connector	Radiall type N
Mating male output connector	Radiall type R7050
Mating connector for anode voltage	Radiall type R13060
Mating connector for screen grid voltage	Radiall type R9510




b) Recommended


The use of circulator 2722 162 01191 (170 to 200 MHz) or 2722 162 01201 (200 to 230 MHz) is recommended.

CIRCUIT DIAGRAM

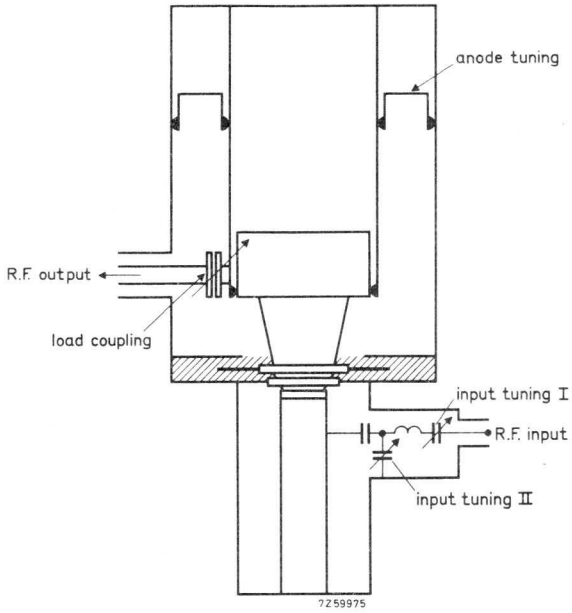


Cooling curves

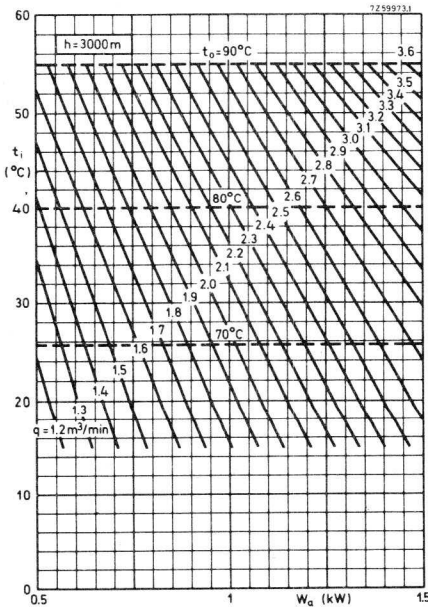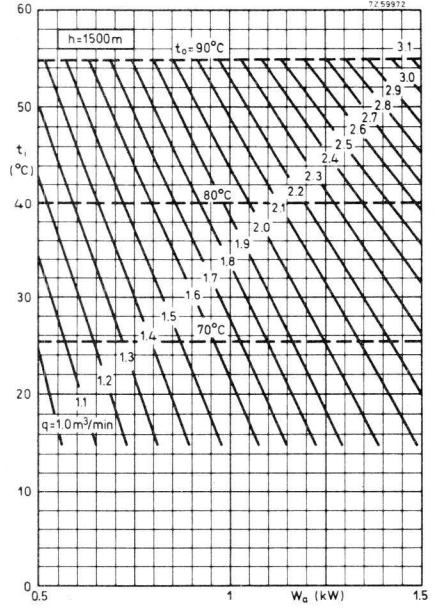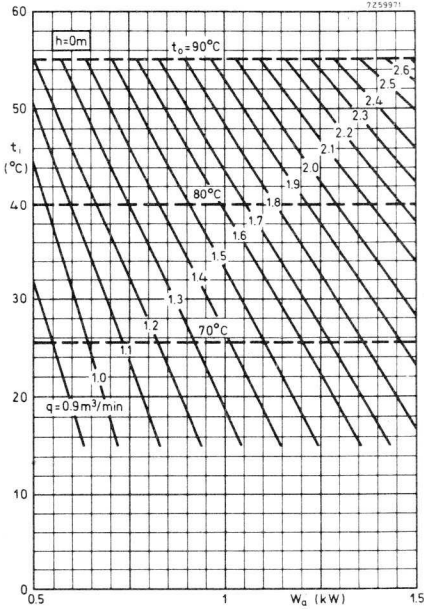

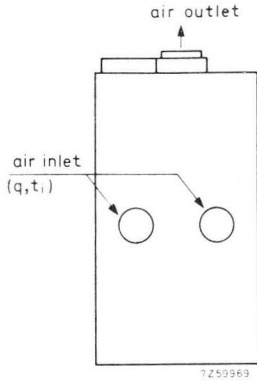

7Z59963

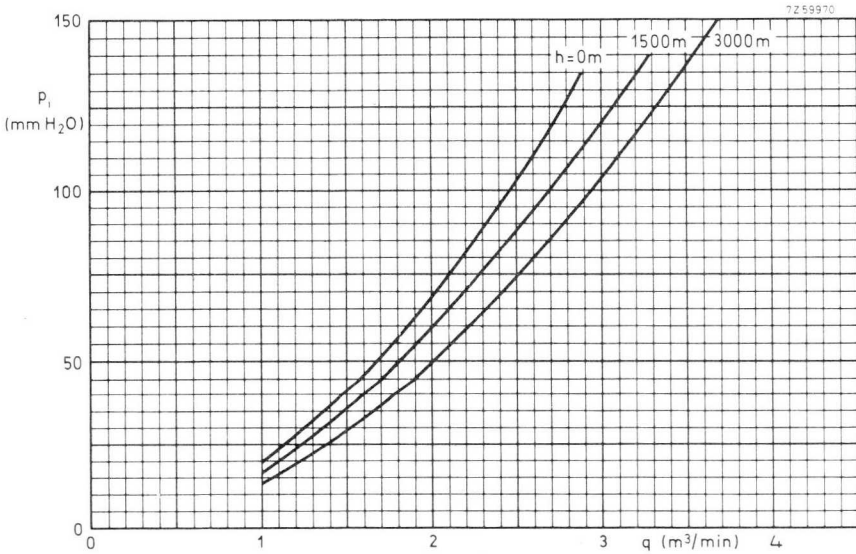

7Z59970

BAND III AMPLIFIER CIRCUIT ASSEMBLY FOR YL1420 VISION AND COMBINED SOUND AND VISION

Continuously tunable cavity-type circuit assembly to be used with YL1420 to form a broad-band grounded-grid linear amplifier for television signals in Band III. The unit thus obtained can be put to good use in any of the principal monochrome and colour television systems.

QUICK REFERENCE DATA			
Class AB linear amplifier (vision)			
Frequency	170	to	230 MHz
Anode voltage			5 kV
Output power in load, sync			8,6 kW
Power gain			24
Frequency	170	to	230 MHz
Anode voltage			4 kV
Output power in load, sync			6,25 kW
Power gain			24
Class AB amplifier for television transposer service			
Frequency	175	to	225 MHz
Anode voltage			4 kV
Output power in load, sync			2,5 kW
Power gain			30

FREQUENCY RANGE

170 to 230 MHz continuously tunable.

OPERATING CONDITIONS (For YL1420)





For detailed operating conditions reference is made to the data sheets for tube type YL1420.

MECHANICAL DATA





Dimensions in mm

Dimensions: approx. 600 x 620 x 370 mm³


Net weight : approx. 67 kg

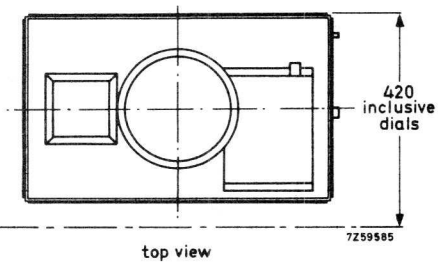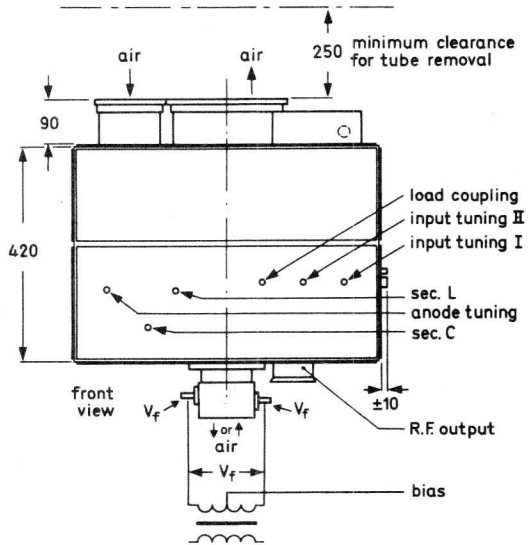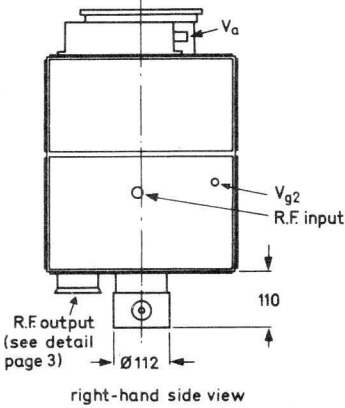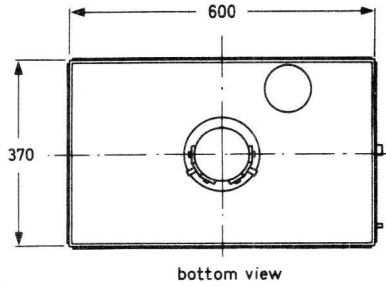

R. F. output connector

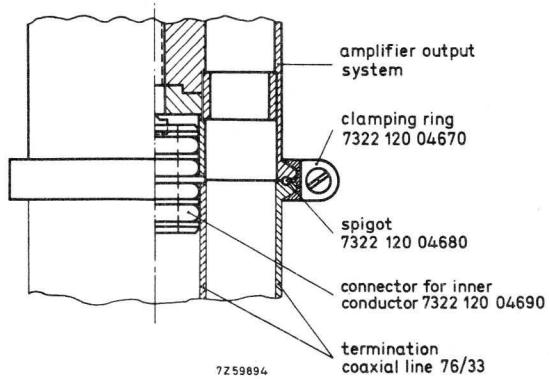

connector for inner conductor 7322 120 04690

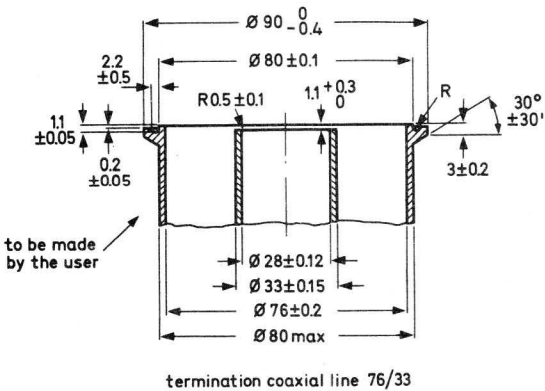

COOLING

See cooling curves.

Direction of airflow: see drawing page 7.

Either sucking and blowing is possible via connections on the top panel.

IMPEDANCES

Input : 50 Ω (coaxial female connector, type N)

Output : 50 Ω (coaxial connector: see drawing page 3).

ENVIRONMENTAL DATA

Ambient temperature: 0 °C to +55 °C

Altitude : max. 3000 m

Relative humidity : up to 90%

VOLTAGE STANDING WAVE RATIO

Input : max. permissible 1,3 for acceptable performance

Output: max. permissible 1,3 for acceptable performance

ADDITIONAL COMPONENTSa) Delivered with the assembly



Tube extractor	7322 120 07850
Mating male input connector	Radial type N
Output connector	
connector for inner conductor	7322 120 04690
spigot for outer conductor	7322 120 04680
clamping ring for outer conductor	7322 120 04670
Mating connector for anode voltage	Radial type R13060
Mating connector for screen grid voltage	Radial type R9510
Coupling loop for 175, 25 MHz	8222 032 57140
Coupling loop for remaining frequencies except 223, 25 MHz ¹⁾	8222 032 57150
Spanner for fitting the coupling loop	

b) Recommended




The use of circulator 2722 162 01191 (170 to 200 MHz)
or 2722 162 01201 (200 to 230 MHz) is recommended.




1) For 223, 25 MHz a different coupling loop is needed, which can be supplied on request.

CIRCUIT DIAGRAM

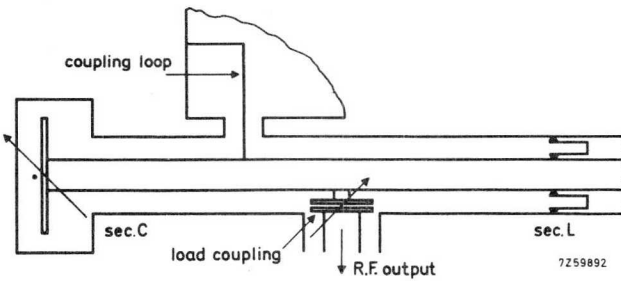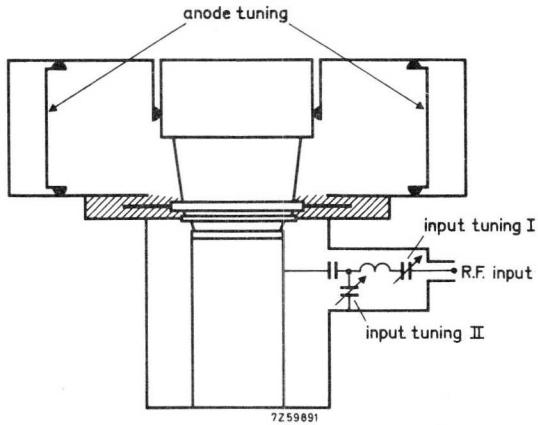

Cooling curves

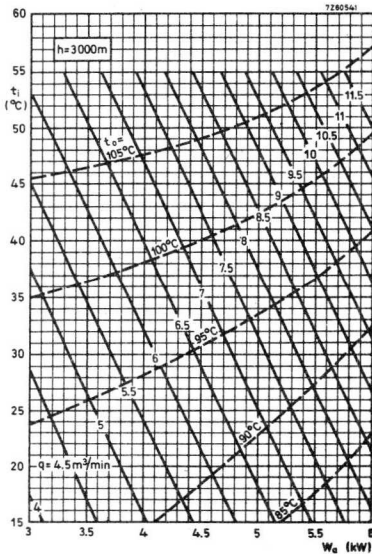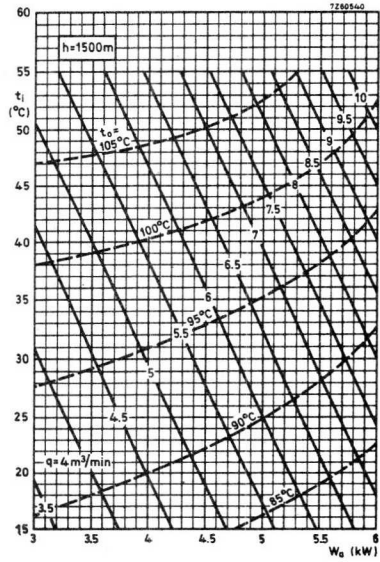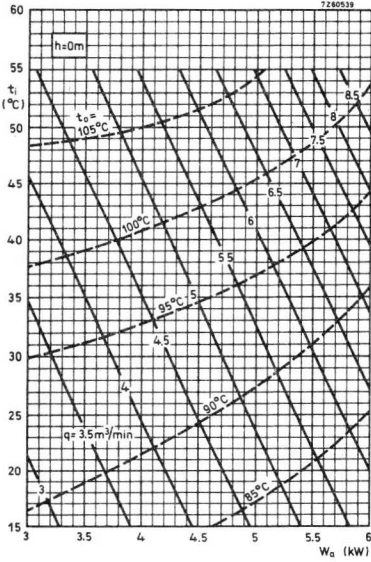

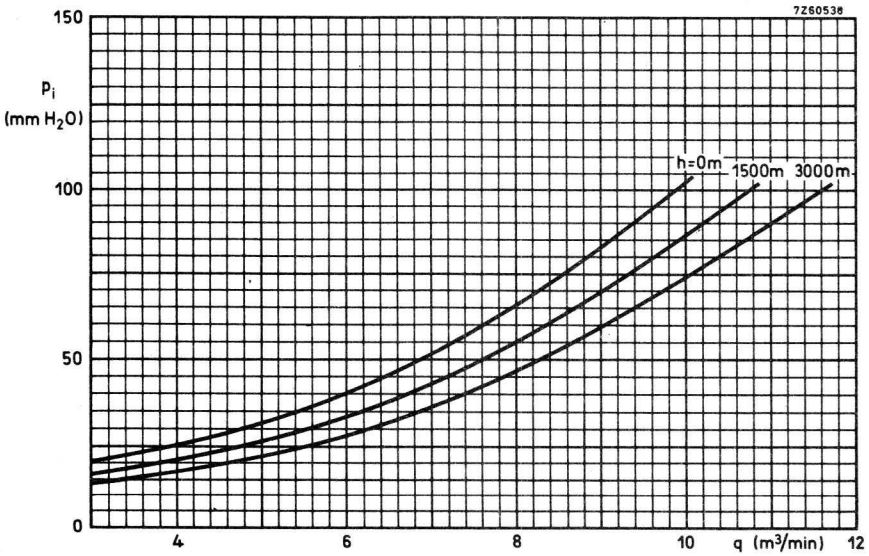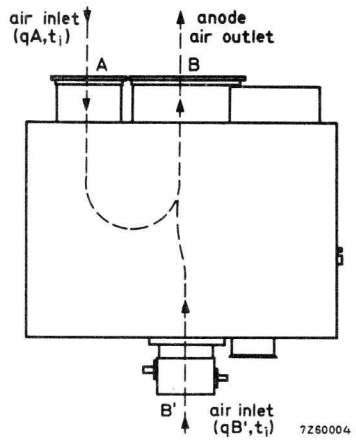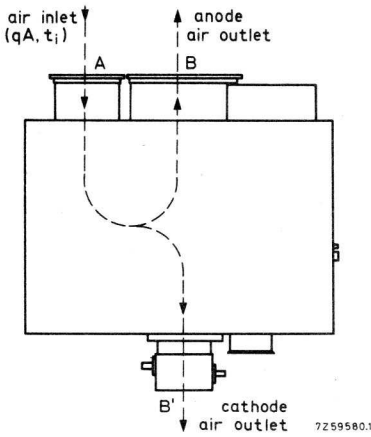

Pressure drop p_i across cavity with YL1420 as a function of airflow q .

p_i = pressure drop from plane A to plane B or B'

For blowing $q = q_A$

For sucking $q = q_A + q_{B'}$

BAND III AMPLIFIER CIRCUIT ASSEMBLY FOR YL1420 SOUND

Continuously tunable cavity-type circuit assembly to be used with YL1420 to form a grounded-grid amplifier of frequency-modulated signal in Band III.

QUICK REFERENCE DATA			
Frequency (MHz)	Class B amplifier (sound)		
	V_a (kV)	W_l (kW) CCIR system	Power gain
170 to 230	7	10.5	32

FREQUENCY RANGE

170 to 230 MHz, continuously tunable.

OPERATING CONDITIONS (For YL1420)





For detailed operating conditions reference is made to the data sheets for tube type YL1420.

MECHANICAL DATA

Dimensions in mm


Dimensions : approx. 600 x 620 x 370 mm³

Net weight : approx. 54 kg

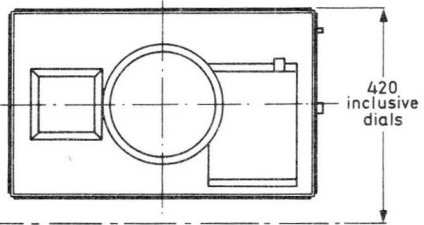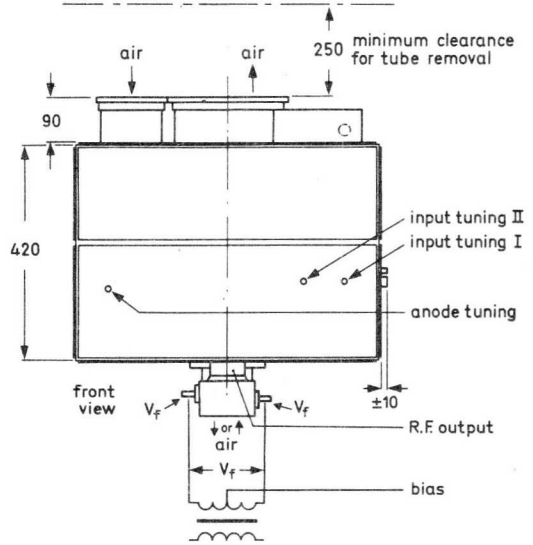
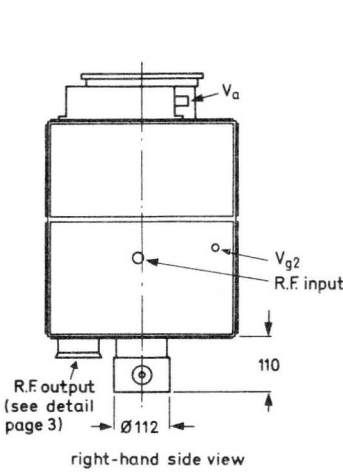
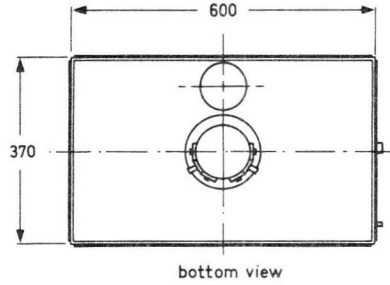


7259599


R. F. output connector

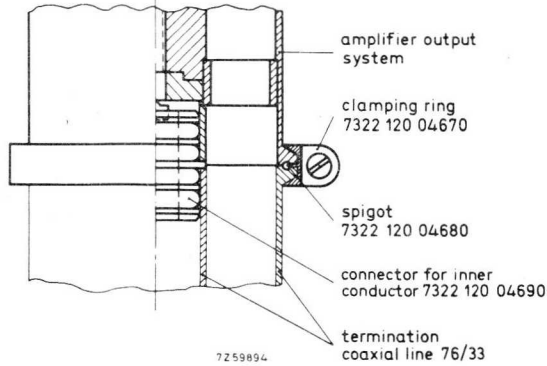

↑ to amplifier output system



connector for inner conductor 7322 120 04690

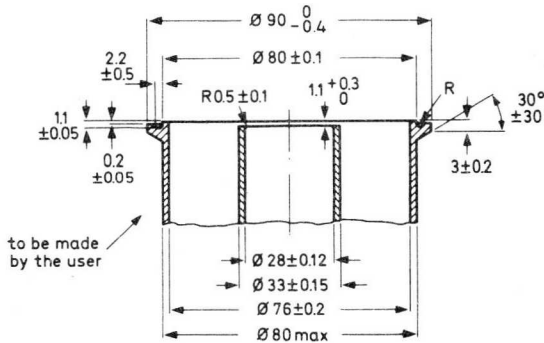

termination coaxial line 76/33

COOLING

See cooling curves.

Direction of airflow: see drawing page 7.

Both sucking and blowing is possible via connection on the top panel.

IMPEDANCES

Input : 50 Ω (coaxial female connector, type N)

Output : 50 Ω (coaxial connector: see drawing page 3)

ENVIRONMENTAL DATA

Ambient temperature : 0 $^{\circ}\text{C}$ to +55 $^{\circ}\text{C}$

Altitude : max. 3000 m

Relative humidity : up to 90 %

VOLTAGE STANDING-WAVE RATIO

Input : max. permissible 1.3 for acceptable performance

Output : max. permissible 1.3 for acceptable performance



ADDITIONAL COMPONENTSa) Delivered with the assembly

Tube extractor input connector	7322 120 07850
Mating male input connector	Radiall type N
Output connector	
connector for inner conductor	7322 120 04690
spigot for outer conductor	7322 120 04680
clamping ring for outer conductor	7322 120 04670
Mating connector for anode voltage	Radiall type R13060
Mating connector for screen grid voltage	Radiall type R9510




Recommended




The use of circulator 2722 162 01191 (170 to 200 MHz) or 2722 162 01201 (200 to 230 MHz) is recommended.

CIRCUIT DIAGRAM

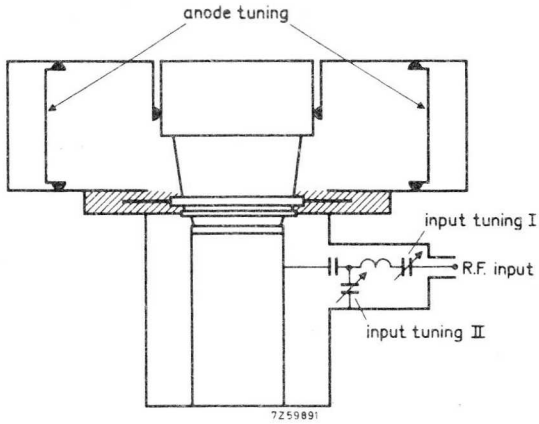

Cooling curves

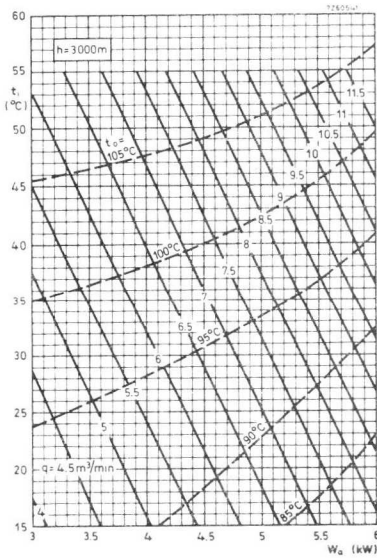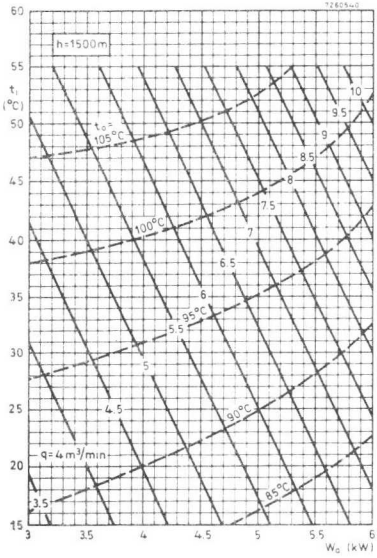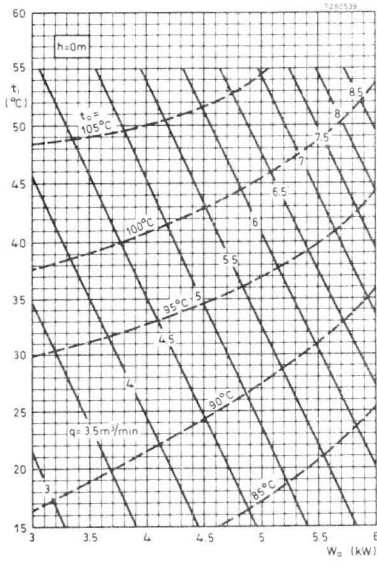

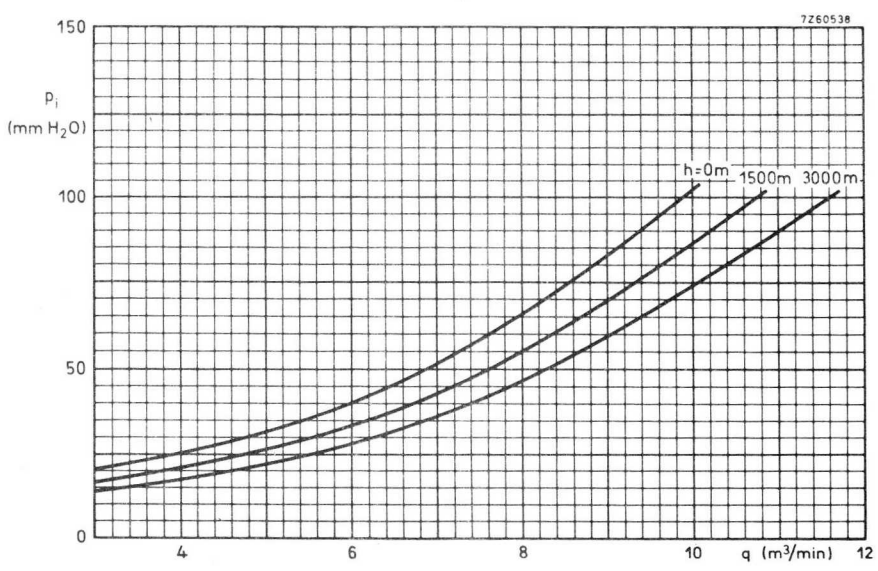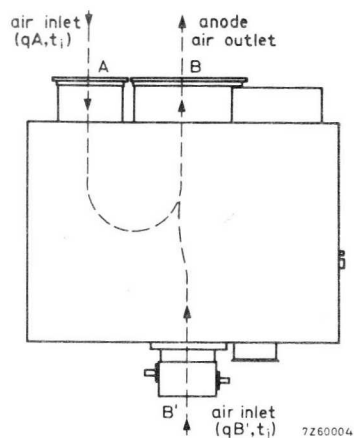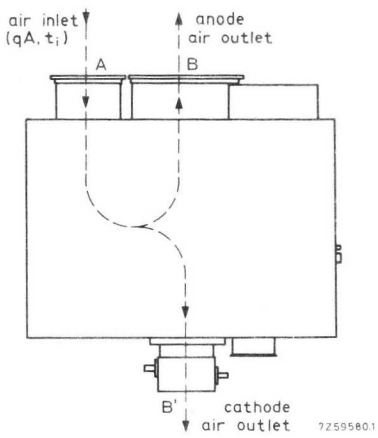

Pressure drop p_i across cavity with YL1420 as a function of airflow q .

p_i = pressure from plane A to plane B or B'

For blowing $q = q_A$

For sucking $q = q_A + q_{B'}$

BAND III AMPLIFIER CIRCUIT ASSEMBLY FOR YL1430 VISION AND COMBINED SOUND AND VISION

Continuously tunable cavity-type circuit assembly to be used with YL1430 to form a broad-band grounded-grid linear amplifier for television signals in Band III. The unit thus obtained can be put to good use in any of the principal monochrome and colour television systems.

QUICK REFERENCE DATA

QUICK REFERENCE DATA			
Class AB linear amplifier (vision)			
Frequency	170	to 230	MHz
Anode voltage		7	kV
Output power in load , sync		18,4	kW
Power gain		25	
Frequency	170	to 230	MHz
Anode voltage		6	kV
Output power in load , sync		12,5	kW
Power gain		30	
Class AB amplifier for television transposer service			
Frequency	175	to 225	MHz
Anode voltage		6	kV
Output power in load , sync		7	kW
Power gain		32	

FREQUENCY RANGE

170 to 230 MHz continuously tunable.

OPERATING CONDITIONS (For YL1430)


For detailed operating conditions reference is made to the data sheets for tube type YL1430.

MECHANICAL DATA


Dimensions in mm

Dimensions : approx. 600 x 620 x 370 mm³


Net weight : approx. 67 kg

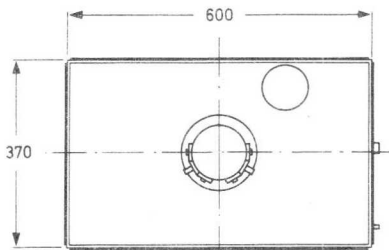


bottom view

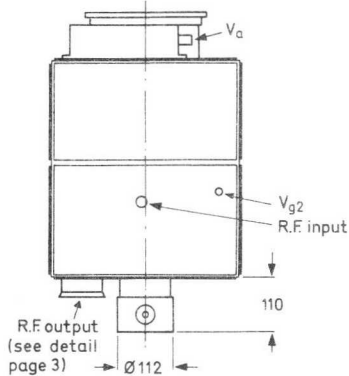

right-hand side view

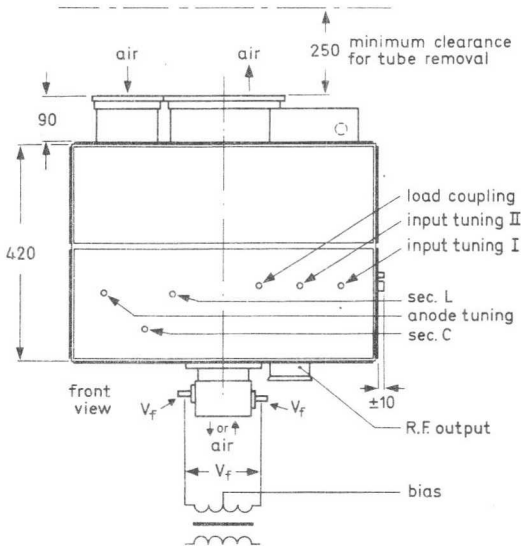






front view

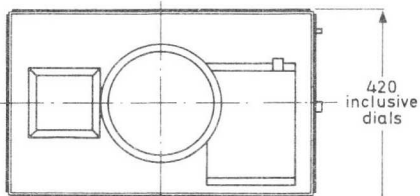

top view

7259585

Output connector

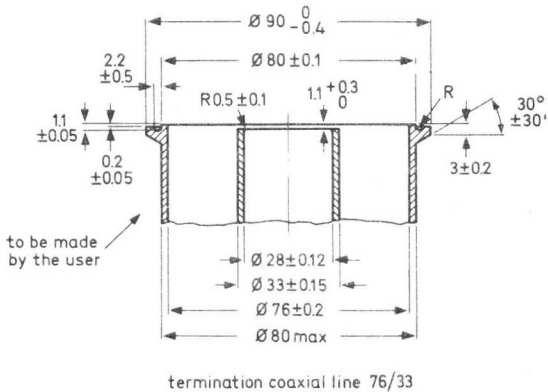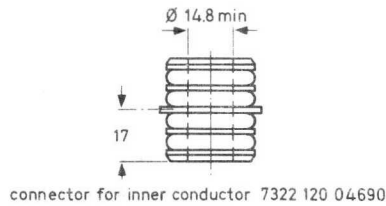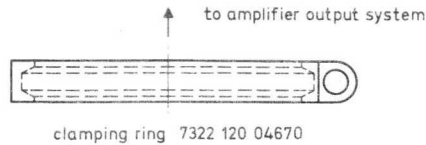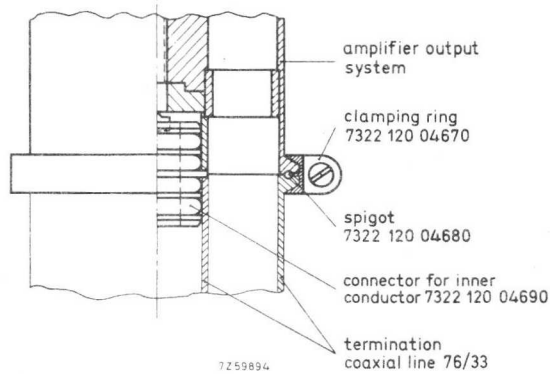

COOLING

See cooling curves.

Direction of airflow: see drawing page 7.

Either sucking and blowing is possible via connections on the top panel.

IMPEDANCES

Input : 50 Ω (coaxial female connector, type N)

Output: 50 Ω (coaxial female connector: see drawing page 3)

ENVIRONMENTAL DATA

Ambient temperature: 0 °C to +55 °C

Altitude : max. 3000 m

Relative humidity : up to 90%

VOLTAGE STANDING WAVE RATIO

Input : max. permissible 1,3 for acceptable performance

Output : max. permissible 1,3 for acceptable performance

ADDITIONAL COMPONENTSa) Delivered with the assembly



Tube extractor	7322 120 07850
Mating male input connector	Radiall type N
Output connector	
connector for inner conductor	7322 120 04690
spigot for outer conductor	7322 120 04680
clamping ring for outer conductor	7322 120 04670
Mating connector for anode voltage	Radiall type R13060
Mating connector for screen grid voltage	Radiall type R9510
Coupling loop for 175, 25 MHz	7322 120 04730
Coupling loop for remaining frequencies except 224, 25 MHz	7322 120 04750
Insulating protection cap	7322 120 04760
Spanner for fitting the coupling loops	7322 120 04760

b) Recommended




The use of circulator 2722 162 01191 (170 to 200 MHz)
or 2722 162 01201 (200 to 230 MHz) is recommended.




1) For 224, 25 MHz a different coupling loop is needed, which can be supplied on request.

CIRCUIT DIAGRAM

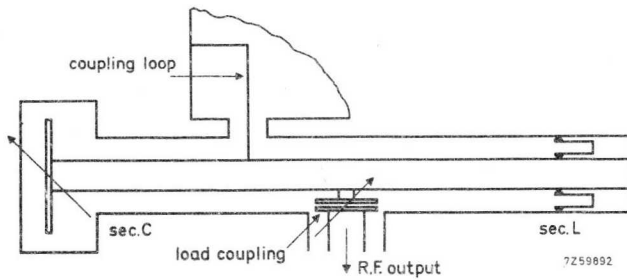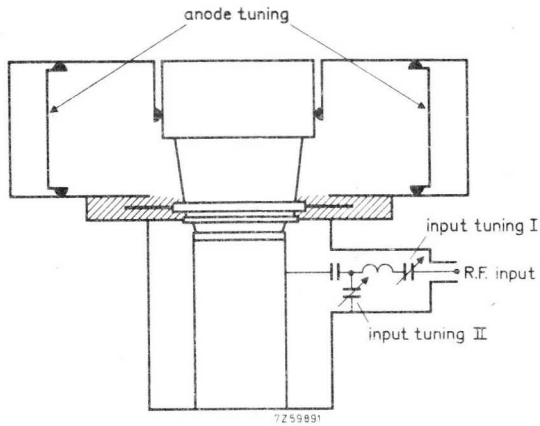

Cooling curves

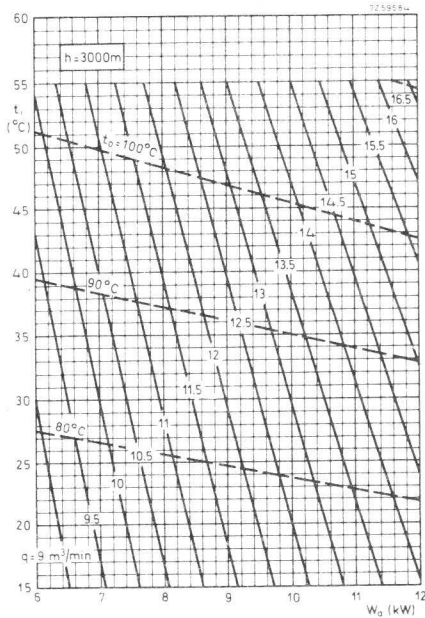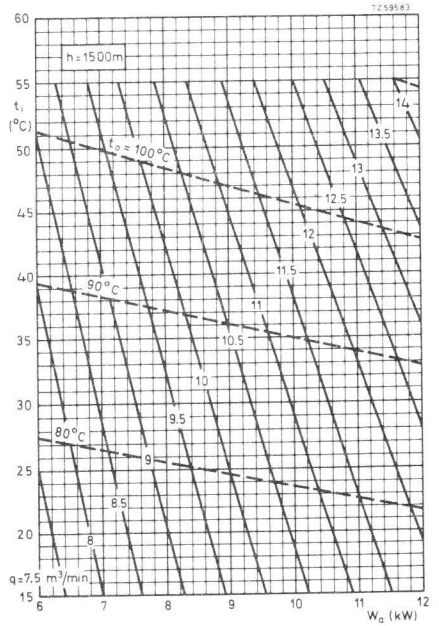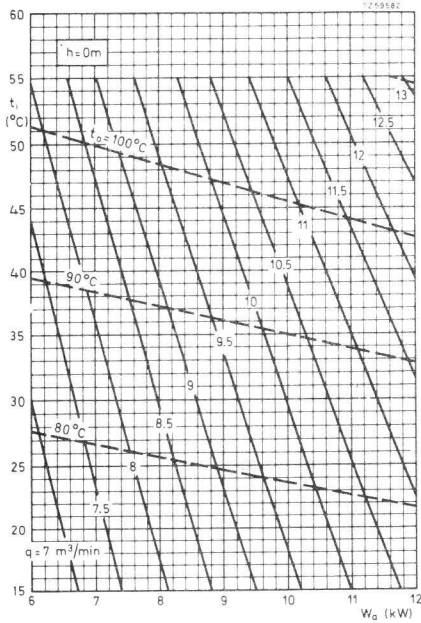

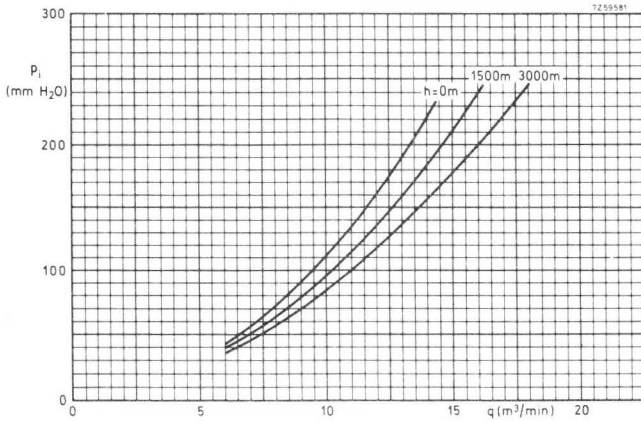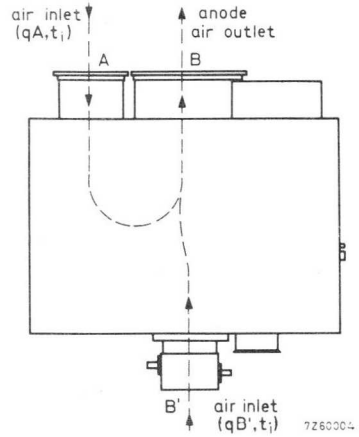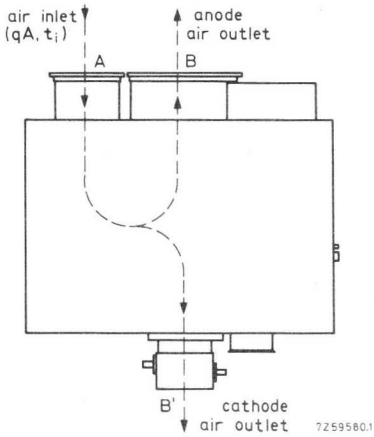

Pressure drop q_i across cavity with YL1430 as a function of airflow q .

p_i = pressure drop from plane A to plane B or B'


For blowing $q = q_A$

For sucking $q = q_A + q_{B'}$

BAND III AMPLIFIER CIRCUIT ASSEMBLY FOR YL1430 SOUND

Continuously tunable cavity-type circuit assembly to be used with YL1430 to form a grounded-grid amplifier of frequency modulated signals in band III.

RZ 29115-9

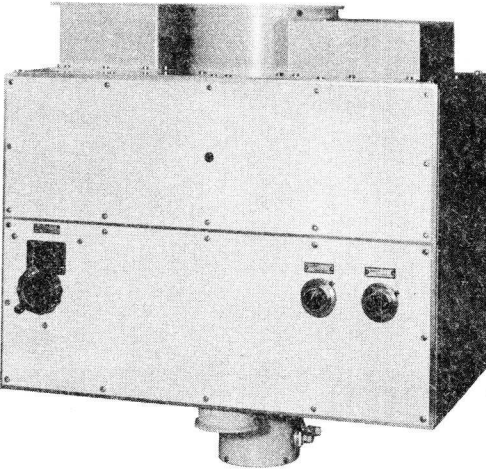

QUICK REFERENCE DATA

Frequency (MHz)	Class B amplifier (sound)		
	V_a (kV)	W_l (kW) CCIR system	Power gain
170 to 230	7.5	13	33

FREQUENCY RANGE

170 to 230 MHz, continuously tunable.

OPERATING CONDITIONS (For YL1430)





For detailed operating conditions reference is made to the data sheets for tube type YL1430.

MECHANICAL DATA


Dimensions in mm

Dimensions : approx. 600 x 620 x 370 mm³

Net weight : approx. 54 kg

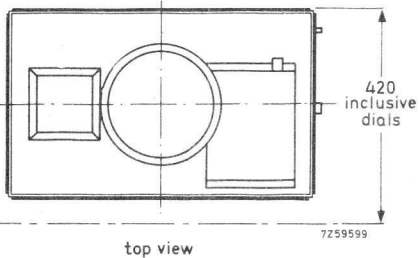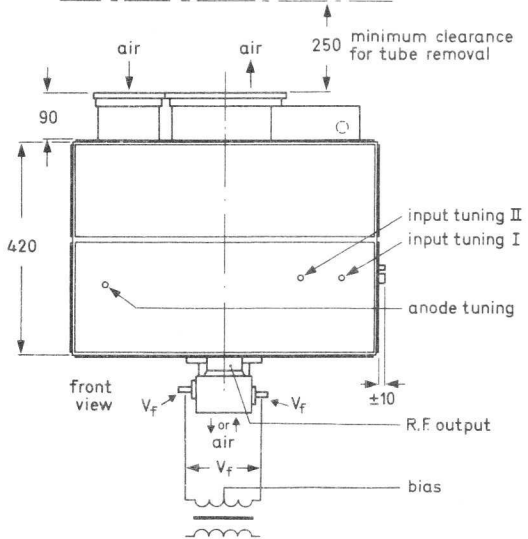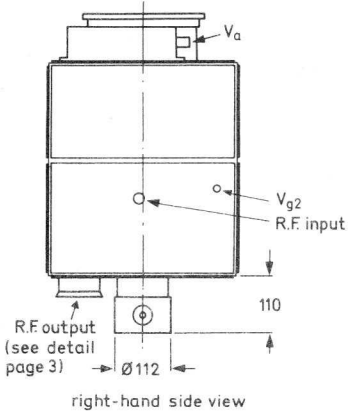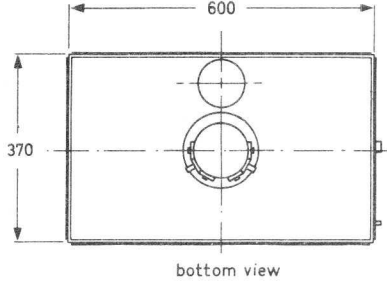

R. F. output connector

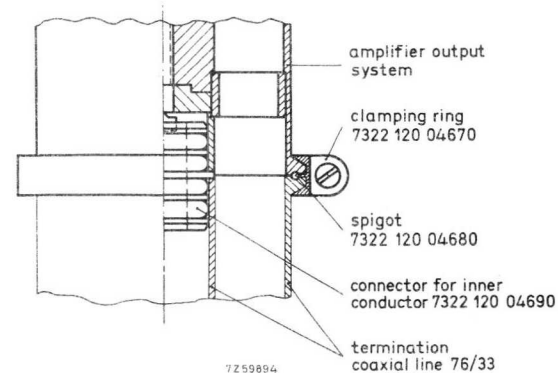


↑ to amplifier output system




clamping ring 7322 120 04670



spigot 7322 120 04680



connector for inner conductor 7322 120 04690

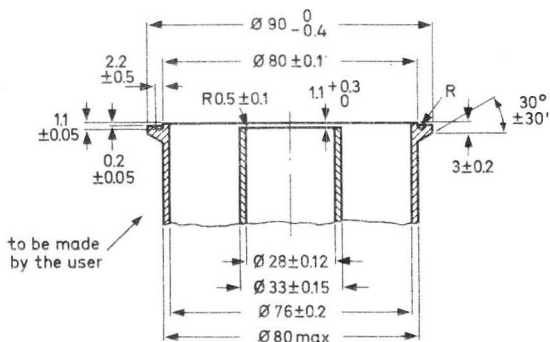

termination coaxial line 76/33

COOLING

See cooling curves.

Direction of airflow: see drawing page 7.

Either sucking and blowing is possible via connections on the top panel.

IMPEDANCES

Input : 50 Ω (coaxial female connector, type N)

Output : 50 Ω (coaxial connector : see drawing page 3).

ENVIRONMENTAL DATA

Ambient temperature : 0 $^{\circ}\text{C}$ to +55 $^{\circ}\text{C}$

Altitude : max. 3000 m

Relative humidity : up to 90 %

VOLTAGE STANDING-WAVE RATIO

Input : max. permissible 1.3 for acceptable performance

Output : max. permissible 1.3 for acceptable performance



ADDITIONAL COMPONENTSa) Delivered with the assembly

Tube extractor	7322 120 07850
Mating male input connector	Radiall type N
Output connector	
connector for inner conductor	7322 120 04690
spigot for outer conductor	7322 120 04680
clamping ring for outer conductor	7322 120 04670
Mating connector for anode voltage	Radiall type R13060
Mating connector for screen grid voltage	Radiall type R9510




b) Recommended




The use of circulator 2722 162 01191 (170 to 200MHz) or 2722 162 01201 (200 to 230MHz) is recommended.

CIRCUIT DIAGRAM

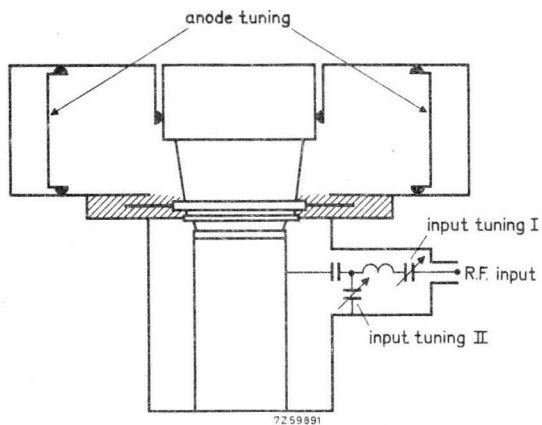

Cooling curves

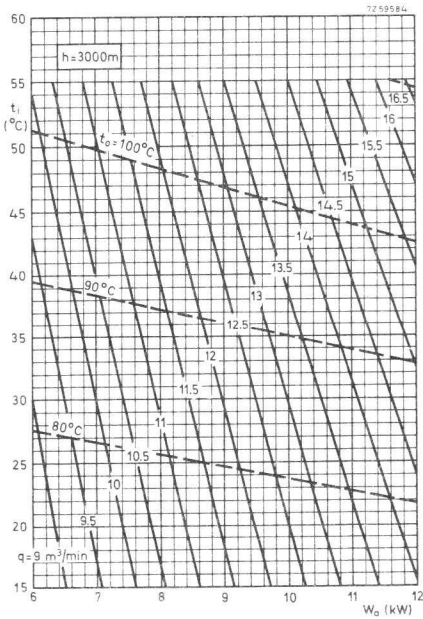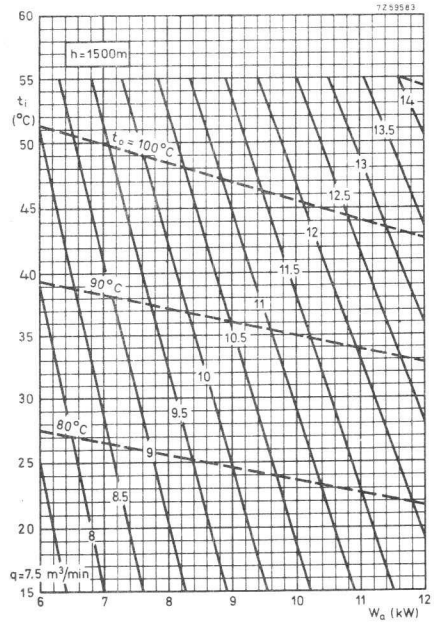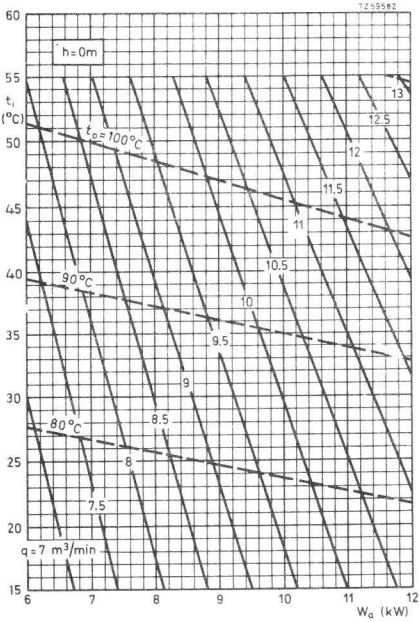

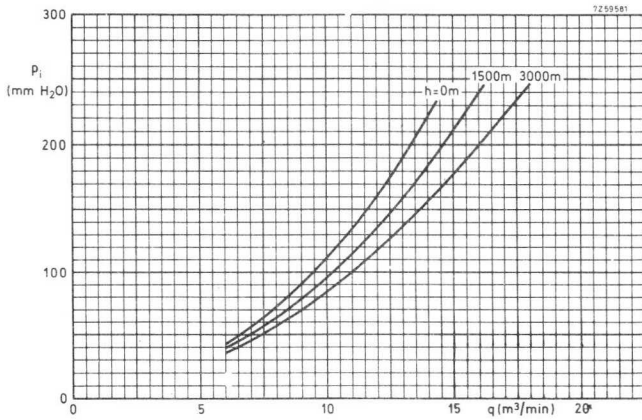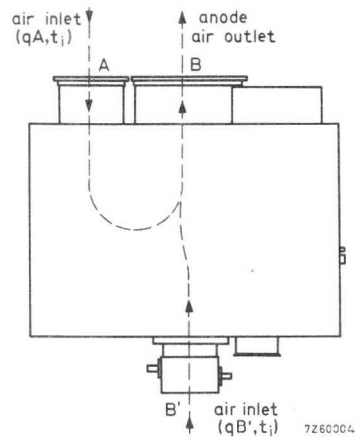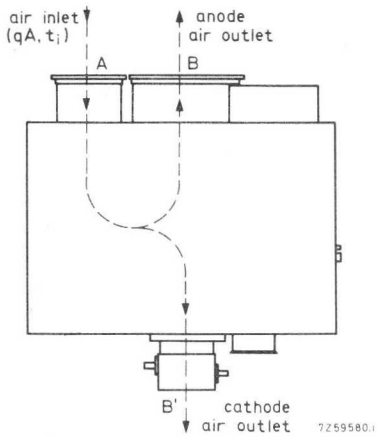

Pressure drop P_i across cavity with YL1430 as a function of air flow q .

P_i = pressure drop from plane A to plane B or B'.

For blowing $q = q_A$

For sucking $q = q_A + q_{B'}$

BAND I AMPLIFIER CIRCUIT ASSEMBLY FOR YL1440 VISION

Channel tuned cavity-type circuit assembly to be used with YL1440 to form a broad-band grounded-grid linear amplifier for television signals in Band I. The unit thus obtained can be put to good use in any of the principal monochrome and colour television systems.

QUICK REFERENCE DATA

QUICK REFERENCE DATA			
Class AB linear amplifier (vision)			
Frequency	48	to	83 MHz
Anode voltage			2,5 kV
Output power in load , sync			1,17 kW
Power gain			14
Frequency	48	to	83 MHz
Anode voltage			2 kV
Output power in load , sync			0,67 kW
Power gain			16

FREQUENCY RANGE

48,25 to 69,25 MHz and channel tuned
77,25 to 83,25 MHz

OPERATING CONDITIONS (For YL1440)


For detailed operating conditions reference is made to the data sheets for tube type YL1440.

MECHANICAL DATA




Dimensions in mm

Dimensions: approx. 516 x 323 x 323 mm³

Net weight : approx. 23 kg



top view

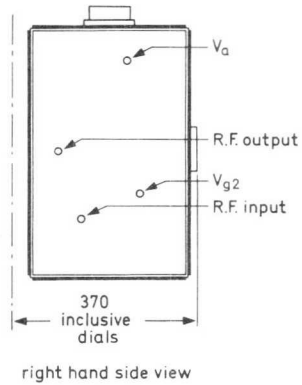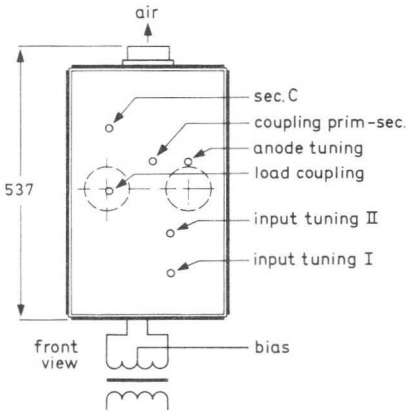

bottom view

7Z 60316

COOLING

See cooling curves.

Direction of airflow: see drawing page 6.

Either sucking and blowing is possible via connections on the top panel and the rear panel.

IMPEDANCES

Input : 50 Ω (coaxial female connector type N)

Output : 50 Ω (coaxial female connector type HN)

ENVIRONMENTAL DATA

Ambient temperature : 0 °C to +55 °C

Altitude : max. 3000 m

Relative humidity : up to 90 %

VOLTAGE STANDING-WAVE RATIO

Input : max. permissible 1.3 for acceptable performance


Output : max. permissible 1.3 for acceptable performance

ADDITIONAL COMPONENTSDelivered with the assembly




Tube extractor	7322 120 02140
Mating male input connector	Radiall type N
Mating male output connector	Radiall type R7050
Mating connector for anode voltage	Radiall type R13060
Mating connector for screen grid voltage	Radiall type R9510
5 coils for vision carries	
5 coils for vision carrier frequencies	
55.25; 61.25 to 62.25; 67.25;	
77.25; 83.25 MHz	1)
Spanner for fitting the coils	



1) Coils covering vision carrier frequencies other than specified can be delivered on request.

CIRCUIT DIAGRAM

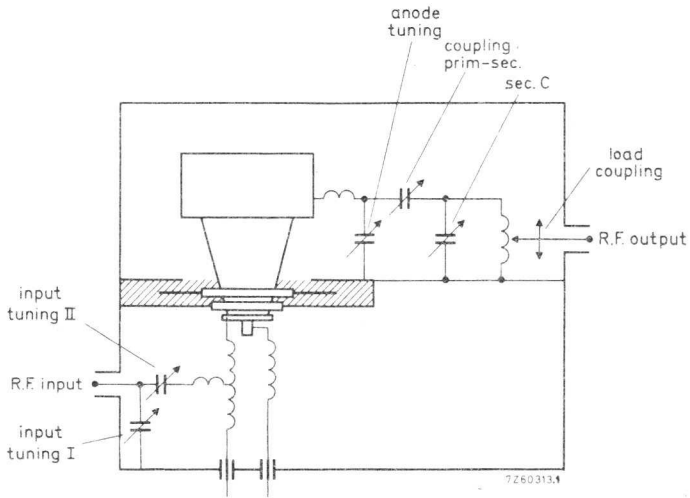

Cooling curves

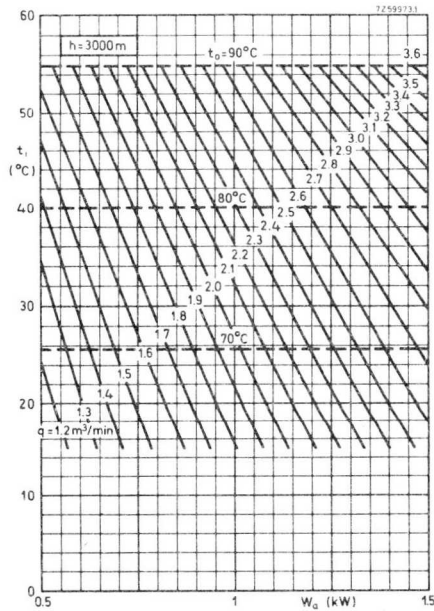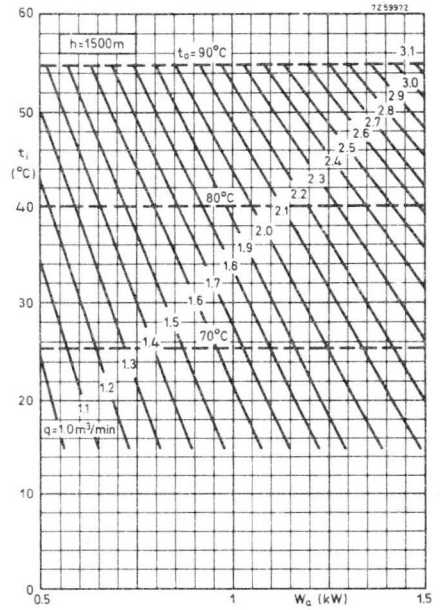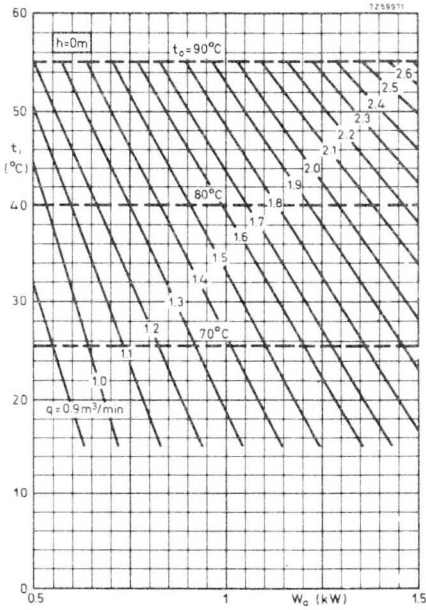

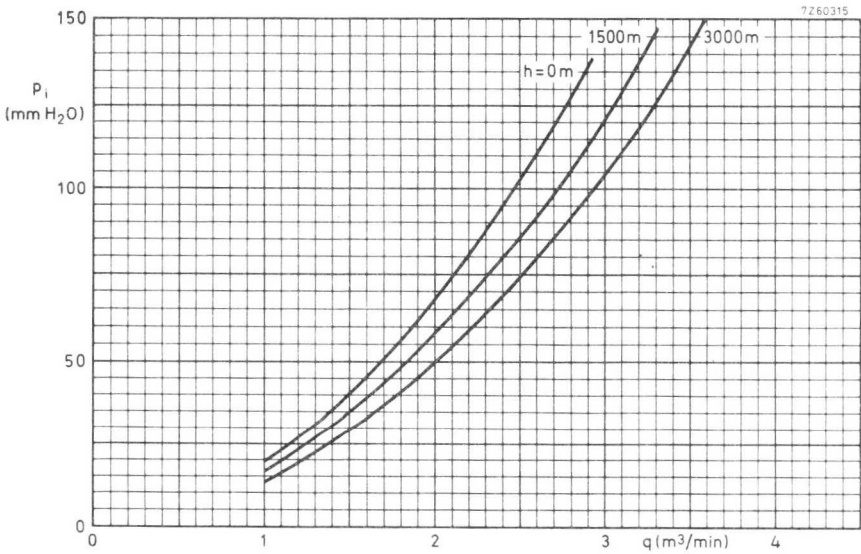

BAND I AMPLIFIER CIRCUIT ASSEMBLY FOR YL1440 SOUND

Channel tuned amplifier circuit assembly to be used with YL1440 to form a grounded-grid amplifier of frequency-modulated signals in Band I.

QUICK REFERENCE DATA			
Frequency (MHz)	Class B amplifier (sound)		
	V_a (kV)	W_ℓ (kW) CCIR system	Power gain
up to 88	3.5	2.4	26

FREQUENCY RANGE

53 to 72 MHz and }
82 to 88 MHz } channel tuned


OPERATING CONDITIONS (For YL1440)

For detailed operating conditions reference is made to the data sheets for tube type YL1440.


MECHANICAL DATA

Dimensions in mm


Dimensions: approx. 516 x 323 x 323 mm³
Net weight : approx. 22.5 kg




top view

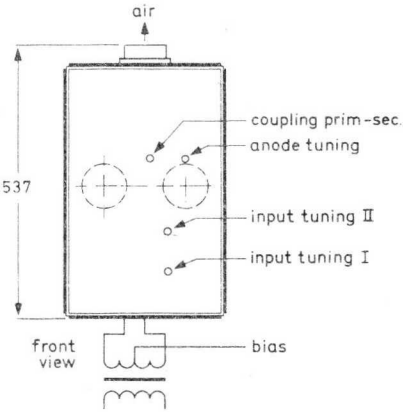

front view



right hand side view



bottom view

COOLING

See cooling curves.

Direction of airflow: see drawing page 6.

Either sucking and blowing is possible via connections on the top panel and the rear panel.

IMPEDANCES

Input : 50 Ω (coaxial female connector type N)

Output : 50 Ω (coaxial female connector type HN)

ENVIRONMENTAL DATA

Ambient temperature : 0 °C to +55 °C

Altitude : max. 3000 m

Relative humidity : up to 90 %

VOLTAGE STANDING-WAVE RATIO

Input : max. permissible 1.3 for acceptable performance


Output : max. permissible 1.3 for acceptable performance

ADDITIONAL COMPONENTSDelivered with the assembly




Tube extractor	7322 120 02140
Mating male input connector	Radiall type N
Mating male output connector	Radiall type R7050
Mating connector for anode voltage	Radiall type R13060
Mating connector for screen grid voltage	Radiall type R9510
5 coils for sound carrier frequencies 59.75 to 60.75; 65.75 to 67.75; 71.75 81.75; 87.75 MHz	1)
Spanner for fitting the coils	



1) Coils covering sound carrier frequencies other than specified can be delivered on request.

CIRCUIT DIAGRAM

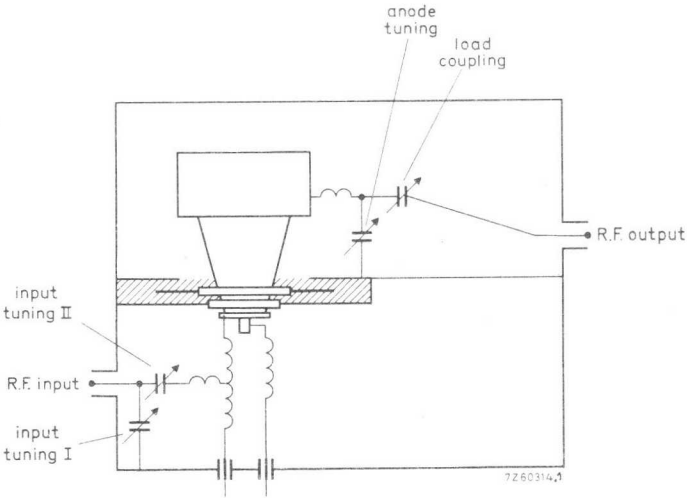


Cooling curves

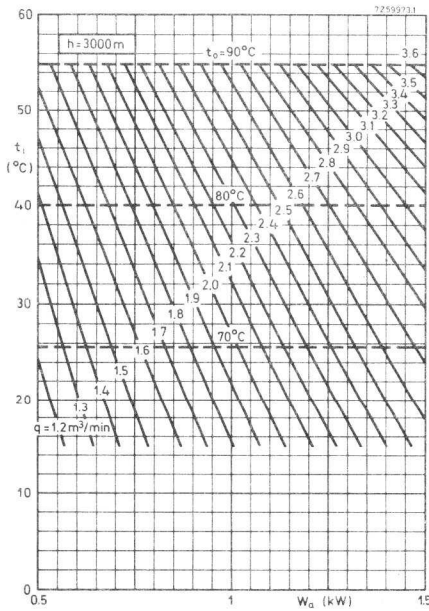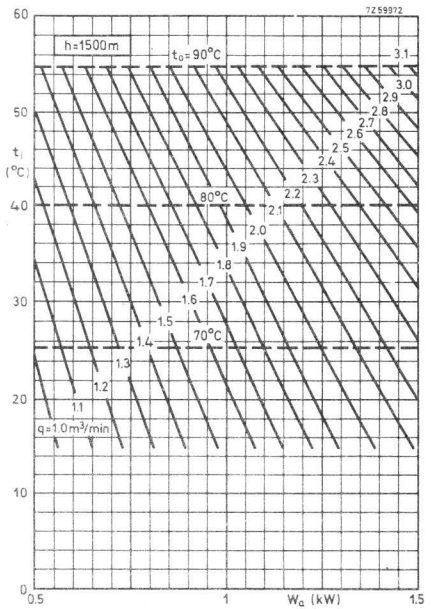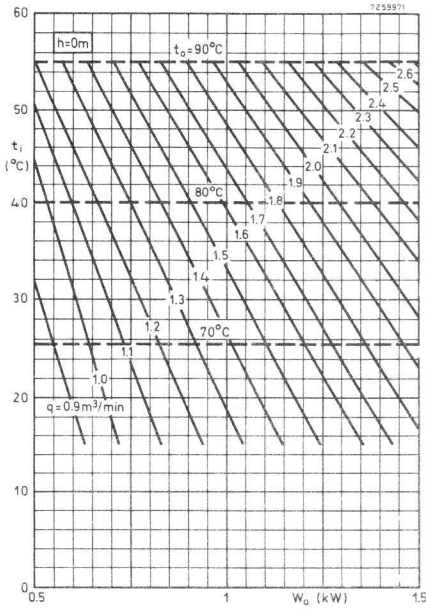

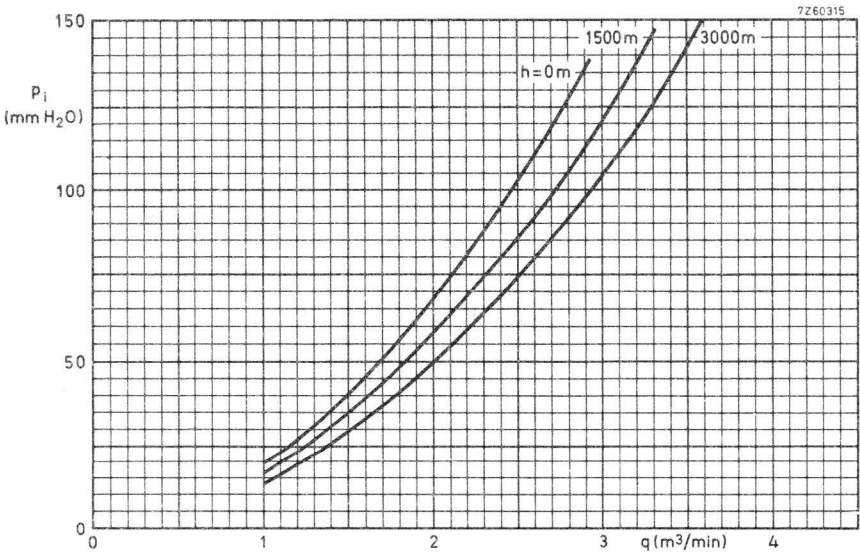

BAND I AMPLIFIER CIRCUIT ASSEMBLY FOR YL1420 VISION

Amplifier circuit assembly to be used with YL1420 to form a broad-band grounded-grid linear amplifier for television signals in Band I.

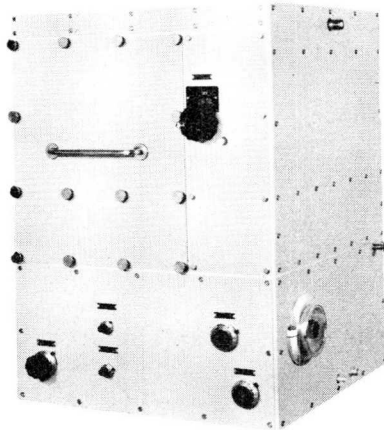

RZ 29794-2

QUICK REFERENCE DATA

Frequency (MHz)	Class AB linear amplifier (vision)		
	V_a (kV)	$W_{l\text{ sync}}$ (kW)(CCIR system)	Power gain
83.25	4	6.25	18.5
55.25	4	6.25	16

FREQUENCY RANGE

55.25 to 67.25 MHz and
77.25 to 83.25 MHz } channel tuned

OPERATING CONDITIONS (For YL1420)


For detailed operating conditions reference is made to the data sheets for tube type YL1420.

MECHANICAL DATA


Dimensions in mm

Dimensions: approx. 700 x 500 x 500 mm³


Net weight: approx. 70 kg




bottom view

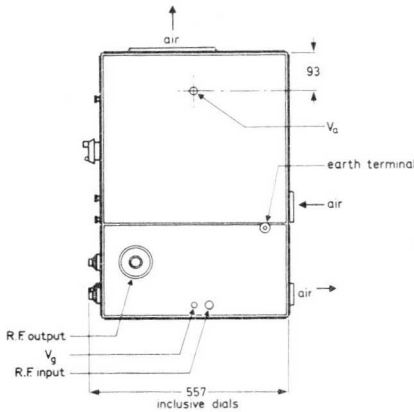

right hand side view

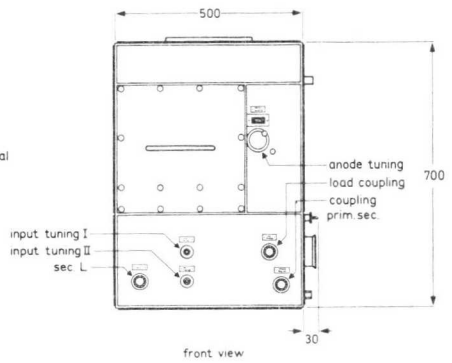


front view




top view


Output connector

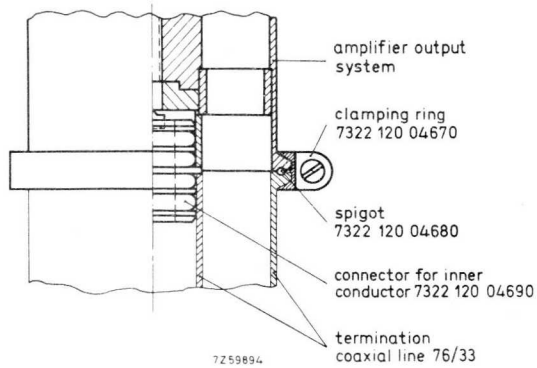


↑ to amplifier output system




clamping ring 7322 120 04670



spigot 7322 120 04680



connector for inner conductor 7322 120 04690

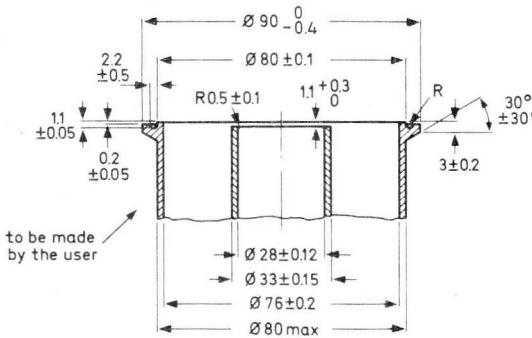

termination coaxial line 76/33

COOLING

See cooling curves.

Direction of air flow: see page 7.

The cooling air, supplied by an external source, is admitted through an inlet in the rear panel.

IMPEDANCES

Input : 50 Ω (coaxial femal connector, type N)

Output: 50 Ω (coaxial female connector, see drawing page 3)

ENVIRONMENTAL DATA

Ambient temperature : 0 $^{\circ}\text{C}$ to +55 $^{\circ}\text{C}$

Altitude : max. 3000 m

Relative humidity : up to 90%

VOLTAGE STANDING-WAVE RATIO

Input : max. permissible 1.3 for acceptable performance

Output : max. permissible 1.3 for acceptable performance

ADDITIONAL COMPONENTSa) Delivered with assembly


Tube extractor	7322 120 07850	
Mating male input connector	Radiall type N	
Output connector		
connector for inner conductor	7322 120 04690	
spigot for outer conductor	7322 120 04680	
clamping ring for outer conductor	7322 120 04670	
Mating connector for anode voltage	Radiall type R13060	
Mating connector for screen grid voltage	Radiall type R9510	
Anode coil covering frequency range		
55.25 to 67.25 MHz	-----	1)
Elbow for secondary circuit covering		
frequency range 55.25 to 67.25 MHz	-----	

b) Not delivered with assembly




Anode coil covering frequency range		
77.25 to 83.25 MHz	8222 032 11860	1)
Elbow for secondary circuit covering		
frequency range 77.25 to 83.25 MHz	8222 032 11790	



1) For use on carrier frequencies other than specified please contact the manufacturer.

CIRCUIT DIAGRAM

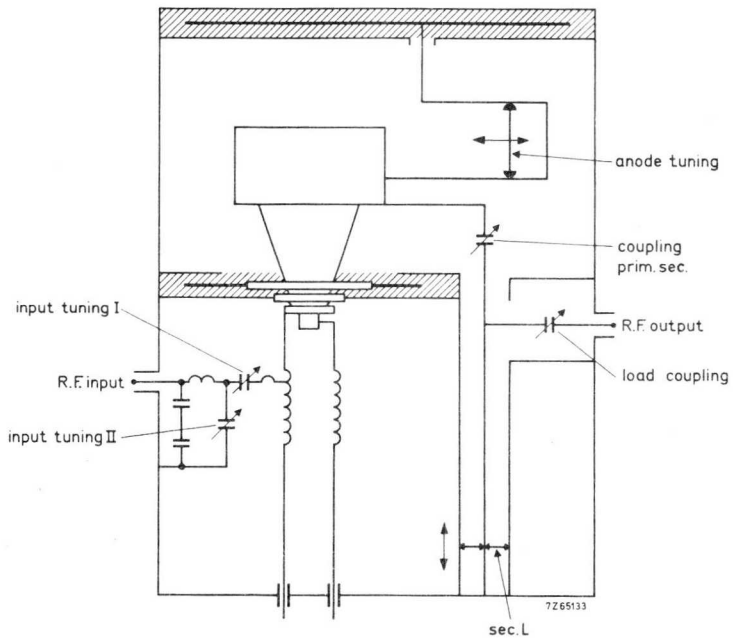

Cooling curves

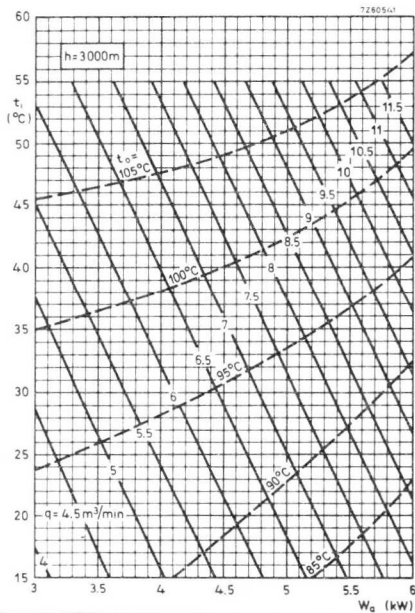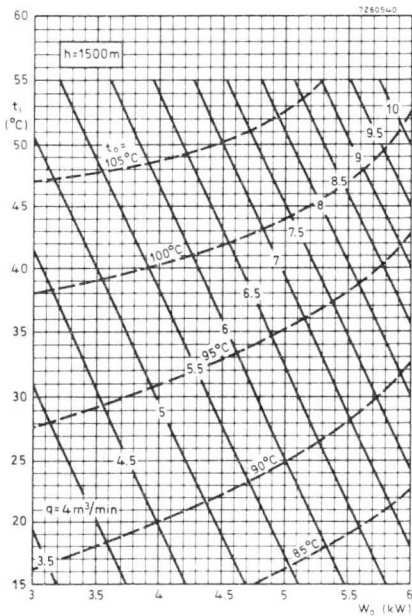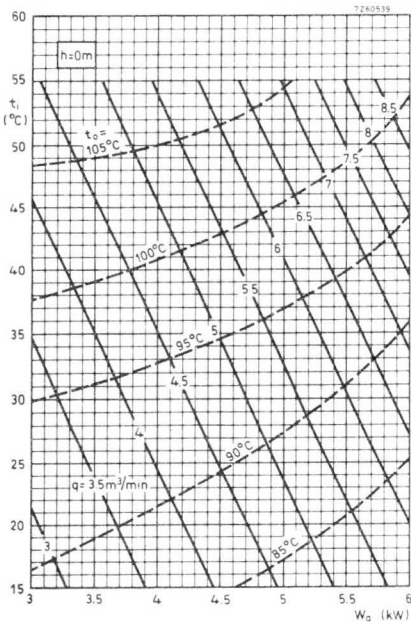

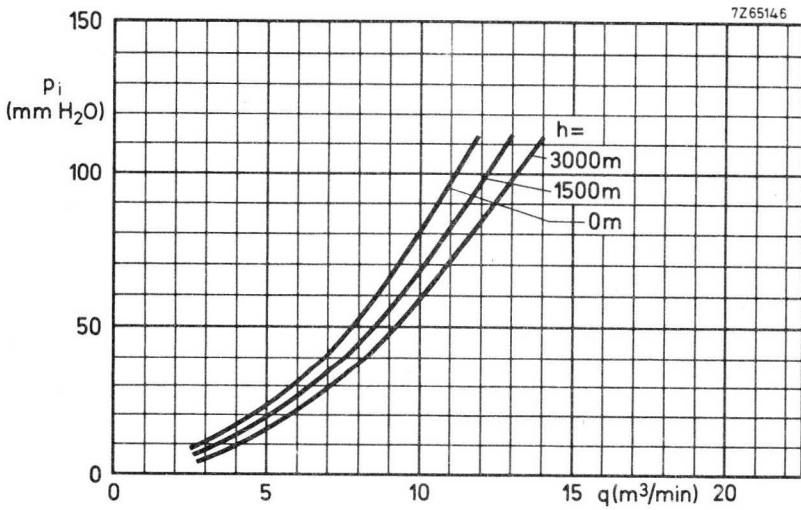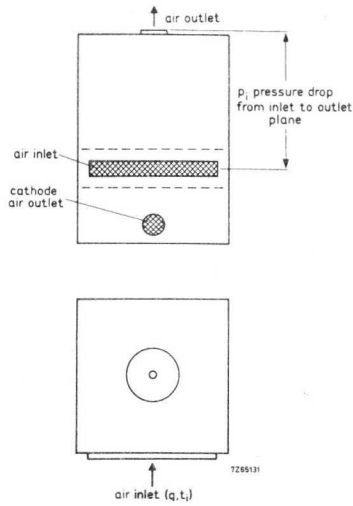

BAND I AMPLIFIER CIRCUIT ASSEMBLY FOR YL1420

SOUND

Channel tuned amplifier circuit assembly to be used with YL1420 to form a grounded-grid amplifier of frequency-modulated signals in Band I.

QUICK REFERENCE DATA			
Frequency (MHz)	Class B amplifier (sound)		
	V_a (kV)	W_ℓ (kW) CCIR system	Power gain
up to 88	7	10.5	32

FREQUENCY RANGE

53 to 72 MHz and
82 to 88 MHz } channel tuned

OPERATING CONDITIONS (For YL1420)

For detailed operating conditions reference is made to the data sheets for tube type YL1420.


40758

MECHANICAL DATA


Dimensions in mm

Dimensions : approx. 700 x 500 x 500 mm³


Net weight : approx. 58 kg




bottom view

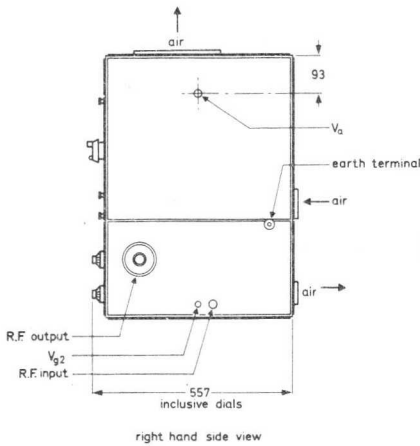

right hand side view

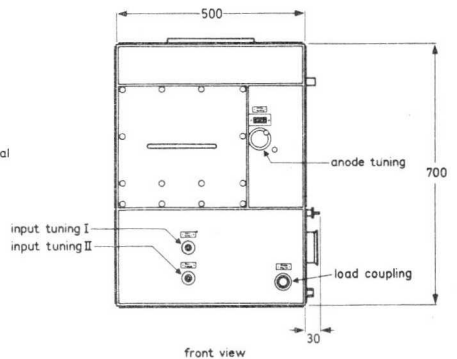


front view




top view

Output connector

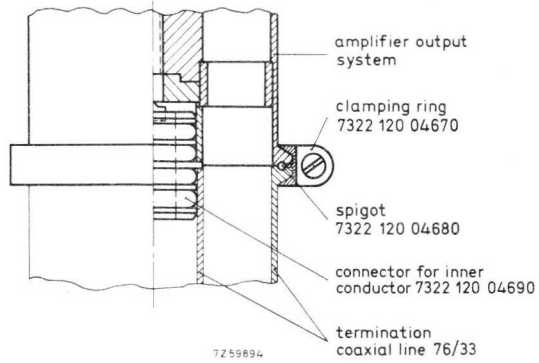


↑ to amplifier output system




clamping ring 7322 120 04670



spigot 7322 120 04680



connector for inner conductor 7322 120 04690

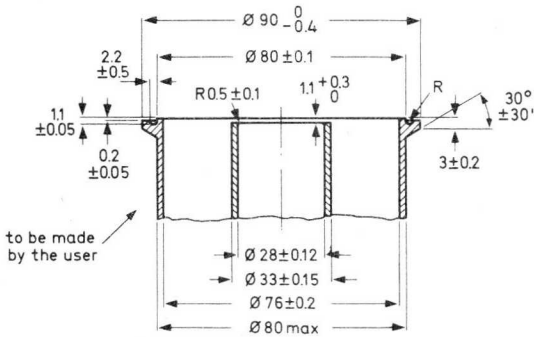

termination coaxial line 76/33

COOLING

See cooling curves.

Direction of air flow : see page 7.

The cooling air, supplied by an external source, is admitted through an inlet in the rear panel.

IMPEDANCES

Input : 50 Ω (coaxial female connector, type N)

Output : 50 Ω (coaxial female connector, see drawing page 3)

ENVIRONMENTAL DATA

Ambient temperature : 0 °C to +55 °C

Altitude : max. 3000 m

Relative humidity : up to 90%

VOLTAGE STANDING-WAVE RATIO

Input : max. permissible 1.3 for acceptable performance

Output : max. permissible 1.3 for acceptable performance


ADDITIONAL COMPONENTSa) Delivered with assembly

Tube extractor	7322 120 07850
Mating male input connector	Radiall type N
Output connector	
connector for inner conductor	7322 120 04690
spigot for outer conductor	7322 120 04680
clamping ring for outer conductor	7322 120 04670
Mating connector for anode voltage	Radiall type R13060
Mating connector for screen grid voltage	Radiall type R9510
Anode coil covering frequency range 53 to 72 MHz	----




b) Not delivered with assembly



Anode coil covering frequency range 82 to 88 MHz	8222 032 11860
---	----------------

CIRCUIT DIAGRAM

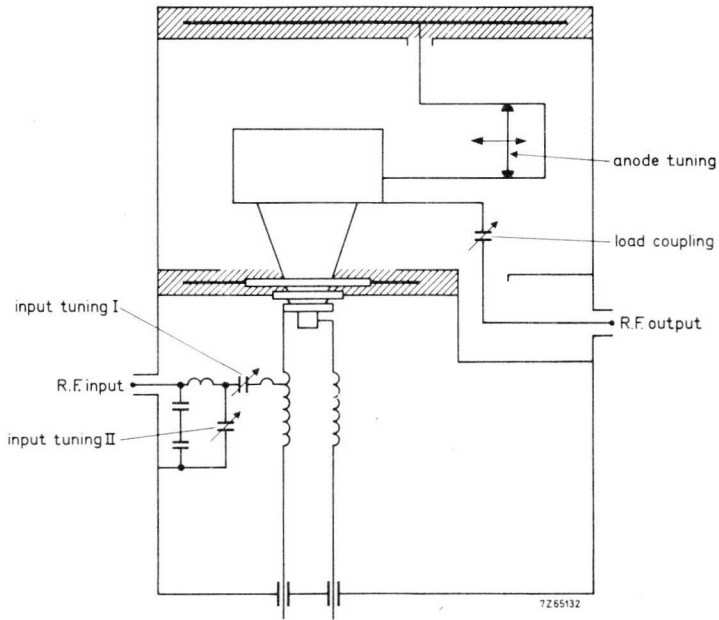

Cooling curves

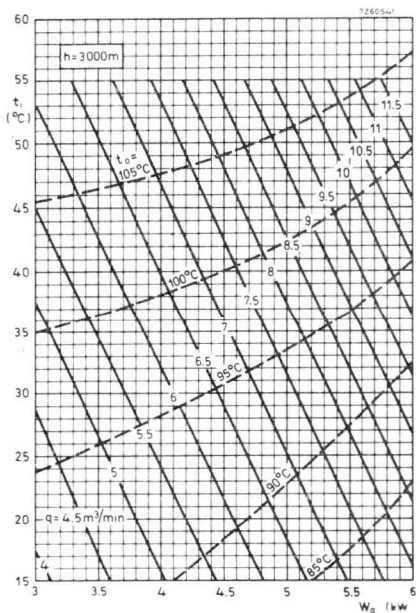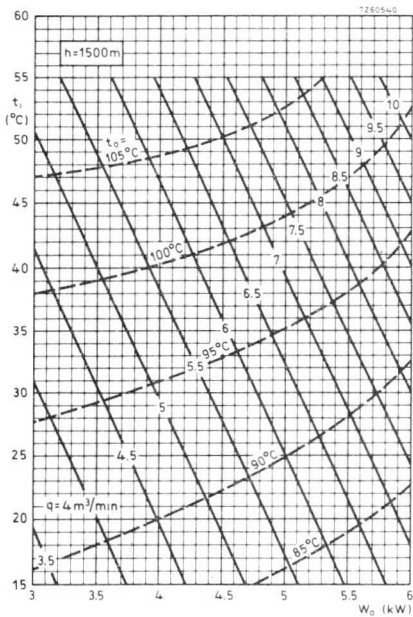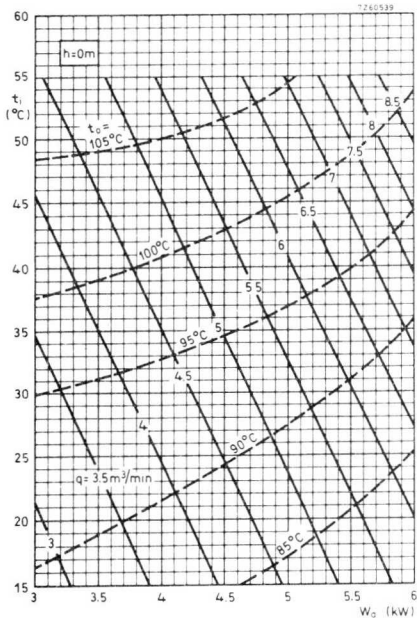


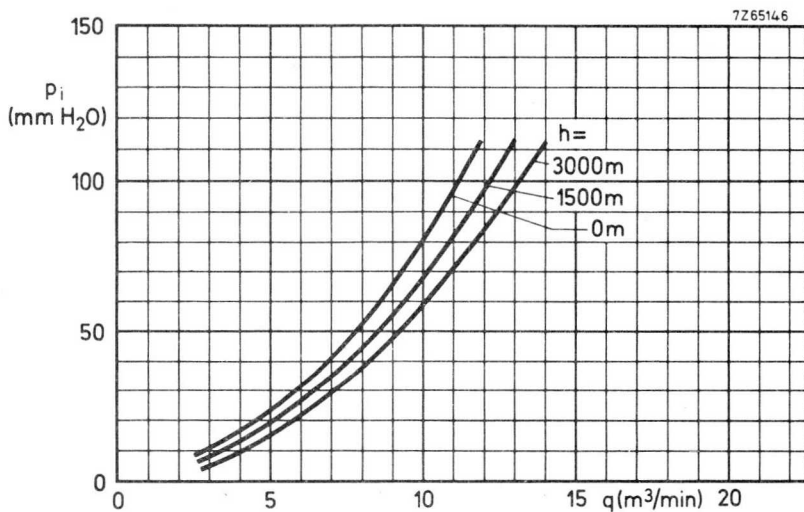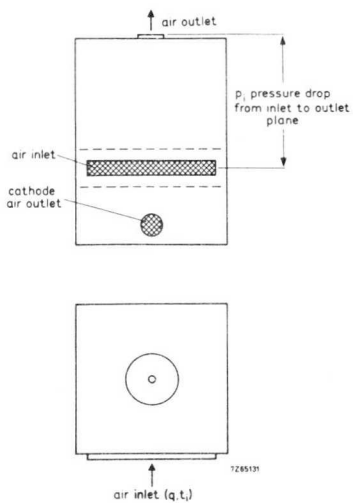

BAND I AMPLIFIER CIRCUIT ASSEMBLY FOR YL1430 OR YL1520

VISION

Amplifier circuit to be used with YL1430 or YL1520 to form a broad-band grounded grid linear amplifier for television signals in Band I.

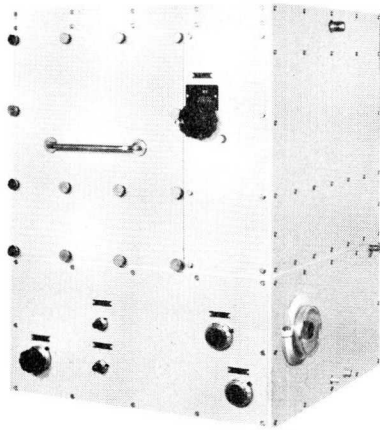

RZ 29794-2

QUICK REFERENCE DATA

Frequency (MHz)	Type	Class AB linear amplifier (vision)		
		V_a (kV)	W_l sync (kW)(CCIR) system	Power gain
83.25	YL1430	5.5	13.2	20
55.25		5.5	13.2	18
55.25		4.0	6.4	18
83.25	YL1520	6.5	20	24
55.25			20	22

FREQUENCY RANGE

55.25 to 69.25 MHz and } channel tuned
77.25 to 83.25 MHz

OPERATING CONDITIONS (For YL1430 or YL1520)


For detailed operating conditions reference is made to the data sheets for tube type YL1430 or YL1520.

MECHANICAL DATA


Dimensions in mm

Dimensions: approx. 700 x 500 x 500 mm³


Net weight : approx. 70 kg




bottom view

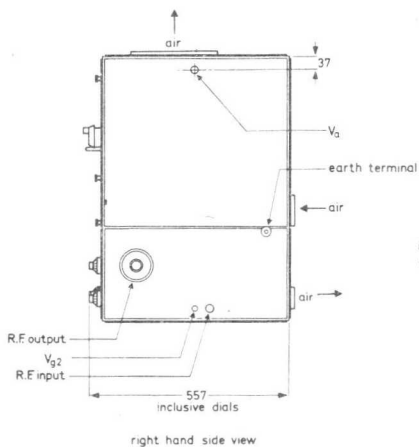

right hand side view

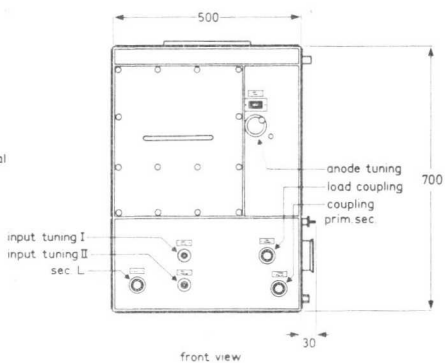


front view





top view


Output connector

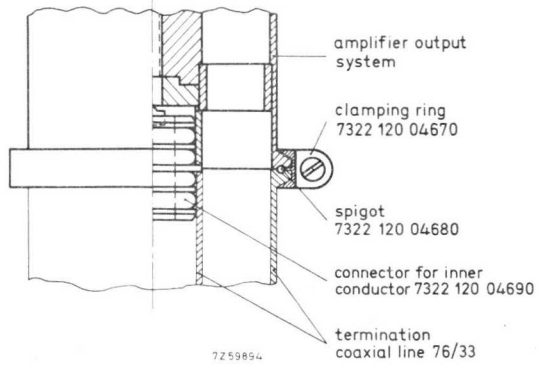

↑ to amplifier output system



connector for inner conductor 7322 120 04690

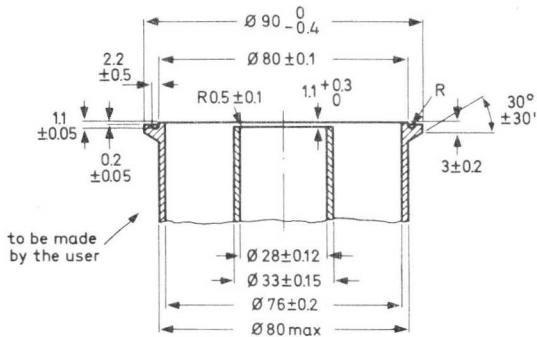

termination coaxial line 76/33

COOLING

See cooling curve.

Direction of air flow: see page 8.

The cooling air, supplied by an external source, is admitted through an inlet in the rear panel.

IMPEDANCES

Input : 50 Ω (coaxial female connector, type N)

Output : 50 Ω (coaxial female connector, see drawing page 3)

ENVIRONMENTAL DATA

Ambient temperature : 0 °C to +55 °C

Altitude : max. 3000 m

Relative humidity : up to 90%

VOLTAGE STANDING-WAVE RATIO

Input : max. permissible 1.3 for acceptable performance

Output : max. permissible 1.3 for acceptable performance

ADDITIONAL COMPONENTSa) Delivered with assembly


Tube extractor	7322 120 07850	
Mating male input connector	Radiall type N	
Output connector		
connector for inner conductor	7322 120 04690	
spigot for outer conductor	7322 120 04680	
clamping ring for outer conductor	7322 120 04670	
Mating connector for anode voltage	Radiall type R13060	
Mating connector for screen grid voltage	Radiall type R9510	
Anode coil covering frequency range		
55.25 to 67.25 MHz for YL1430 and	----	1)
55.25 to 61.25 MHz for YL1520		
Elbow for secondary circuit covering		
frequency range 55.25 to 67.25 MHz	----	
for both types		

b) Not delivered with assembly




Anode coil covering frequency range		
77.25 to 83.25 MHz for YL1430 and	8222 032 11860	1)
67.25 to 83.25 MHz for YL1520		
Elbow for secondary circuit covering		
frequency range 77.25 to 83.25 MHz	8222 032 11790	
for both types		

1) For use on carrier frequencies other than specified please contact the manufacturer.




CIRCUIT DIAGRAM


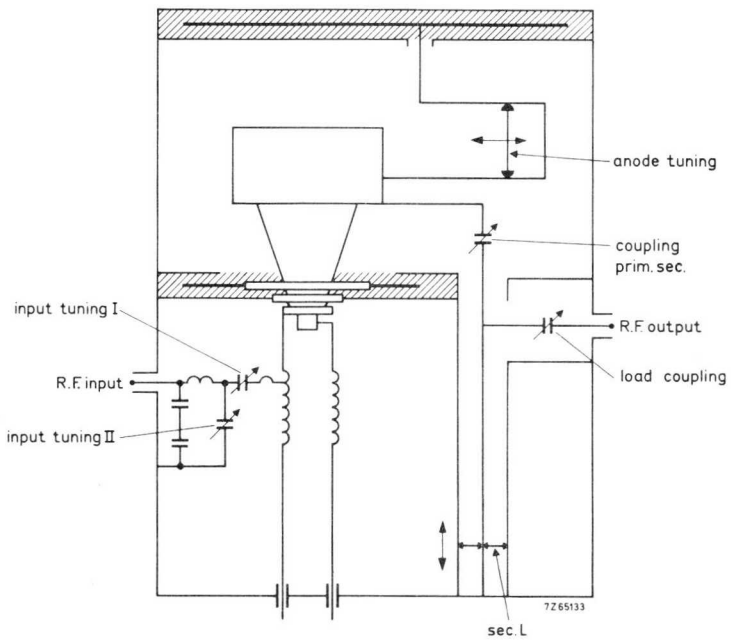


Cooling curves for amplifier 40759 fitted with tube YL1430

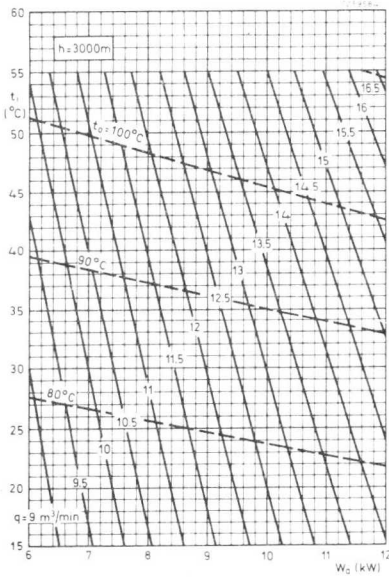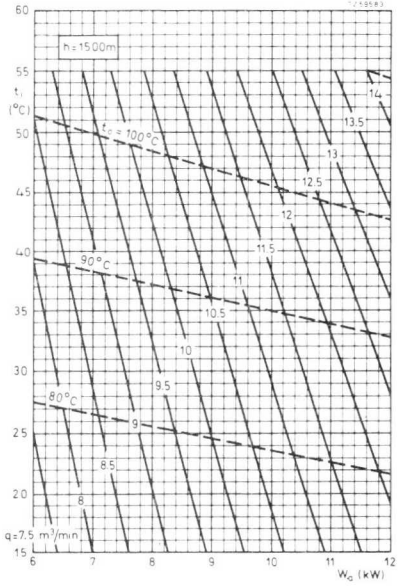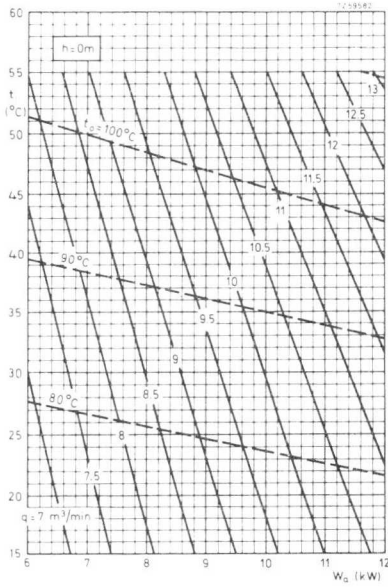


Cooling curves for amplifier 40759 fitted with tube YL1520

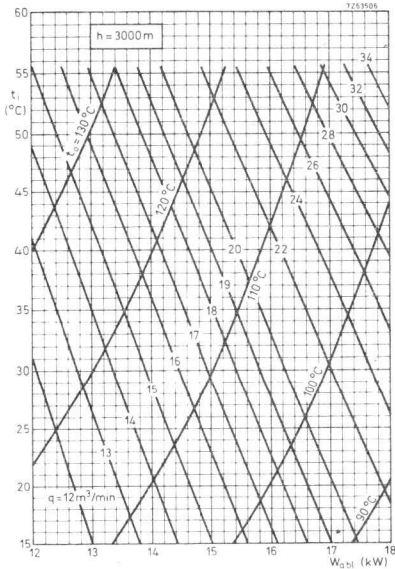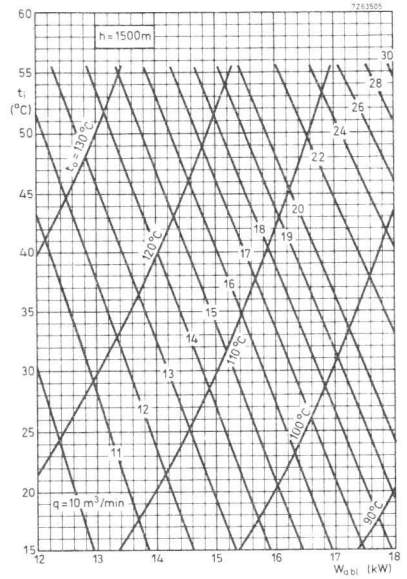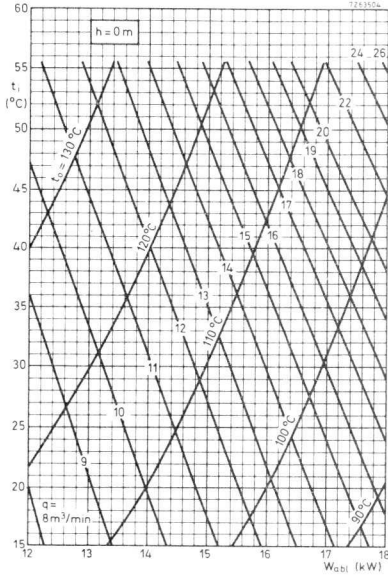

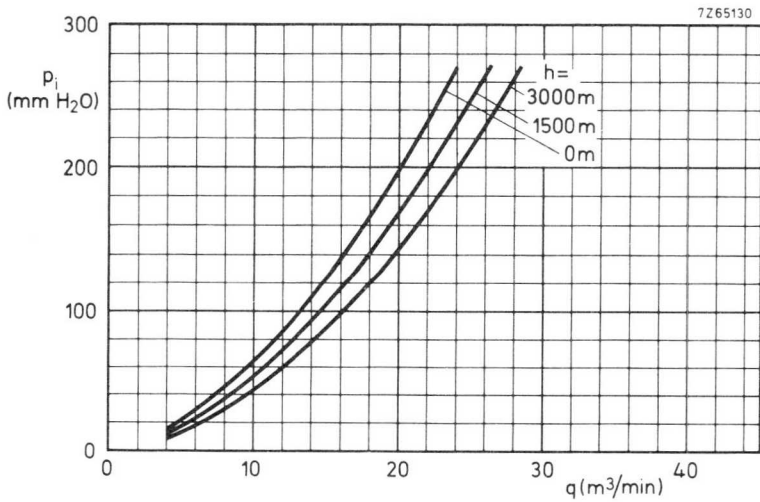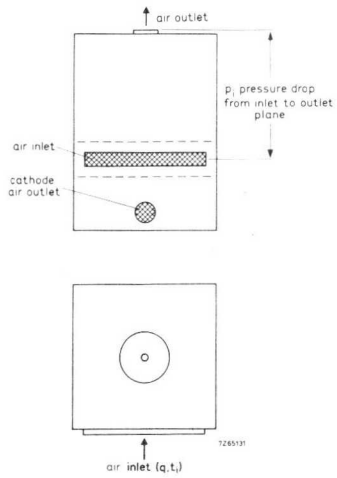

BAND I AMPLIFIER CIRCUIT ASSEMBLY FOR YL1430 OR YL1520 SOUND

Amplifier circuit assembly to be used with YL1430 or YL1520 to form a grounded-grid amplifier of frequency modulated signals in Band I.

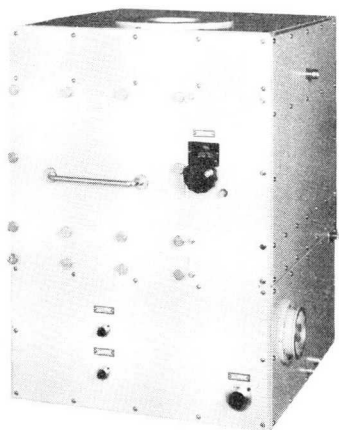

RZ 30263-3

QUICK REFERENCE DATA

Class AB linear amplifier (sound)				
Frequency (MHz)	Type	V_a (kV)	W_ℓ (kW)	Power gain
up to 88	YL1430	7.5	13	32.5

FREQUENCY RANGE

53 to 72 MHz and } channel tuned
82 to 88 MHz

OPERATING CONDITIONS (For YL1430 and YL1520)


For detailed operating conditions reference is made to the data sheets for tube type YL1430 and YL1520.

MECHANICAL DATA


Dimensions in mm

Dimensions in : approx. 700 x 500 x 500 mm³


Net weight : approx. 58 kg




bottom view

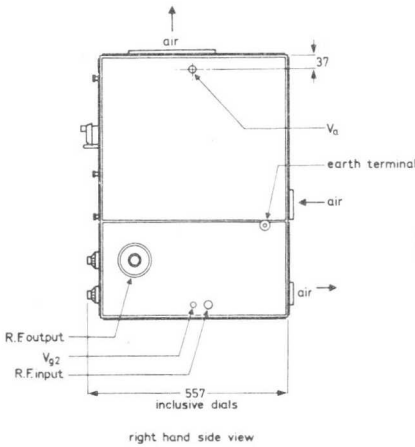

right hand side view

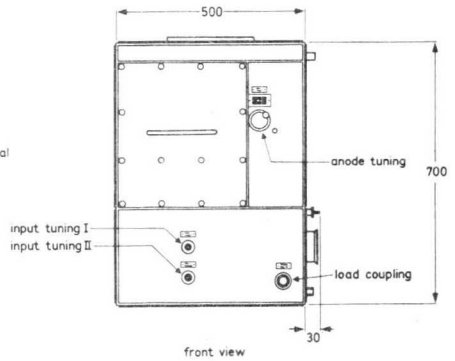


front view




top view


Output connector

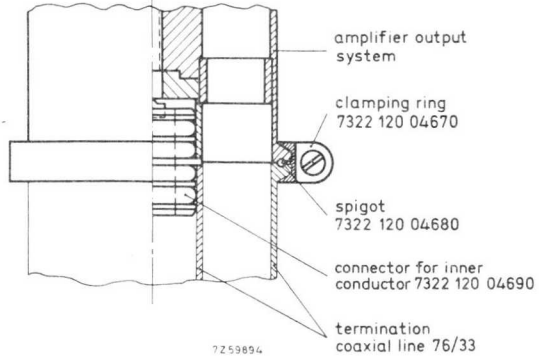


↑ to amplifier output system




clamping ring 7322 120 04670



spigot 7322 120 04680



connector for inner conductor 7322 120 04690

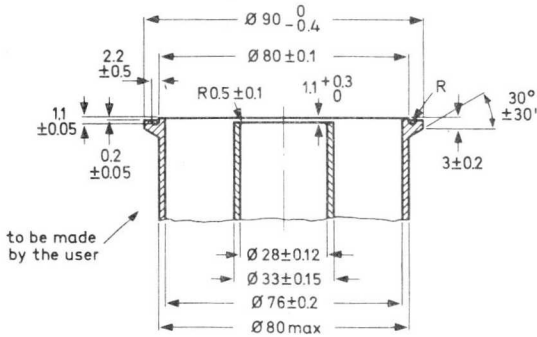

to be made by the user

termination coaxial line 76/33

COOLING

See cooling curves.

Direction of air flow: see page 8.

The cooling air, supplied by an external source, is admitted through an inlet in the rear panel.

IMPEDANCES

Input : 50 Ω (coaxial female connector, type N)

Output : 50 Ω (coaxial female connector, see drawing page 3)

ENVIRONMENTAL DATA

Ambient temperature : 0 $^{\circ}\text{C}$ to +55 $^{\circ}\text{C}$

Altitude : max. 3000 m

Relative humidity : up to 90%

VOLTAGE STANDING-WAVE RATIO

Input : max. permissible 1,3 for acceptable performance

Output : max. permissible 1,3 for acceptable performance


ADDITIONAL COMPONENTSa) Delivered with assembly

Tube extractor	7322 120 07850
Mating male input connector	Radiall type N
Output connector	
connector for inner conductor	7322 120 04690
spigot for outer conductor	7322 120 04680
clamping ring for outer conductor	7322 120 04670
Mating connector for anode voltage	Radiall type R13060
Mating connector for screen grid voltage	Radiall type R9510
Anode coil covering frequency range	
53 to 72 MHz for YL1430 and	---
53 to 66 MHz for YL1520	




b) Not delivered with assembly

Anode coil covering frequency range	
82 to 88 MHz for YL1430 and	8222 032 11860
70 to 88 MHz for YL1520	
Shorting bar to use in addition with coils,	
for highest channel for YL1520	8222 032 57110




CIRCUIT DIAGRAM


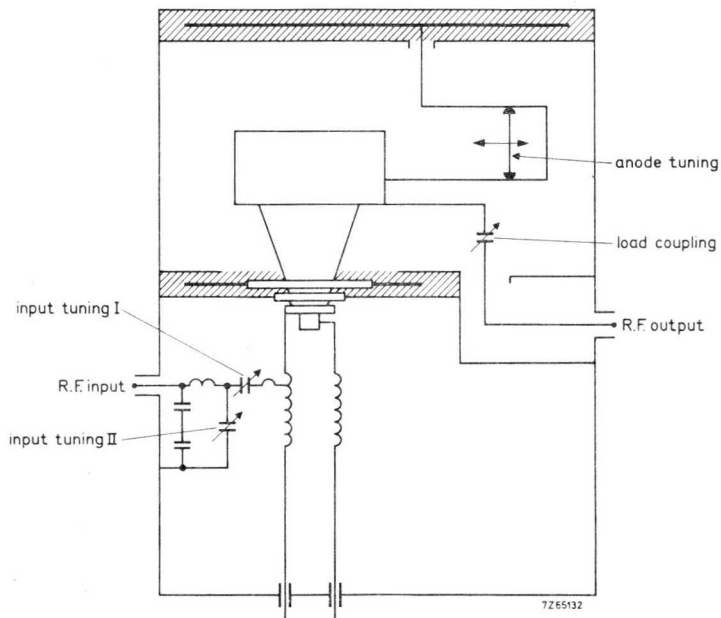


Cooling curves for amplifier 40760 fitted with tube YL1430

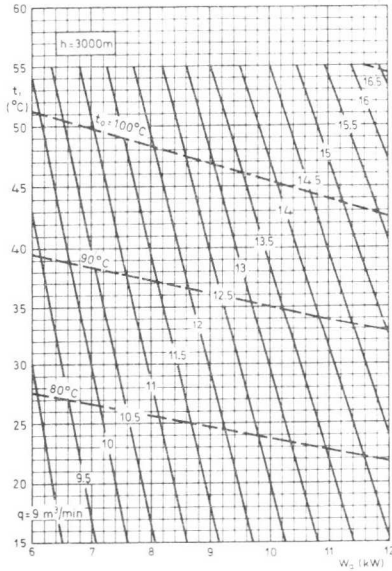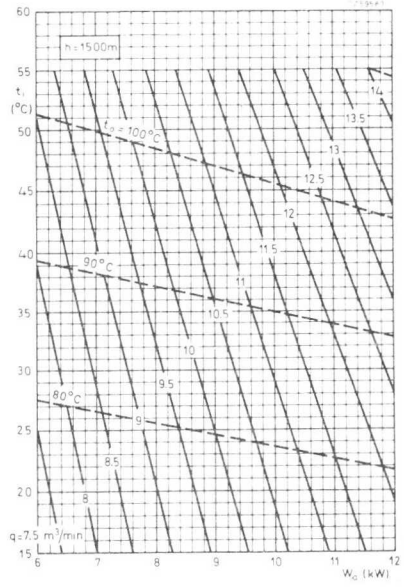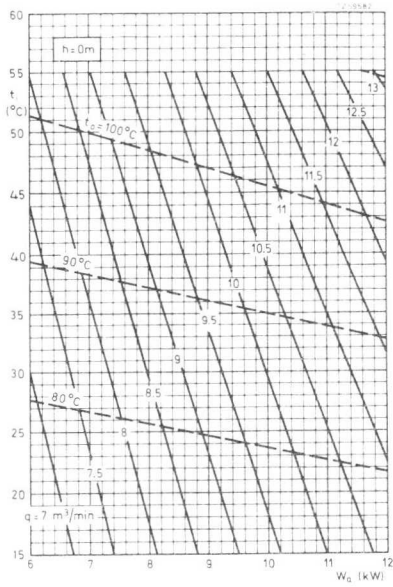

Cooling curves for amplifier 40760 fitted with tube YL1520

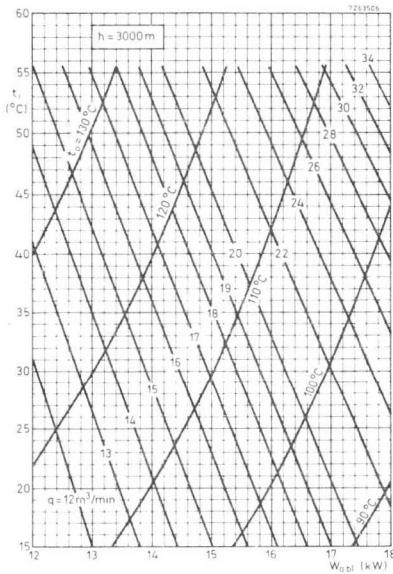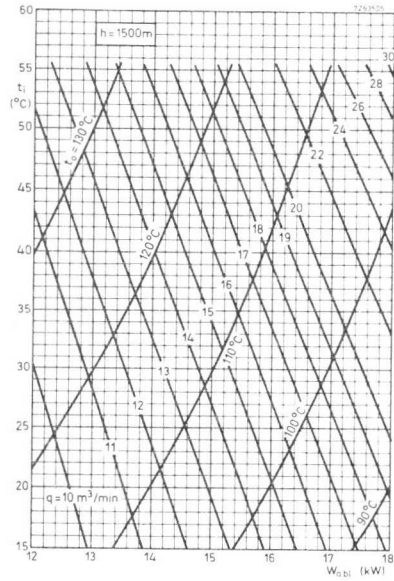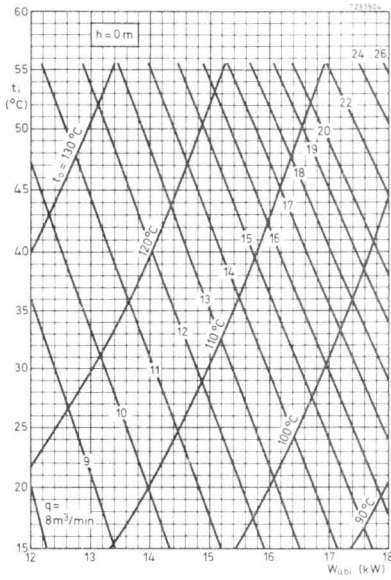

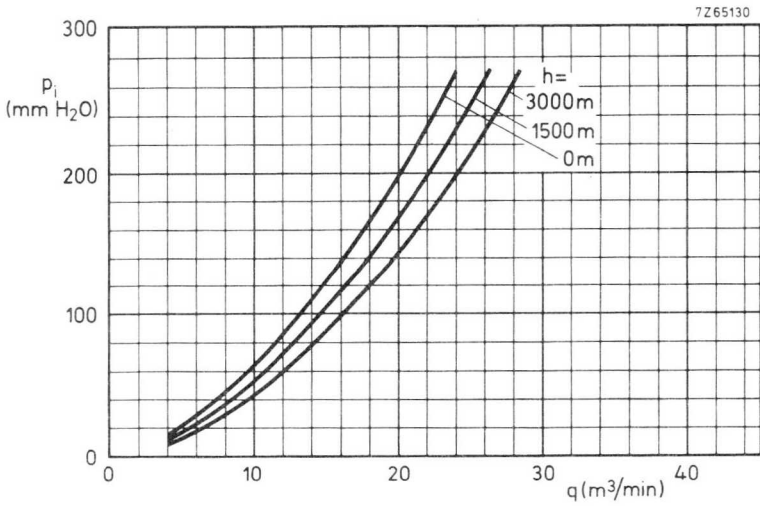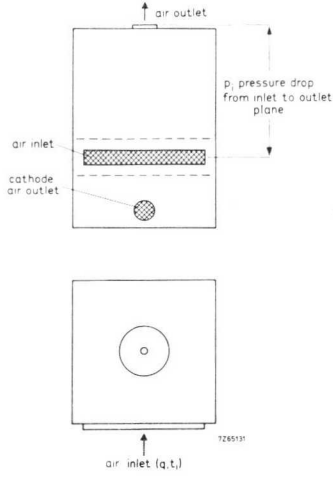

BAND III AMPLIFIER CIRCUIT ASSEMBLY FOR YL1520^{*)}

VISION AND COMBINED SOUND AND VISION

Continuously tunable cavity-type circuit assembly to be used with YL1520 to form a broad-band grounded-grid linear amplifier for television signals in Band III. The unit thus obtained can be put to good use in any of the principal monochrome and colour television systems.

QUICK REFERENCE DATA			
Class AB linear amplifier (vision)			
Frequency	170	to	230 MHz
Anode voltage			8 kV
Output power in load, sync			27,5 kW
Power gain			28,5
Class AB amplifier for television transposer service			
Frequency	175	to	225 MHz
Anode voltage			8 kV
Output power in load, sync			10,5 kW
Power gain			42

FREQUENCY RANGE

170 to 230 MHz continuously tunable.

OPERATING CONDITIONS (For YL1520)

For detailed operating conditions reference is made to the data sheets for tube type YL1520.





^{*)} Slight modifications make this cavity usable for YL1430 in the range 205 to 260 MHz.

MECHANICAL DATA


Dimensions in mm

Dimensions: approx. 685 x 415 mm³

Net weight: approx. 85 kg

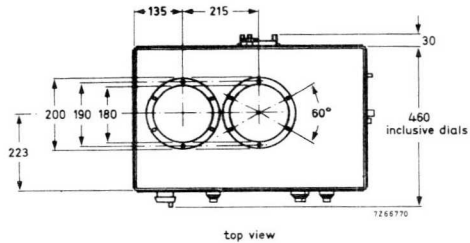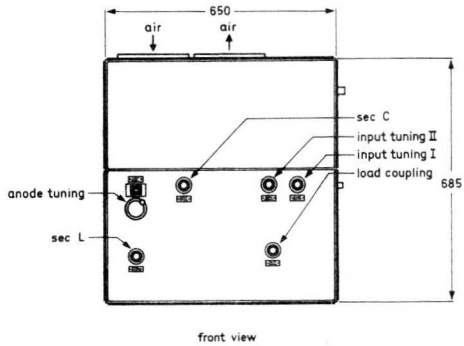


Output connector

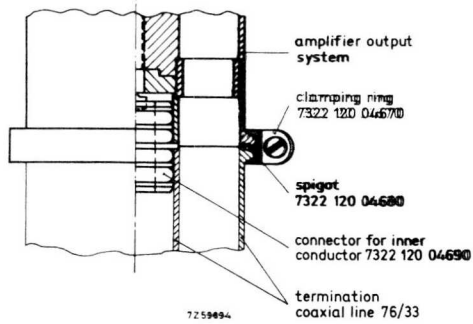


↑ to amplifier output system




clamping ring 7322 120 04670



spigot 7322 120 04680



connector for inner conductor 7322 120 04690

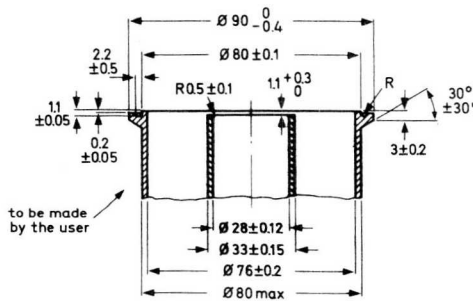

termination coaxial line 76/33

COOLING

See cooling curves.

Direction of airflow: see drawing page 7.

IMPEDANCES

Input : 50 Ω (coaxial female connector, type HN)

Output: 50 Ω (coaxial female connector: see drawing page 3)

ENVIRONMENTAL DATA

Ambient temperature: 0 $^{\circ}\text{C}$ to +55 $^{\circ}\text{C}$

Altitude : max. 3000 m

Relative humidity : up to 90%

VOLTAGE STANDING-WAVE RATIO

Input : max. permissible 1,3 for acceptable performance

Output: max. permissible 1,3 for acceptable performance



ADDITIONAL COMPONENTSa) Delivered with the assembly

Tube extractor	7322 120 07850
Mating male input connector	Radiall type HN R7050
Output connector	
connector for inner conductor	7322 120 04690
spigot for outer conductor	7322 120 04680
clamping ring for outer conductor	7322 120 04670
Mating connector for anode voltage	Radiall type R13060
Mating connector for screen grid voltage	Radiall type R9510
Coupling loop for 175, 25 MHz	7322 120 04730



b) Recommended

The use of circulator 2722 162 01191 (170 to 200 MHz) or 2722 162 01201 (200 to 230 MHz) is recommended.


CIRCUIT DIAGRAM

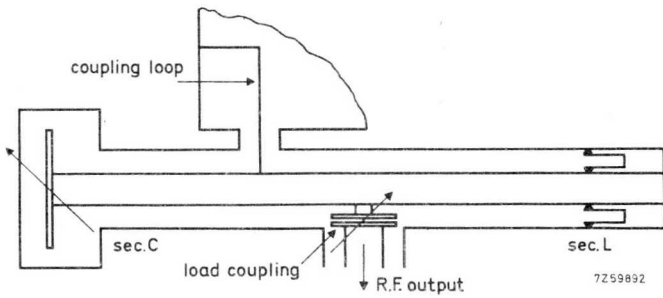
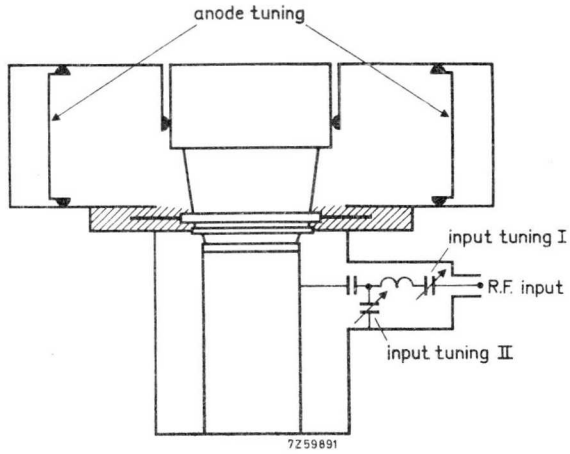


Cooling curves

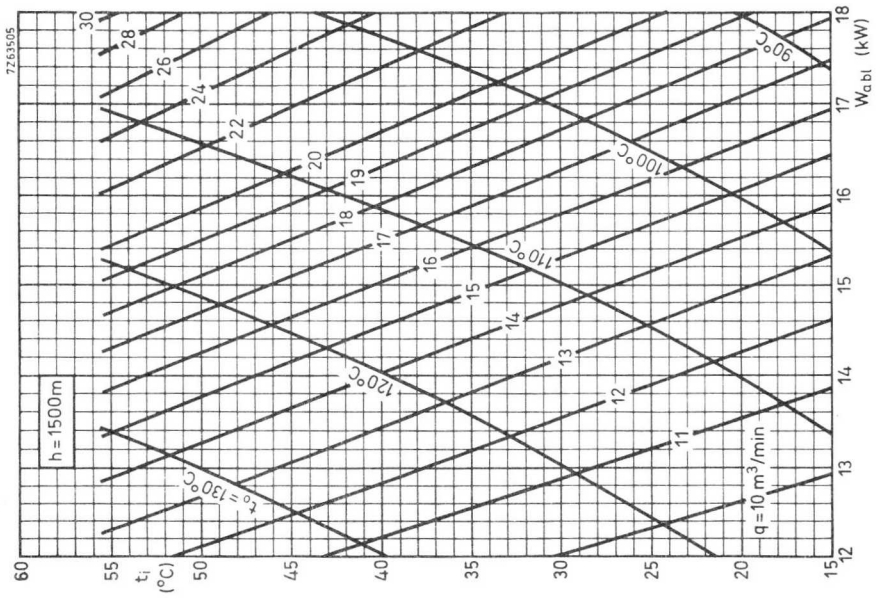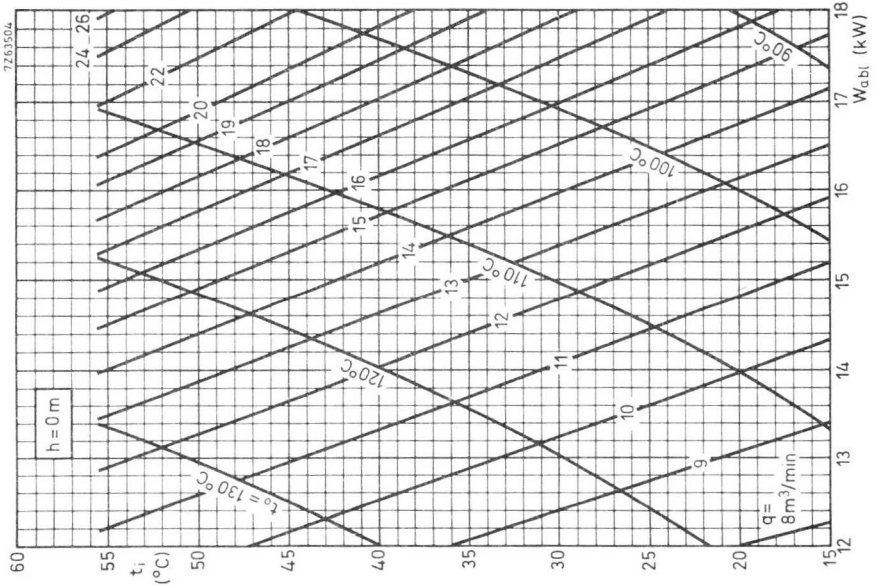

Cooling curves

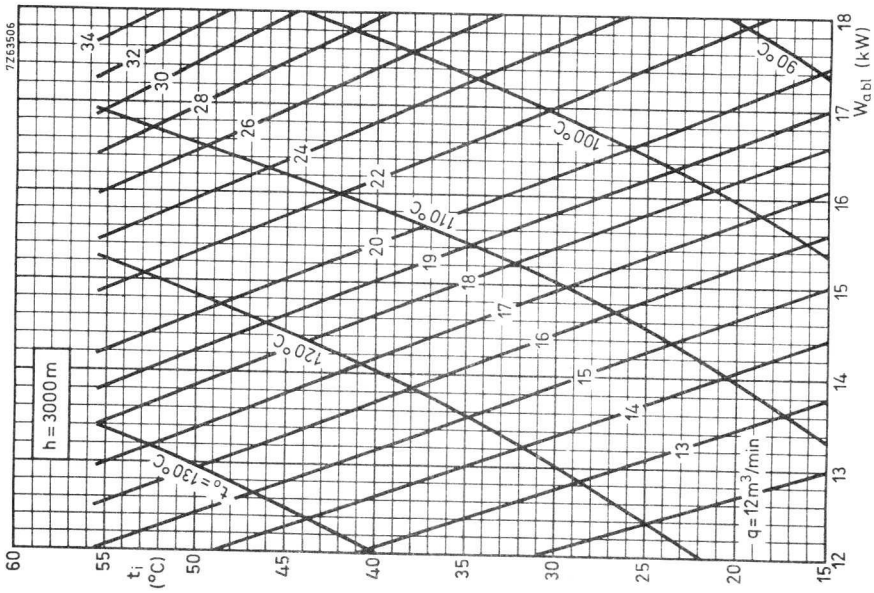

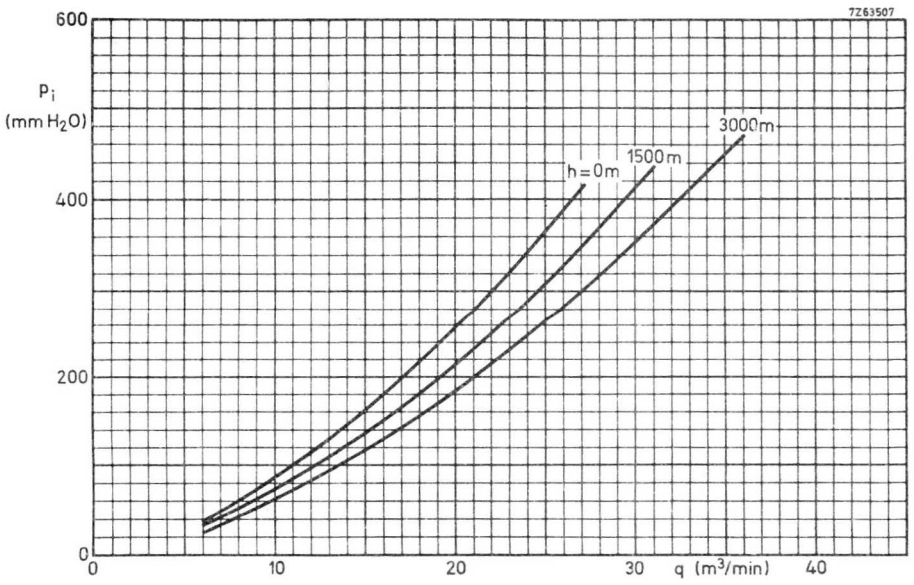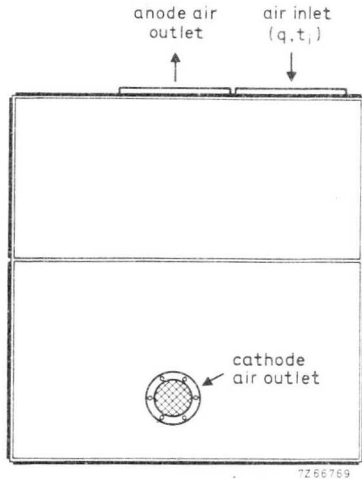

BAND II AMPLIFIER CIRCUIT ASSEMBLY FOR YL1470

Continuously tunable cavity-type circuit assembly to be used with YL 1470 to form a grounded-cathode amplifier of frequency-modulated signals in Band II.

QUICK REFERENCE DATA			
Frequency (MHz)	Class B amplifier		
	V_a (kV)	W_l (kW) CCIR system	Power gain (dB)
87,5 - 108	7	11	22

FREQUENCY RANGE

87,5 MHz to 108 MHz, continuously tunable.

OPERATING CONDITIONS

For detailed operating conditions reference is made to the data sheets for tube type YL 1470.

COOLING

See cooling curves.

Direction of airflow: see drawing page 5. Only blowing is allowed.

IMPEDANCES

Input : 50 Ω (coaxial female connector, type N)

Output: 50 Ω (coaxial connector: EIA 1⁵/₈ in)

VOLTAGE STANDING - WAVE RATIO

Input : max. permissible 1,3 for acceptable performance



Output: max. permissible 1,3 for acceptable performance

MECHANICAL DATA



Dimensions in mm

Dimensions: approx. 400 x 380 x 615 mm

Net mass : approx. 54 kg

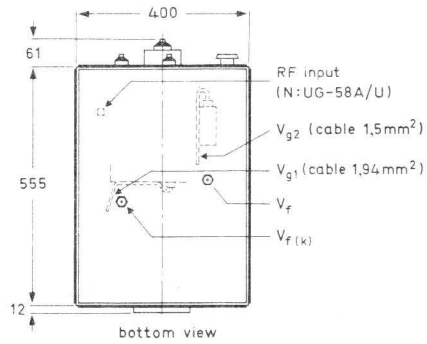

right-hand side view

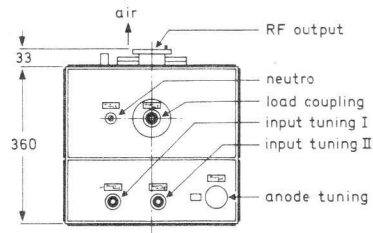

top view

ENVIRONMENTAL DATA

Ambient temperature: 0 °C to +55 °C

Altitude : max. 3000 m

Relative humidity : up to 90%

ADDITIONAL COMPONENTSSupplied with the assembly

Tube extractor

7322 120 07850




Mating male input connector



Radiall type N

Mating connector for anode voltage

Radiall type R 13060

Cooling curves

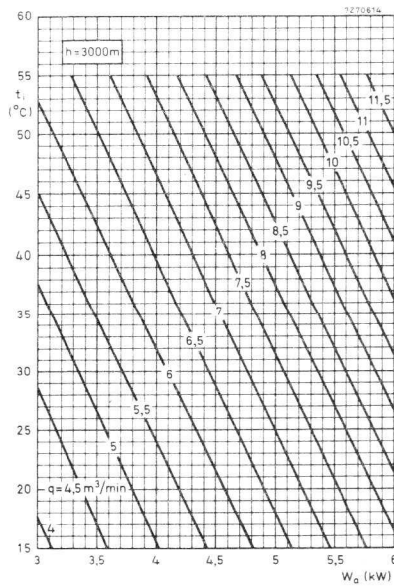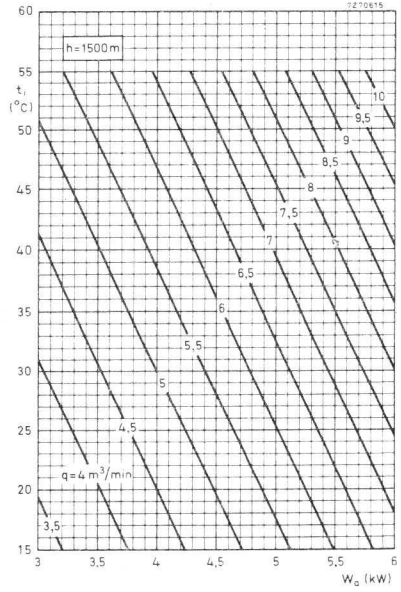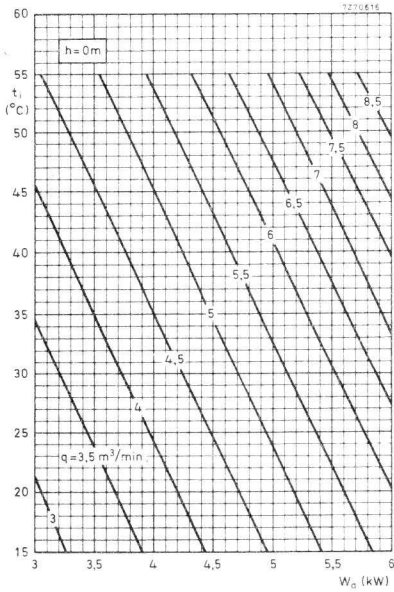


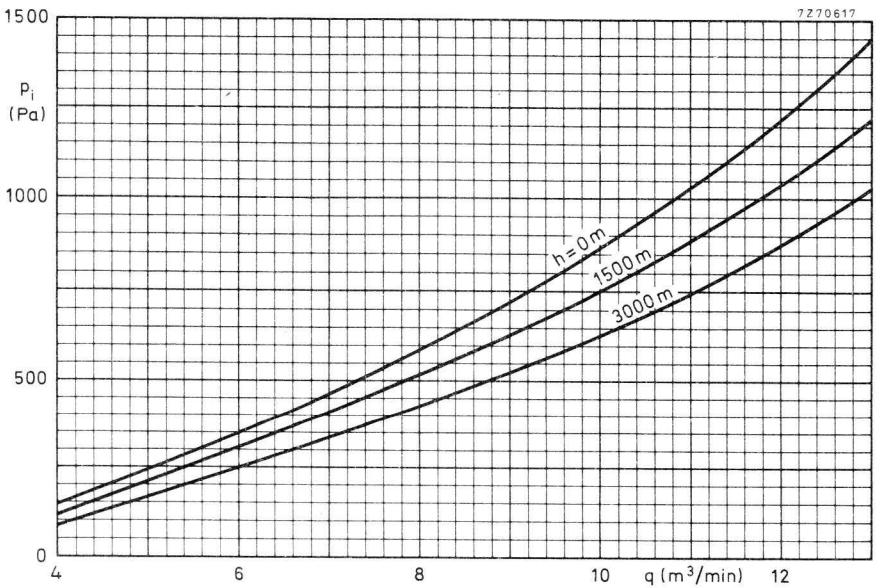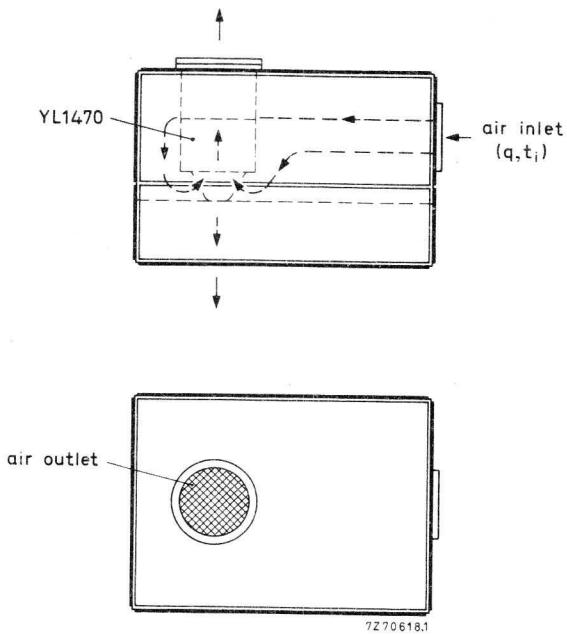

Associated accessories




COOLER HOUSING FOR AIR COILING

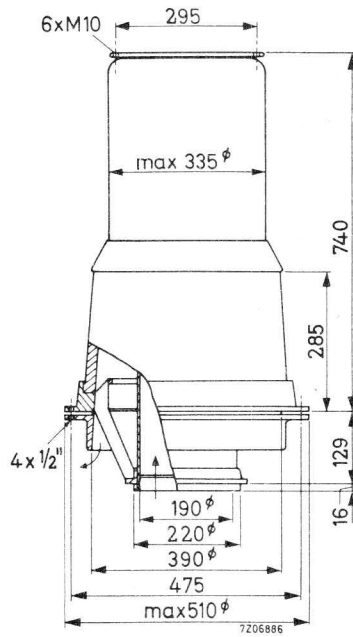


Net weight 72 kg

COOLER HOUSING FOR AIR COOLING

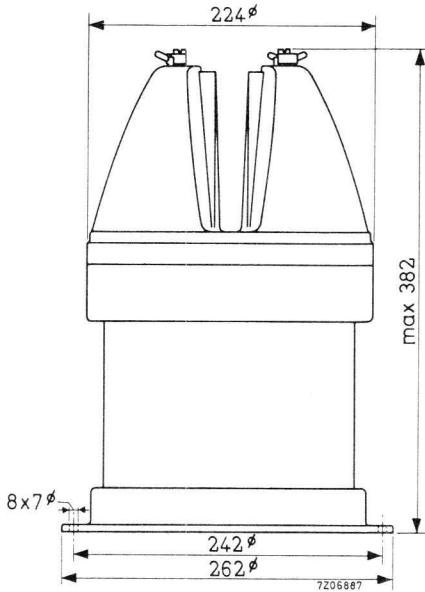


Net weight 7.4 kg

AIR DISTRIBUTOR UPPER PART OF K508

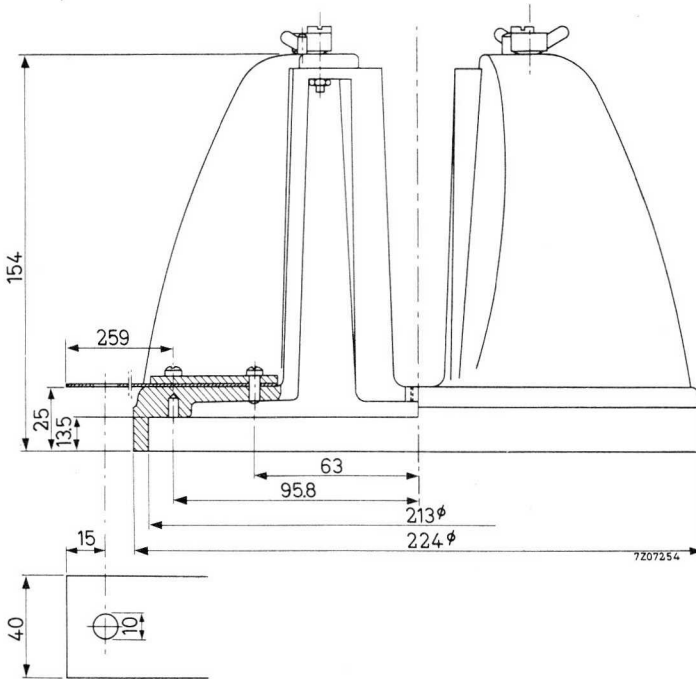


WATER JACKET

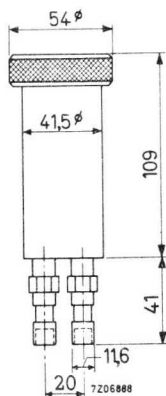

Net mass 0,52 kg
Absolute max. water pressure 6×10^5 Pa (≈ 6 at)

WATER JACKET

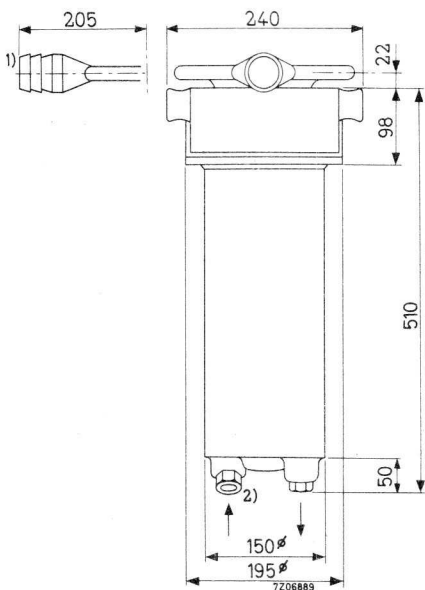


- 1) Use connecting hose with an inner diameter of $1\frac{3}{4}$ "
- 2) Coupling for metal tubing with an outer diameter of 28mm

Net weight 20,5 kg


Absolute max. water pressure 6×10^5 Pa = 6 atm abs

WATER JACKET

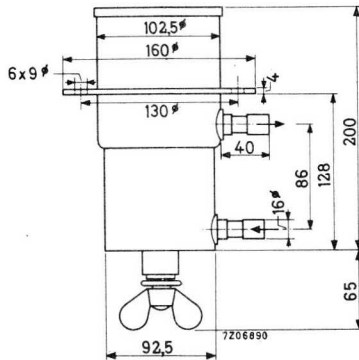


Net mass 2,6 kg
Absolute max. water pressure 6×10^5 Pa ≈ 6 at

WATER JACKET

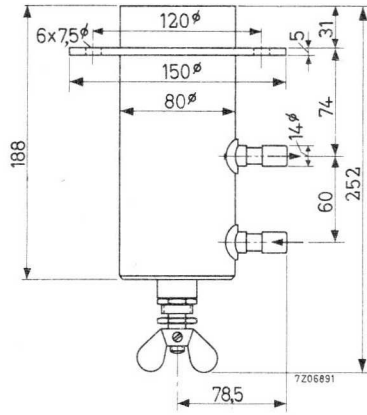


Net weight 2,2 kg
 Absolute max. water pressure $6 \times 10^5 \text{ Pa} = 6 \text{ atm abs}$

WATER JACKET

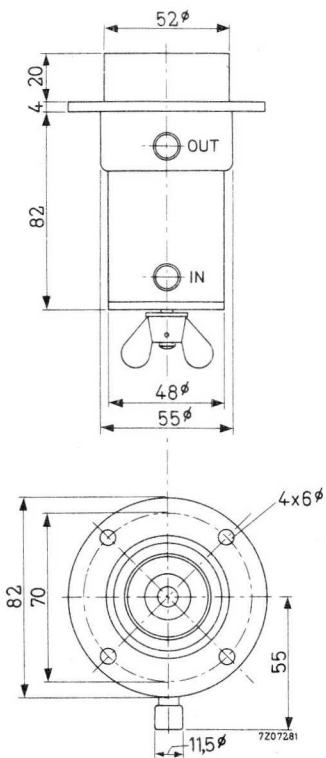

Net weight	0,76	kg
Absolute max. water pressure	6×10^5 Pa	= 6 atm abs

WATER JACKET

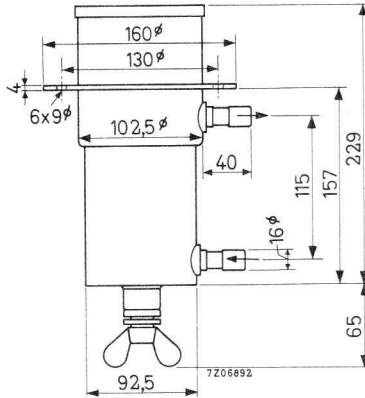


Net weight

2,7 kg

Absolute max. water pressure

6×10^5 Pa = 6 atm abs

WATER JACKET

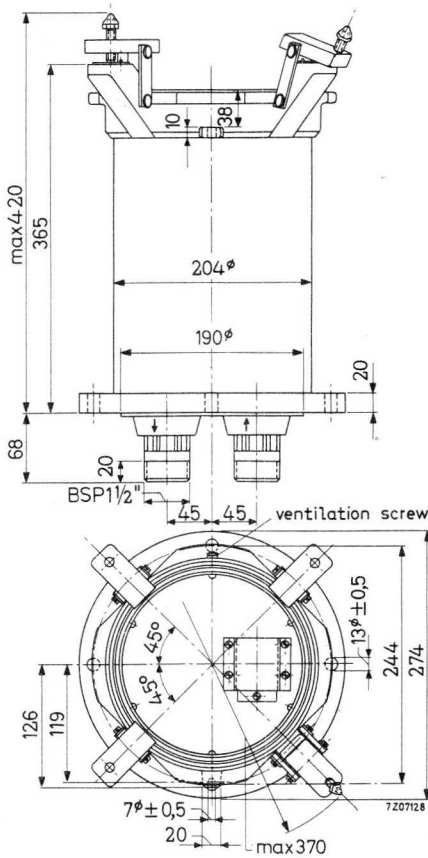


Net weight

30,5 kg

Absolute max. water pressure


 $6 \times 10^5 \text{ Pa} = 6 \text{ atm abs}$

WATER JACKET

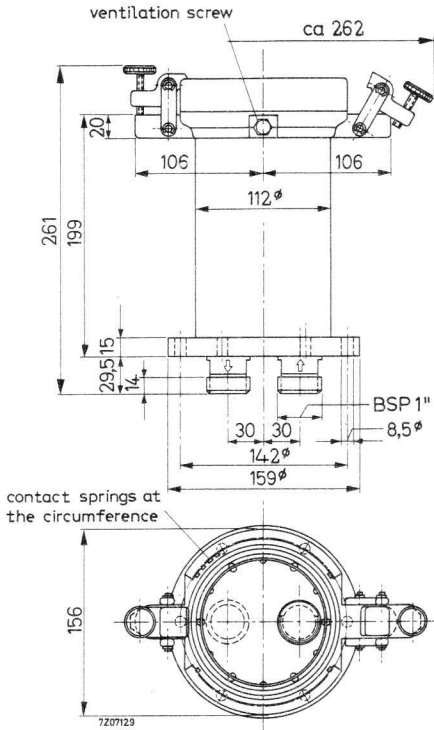

Net weight	5	kg
Absolute max. water pressure	$6 \times 10^5 \text{ Pa} = 6 \text{ atm abs}$	

WATER JACKET

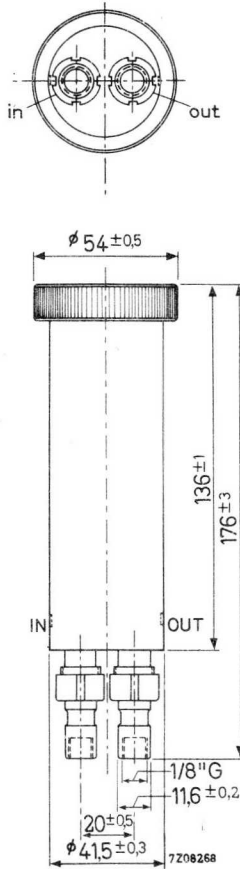


Net weight

kg

Absolute max. water pressure


 $6 \times 10^5 \text{ Pa} = 6 \text{ atm abs}$

VAPOUR JACKET

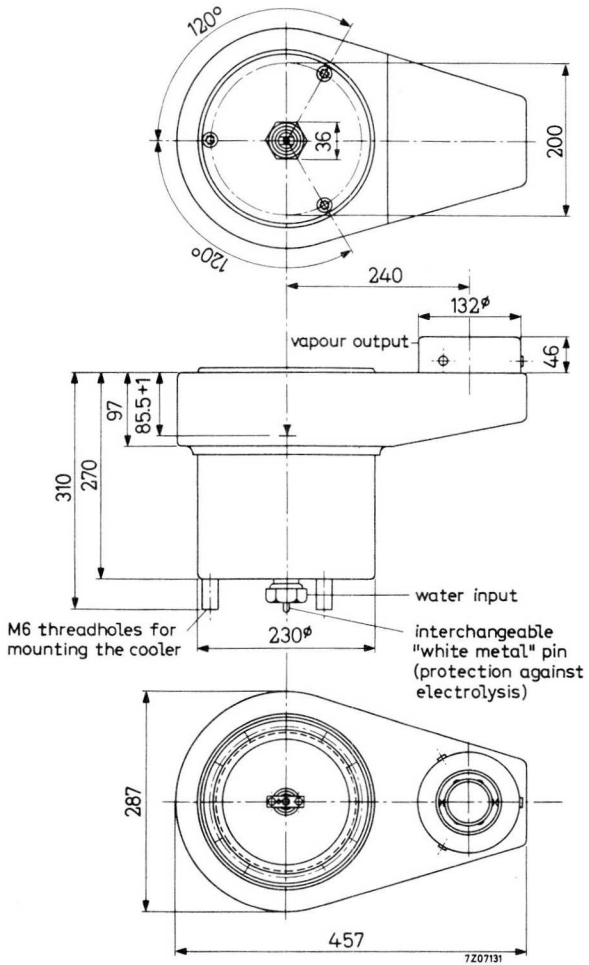



Net weight 8 kg

VAPOUR JACKET

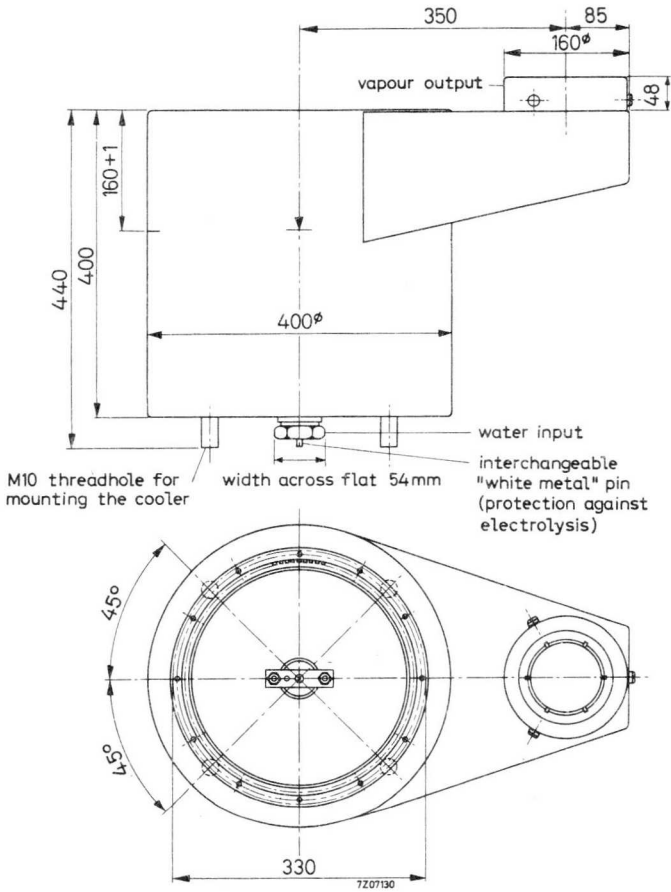

Net weight 22 kg

WATER JACKET

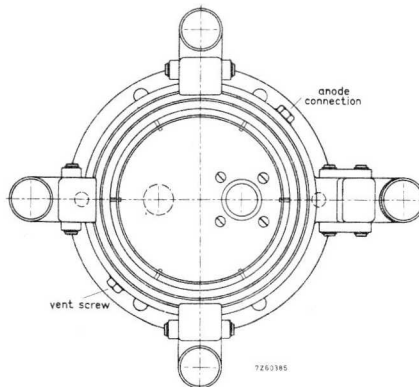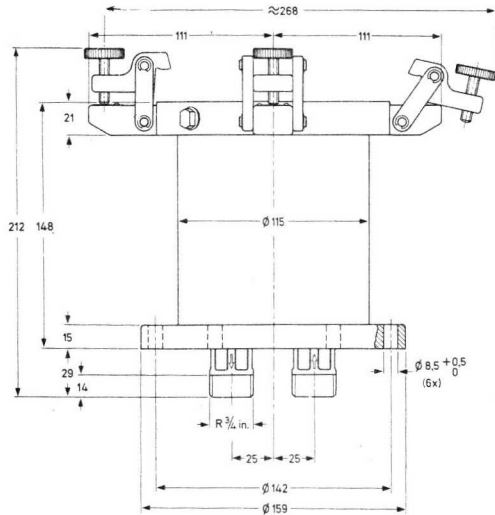

Net weight


6 kg


Absolute max. water pressure

$1,1 \times 10^6 \text{ Pa} = 10 \text{ atm abs}$

K733
K735

BOILER-CONDENSOR

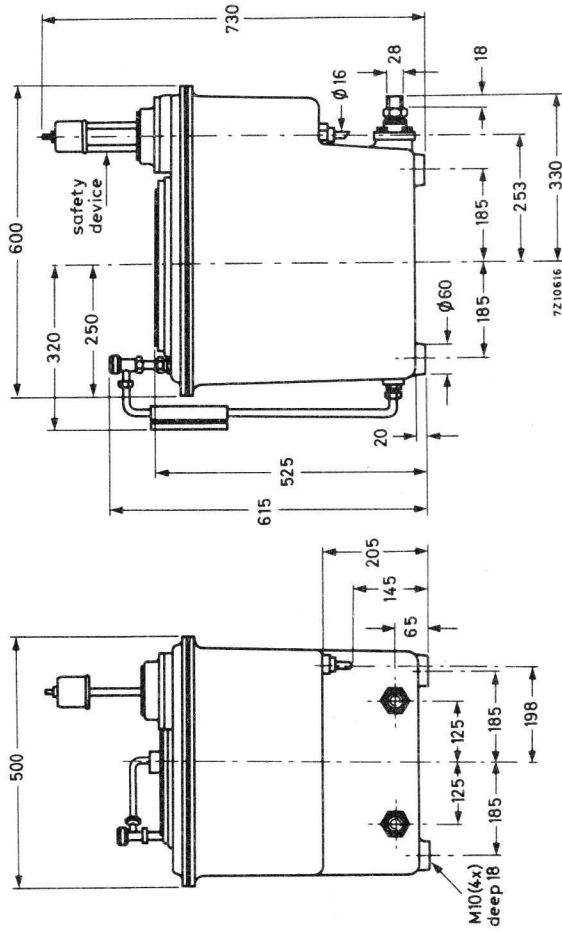


ANODE CONNECTORFOR 1,5 mm \varnothing TERMINALS


Material: brass, silver plated

TOP CAP CONNECTOR



FOR TOP CAPS WITH 14.38 mm \varnothing (IEC 67-III-1b, type 3).

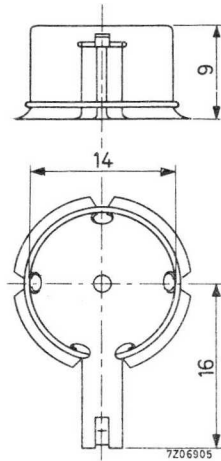


Material: brass, nickel plated

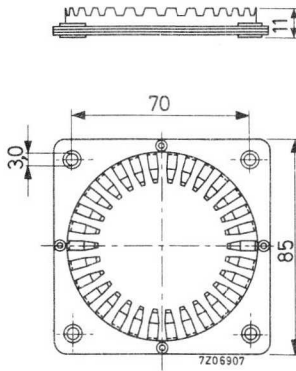GRID CONNECTORFOR 70 mm \varnothing TERMINALS


Material: brass, silver plated

ANODE CONNECTORFOR 2 mm \varnothing TERMINALS

Material: brass, silver plated

ANODE CONNECTORFOR 9 mm ϕ TERMINALS



Material: brass, nickel plated

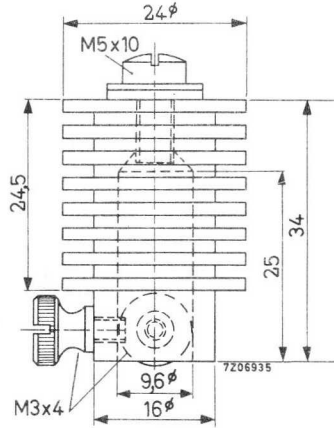ANODE CONNECTORFOR 9,5 mm \varnothing TERMINALS

Material: brass, nickel plated


FILAMENT CONNECTOR

FOR 9,5 mm Ø TERMINALS




Material: brass, silver plated

INSULATING PEDESTAL

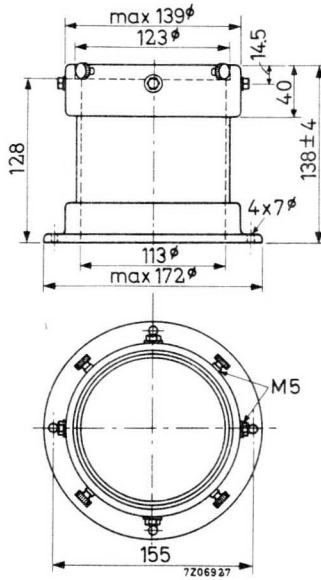


Material: ceramic
 Net weight: 2.1 kg

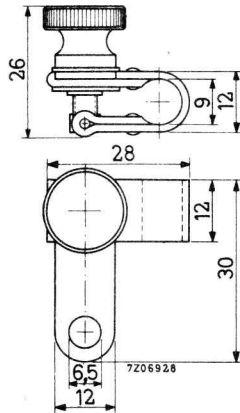FILAMENT CONNECTORFOR 9,1 mm \varnothing TERMINALS


Material: Brass, nickel plated

INSULATING PEDESTAL

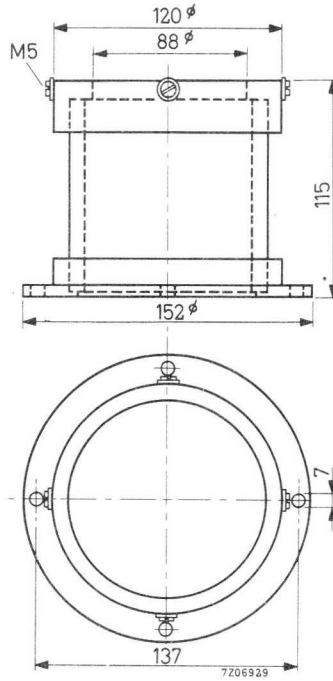


Material: ceramic
Net weight: 1.6 kg


INSULATING PEDESTAL

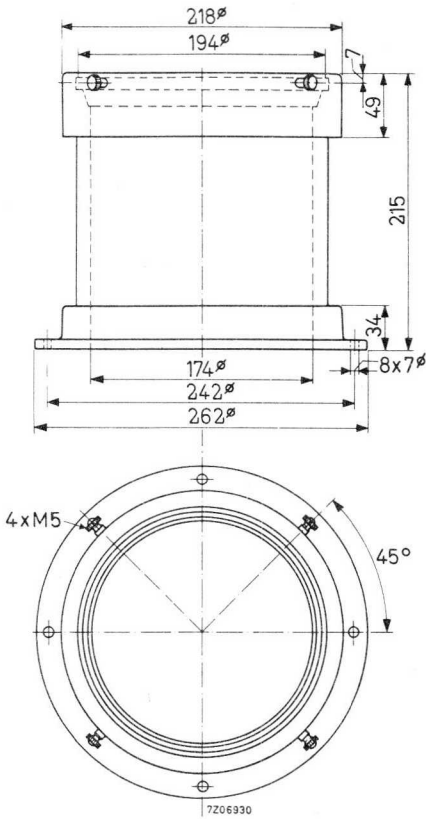


Material: ceramic

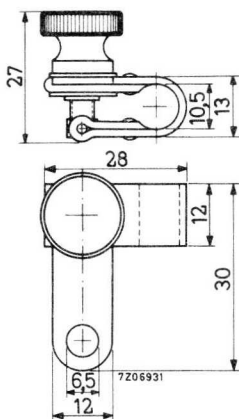FILAMENT CONNECTORFOR 10,5 mm ϕ TERMINALS


Material: brass, nickel plated

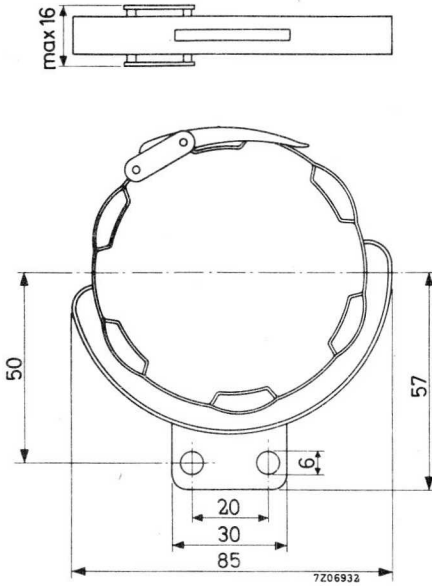GRID CONNECTORFOR 70 mm \varnothing TERMINALS


Material: brass, nickel plated

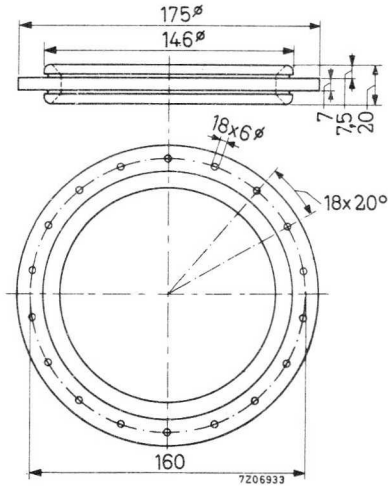GRID AND ANODE CONNECTORFOR 127 mm \varnothing TERMINALS

Material: brass, silver plated

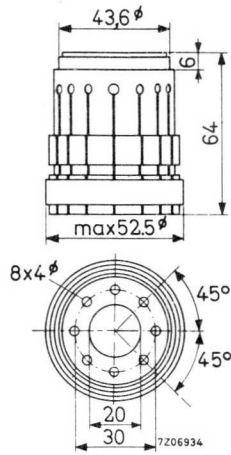
FILAMENT CONNECTORFOR 40,5 mm \varnothing TERMINALS

Material; brass, silver plated

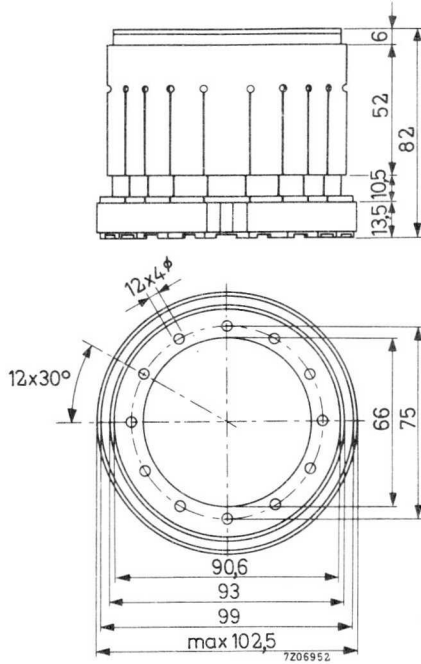FILAMENT CONNECTORFOR 82 mm \varnothing TERMINALS


Material: brass, silver plated

INSULATING PEDESTAL

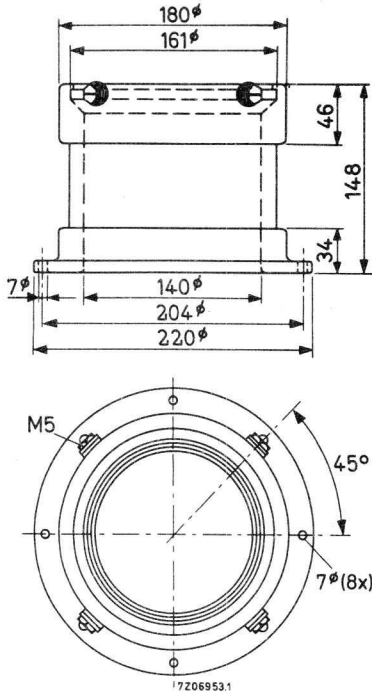


Material: ceramic
Net weight: 4.25 kg

FILAMENT CONNECTOR WITH CABLE

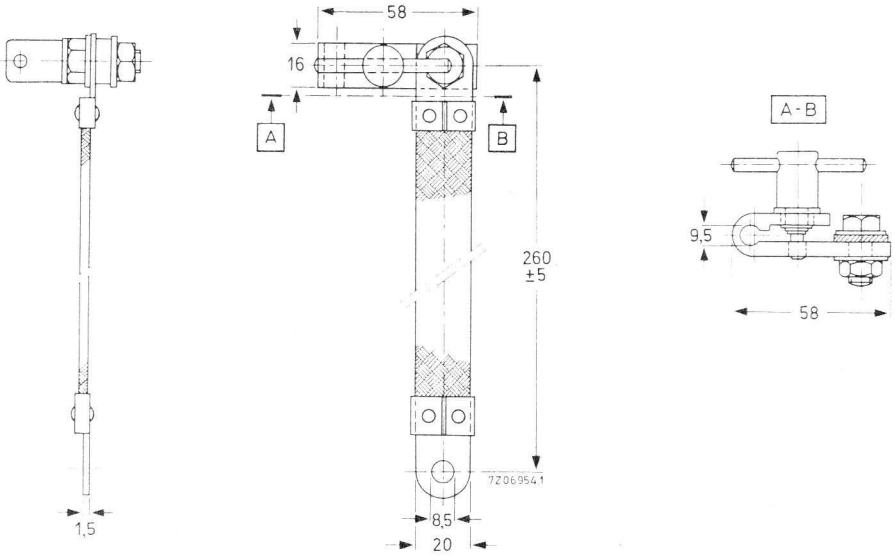


Material: cable - braided copper
 connector - brass, nickel plated

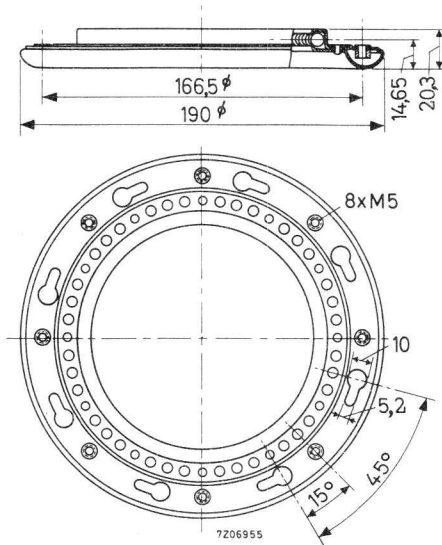GRID CONNECTORFOR 114 mm \varnothing TERMINALS


Material: brass, silver plated

GRID CONNECTOR

FOR 96 mm \varnothing TERMINALS

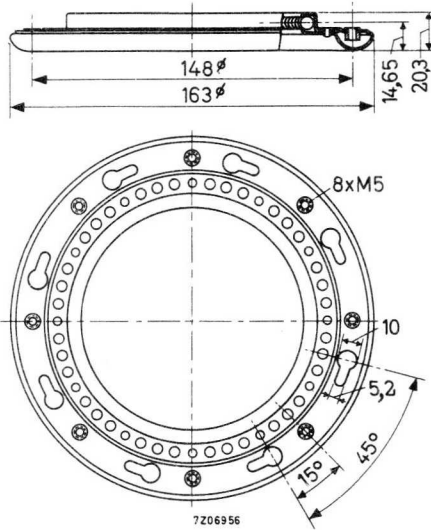


Material: brass, silver plated

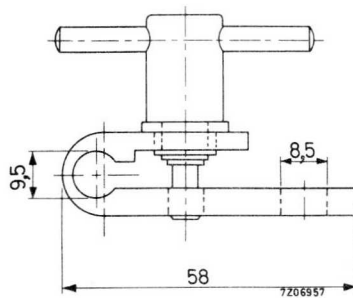ANODE CONNECTORFOR 9,5 mm \varnothing TERMINALS

Material: brass, nickel plated


40666

CHIMNEY

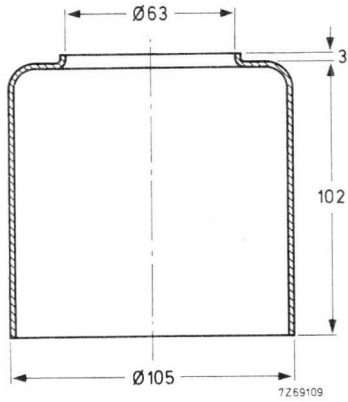


Material : glass


FILAMENT CONNECTOR WITH CABLE

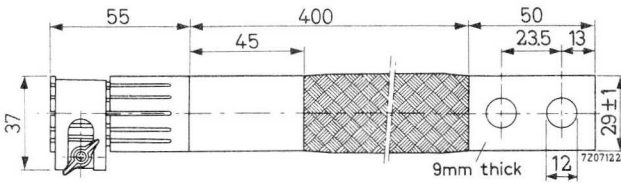


FILAMENT CONNECTOR WITH CABLE

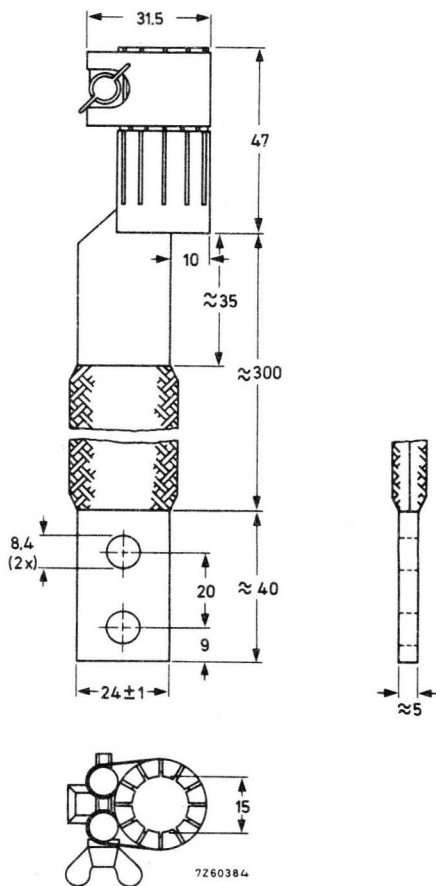

INSULATING PEDESTAL

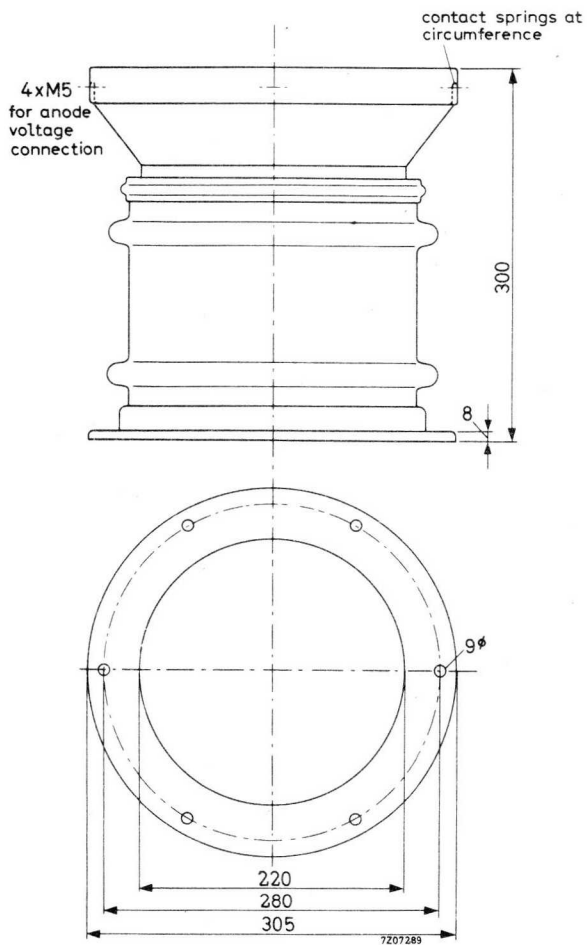


Net mass 9,2 kg

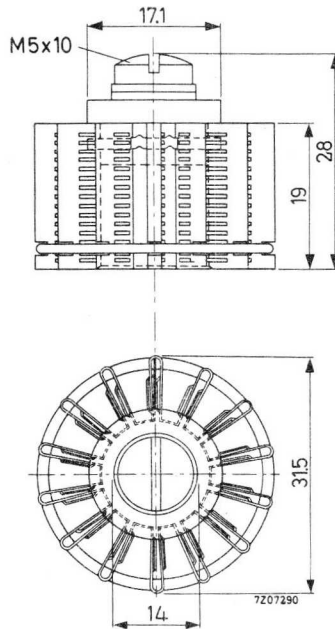ANODE CONNECTORFOR TOP CAPS WITH 14.38 mm ϕ (IEC67-III-1b, type 3)

Material: brass, nickel plated

ANODE CONNECTOR


FOR 3 mm \varnothing TERMINALS

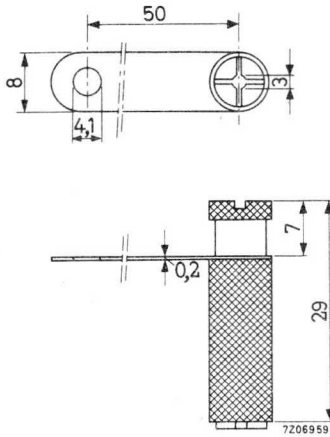

Material: brass, silver plated


TUBE SOCKET


FOR 82 mm, 50 mm, 25,5 mm and 6 mm CONCENTRIC TERMINALS

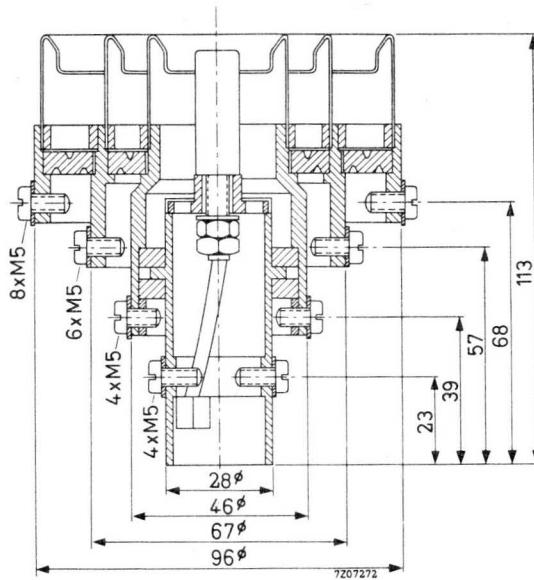

Material: synthetic resin insulating material
nickel plated contacts

CHIMNEY

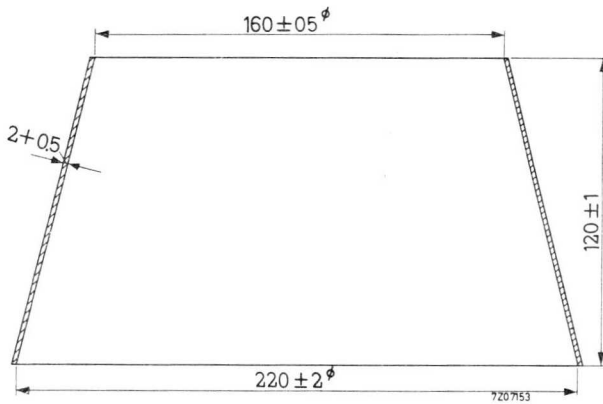


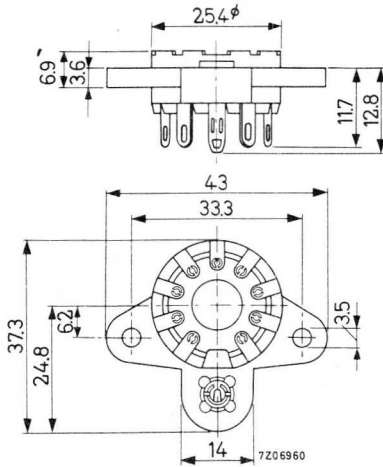TUBE SOCKET FOR MAGNOVAL BASES

Material: synthetic resin insulating material
9 silver plated cup-shaped contacts


GRID CONNECTOR

FOR 48 mm ϕ TERMINALS

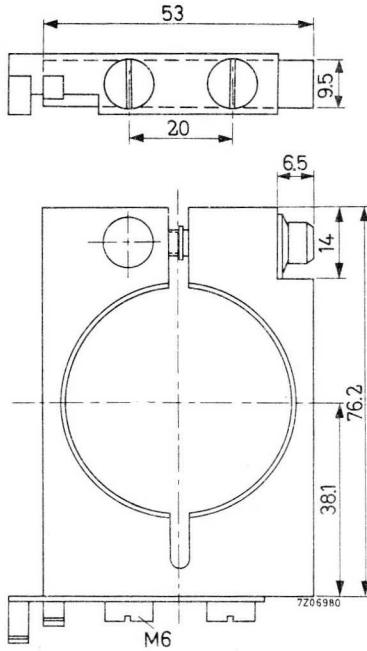


Material: brass, silver plated


GRID CONNECTOR

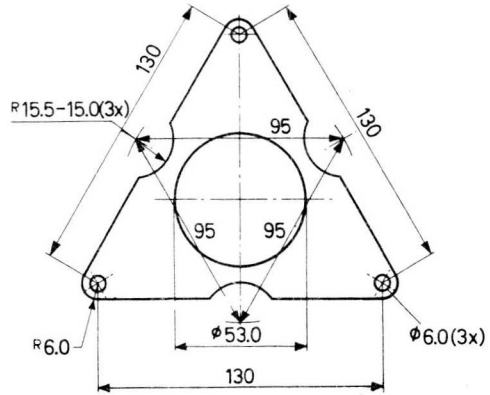


Material: Brass

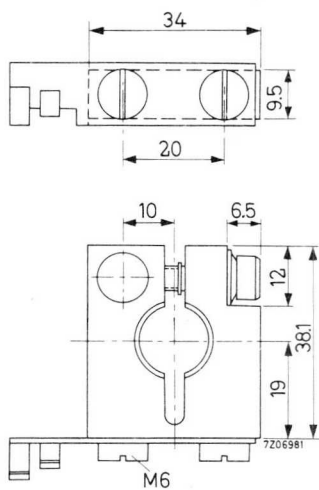FILAMENT CONNECTORFOR 14.4 mm ϕ TERMINALS


Material: brass, nickel plated

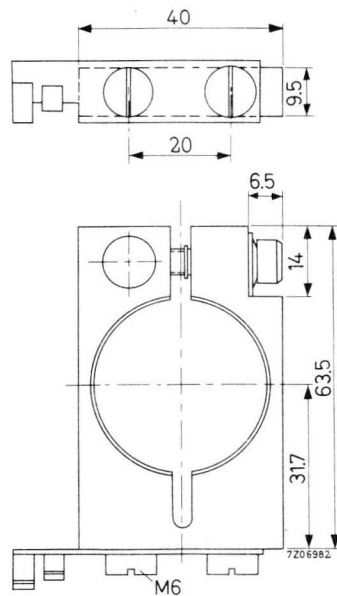FILAMENT CONNECTORFOR 36 mm ϕ TERMINALS

Material: brass, nickel plated

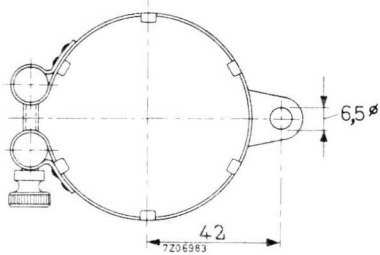GRID CONNECTORFOR 66 mm ϕ TERMINALS

Material: brass, nickel plated
Net weight: 55 g


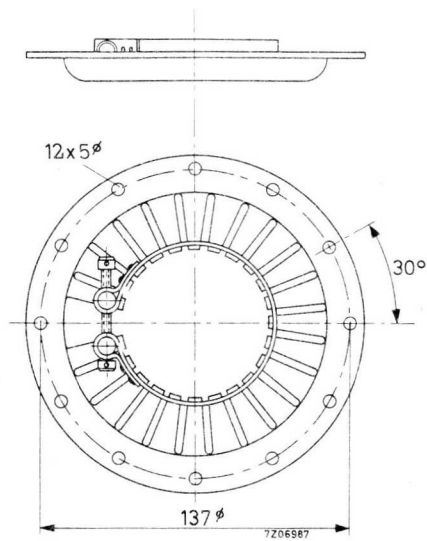
GRID CONNECTORFOR 66 mm ϕ TERMINALS

Material: brass, silver plated
Net weight: 240 g

40692A

FILAMENT CONNECTOR for 25 mm dia. terminals




Net mass: ≈ 450 g

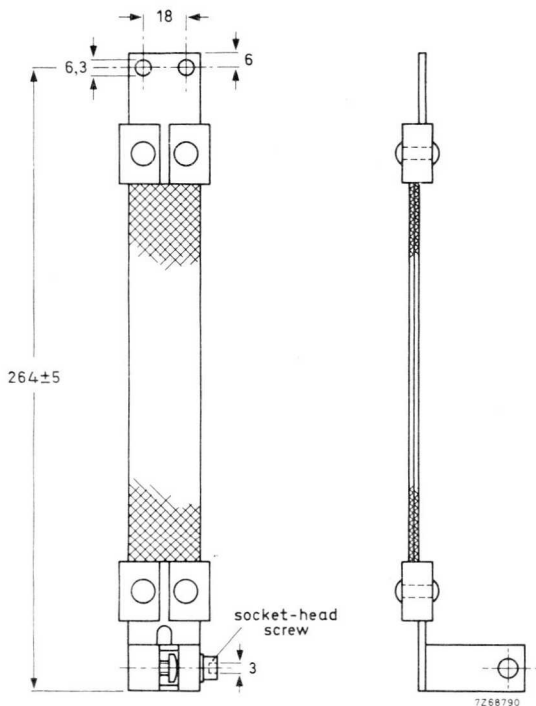

FILAMENT CONNECTOR


for 50 mm dia. terminals

Net mass: ≈ 480 g

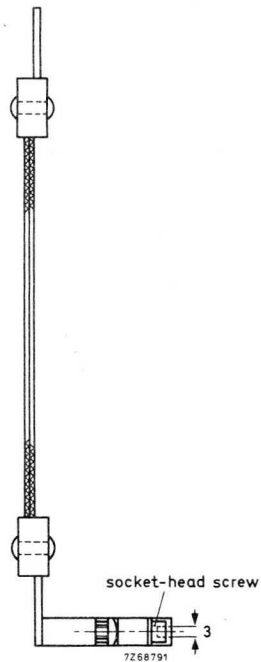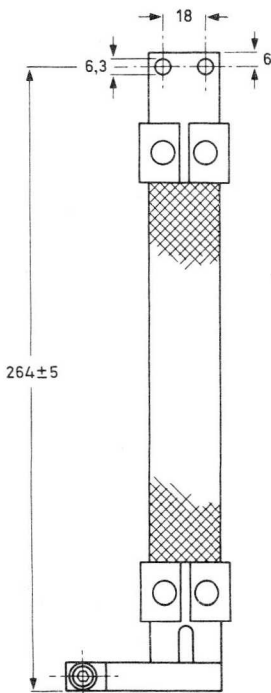

GRID CONNECTOR

FOR 112 mm ϕ TERMINALS



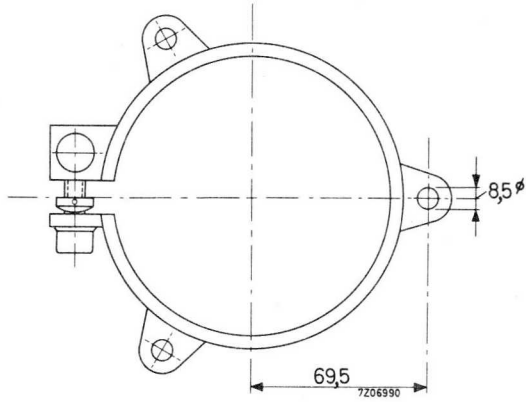


Material: brass, nickel plated
Net weight: 270 g

WATER-COOLED FILAMENT CONNECTOR

for 54 mm dia. terminals




Net mass: ≈ 1380 g

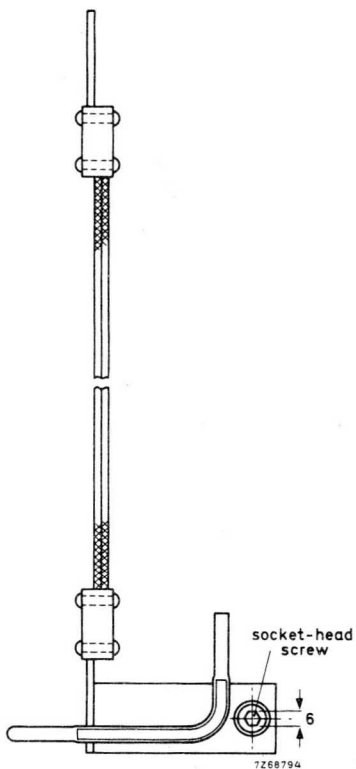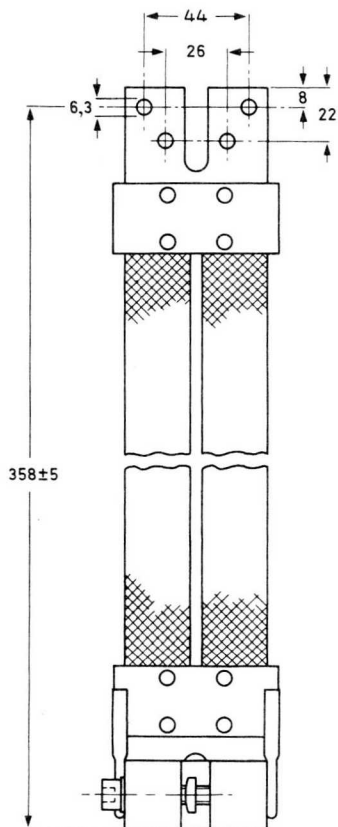

40696A

WATER-COOLED FILAMENT CONNECTOR for 96 mm dia. terminals

Net mass: ≈ 1550 g

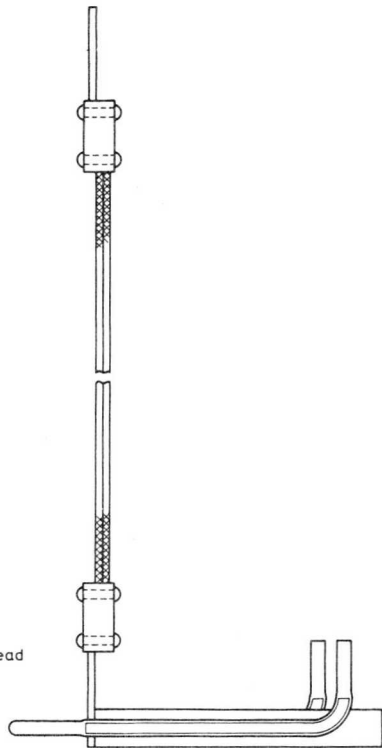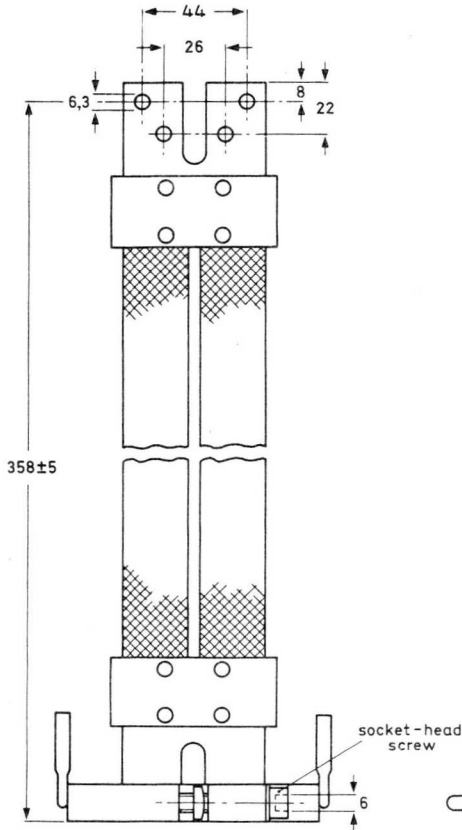
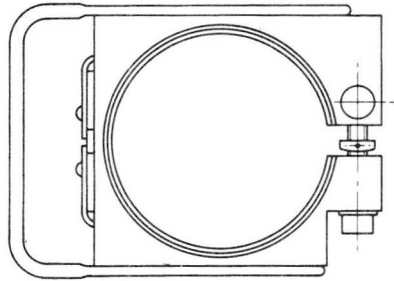


7268795

FILAMENT CONNECTOR

for 42 mm dia. terminals




Net weight: ≈ 450 g

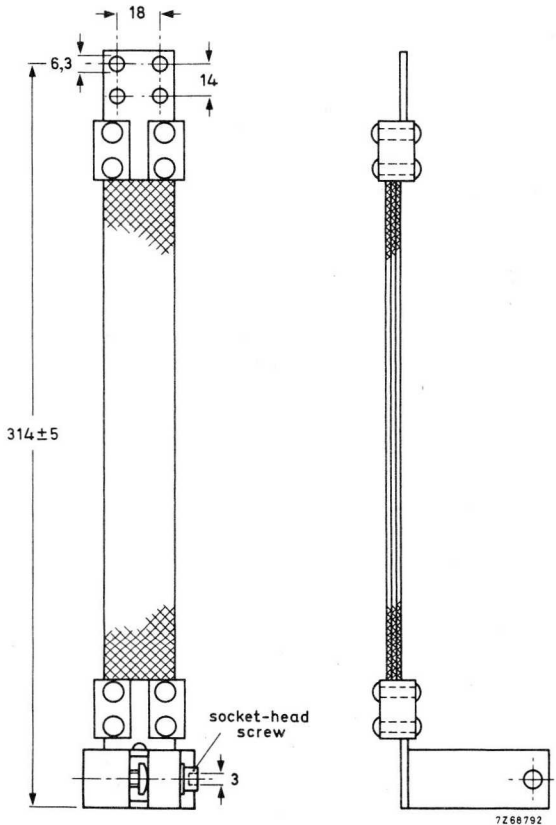


FILAMENT CONNECTOR

for 86 mm dia. terminals

Net mass: ≈ 830 g

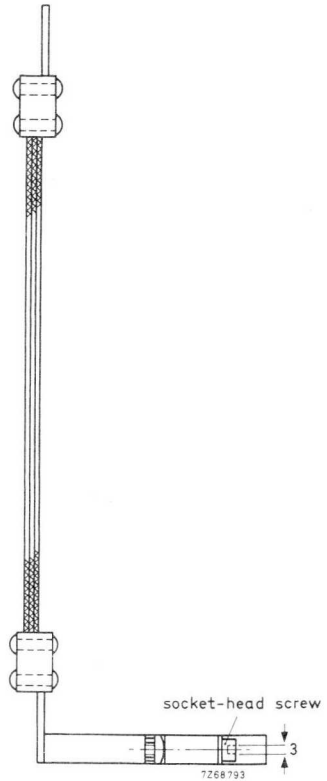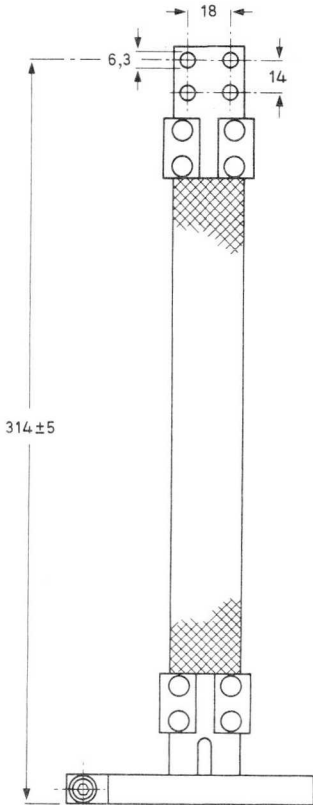



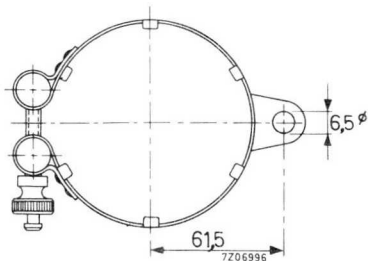
GRID CONNECTORFOR 105 mm ϕ TERMINALS

Material: brass, nickel plated

FILAMENT CONNECTOR

for 66 mm dia. terminals


Net mass: ≈ 640 g

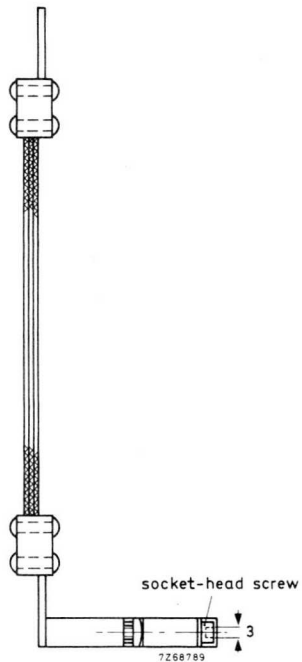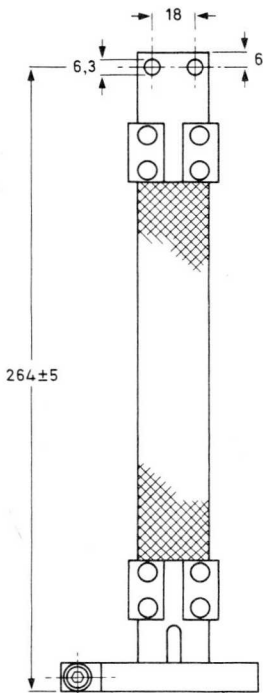

40710


GRID CONNECTOR

FOR 80 mm ϕ TERMINALS

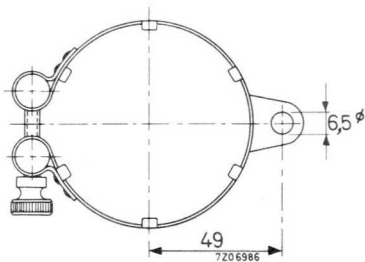

Material: brass, nickel plated
Net weight: 60 g


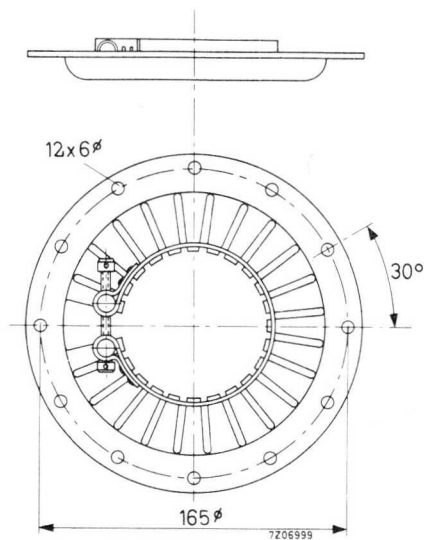


GRID CONNECTORFOR 80 mm ϕ TERMINALS

Material: brass, silver plated
Net weight: 310 g

FILAMENT CONNECTOR



FOR 27 mm and 17 mm CONCENTRIC TERMINALS

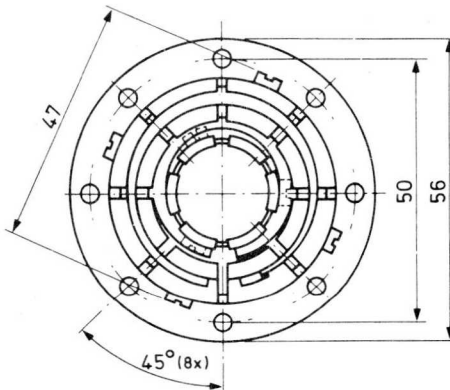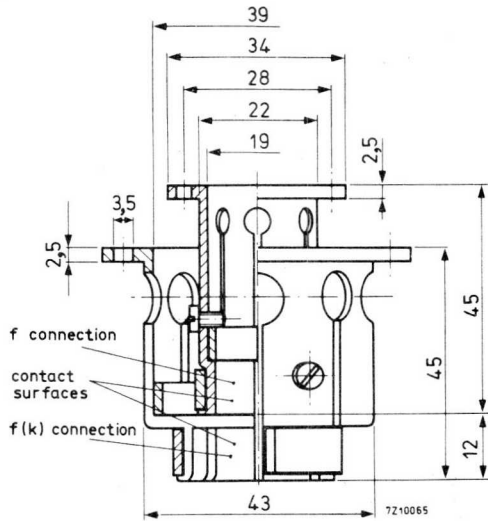

Net weight: approx. 0,2 kg

GRID CONNECTOR


FOR 37 mm \varnothing TERMINALS

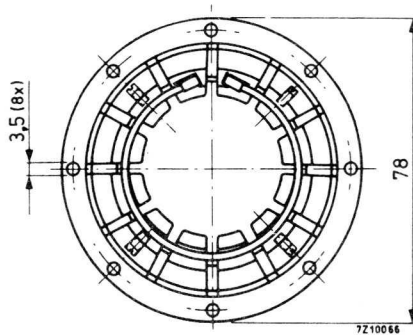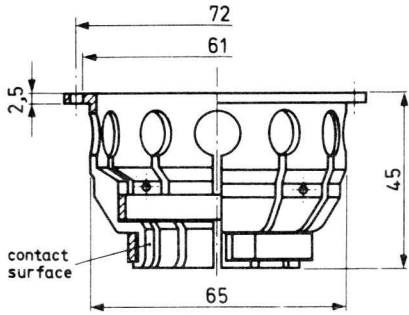

Net weight: approx. 0,2 kg

SCREEN GRID CONNECTOR

FOR 79 mm ϕ TERMINALS

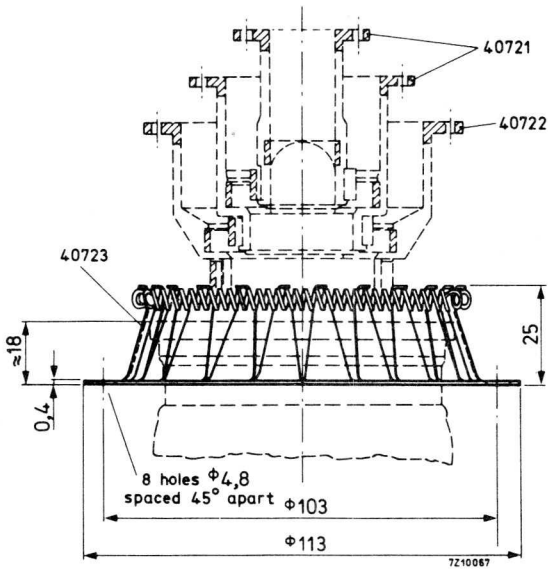


Net weight: approx. 0,1 kg


Caution

The tube must never be pulled through the spring ring. So, if it has to be inserted from above, this should be done first, before the screen grid connection is made. Similarly, the tube can only be taken out after the screen grid connector has been removed.

INSULATING PEDESTAL

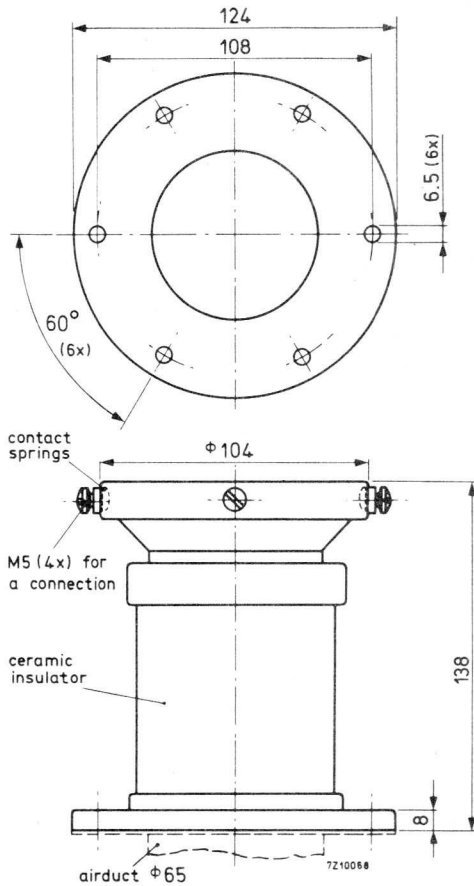


Net weight: approx. 1.3 kg

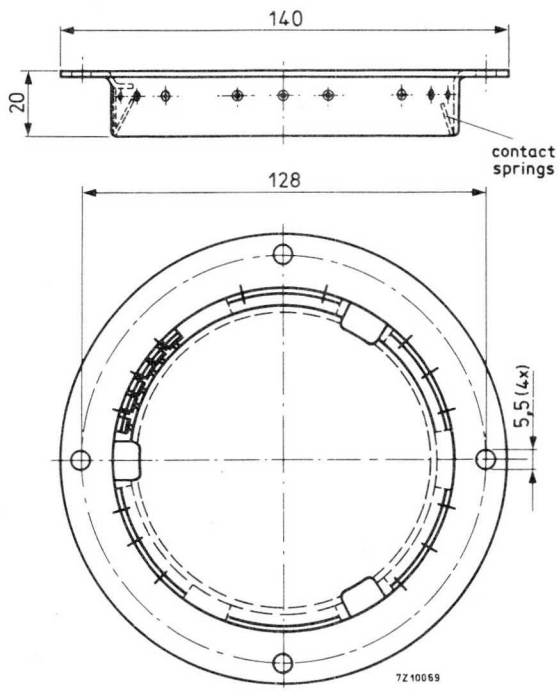GRID CONNECTORFOR 100 mm \varnothing TERMINALS

Net weight: approx. 0,14 kg


SCREEN GRID CONNECTOR

FOR 134 mm \varnothing TERMINALS

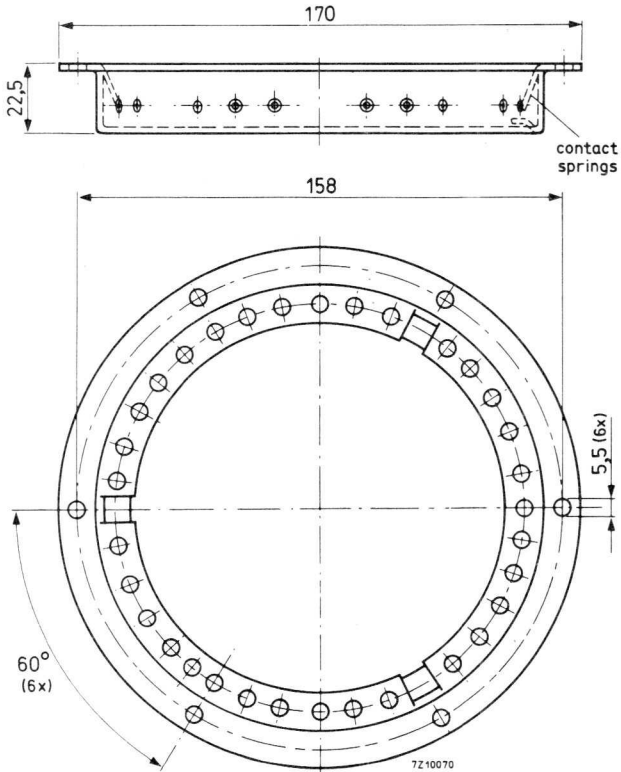

Net weight: approx. 0,2 kg



INSULATING PEDESTAL

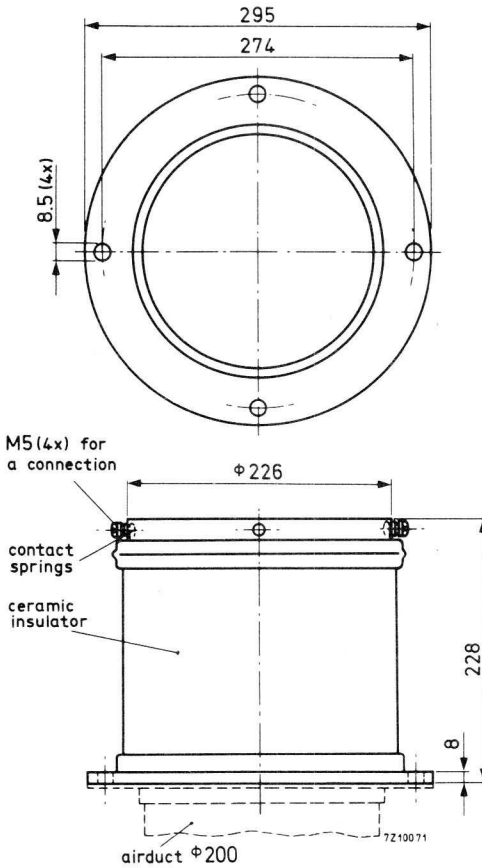


Net weight: approx. 8.2 kg

FILAMENT CONNECTOR

FOR 96 mm AND 40 mm CONCENTRIC TERMINALS

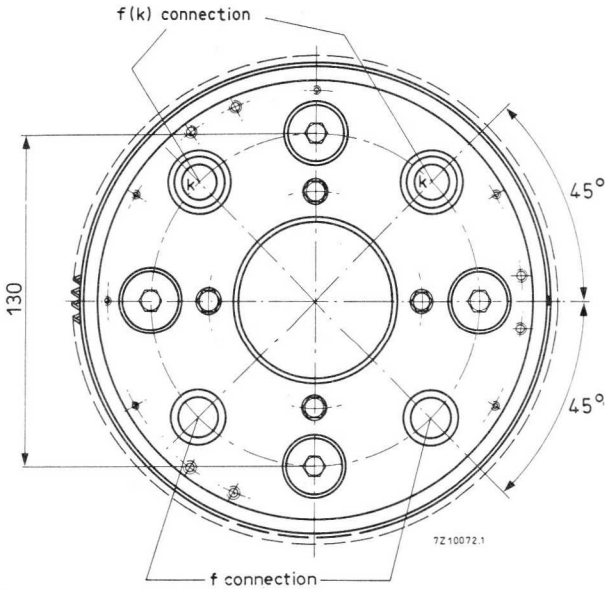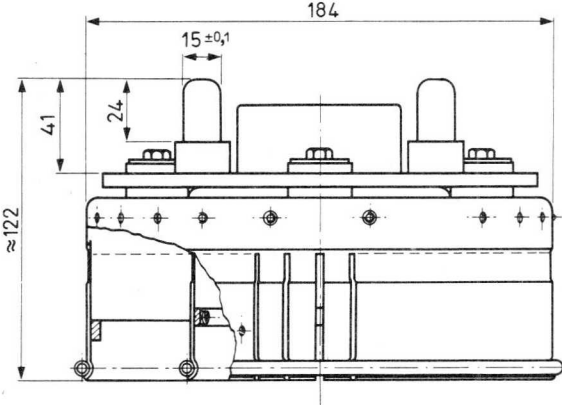


Net weight: approx. 2,5 kg

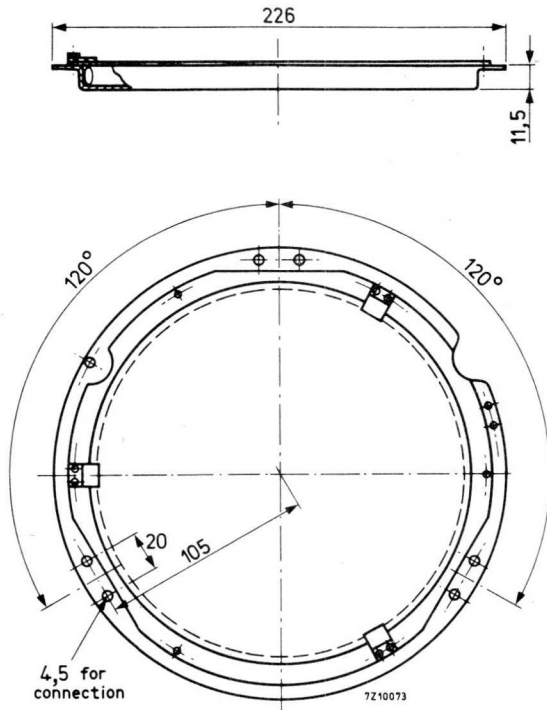GRID CONNECTORFOR 185 mm \varnothing TERMINALS


Net weight: approx. 0,35 kg

SCREEN GRID CONNECTOR

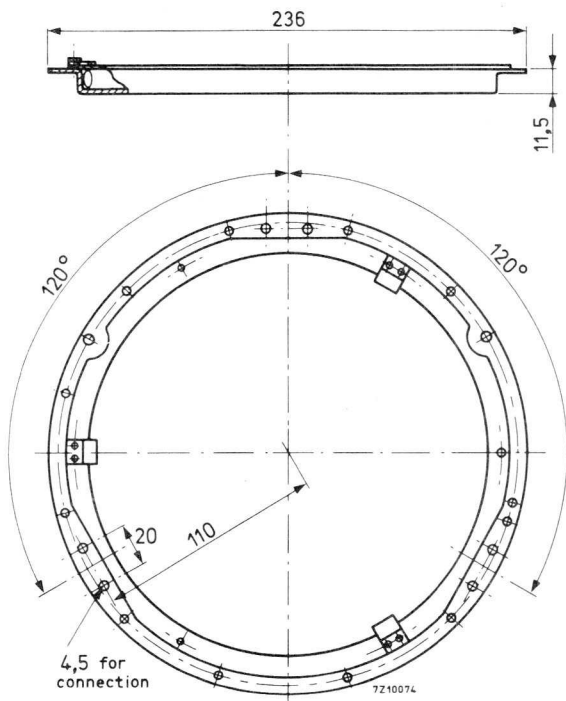FOR 193,2 mm \varnothing TERMINALS

Net weight: approx. 0,4 kg


WATER LEVEL CONTROL

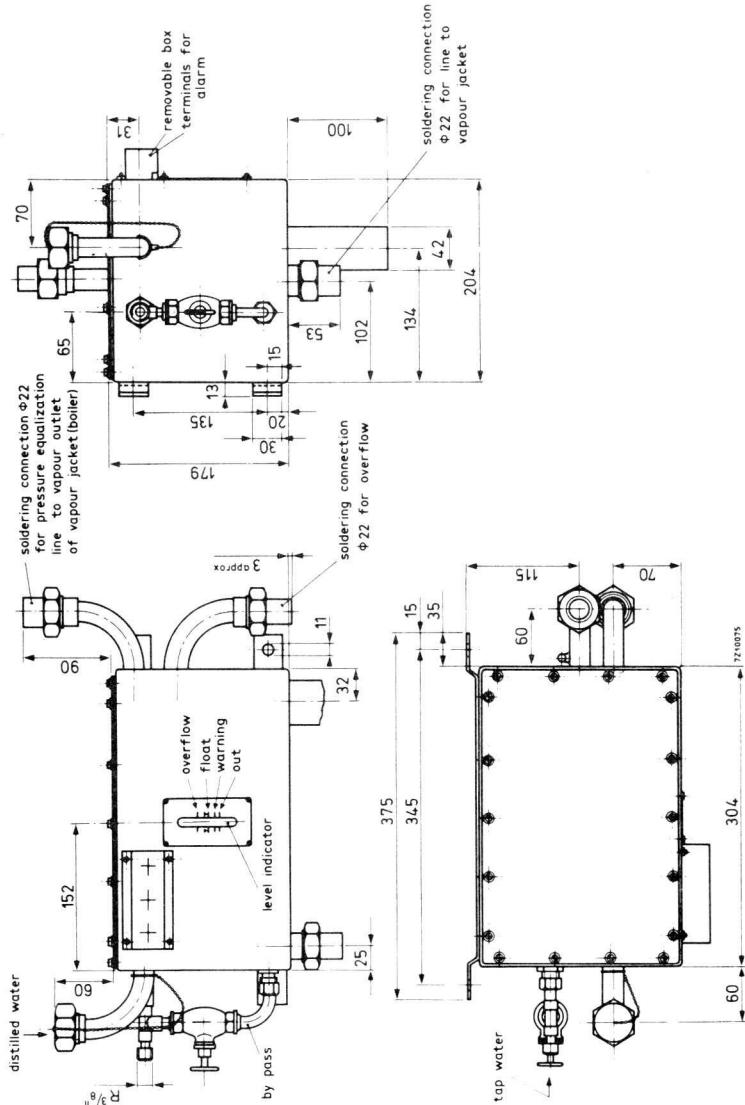

Material: Copper
 Net weight: approx. 8.5 kg


GRID CONNECTOR

FOR 105 mm ϕ TERMINALS

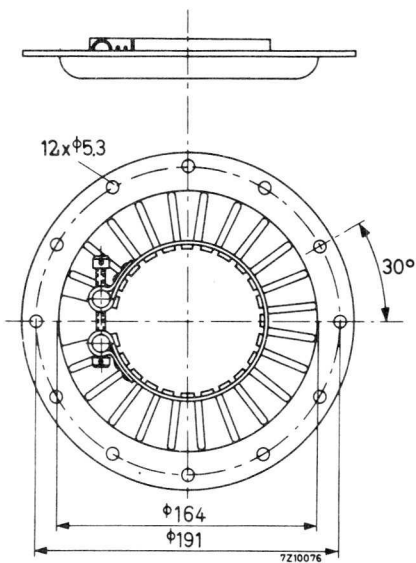

Material: brass, silver plated

Net weight: 450 g

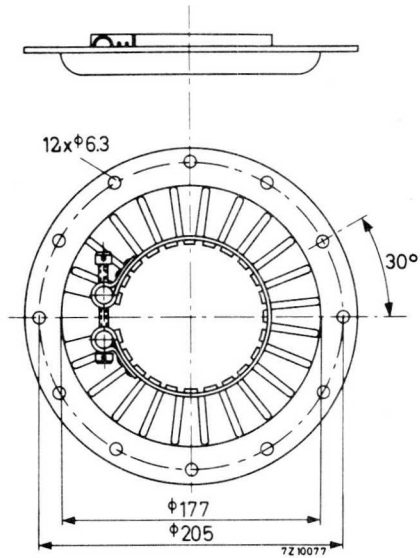GRID CONNECTORFOR 112 mm ϕ TERMINALS

Material: brass, silver plated

Net weight: 525 g

Index





INDEX OF TYPE NUMBERS

type no.	section	type no.	section	type no.	section
K506	Acc	YD1162	Tran	YL1010	Tran
K508	Acc	YD1170	Tran	YL1011	Tran
K509	Acc	YD1172	Tran	YL1012	Tran
K713	Acc	YD1173	Tran	YL1020	Tran
K714	Acc	YD1175	Tran	YL1030	Tran
K717	Acc	YD1177	Tran	YL1060	Tran
K720	Acc	YD1180	Tran	YL1070	Tran
K721	Acc	YD1182	Tran	YL1071	Tran
K722	Acc	YD1185	Tran	YL1091	Tran
K723	Acc	YD1187	Tran	YL1100	Tran
K724	Acc	YD1192	Tran	YL1101	Tran
K726	Acc	YD1195	Tran	YL1110	Tran
K728	Acc	YD1197	Tran	YL1120	Tran
K729	Acc	YD1202	Tran	YL1130	Tran
K732	Acc	YD1203	Tran	YL1150	Tran
K733	Acc	YD1212	Tran	YL1181	Tran
K735	Acc	YD1213	Tran	YL1182	Tran
YD1000	Tran	YD1240	Tran	YL1190	Tran
YD1001	Tran	YD1300	Tran	YL1200	Tran
YD1002	Tran	YD1302	Tran	YL1210	Tran
YD1010	Tran	YD1303	Tran	YL1220	Tran
YD1012	Tran	YD1304	Tran	YL1240	Tran
YD1130	Tran	YD1330	Tran	YL1250	Tran
YD1140	Tran	YD1333	Tran	YL1290	Tran
YD1141	Tran	YD1334	Tran	YL1340	Tran
YD1150	Tran	YD1335	Tran	YL1341	Tran
YD1151	Tran	YD1336	Tran	YL1360	Tran
YD1152	Tran	YD1342	Tran	YL1370	Tran
YD1160	Tran	YD1343	Tran	YL1371	Tran
YD1161	Tran	YD1352S	Tran	YL1372	Tran

Acc = Accessories.

Tran = Transmitting tubes for communication; tubes for r.f. heating.

type no.	section	type no.	section	type no.	section
YL1420	Tran	8728	See YD1150	40654	Acc
YL1430	Tran	8729	See YD1151	40622	Acc
YL1440	Tran	8730	See YD1152	40633	Acc
YL1460	Tran	8731	See YD1160	40664	Acc
YL1461	Tran	8732	See YD1161	40665	Acc
YL1470	Tran	8733	See YD1162	40666	Acc
YL1520	Tran	8734	See YD1173	40667	Acc
YL1540	Tran	8735	See YD1182	40670	Acc
YL1560	Tran	8736	See YD1192	40672	Acc
6146B	See YL1370	8752	See YD1202	40680	Acc
6159B	See YL1372	8801	See YD1180	40681	Acc
6816	See YL1101	8812	See YL1420	40682	Acc
6883B	See YL1371	8813	See YL1430	40683	Acc
7609	Tran	8814	See YL1440	40685	Acc
7650	See YL1110	8867	See YD1352S	40686	Acc
7854	See YL1060	8888	See YL1470	40687	Acc
8032A	See YL1371	8913	See YD1195	40688	Acc
8116	See YL1071	8915	See YL1520	40689	Acc
8117	See YL1071	8918	See YD1342	40690	Acc
8118	See YL1020	8925	See YD1185	40691	Acc
8163	See YD1130	8936	See YD1187	40692A	Acc
8298A	See YL1370	8937	See YD1197	40693A	Acc
8321	See YL1340	8952	See YD1175	40694	Acc
8322	See YL1341	8958	See YD1177	40695A	Acc
8408	See YL1130	40615	Acc	40696A	Acc
8429	See YL1120	40619	Acc	40705A	Acc
8438	See YL1461	40622	Acc	40706A	Acc
8438A	See YL1461	40623	Acc	40707	Acc
8457	See YL1210	40624	Acc	40708A	Acc
8458	See YL1420	40626	Acc	40709A	Acc
8505	See YL1250	40628	Acc	40710	Acc
8552	See YL1371	40630	Acc	40711	Acc
8577	See YL1220	40634	Acc	40721	Acc
8579	See YL1150	40635	Acc	40722	Acc
8589	See YL1190	40648	Acc	40723	Acc
8621	Tran	40649	Acc	40724	Acc
8666	See YD1170	40650	Acc	40727	Acc
8668	See YF1172	40651	Acc	40728	Acc
8680	See YD1212	40652	Acc	40729	Acc
8683	See YL1360	40653	Acc	40732	Acc

Acc = Accessories.

Tran = Transmitting tubes for communication; tubes for r.f. heating.

type no.	section	type no.	section	type no.	section
40733	Acc				
40734	Acc				
40735	Acc				
40736	Acc				
40737	Acc				
40743	Amp				
40744	Amp				
40745	Amp				
40746	Amp				
40747	Amp				
40748	Amp				
40755	Amp				
40756	Amp				
40757	Amp				
40758	Amp				
40759	Amp				
40760	Amp				
40768	Amp				
40775	Amp				

Acc = Accessories.

Amp = Amplifier circuit assemblies.




General section

Transmitting tubes for communication
Tubes for r.f. heating

Amplifier circuit assemblies

Associated accessories

Index

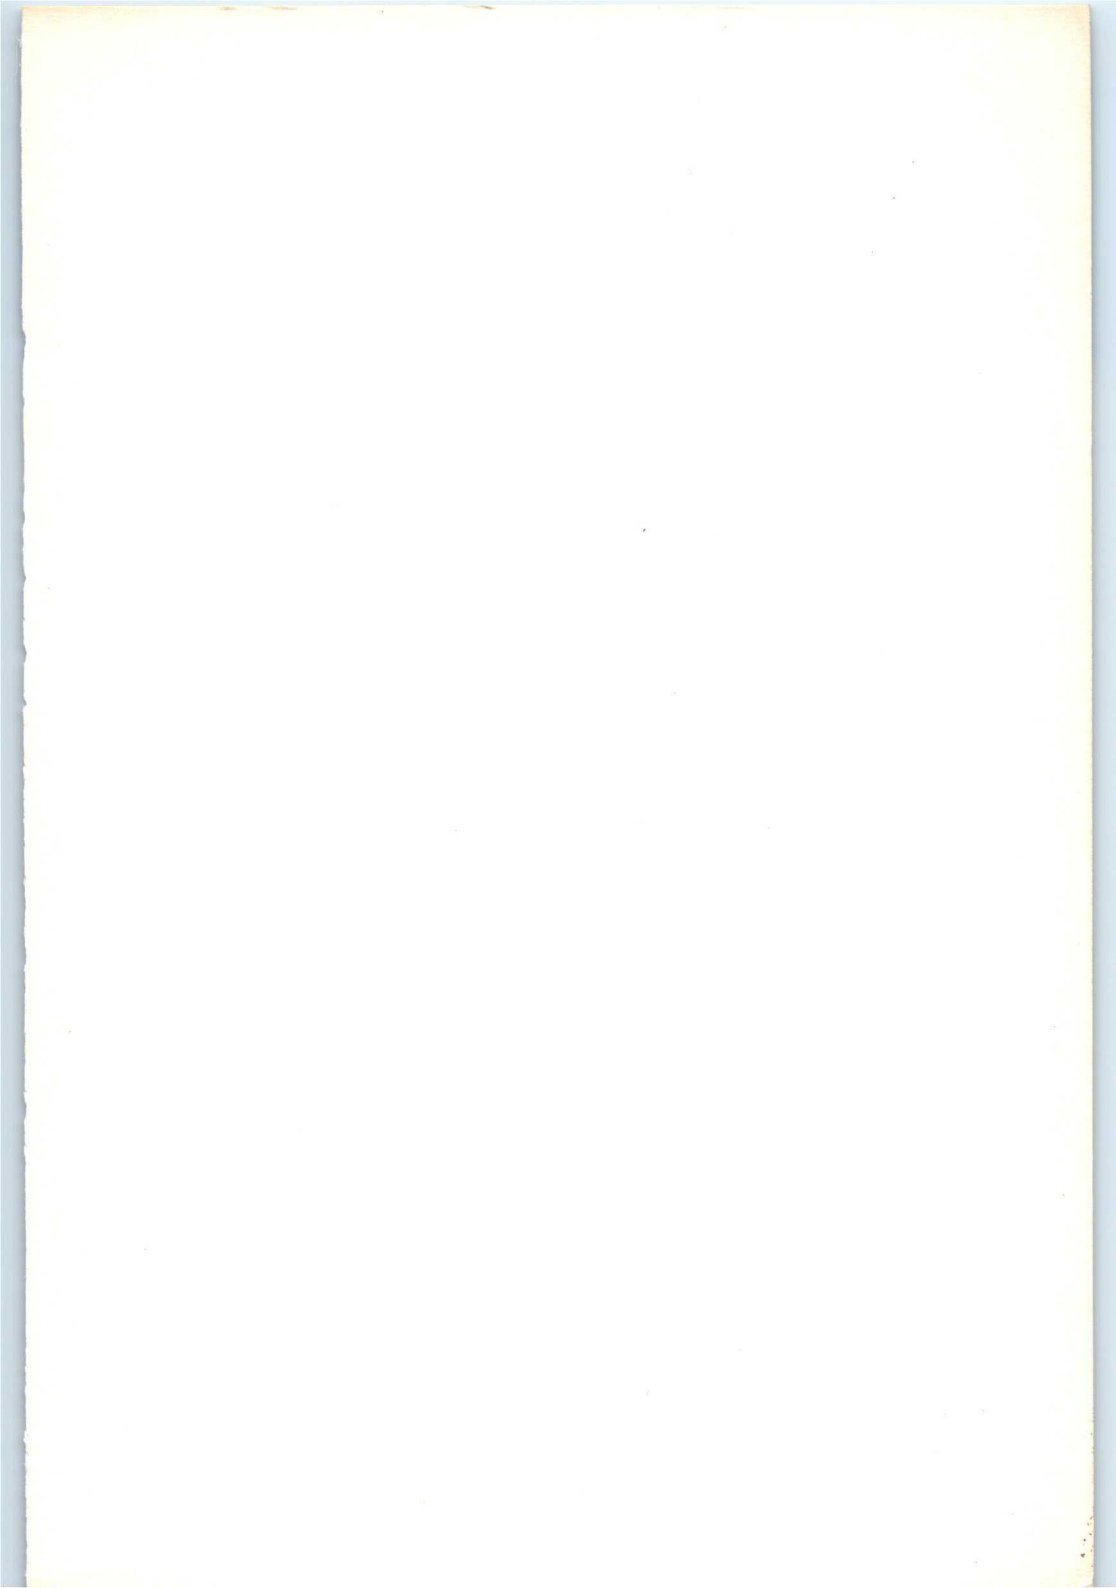

Electronic components and materials for professional, industrial and consumer uses from the world-wide Philips Group of Companies

- Argentina:** FAPESA I.y.C., Av. Crovara 2550, Tablada, Prov. de BUENOS AIRES, Tel. 652-7438/7478.
- Australia:** PHILIPS INDUSTRIES HOLDINGS LTD., Elcoma Division, 67 Mars Road, LANE COVE, 2066, N.S.W., Tel. 42 1261.
- Austria:** ÖSTERREICHISCHE PHILIPS BAUELEMENTE Industrie G.m.b.H., Triester Str. 64, A-1101 WIEN, Tel. 62 91 11.
- Belgium:** M.B.L.E., 80, rue des Deux Gares, B-1070 BRUXELLES, Tel 523 00 00.
- Brazil:** IBRAPE, Caixa Postal 7383, Av. Paulista 2073-S/Loja, SAO PAULO, SP, Tel. 284-4511.
- Canada:** PHILIPS ELECTRONICS LTD., Electron Devices Div., 601 Milner Ave., SCARBOROUGH, Ontario, M1B 1M8, Tel. 292-5161.
- Chile:** PHILIPS CHILENA S.A., Av. Santa Maria 0760, SANTIAGO, Tel. 39-40 01.
- Colombia:** SADAPE S.A., P.O. Box 9805, Calle 13, No. 51 + 39, BOGOTA D.E. 1., Tel. 600 600.
- Denmark:** MINIWATT A/S, Emdrupvej 115A, DK-2400 KØBENHAVN NV., Tel. (01) 69 16 22.
- Finland:** OY PHILIPS AB, Elcoma Division, Kaivokatu 8, SF-00100 HELSINKI 10, Tel. 1 72 71.
- France:** R.T.C. LA RADIOTECHNIQUE-COMPELEC, 130 Avenue Ledru Rollin, F-75540 PARIS 11, Tel. 355-44-99.
- Germany:** VALVO, UB Bauelemente der Philips G.m.b.H., Valvo Haus, Burchardstrasse 19, D-2 HAMBURG 1, Tel. (040) 3296-1.
- Greece:** PHILIPS S.A. HELLENIQUE, Elcoma Division, 52, Av. Syngrou, ATHENS, Tel. 915 311.
- Hong Kong:** PHILIPS HONG KONG LTD., Comp. Dept., Philips Ind. Bldg., Kung Yip St., K.C.T.L. 289, KWAI CHUNG, N.T. Tel. 12-24 51 21.
- India:** PHILIPS INDIA LTD., Elcoma Div., Band Box House, 254-D, Dr. Annie Besant Rd., Prabhadevi, BOMBAY-25-DD, Tel. 457 311-5.
- Indonesia:** P.T. PHILIPS-RALIN ELECTRONICS, Elcoma Division, 'Timah' Building, Jl. Jen. Gatot Subroto, JAKARTA, Tel. 44 163.
- Ireland:** PHILIPS ELECTRICAL (IRELAND) LTD., Newstead, Clonskeagh, DUBLIN 14, Tel. 69 33 55.
- Italy:** PHILIPS S.P.A., Sezione Elcoma, Piazza IV Novembre 3, I-20124 MILANO, Tel. 2-6994.
- Japan:** NIHON PHILIPS CORP., Shuwa Shinagawa Bldg., 26-33 Takanawa 3-chome, Minato-ku, TOKYO (108), Tel. 448-5611.
(IC Products) SIGNETICS JAPAN, LTD., TOKYO, Tel. (03) 230-1521.
- Korea:** PHILIPS ELECTRONICS (KOREA) LTD., Philips House, 260-199 Itaewon-dong, Yongsan-ku, C.P.O. Box 3680, SEOUL, Tel. 44-4202.
- Mexico:** ELECTRONICA S.A. de C.V., Varsovia No. 36, MEXICO 6, D.F., Tel. 5-33-11-80.
- Netherlands:** PHILIPS NEDERLAND B.V., Afd. Elonco, Boschdijk 525, NL-4510 EINDHOVEN, Tel. (040) 79 33 33.
- New Zealand:** Philips Electrical Ind. Ltd., Elcoma Division, 2 Wagener Place, St. Lukes, AUCKLAND, Tel. 867 119.
- Norway:** ELECTRONICA A/S., Vitaminveien 11, P.O. Box 29, Grefsen, OSLO 4, Tel. (02) 15 05 90.
- Peru:** CADESA, Jr. Ilo, No. 216, Apartado 10132, LIMA, Tel. 27 73 17.
- Philippines:** ELDAC, Philips Industrial Dev. Inc., 2246 Pasong Tamo, MAKATI-RIZAL, Tel. 86-89-51 to 59.
- Portugal:** PHILIPS PORTUGESA S.A.R.L., Av. Eng. Duharte Pacheco 6, LISBOA 1, Tel. 68 31 21.
- Singapore:** PHILIPS SINGAPORE PTE LTD., Elcoma Div., POB 340, Toa Payoh CPO, Lorong 1, Toa Payoh, SINGAPORE 12, Tel. 53 88 11.
- South Africa:** EDAC (Pty.) Ltd., South Park Lane, New Doornfontein, JOHANNESBURG 2001, Tel. 24/6701.
- Spain:** COPRESA S.A., Balmes 22, BARCELONA 7, Tel. 301 63 12.
- Sweden:** A.B. ELCOMA, Lidingsvägen 50, S-10 250 STOCKHOLM 27, Tel. 08/67 97 80.
- Switzerland:** PHILIPS A.G., Elcoma Dept., Edenstrasse 20, CH-8027 ZÜRICH, Tel. 01/44 22 11.
- Taiwan:** PHILIPS TAIWAN LTD., 3rd Fl., San Min Building, 57-1, Chung Shan N. Rd, Section 2, P.O. Box 22978, TAIPEI, Tel. 5513101-5.
- Turkey:** TÜRK PHILIPS TICARET A.S., EMET Department, Inonu Cad. No. 78-80, ISTANBUL, Tel. 43 59 10.
- United Kingdom:** MULLARD LTD., Mullard House, Torrington Place, LONDON WC1E 7HD, Tel. 01-580 6633.
- United States:** (Active devices & Materials) AMPEREX SALES CORP., Providence Pike, SLATERSVILLE, R.I. 02876, Tel. (401) 762-9000.
(Passive devices) MEPCO/ELECTRA INC., Columbia Rd., MORRISTOWN, N.J. 07960, Tel. (201) 539-2000.
(IC Products) SIGNETICS CORPORATION, 811 East Arques Avenue, SUNNYVALE, California 94086, Tel. (408) 739-7700.
- Uruguay:** LUZILETRON S.A., Rondeau 1567, piso 5, MONTEVIDEO, Tel. 9 43 21.
- Venezuela:** IND. VENEZOLANAS PHILIPS S.A., Elcoma Dept., A. Ppal de los Ruices, Edif. Centro Colgate, Apdo 1167, CARACAS, Tel. 36 05 11.