

Mullard

H.F. PENTODE

SP13C

The SP13C is an indirectly heated straight H.F. Pentode for use in D.C./A.C. receivers, and for car radio.

HEATER CHARACTERISTICS

Heater Voltage ...	$V_f = 13.0$ volts
Heater Current ...	$I_f = 0.2$ amp
Heating Time—60 seconds	

DIMENSIONS

Overall Length ...	= 125 mm.
Overall Diameter...	= 43 mm.
Bulb Finish—Metallised	

OPERATING DATA AS R.F. AMPLIFIER

Normal Anode Voltage ...	V_{aw}	= 200 volts
Normal Auxiliary Grid Voltage ...	V_{g2w}	= 200 volts
Anode Current ...	I_{aw}	= 2.5 mA
Control Grid Voltage ...	$-V_{g1w}$	= 2.2 volts
Auxiliary Grid Current ...	I_{g2w}	= 0.9 mA
Amplification Factor ...	G_w	= 7,000
Mutual Conductance ($I_a = 2.5$ mA) ...	S_w	= 2.8 mA/V
Anode Impedance ...	R_{iw}	= 2.5 megohms

OPERATING DATA AS SPEECH DETECTOR

Anode Voltage (line) ...	V_a	= 200 volts
Series Resistance (Grid 2) ...	R_{g2}	= 0.5 megohm
Anode Resistance ...	R_a	= 0.1 megohm
Grid Condenser ...	C_{g1}	= 100 $\mu\mu F$
Grid Resistance ...	R_{g1}	= 0.5—1.0 megohm

CAPACITIES

Anode-Control Grid ...	C_{g1}	= <0.003 $\mu\mu F$
Input ...	C_{g1}	= 6.9 $\mu\mu F$
Output ...	C_a	= 8.1 $\mu\mu F$


LIMITS

Maximum Anode Voltage ...	V_{amax}	= 200 volts
Maximum Anode Dissipation ...	W_{amax}	= 1.0 watt
Maximum Cathode Current ...	I_{kmax}	= 6.0 mA
Maximum Auxiliary Grid Voltage ...	V_{g2max}	= 200 volts
Maximum Auxiliary Grid Dissipation ...	W_{g2max}	= 0.3 watt
Maximum Auxiliary Grid Current ...	I_{g2max}	= 1.2 mA
Maximum Resistance in Grid Circuit ...	R_{g1amax}	= 1.5 megohms
Maximum Voltage Heater to Cathode ...	V_{fkmax}	= 125 volts
Maximum Resistance Heater to Cathode ...	R_{fkmax}	= 20,000 ohms
Range of Grid Voltage for 1 μA Grid Current	V_{g1}	= -0.5 to -1.0 volt

SP13C

Mullard H.F. PENTODE

CONNECTIONS




Viewed from free end of pins.

- Pin No. 1 Metallisation
" 2 Anode
" 3 Suppressor Grid (G₃)
" 4 Heater
" 5 Heater
" 6 Cathode
" 7 Auxiliary Grid (G₂)
Top Cap—Control Grid

Mullard

H.F. PENTODE

SP13C

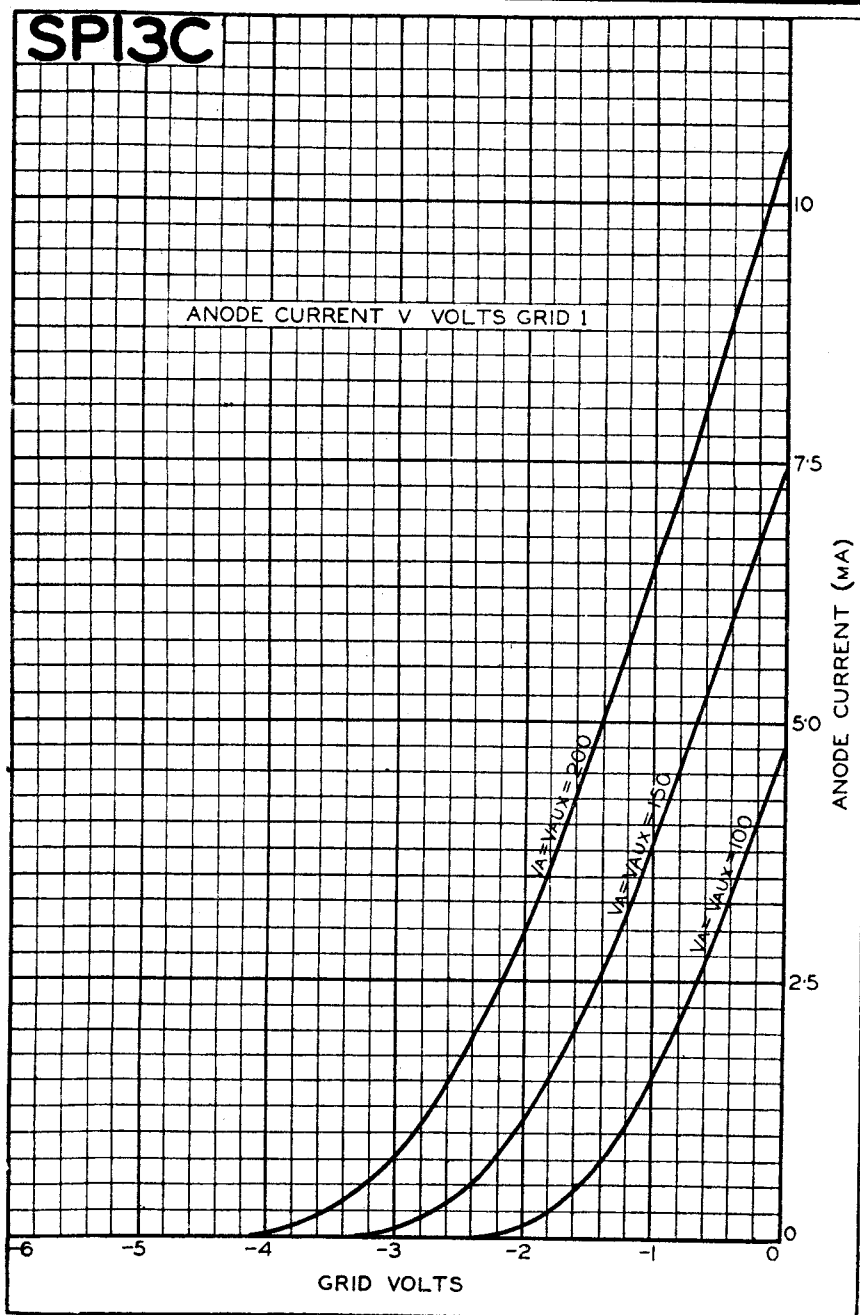

SP13C

Mullard H.F. PENTODE

SP13C.

