

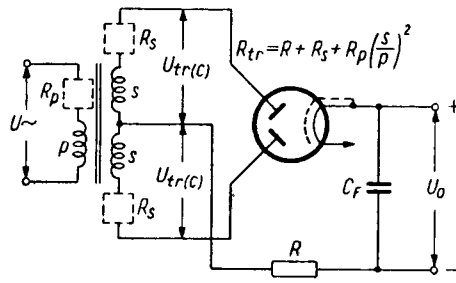
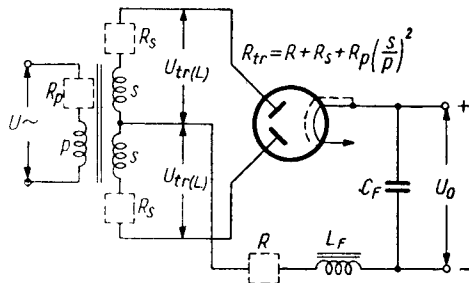


T.			$U_f$	$I_f$	$U_{tr(C)}$	$U_{tr(L)}$	$U_p$	$I_o$	$I_p$	$R_{tr}$	$L_F$	$C_F$		
			V	A	V	V	V	mA	mA	$\Omega$	H	$\mu F$		
GZ 32	eur	1	5	2	300	400	1400	300	750	150	10	60		
					350			500		250		150	60	
GZ 33	Mul	1	5	3	300	300	1400	250	750	140	10	60		
					400			300		200		60		
					500			300		250		60		
GZ 34	eur	1	5	1,9	300	300	1500	250	750	75	10	60		
					450			250		150		60		
					550			250		200		60		
					550			225		750		10		
GZ 37	Mul	1	5	2,8	300	300	1600	250	750	75	10	4		
					400			250		75		4		
					500			250		75		4		
					500			350		750		10		
U 52	MOG	2	5	2,25	500	550	1430	275	770	180	10	16		
U 54	MOG	1	5	2	500	1250	250	1500	75			4		
5 T 4	amer	2	5	2	300	550	1550	245	170	170	10	32		
5 U 4-G	int	2	5	3				450					225	32
5 U4-WG <sup>1)</sup>	amer	2	5	3				450					225	32
5 X 4-G	amer	3	5	3	550	1550	1550	675	10	30	10	40		
5 Z 3	int	4	5	3									40	
83	int	5	5	3									40	
1275	Syl	4	5	1,75									10	
5 U 4-GA	amer	2	5	3	450	550	1550	250	900		10	32		
5 U 4-GB	int	2	5	3	300	550	1550	300	1000	21	10	32		
					450			275		67		32		
5 Z 3-GB	int	4	5	3	550	1550	1550	275	1000	30	10	40		
								350					50	40
5 AU 4	amer	2	5	4,5	300	500	1550	325	750	50	10	10		
					400			325					10	
5 AW 4	Hyt	2	5	4	450	550	1550	250	750		10	4		
5 II 9 C	CCCP	6	5	3	500	1700	205	600						
54 KU	Cos	1	5	2,3	300			300						

<sup>1)</sup> vide \*4 a, b ( $U_f = 5V \pm 10\%$ )



Equivalents

WT-270 X	amer	= 5 Z 3
WTT-135	amer	= 5 U 4-G
5 AR 4	amer	= G Z 34
5 AS 4	amer	= 5 U 4-GB
5 AS 4-A	amer	= 5 U 4-GB
5 BX 3	CCCP	= 5 U 4-G
5 C 3 S	Pol	= 5 U 4-G
5 V 4-GB	amer	= GZ 32
5 II 3 C	CCCP	= 5 U 4-G
22 S 2	STCS	= 5 Z 3
53 KU	Cos	= GZ 33
1502	CCCP	= 5 II 9 C
5931 <sup>1)</sup>	amer	= 5 U 4-WG

<sup>1)</sup> vide\* 4, a, b ( $U_f = 5V \pm 10\%$ )

