

PHILIPS

**DATA
HANDBOOK**


PHILIPS ELECTRONIC COMPONENTS
AND MATERIALS DIVISION


ELECTRON TUBES


PART 3 FEBRUARY 1967

Special Quality Tubes

Miscellaneous Devices

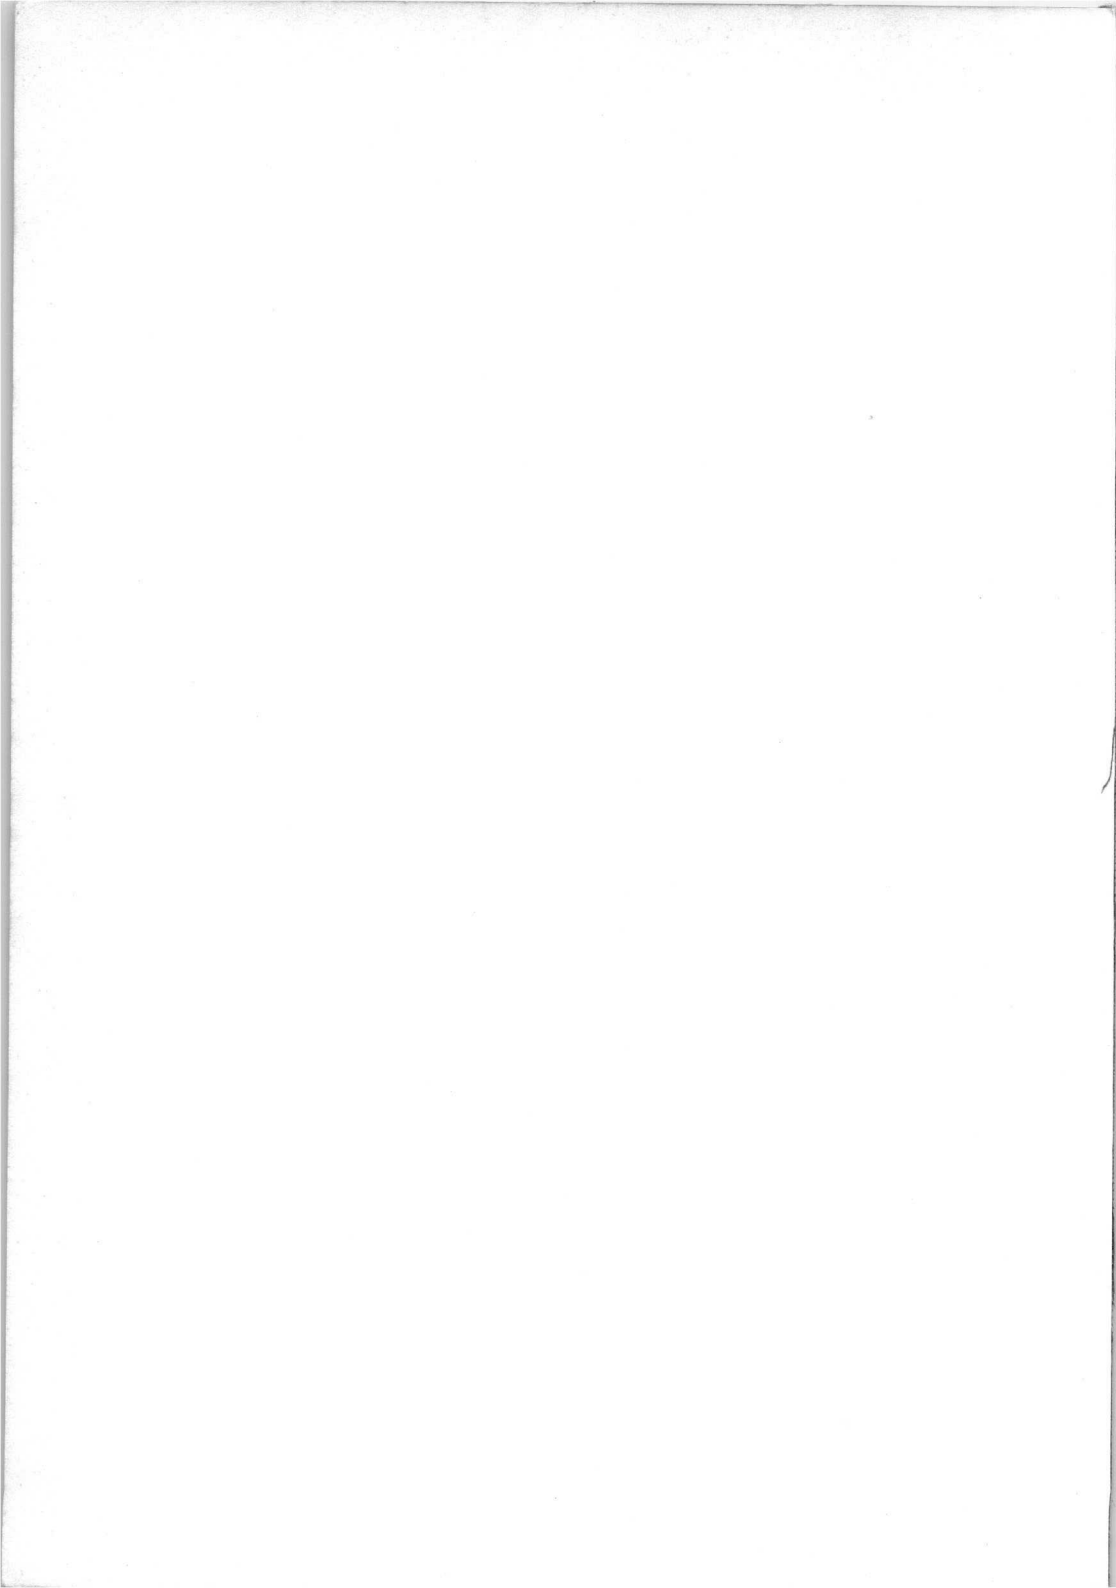

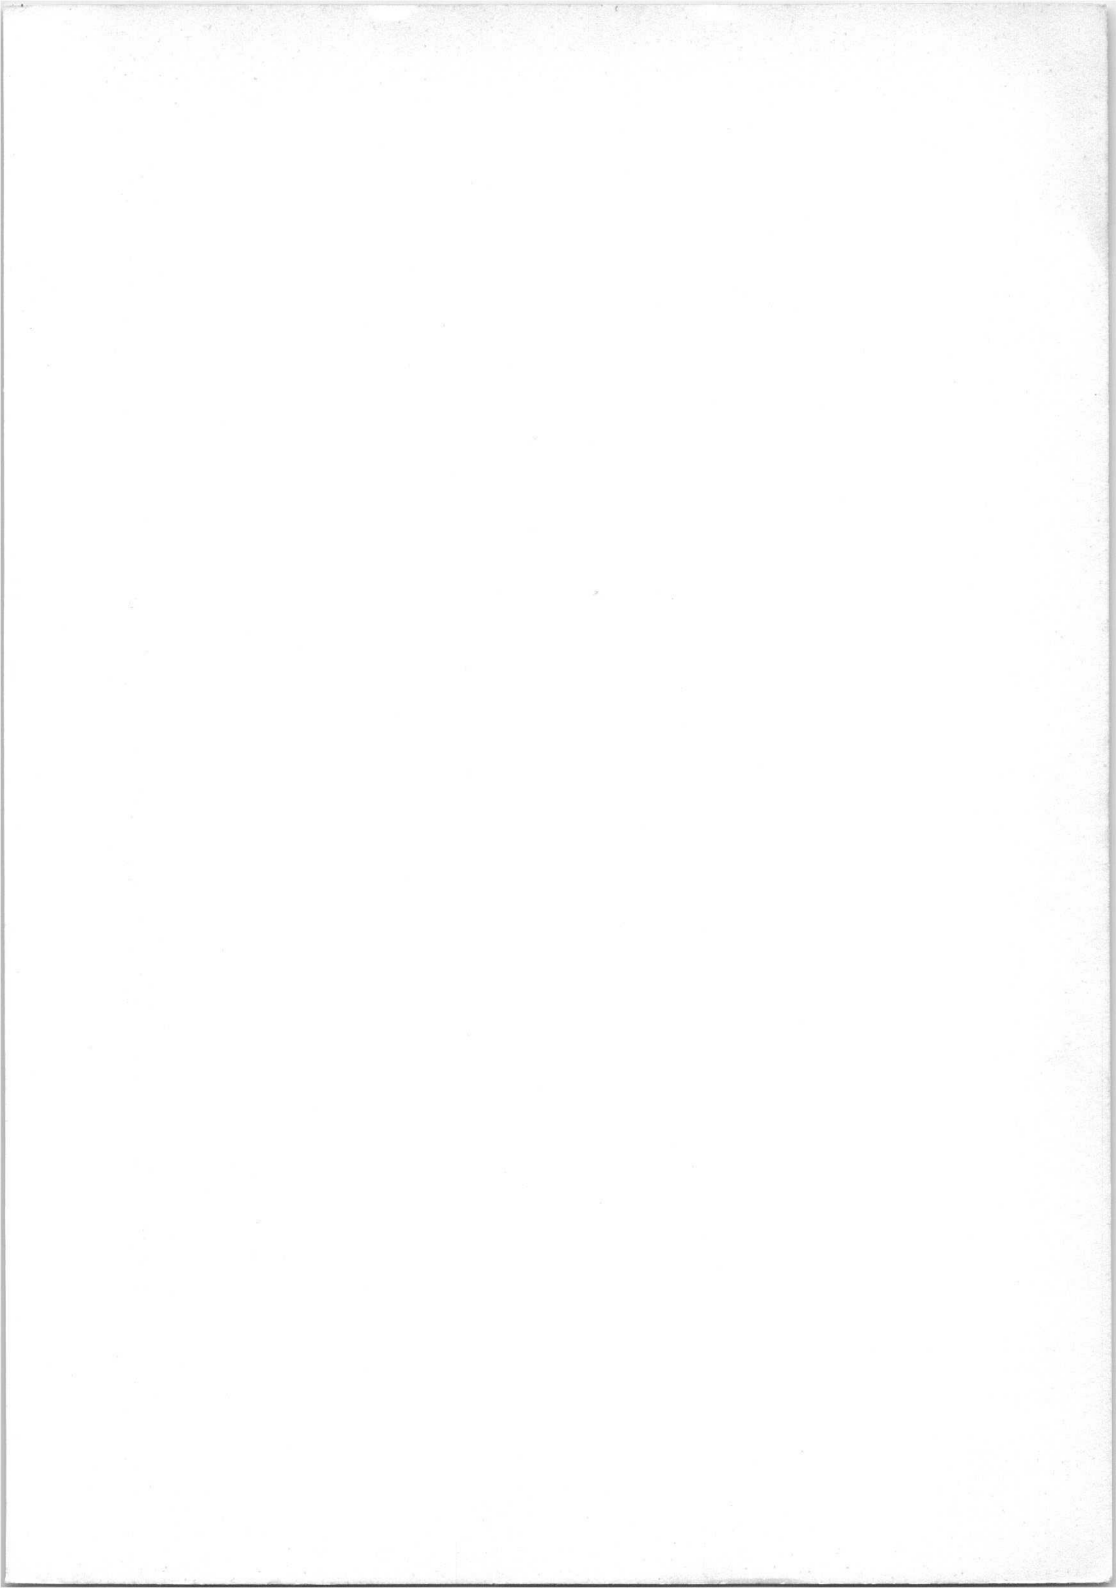

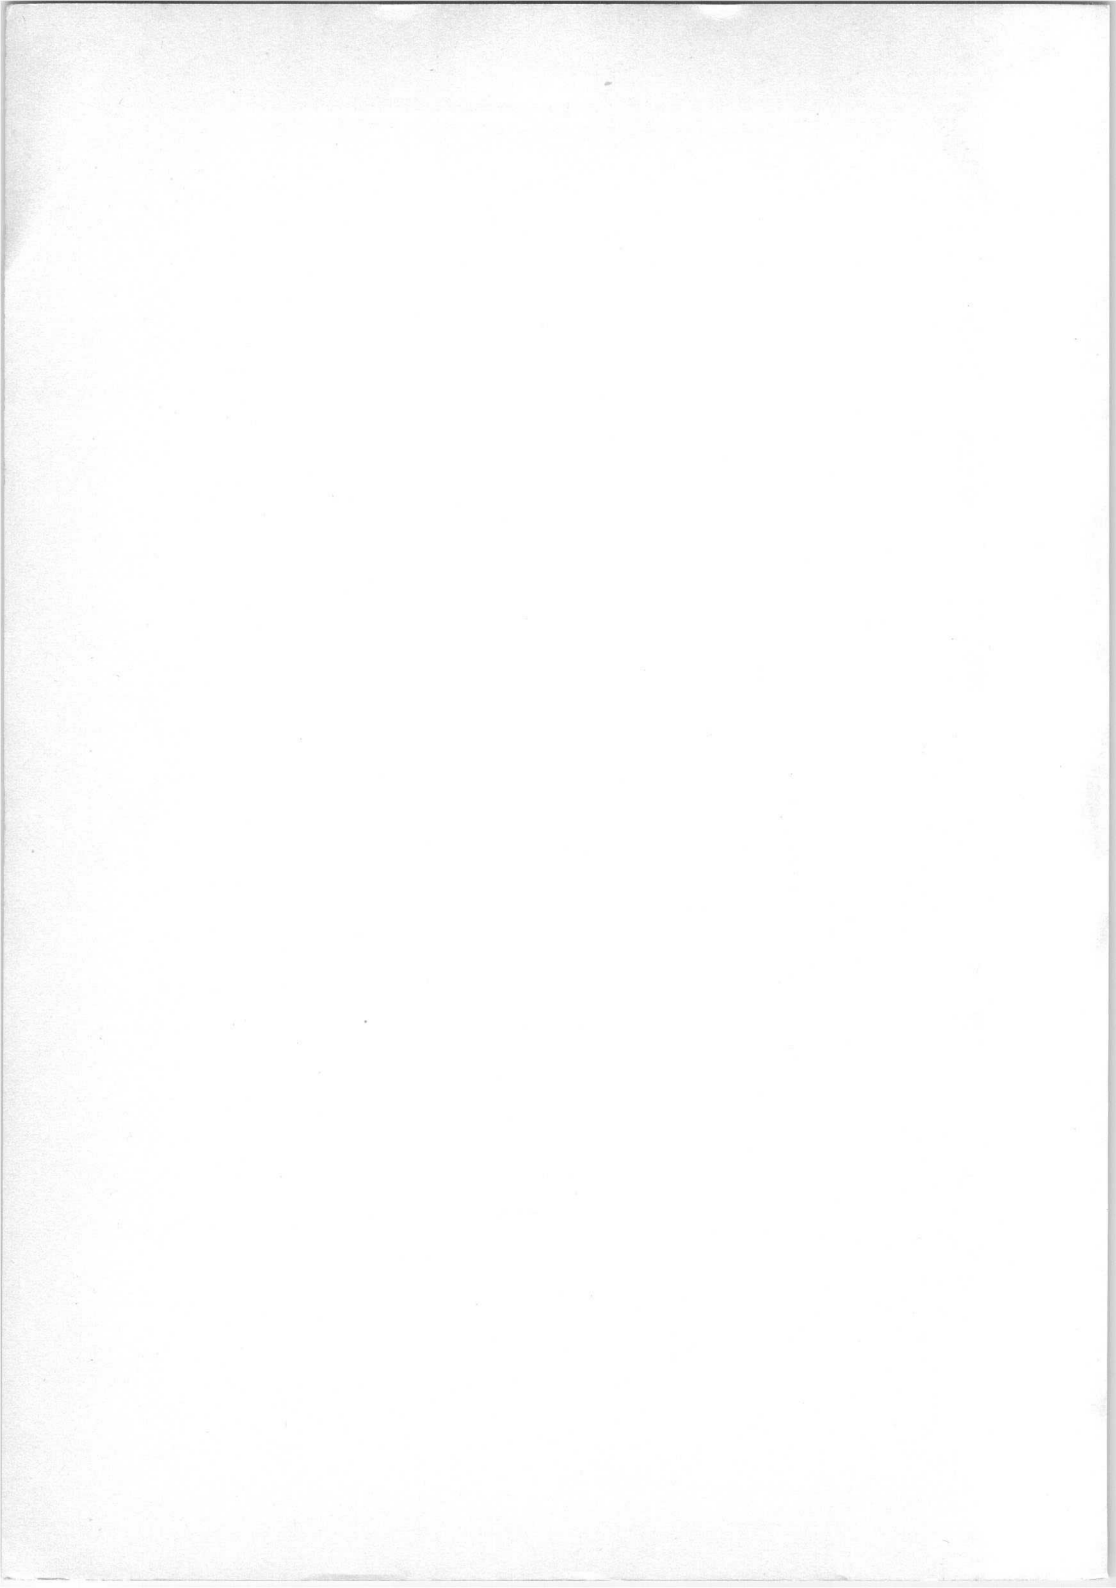

ELECTRON TUBES

PART 3

Special Quality Tubes Miscellaneous Devices

February, 1967

The book ELECTRON TUBES contains extensive data, supported by curves, on current types of tubes. It comprises a number of bound parts and a loose-leaf binder: the blue binder.

The bound parts contain both the final and the tentative publishing data which are available at a certain closing date. These parts will be re-issued at regular intervals in order to provide continuously for sufficient information to all those who are professionally engaged in the field of electronics, but for whom it is of secondary importance to have the disposal of the very latest additions.

For those who do need the latest information the loose-leaf binder will be useful, as it contains all data which have become available after the latest issues of the bound part. The binder is kept up-to-date by the regular appearance of supplements.

When a bound part is re-issued, the pertinent contents of the binder are transferred to this part, thus preventing the binder from becoming overcrowded.

The present part 3 of ELECTRON TUBES contains the data on Special Quality tubes and Miscellaneous devices. It should be noted that the inclusion of a type number does not necessarily imply its availability.

For owners of the loose-leaf binder on tubes it may be advisable to make sure that the data on a particular type in the bound part have not been rendered out of date by a later issue in the binder. This applies especially to tentative data.

Special Quality Tubes

Miscellaneous Devices

Special Quality Tubes

Miscellaneous Devices

Special Quality Tubes





Special Quality Paper

SPECIAL QUALITY TUBES APPLICATION DIRECTIONS

CONTENTS

1. General
2. Nominal- and spread values of tube characteristics
3. Spread and variation of operating conditions
4. Limiting values
5. Electrode voltage
6. Electrode current
7. Electrode dissipation
8. Heater voltage
9. Supply voltage
10. Resistance values
11. Heater cathode circuit
12. Suppressor grid circuit
13. Control grid circuit
14. Shock and vibration
15. Life
16. Hum
17. Microphony
18. Environmental conditions
19. Mounting and wiring

SPECIAL QUALITY TUBES APPLICATION DIRECTIONS

CONTENTS

1. General	1
2. Minimum and special values of tube characteristics	2
3. Method and conditions of testing	3
4. Electrical values	4
5. Electrical values	5
6. Electrical values	6
7. Electrical values	7
8. Electrical values	8
9. Electrical values	9
10. Electrical values	10
11. Electrical values	11
12. Electrical values	12
13. Electrical values	13
14. Electrical values	14
15. Electrical values	15
16. Electrical values	16
17. Electrical values	17
18. Electrical values	18
19. Electrical values	19
20. Electrical values	20
21. Electrical values	21
22. Electrical values	22
23. Electrical values	23
24. Electrical values	24
25. Electrical values	25
26. Electrical values	26
27. Electrical values	27
28. Electrical values	28
29. Electrical values	29
30. Electrical values	30
31. Electrical values	31
32. Electrical values	32
33. Electrical values	33
34. Electrical values	34
35. Electrical values	35
36. Electrical values	36
37. Electrical values	37
38. Electrical values	38
39. Electrical values	39
40. Electrical values	40
41. Electrical values	41
42. Electrical values	42
43. Electrical values	43
44. Electrical values	44
45. Electrical values	45
46. Electrical values	46
47. Electrical values	47
48. Electrical values	48
49. Electrical values	49
50. Electrical values	50
51. Electrical values	51
52. Electrical values	52
53. Electrical values	53
54. Electrical values	54
55. Electrical values	55
56. Electrical values	56
57. Electrical values	57
58. Electrical values	58
59. Electrical values	59
60. Electrical values	60
61. Electrical values	61
62. Electrical values	62
63. Electrical values	63
64. Electrical values	64
65. Electrical values	65
66. Electrical values	66
67. Electrical values	67
68. Electrical values	68
69. Electrical values	69
70. Electrical values	70
71. Electrical values	71
72. Electrical values	72
73. Electrical values	73
74. Electrical values	74
75. Electrical values	75
76. Electrical values	76
77. Electrical values	77
78. Electrical values	78
79. Electrical values	79
80. Electrical values	80
81. Electrical values	81
82. Electrical values	82
83. Electrical values	83
84. Electrical values	84
85. Electrical values	85
86. Electrical values	86
87. Electrical values	87
88. Electrical values	88
89. Electrical values	89
90. Electrical values	90
91. Electrical values	91
92. Electrical values	92
93. Electrical values	93
94. Electrical values	94
95. Electrical values	95
96. Electrical values	96
97. Electrical values	97
98. Electrical values	98
99. Electrical values	99
100. Electrical values	100

1. GENERAL

Deviations from these directives will be stated on the individual data sheets. If applications are considered not referred to in the data of the relevant tube type extra care should be taken with circuit design to avoid that the tube is overloaded due to unfavourable operating conditions.

Also in the circuit design use might be made of tube characteristics not controlled by the manufacturer. When at a later date batches of tubes are delivered which show different values for these characteristics this may result in unsatisfactory performance of the equipment.

2. NOMINAL AND SPREAD VALUES OF TUBE CHARACTERISTICS

Tube data not stated as maximum or minimum values apply to a nominal tube. Equipment design should be based on the characteristics as stated in the data sheets.

With measurements carried out with a small number of tubes and in particular with new tube types it should be taken into account that average and spread values may differ from those obtained at larger quantities.

3. SPREAD AND VARIATION OF OPERATING CONDITIONS

Parameter values which define the operating conditions may be subject to spread and/or variation.

3.1 Spread. Spread of a parameter value will result in individual values permanently deviating from the average value. The nominal value is the average of such a number of individual values taken at random that an increase of the number will have a negligible influence on the average value.

3.2 Variation. Variation of a parameter value is the change of value occurring as a function of time.

The nominal value is the average value calculated over a period such that a prolongation of that period will have a negligible influence on the average value.

4. LIMITING VALUES

Limiting values should be used in accordance with the applicable rating system as defined by I.E.C. publication 134.

Reference may be made to one of the following 3 rating systems.

- 4.1 Absolute maximum rating system. Absolute maximum ratings are limiting values of operating and environmental conditions applicable to any electronic device of a specified type as defined by its published data, and should not be exceeded under the worst probable conditions.

These values are chosen by the device manufacturer to provide acceptable serviceability of the device, taking no responsibility for equipment variations, environmental variations, and the effects of changes in operating conditions due to variations in the characteristics of the device under consideration and of all other electronic devices in the equipment.

The equipment manufacturer should design so that, initially and throughout life, no absolute-maximum value for the intended service is exceeded with any device under the worst probable operating conditions with respect to supply voltage variation, equipment components variation, equipment control adjustment, load variations, signal variation, environmental conditions, and variations in characteristics of the device under consideration and of all other electronic devices in the equipment.

- 4.2 Design-maximum rating system. Design-maximum ratings are limiting values of operating and environmental conditions applicable to a bogey electronic device of a specified type as defined by its published data, and should not be exceeded under the worst probable conditions.

These values are chosen by the device manufacturer to provide acceptable serviceability of the device, taking responsibility for the effects of changes in operating conditions due to variations in the characteristics of the electronic device under consideration.

The equipment manufacturer should design so that, initially and throughout life, no design-maximum value for the intended service is exceeded with a bogey device under the worst probable operating conditions with respect to supply-voltage variation, equipment component variation, variation in characteristics of all other devices in the equipment, equipment control adjustment, load variation, signal variation and environmental conditions.

- 4.3 Design-centre rating system. Design-centre ratings are limiting values of operating and environmental conditions applicable to a bogey electronic device of a specified type as defined by its published data, and should not be exceeded under normal conditions.

These values are chosen by the device manufacturer to provide acceptable serviceability of the device in average applications, taking responsibility for normal changes in operating conditions due to rated supply-voltage variation, equipment component variation, equipment control adjustment, load variation, signal variation, environmental conditions, and variations in the characteristics of all electronic devices.

The equipment manufacturer should design so that, initially, no design-centre value for the intended service is exceeded with a bogey electronic device in equipment operating at the stated normal supply-voltage.

4.4 In addition to the limiting values given in the individual data sheets the directives in the following paragraphs should be observed.

5. ELECTRODE VOLTAGE

Two limiting values of electrode voltage are given

a) V_{a0} , V_{g20} etc.

These values are continuously permitted at zero anode current and with cold cathode. They are also permitted as peak voltage during operation when a D.C. voltage in combination with a superimposed A.C. voltage are present at the electrode provided that the peak value coincides with approx. zero electrode current.

b) V_a , V_{g2} etc.

These values are D.C. components of the electrode voltages and are continuously permitted.

In circuits with automatic gain control the D.C. component may exceed the published limiting value with 20% provided that the increase of voltage is solely resulting from the gain control and that the maximum voltage coincides with approximately zero electrode current.

6. ELECTRODE CURRENT

The limiting values I_a , I_{g2} etc. are the D.C. components of the electrode currents calculated over 20 ms.

If no specific pulse ratings apply a peak value $2xI_a$, I_{g2} etc. is permitted for 10 ms maximum.

7. ELECTRODE DISSIPATION

The limiting values W_a , W_{g2} etc. are the average values at an averaging time of 1 s. If for audio output tubes a limiting value W_{g2p} is given this value applies to operation with speech and music excitation and should not be exceeded if measured with a sinusoidal signal and at maximum output. If load values vary during operation care should be taken not to exceed the limiting values of W_a and W_{g2} .

8. HEATER VOLTAGE

The average heater voltage should be the specified nominal value. Variation of the heater voltage exceeding the range of $V_f \text{ nom.} \pm 5\%$ will shorten the tube life.

9. SUPPLY VOLTAGE

If design centre ratings apply the variation of supply voltage should not exceed the range of the nominal value $\pm 10\%$.

10. RESISTANCE VALUES

If design centre ratings apply the spread of resistance values should be limited such that with all other conditions nominal no electrode voltages or currents will exceed the range of their nominal values $\pm 5\%$.

11. HEATER CATHODE CIRCUIT

Limiting values of V_{kf} apply to the positive and negative D.C. component of the voltage between the cathode and any of the heater terminals.

The limiting peak value is 2 times the rated D.C. value with a maximum of 315 V.

At the published values only the risk of breakdown is considered. No conclusions with respect to hum should be drawn from this figure.

To minimise the influence of variation and spread of the leakage current between heater and cathode the resistance of the external heater to cathode circuit should not exceed 20 k Ω in R.F. circuits where frequency stability or preservation of wave form is required and in A.F. circuits with low signal level.

However, when the D.C. value of V_{kf} is at least 3 times the RMS value of the heater voltage an external resistance between heater and cathode of maximum 220 k Ω can be used provided that the hum voltage which may then occur across the cathode resistor can be accepted for the application considered.

12. SUPPRESSOR GRID CIRCUIT

The voltage of the suppressor grid with respect to the cathode should not be positive and should not exceed 35 V.

The external resistance in the suppressor grid circuit should not exceed 5 k Ω .

13. CONTROL GRID CIRCUIT

In the interest of low hum and noise the resistance in the control grid circuit should be as low as possible.

The limiting value of the grid resistance given in the data sheets is chosen so that the negative grid current which may occur during life will not result in unacceptable tube operation.

If only the limiting value of the resistance for fixed bias operation is given and stabilizing elements are used in the circuit, this limiting value may be multiplied by the D.C. feedback factor obtained by these stabilizing elements to a maximum of 20 M Ω .

14. SHOCK AND VIBRATION

The conditions specified under "shock and vibration resistance" are test conditions applied to assess the mechanical quality of the tube.

These conditions are not intended to be used as normal operating conditions.

15. LIFE

In the interest of a satisfactory life performance and especially where long life is required the tube should be operated under the conditions quoted under "operating conditions". Spread and variation of operating conditions should be limited as much as possible. In this respect the operation with high cathode resistor values and positive grid bias is to be preferred.

Variation of heater voltage should not exceed the limits indicated in item 8 or if applicable, the limiting values specified in the individual tube data sheets.

16. HUM

A.F. application. If in the data an equivalent hum voltage on the control grid is given this value applies to the following conditions:

1. The frequency of the heater voltage is 50 c/s + 3% harmonics 500 c/s.
2. The hum voltage is measured as the equivalent RMS value with a filter of 45-550 c/s with a straight response curve.
3. The value of the impedance in the control grid circuit (Z_{g1}) does not exceed the value published with respect to hum.
4. The impedance in the cathode circuit is as specified with respect to hum. If no value is given the hum voltage across the cathode resistor is considered to be negligible.
5. The heater terminals and supply leads are screened with respect to the other electrode terminals unto the tube bottom.
6. The A.C. voltage between cathode and heater does not exceed the value corresponding with the method of earthing of the heater circuit specified with respect to hum.

17. MICROPHONY

The performance of an equipment with respect to microphony is defined by the following conditions:

1. The microphony performance of the relevant tube type.
2. The acceleration applied to the tube during operation.
3. The A.F. amplification between the input of the tube and the output of the applied circuit.

In many applications a tube is subject to accelerations applied via the tube socket or, however to a less extent, via the surrounding air.

The acceleration may be produced by a loudspeaker or by the operation of a motor or of a switch.

Measurements to reduce the acceleration should be directed to mechanical or acoustical isolation of the tube.

If mechanical isolation is required the application of a flexible tube holder is advised.

18. ENVIRONMENTAL CONDITIONS

- 18.1 Atmospheric pressure. Ratings apply to operation at normal atmospheric pressure at altitudes below 3000 m.

In order to avoid the risk of external flashovers it is advised to consult us if tubes have to be operated at lower pressures.

- 18.2 Bulb and base temperature. The bulb and the base temperature are defined as the highest temperature at any place on the bulb or the base.

The base temperature should not exceed 165 °C.

If the maximum permitted base or bulb temperature is exceeded life performance may deteriorate. Adequate cooling should therefore be observed and may be obtained by convection, radiation or conduction.

A tube mounted in free air may be cooled by convection and by radiation. In order to obtain the most efficient cooling a free circulation of air should be assured around the tube and neighbouring bodies should be maintained at low temperature.

These neighbouring bodies should preferably approach the condition of a perfect black body.

With the design of screening- or retaining devices free circulation of cooling air should be permitted and reflection of heat back on to the bulb must be avoided.

Where the forementioned requirements cannot be met due to mechanical limitation or high altitude or where the temperature of the air available for circulation is too high, forced air cooling or conduction can be adopted. In some cases it may be necessary to reduce the electrode dissipation.

If a good thermal contact can be maintained between the glass surface of the tube and the heat conducting mass on which it is mounted and if this mass is at a sufficiently low temperature, cooling by air circulation may not be necessary. This method is particularly suitable for tubes with flying leads when the mechanical arrangements are not likely to allow free air cooling.

- 18.3 Flashover. To avoid insulation breakdown due to ionization or tracking at high electrode voltages adequate ventilation is required. High voltage terminals should not have sharp or pointed edges.

19. MOUNTING AND WIRING

- 19.1 Mounting position. A tube may be mounted in any position. The vertical position however, is recommended.

- 19.2 Pins and sockets. Subminiature tubes employ semi-rigid pins.

To ensure that these pins are straight before insertion into the tube socket use may be made of a pin straightening tool. It is recommended both in wired and in printed circuits to use sockets with floating contacts. The connections to these floating contacts should be as flexible as possible.

Where the floating contacts are rigidly attached to the contact tags, a wiring jig should be used to ensure that the socket contacts are in the correct position to receive a tube after the socket has been wired. The use of too stiff wiring will destroy the advantage provided by the float of the contacts and may hold the contact so far out of position as to result in damage of the tube base.

No connections should be made to a pin marked i.c.

- 19.3 Flexible leads. Where tubes with flexible leads are employed without plug in sockets and are held in position by means of the envelope, such support should not cause undue stress on the leads.

- 19.4 Soldering. Where the leads are connected by soldering they should not be sharply bent close to the glass. It should also be avoided that the glass to metal seal is overheated.


The leads therefore should not be soldered nearer than 5 mm to the glass and use may be made of a thermal shunt between the glass and the soldering point.

- 19.5 Magnetic and electrostatic fields. To avoid unwanted effects of magnetic or electrostatic fields a tube should be positioned or shielded as to reduce such effects to a minimum.

- 19.6 Retaining devices. If, measures are required to prevent a tube being shaken out of the holder a retaining device may be used.

Care should then be taken not to exceed the maximum permitted bulb temperature.

- 19.7 Floating electrodes. All tube electrodes should have a D.C. connection to the cathode. An interruption of the D.C. connection between cathode and earth or heater and earth may introduce heater-cathode breakdown and should be avoided.



18. Preparation. To avoid contamination of the specimen, the following steps should be followed:

- 18.1. The specimen should be prepared in a clean, dry container.
- 18.2. The specimen should be stored in a cool, dry place.

19. MOISTURE AND AIR

19.1. Moisture. Moisture may be present in the specimen. The following steps should be followed:

- 19.1.1. The specimen should be dried in a desiccator.
- 19.1.2. The specimen should be stored in a dry container.

19.2. Air. Air may be present in the specimen. The following steps should be followed:

- 19.2.1. The specimen should be degassed in a vacuum oven.
- 19.2.2. The specimen should be stored in a dry container.
- 19.2.3. The specimen should be handled in a dry environment.
- 19.2.4. The specimen should be stored in a dry container.
- 19.2.5. The specimen should be stored in a dry container.
- 19.2.6. The specimen should be stored in a dry container.
- 19.2.7. The specimen should be stored in a dry container.
- 19.2.8. The specimen should be stored in a dry container.
- 19.2.9. The specimen should be stored in a dry container.
- 19.2.10. The specimen should be stored in a dry container.

19.3. Leads. Where leads are used, the following steps should be followed:

- 19.3.1. The leads should be shielded with lead.
- 19.3.2. The leads should be stored in a lead container.
- 19.3.3. The leads should be handled in a lead shielded area.

19.4. Shielding. Where the leads are shielded, the following steps should be followed:

- 19.4.1. The shielding should be checked for integrity.
- 19.4.2. The shielding should be replaced if damaged.
- 19.4.3. The shielding should be stored in a lead container.

19.5. Lead. The lead should be stored in a lead container. The following steps should be followed:

- 19.5.1. The lead should be stored in a lead container.
- 19.5.2. The lead should be handled in a lead shielded area.
- 19.5.3. The lead should be stored in a lead container.

19.6. Lead. The lead should be stored in a lead container. The following steps should be followed:

- 19.6.1. The lead should be stored in a lead container.
- 19.6.2. The lead should be handled in a lead shielded area.
- 19.6.3. The lead should be stored in a lead container.

19.7. Lead. The lead should be stored in a lead container. The following steps should be followed:

- 19.7.1. The lead should be stored in a lead container.
- 19.7.2. The lead should be handled in a lead shielded area.
- 19.7.3. The lead should be stored in a lead container.

19.8. Lead. The lead should be stored in a lead container. The following steps should be followed:

- 19.8.1. The lead should be stored in a lead container.
- 19.8.2. The lead should be handled in a lead shielded area.
- 19.8.3. The lead should be stored in a lead container.

S.Q. TUBE

Special quality pentode designed for use as A.F. and R.F. amplifier, output tube, oscillator a.o.



QUICK REFERENCE DATA

Life test	10 000 hours
Base	Loctal
Heating	Indirect A.C. or D.C. Series or parallel supply
Heater voltage	V_f 20 V
Heater current	I_f 125 mA
Anode current	I_a 16 mA
Mutual conductance	S 6.5 mA/V
Equivalent noise resistance	R_{eq} 1200 Ω
Hum voltage	V_{geq} 10 μV_{RMS}

DIMENSIONS AND CONNECTIONS

Dimensions in mm

Base: Loctal



7Z2 7200

CHARACTERISTICS

Column I Nominal value or setting of the tube

II Range values for equipment design: Initial spread

III Range values for equipment design: End of life

		I	II	III	
Heater voltage	V_f	20			V
Heater current	I_f	125	120 - 130		mA
Anode supply voltage	V_{ba}	225			V
Grid No. 2 supply voltage	V_{bg2}	155			V
Grid No. 3 voltage	V_{g3}	0			V
Cathode resistor	R_k	250			Ω
Anode current	I_a	16	13.5 - 19	min. 11.5	mA
Grid No. 2 current	I_{g2}	3	2 - 4		mA
Mutual conductance	S	6.5	5.5 - 7.8	min. 4.5	mA/V
Internal resistance	R_i	250	min. 200		k Ω
Amplification factor	μ_{g2g1}	19			
<u>Negative grid current</u>	$-I_g$		max. 0.5	max. 1.0	μA
<u>Output power</u>	W_o	1.5			W
Anode load resistance $R_{a\sim} = 10 k\Omega$					
Total distortion $d_{tot} = 10 \%$					
<u>Cathode heating time</u>		26	19 - 33		sec
Anode current $I_a = 4 mA$					
<u>Equivalent noise resistance</u>					
R. F.	R_{eq}	1200	max. 2000		Ω
R. F. connected as triode	R_{eq}	650			Ω
A. F. (500. - 3000 Hz)	R_{eq}	5000			Ω

CHARACTERISTICS (continued)

		II	III	
<u>Insulation between cathode and heater</u>	I_{kf}	max. 0.5	max. 1.0	μA
Voltage between cathode and heater $V_{kf} = 50$ V (cathode positive)				
<u>Insulation between two electrodes</u>	R_{ins}	min. 1000	min. 300	$M\Omega$
Voltage between electrodes $V = 50$ V				
<u>Hum voltage</u>	V_{geq}	max. 10		μV_{RMS}
Grid No. 1 resistor $R_{g1} = 500$ k Ω				
Cathode by-pass capacitor $C_k = 100$ μF				
Heater centre earthed				

CAPACITANCES

		I	II	
Grid No. 1 to grid No. 2, grid No. 3, cathode, heater and screen	$C_{g1/g2g3kfs}$	8.5	7.5 - 9.5	pF
Grid No. 1 to grid No. 2, grid No. 3, cathode, heater and screen	$C_{g1/g2g3kfs}$	10.5		pF
Cathode current $I_k = 19$ mA				
Anode to grid No. 2, grid No. 3, cathode, heater and screen	$C_{a/g2g3kfs}$	6.0	4.5 - 7.7	pF
Grid No. 1 and anode to grid No. 3, grid No. 2, cathode, heater and screen	$C_{g1a/g3g2kfs}$		max. 16	pF
Anode to grid No. 1	C_{ag1}	14	max. 18	mpF
Grid No. 1 to grid No. 2	C_{g1g2}	3		pF
Grid No. 2 to grid No. 3	C_{g2g3}	2.2		pF
Grid No. 1 to cathode and screen	$C_{g1/ks}$	4.5		pF
Anode to grid No. 3	C_{ag3}	1.2		pF
Grid No. 1 to heater	C_{g1f}	20	max. 40	mpF
Anode to heater	C_{af}	120		mpF
Cathode and screen to heater	$C_{ks/f}$	7		pF

CAPACITANCES (continued)

As triode (Grid No. 2 and grid No. 3 connected to anode)

	I	II	
Grid No. 1 to cathode, heater and screen	5	max. 6	pF
Anode, grid No. 2 and grid No. 3 to cathode, heater and screen	7.5	max. 9	pF
Anode, grid No. 2 and grid No. 3 to grid No. 1	3.2	max. 4	pF

LIFE

Production samples are tested to be within the end of life values (column III) under the following conditions during 10 000 hours.

Heater voltage	V_f	20	V
Anode supply voltage	V_{ba}	225	V
Grid No. 2 supply voltage	V_{bg_2}	155	V
Grid No. 3 voltage	V_{g_3}	0	V
Cathode resistor	R_k	250	Ω

LIMITING VALUES Design centre rating system.

Anode voltage	V_{a_0}	max.	550	V
	V_a	max.	300	V
Anode dissipation	W_a	max.	4	W
Grid No. 3 voltage	$V_{g_{30}}$	max.	550	V
	V_{g_3}	max.	300	V
Grid No. 3 dissipation	W_{g_3}	max.	1	W
Grid No. 2 voltage	$V_{g_{20}}$	max.	550	V
	V_{g_2}	max.	300	V
Grid No. 2 dissipation	W_{g_2}	max.	1	W
Dissipation of anode, grid No. 2 and grid No. 3 (triode connected)	$W_{a+g_2+g_3}$	max.	5	W
Grid No. 1 voltage	$-V_{g_1}$	max.	100	V
Grid No. 1 dissipation	W_{g_1}	max.	50	mW
Cathode current	I_k	max.	30	mA


LIMITING VALUES (continued)


Grid No.1 resistor	R_{g1}	max.	0.5 $M\Omega$
Anode dissipation > 1.5 W			
Grid No.1 resistor	R_{g1}	max.	3 $M\Omega$
Anode dissipation < 1.5 W			
Voltage between cathode and heater	V_{kf}	max.	120 V
Bulb temperature (Metal envelope)	t_{bulb}	max.	120 $^{\circ}C$



Heater voltage: The average heater voltage should be 20 V.


Variations of the heater voltage exceeding the range of 19 V to 21 V will shorten the tube life.



The tolerance of heater current (column II) should be taken into account.

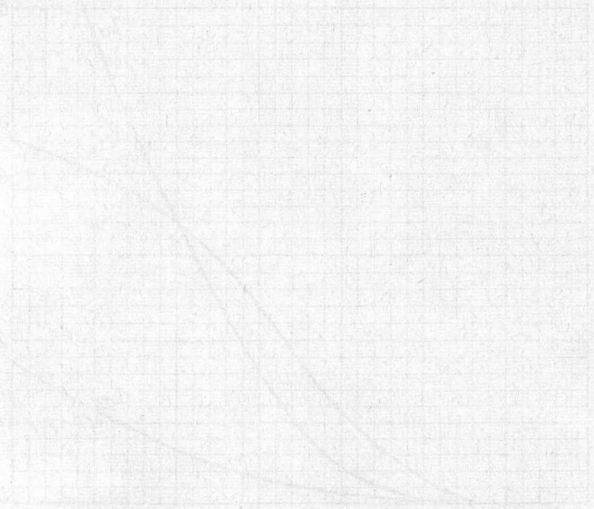

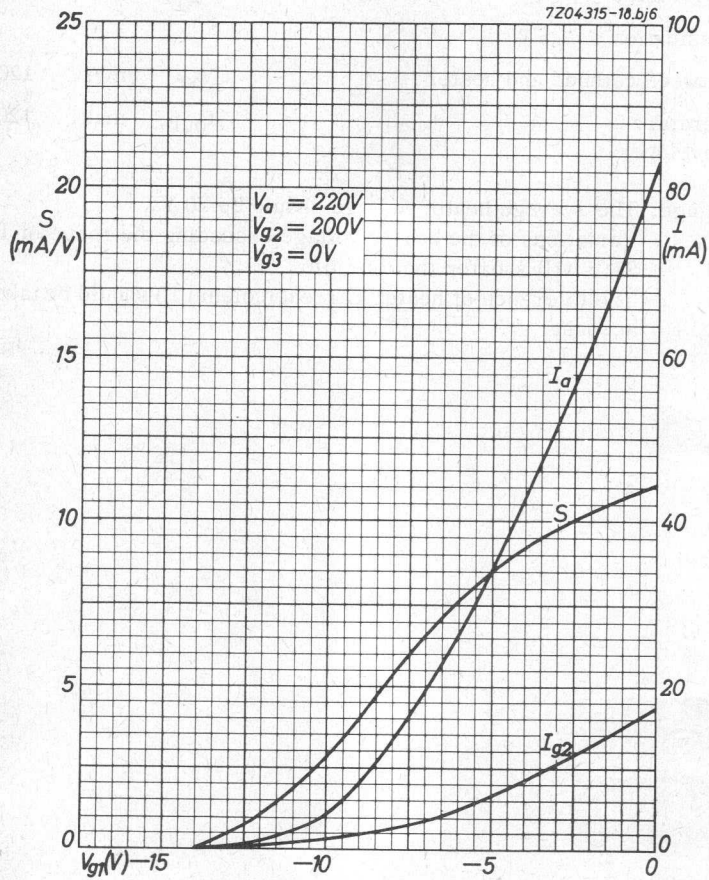


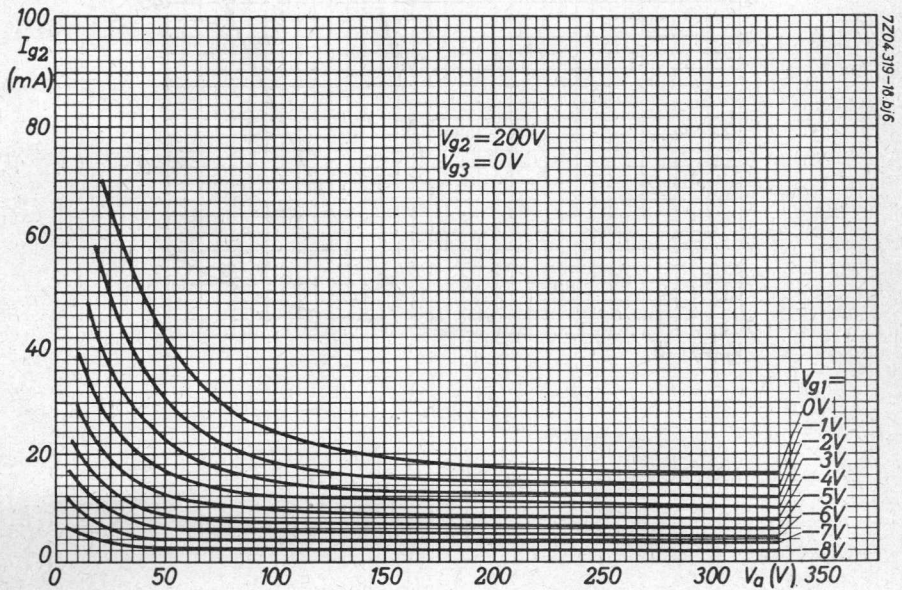
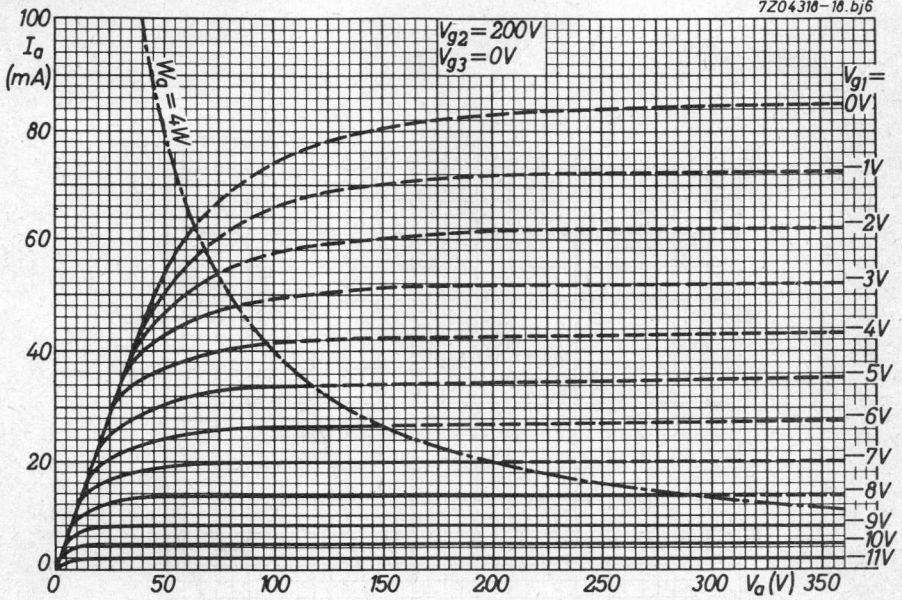


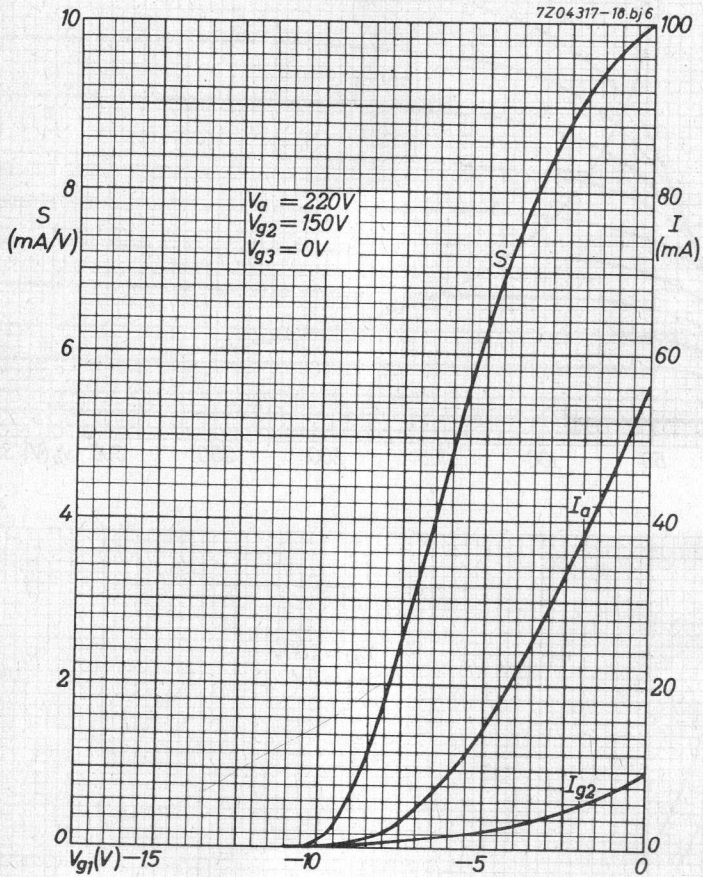


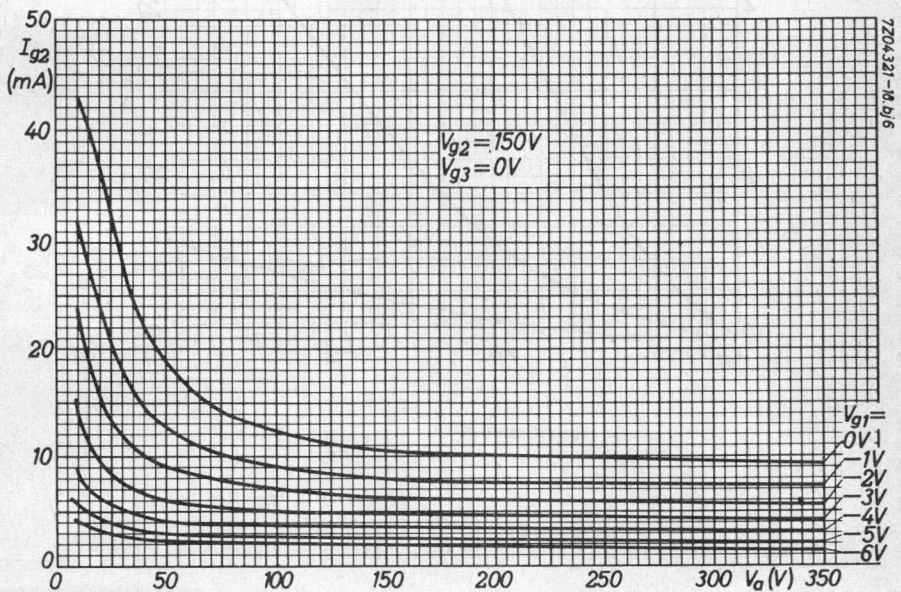
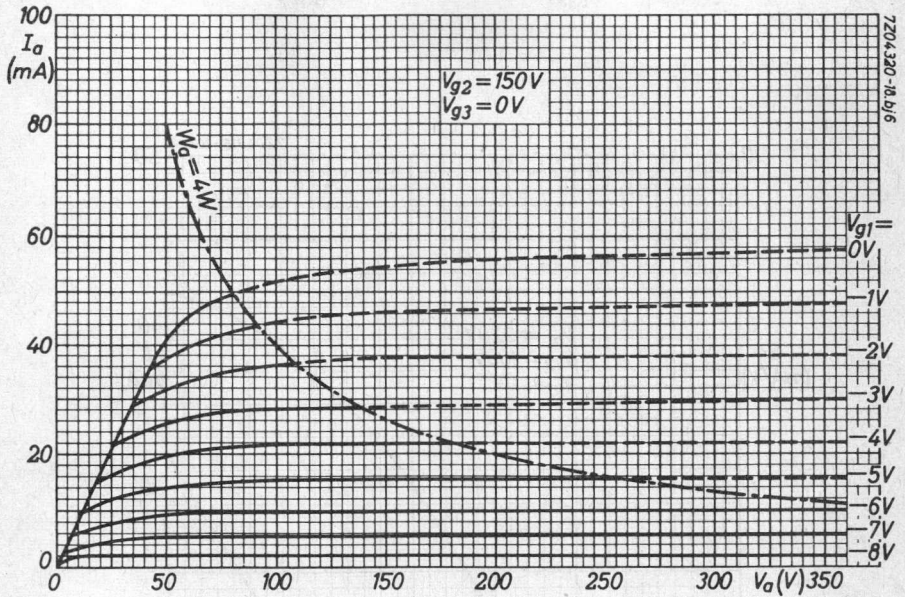


7204316-18.bj 6

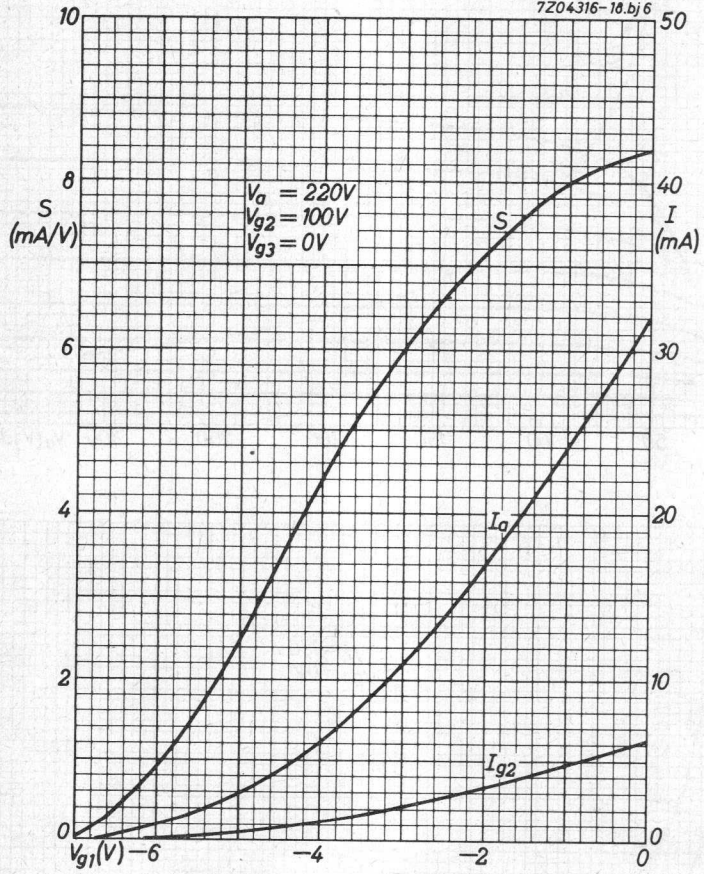

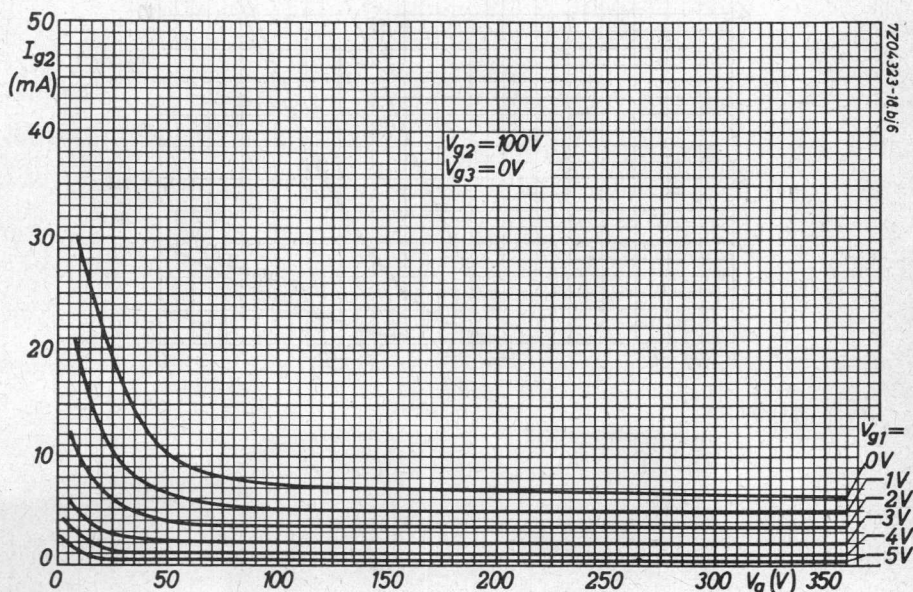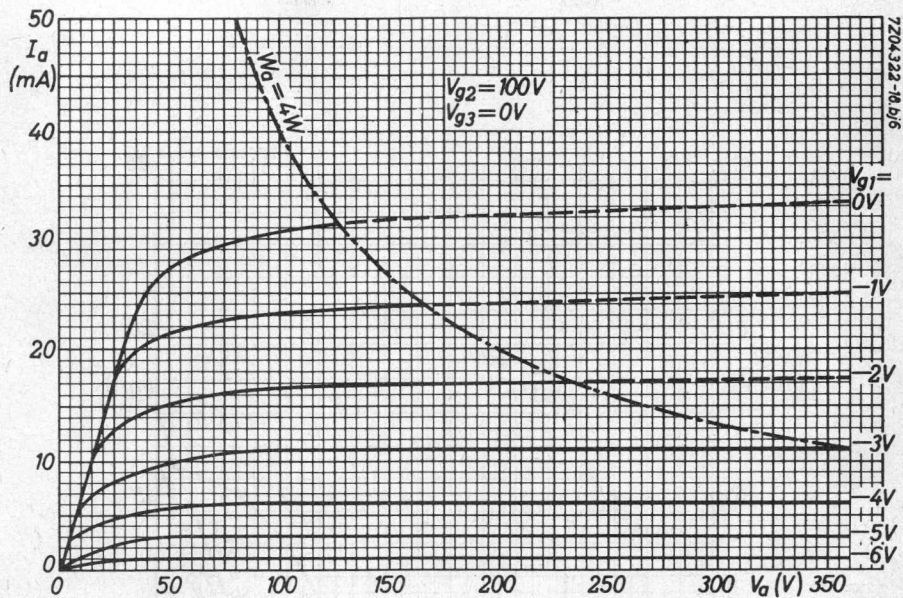


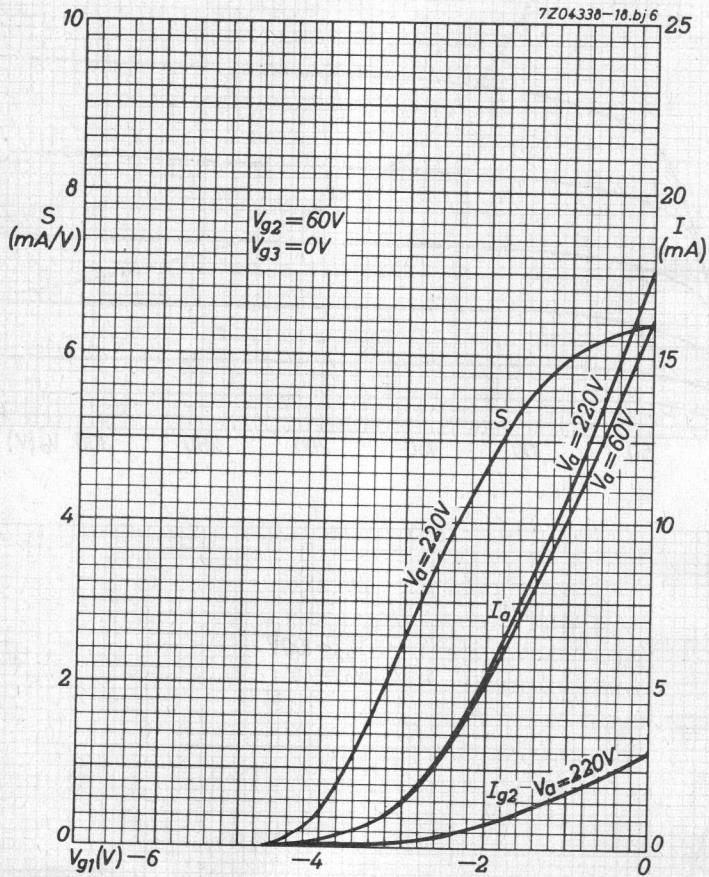


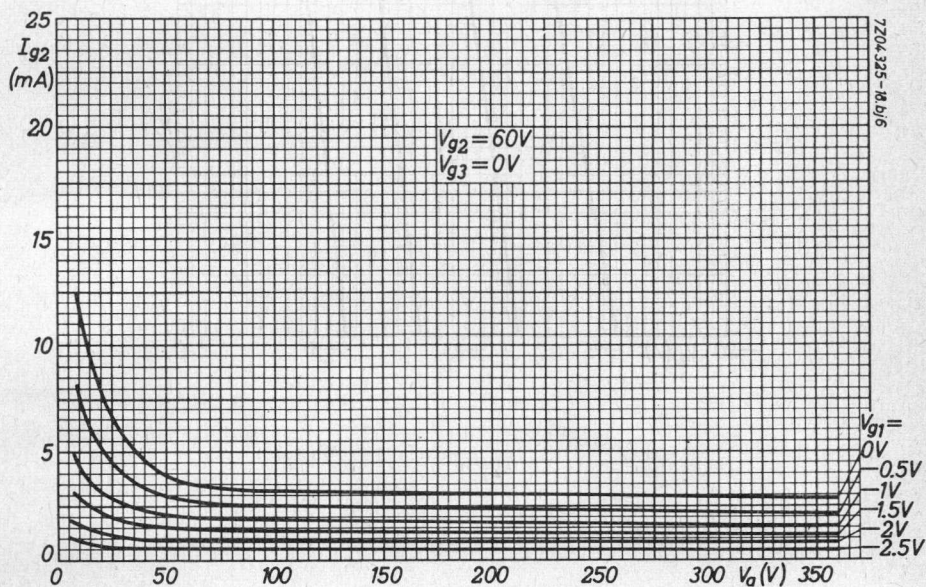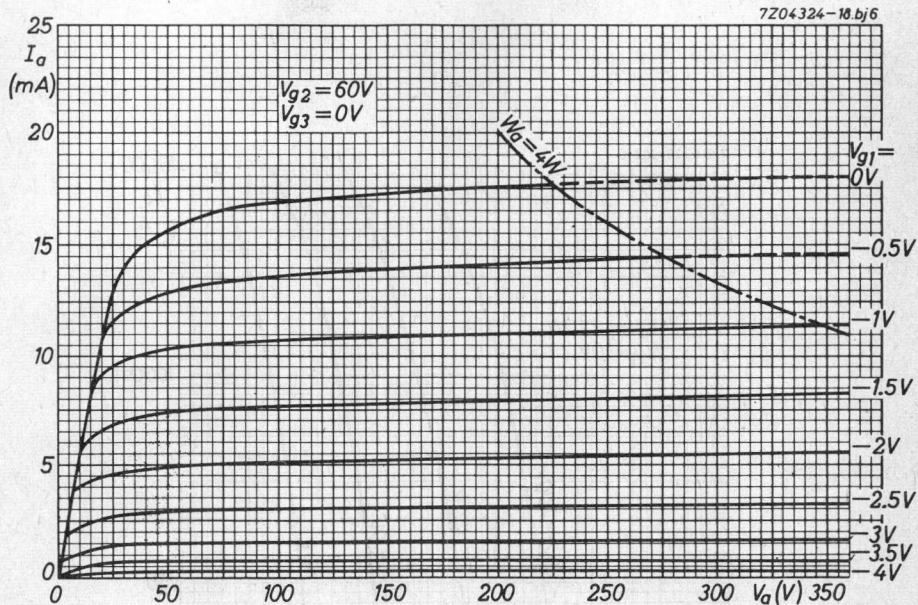



C3m

7204326-10.bj6

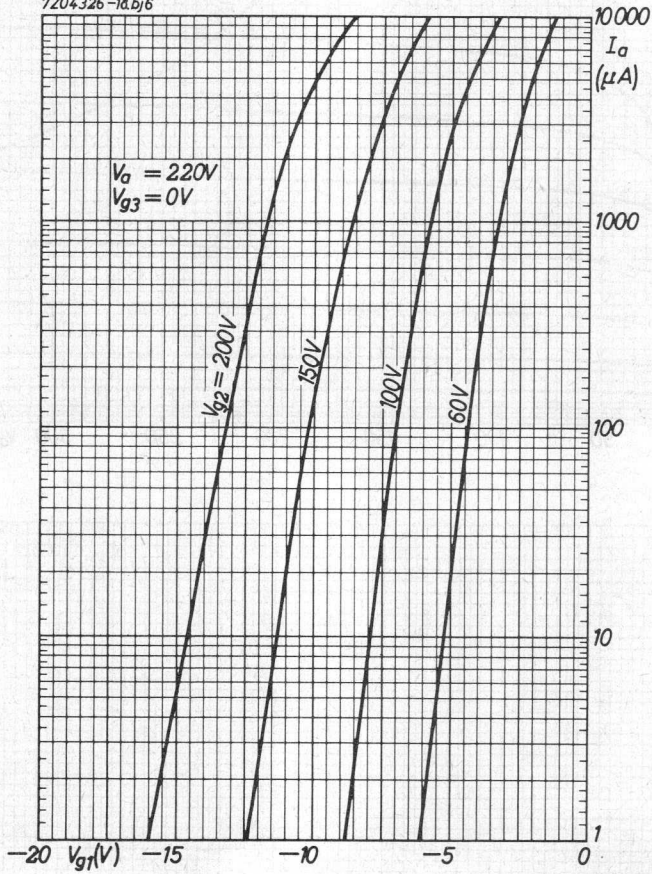


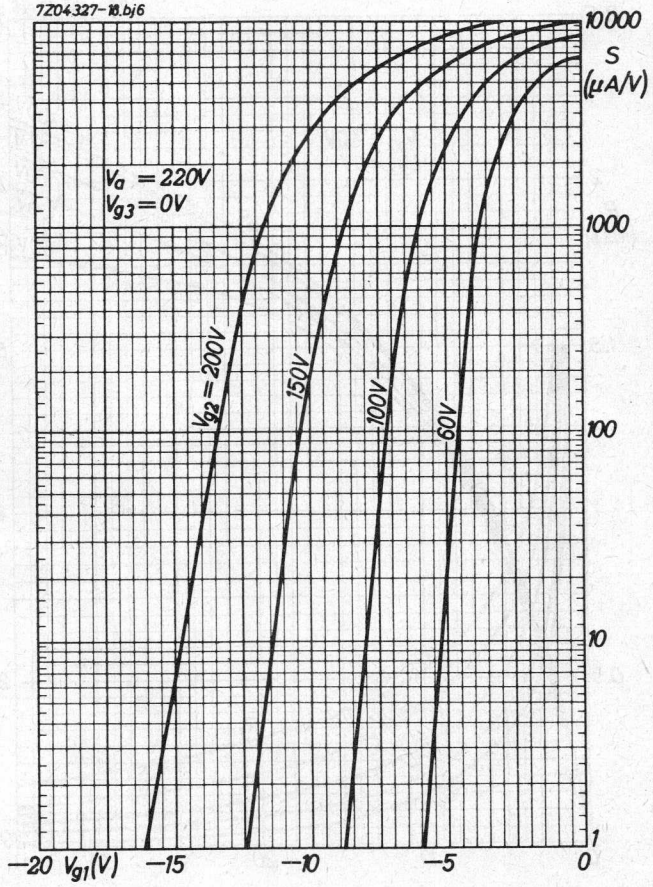

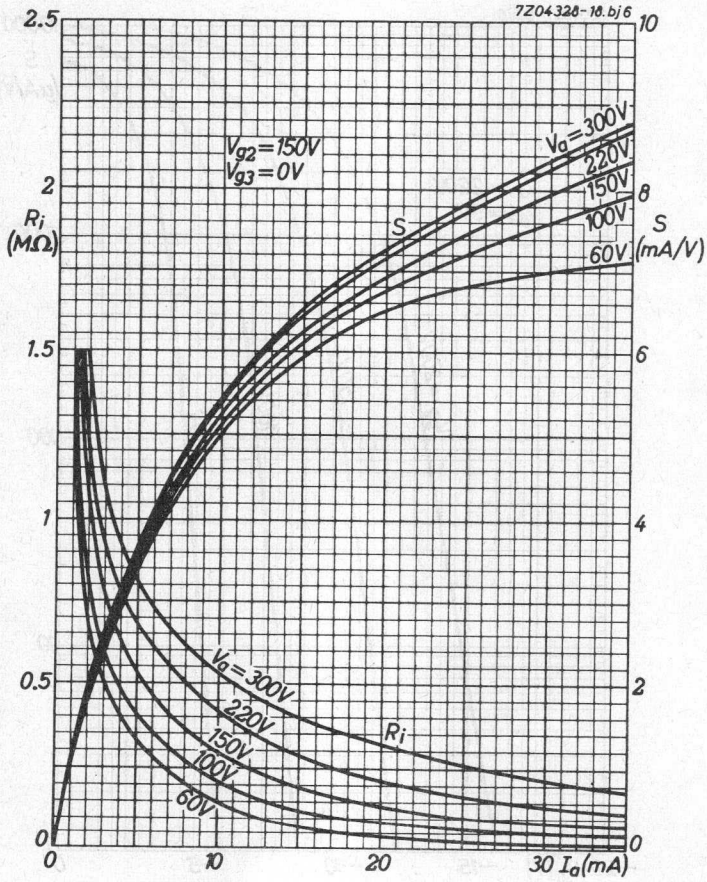


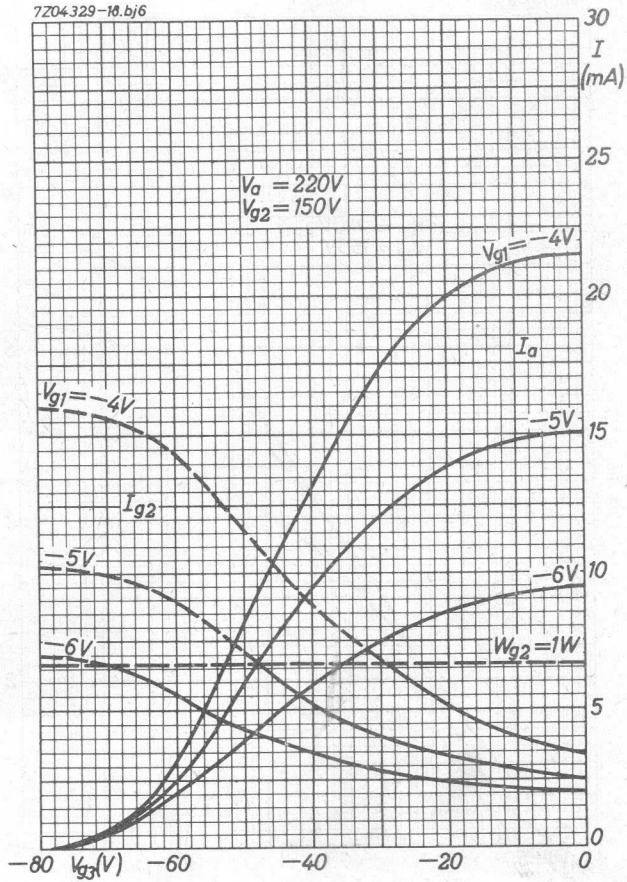



7204330-10.bj6

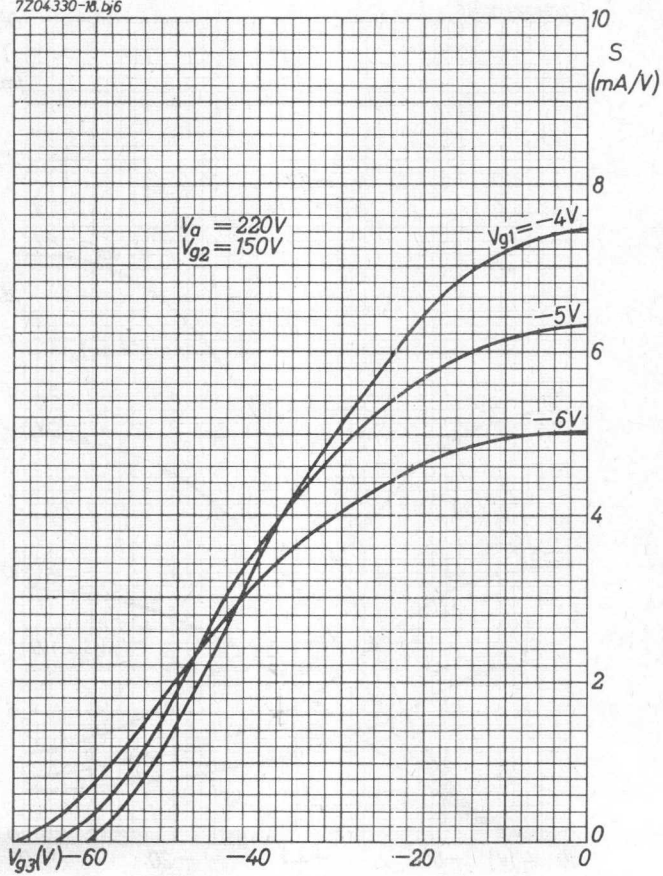


7204.331-10.bj6

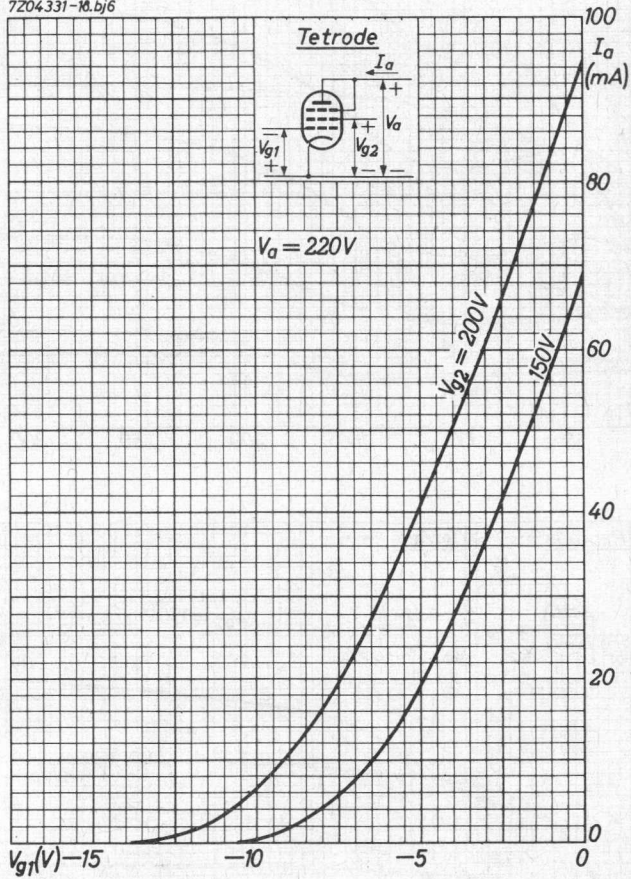



C3m

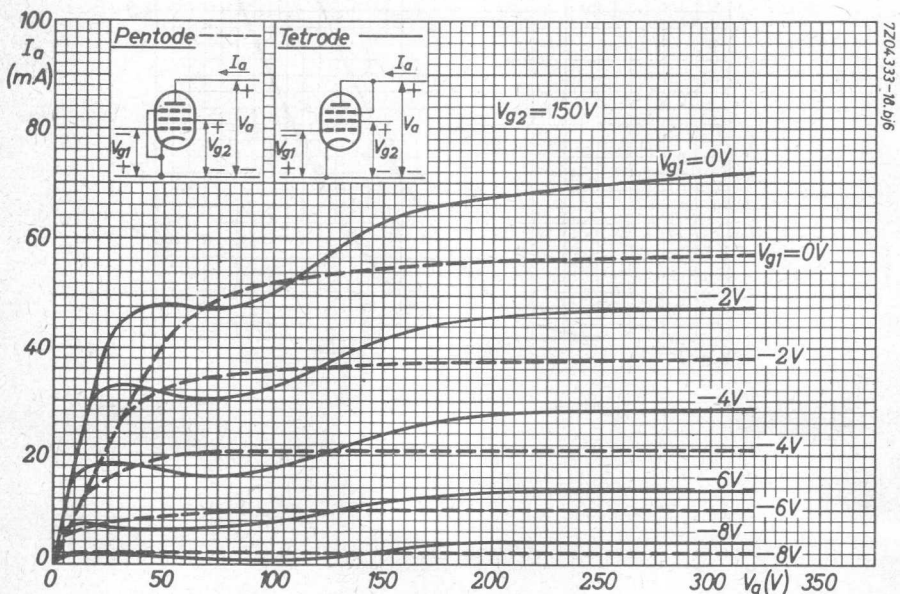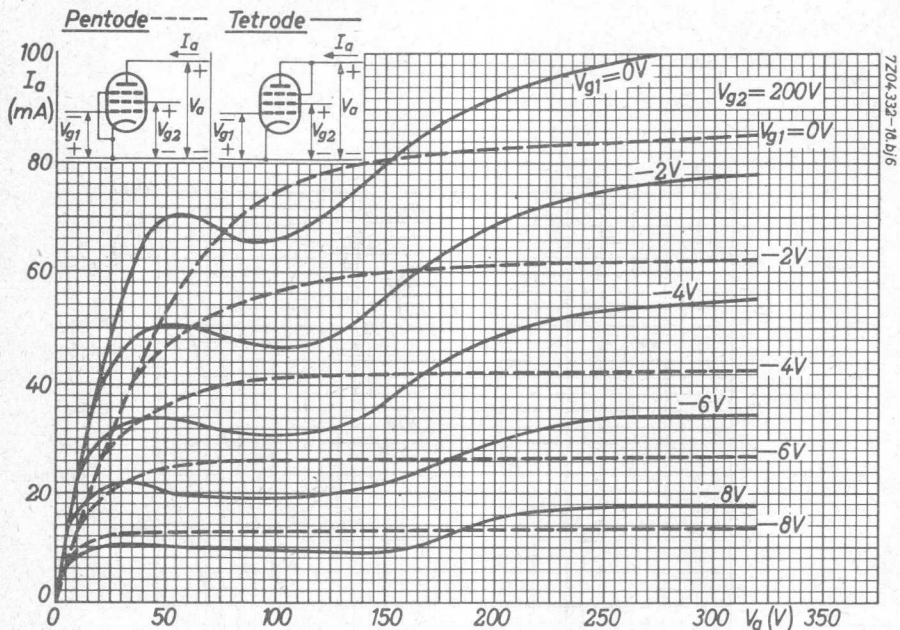


7204 334 - 10.bj6

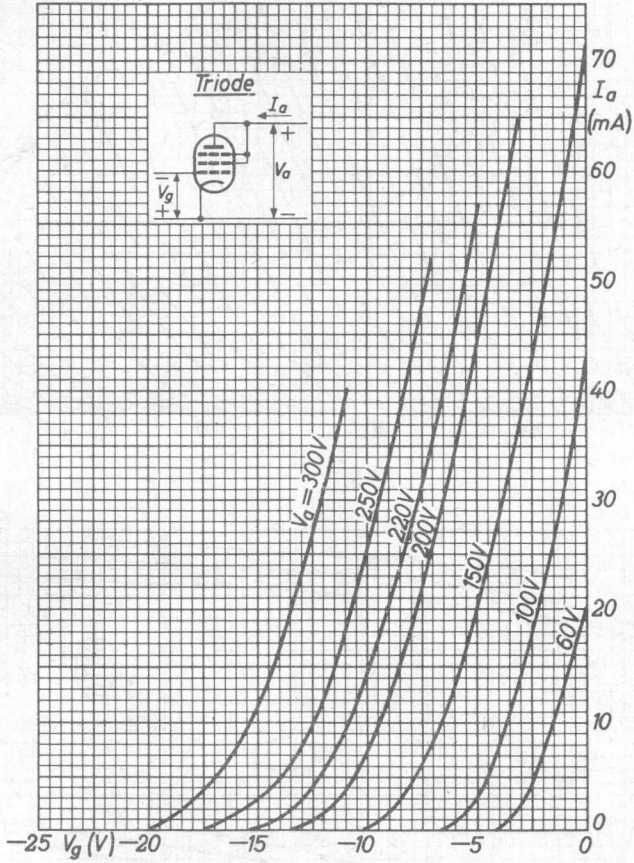

7204335-18.bj6

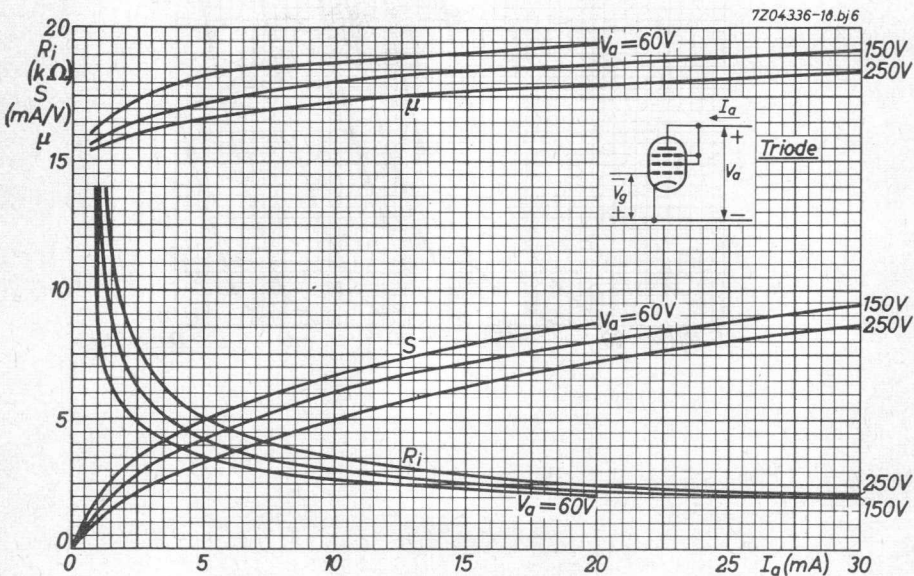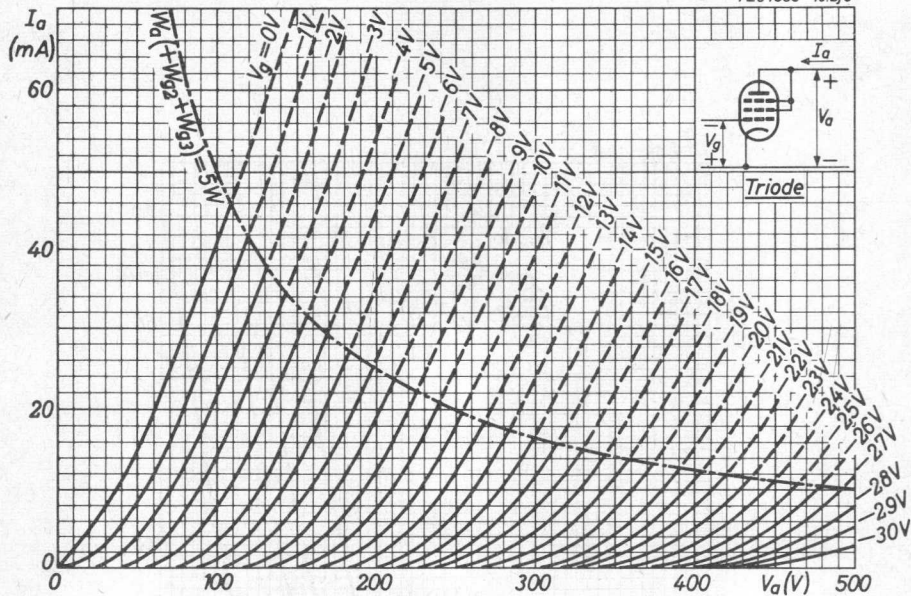

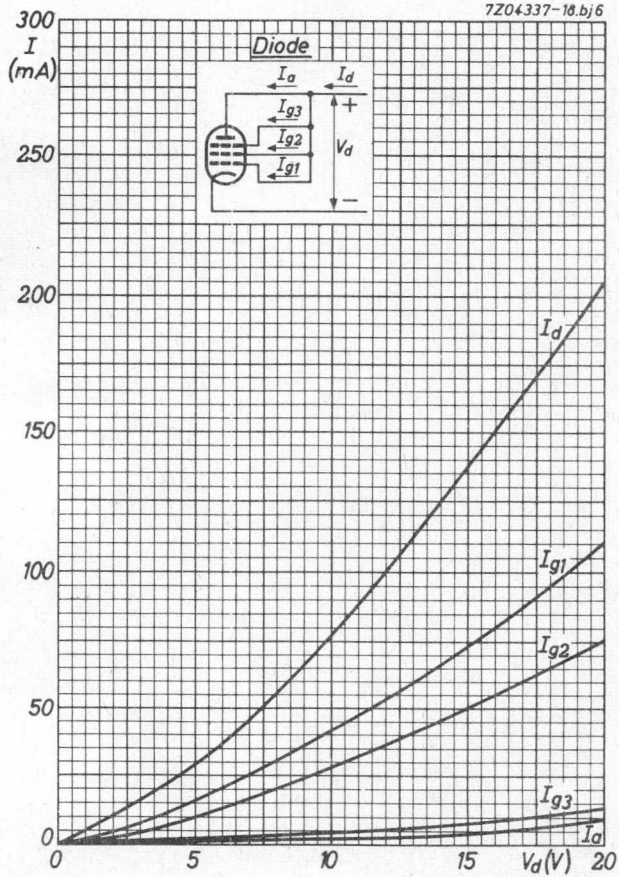



S.Q. TUBE


Special quality pentode designed for use as wide band amplifier

QUICK REFERENCE DATA		
Life test	10 000 hours	
Low interface resistance		
Base	Noval. Gold plated pins	
Heating	Indirect A.C. or D.C.; Parallel supply	
Heater voltage	V_f	6.3 V
Heater current	I_f	315 mA
Anode current	I_a	22 mA
Mutual conductance	S	35 mA/V
Equivalent noise resistance	R_{eq}	150 Ω

DIMENSIONS AND CONNECTIONS

Dimensions in mm

Base: Noval

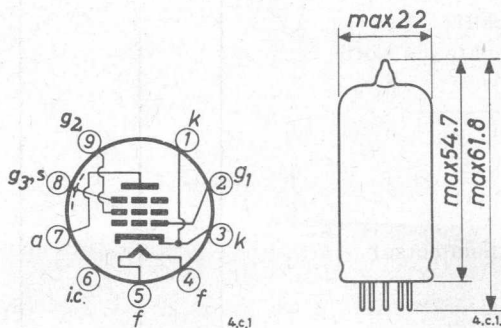

7Z2 6220

CHARACTERISTICS

Column I Nominal value or setting of the tube

II Range values for equipment design: Initial spread

III Range values for equipment design: End of life

		I	II	III	
Heater voltage	V_f	6.3			V
Heater current	I_f	315	299	331	mA
Anode supply voltage	V_{ba}	190			V
Grid No.2 supply voltage	V_{bg_2}	160			V
Grid No.3 voltage	V_{g_3}	0			V
Grid No.1 supply voltage	$+V_{bg_1}$	10			V
Cathode resistor	R_k	400			Ω
Anode current	I_a	22	21 - 23	min. 20	mA
Grid No.2 current	I_{g_2}	6.0	5.4 - 6.6		mA
Internal resistance	R_i	120			k Ω
Mutual conductance	S	35	30 - 40	min. 24.5	mA/V
Amplification factor	$\mu_{g_2g_1}$	80			
<u>Negative grid current</u>	$-I_{g_1}$		max. 0.3	max. 1.0	μA
<u>Equivalent noise resistance</u>	R_{eq}	150			Ω
<u>Input resistance</u>	R_{g_1}	1			k Ω
Frequency = 100 MHz pin No.1 connected to pin No.3					
$\frac{S}{2\pi} \cdot \frac{1}{C_{g_1(\text{hot})} + C_a + 5 \text{ pF}}$		230			MHz
<u>Noise factor</u>	F	7			dB
Frequency = 100 MHz (Adapted to minimum noise)					
<u>Phase angle of slope</u>	φ_s	22			o
Frequency = 100 MHz					

CHARACTERISTICS (continued)

<u>As triode</u> (grid No.2 connected to anode)		I	II	
Anode supply voltage	V_{ba}	160		V
Grid No.3 voltage	V_{g3}	0		V
Grid No.1 supply voltage	$+V_{bg1}$	10		V
Cathode resistor	R_k	470		Ω
Anode current	I_a	24		mA
Mutual conductance	S	41		mA/V
Amplification factor	μ	77		
Internal resistance	R_i	1.9		k Ω
<u>Equivalent noise resistance</u>	R_{eq}	65		Ω
<u>Insulation resistance between anode and other electrodes</u>	R_{ins}		min. 500	M Ω
Voltage between electrodes = 300 V				
<u>Insulation resistance between grid No.1 and other electrodes</u>	R_{ins}		min. 200	M Ω
Voltage between electrodes = 50 V				
<u>Leakage current between cathode and heater</u>	I_{kf}		max. 5	μ A
Voltage between cathode and heater = 100 V				
CAPACITANCES				
<u>Without external shield.</u>				
Grid No.1 to grid No.2, grid No.3, cathode, heater and screen	$C_{g1/g2g3kfs}$	10	9- 11	pF
Grid No.1 to grid No.2, grid No.3, cathode, heater and screen Cathode current = 28 mA	$C_{g1/g2g3kfs}$	17		pF
Anode to grid No.2, grid No.3, cathode, heater and screen	$C_{a/g2g3kfs}$	2.1	1.8- 2.4	pF

7Z2 7205

CAPACITANCES (continued)

		I	II	
Anode to grid No. 1	C_{ag_1}		max. 40	mpF
Anode to cathode	C_{ak}		max. 50	mpF
Anode to cathode and grid No. 2	C_{a/kg_2}	0.32	0.28-0.36	pF
Anode to cathode, grid No. 2 and grid No. 3	C_{a/kg_2g_3}	2.0	1.7- 2.3	pF
Anode to heater	C_{af}		max. 100	mpF
Grid No. 1 to cathode	C_{g_1k}	6.8	6.1- 7.5	pF
Grid No. 1 to cathode and grid No. 2	C_{g_1/kg_2}	9.5	8.5-10.5	pF
Grid No. 1 to cathode, grid No. 2 and grid No. 3	C_{g_1/kg_2g_3}	10	9- 11	pF
<u>With external shield</u>				
Grid No. 1 to grid No. 2, grid No. 3, cathode, heater and screen	C_{g_1/g_2g_3kfs}	10.1	9.1-11.1	pF
Grid No. 1 to grid No. 2, grid No. 3, cathode, heater and screen Cathode current = 28 mA	C_{g_1/g_2g_3kfs}	17.1		pF
Anode to grid No. 2, grid No. 3, cathode, heater and screen	C_{a/g_2g_3kfs}	3.3	2.9- 3.7	pF
Anode to grid No. 1	C_{ag_1}		max. 35	mpF
<u>As triode. Without external shield.</u>				
Grid No. 3 connected to cathode				
Grid No. 1 to grid No. 3, cathode, heater and screen	C_{g_1/g_3kfs}	7.3		pF
Anode and grid No. 2 to grid No. 3, cathode, heater and screen	C_{ag_2/g_3kfs}	3.1		pF
Anode and grid No. 2 to grid No. 1	C_{ag_2/g_1}	2.7		pF
<u>As triode. Without external shield</u>				
Grid No. 3 connected to anode				
Grid No. 1 to cathode, heater and screen	$C_{g_1/kfs}$	6.7		pF
Anode, grid No. 2 and grid No. 3 to cathode, heater and screen	$C_{ag_2g_3/kfs}$	1.0		pF
Anode, grid No. 2 and grid No. 3 to grid No. 1	$C_{ag_2g_3/g_1}$	3.3		pF

LIFE

Production samples are tested to be within the end of life values (column III) during 10 000 hours.

LIMITING VALUES (Design centre rating system, if not otherwise specified)

Anode voltage		V_{a0}	max. 400 V
		V_a	max. 220 V
Anode dissipation	Des. centre	W_a	max. 4.2 W
	Abs. max.	W_a	max. 4.5 W
Grid No.2 voltage		V_{g20}	max. 400 V
		V_{g2}	max. 180 V
Grid No.2 dissipation	Des. centre	W_{g2}	max. 1.0 W ¹⁾
	Abs. max.	W_{g2}	max. 1.1 W ¹⁾
Anode plus grid No.2 dissipation (triode connected)		W_{a+g2}	max. 4.5 W
Grid No.1 voltage		$-V_{g1}$	max. 30 V
		$+V_{g1}$	max. 0 V
Cathode current	Des. centre	I_k	max. 30 mA
	Abs. max.	I_k	max. 33 mA
Grid resistor (Automatic bias)		R_{g1}	max. 0.5 M Ω
Voltage between cathode and heater			
	cathode positive	V_{kf}	max. 120 V
	cathode negative	V_{kf}	max. 60 V
Bulb temperature	Abs. max.	t_{bulb}	max. 190 °C

Heater voltage: The average heater voltage should be 6.3 V.

Variations of the heater voltage exceeding the range of 6.0 V to 6.6 V will shorten the tube life.


The tolerance of heater current (column II) should be taken into account.


¹⁾ Care should be taken not to exceed the rated W_{g2} values due to switching of positive supply voltages.


If the cathode is shunted by a capacitance $> 10 \mu F$ a series resistor of minimum 1 k Ω should be inserted in the grid No.1 lead.


7Z2 7206

7Z01479-4.c.1

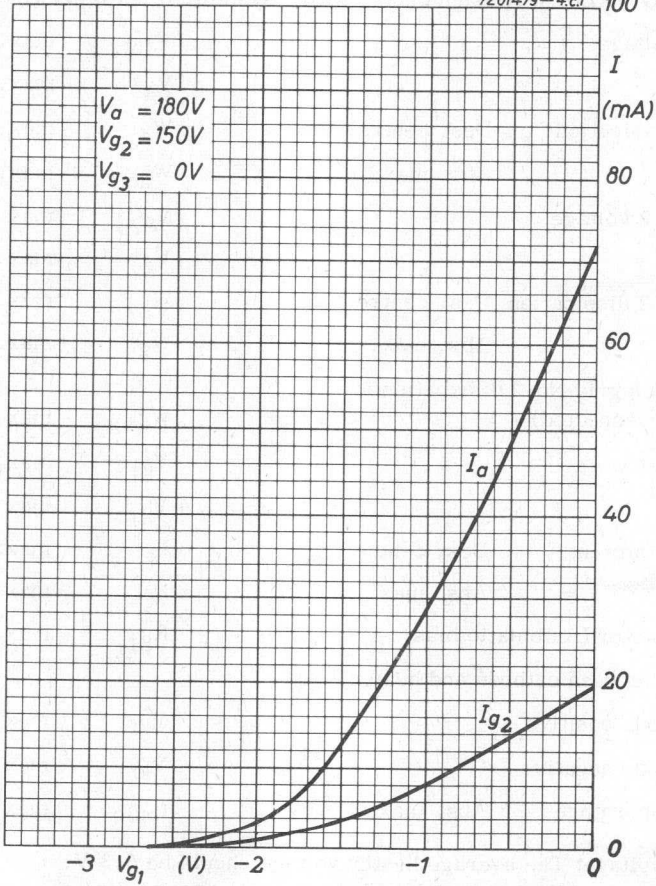


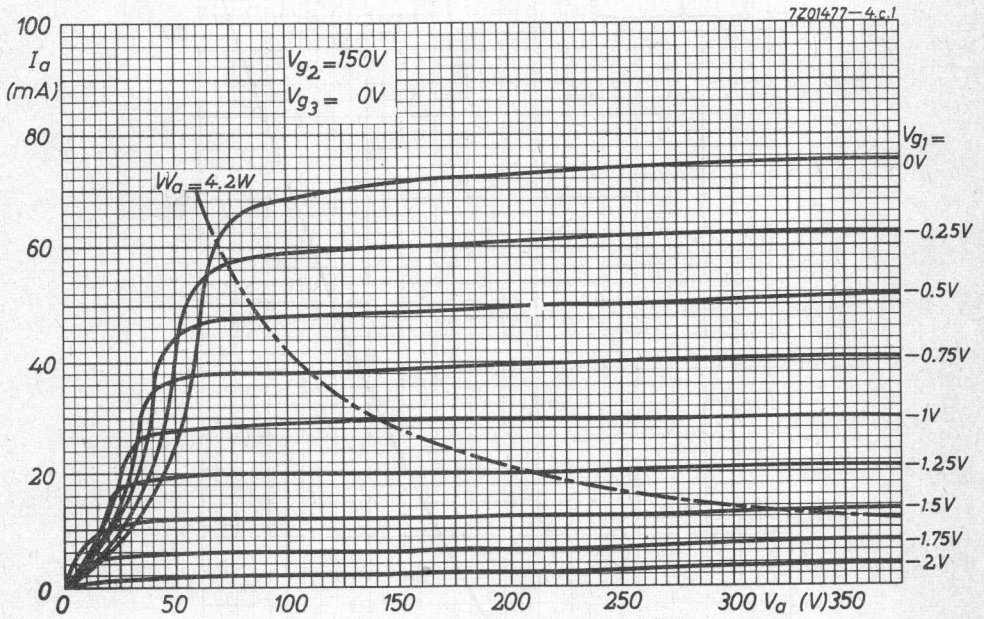

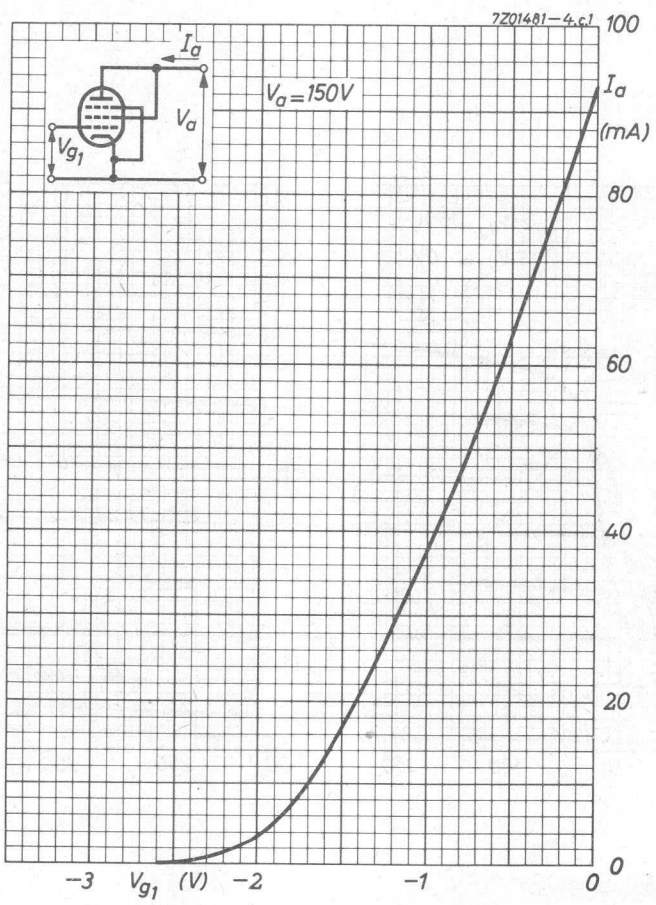

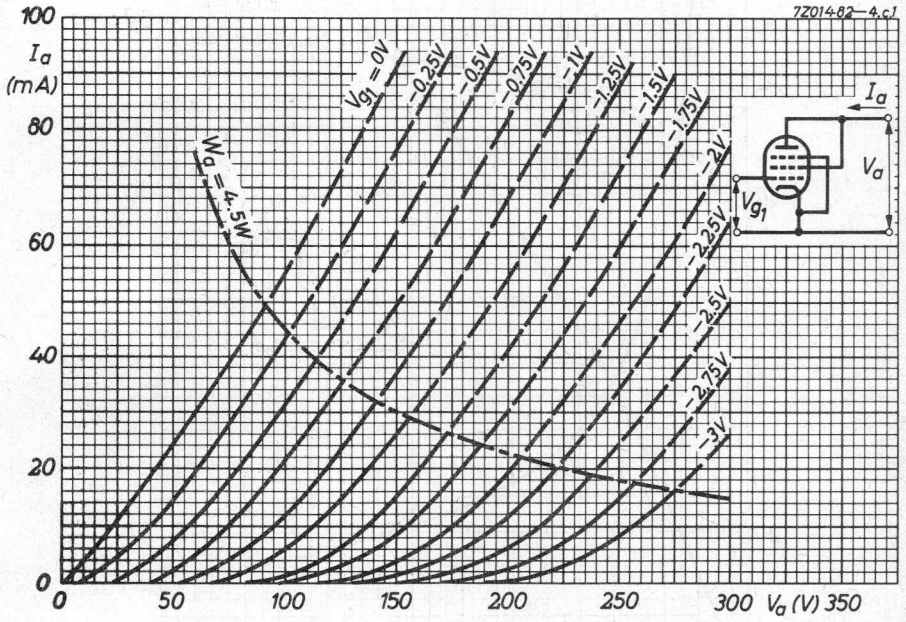

D3a

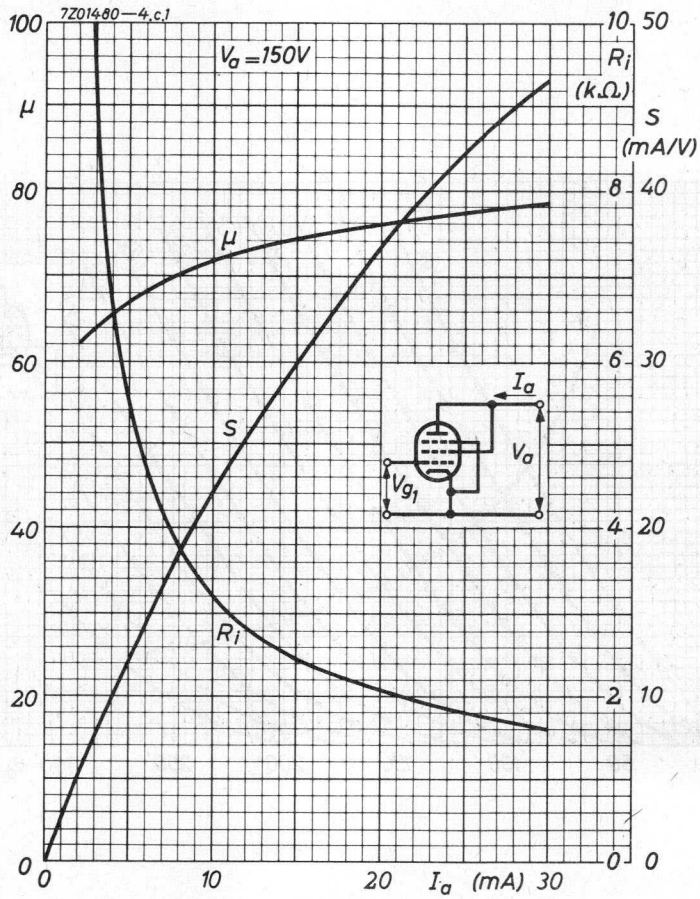

POWER PENTODE


Pentode intended for use as power amplifier.

QUICK REFERENCE DATA	
Life test	500 hours
Base	Subminiature
Heating	Direct Battery supply
Heater voltage	V_f 1.25 V
Heater current	I_f 25 mA

DIMENSIONS AND CONNECTIONS

Dimensions in mm

Base: Subminiature

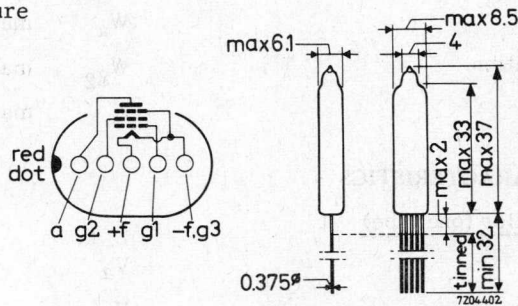

Leads should not be soldered nearer than 5 mm to the seal

Leads should not be bent nearer than 1.5 mm to the seal.

CHARACTERISTICS

Anode voltage	V_a	22.5 V
Grid No.2 voltage	V_{g2}	22.5 V
Anode current	I_a	600 μA
Grid No.2 current	I_{g2}	150 μA
Grid No.1 voltage	$-V_{g1}$	2.2 V
Mutual conductance	S	430 $\mu A/V$
Internal resistance	R_i	100 $k\Omega$
Amplification factor	μ_{g2g1}	5

CAPACITANCE

Anode to grid No.1	C_{ag1}	max. 0.15 pF
--------------------	-----------	--------------

LIMITING VALUES (Design centre rating system)

Anode voltage	V_a	max. 45 V
Grid No.2 voltage	V_{g2}	max. 45 V
Anode dissipation	W_a	max. 100 mW
Grid No.2 dissipation	W_{g2}	max. 25 mW
Cathode current	I_k	max. 2.3 mA

OPERATING CHARACTERISTICS

As class A amplifier (one tube)

Anode voltage	V_a	22.5 V
Grid No.2 voltage	V_{g2}	22.5 V
Grid No.1 voltage	$-V_{g1}$	2.2 V
Anode resistance	$R_{a\sim}$	37.5 $k\Omega$
Anode current ($V_i = \text{zero}$)	I_a	600 μA
Grid No.1 current ($V_i = \text{zero}$)	I_{g2}	150 μA
Input voltage	V_i	1.3 V_{RMS}
Output power	W_o	5 mW
Distortion	d	10 %


S.Q. INDICATOR TUBE

Special quality indicator tube designed for use in transistorized computers.

QUICK REFERENCE DATA	
Life test	10 000 hours
Mechanical quality	Shock and vibration resistant
Base	Subminiature
Heating	Direct
	A.C. or D.C.; parallel supply
Heater voltage	V_f 1.0 V
Heater current	I_f 30 mA

DIMENSIONS AND CONNECTIONS

Dimensions in mm

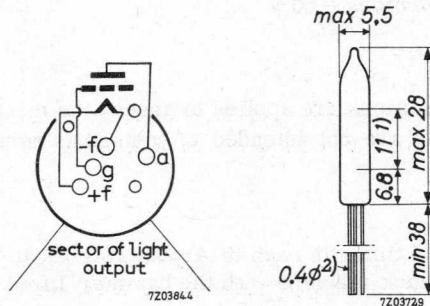

Connections should not be soldered nearer than 5 mm to the seal.

Leads should not be bent nearer than 1.5 mm to the seal.

1) Length of the light bar.

2) Leads without letter-indication are cut at the outer surface of the bottom.

7Z2 5409

CHARACTERISTICS

Column I Nominal value or setting of the tube

II Range values for equipment design: Initial spread

III Range values for equipment design: End of life

		I	II	III	
Heater voltage	V_f	1.0			V
Heater current	I_f	30	24 - 36		mA
Anode voltage	V_a	50			V
Grid resistor	R_g	100			k Ω
Grid supply voltage at maximum light output ¹⁾	V_{bg}	0			V
Anode current	I_a	585	430 - 740	min. 250	μ A
Grid supply voltage at zero light output ²⁾	V_{bg}	-3			V
Anode current	I_a		max. 5		μ A
<u>Insulation resistance between two electrodes</u>	R_{ins}		min. 100		M Ω

Voltage between electrodes = 50 V

SHOCK RESISTANCE

The following test conditions are applied to assess the mechanical quality of the tube. These conditions are not intended to be used as normal operating conditions.

Shock

The tube is subjected 5 times in each of 4 positions to an acceleration of 500 g supplied by an NRL shock machine with the hammer lifted over an angle of 30°.

LIFE

Production samples are tested to be within the end of life values (column III) under the following conditions during 10 000 hours:

Heater voltage	V_f	1.0 V_{RMS}
Anode voltage	V_a	50 V
Grid supply voltage	V_{bg}	0 V ¹⁾
<u>Grid resistor</u>	R_g	100 k Ω

¹⁾²⁾ See page 3.

7Z2 7208

LIMITING VALUES (Absolute max. rating system)

Anode voltage	V_{a0}	max.	100 V
Anode voltage	V_a	max.	65 V
Anode current	I_a	max.	750 μ A
Grid supply voltage	V_{bg}	max.	0 V
Grid negative voltage	$-V_g$	max.	50 V
Grid resistor	R_g	max.	1.0 $M\Omega$
		min.	0.1 $M\Omega$

Heater voltage: The average heater voltage should be 1.0 V.

Variations of the heater voltage exceeding the range of 0.95 V to 1.05 V will shorten the tube life.

The tolerance of heater current (column II) should be taken into account.


¹⁾ Voltage with respect to the midtap of the filament transformer.

²⁾ Voltage with respect to the midtap of the filament transformer.


At a residual current of a few μ A the light output is so low that it cannot be measured. Depending on the electrode configuration the residual current may be concentrated on one spot which then may be visible when the tube is held in dark surroundings. Also in such cases no mistake seems possible in the read-out of the on and off positions.

7Z2 7209

7Z03731-4.18.cfj

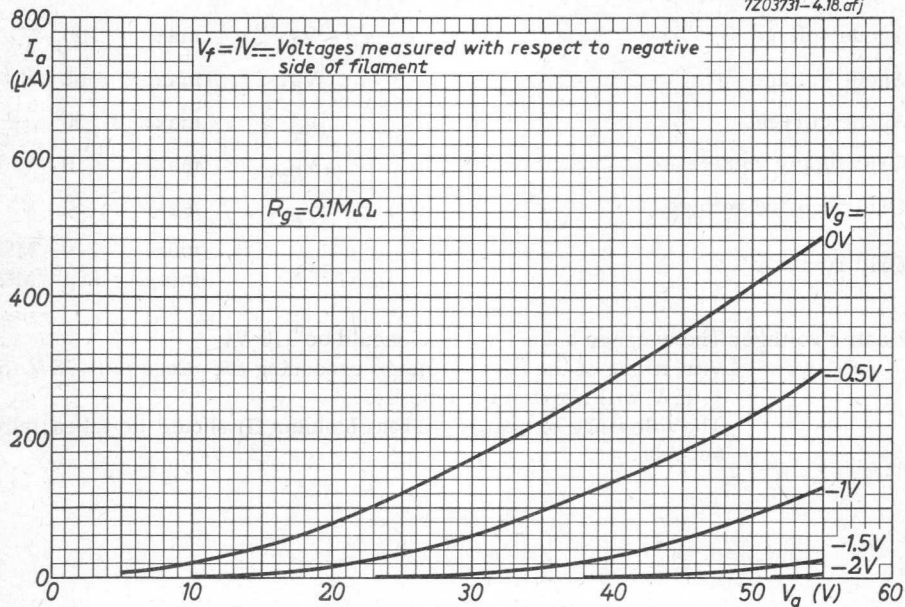

7Z03732-4.18.cfj

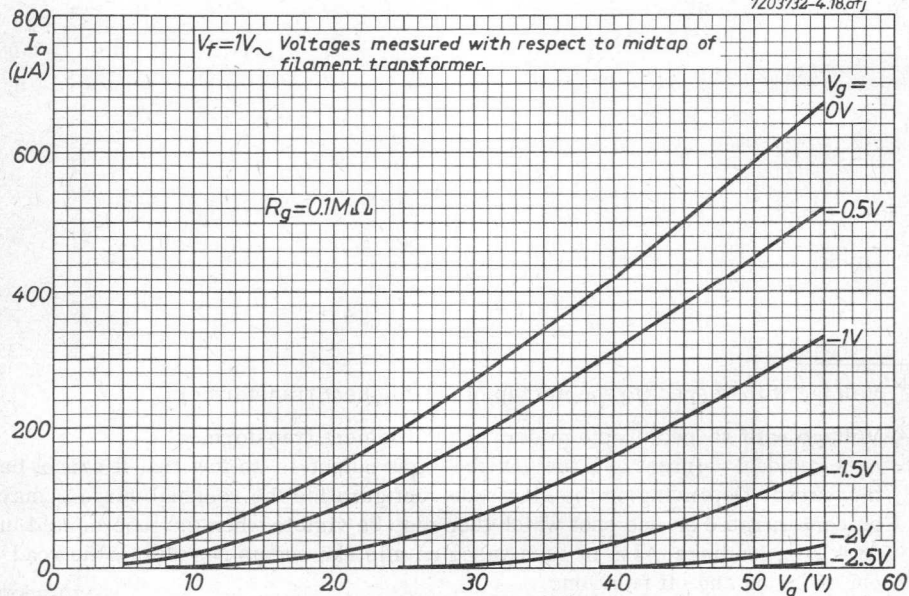

S.Q. TUBE

Special quality decade counter tube.




QUICK REFERENCE DATA

Life test	10 000 hours
Base	Duodecal (12 pins)
Heating	Indirect A.C. or D.C.; Series or parallel supply
Heater voltage	V_f 6.3 V
Heater current	I_f 300 mA

DIMENSIONS AND CONNECTIONS

Dimensions in mm

Base: Duodecal



APPLICATION DIRECTIONS

Mounting

Any mounting position, except horizontal with screen down, is permitted.

Sensitivity to magnetic fields

To prevent interference by magnetic fields the flux density of these fields should not exceed 2×10^{-4} Wb/m² (= 2 Gauss) in any direction.

7Z2 7210

APPLICATION DIRECTIONS

Ambient illumination

To obtain a clear reading the ambient illumination should range from 40-400 lux measured with an illumination-meter placed in vertical position. This illumination range incorporates the best compromise between the visibility of the figures of the mask and the luminescent picture.

CHARACTERISTICS

Heater voltage	V_f	6.3 V
Heater current	I_f	300 mA

CAPACITANCES

Anode No.2 to all other electrodes	C_{a2}/R	10.5 pF
Deflection plate to all other electrodes	C_D/R	3.5 pF
Deflection plate to all other electrodes	$C_{D'}/R$	3.8 pF
Anode No.1 to all other electrodes	C_{a1}/R	4.9 pF
Grid No.1 to all other electrodes	C_{g1}/R	6.8 pF
Grid No.4 to all other electrodes	C_{g4}/R	7.7 pF

OPERATING CHARACTERISTICS

Column I Nominal value

II Permitted values of spread and variation

		I	II	
Supply voltage	V_b	300		V
Grid No.1 supply voltage	V_{bg1}	11.9	± 0.15	V
Grid No.2 supply voltage	V_{bg2}	300		V
Deflection plate supply voltage	V_D	156	± 1.5	V
Luminescent screen voltage	V_l	300		V
Cathode current	I_k	0.95		mA
Grid No.2 current	I_{g2}	0.1		mA
Cathode resistor	R_k	15	$\pm 1\%$	k Ω
Grid No.4 resistor	R_{g4}	47	$\pm 5\%$	k Ω
Anode No.1 resistor	R_{a1}	39	$\pm 10\%$	k Ω
Anode No.2 resistor	R_{a2}	1	$\pm 1\%$	M Ω

7Z2 6274

R ₁	68 kΩ ± 1%	R ₁₀	0.56 MΩ ± 10%	C ₁	1)
R ₂	68 kΩ ± 1%	R ₁₁	5.6 kΩ ± 10%	C ₂	0.39 μF ± 20%
R ₃	5.6 kΩ ± 1%	R ₁₂	39 kΩ ± 2%	C ₃	0.15 μF ± 20%
R ₄	15 kΩ ± 2%	R ₁₃	4.7 kΩ ± 2%	C ₄	6800 pF ± 10%
R ₅	39 kΩ ± 10%	R ₁₄	2.7 kΩ ± 2%	C ₅	220 pF ± 10%
R ₆	15 kΩ ± 1%	R ₁₅	1 kΩ ± 1%	C ₆	68 pF ± 2%
R ₇	0.33 MΩ ± 10%	R ₁₆	3.3 kΩ ± 2%	C ₇	680 pF ± 5%
R ₈	47 kΩ ± 5%	R ₁₇	0.15 MΩ ± 2%	C ₈	68 pF ± 2%
R ₉	1 MΩ ± 1%				

1. Connected to the preceding E90CC pulse shaper ($C_1 = 6800 \text{ pF} \pm 10\%$) or the preceding E90CC interstage pulse shaper ($C_1 = 680 \text{ pF} \pm 5\%$).
2. Connected to deflection plate D of next counter tube.
3. This parasitic capacitance should be reduced to the minimum by keeping the wiring as short as possible.

LIMITING VALUE of supply voltage V_b (See operating characteristics):

$$V_b = \text{max. } 400 \text{ V}$$

S.Q. TUBE



Special quality pentode designed for use as wide band output tube.

QUICK REFERENCE DATA	
Life test	10 000 hours
Low interface resistance	
Mechanical quality	Shock and vibration resistant
Base	Magnoval. Gold plated pins
Heating	Indirect A.C. or D.C.; Parallel supply
Heater voltage	V_f 6.3 V $\pm 5\%$
Heater current	I_f 600 mA
Anode current	I_a 50 mA
Mutual conductance	S 45 mA/V

DIMENSIONS AND CONNECTIONS

Dimensions in mm

Base: Magnoval

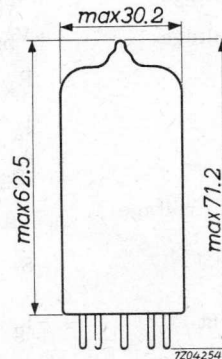

7Z2 7229

CHARACTERISTICS

Column I Nominal value or setting of the tube

II Range values for equipment design: Initial spread

III Range values for equipment design: End of life

		I	II	III	
Heater voltage	V_f	6.3			V
Heater current	I_f	600			mA
Anode voltage	V_a	125			V
Grid No.3 voltage	V_{g3}	0			V
Grid No.2 voltage	V_{g2}	125			V
Grid No.1 voltage	$-V_{g1}$	3			V
Anode current	I_a	50			mA
Grid No.2 current	I_{g2}	5.5			mA
Mutual conductance	S	45			mA/V
Internal resistance	R_i	20			k Ω
Amplification factor	μ_{g2g1}	30			
Input resistance	R_{g1}	1			k Ω
Frequency = 50 MHz					
Anode supply voltage	V_{ba}	140			V
Grid No.3 voltage	V_{g3}	0			V
Grid No.2 supply voltage	V_{bg2}	140			V
Grid No.1 supply voltage	$+V_{bg1}$	12			V
Cathode resistor	R_k	270			Ω
Anode current	I_a	50	48 - 52		mA
Grid No.2 current	I_{g2}	5.5	4.5 - 6.5		mA
Grid No.1 to cathode voltage	$-V_{g1k}$	3.0	2.3 - 3.7	1.8	V
Mutual conductance	S	45	38 - 52	$\Delta S =$ max. 25%	mA/V
Negative grid current	$-I_g$			2	μA

CHARACTERISTICS (continued)

As triode (grid No.2 connected to anode)

		I	
Anode voltage	V_a	125	V
Grid No.1 voltage	$-V_{g1}$	3	V
Anode current	I_a	55.5	mA
Mutual conductance	S	50	mA/V
Internal resistance	R_i	600	Ω
Amplification factor	μ	30	

CAPACITANCES

Pentode connected


		I		II		
		With shield		Without shield		
Anode to grid No.3, grid No.2, cathode and heater	C_{a/g_3g_2kf}	6.5	5.8- 7.2	4.0	3.6- 4.4	pF
Grid No.1 to grid No.3, grid No.2, cathode and heater	C_{g_1/g_3g_2kf}	18	15- 21	18	15- 20	pF
Grid No.1 to grid No.3, grid No.2, cathode and heater	C_{g_1/g_3g_2kf}	28		28		pF
Cathode current $I_k = 55.5 \text{ mA}$						
Anode to grid No.1	C_{ag_1}	80	max. 120	110	max. 150	mpF

Triode connected (grid No.2 connected to anode)

Anode to grid No.3, cathode and heater	C_{a/g_3kf}	10.5	9.4-11.6	7.8	7.0- 8.6	pF
Grid No.1 to grid No.3, cathode and heater	C_{g_1/g_3kf}	11.8	10-13.6	11.8	10-13.6	pF
Anode to grid No.1	C_{ag_1}	6.2	5.5- 6.9	6.3	5.6- 7.0	pF
Cathode to heater	C_{kf}	6.0		6.0		pF


OPERATING CONDITIONS



Anode supply voltage	V_{ba}	140 V
Grid No.2 supply voltage	V_{bg_2}	140 V
Grid No.3 voltage	V_{g_3}	0 V
Grid No.1 supply voltage	$+V_{bg_1}$	12 V
Cathode resistor	R_k	270 Ω
Anode current	I_a	50 mA
Grid No.2 current	I_{g_2}	5.5 mA
Mutual conductance	S	45 mA/V

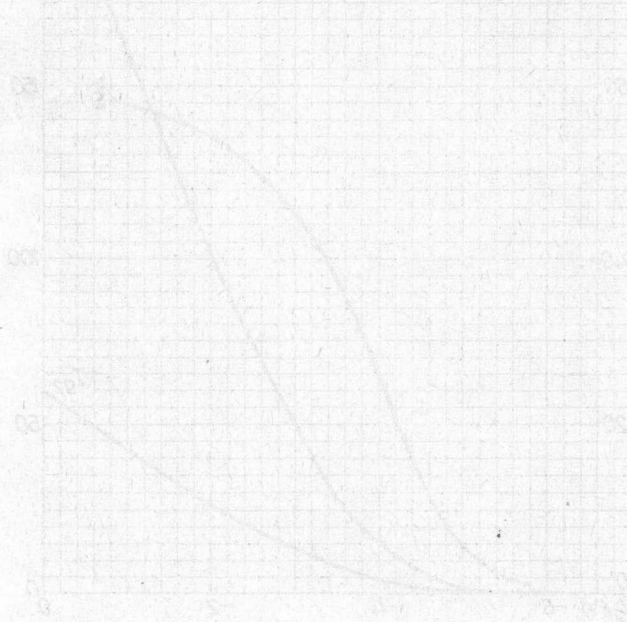


7200760

E55L 2-11-1961

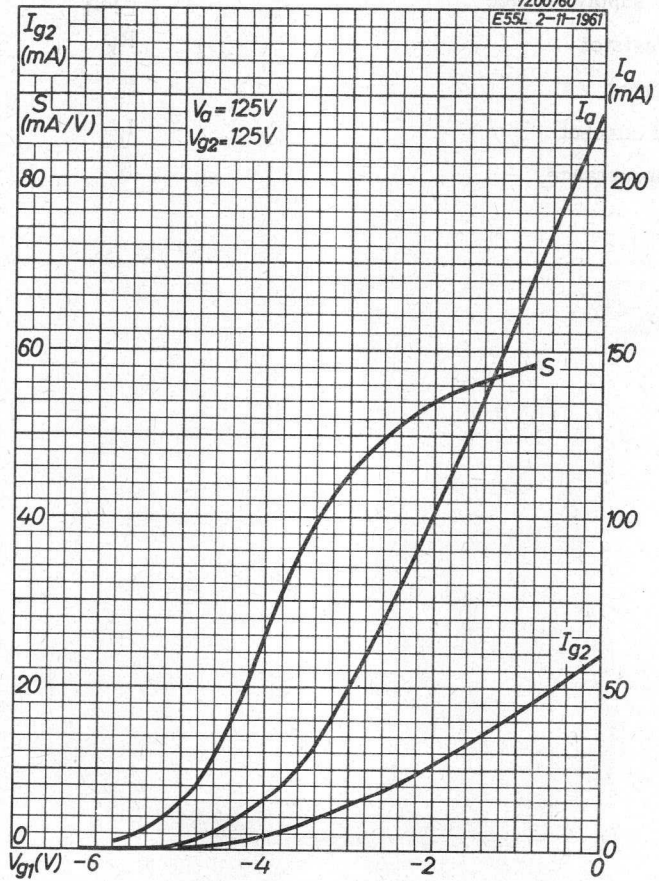


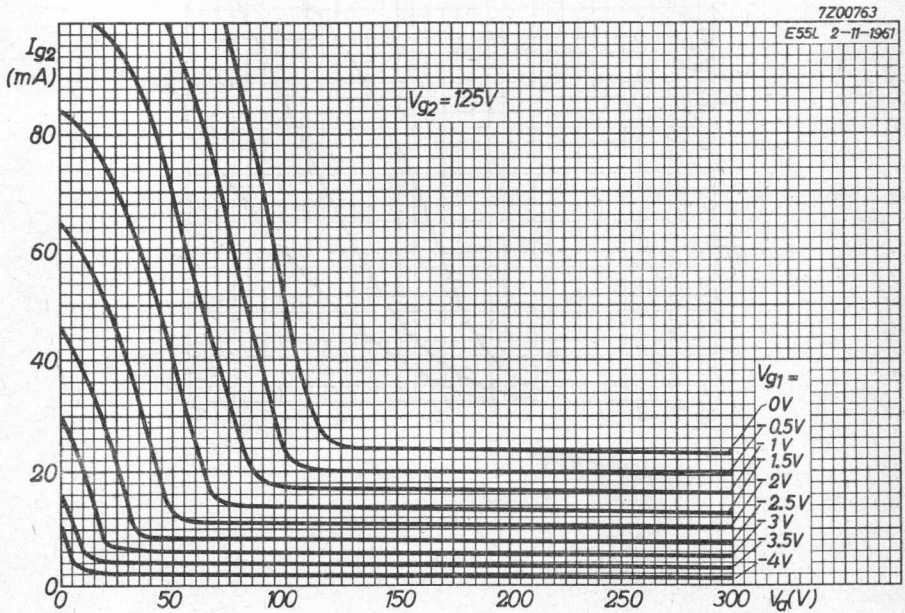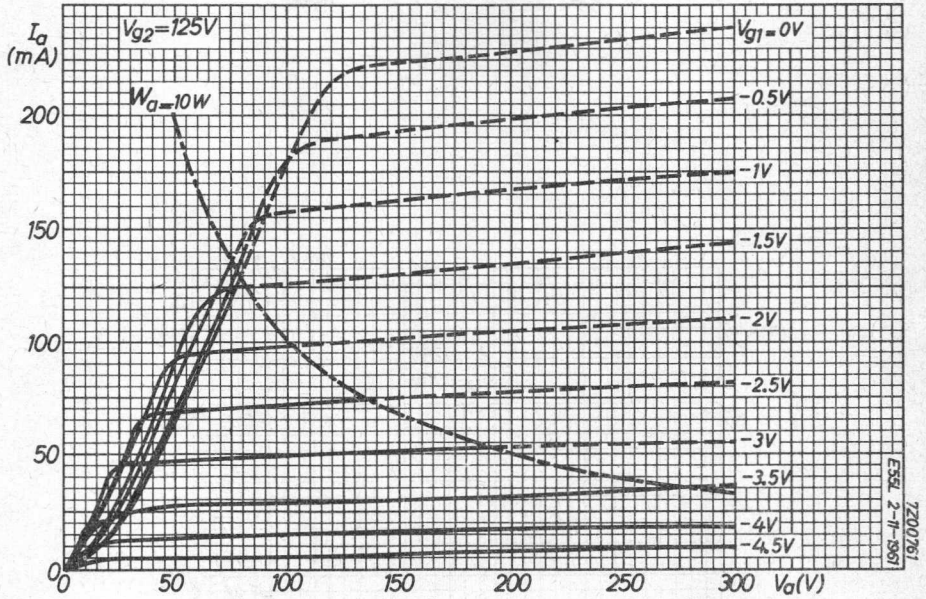


7Z044-32-5.ee.12

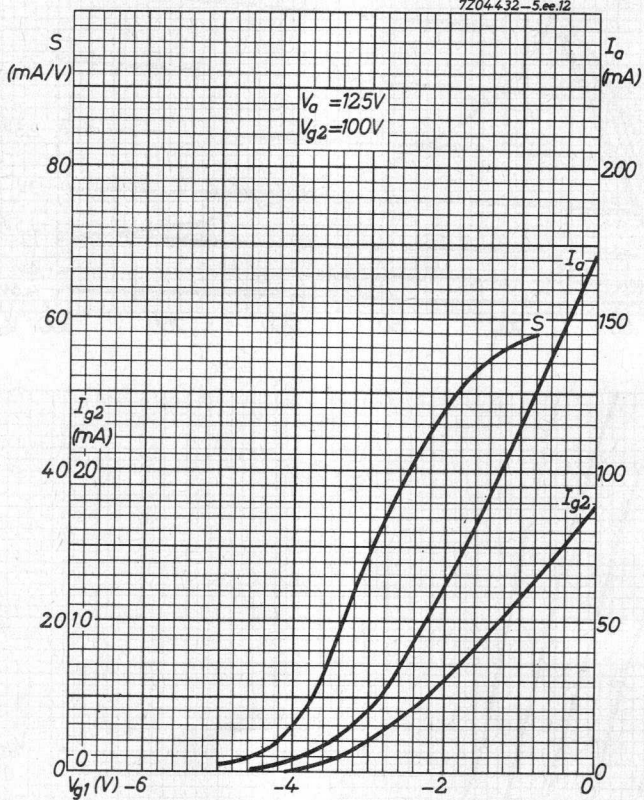


7204434-5.ee.12

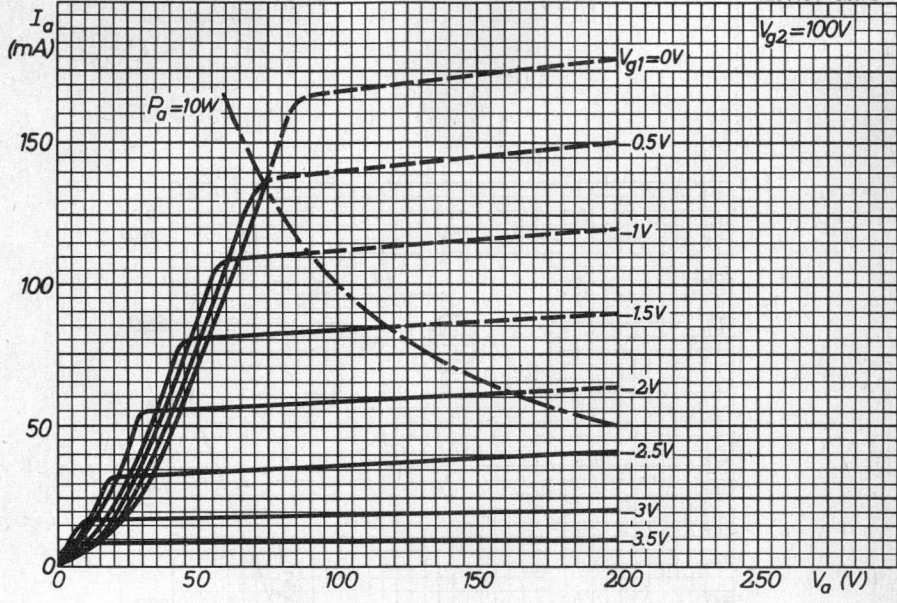


7204433-5.ee.12

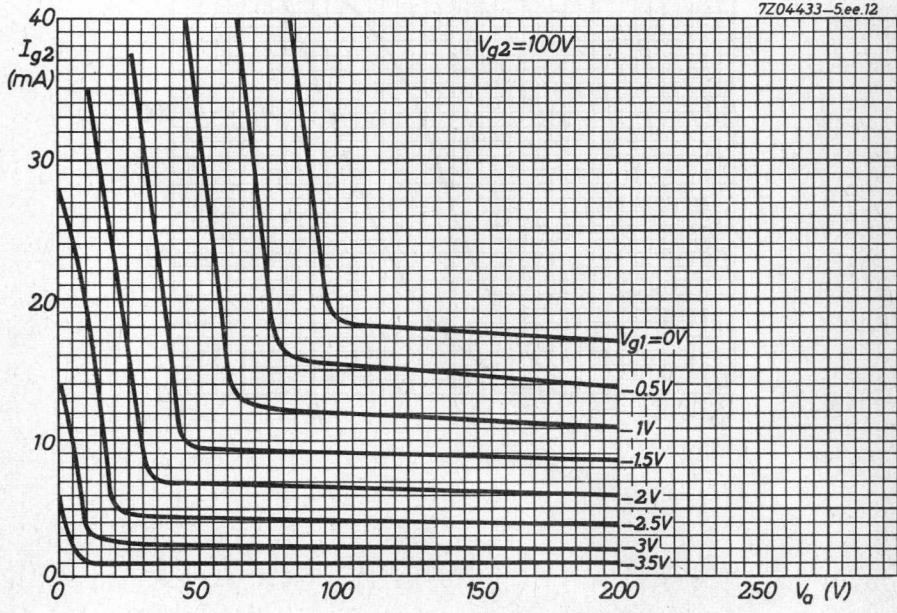



7Z00762
E55L 2-11-1961

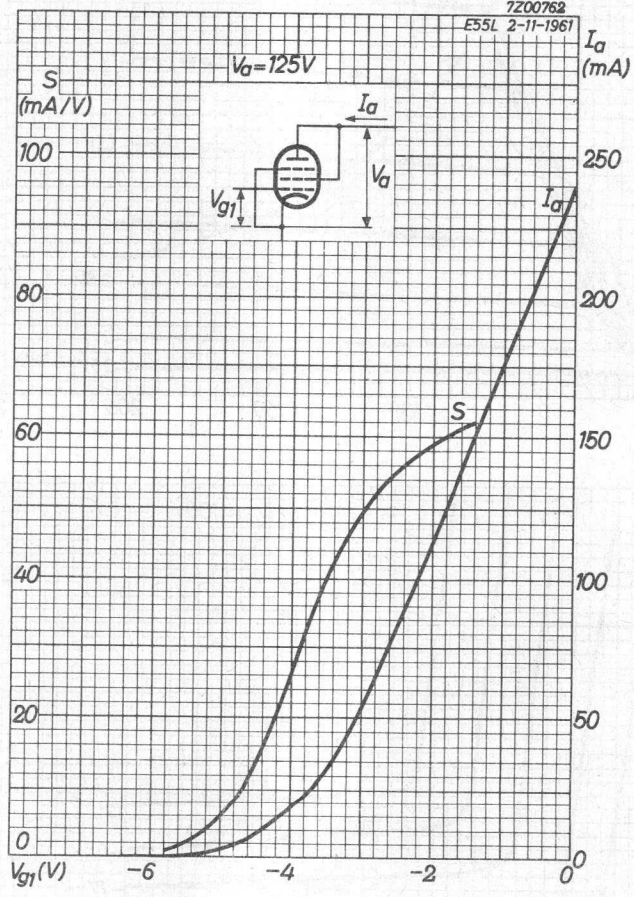


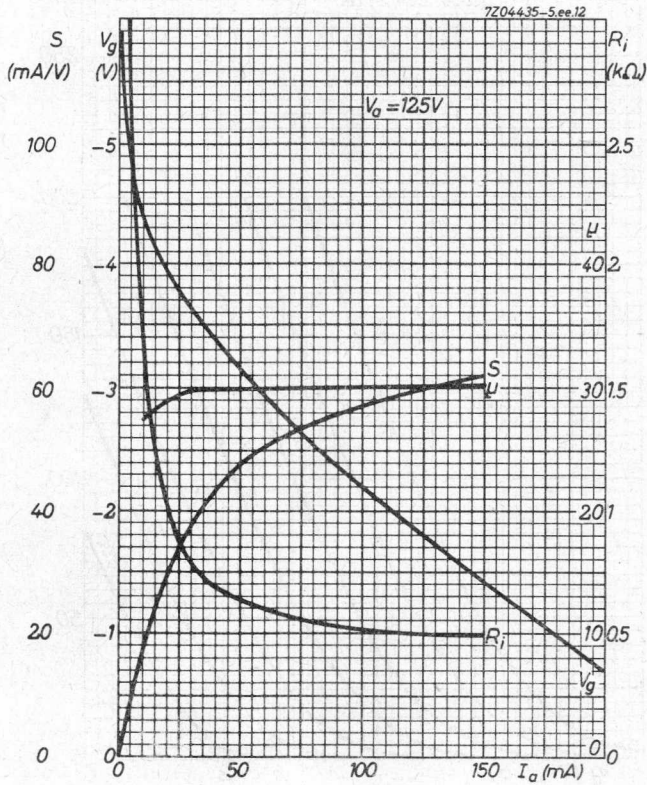

7Z06713-5.ee12

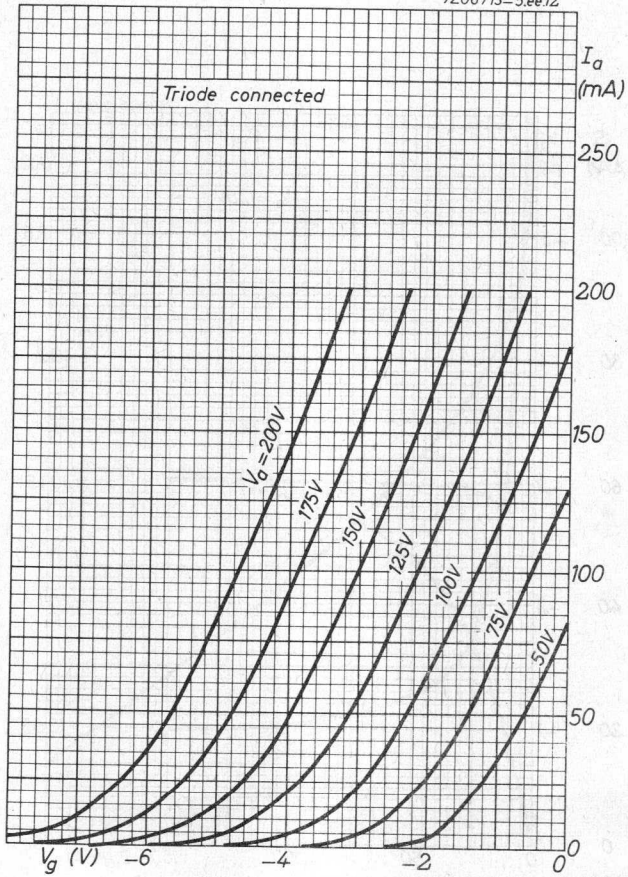

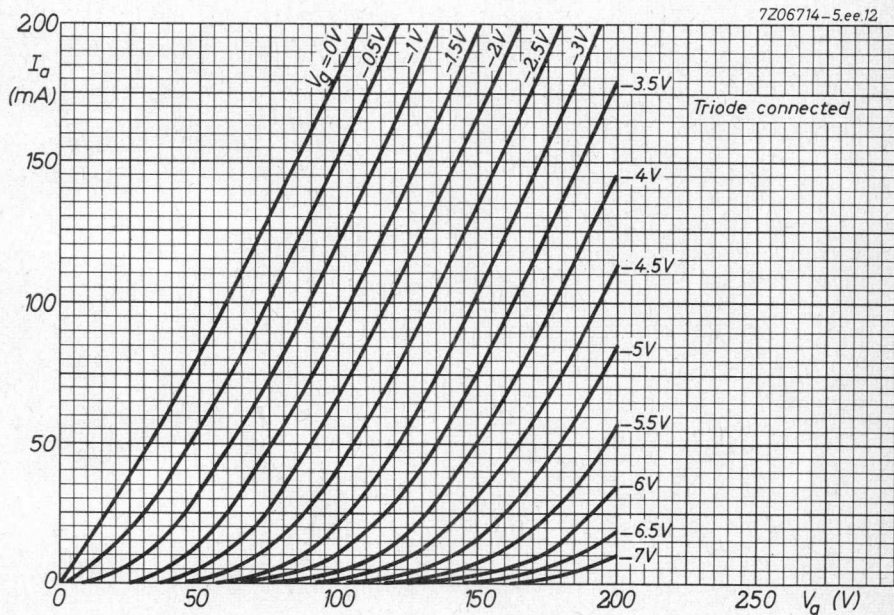

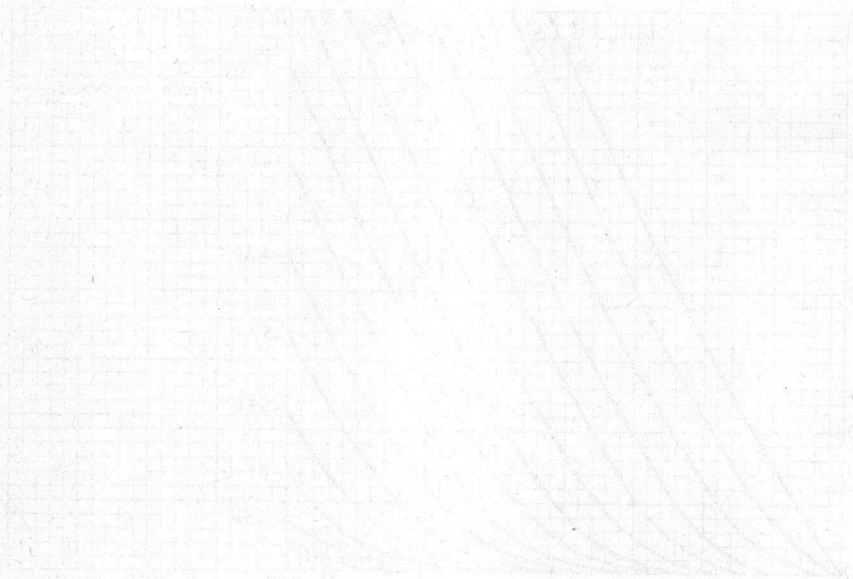

S.Q. TUBE

Special quality double triode designed for use as A.F. and D.C. amplifier.

QUICK REFERENCE DATA

Life test	10 000 hours
	Low interface resistance after long periods of operation under cut-off conditions
Mechanical quality	Shock and vibration resistant
Base	Noval. Gold plated pins
Heating	Indirect A.C. or D.C. Series or parallel supply
Heater voltage	V_f 12.6 6.3 V
Heater current	I_f 0.3 0.6 A
Anode voltage	V_a 250 V
Grid voltage	V_g -5.5 V
Mutual conductance	S 2.7 mA/V

DIMENSIONS AND CONNECTIONS.

Dimensions in mm

Base: Noval

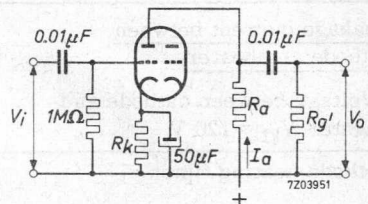
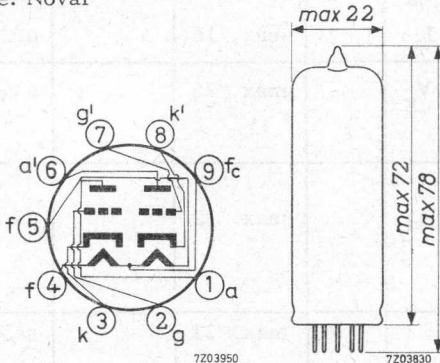


Fig. 1

7Z2 7233

CHARACTERISTICS

Column I Nominal value or setting of the tube

II Range values for equipment design: Initial spread

III Range values for equipment design: End of life

		I	II	III	
Heater voltage	V_f	12.6			V
Heater current	I_f	300	285 - 315		mA
Anode voltage	V_a	250			V
Cathode resistor	R_k	920			Ω
Anode current	I_a	6.0	5.4 - 6.6	min. 4.3	mA
Transconductance	S	2.7	2.2 - 3.2	min. 1.8	mA/V
Amplification factor	μ	27			
Internal resistance	R_i	10	min. 7		k Ω
Negative grid current	$-I_g$		max. 0.5	max. 1.0	μ A
<u>Difference in anode current of two sections</u>	$ I_a - I_a' $		max. 3.0		mA
Anode voltage	V_a	250			V
Negative grid voltage	$-V_g$	5.5			V
<u>Cut-off voltage</u>	$-V_g$	17			V
Anode voltage	V_a	250			V
Anode resistor	R_a	1			M Ω
Anode current	I_a		max. 15		μ A
<u>Hum voltage</u>	V_g		max. 75		μ V _{RMS}
Grid resistor $R_g = 0.5$ M Ω					
<u>Leakage current between cathode and heater</u>	I_{kf}		max. 12		μ A
Voltage between cathode and heater $V_{kf} = 120$ V					
Cathode heating time		16	max. 23		sec
Cathode cooling time			min. 13		sec

CAPACITANCES

		External screen		Without external screen		
		I	II	I	II	
Anode to cathode and heater	$C_{a/kf}$	3.5	2.8 - 4.2	0.45		pF
Grid to cathode and heater	$C_{g/kf}$	2.6	1.9 - 3.3	2.4		pF
Anode to grid	C_{ag}	3.0	2.4 - 3.6	3.1		pF
Grid to heater	C_{gf}		max. 0.23		max. 0.23	pF
Cathode to heater	C_{kf}	4.8		4.8		pF
Anode to cathode and heater	$C_{a'/k'f}$	3.0	2.3 - 3.7	0.55		pF
Grid to cathode and heater	$C_{g'/k'f}$	2.6	1.9 - 3.3	2.4		pF
Anode to grid	$C_{a'g'}$	3.0	2.4 - 3.6	3.0		pF
Grid to heater	$C_{g'f}$		max. 0.23		max. 0.23	pF
Cathode to heater	$C_{k'f}$	4.8		4.8		pF
Anode to anode other section	$C_{aa'}$	1.3	0.9 - 1.7	1.45		pF
Grid to grid other section	$C_{gg'}$		max. 13		max. 13	mpF
Anode to grid other section	$C_{ag'}$		max. 0.1		max. 0.1	pF
Grid to anode other section	$C_{ga'}$		max. 65		max. 65	mpF

SHOCK AND VIBRATION RESISTANCE

The following test conditions are applied to assess the mechanical quality of the tube. These conditions are not intended to be used as normal operating conditions.

Shock

The tube is subjected 5 times in each of 4 positions to an acceleration of 500 g supplied by an NRL shock machine with the hammer lifted over an angle of 30°.

Vibration

The tube is subjected during 32 hours in each of 3 positions to a vibration frequency of 50 Hz with an acceleration of 2.5 g.

LIFE

Production samples are tested to be within the end of life values (column III) under the following conditions during 10 000 hours.

Heater voltage	V_f	6.3	V
Anode voltage	V_a	250	V
Cathode resistor	R_k	920	Ω

LIMITING VALUES (Absolute max. rating system)

Anode voltage	V_{a0}	max.	600	V
	V_a	max.	300	V
Anode dissipation	W_a	max.	2	W
Cathode current	I_k	max.	12	mA
Cathode current peak value	I_{kp}	max.	150	mA
Grid current peak value max.			30	mA
Duty factor max.			0.005	
Pulse duration max.			10	μs
Cathode current peak value	I_{kp}	max.	30	mA
Grid current peak value max.			2	mA
Duty factor max.			0.2	
Pulse duration max.			400	μs
Grid voltage	$-V_g$	max.	200	V
Grid current, average value	I_g	max.	0.3	mA
peak value	I_{gp}	max.	30	mA
Voltage between cathode and heater	V_{kf}	max.	120	V
Bulb temperature	t_{bulb}	max.	170	$^{\circ}C$
Grid resistor (automatic bias)	R_g	max.	1	$M\Omega$
Grid resistor (fixed bias)	R_g	max.	0.5	$M\Omega$

Heater voltage. The average heater voltage should be 6.3 V or 12.6 V. Variations of the heater voltage exceeding the range of 6.0 V to 6.6 V or 12.0 to 13.2 V will shorten the tube life. The tolerance of heater current (column II) should be taken into account.


OPERATING CHARACTERISTICS


Resistance coupled A.F. amplifier. Fig.1 page 1


Anode supply voltage	V_{b_a}	200	250	300	350	400	V
Anode resistor	R_a	47	47	47	47	47	k Ω
Cathode resistor	R_k	1.2	1.2	1.2	1.2	1.2	k Ω
Grid resistor	$R_{g'}$	0.15	0.15	0.15	0.15	0.15	M Ω
Anode current	I_a	1.86	2.45	3.15	3.80	4.40	mA
Voltage gain	V_o/V_i	18.5	18.5	18.5	18.5	18.5	
Output voltage at $+I_g = 0.3 \mu A$	V_o	20	30	40	50	60	V _{RMS}
Total distortion ¹⁾	d_{tot}	3.3	3.8	4.0	4.1	4.2	%
Anode supply voltage	V_{b_a}	200	250	300	350	400	V
Anode resistor	R_a	100	100	100	100	100	k Ω
Cathode resistor	R_k	2.2	2.2	2.2	2.2	2.2	k Ω
Grid resistor	$R_{g'}$	0.33	0.33	0.33	0.33	0.33	M Ω
Anode current	I_a	1.00	1.30	1.65	1.95	2.30	mA
Voltage gain	V_o/V_i	20	20	20	20	20	
Output voltage at $+I_g = 0.3 \mu A$	V_o	22	32	42	52	63	V _{RMS}
Total distortion ¹⁾	d_{tot}	3.1	3.4	3.5	3.6	3.7	%
Anode supply voltage	V_{b_a}	200	250	300	350	400	V
Anode resistor	R_a	220	220	220	220	220	k Ω
Cathode resistor	R_k	3.9	3.9	3.9	3.9	3.9	k Ω
Grid resistor	$R_{g'}$	0.68	0.68	0.68	0.68	0.68	M Ω
Anode current	I_a	0.52	0.67	0.83	0.99	1.15	mA
Voltage gain	V_o/V_i	21	21	21	21	21	
Output voltage at $+I_g = 0.3 \mu A$	V_o	19	29	38	47	58	V _{RMS}
Total distortion ¹⁾	d_{tot}	2.3	2.6	3.0	3.1	3.2	%

¹⁾ At lower output voltages the distortion is proportionally lower.

7Z03953-5h.j.3.3

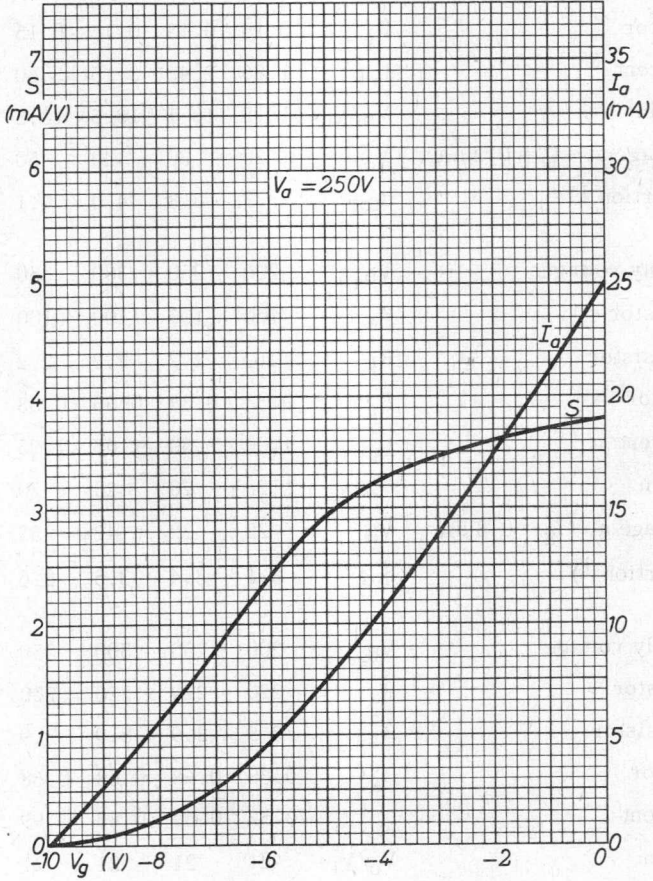

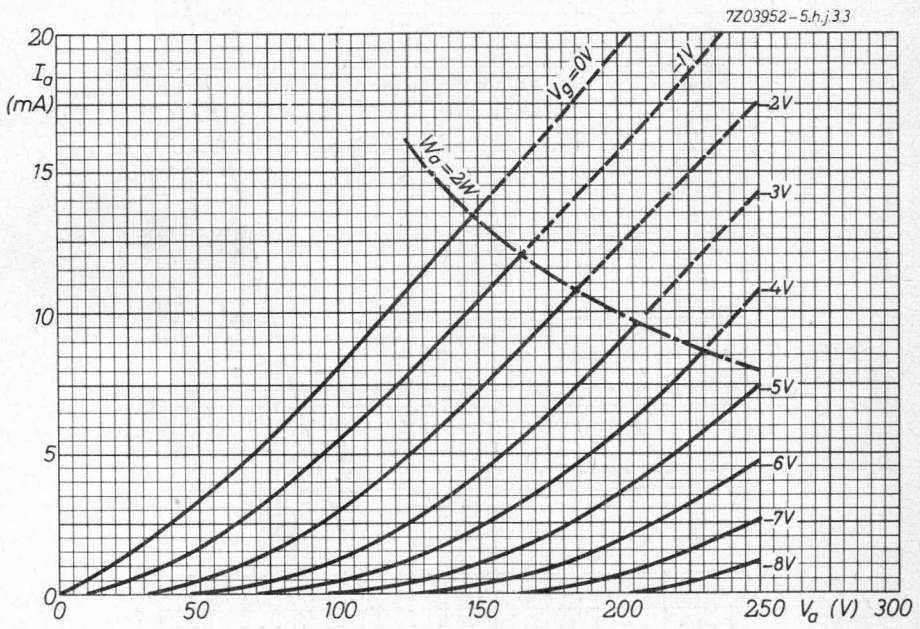

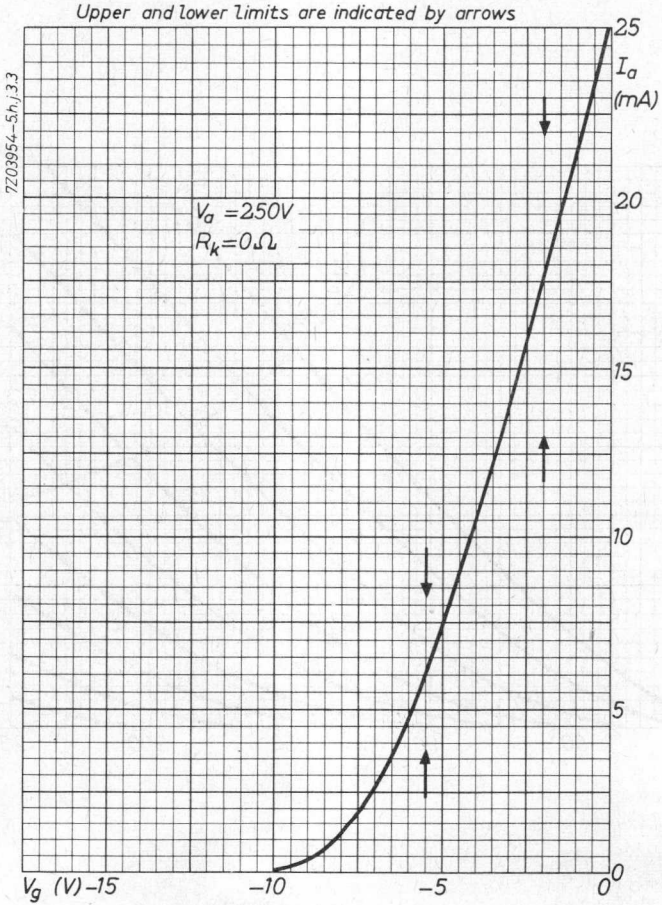

S.Q. TUBE

Special quality triode-pentode

The pentode section is designed for use as mixer and R.F. or A.F. amplifier. The triode section is designed for use as oscillator (max. freq. 300 MHz) multivibrator or blocking oscillator.



QUICK REFERENCE DATA

Life test	10 000 hours	
Low interface resistance		
Mechanical quality	Shock and vibration resistant	
Base	Noval. Gold plated pins	
Heating	Indirect A.C. or D.C.; parallel supply	
Heater voltage	V_f	6.3 V
Heater current	I_f	330 mA
Pentode: Anode current	I_a	10 mA
Mutual conductance	S	6.2 mA/V
Amplification factor	μ	40
Triode: Anode current	I_a	14 mA
Mutual conductance	S	5 mA/V
Amplification factor	μ	18

DIMENSIONS AND CONNECTIONS

Dimensions in mm

Base: Noval



7Z2 7238

CHARACTERISTICS

Column I Nominal value or setting of the tube

II Range values for equipment design: Initial spread

III Range values for equipment design: End of life

		I	II	III	
Heater voltage	V_f	6.3			V
Heater current	I_f	330	313 - 347		mA
<u>Pentode section</u>					
Anode supply voltage	V_{ba}	170			V
Grid No.2 supply voltage	V_{bg_2}	170			V
Cathode resistor	R_k	155			Ω
Anode current	I_a	10	7.5 - 12.5	min. 6	mA
Grid No.2 current	I_{g_2}	2.8	1.55 - 4.05		mA
Mutual conductance	S	6.2	5.2 - 7.2	min. 4.3	mA/V
Amplification factor grid No.2 to grid No.1	$\mu_{g_2g_1}$	40			
Internal resistance	R_i	0.4	min. 0.26		M Ω
Negative grid No.1 current	$-I_{g_1}$		max. 0.5	max. 1.0	μA
<u>Triode section</u>					
Anode supply voltage	V_{ba}	100			V
Cathode resistor	R_k	120			Ω
Anode current	I_a	14	10 - 18	min. 8.4	mA
Mutual conductance	S	5.0	4 - 6	min. 3.5	mA/V
Amplification factor	μ	18			
Negative grid current	$-I_g$		max. 0.5	max. 1.0	μA

CAPACITANCES Without external shieldPentode

		I	II	
Grid No.1 to grid No.2, grid No.3 cathode, heater and screen	C_{g_1/g_2g_3kfs}	5.6	5.2 - 6	pF
Anode to grid No.2, grid No.3 cathode, heater and screen	C_{a/g_2g_3kfs}	3.4	3 - 3.8	pF
Anode to grid No.1	C_{ag_1}		max. 25	mpF
Grid No.1 to heater	C_{g_1f}		max.0.16	pF

Triode

Grid to cathode (triode), cathode (pentode) grid No.3, heater and screen	C_{g/k_TkPg_3fs}	2.5	2.2 - 2.8	pF
Anode to cathode (triode), cathode (pentode) grid No.3, heater and screen	C_{a/k_TkPg_3fs}	1.5	1.2 - 1.8	pF
Anode to grid	C_{ag}	1.5	1.2 - 1.8	pF
Grid to heater	C_{gf}		max.0.22	pF

Pentode to triode

Anode (pentode) to anode (triode)	C_{aP-aT}		max.0.07	pF
Anode (pentode) to grid (triode)	C_{aP-gT}		max.0.02	pF
Grid No.1 (pentode) to anode (triode)	C_{g_1P-aT}		max.0.16	pF

MICROPHONY

The pentode section can be used without special precautions against microphony in circuits where an input voltage of more than 50 mV is required for an output of 50 mW.

SHOCK AND VIBRATION RESISTANCE

The following test conditions are applied to assess the mechanical quality of the tube. These conditions are not intended to be used as normal operating conditions.

Shock

The tube is subjected 5 times in each of 4 positions to an acceleration of 500 g supplied by an NRL shock machine with the hammer lifted over an angle of 30°.

Vibration

The tube is subjected during 32 hours in each of 3 positions to a vibration frequency of 50 Hz with an acceleration of 2.5 g.

7Z2 7240

LIFE

Production samples are tested to be within the end of life values (column III) under the following conditions during 10 000 hours.

Pentode section

$$V_{ba} = 170 \text{ V}$$

$$V_{bg_2} = 170 \text{ V}$$

$$R_k = 155 \ \Omega$$

Triode section

$$V_{ba} = 100 \text{ V}$$

$$R_k = 120 \ \Omega$$

LIMITING VALUES (Absolute max. rating system)

Pentode section

Anode voltage	V_{a_0}	max. 550 V
	V_a	max. 275 V
Anode dissipation	W_a	max. 2.15 W
Grid No.2 voltage	$V_{g_{20}}$	max. 550 V
Grid No.2 voltage:		
Cathode current > 10 mA	V_{g_2}	max. 200 V
Cathode current < 10 mA	V_{g_2}	max. 225 V
Grid No.2 dissipation:		
Anode dissipation > 1.2 W	W_{g_2}	max. 0.7 W
Anode dissipation < 1.2 W	W_{g_2}	max. 0.8 W
Grid No.1 dissipation	W_{g_1}	max. 0.1 W
Negative grid No.1 voltage	$-V_{g_1}$	max. 100 V
Cathode current	I_k	max. 18 mA
Voltage between cathode and heater	V_{kf}	max. 100 V
Grid resistor (fixed bias)	R_{g_1}	max. 0.5 M Ω

LIMITING VALUES (Absolute max. rating system) (continued)Triode section

Anode voltage	V_{a0}	max. 550 V
	V_a	max. 275 V
Anode dissipation	W_a	max. 1.75 W
Grid dissipation	W_g	max. 0.1 W
Grid, voltage, peak value	V_{gp}	max. 30 V
Duty factor max. 0.04		
Pulse duration max. 0.8 ms		
Grid voltage	$-V_g$	max. 100 V
Cathode current	I_k	max. 18 mA
Cathode current peak value	I_{kp}	max. 100 mA
Duty factor max. 0.04		
Pulse duration max. 0.8 ms		
Voltage between cathode and heater	V_{kf}	max. 100 V
Grid resistor (fixed bias)	R_g	max. 0.5 M Ω
Bulb temperature	t_{bulb}	max. 170 °C

Heater voltage: The average heater voltage should be 6.3 V.

Variation of the heater voltage exceeding the range of 6.0 V to 6.6 V will shorten the tube life.

The tolerance of heater current (column II) should be taken into account.

OPERATING CHARACTERISTICSPentode section as R.F. amplifier

Anode supply voltage	V_{ba}	170 V
Grid No.2 supply voltage	V_{bg_2}	170 V
Cathode resistor	R_k	155 Ω
Anode current	I_a	10 mA
Grid No.2 current	I_{g_2}	2.8 mA
Mutual conductance	S	6.2 mA/V
Amplification factor grid No.2 to grid No.1	$\mu_{g_2g_1}$	40
Internal resistance	R_i	0.4 $M\Omega$
Input resistance at 50 MHz	r_{g_1}	10 $k\Omega$
Equivalent noise resistance	R_{eq}	1.5 $k\Omega$

Pentode section as mixer


Anode supply voltage	V_{ba}	170 V
Grid No.2 supply voltage	V_{bg_2}	170 V
Grid No.1 resistor	R_{g_1}	0.1 $M\Omega$
Cathode resistor	R_k	330 Ω
Oscillator voltage	V_{osc}	3.5 V_{RMS}
Anode current	I_a	8 mA
Grid No.2 current	I_{g_2}	2.5 mA
Grid No.1 current	I_{g_1}	12 μA
Conversion conductance	S_c	2.4 mA/V
Internal resistance	R_i	0.5 $M\Omega$

Triode as oscillator


Operation in Colpitts circuit is recommended.

Operation in Hartley circuit is not recommended.


7Z03938-5.h.j.3.6

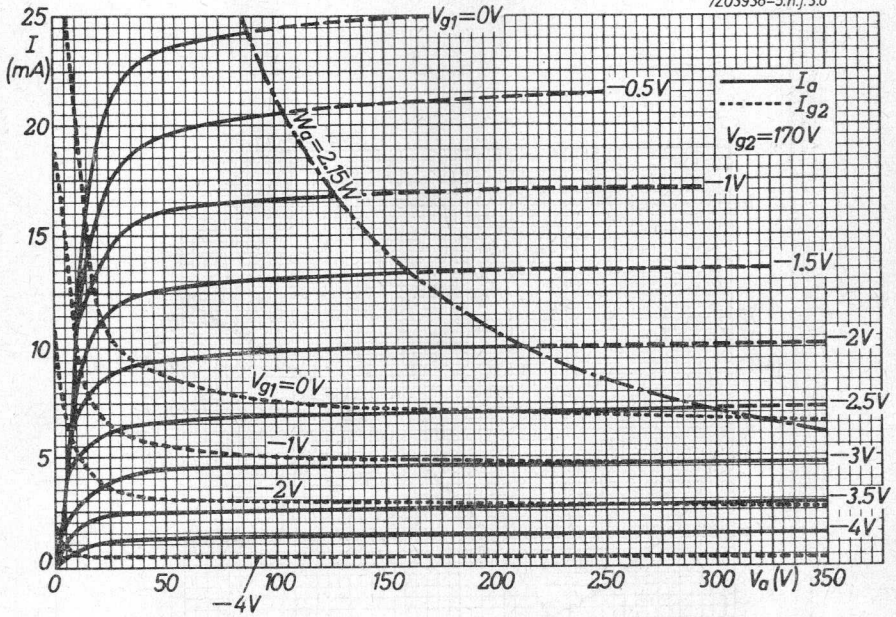


7Z03936-5.h.j.3.6

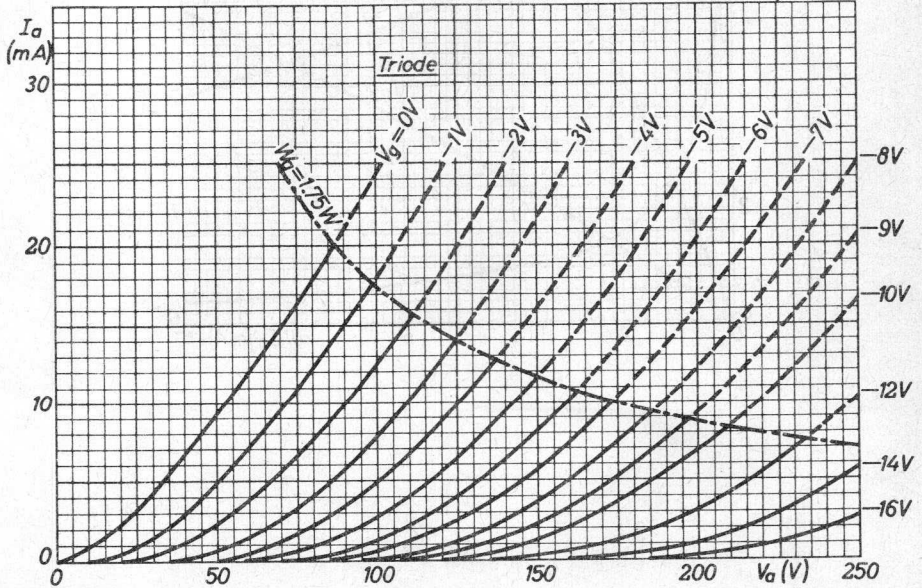

7203939-5.h.j.36

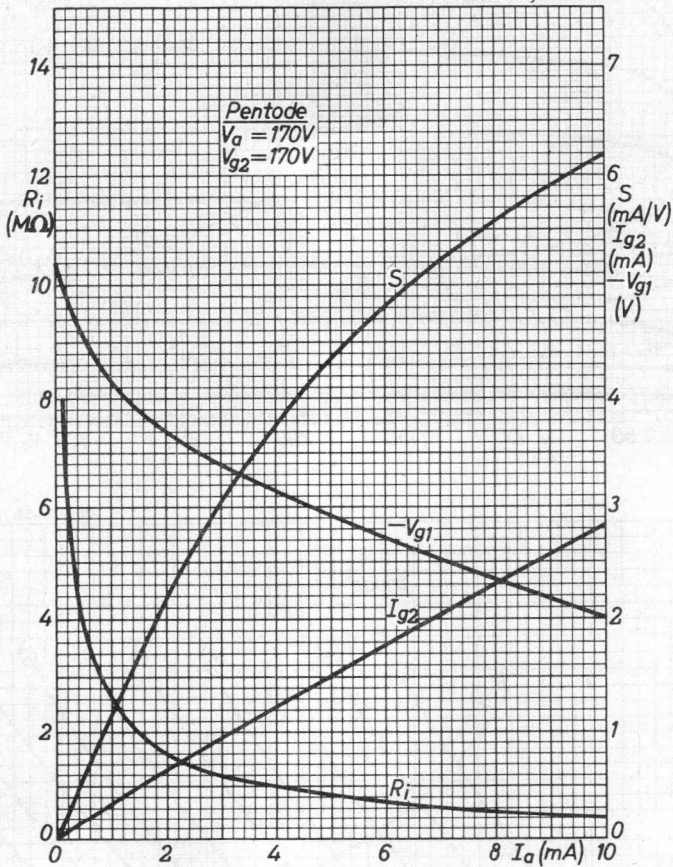


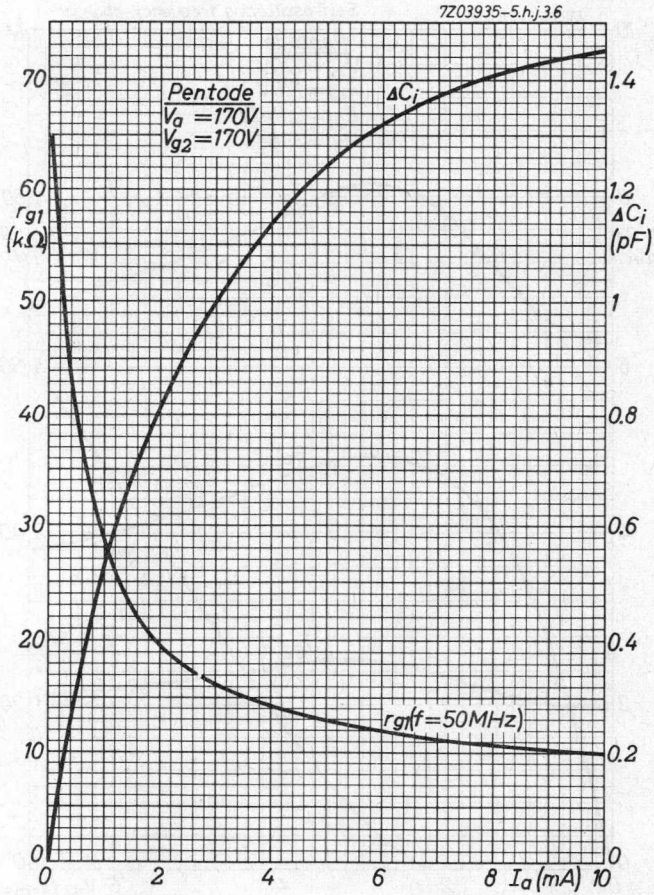


7Z03934-5h,j,36


Self-oscillating frequency-changer

Pentode
 $V_{b1} = 170V$
 $V_{b2} = 170V$
 $R_{g1} = 0.1M\Omega$
 $R_k = 330\Omega$

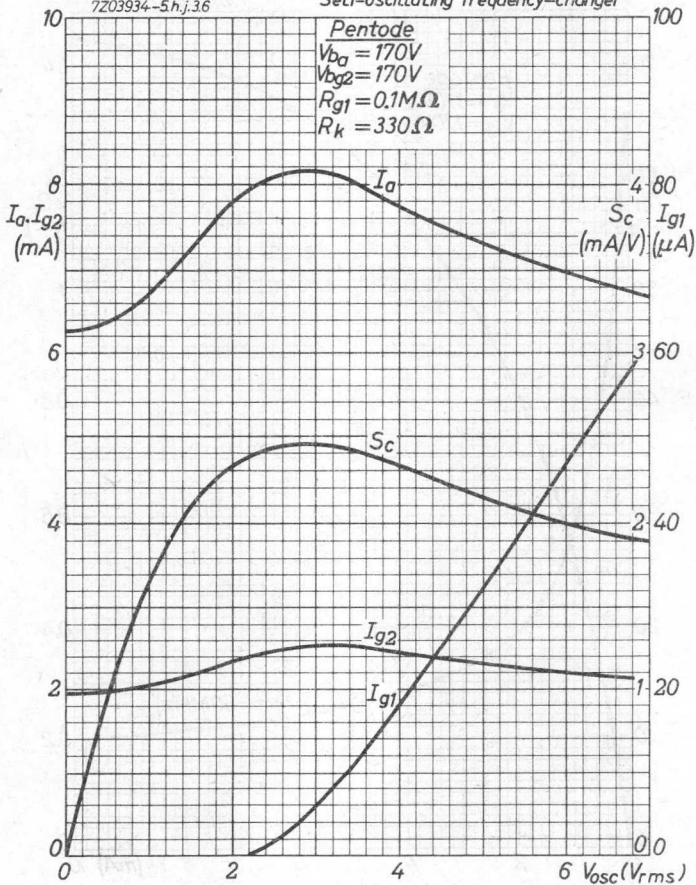

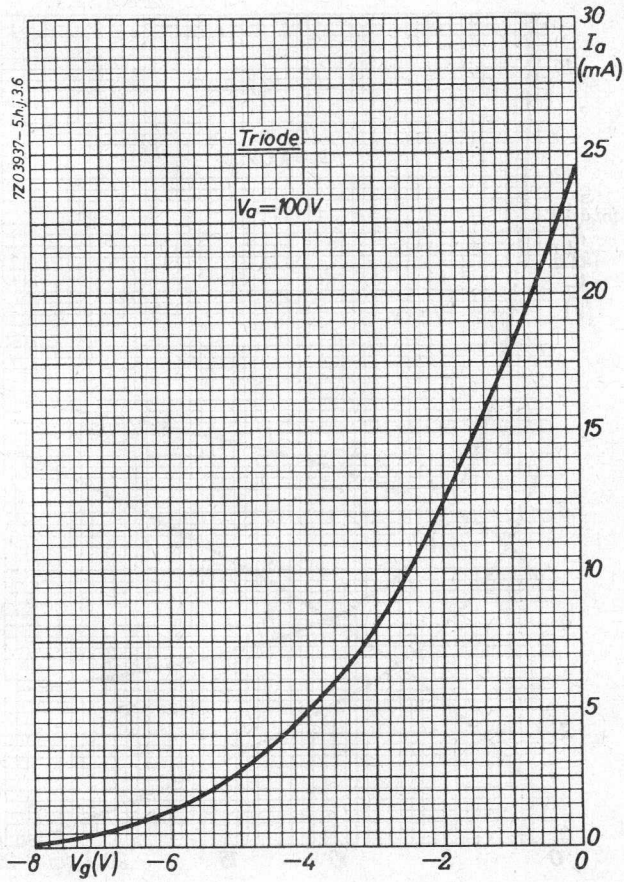

7Z03940-5.h.j.36

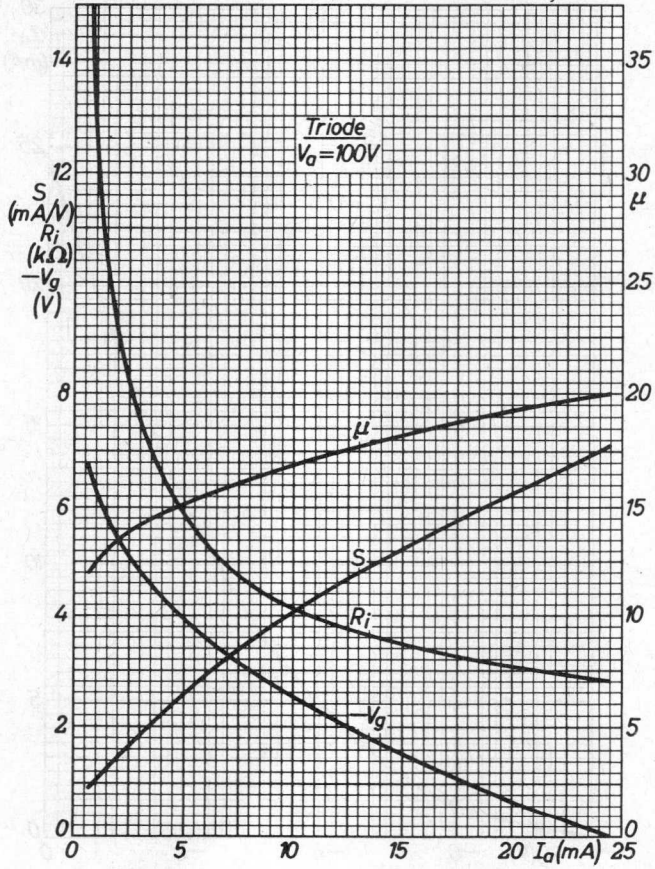

S.Q. TUBE

Special quality pentode designed for use as amplifier.


QUICK REFERENCE DATA

Life test	10 000 hours	
Low interface resistance		
Mechanical quality	Shock and vibration resistant	
Base	Noval. Gold plated pins	
Heating	Indirect A.C. or D.C. Series or parallel supply	
Heater voltage	V_f	6.3 V
Heater current	I_f	300 mA
Anode current	I_a	3 mA
Mutual conductance	S	1.85 mA/V
Equivalent noise resistance (A.F.)	R_{eq}	40 k Ω
Hum voltage	V_{g1}	max. 5 μV_{RMS}

DIMENSIONS AND CONNECTIONS

Dimensions in mm

Base: Noval

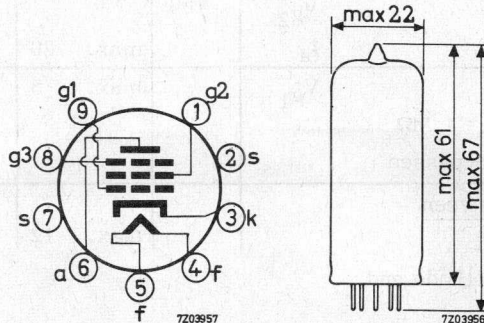

7Z2 6013

CHARACTERISTICS

Column I Nominal value or setting of the tube

II Range values for equipment design: Initial spread

III Range values for equipment design: End of life

		I	II	III	
Heater voltage	V_f	6.3			V
Heater current	I_f	300	285- 315		mA
Anode voltage	V_a	250			V
Grid No.3 voltage	V_{g3}	0			V
Grid No.2 voltage	V_{g2}	100			V
Cathode resistor	R_k	550			Ω
Anode current	I_a	3	2.5- 3.5	min. 2.0	mA
Grid No.2 current	I_{g2}	0.65	0.45-0.85	min.0.35	mA
Mutual conductance	S	1.85	1.5- 2.2	min. 1.2	mA/V
Internal resistance	R_i	1.5	min. 1.0		$M\Omega$
Amplification factor grid No.2 to grid No.1	μ_{g2g1}	25			
<u>Equivalent noise resistance</u> Frequency 0-10 kHz Grid No.1 resistor $R_{g1} = 0 \Omega$	R_{eq}		max. 40		$k\Omega$
<u>Negative grid No.1 current</u>	$-I_{g1}$		max. 0.1	max. 0.2	μA
<u>Cut off voltage</u>	$-V_{g1}$	7.5			V
Anode voltage	V_a	250			V
Grid No.3 voltage	V_{g3}	0			V
Grid No.2 voltage	V_{g2}	100			V
Anode current	I_a		max. 20		μA
<u>Hum voltage</u> Grid resistor $R_{g1} = 1 M\Omega$ Cathode resistor bypassed	V_{g1}		max. 5		μV_{RMS}
<u>Leakage current between cathode and heater</u> Voltage between cathode and heater $V_{kf} = 120 V$			max. 12		μA

CAPACITANCES With external shield

	I	II	
Anode to grid No.2, grid No.3, cathode and heater	C_{a/g_2g_3kf}	7.3	6.8-7.8 pF
Grid No.1 to grid No.2, grid No.3, cathode and heater	C_{g_1/g_2g_3kf}	5.0	4.5-5.5 pF
Anode to grid No.1	C_{ag_1}		max. 25 mpF
Grid No.1 to heater	C_{g_1f}		max. 2 mpF
Cathode to heater	C_{kf}	3.7	pF

SHOCK AND VIBRATION RESISTANCE

The following test conditions are applied to assess the mechanical quality of the tube. These conditions are not intended to be used as normal operating conditions.

Shock

The tube is subjected 5 times in each of 4 positions to an acceleration of 500 g supplied by an NRL shock machine with the hammer lifted over an angle of 30°.

Vibration

The tube is subjected during 32 hours in each of 3 positions to a vibration frequency of 50 Hz with an acceleration of 2.5 g.

LIFE

Production samples are tested to be within the end of life values (column III) under the following conditions during 10 000 hours.

Anode voltage	V_a	250 V
Grid No.3 voltage	V_{g_3}	0 V
Grid No.2 voltage	V_{g_2}	100 V
Cathode resistor	R_k	550 Ω

LIMITING VALUES (Absolute max. rating system)

Anode voltage	V_{a0}	max. 600 V
	V_a	max. 300 V
Anode dissipation	W_a	max. 1.3 W
Grid No. 2 voltage	V_{g20}	max. 600 V
	V_{g2}	max. 200 V
Grid No. 2 dissipation	W_{g2}	max. 0.4 W
Negative grid No. 3 voltage	$-V_{g3}$	max. 100 V
Negative grid No. 1 voltage	$-V_{g1}$	max. 100 V
Cathode current	I_k	max. 9 mA
Voltage between cathode and heater		
Cathode positive	V_{kf} (k pos)	max. 120 V
Cathode negative	V_{kf} (k neg)	max. 60 V
Grid No. 1 resistor	R_{g1}	See curve on page G
Bulb temperature		max. 170 °C

Heater voltage: The average heater voltage should be 6.3 V.

Variations of the heater voltage exceeding the range of 6.0 V to 6.6 V will shorten the tube life.

The tolerance of heater current (column II) should be taken into account.

OPERATING CHARACTERISTICS


Resistance coupled A.F. amplifier


Anode supply voltage	V_{ba}	100	200	250	300	400	V
Grid No.2 supply voltage	V_{bg_2}	100	200	250	300	400	V
Anode resistor	R_a	0.22	0.22	0.22	0.22	0.22	$M\Omega$
Grid No.2 resistor	R_{g_2}	1.0	1.2	1.2	1.2	1.2	$M\Omega$
Cathode resistor	R_k	3.3	1.8	1.5	1.2	1.0	$k\Omega$
Grid No.1 resistor	R_{g_1}	1	1	1	1	1	$M\Omega$
Grid resistor next stage	$R_{g_1'}$	0.68	0.68	0.68	0.68	0.68	$M\Omega$
Anode current	I_a	0.29	0.61	0.80	0.98	1.37	mA
Grid No.2 current	I_{g_2}	0.07	0.13	0.17	0.20	0.28	mA
Gain	V_o/V_i	120	165	175	190	200	
Output voltage at $+I_g = 0.3 \mu A$	V_o	8	20	25	30	40	V_{RMS}
Total distortion	d_{tot}	1.7	1.6	1.4	1.1	0.9	%

Electrometer pentode

Heater voltage	V_f	4.5	V
Anode voltage	V_a	40	V
Grid No.3 voltage	V_{g_3}	0	V
Grid No.2 voltage	V_{g_2}	40	V
Negative grid No.1 voltage	$-V_{g_1}$	2.15	V
Anode current	I_a	40	μA
Grid No.2 current	I_{g_2}	9	μA
Negative grid No.1 current	$-I_{g_1}$	max. 10^{-10}	A


7Z03965-5h,j,6

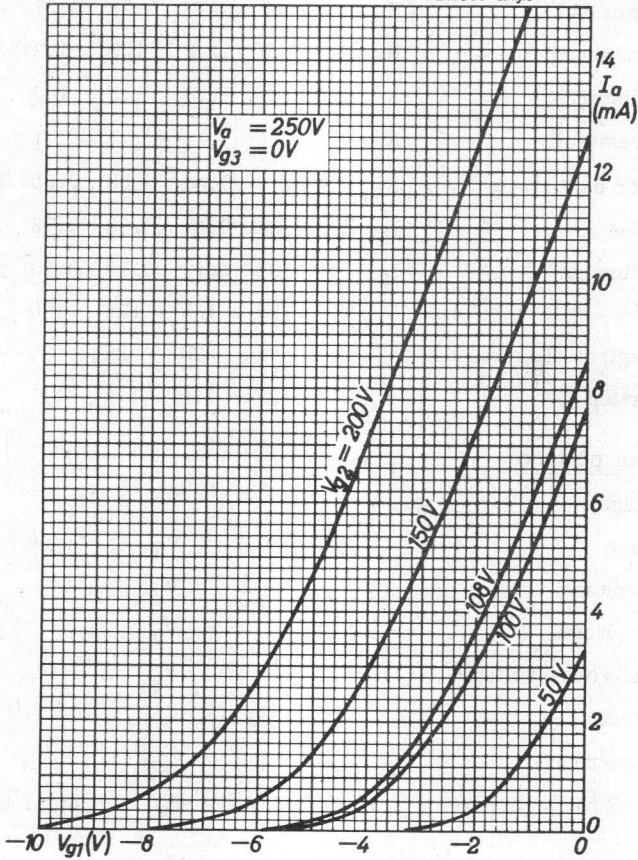

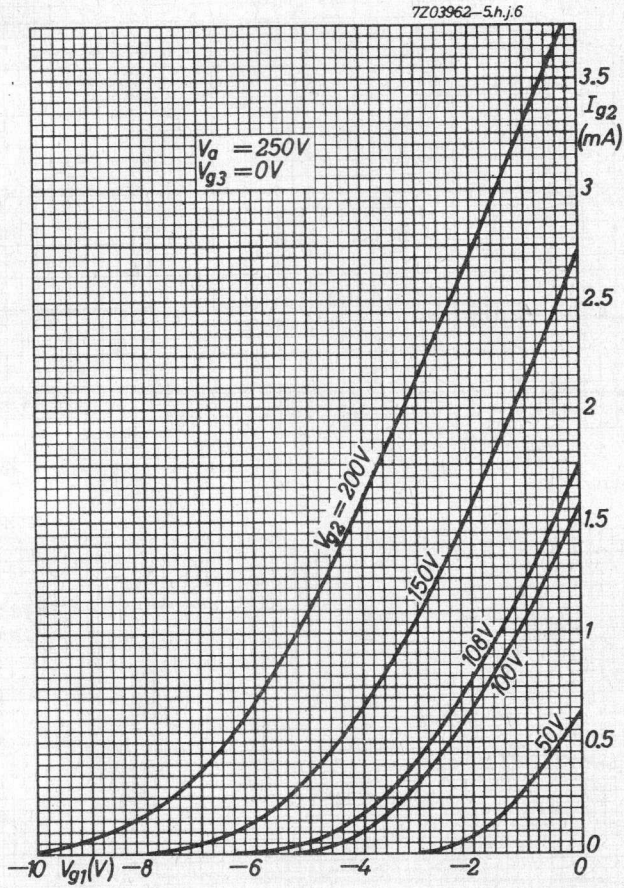


E80F


7Z03964-5.h.j.6

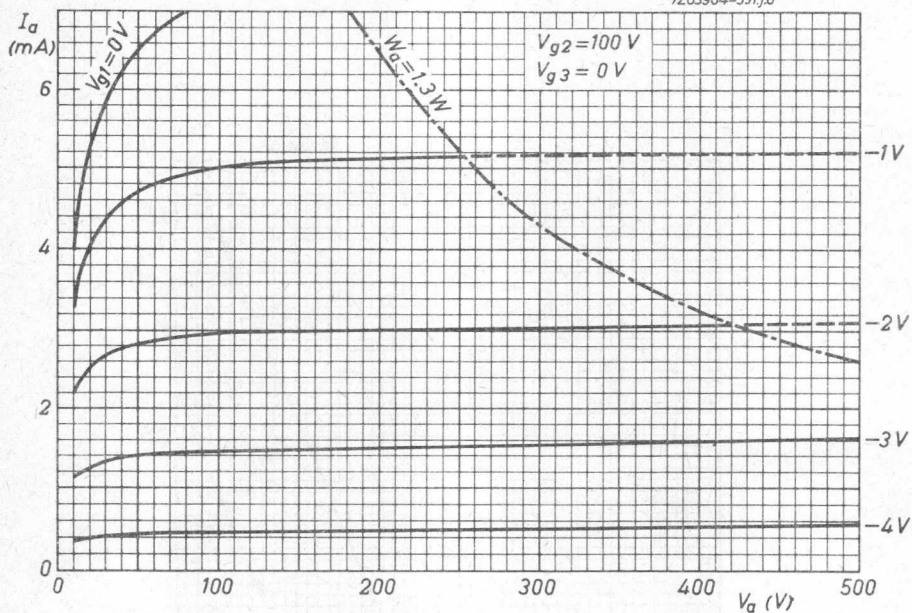



7Z03963-5.h.j.6

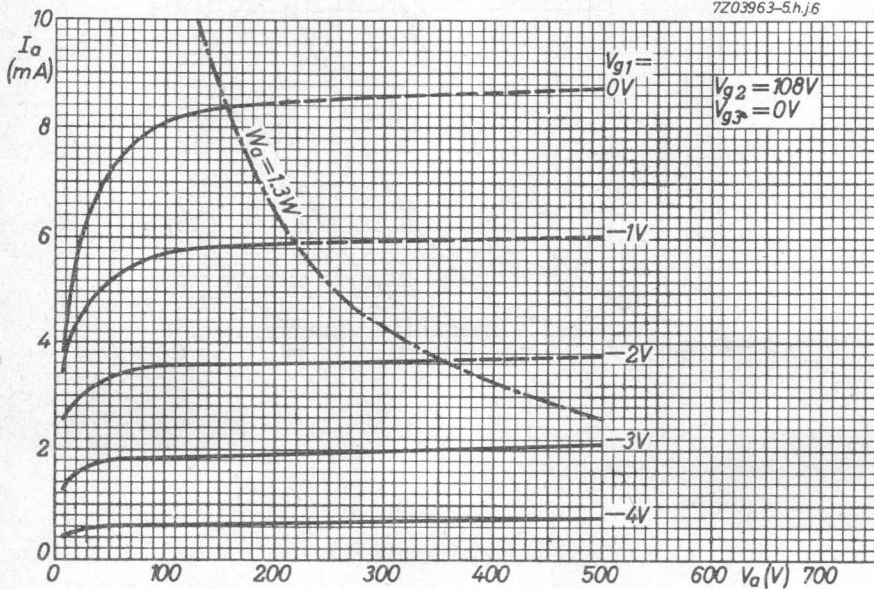


7Z03958-5.h.j.6

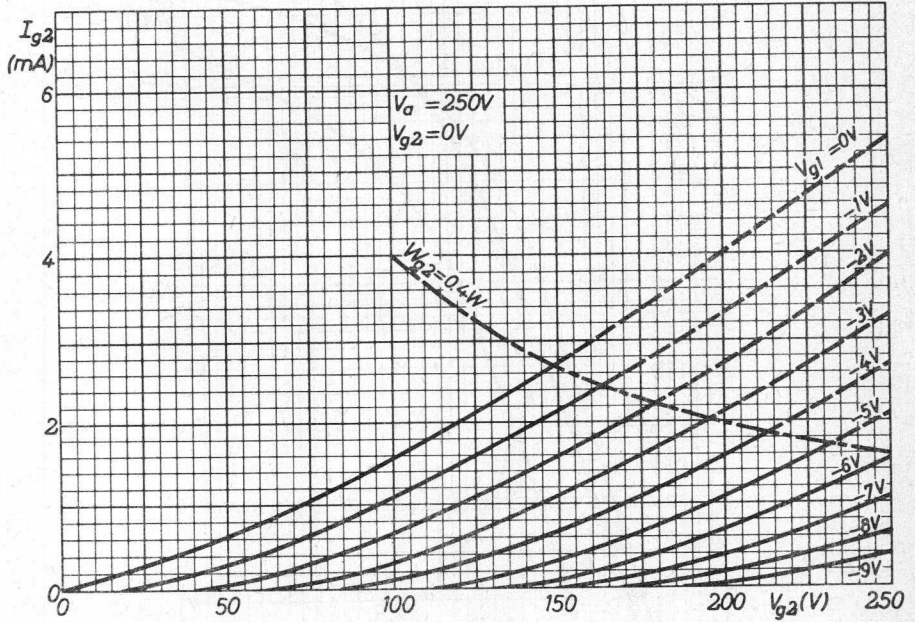

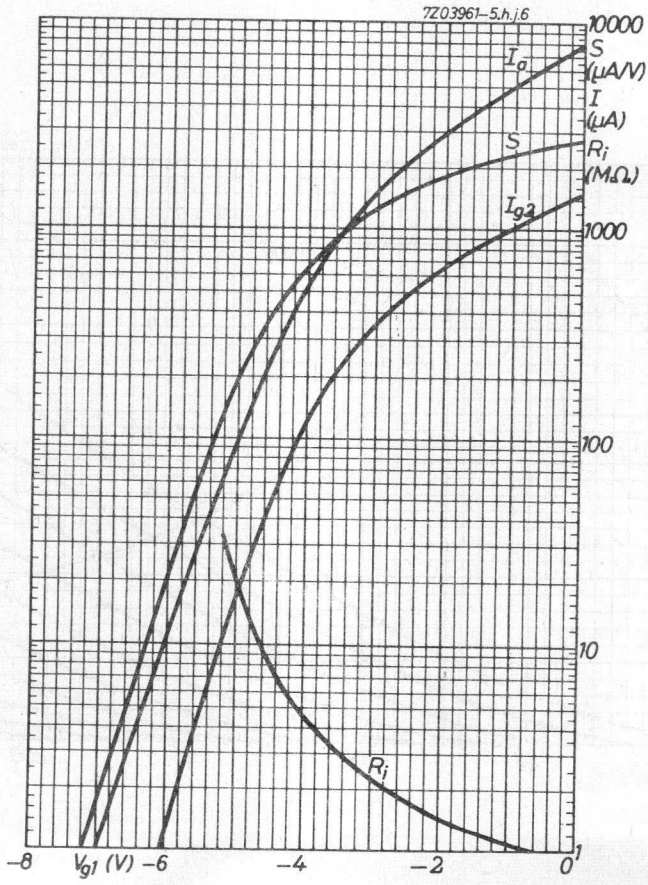

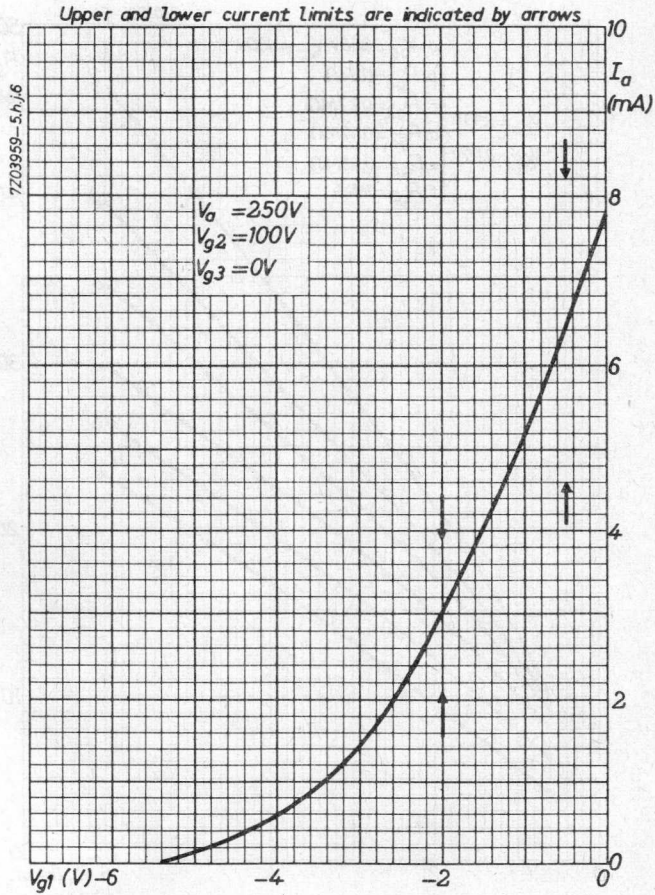

7203960-5h.j.6

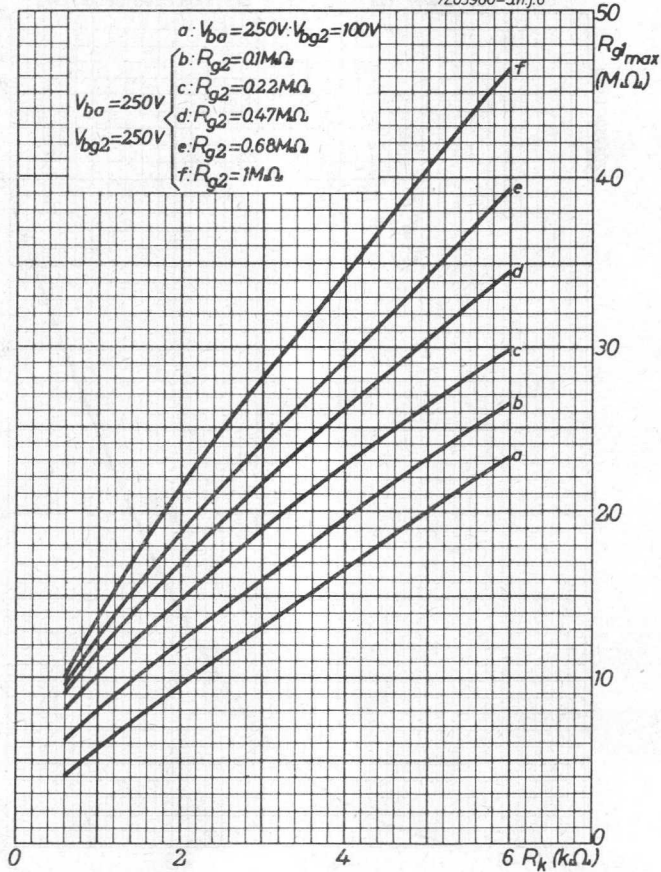

S.Q. TUBE

Special quality output pentode



QUICK REFERENCE DATA

Life test	10 000 hours	
Low interface resistance		
Mechanical quality	Shock and vibration resistant	
Base	Noval. Gold plated pins	
Heating	Indirect A.C. or D.C. Series or parallel supply	
Heater voltage	V_f	6.3 V
Heater current	I_f	700 mA
Anode current	I_a	30 mA
Output power, one tube	W_o	2.7 W
two tubes class AB	W_o	5.7 W

DIMENSIONS AND CONNECTIONS

Dimensions in mm

Base: Noval

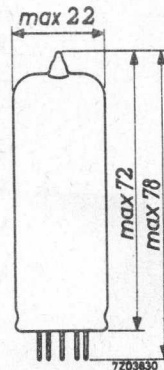

7Z2 6068

CHARACTERISTICS

Column I Nominal value or setting of the tube

II Range values for equipment design: Initial spread

III Range values for equipment design: End of life

		I	II	III	
Heater voltage	V_f	6.3			V
Heater current	I_f	700	665 - 735		mA
Anode voltage	V_a	200			V
Grid No. 3 voltage	V_{g3}	0			V
Grid No. 2 voltage	V_{g2}	200			V
Cathode resistor	R_k	130			Ω
Anode current	I_a	30	26.5 - 33.5	min. 21	mA
Grid No. 2 current	I_{g2}	4.1	2.7 - 5.5	min. 2.0	mA
Mutual conductance	S	9.0	7.4 - 10.6	min. 6.0	mA/V
Amplification factor grid No. 2 to grid No. 1	μ_{g2g1}	21.5			
Negative grid No. 1 current	$-I_{g1}$		max. 0.5	max. 1.0	μA
Anode voltage	V_a	200			V
Grid No. 3 voltage	V_{g3}	0			V
Grid No. 2 voltage	V_{g2}	200			V
Anode current	I_a	30			mA
Load resistance	$R_{a\sim}$	7			$k\Omega$
Output power	W_o	2.7	min. 2.0		W
<u>Cut-off voltage</u>	$-V_{g1}$	14			V
Anode voltage	V_a	200			V
Grid No. 3 voltage	V_{g3}	0			V
Grid No. 2 voltage	V_{g2}	200			V
Anode current	I_a		max. 0.2		mA

CHARACTERISTICS (continued)Hum voltageGrid No.1 resistor $R_{g1} = 0.5 \text{ M}\Omega$

Cathode resistor by-passed

Leakage current between cathode and heaterVoltage between cathode and heater $V_{kf} = 120 \text{ V}$ Insulation resistance between two electrodesVoltage between electrodes $\approx 300 \text{ V}$

	I	II	III	
V_{g1}		max. 0.25		mVRMS
I_{kf}		max. 15	max. 20	μA
R		min. 50	min. 10	$\text{M}\Omega$

CAPACITANCES

Grid No.1 to grid No.3, grid No.2, cathode heater and screen

Anode to grid No.3, grid No.2, cathode heater and screen

Anode to grid No.1

Grid No.1 to heater

Cathode to heater

	I	II	
$C_{g1/g3g2kfs}$	10	9.2 - 10.8	pF
$C_{a/g3g2kfs}$	6.8	6.3 - 7.3	pF
C_{ag1}		max. 0.15	pF
C_{g1f}		max. 0.25	pF
C_{kf}	7.0		pF

SHOCK AND VIBRATION RESISTANCE

The following test conditions are applied to assess the mechanical quality of the tube. These conditions are not intended to be used as normal operating conditions.

Shock

The tube is subjected 5 times in each of 4 positions to an acceleration of 500 g supplied by an NRL shock machine with the hammer lifted over an angle of 30° .

Vibration

The tube is subjected during 32 hours in each of 3 positions to a vibration frequency of 50 Hz with an acceleration of 2.5 g.

LIFE

Production samples are tested to be within the end of life values (column III) under the following conditions during 10 000 hours.

Anode voltage	V_a	200	V
Grid No.3 voltage	V_{g3}	0	V
Grid No.2 voltage	V_{g2}	200	V
Cathode resistor	R_k	130	Ω

LIMITING VALUES (Absolute max. rating system)

Anode voltage	V_{a0}	max.	600	V
	V_a	max.	300	V
Anode dissipation	W_a	max.	8	W
	$-V_{g3}$	max.	100	V
Negative grid No.3 voltage	V_{g20}	max.	600	V
	V_{g2}	max.	300	V
Grid No.2 voltage	W_{g2}	max.	2.6	W
	$-V_{g1}$	max.	100	V
Grid No.2 dissipation	I_k	max.	50	mA
	V_{kf}	max.	120	V
Grid No.1 voltage	t_{bulb}	max.	225	$^{\circ}C$
	R_{g1}	max.	1	$M\Omega$
Cathode current				
Voltage between cathode and heater				
Bulb temperature				
Grid No.1 resistor (automatic bias)				

Heater voltage: The average heater voltage should be 6.3 V.

Variations of the heater voltage exceeding the range of 6.0 V to 6.6 V will shorten the tube life.

The tolerance of heater current (column II) should be taken into account.

OPERATING CHARACTERISTICS

Output tube class A

Anode voltage	V_a	200	250	V
Grid No.3 voltage	V_{g3}	0	0	V
Grid No.2 voltage	V_{g2}	200	250	V
Grid No.2 resistor	R_{g2}		1	$k\Omega$
Cathode resistor	R_k	130	270	Ω
Anode current	I_a	30	24	mA
Grid No.2 current	I_{g2}	4.1	3.3	mA
Mutual conductance	S	9	-	mA/V
Internal resistance	R_i	52	-	$k\Omega$
Load resistance	$R_{a\sim}$	7	10	$k\Omega$
Output power	W_o	2.7	2.8	W
Total distortion	d_{tot}	10	10	%


Output tube class AB (two tubes)


Anode voltage	V_a	200		V
Grid No.3 voltage	V_{g3}	0		V
Grid No.2 voltage	V_{g2}	200		V
Cathode resistor	R_k	130		Ω
Load resistance	$R_{aa\sim}$	9		$k\Omega$
Input voltage	V_i	0	0.31	5.2 VRMS
Anode current	I_a	2x20.6	-	2x24.6 mA
Grid No.2 current	I_{g2}	2x2.8	-	2x4.9 mA
Output power	W_o	0	0.05	5.7 W
Total distortion	d_{tot}	-	-	3.0 %



OPERATING CHARACTERISTICS (continued)

Output tube class AB (two tubes)

Anode voltage	V_a	250	V
Grid No.3 voltage	V_{g3}	0	V
Grid No.2 voltage	V_{g2}	250	V
Cathode resistor	R_k	150	Ω
Load resistance	$R_{aa\sim}$	9	k Ω
Input voltage	V_i	0 0.32 7.8	V_{RMS}
Anode current	I_a	2x23.5 - 2x29.5	mA
Grid No.2 current	I_{g2}	2x3.2 - 2x6.6	mA
Output power	W_o	0 0.05 9	W
Total distortion	d_{tot}	-	4.5 %

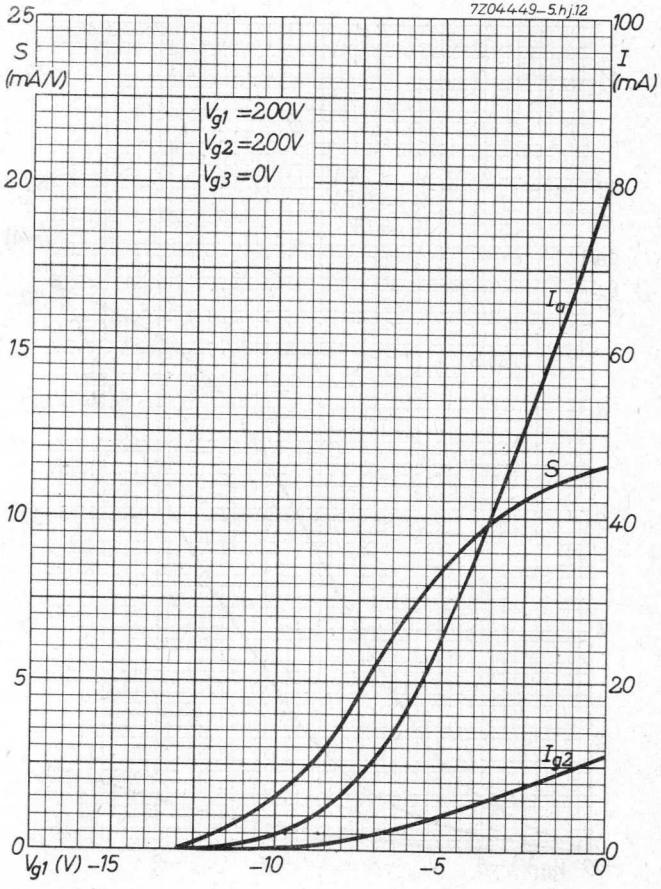


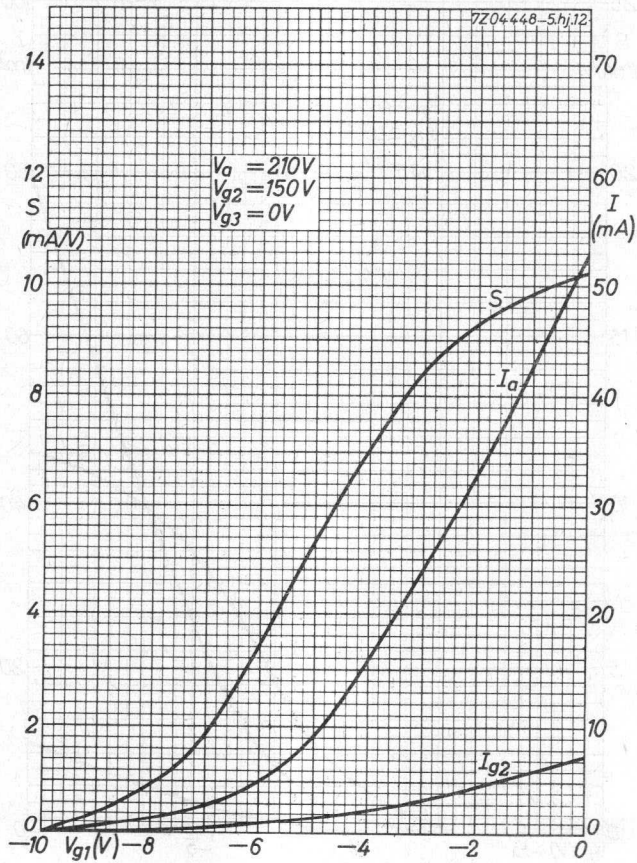

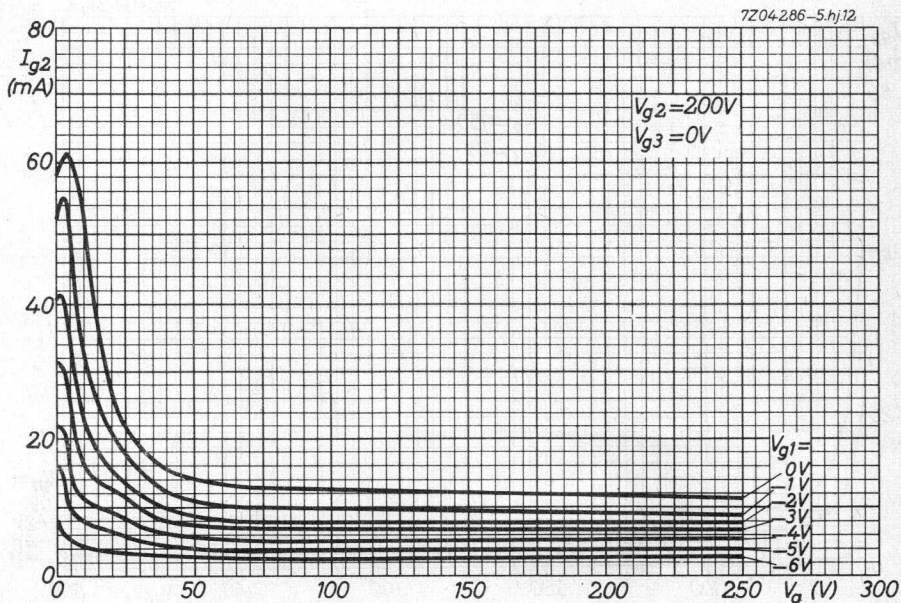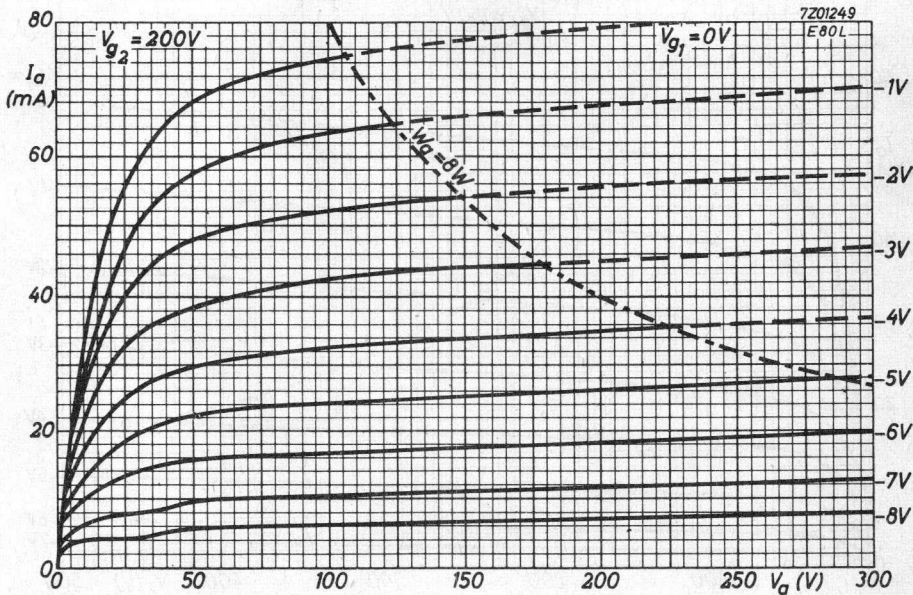




E80L



7201250
E80L


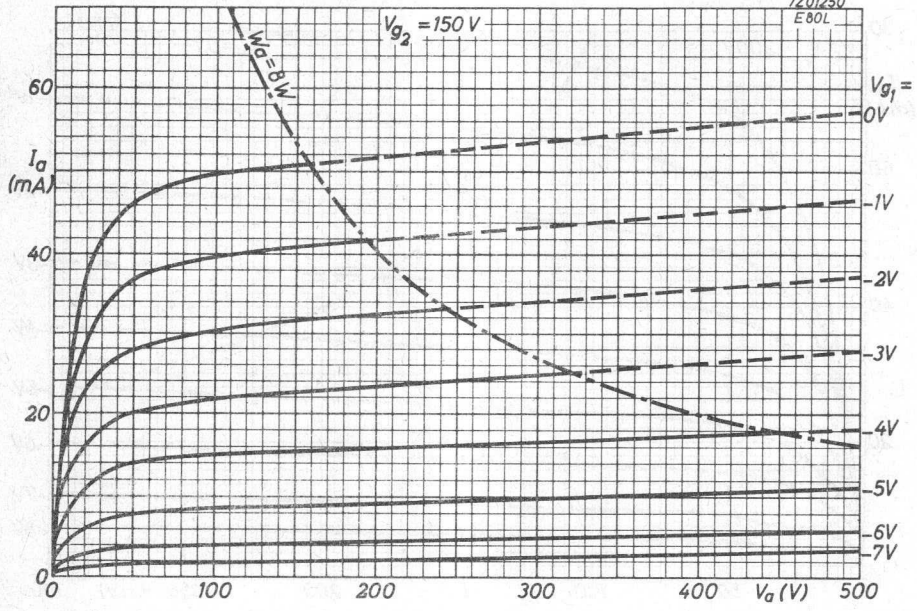



7203036-5,hj12

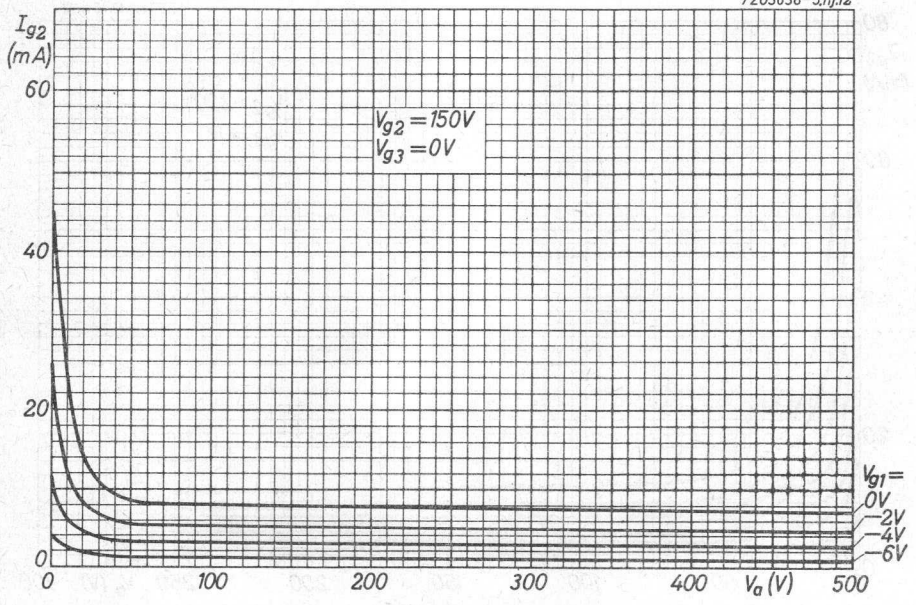

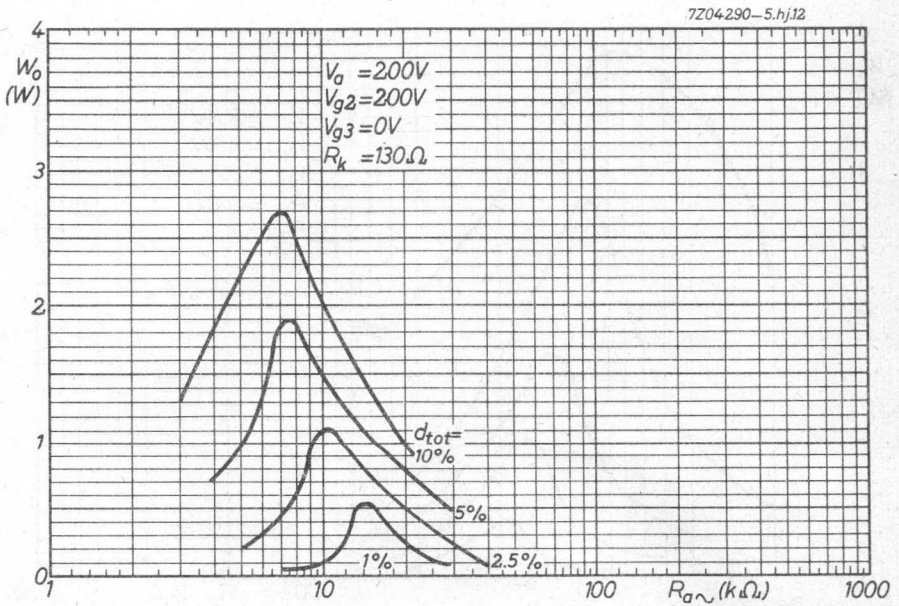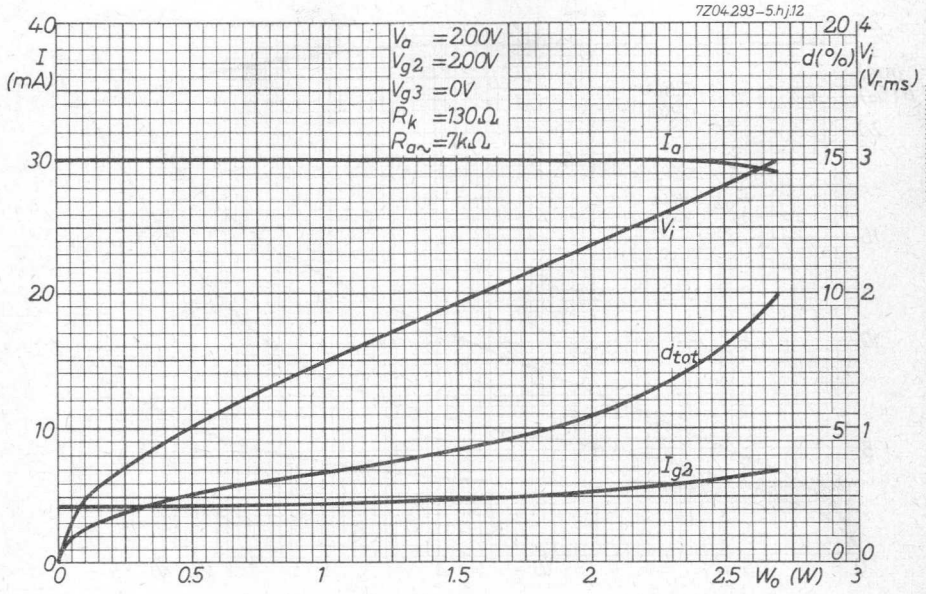

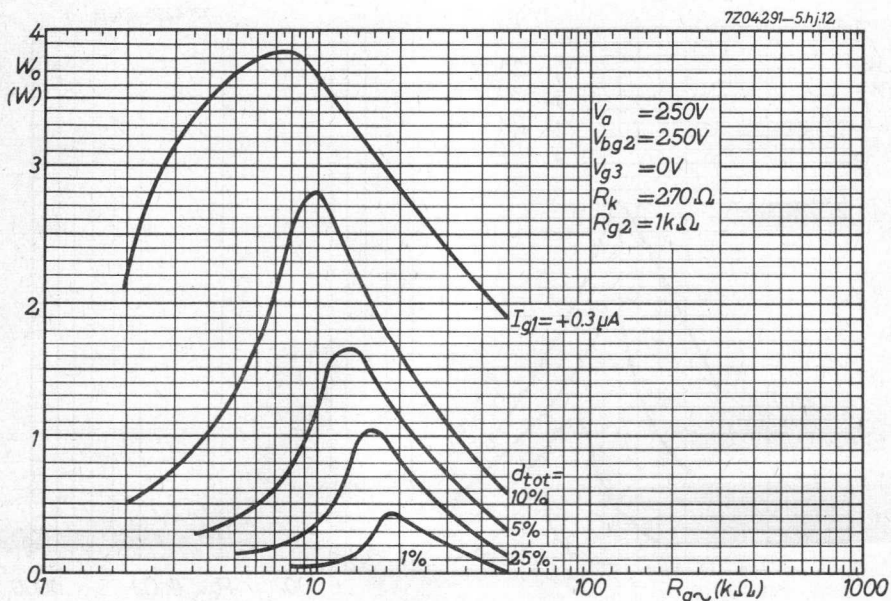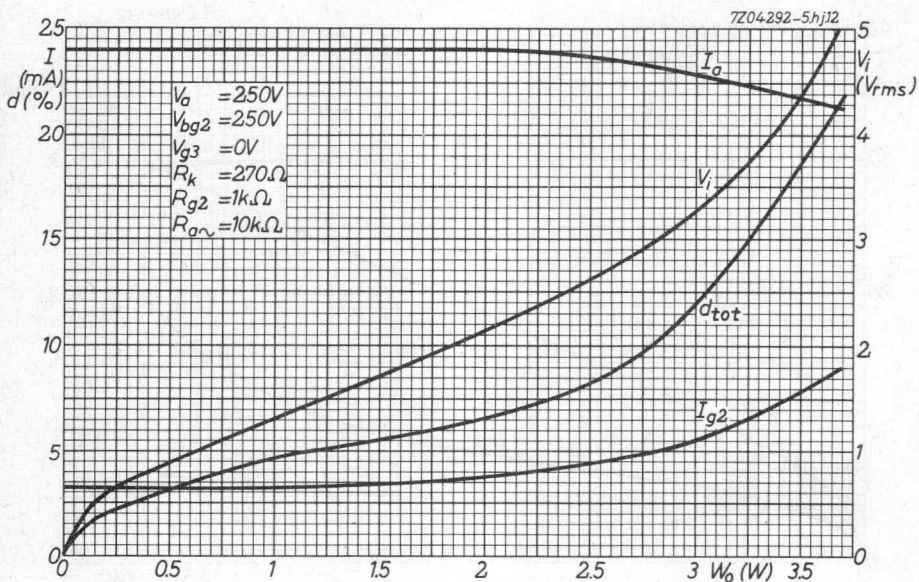

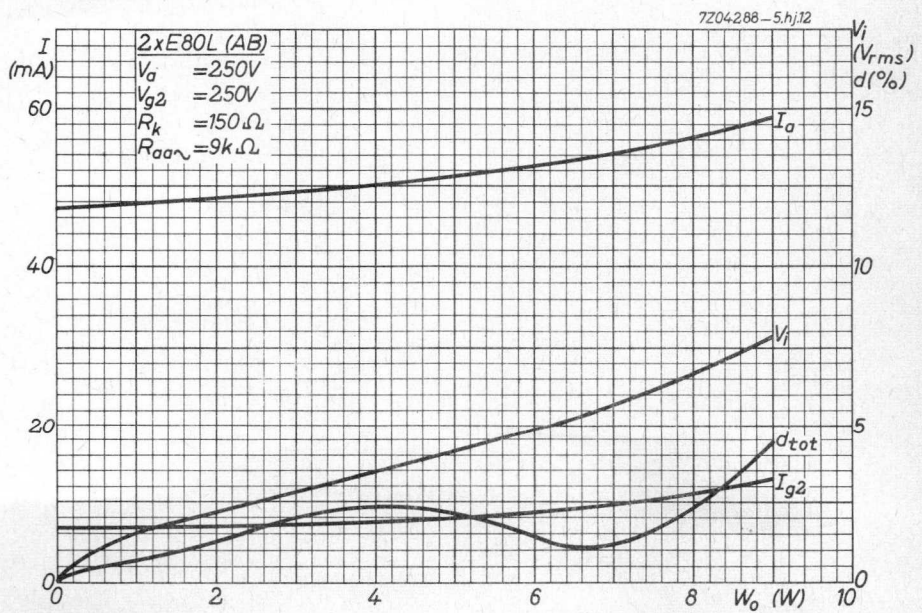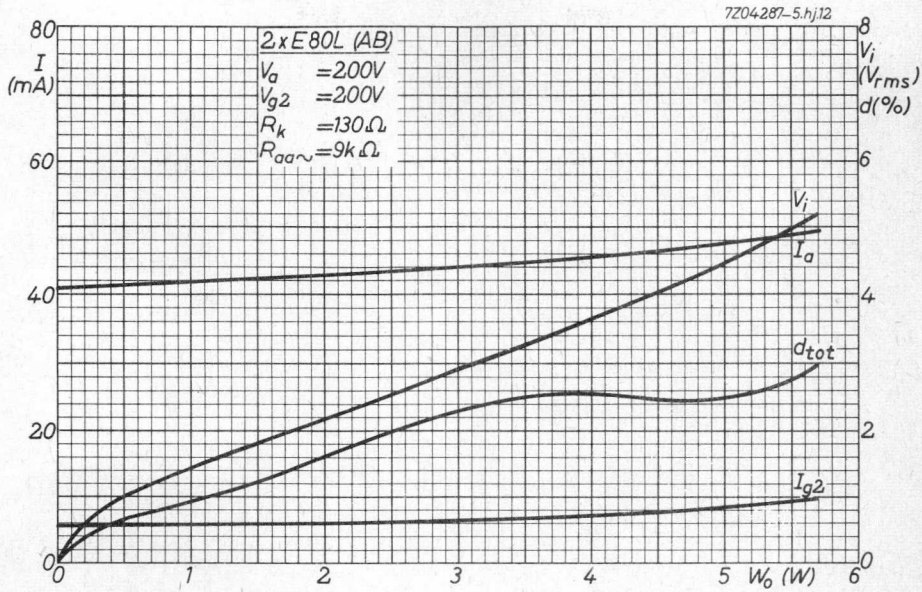



CHARACTERISTICS

Column I Nominal value or setting of the tube

II Range values for equipment design: Initial spread

III Range values for equipment design: End of life

		I	II	III	
Heater voltage	V_f	6.3			V
Heater current	I_f	375	355- 395		mA
Anode voltage	V_a	210			V
Grid No.3 voltage	V_{g_3}	0			V
Grid No.2 voltage	V_{g_2}	210			V
Cathode resistor	R_k	120			Ω
Anode current	I_a	20	17- 23	min.13.5	mA
Grid No.2 current	I_{g_2}	5.3	4.1- 6.5	min. 3.1	mA
Mutual conductance	S	11	9.5-12.5	min. 7.8	mA/V
Internal resistance	R_i	0.3	min. 0.2		M Ω
Amplification factor grid No.2 to grid No.1	$\mu_{g_2g_1}$	36			
Equivalent noise resistance	R_{eq}	1.2			k Ω
<u>Negative grid current</u>	$-I_{g_1}$		max. 0.5	max. 1.0	μA
<u>Hum voltage</u>	V_{g_1}		max. 0.2		mV _{RMS}
Grid resistor $R_{g_1} = 0.5 M\Omega$					
Heater centre earthed					
Cathode resistor bypassed					
<u>Leakage current between cathode and heater</u>	I_{kf}		max. 24		μA
Voltage between cathode and heater $V_{kf} = 120 V$					

CAPACITANCES

Anode to grid No. 3, grid No. 2
cathode heater and screen

	I	II	
C_{a/g_3g_2kfs}	6.5	5.9 - 7.1	pF

Grid No. 1 to grid No. 3, grid No. 2
cathode heater and screen

C_{g_1/g_3g_2kfs}	11.2	10.4 - 12	pF
---------------------	------	-----------	----

Grid No. 1 to grid No. 3, grid No. 2
cathode heater and screen

C_{g_1/g_3g_2kfs}	14.3		pF
---------------------	------	--	----

Measured with cathode current

$I_k = 25$ mA

Anode to grid No. 1

C_{ag_1}		max. 0.02	pF
------------	--	-----------	----

Grid No. 1 to heater

C_{g_1f}		max. 0.2	pF
------------	--	----------	----

Cathode to heater

C_{kf}	4.2		pF
----------	-----	--	----

SHOCK AND VIBRATION RESISTANCE

The following test conditions are applied to assess the mechanical quality of the tube. These conditions are not intended to be used as normal operating conditions.

Shock

The tube is subjected 5 times in each of 4 positions to an acceleration of 500 g supplied by an NRL shock machine with the hammer lifted over an angle of 30°.

Vibration

The tube is subjected during 32 hours in each of 3 positions to a vibration frequency of 50 Hz with an acceleration of 2.5 g.

LIFE

Production samples are tested to be within the end of life values (column III) under the following conditions during 10,000 hours.

Anode voltage	V_a	210	V
Grid No. 3 voltage	V_{g_3}	0	V
Grid No. 2 voltage	V_{g_2}	210	V
Cathode resistor	R_k	120	Ω

LIMITING VALUES (Design centre rating system)

Anode voltage	V_{a_0}	max.	550 V
	V_a	max.	210 V
Anode dissipation	W_a	max.	4.5 W
Grid No.2 voltage	$V_{g_{20}}$	max.	550 V
	V_{g_2}	max.	210 V
Grid No.2 dissipation	W_{g_2}	max.	1.2 W
Cathode current	I_k	max.	30 mA
Grid No.1 resistor:			
automatic bias	R_{g_1}	max.	0.5 M Ω
fixed bias	R_{g_1}	max.	0.25 M Ω
Voltage between cathode and heater	V_{kf}	max.	120 V
Bulb temperature	t_{bulb}	max.	170 °C

Heater voltage: The average heater voltage should be 6.3 V. Variations of the heater voltage exceeding the range of 6.0 V to 6.6 V will shorten the tube life. The tolerance of heater current (column II) should be taken into account.


OPERATING CHARACTERISTICSOutput tube. Class A

Anode voltage	V_a	210 V
Grid No.3 voltage	V_{g_3}	0 V
Grid No.2 voltage	V_{g_2}	210 V
Cathode resistor	R_k	120 Ω
Load resistance	$R_{a\sim}$	15 k Ω
Anode current	I_a	20 mA
Grid No.2 current	I_{g_2}	5.3 mA
Output power	W_o	1 W
Total distortion	d_{tot}	5 %


OPERATING CHARACTERISTICS (continued)

Amplifier


Anode voltage	V_a	210 V
Grid No.3 voltage	V_{g3}	0 V
Grid No.2 voltage	V_{g2}	210 V
Cathode resistor	R_k	180 Ω
Load resistance	$R_{a\sim}$	20 $k\Omega$
Anode current	I_a	15 mA
Grid No.2 current	I_{g2}	4 mA
Voltage gain	V_o/V_i	5.15 N

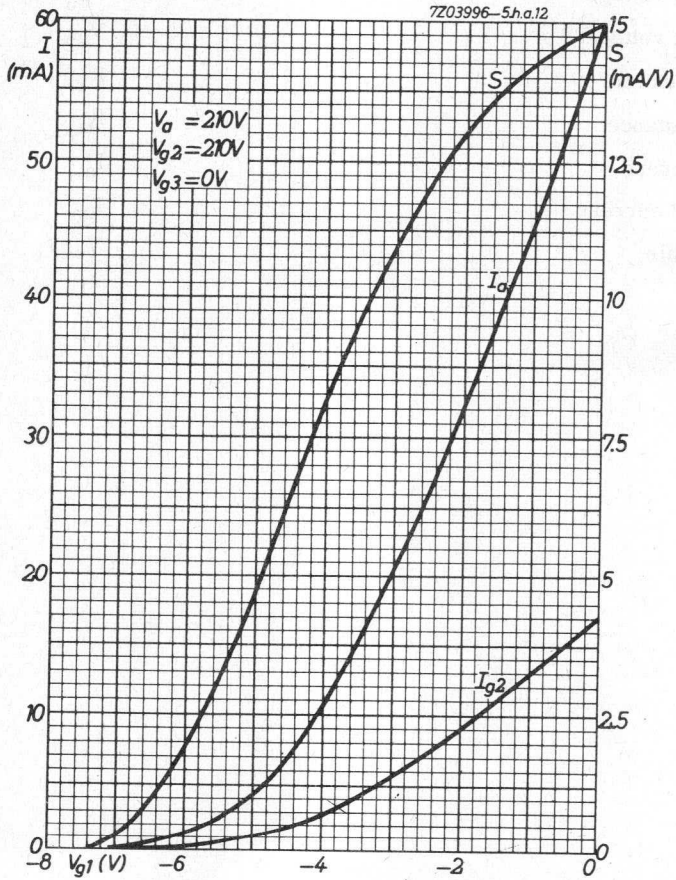


7Z03993-5.h.a.12

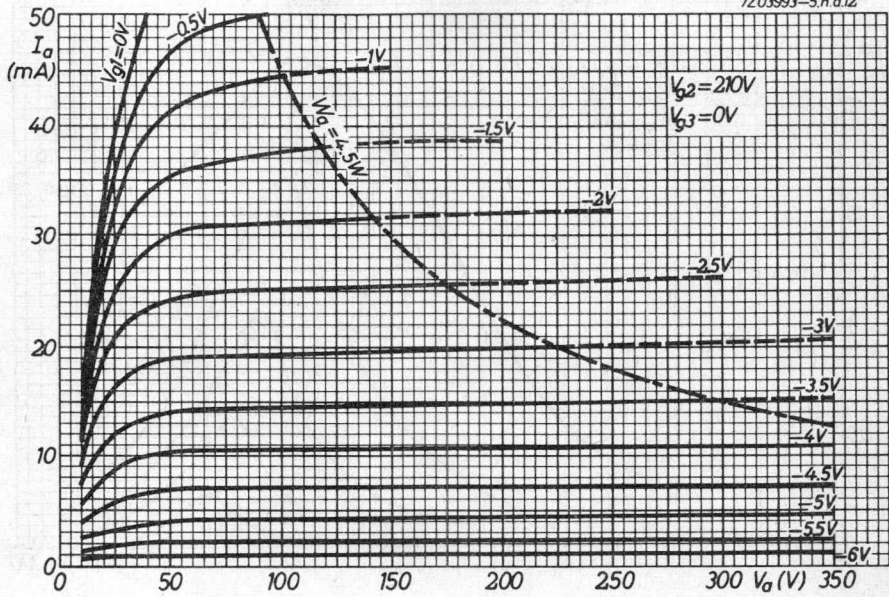


7Z03995-5.h.a.12

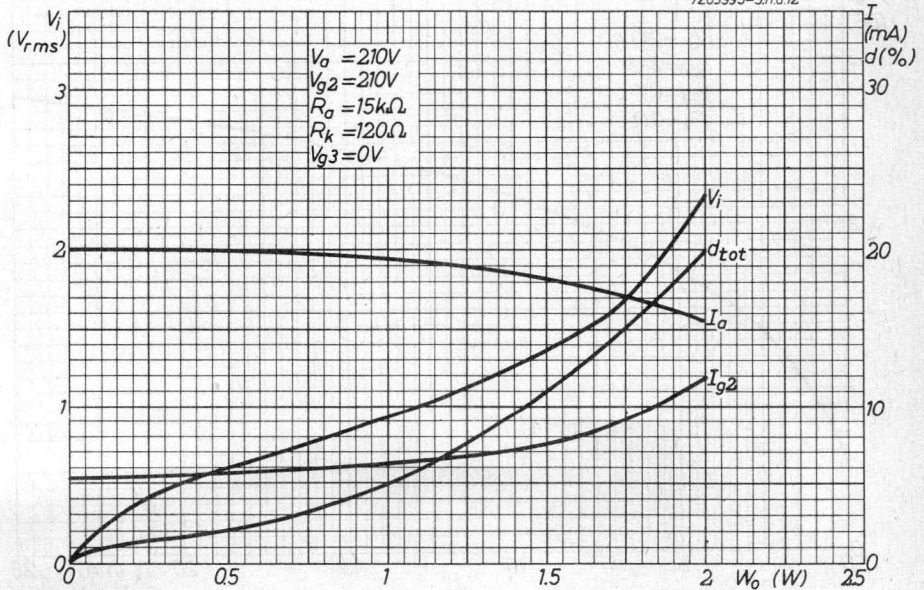


7Z03994-5.h.a.12

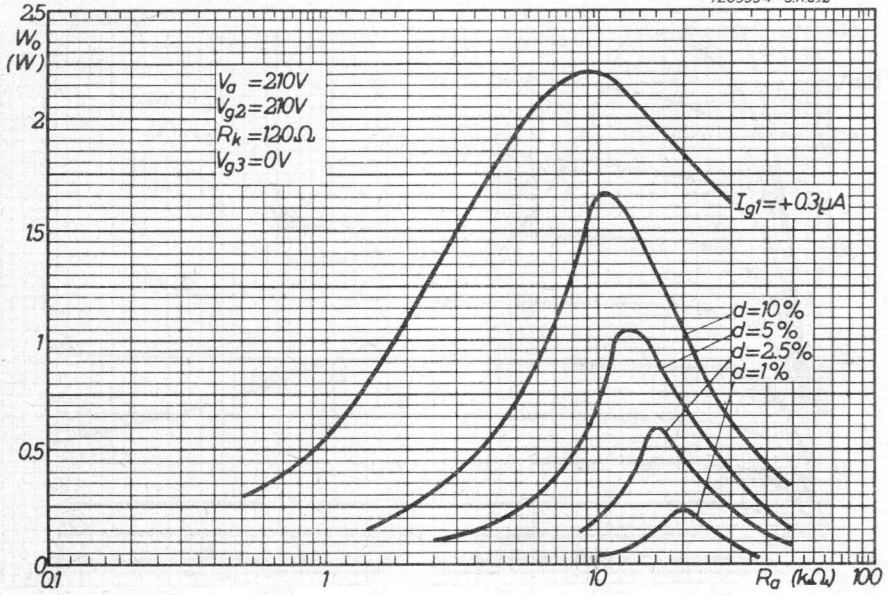

7Z03997-5.h.a.12

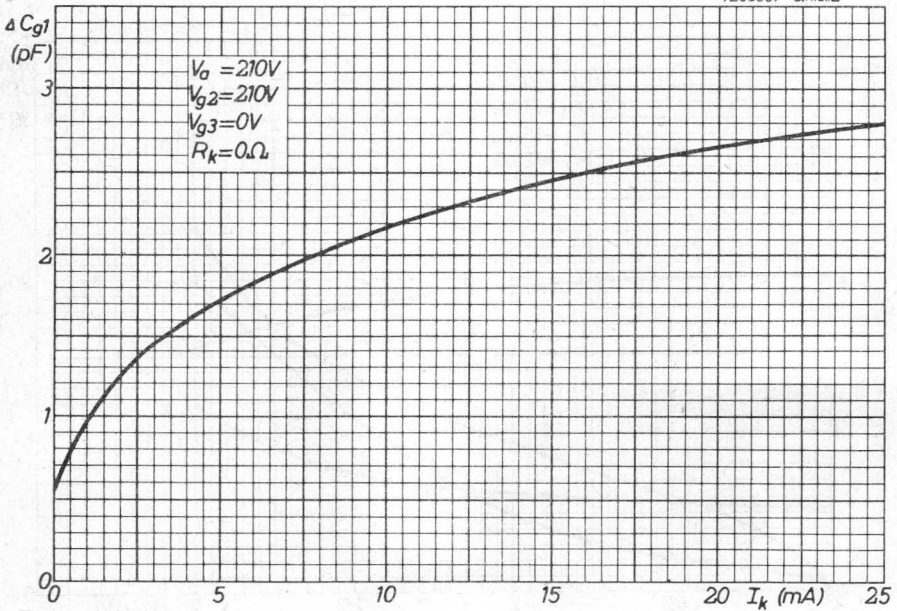

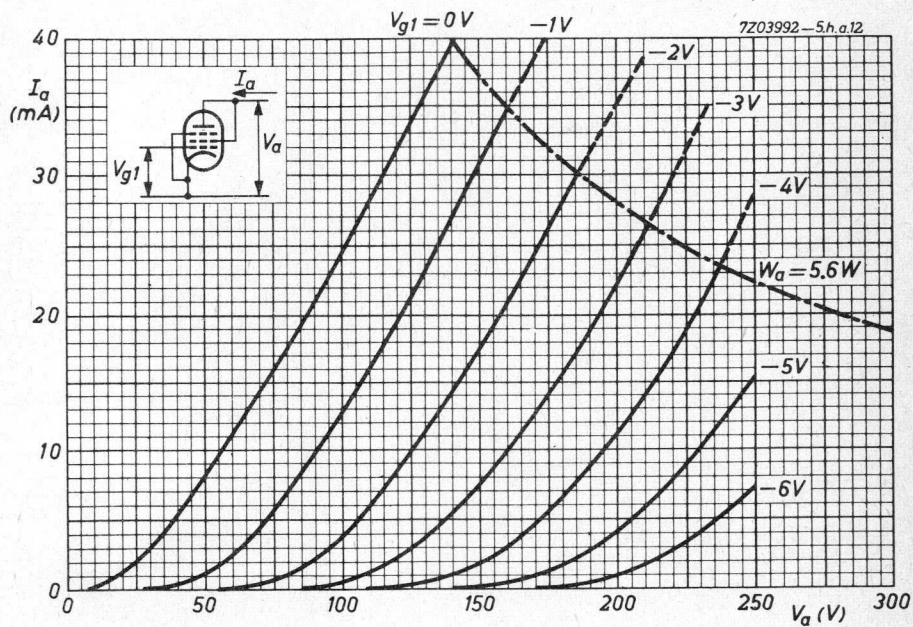



S.Q. TUBE

Special quality double triode designed for use as amplifier oscillator, multivibrator and blocking oscillator.


QUICK REFERENCE DATA

Life	10 000 hours	
Low interface resistance		
Mechanical quality	Shock and vibration resistant	
Base	Noval	
Heating	Indirect A.C. or D.C.; Parallel supply	
Heater voltage	V_f	6.3 or 12.6 V
Heater current	I_f	300 or 150 mA
Anode current	I_a	10.5 mA
Mutual conductance	S	2.2 mA/V

DIMENSIONS AND CONNECTIONS

Dimensions in mm

Base: Noval

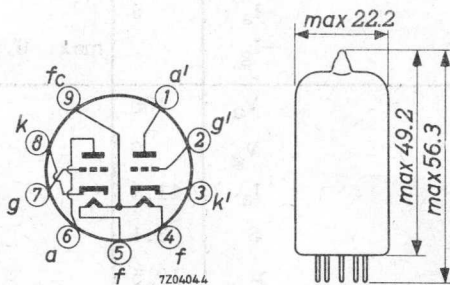

7Z2 7262

CHARACTERISTICS (Both sections if applicable)

Column I Nominal value or setting of the tube

II Range values for equipment design: Initial spread

III Range values for equipment design: End of life

		I	II	III	
Heater voltage, pin 9 and 4 + 5	V_f	6.3			V
Heater current	I_f	300	285- 315		mA
Heater voltage, pin 4 and 5	V_f	12.6			V
Heater current	I_f	150			mA
Anode voltage	V_a	250			V
Cathode resistor	R_k	800			Ω
Anode current	I_a	10.5	8.7-12.3	min. 7.0	mA
Difference in anode current of both systems	$I_a - I_a'$		max. 1.6		mA
Mutual conductance	S	2.2	1.8- 2.6	min. 1.5	mA/V
Amplification factor	μ	17.0	15.7-18.3		
Internal resistance	R_i	7.7			k Ω
<u>Cut-off voltage</u>					
Grid voltage	$-V_g$	22			V
Anode current	I_a	10			μ A
Grid voltage	$-V_g$		max. 30		V
Anode current	I_a	20			μ A
Grid voltage	$-V_g$		min. 18		V
Anode current	I_a	5			μ A
<u>Negative grid current</u>	$-I_g$		max. 0.5	max. 1.0	μ A
Anode voltage	V_a	100			V
Grid voltage	V_g	0			V
Anode current	I_a	11.8			mA
Mutual conductance	S	3.1			mA/V
Amplification factor	μ	19.5			
Internal resistance	R_i	6.25			k Ω

CHARACTERISTICS (continued)

		I	II	
<u>Leakage current between cathode and heater</u>	I_{kf}		max. 6.5	μA
<u>Insulation resistance:</u>				
Between grid and other electrodes Voltage between electrodes = 100 V	R_{ins}		min. 500	$M\Omega$
Between anode and other electrodes Voltage between electrodes = 300 V	R_{ins}		min. 500	$M\Omega$
<u>Vibrational noise output (20 to 5000 Hz)</u>	V_o		max. 100	mVRMS
Anode voltage $V_a = 250$ V				
Grid voltage $-V_g = 8.5$ V				
Anode resistor $R_a = 2$ k Ω				
Vibration frequency = 40 Hz				
Acceleration = 10 g				
Units in parallel				
CAPACITANCES				
Anode to cathode and heater	C_a/kf	0.5	0.3 - 0.7	pF
	$C_a'/k'f$	0.4	0.2 - 0.6	pF
Grid to cathode and heater	C_g/kf	1.6	1.25 - 1.95	pF
Anode to grid	C_{ag}	1.5	1.2 - 1.8	pF

SHOCK AND VIBRATION RESISTANCE

The following test conditions are applied to assess the mechanical quality of the tube. These conditions are not intended to be used as normal operating conditions.

Shock

The tube is subjected 5 times in each of 4 positions to an acceleration of 500 g supplied by an NRL shock machine with the hammer lifted over an angle of 30°.

Vibration

The tube is subjected during 32 hours in each of 3 positions to a vibration frequency of 50 Hz with an acceleration of 2.5 g.

7Z2 7264

LIFE

Production samples are tested to be within the end of life values (column III) during 10 000 hours.



LIMITING VALUES (Absolute max. rating system)


Anode voltage	V_{a0}	max. 600 V
	V_a	max. 330 V
Anode dissipation	W_a	max. 3 W
Grid voltage	$-V_g$	max. 55 V
	$+V_g$	max. 0 V
Grid current	I_g	max. 5 mA
Grid resistor: fixed bias	R_g	max. 0.5 M Ω
automatic bias	R_g	max. 1.0 M Ω
Cathode current	I_k	max. 22 mA
Voltage between cathode and heater	V_{kf}	max. 100 V
Bulb temperature	t_{bulb}	max. 165 °C

Heater voltage: The average heater voltage should be 6.3 V.

Variations of the heater voltage exceeding the range of 6.0 V to 6.6 V will shorten the tube life.

The tolerance of heater current (column II) should be taken into account:

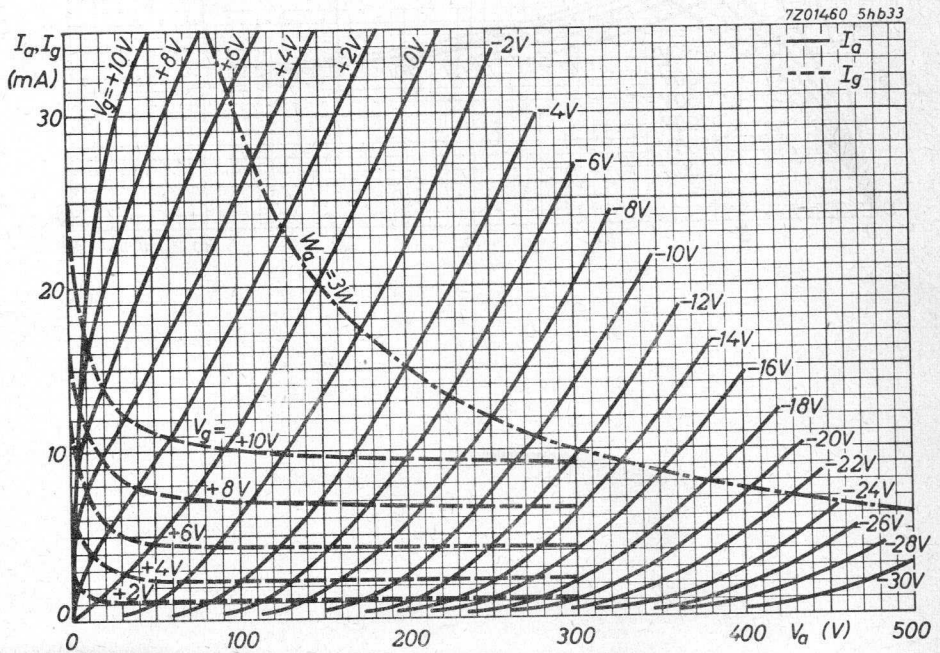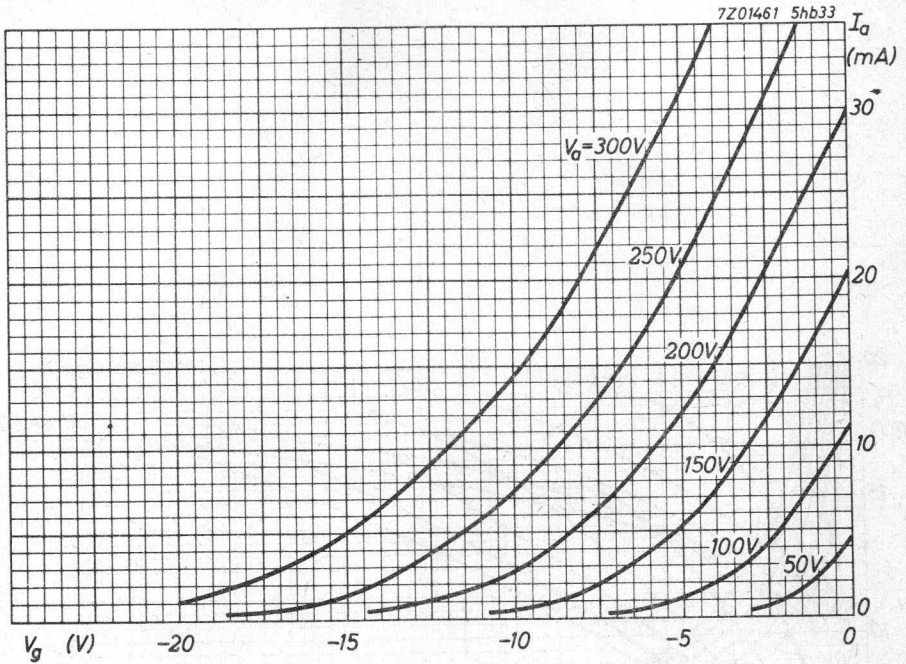

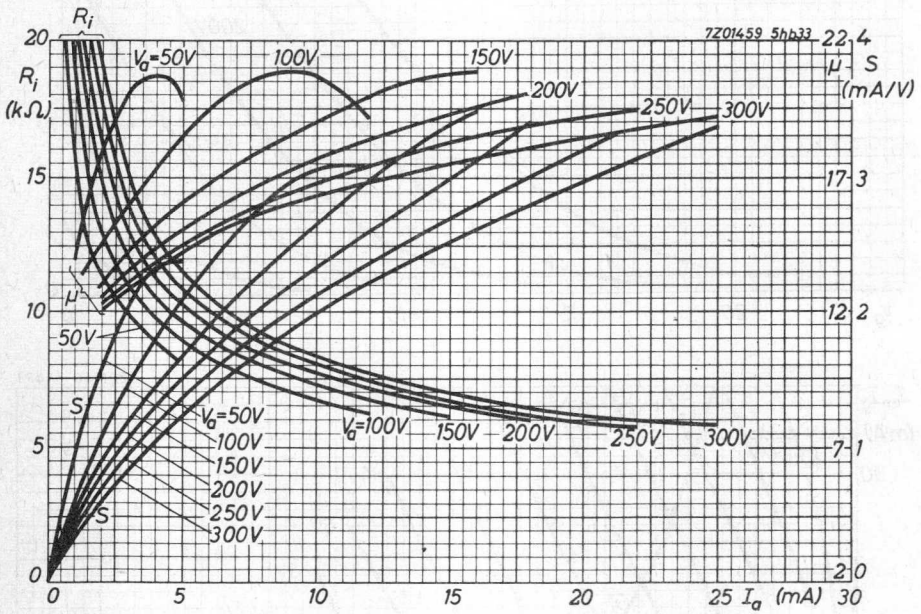

S.Q. TUBE

Special quality double triode designed for use as A.F. amplifier, phase inverter and amplifier in measuring equipment.


QUICK REFERENCE DATA

Life test	10 000 hours
Low interface resistance	
Low microphony level	
Mechanical quality	Shock and vibration resistant
Base	Noval
Heating	Indirect
	A.C. or D.C.; parallel supply
Heater voltage	V_f 6.3 V or 12.6 V
Heater current	I_f 300 mA or 150 mA
Anode current	I_a 1.25 mA
Mutual conductance	S 1.6 mA/V
Amplification factor	μ 100

DIMENSIONS AND CONNECTIONS

Dimensions in mm

Base: Noval

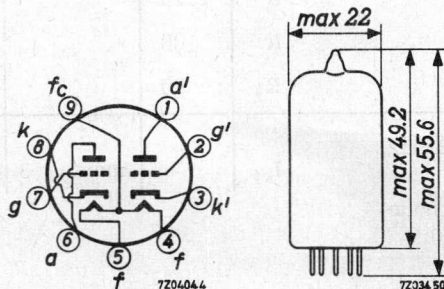

7Z2 6121

CHARACTERISTICS (Both systems if applicable)

Column I Nominal value or setting of the tube

II Range values for equipment design: Initial spread

III Range values for equipment design: End of life

		I	II	III	
Heater voltage pin 9 and 4 + 5	V_f	6.3			V
Heater current	I_f	300	285 - 315		mA
Heater voltage pin 4 and 5	V_f	12.6			V
Heater current	I_f	150			mA
Anode voltage	V_a	250			V
Cathode resistor	R_k	1.6			k Ω
Anode current	I_a	1.25	1.1 - 1.4	min. 0.8	mA
Mutual conductance	S	1.6	1.3 - 1.95	min. 1.05	mA/V
Amplification factor	μ	100			
Internal resistance	R_i	62.5			k Ω
<u>Negative grid current</u>	$-I_g$		max. 0.2	max. 0.5	μ A
<u>Cut-off voltage</u>	$-V_g$		max. 4		V
Anode current $I_a = 20 \mu$ A					
Anode voltage	V_a	100			V
Anode current	I_a	0.5			mA
Cathode resistor	R_k	2			k Ω
Mutual conductance	S	1.25			mA/V
Amplification factor	μ	100			
Internal resistance	R_i	80			k Ω
<u>Leakage current between cathode and heater</u>	I_{kf}		max. 5		μ A
Voltage between cathode and heater $V_{kf} = 100$ V					

CHARACTERISTICS (continued)

		I	II	
<u>Insulation resistance:</u>				
Between grid and other electrodes	R_{ins}		max. 300	$M\Omega$
Voltage between electrodes = 100 V				
Between anode and other electrodes	R_{ins}		max. 300	$M\Omega$
Voltage between electrodes = 300 V				
<hr/>				
<u>Vibrational noise output (20 to 5000 Hz)</u>	V_o		max. 10	mV _{RMS}
Anode supply voltage $V_{ba} = .250$ V				
Anode resistor $R_a = 5$ k Ω				
Grid voltage $-V_g = 2$ V				
Vibration frequency = 25 Hz				
Acceleration = 2.5 g				
Units in parallel				
CAPACITANCES				
Grid to cathode and heater	$C_{g/kf}$	1.6		pF
Anode to cathode and heater	$C_{a/kf}$	0.46		pF
	$C_{a'/kf}$	0.34		pF
Anode to grid	C_{ag}	1.7		pF
Grid to heater	C_{gf}		max. 0.15	pF
Anode to anode other system	$C_{aa'}$		max. 0.6	pF
Grid to grid other system	$C_{gg'}$		max. 10	mpF
Anode to grid other system	$C_{ag'}$		max. 60	mpF
	$C_{ga'}$		max. 60	mpF

LIMITING VALUES (Absolute max. rating system) (Each unit)

Anode voltage	V_{a0}	max. 600	V
	V_a	max. 330	V
Anode dissipation	W_a	max. 1.2	W
Grid voltage	$-V_g$	max. 55	V
	$+V_g$	max. 0.5	V
Cathode current	I_k	max. 9	mA

7Z2 7267

LIMITING VALUES (continued)

Grid resistor: fixed bias	R_g	max. 1.2	$M\Omega$
automatic bias	R_g	max. 2.2	$M\Omega$
grid current bias	R_g	max. 25	$M\Omega$
Voltage between cathode and heater	V_{kf}	max. 200	V
Resistance in cathode heater circuit in case of phase inverter circuit	R_{kf}	max. 135	$k\Omega$
Bulb temperature	t_{bulb}	max. 170	$^{\circ}C$
Microphony:			
Input voltage required for 50 mW output	V_i	min. 0.5	mV

Heater voltage: The average heater voltage should be 6.3 V
 Variations of the heater voltage exceeding the range of 6.0 V to 6.6 V will shorten the tube life.
 The tolerance of the heater current (column II) should be taken into account.

OPERATING CHARACTERISTICS

A.F. amplifier - circuit fig.1

Anode supply voltage	V_{ba}	200	250	300	350	400	V
Anode resistor	R_a	47	47	47	47	47	$k\Omega$
Cathode resistor	R_k	1500	1200	1000	820	680	Ω
Grid resistor next stage	$R_{g'}$	150	150	150	150	150	$k\Omega$
Anode current	I_a	0.86	1.18	1.55	1.98	2.45	mA
Output voltage (Grid current = 0.3 μA)	V_o	18	23	26	33	37	V_{RMS}
Voltage gain	V_o/V_i	34.0	37.5	40.0	42.5	44.0	
Total distortion	d_{tot}	8.5	7.0	5.0	4.4	3.6	%

OPERATING CHARACTERISTICS (continued)

A.F. amplifier - circuit fig.1 (continued)

Anode supply voltage	V_{ba}	200	250	300	350	400	V
Anode resistor	R_a	100	100	100	100	100	$k\Omega$
Cathode resistor	R_k	1800	1500	1200	1000	820	Ω
Grid resistor next stage	$R_{g'}$	330	330	330	330	330	$k\Omega$
Anode current	I_a	0.65	0.86	1.11	1.40	1.72	mA
Output voltage (Grid current = 0.3 μ A)	V_o	20	26	30	36	38	V_{RMS}
Voltage gain	V_o/V_i	50	54.5	57.0	61.0	63.0	
Total distortion	d_{tot}	4.8	3.9	3.7	2.2	1.7	%

Anode supply voltage	V_{ba}	200	250	300	350	400	V
Anode resistor	R_a	220	220	220	220	220	$k\Omega$
Cathode resistor	R_k	3300	2700	2200	1500	1200	Ω
Grid resistor next stage	$R_{g'}$	680	680	680	680	680	$k\Omega$
Anode current	I_a	0.36	0.48	0.63	0.85	1.02	mA
Output voltage (Grid current = 0.3 μ A)	V_o	24	28	36	37	38	V_{RMS}
Voltage gain	V_o/V_i	56	66.5	72.0	75.5	76.5	
Total distortion	d_{tot}	4.6	3.4	2.6	1.6	1.1	%

A.F. amplifier - circuit fig.2.

Anode supply voltage	V_{ba}	200	250	300	350	400	V
Anode resistor	R_a	47	47	47	47	47	$k\Omega$
Grid resistor next stage	$R_{g'}$	150	150	150	150	150	$k\Omega$
Anode current	I_a	1.02	1.45	2.02	2.50	3.10	mA
Output voltage	V_o	18	23	26	33	37	V_{RMS}
Voltage gain	V_o/V_i	37	39	41	44	45	
Total distortion	d_{tot}	5.6	4.2	2.9	2.7	2.5	%

OPERATING CHARACTERISTICS (continued)

A.F. amplifier - circuit fig.2. (continued)

Anode supply voltage	V_{ba}	200	250	300	350	400	V
Anode resistor	R_a	100	100	100	100	100	$k\Omega$
Grid resistor next stage	$R_{g'}$	330	330	330	330	330	$k\Omega$
Anode current	I_a	0.70	1.00	1.29	1.62	1.95	mA
Output voltage	V_o	20	26	30	36	38	V_{RMS}
Voltage gain	V_o/V_i	50	51	54	56	58	
Total distortion	d_{tot}	3.9	2.6	2.0	1.8	1.6	%

Anode voltage	V_{ba}	200	250	300	350	400	V
Anode resistor	R_a	220	220	220	220	220	$k\Omega$
Grid resistor next stage	$R_{g'}$	680	680	680	680	680	$k\Omega$
Anode current	I_a	0.39	0.56	0.75	0.88	1.09	mA
Output voltage	V_o	24	28	36	37	38	V
Voltage gain	V_o/V_i	58	62	66	67	68	
Total distortion	d_{tot}	4.6	2.7	2.2	1.7	1.4	%

A.F. amplifier - circuit fig.3.

Anode supply voltage	V_{ba}	100	150	200	250	300	350	400	V
Anode resistor	R_a	47	47	47	47	47	47	47	$k\Omega$
Grid resistor next stage	$R_{g'}$	150	150	150	150	150	150	150	$k\Omega$
Anode current	I_a	0.35	0.84	1.40	1.95	2.52	3.19	3.80	mA
Voltage gain	V_o/V_i	25	33	34	36	38	40	41	
Total distortion:									
at $V_o = 2 V_{RMS}$	d_{tot}	1.7	2.5	2.4	2.3	2.2	2.2	2.1	%
at $V_o = 4 V_{RMS}$	d_{tot}	2.1	4.6	4.7	4.6	4.5	4.2	4.2	%
at $V_o = 6 V_{RMS}$	d_{tot}	6.0	5.2	5.6	5.6	5.5	5.5	5.4	%

OPERATING CHARACTERISTICS (continued)

A.F. amplifier - circuit fig.3. (continued)

Anode supply voltage	V_{ba}	100	150	200	250	300	350	400	V
Anode resistor	R_a	100	100	100	100	100	100	100	k Ω
Grid resistor next stage	$R_{g'}$	330	330	330	330	330	330	330	k Ω
Anode current	I_a	0.24	0.56	0.88	1.23	1.58	1.92	2.29	mA
Voltage gain	V_o/V_i	34	43	46	48	50	51	52	
Total distortion:									
at $V_o = 2 V_{RMS}$	d_{tot}	1.6	1.9	1.9	1.8	1.8	1.8	1.7	%
at $V_o = 4 V_{RMS}$	d_{tot}	2.3	3.0	3.8	3.8	3.6	3.6	3.5	%
at $V_o = 6 V_{RMS}$	d_{tot}	2.6	4.7	5.1	5.1	5.0	4.9	4.8	%

Anode supply voltage	V_{ba}	100	150	200	250	300	350	400	V
Anode resistor	R_a	220	220	220	220	220	220	220	k Ω
Grid resistor next stage	$R_{g'}$	680	680	680	680	680	680	680	k Ω
Anode current	I_a	0.14	0.32	0.49	0.67	0.85	1.05	1.23	mA
Voltage gain	V_o/V_i	42	51	54	57	58	59	60	
Total distortion:									
at $V_o = 2 V_{RMS}$	d_{tot}	1.6	1.7	1.7	1.6	1.6	1.6	1.6	%
at $V_o = 4 V_{RMS}$	d_{tot}	2.5	3.0	3.0	2.9	2.9	2.8	2.7	%
at $V_o = 6 V_{RMS}$	d_{tot}	3.2	4.4	4.4	4.4	4.4	4.3	4.2	%

Phase inverter - circuit fig.4

Supply voltage	V_b	250	350	V
Anode voltage	V_a	65	90	V
Anode resistor	$R_a, R_{a'}$	100	150	k Ω
Cathode resistor	R_k	68	82	k Ω
Anode current	$I_a + I_{a'}$	1.0	1.2	mA
Voltage gain	V_o/V_i	25		27
Output voltage (Grid current = 0.3 μ A)	V_o	7	20	10 35 V_{RMS}
Total distortion	d_{tot}	0.6	1.8	0.5 1.8 %

V_a should be adjusted to the specified value for $I_a + I_{a'}$

722 7270

OPERATING CHARACTERISTICS (continued)

Phase inverter - circuit fig.5.

Supply voltage	V_b	250	350	V
Cathode resistor	R_k	1200	820	Ω
Anode current	$I_a + I_{a'}$	1.08	1.7	mA
Voltage gain	V_o/V_i	58		62
Output voltage (Grid current = $0.3 \mu A$)	V_o	7	35	9 45 V_{RMS}
Total distortion	d_{tot}	1.1	5.5	0.7 3.5 %

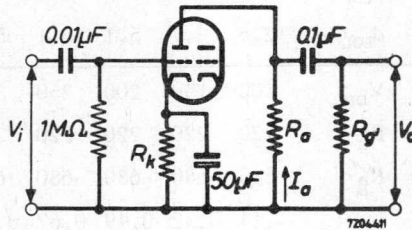


Fig. 1

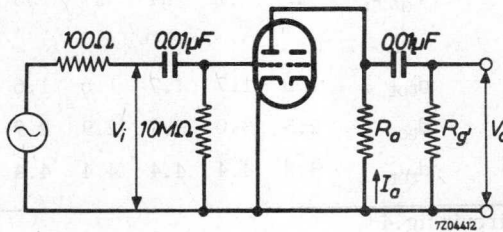


Fig. 2

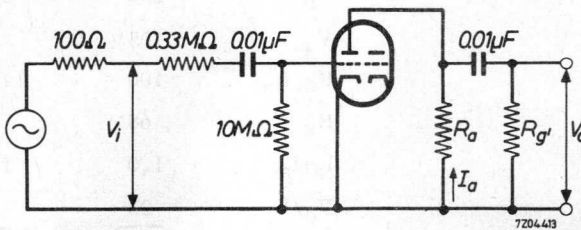


Fig. 3

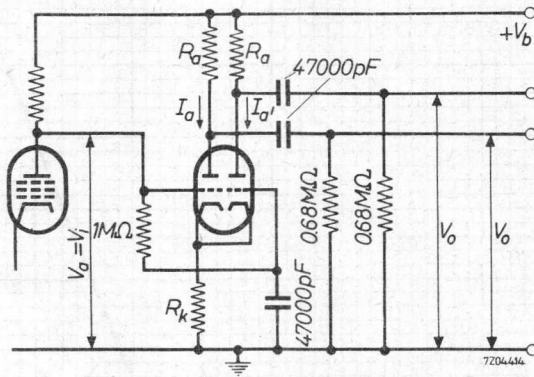


Fig. 4



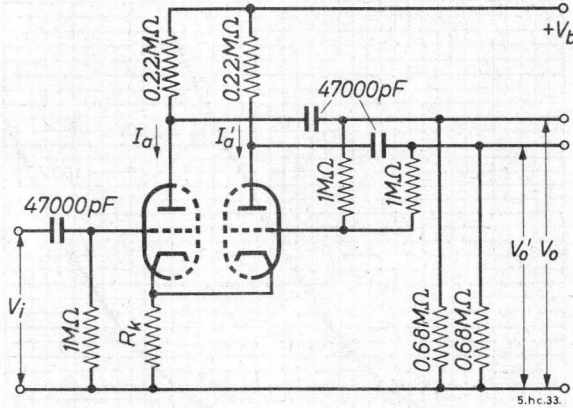



Fig. 5

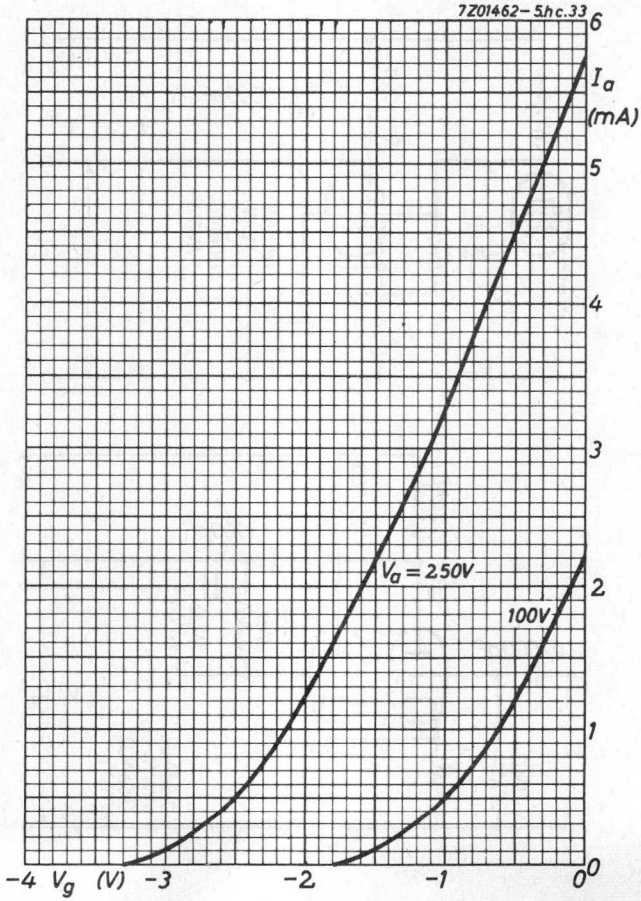


7Z01463-5.hc.33


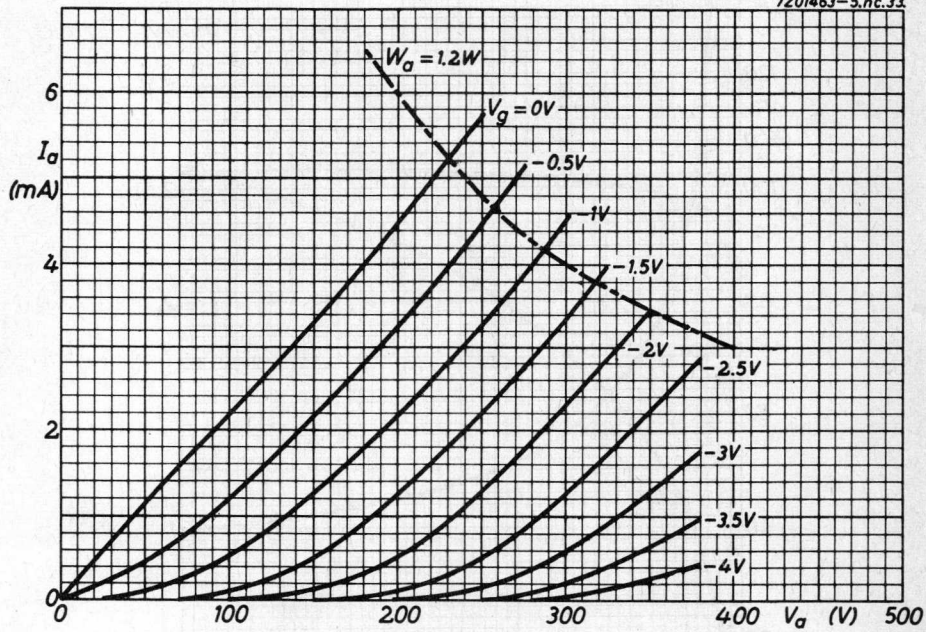


7Z01464-5, hc.33

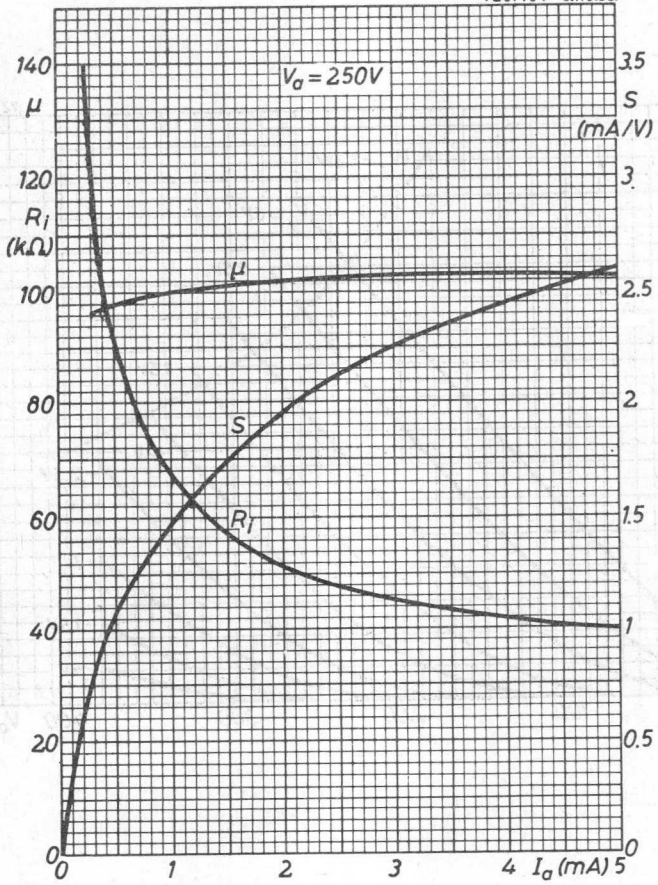

7Z01465-5,hc.33

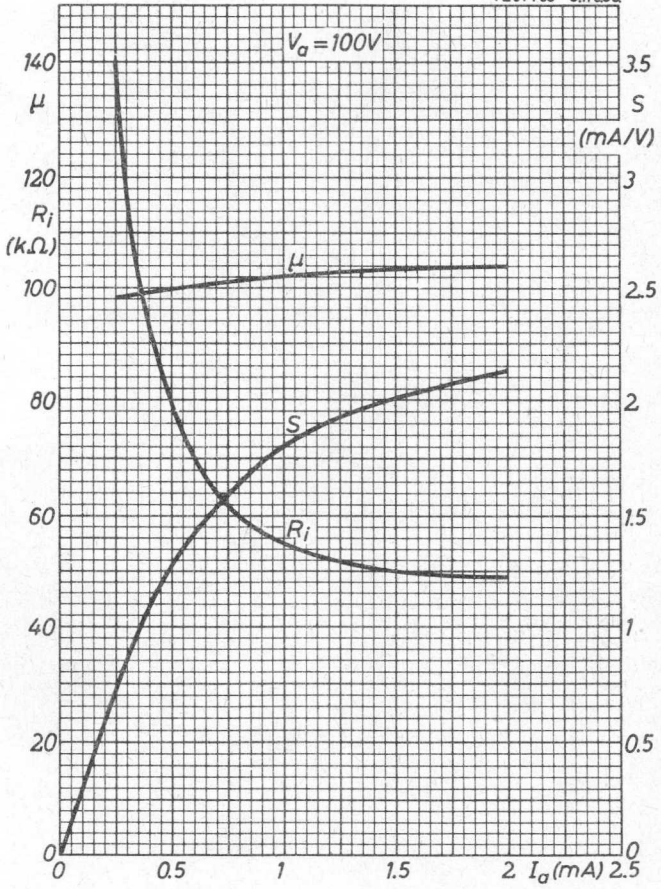

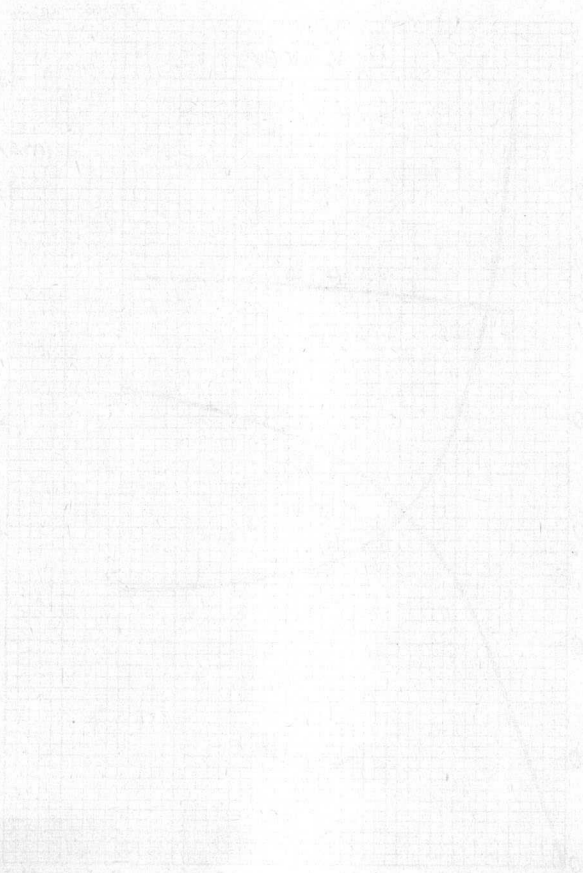

S.Q. TUBE

Special quality pentode designed for use in telephone equipment.



QUICK REFERENCE DATA

Life expectancy	10 000 hours	
Low interface resistance		
Base	Noval. Gold plated pins	
Heating	Indirect A.C. or D.C. Series or parallel supply	
Heater voltage	V_f	6.3 V
Heater current	I_f	0.3 A
Anode current	I_a	10 mA
Mutual conductance	S	9 mA/V

DIMENSIONS AND CONNECTIONS

Dimensions in mm

Base: Noval



7Z2 6036

CHARACTERISTICS

Column I Nominal value or setting of the tube.

II Range values for equipment design: Initial spread

III Range values for equipment design: End of life

		I	II	III	
Heater voltage	V_f	6.3			V
Heater current	I_f	300	285 - 315		mA
Anode voltage	V_a	210			V
Grid No.3 voltage	V_{g_3}	0			V
Grid No.2 voltage	V_{g_2}	120			V
Cathode resistor	R_k	165			Ω
Anode current	I_a	10	8.7 - 11.3	7	mA
Grid No.2 current	I_{g_2}	2.1	1.7 - 2.5	1.25	mA
Mutual conductance	S	9	7.8 - 10.2	6.4	mA/V
Internal resistance	R_i	0.5	min. 0.3		M Ω
Amplification factor grid No.2 to grid No.1	$\mu_{g_2g_1}$	38			
Equivalent noise resistance (R.F.)	R_{eq}	750	max. 1000		Ω
Equivalent noise resistance (A.F.)	R_{eq}		max. 36		k Ω
<u>Negative grid No.1 current</u>	$-I_{g_1}$		max. 0.5	max. 1.0	μA
<u>Hum voltage</u>	V_{g_1}		max. 0.5		mV _{RMS}
Grid resistor $R_{g_1} = 0.5 M\Omega$ Cathode resistor by passed					
<u>Cut off voltage</u>	$-V_{g_1}$	5	max. 5.25		V
Anode voltage	V_a	210			V
Grid No.3 voltage	V_{g_3}	0			V
Grid No.2 voltage	V_{g_2}	120			V
Anode current	I_a	0.5			mA

CHARACTERISTICS (continued)

Leakage current between
cathode and heater

Voltage between heater
and cathode $V_{kf} = 100$ V

	I	II	III	
I_{kf}		max. 15		μA
R		min. 100		$M\Omega$

Insulation resistance between
two arbitrary electrodes

Voltage between electrodes $V = 250$ V

CAPACITANCES

Radiation capacitances measured to a surrounding cylinder, internal diameter 52 mm, height 98 mm.

	I	II	
Grid No.1 to grid No.2, grid No.3, cathode, heater and screen	C_{g_1/g_2g_3kfs}	8	8.7 pF
Grid No.1 to grid No.2, grid No.3, cathode, heater and screen Cathode current = 12.1 mA	C_{g_1/g_2g_3kfs}	10.8	pF
Anode to grid No.2, grid No.3, cathode, heater and screen	C_{a/g_2g_3kfs}	3.5	max. 4.1 pF
Anode to grid No.1	C_{ag_1}		max. 15 mpF
Grid No.1 to heater	$C_{g_{1f}}$		max. 0.15 pF
Cathode to heater	C_{kf}	4	pF
Grid No.1 radiation capacitance	C_{rg_1}	max. 25	mpF
Anode radiation capacitance	C_{ra}	max. 25	mpF

LIFE EXPECTANCY

When the tube is operated under the following conditions the range values of the characteristics in column III may be expected not to be exceeded during an operation period of 10 000 hours.

Anode voltage	V_a	210	V
Grid No.3 voltage	V_{g_3}	0	V
Grid No.2 voltage	V_{g_2}	120	V
Cathode resistor	R_k	165	Ω

7Z2 7Z72

LIMITING VALUES (Design centre rating system)


Anode voltage	V_{a0}	max.	550	V
	V_a	max.	210	V
Anode dissipation	W_a	max.	2.1	W
Grid No.2 voltage	V_{g20}	max.	550	V
	V_{g2}	max.	210	V
Grid No.2 dissipation	W_{g2}	max.	0.35	W
Grid No.1 voltage	$-V_{g1}$	max.	100	V
Grid No.1 voltage, peak	$-V_{g1p}$	max.	200	V
Duty factor max. 0.1				
Pulse duration max. 200 μ s				
Grid No.1 dissipation	W_{g1}	max.	50	mW
Grid No.1 resistor (automatic bias)	R_{g1}	max.	1	M Ω
Cathode current	I_k	max.	16	mA
Cathode current peak value	I_{kp}	max.	80	mA
Duty factor max. 0.1				
Pulse duration max. 200 μ s				
Voltage between heater and cathode	V_{kf}	max.	100	V
Bulb temperature (absolute maximum)	t_{bulb}	max.	170	$^{\circ}$ C


OPERATING CHARACTERISTICS



Output tube. Class A



Anode voltage	V_a	120	210	V				
Grid No.3 voltage	V_{g3}	0	0	V				
Grid No.2 supply voltage	V_{bg2}	120	120	V				
Grid No.2 resistor	R_{g2}	5.6	5.6	k Ω				
Cathode resistor	R_k	180	180	Ω				
Anode current	I_a	8.3	8.3	mA				
Grid No.2 current	I_{g2}	1.7	1.7	mA				
Mutual conductance	S	8.2	8.2	mA/V				
Internal resistance	R_i	0.42	0.44	M Ω				
Load resistance	$R_{a\sim}$	10	20	k Ω				
Input voltage	V_i	0.35	1.1	-	0.25	1.1	-	V_{RMS}
Grid No.1 current	$+I_{g1}$	-	-	0.3	-	-	0.3	μ A
Grid No.1 resistor	R_{g1}	-	-	0.33	-	-	0.33	M Ω
Total distortion	d_{tot}	-	10	-	-	10	-	%
Output power	W_o	50	340	400	50	660	870	mW


7Z2 7273

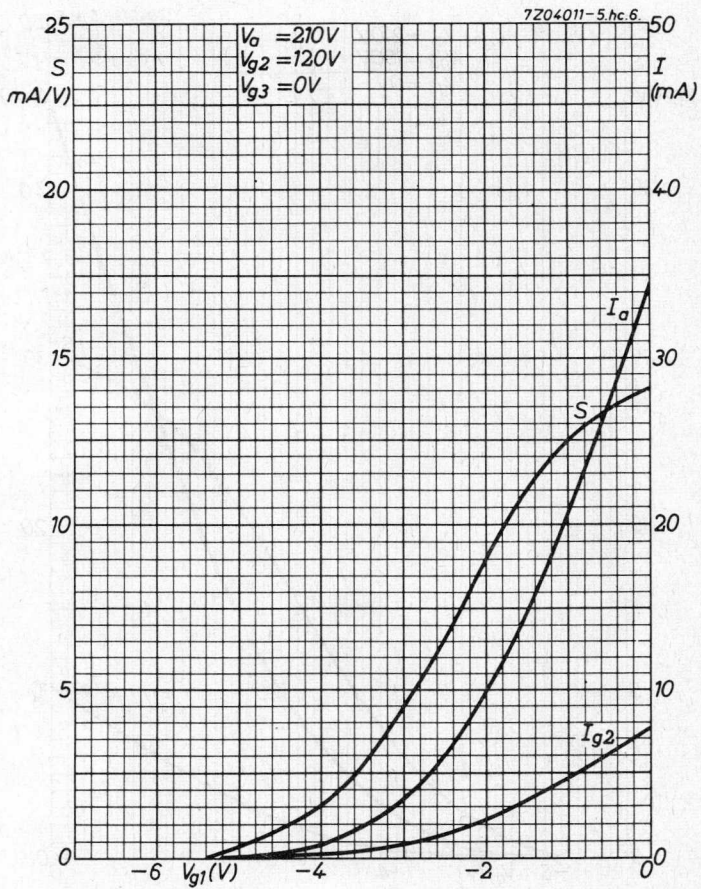



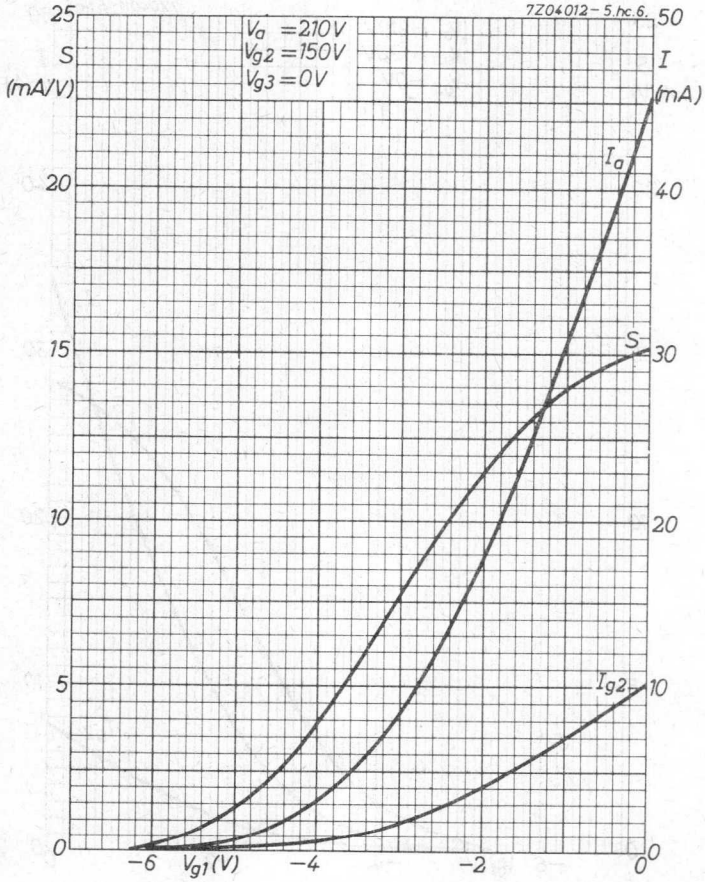


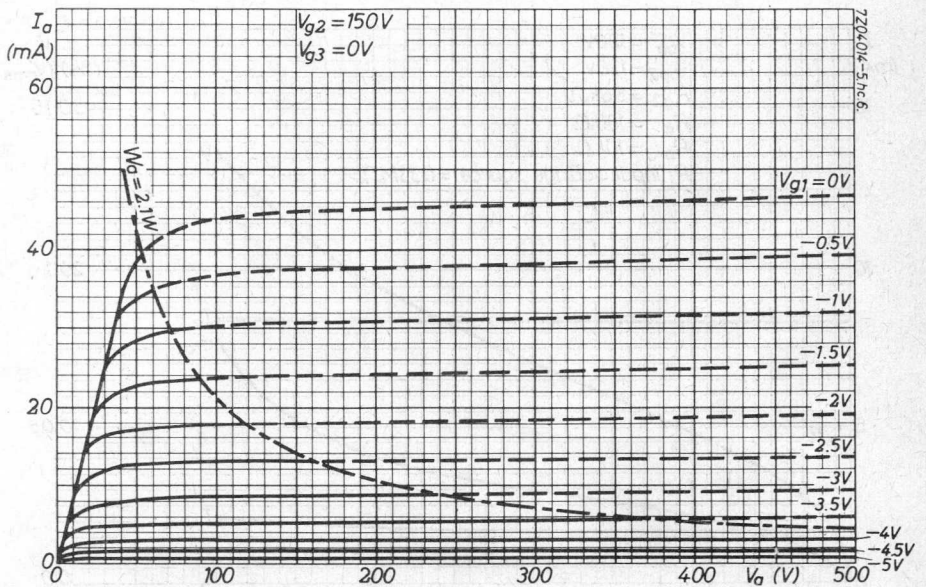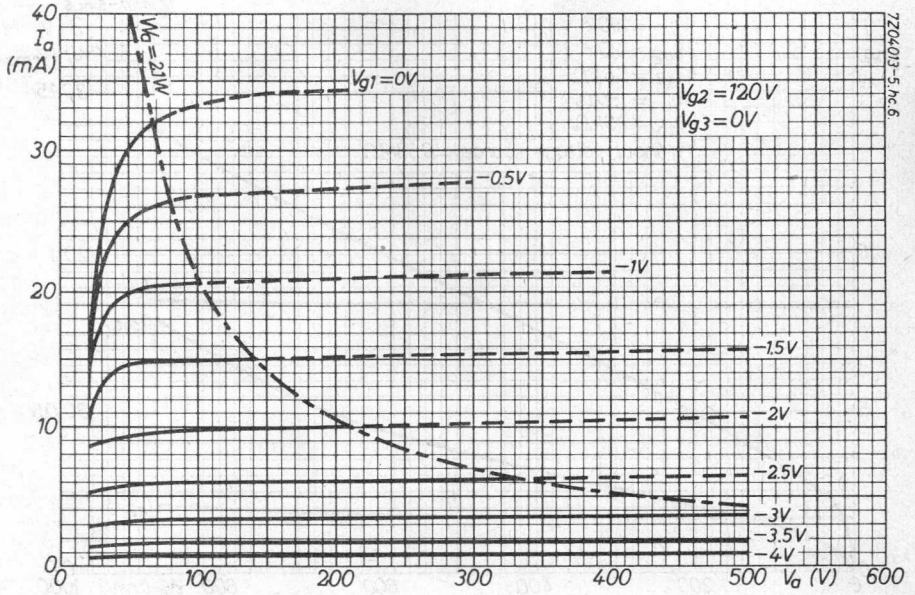

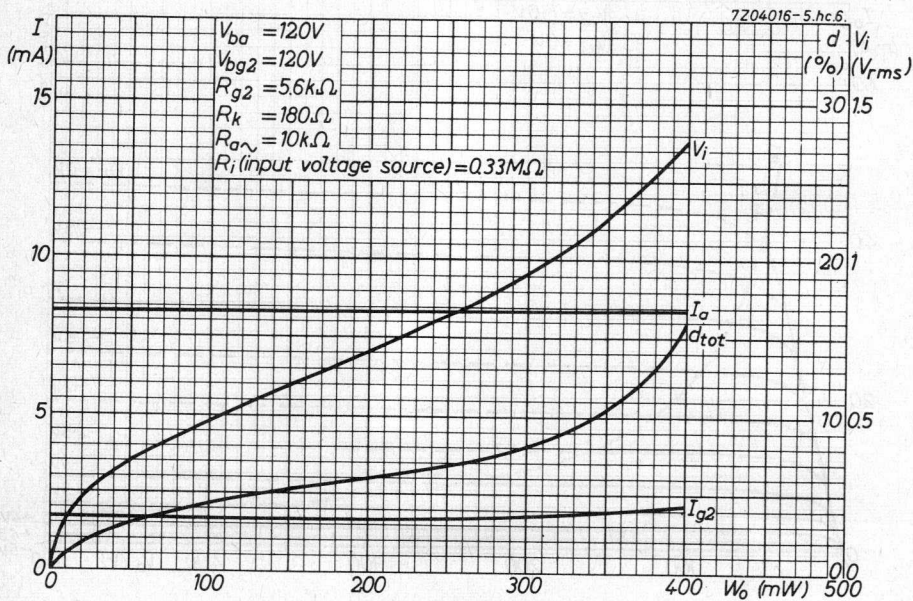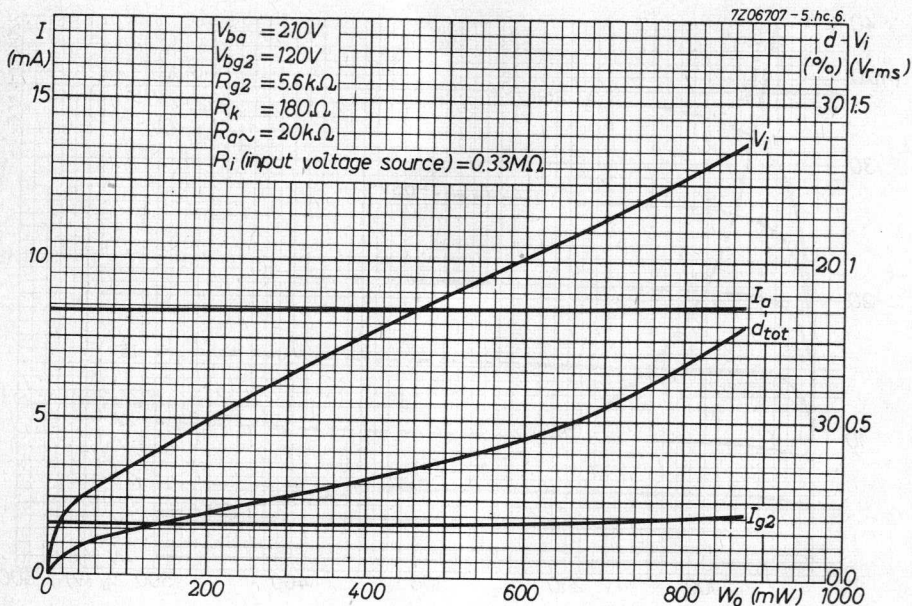


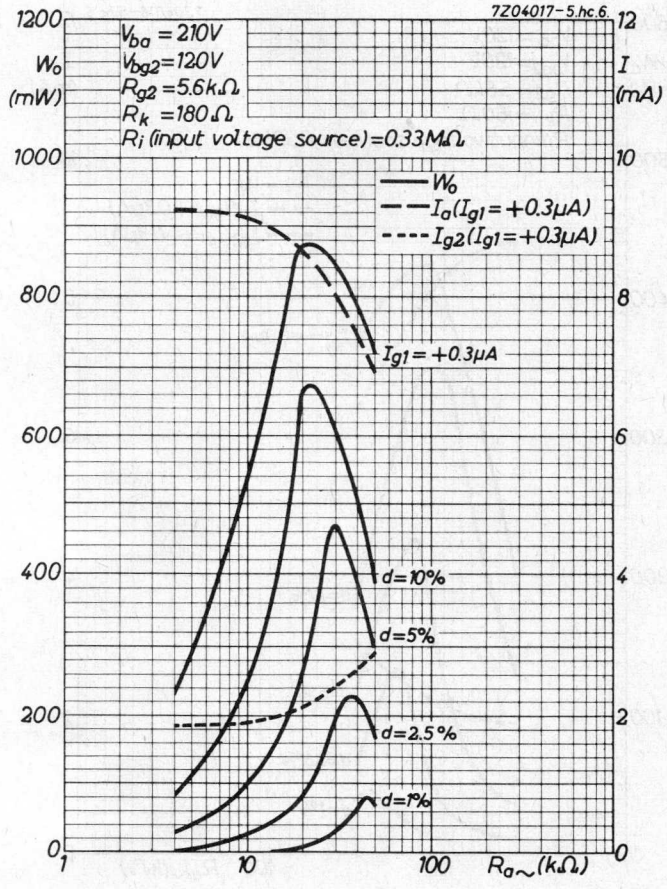

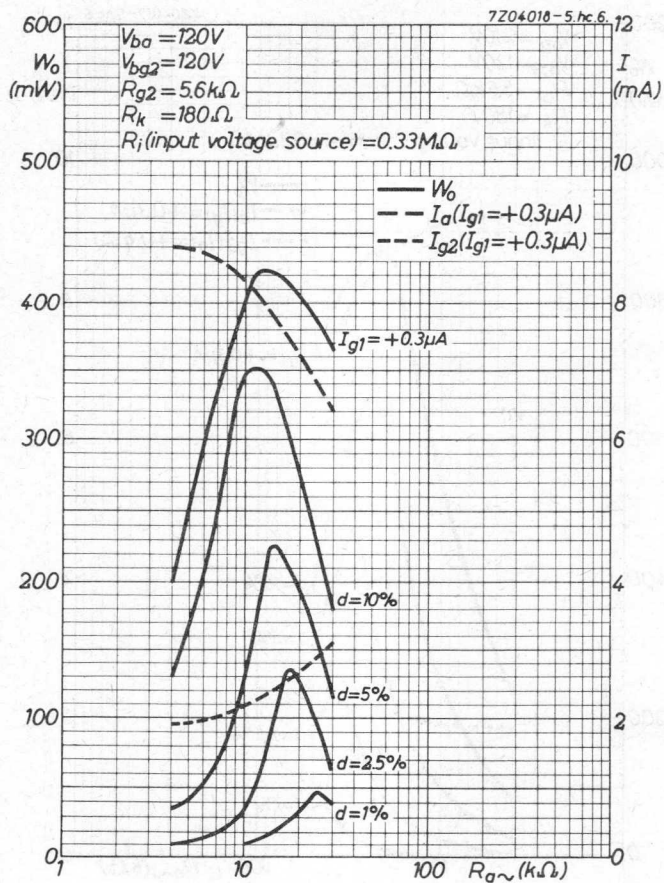

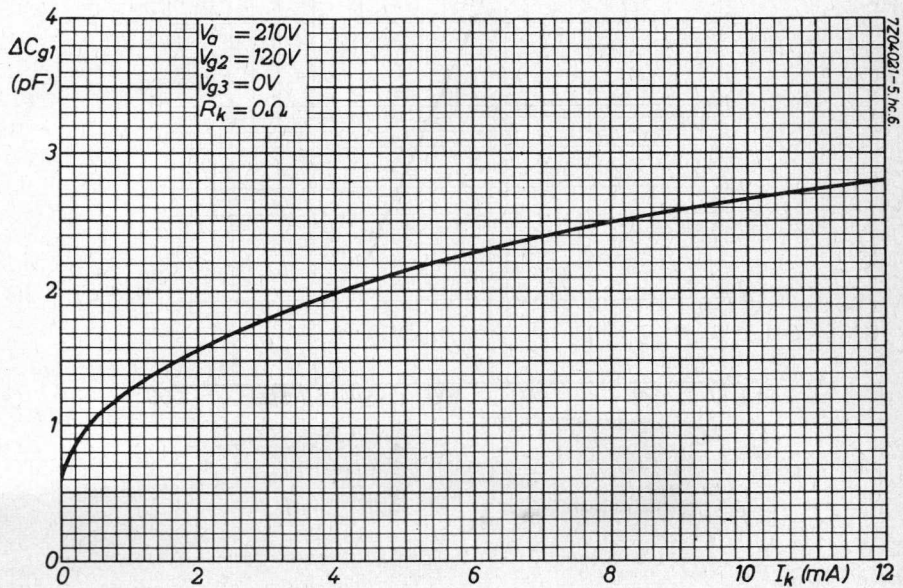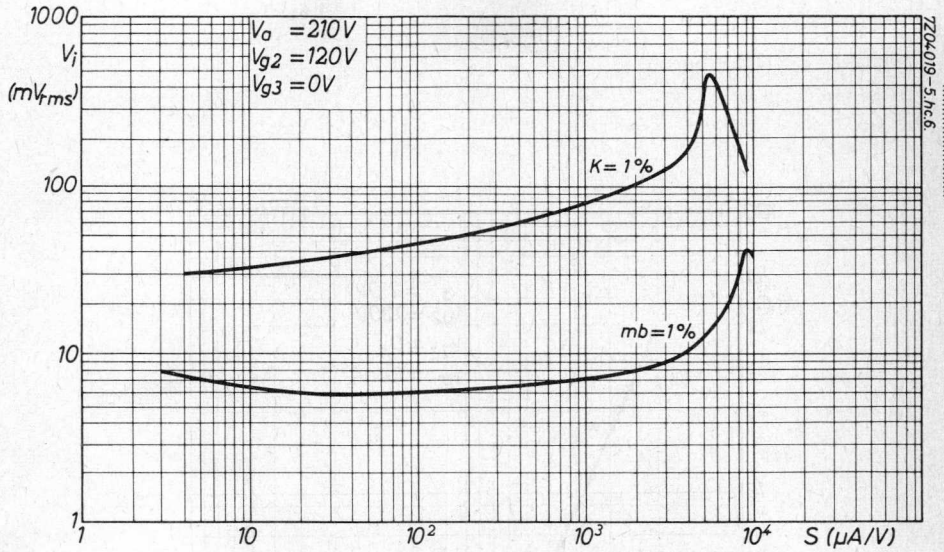

7204020-5 hc.6.

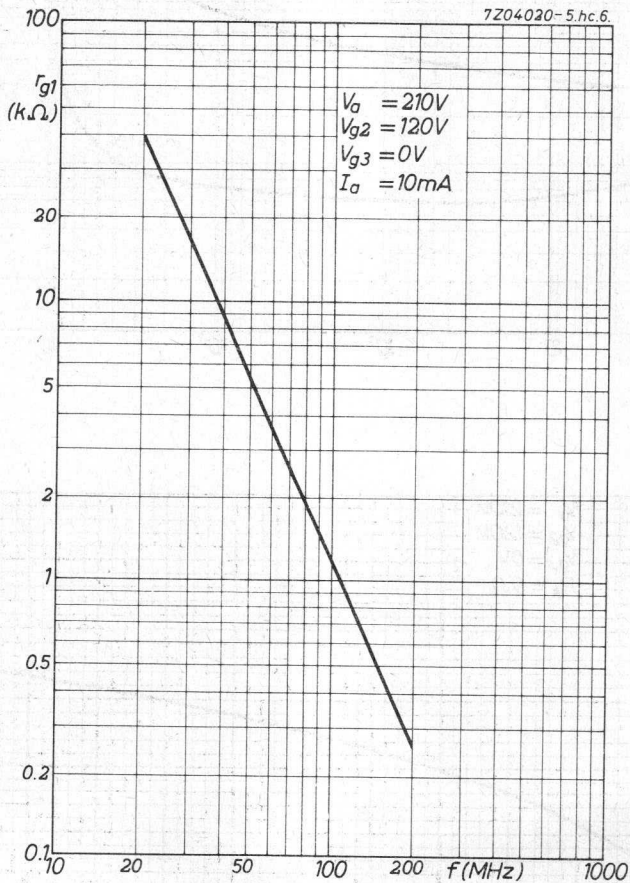

S.Q. TUBE

Special quality output pentode designed for use as wide band amplifier, series regulator tube and power output tube.



QUICK REFERENCE DATA

Life test	10 000 hours	
Low interface resistance		
Mechanical quality	Shock and vibration resistant	
Base	Noval	
Heating	Indirect A. C. or D. C. ; parallel supply	
Heater voltage	V_f	6.3 V
Heater current	I_f	760 mA
Anode current	I_a	48 mA
Mutual conductance	S	11.3 mA/V
Output power, one tube	W_o	6 W

DIMENSIONS AND CONNECTIONS

Dimensions in mm

Base: Noval

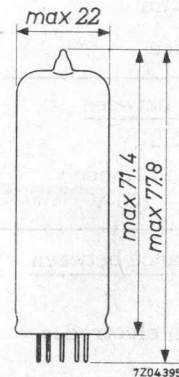

7Z2 7Z74

CHARACTERISTICS

Column I Nominal values or setting of the tube

II Range values for equipment design: Initial spread

III Range values for equipment design: End of life

		I	II	III	
Heater voltage	V_f	6.3			V
Heater current	I_f	760	720 - 800		mA
Anode voltage	V_a	250			V
Grid No.2 voltage	V_{g2}	250			V
Cathode resistor	R_k	135			Ω
Anode current	I_a	48	42 - 54	min. 32	mA
Grid No.2 current	I_{g2}	5.5	4 - 7		mA
Mutual conductance	S	11.3	9.2 - 13.4	min. 7.5	mA/V
Amplification factor	μ_{g2g1}	19			
Internal resistance	R_i	40			$k\Omega$
Negative grid current	$-I_{g1}$		max. 0.5	max. 1.0	μA
<u>As triode</u>					
Anode voltage	V_a	250			V
Cathode resistor	R_k	270			Ω
Anode current	I_a	34			mA
Mutual conductance	S	10.2			mA/V
Amplification factor	μ	18.5			
Internal resistance	R_i	1.8			$k\Omega$
<u>Leakage current between cathode and heater</u>					
	I_{kf}		max. 12.5		μA
Voltage between cathode and heater $V_{kf} = 100$ V					
<u>Insulation resistance between electrodes</u>					
	R		min. 100		$M\Omega$
Voltage between electrodes = 300 V					

CAPACITANCES

		I	II	
Anode to grid No. 2, grid No. 3 cathode and heater	C_{a/g_2g_3kf}	6.0	5.2 - 6.8	pF
Grid No. 1 to grid No. 2, grid No. 3 cathode and heater	C_{g_1/g_2g_3kf}	10	9 - 11	pF
Anode to grid No. 1	C_{ag_1}		max. 0.5	pF
Grid No. 1 to heater	C_{g_1f}		max. 0.25	pF

SHOCK AND VIBRATION RESISTANCE

The following test conditions are applied to assess the mechanical quality of the tube. These conditions are not intended to be used as normal operating conditions.

Shock

The tube is subjected 5 times in each of 4 positions to an acceleration of 500 g supplied by an NRL shock machine with the hammer lifted over an angle of 30°.

Vibration

The tube is subjected during 32 hours in each of 3 positions to a vibration frequency of 50 Hz with an acceleration of 2.5 g.

LIFE

Production samples are tested to be within the end of life values (column III) during 10 000 hours

LIMITING VALUES (Absolute max. rating system)

Anode voltage	V_{a_0}	max.	600	V
	V_a	max.	450	V
Anode dissipation	W_a	max.	13.5	W
Grid No. 2 voltage	$V_{g_{20}}$	max.	600	V
	V_{g_2}	max.	450	V
Grid No. 2 dissipation				
Continuously	W_{g_2}	max.	2.2	W
Peak value in case of excitation by speech and music	$W_{g_{2p}}$	max.	4.4	W

7Z2 7276

LIMITING VALUES (continued)

Grid No.1 dissipation	W_{g1}	max.	0.5 W
Grid No.1 voltage	$-V_{g1}$	max.	100 V
Cathode current	I_k	max.	75 mA
Grid resistor			
Fixed bias	R_{g1}	max.	0.5 M Ω
Automatic bias	R_{g1}	max.	1.0 M Ω
Voltage between cathode and heater	V_{kf}	max.	100 V
Bulb temperature	t_{bulb}	max.	225 °C

Heater voltage: The average heater voltage should be 6.3 V.

Variations of the heater voltage exceeding the range of 6.0 V to 6.6 V will shorten the tube life.

The tolerance of heater current (column II) should be taken into account.

OPERATING CHARACTERISTICSOutput tube class A (one tube) 2)3)

Anode voltage	V_a	250	V
Grid No.2 voltage	V_{g2}	250	V
Cathode resistor	R_k	135	Ω
Load resistance	$R_{a\sim}$	4.5	k Ω
Input voltage	V_i	0 0.3 3.5 4.4 4.8 ¹⁾	V_{RMS}
Anode current	I_a	48	50.5 50.5 mA
Grid No.2 current	I_{g2}	5.5	10.0 11.0 mA
Output power	W_o	0 0.05 4.5 5.7 6.0	W
Total distortion	d_{tot}		7.5 10 %
Second harmonic	d_2		5.7 5.0 %
Third harmonic	d_3		4.5 8.0 %

OPERATING CHARACTERISTICS (continued)

Output tube class A (one tube) 2)3)

Anode voltage	V_a	250	V
Grid No.2 voltage	V_{g2}	250	V
Cathode resistance	R_k	135	Ω
Load resistance	$R_{a\sim}$	5.2	$k\Omega$

Input voltage	V_i	0	0.3	3.4	4.3	4.7 ¹⁾	V_{RMS}
Anode current	I_a	48			49.5	49.2	mA
Grid No.2 current	I_{g2}	5.5			10.8	11.6	mA
Output power	W_o	0	0.05	4.5	5.7	6.0	W
Total distortion	d_{tot}			6.8	10		%
Second harmonic	d_2			3.0	2.0		%
Third harmonic	d_3			5.8	9.5		%

Anode voltage	V_a	250	V
Grid No.2 voltage	V_{g2}	250	V
Cathode resistance	R_k	210	Ω
Load resistance	$R_{a\sim}$	7.0	$k\Omega$

Input voltage	V_i	0	0.3	3.5	5.5 ¹⁾	V_{RMS}
Anode current	I_a	36		36.8	36	mA
Grid No.2 current	I_{g2}	4.1		8.5	14.6	mA
Output power	W_o	0	0.05	4.2	5.6	W
Total distortion	d_{tot}			10		%
Second harmonic	d_2			1.7		%
Third harmonic	d_3			8.7		%

OPERATING CHARACTERISTICS (continued)

Output tube class A (one tube) ²⁾

Anode voltage	V_a	250	V
Grid No.2 voltage	V_{g_2}	210	V
Cathode resistor	R_k	160	Ω
Load resistance	$R_{a\sim}$	7.0	$k\Omega$

Input voltage	V_i	0 0.3	3.4 3.8 ¹⁾	V_{RMS}
Anode current	I_a	36	36.6 36.5	mA
Grid No.2 current	I_{g_2}	3.9	7.3 8.0	mA
Output power	W_o	0 0.05	4.3 4.7	W
Total distortion	d_{tot}		10	%
Second harmonic	d_2		1.8	%
Third harmonic	d_3		9.3	%

Output tube class AB (two tubes) ²⁾

Anode voltage	V_a	250	300	V
Grid No.2 voltage	V_{g_2}	250	300	V
Cathode resistor	R_k	130	130	Ω
Load resistance	$R_{aa\sim}$	8	8	$k\Omega$
Input voltage	V_i	0 8	0 10 ³⁾	V_{RMS}
Anode current	I_a	2x31 2x37.5	2x36 2x46	mA
Grid No.2 current	I_{g_2}	2x3.5 2x7.5	2x4 2x11	mA
Output power	W_o	0 11	0 17	W
Total distortion	d_{tot}		3 4	%

OPERATING CHARACTERISTICS (continued)

Output tube class B (two tubes)

Anode voltage	V_a	250	300	V	
Grid No. 2 voltage	V_{g2}	250	300	V	
Grid No. 1 voltage	$-V_{g1}$	11.6	14.7	V	
Load resistance	$R_{aa \sim}$	8	8	$k\Omega$	
Input voltage	V_i	0	8	0	10^3) V_{RMS}
Anode current	I_a	2x10	2x37.5	2x7.5	2x46 mA
Grid No. 2 current	I_{g2}	2x1.1	2x7.5	2x0.8	2x11 mA
Output power	W_o	0	11	0	17 W
Total distortion	d_{tot}		3		4 %

As triodeOutput tube class A (one tube)

Anode voltage	V_a	250	V	
Cathode resistor	R_k	270	Ω	
Load resistance	$R_{a \sim}$	3.5	$k\Omega$	
Input voltage	V_i	0	1.0	6.7 V_{RMS}
Anode current	I_a	34	36	mA
Output power	W_o	0	0.05	1.95 W
Total distortion	d_{tot}			9.0 %

Output tube class AB (2 tubes)

Anode voltage	V_a	250	300	V			
Cathode resistor	R_k	270	270	Ω			
Load resistance	$R_{aa \sim}$	10	10	$k\Omega$			
Input voltage	V_i	0	0.95	8.3	0	0.9	10 V_{RMS}
Anode current	I_a	2x20		2x21.7	2x24		2x26 mA
Output power	W_o	0	0.05	3.4	0	0.05	5.2 W
Total distortion	d_{tot}			2.5			2.5 %


1) Grid No. 1 current $I_{g1} = 0.3 \mu A$



2) Measured with fixed bias



3) With speech and music signal


7Z2 7279



7Z01427-5.hd.12

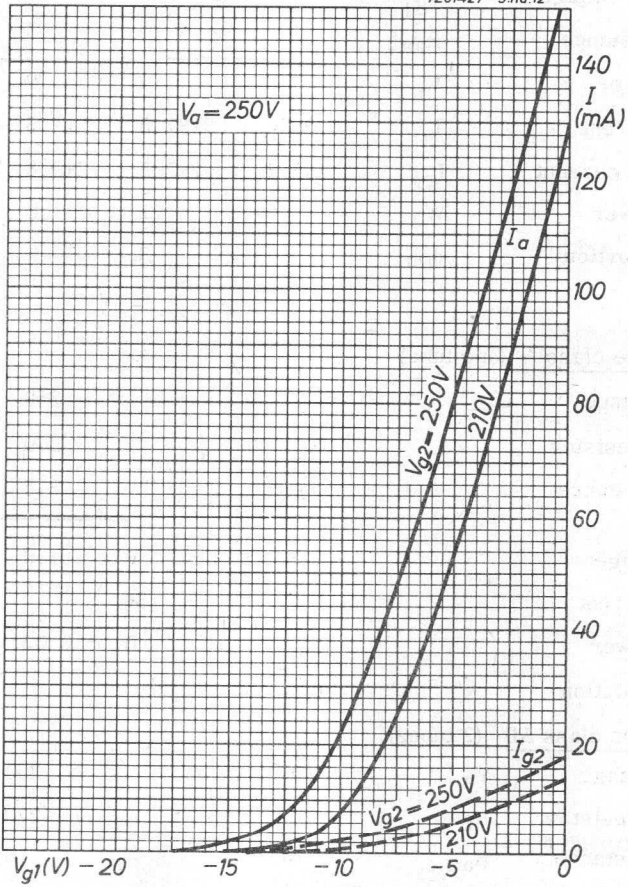

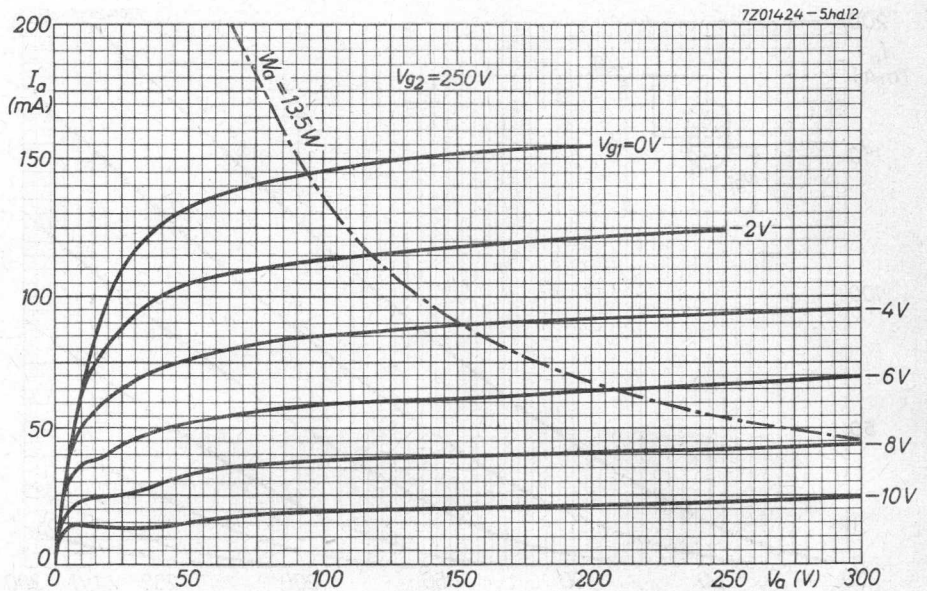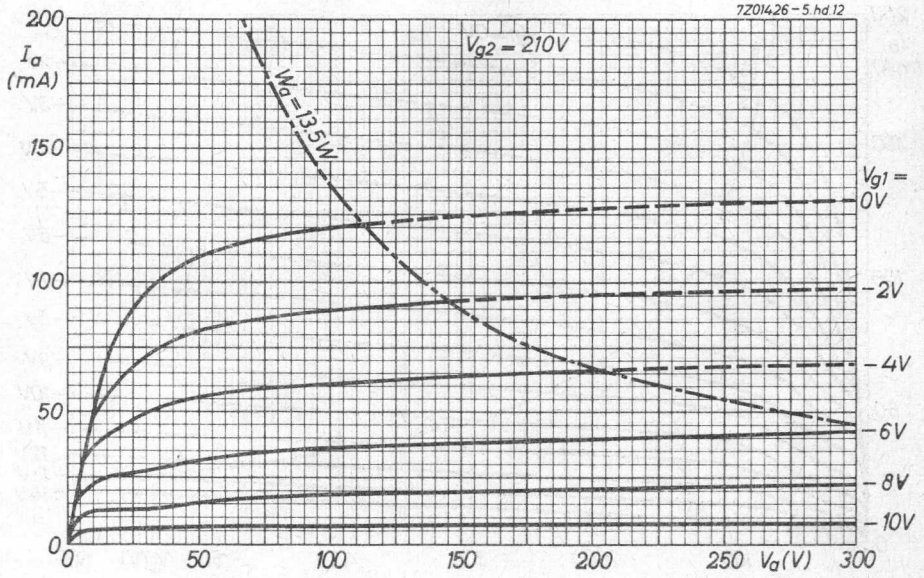

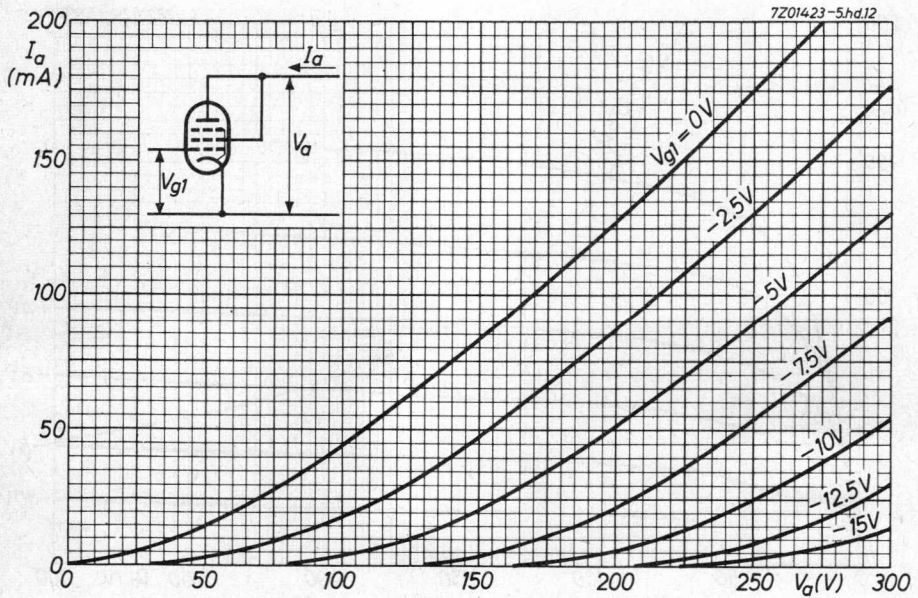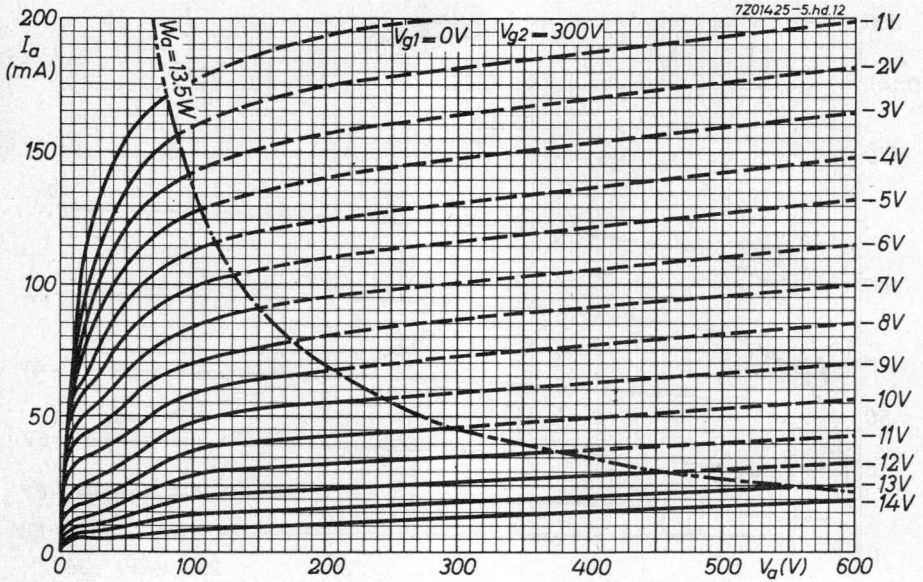

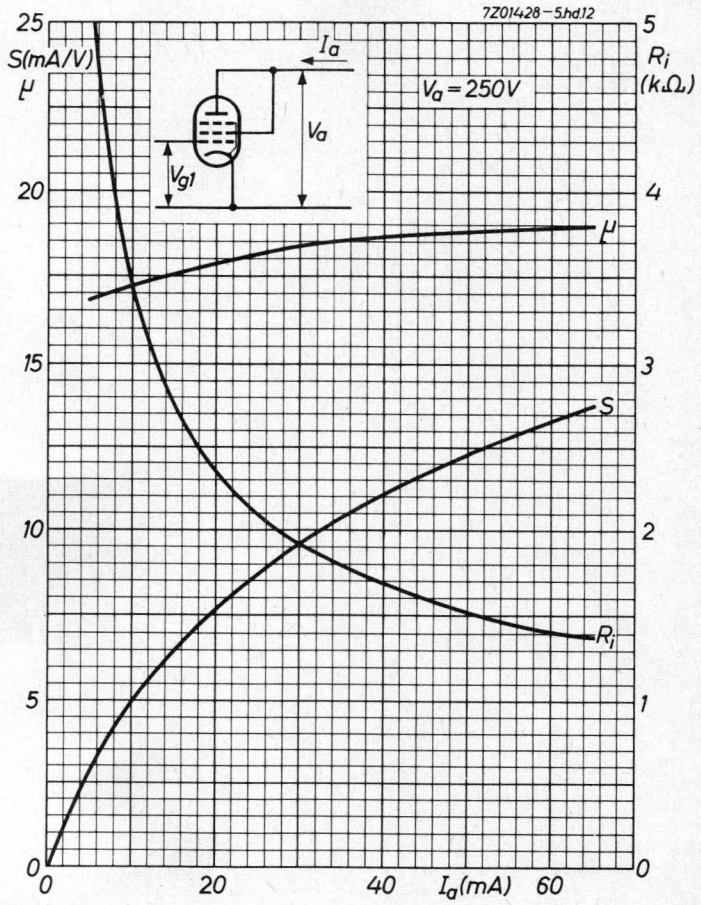

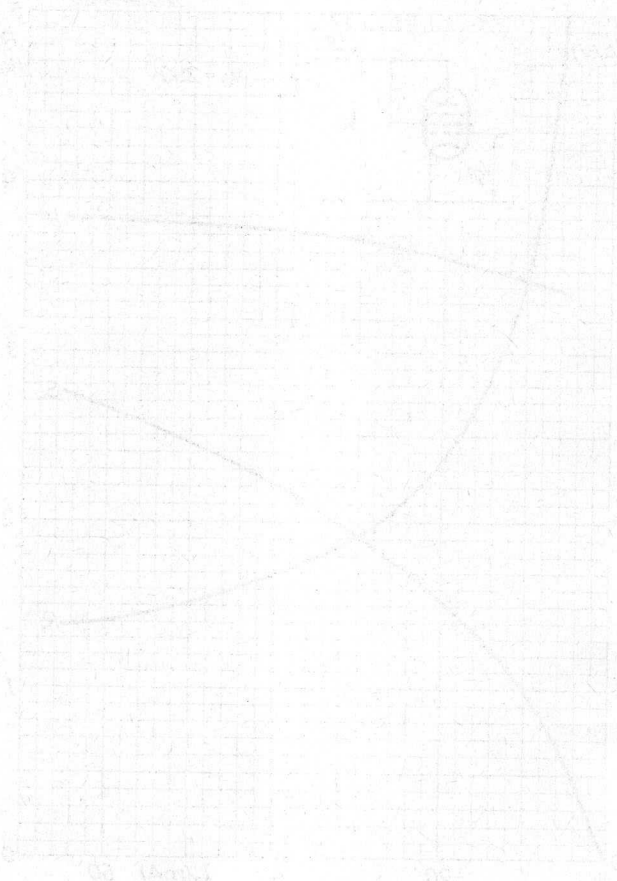

S.Q. TUBE

Special quality U.H.F. triode designed for use as oscillator, amplifier and self-oscillating mixer (max. frequency 800 MHz):


QUICK REFERENCE DATA

Life	10 000 hours	
Low interface resistance		
Mechanical quality	Shock and vibration resistant	
Base	Noval. Gold plated pins.	
Heating	Indirect A.C. or D.C.; Parallel supply	
Heater voltage	V_f	6.3 V
Heater current	I_f	165 mA
Anode current	I_a	12 mA
Mutual conductance	S	14 mA/V

DIMENSIONS AND CONNECTIONS

Dimensions in mm

Base: Noval

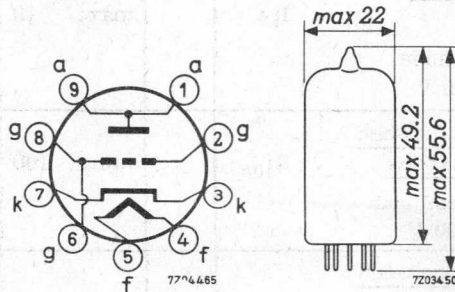

7Z2 7280

CHARACTERISTICS

Column I Nominal value or setting of the tube

II Range values for equipment design: Initial spread

III Range values for equipment design: End of life

		I	II	III	
Heater voltage	V_f	6.3			V
Heater current	I_f	165	155 - 175		mA
Anode supply voltage	V_{ba}	185			V
Grid supply voltage	$+V_{bg}$	8			V
Cathode resistor	R_k	800			Ω
Anode current	I_a	12	11.2 - 12.8	min. 10.5	mA
Mutual conductance	S	14	11.5 - 17	min. 9.5	mA/V
Amplification factor	μ	68			
<u>Negative grid current</u>	$-I_g$		max. 0.5	max. 1.0	μA
<u>Cut-off voltage</u>	$-V_g$		max. 5		V
Anode current $I_a = 0.1$ mA					
<u>Equivalent noise resistance</u>	R_{eq}	250			Ω
<u>Input resistance</u>	r_g	2			k Ω
Frequency = 100 MHz					
<u>Phase angle of slope</u>	φ_s	-7			o
Frequency = 100 MHz					
<u>Leakage current between cathode and heater</u>	I_{kf}		max. 10		μA
Voltage between cathode and heater $V_{kf} = 100$ V					
<u>Insulation resistance between anode and other electrodes</u>	R_{ins}		min. 100		M Ω
Voltage between anode and other electrode = 300 V					
<u>Insulation resistance between grid and other electrode</u>	R_{ins}		min. 100		M Ω
Voltage between grid and other electrode = 100 V					

7Z2 7281

CAPACITANCES

		I	II	
Anode to grid	C_{ag}	2	1.7 - 2.3	pF
Anode to cathode	C_{ak}	0.2	0.16 - 0.24	pF
Grid to cathode	C_{gk}	3.6	3.0 - 4.2	pF
Grid to heater	C_{gf}		max. 0.3	pF
Cathode to grid and heater	$C_{k/gf}$	6.6	5.5 - 7.7	pF
Anode to grid and heater	$C_{a/gf}$	2.1	1.75 - 2.45	pF
Grid to cathode and heater	$C_{g/kf}$	3.9	3.3 - 4.5	pF
Anode to cathode and heater	$C_{a/kf}$	0.3	0.25 - 0.35	pF
Grid to cathode	C_{gk}	5.6		pF
Anode current $I_a = 12$ mA				
<u>With external shield</u>				
Anode to grid and shield	$C_{a/gs}$	3.1	2.8 - 3.4	pF
Grid and shield to cathode and heater	$C_{gs/kf}$	4.2	3.6 - 4.8	pF
Anode to cathode and heater	$C_{a/kf}$	0.25	0.2 - 0.3	pF

SHOCK AND VIBRATION RESISTANCE

The following test conditions are applied to assess the mechanical quality of the tube. These conditions are not intended to be used as normal operating conditions.

Shock

The tube is subjected 5 times in each of 4 positions to an acceleration of 500 g supplied by an NRL shock machine with the hammer lifted over an angle of 30°.

Vibration

The tube is subjected during 32 hours in each of 3 positions to a vibration frequency of 50 Hz with an acceleration of 2.5 g.

LIFE

Production samples are tested to be within the end of life values (column III) during 10 000 hours.

Heater voltage: The average heater voltage should be 6.3 V. Variations of the heater voltage exceeding the range of 6.0 V to 6.6 V will shorten the tube life. The tolerance of heater current (column II) should be taken into account.

7Z2 7282

LIMITING VALUES (Absolute max. rating system)


Anode voltage	V_{a_0}	max. 440	V
	V_a	max. 250	V
Anode dissipation	W_a	max. 2.4	W
Grid voltage	$-V_g$	max. 50	V
Grid dissipation	W_g	max. 20	mW
Grid resistor	R_g	max. 1.2	M Ω
Cathode current	I_k	max. 20	mA
Voltage between cathode and heater	V_{kf}	max. 100	V
Bulb temperature	t_{bulb}	max. 165	$^{\circ}\text{C}$
Frequency (as amplifier)	f	up to 800	MHz


OPERATING CHARACTERISTICSAs R.F. amplifier, grounded grid


Anode supply voltage	V_{ba}	185	175	V
Grid supply voltage	V_{bg}	8	0	V
Cathode resistor	R_k	800	125	Ω
Anode current	I_a	12	12	mA
Mutual conductance	S	14	14	mA/V


As mixer

Anode supply voltage	V_{ba}	220	V
Anode resistor	R_a	5.6	k Ω
Grid resistor	R_g	47	k Ω
Anode current	I_a	12	mA
Grid current	I_g	50	μA

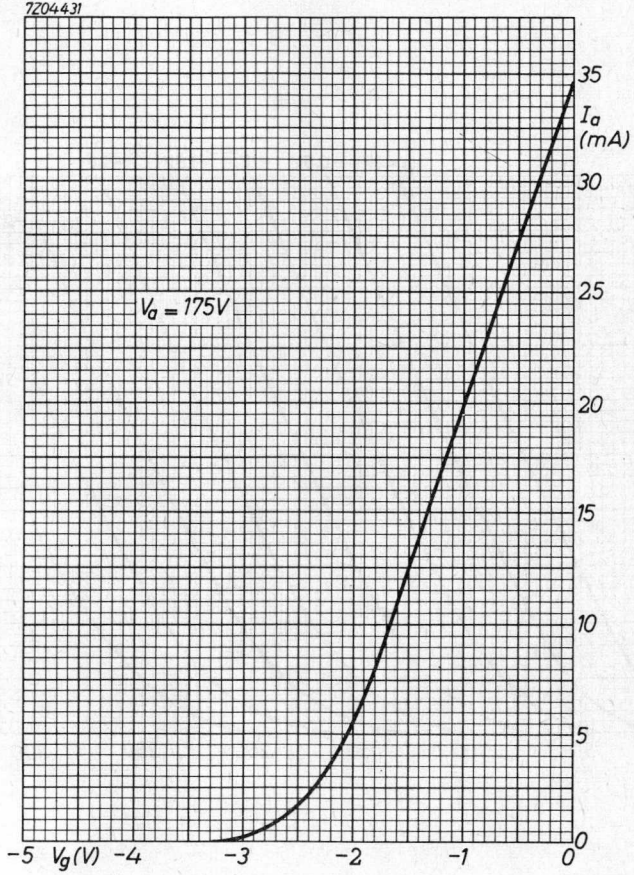

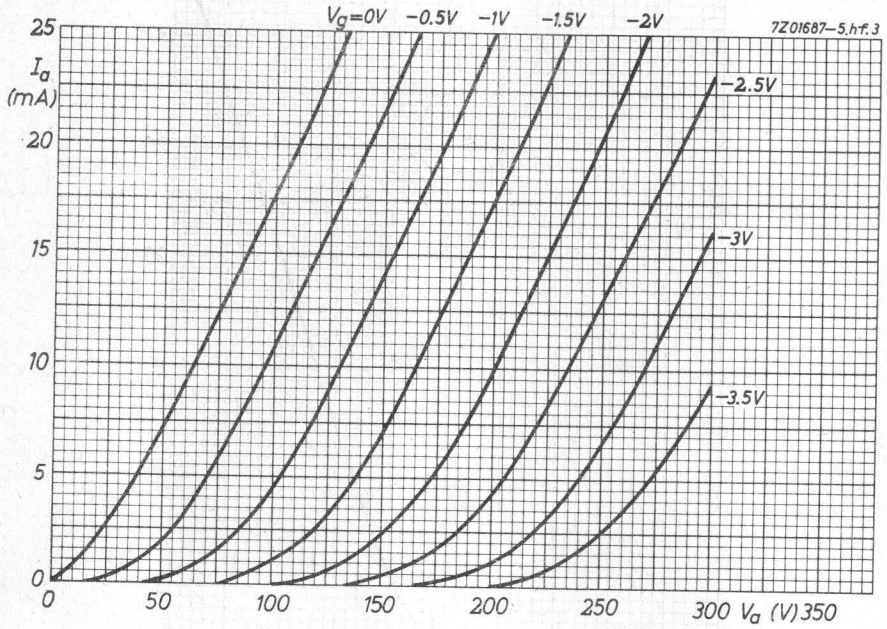

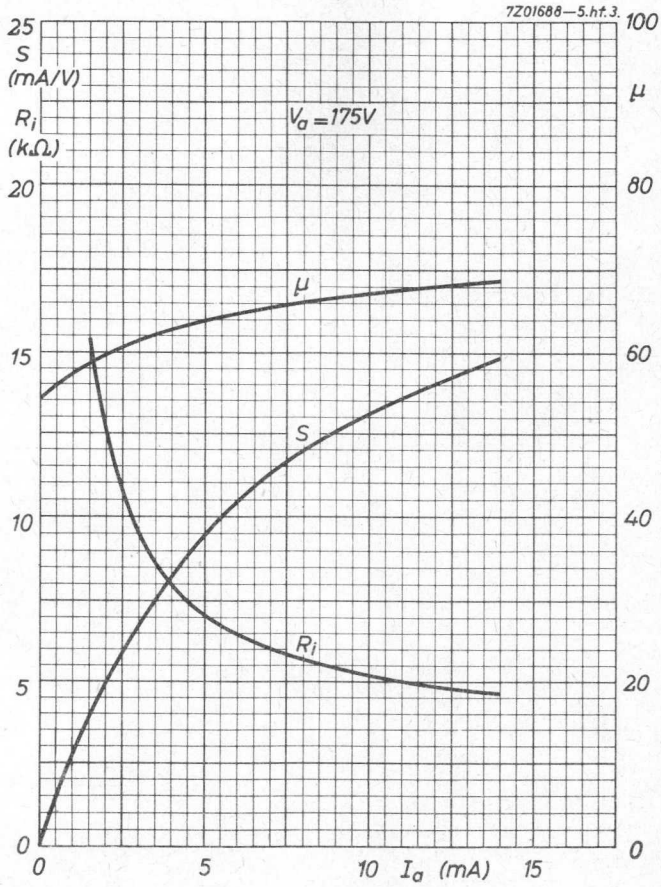

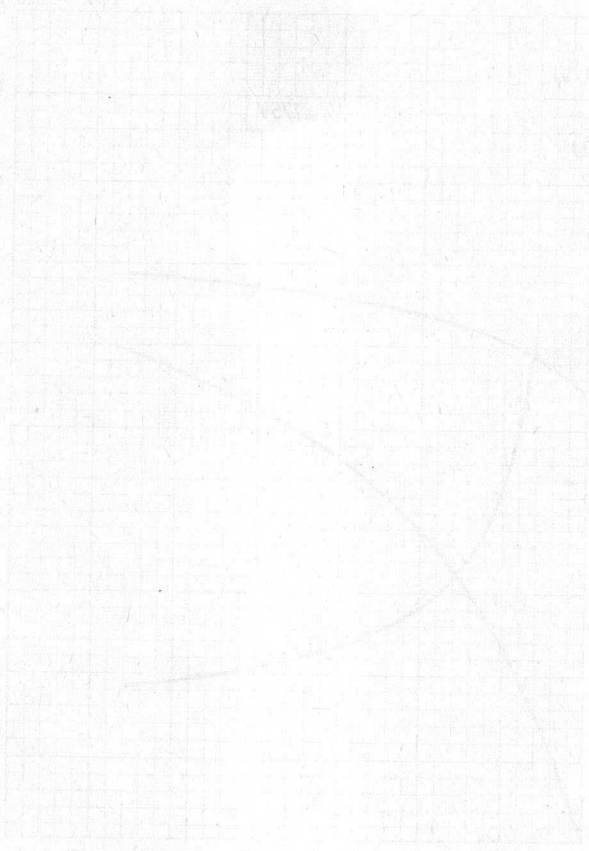

S.Q. TUBE

Special quality triode. Designed for use as grounded grid aerial amplifier for band IV and V.



QUICK REFERENCE DATA

Life test	10 000 hours	
Low interface resistance		
Mechanical quality	Shock and vibration resistant	
Base	Noval. Gold plated pins	
Heating	Indirect A.C. or D.C.; parallel supply	
Heater voltage	V_f	6.3 V
Heater current	I_f	155 mA
Anode current	I_a	12.5 mA
Mutual conductance	S	13.5 mA/V
Noise figure at 850 MHz	F	9.6 dB
Equivalent noise resistance	R_{eq}	240 Ω

DIMENSIONS AND CONNECTIONS

Dimensions in mm

Base: Noval



7Z2 7284

CHARACTERISTICS

Column I Nominal value

II Range values for equipment design: Initial spread

		I	II	
Heater voltage	V_f	6.3		V
Heater current	I_f	155	147- 163	mA
Anode voltage	V_a	160		V
Grid voltage	$-V_g$	1.25		V
Anode current	I_a	12.5		mA
Mutual conductance	S	13.5		mA/V
Amplification factor	μ	70		
Internal resistance	R_i	5.2		k Ω
Equivalent noise resistance	R_{eq}	240		Ω
Noise figure	F	9.6		dB
Frequency 850 MHz				
Bandwidth 15 MHz				
Anode supply voltage	V_{ba}	170		V
Cathode resistor	R_k	820		Ω
Grid supply voltage	$+V_{bg}$	9		V
Anode current	I_a	12.5		mA
Mutual conductance	S	13.5	10.5-16.5	mA/V
Anode supply voltage	V_{ba}	161		V
Cathode resistor	R_k	100		Ω
Grid supply voltage	V_{bg}	0		V
Anode current	I_a	12.5	9.5-16.1	mA
Mutual conductance	S	13.5		mA/V
Grid current, negative	$-I_g$		max. 0.1	μA
<u>Leakage current between cathode and heater</u>	I_{kf}		max. 15	μA
Voltage between cathode and heater $V_{kf} = 125$ V				

CHARACTERISTICS (continued)Input series resonance frequency ¹⁾

	I	
f_{inp}	1700	MHz

Output series resonance frequency ¹⁾

f_{outp}	1000	MHz
------------	------	-----

CAPACITANCES

		With screen		Without screen		
		I	II	I	II	
Anode to cathode and heater	$C_{a/kf}$	50	35- 65			mpF
Grid to cathode and heater	$C_{g/kf}$	3.8	3.2-4.4			pF
Anode to grid	C_{ag}	1.7	1.4-2.0	1.1	0.9 - 1.3	pF

SHOCK AND VIBRATION RESISTANCE

The following test conditions are applied to assess the mechanical quality of the tube. These conditions are not intended to be used as normal operating conditions.

Shock

The tube is subjected 5 times in each of 4 positions to an acceleration of 500 g supplied by an NRL shock machine with the hammer lifted over an angle of 30°.

Vibration

The tube is subjected during 32 hours in each of 3 positions to a vibration frequency of 50 Hz with an acceleration of 2.5 g.

LIFE

Production samples are tested during 10 000 hours under the following conditions:

Anode supply voltage	V_{ba}	170 V
Grid supply voltage	$+V_{bg}$	9 V
Cathode resistor	R_k	820 Ω

¹⁾ Measured between the tube pin connected to the relevant electrode and a metal reference plane placed against the tube bottom. The relevant pin and the reference plane are connected to the measuring device so that the minimum distance is obtained between these two connecting points. The remaining tube pins are connected to the reference plane with a negligible impedance. The tube is screened by a cylinder with an internal diameter of 23 mm placed on the reference plane.

LIMITING VALUES (Absolute max. rating system)

Anode voltage	V_{a0}	max.	400 V
	V_a	max.	200 V
Anode dissipation	W_a	max.	2.6 W
Cathode current	I_k	max.	16.5 mA
Grid voltage	$-V_g$	max.	50 V
Grid dissipation	W_g	max.	50 mW
Grid resistor	R_g	max.	1 M Ω
Cathode resistor $R_k = 100 \Omega$			
Voltage between cathode and heater			
Cathode positive	$V_{kf(k+)}$	max.	125 V
Cathode negative	$V_{kf(k-)}$	max.	60 V
Bulb temperature	t_{bulb}	max.	170 °C

Heater voltage: The average heater voltage should be 6.3 V.

Variation of the heater voltage exceeding the range of 6.0 V to 6.6 V will shorten the tube life.

OPERATING CHARACTERISTICS

Driver or output tube (circuit fig. 1)

Frequency	f	800	MHz
Bandwidth		8	MHz
Anode supply voltage	V_{ba}	200	V
Anode resistor	R_a	1.5	k Ω
Cathode resistor	R_k	150	Ω
Input voltage	V_i	0 0.5 1.65	V_{RMS}
Anode current	I_a	11.4 12.8	mA
Output voltage	V_o	0 2.0 6.0	$V_{RMS}^1)$
Inter modulation ratio		min. 26	dB
Sync. impuls compression		max. 30	%

1) Value of the sync. level with video modulation according to CCIR and with $Z = 60 \Omega$. 7Z2 7287




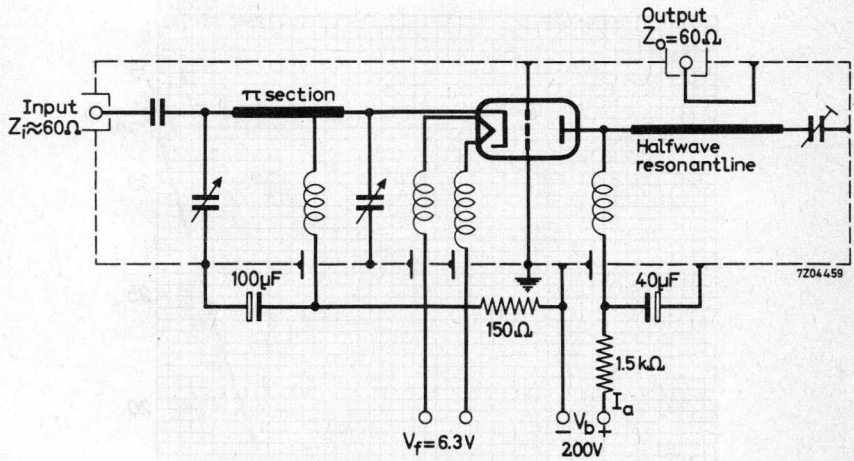


Fig. 1

7Z00843
E88C 25-1-62

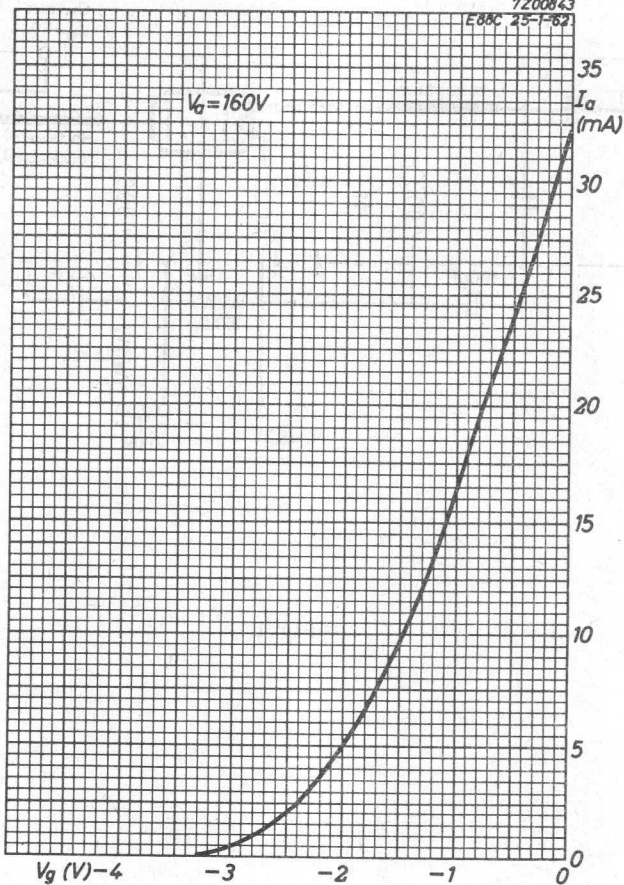

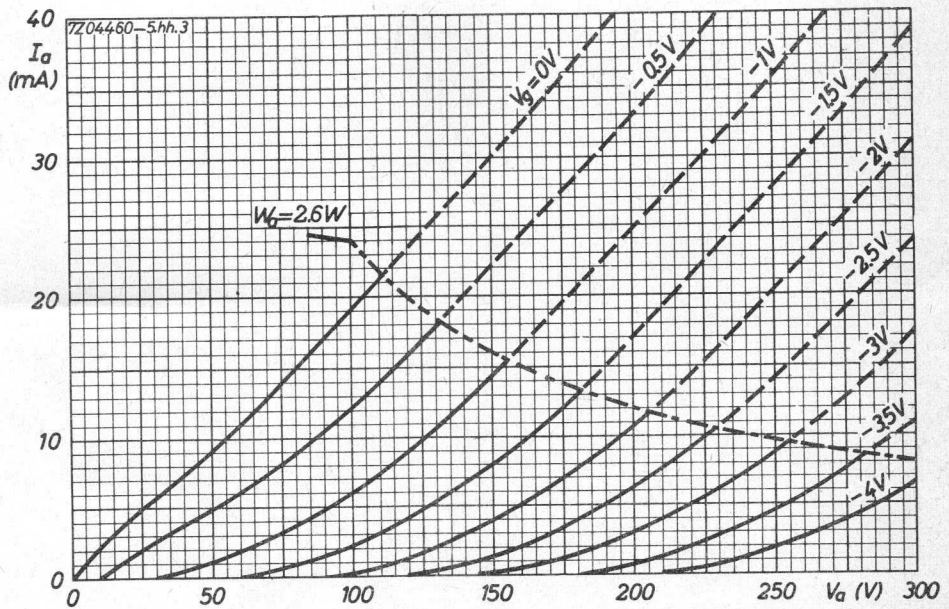

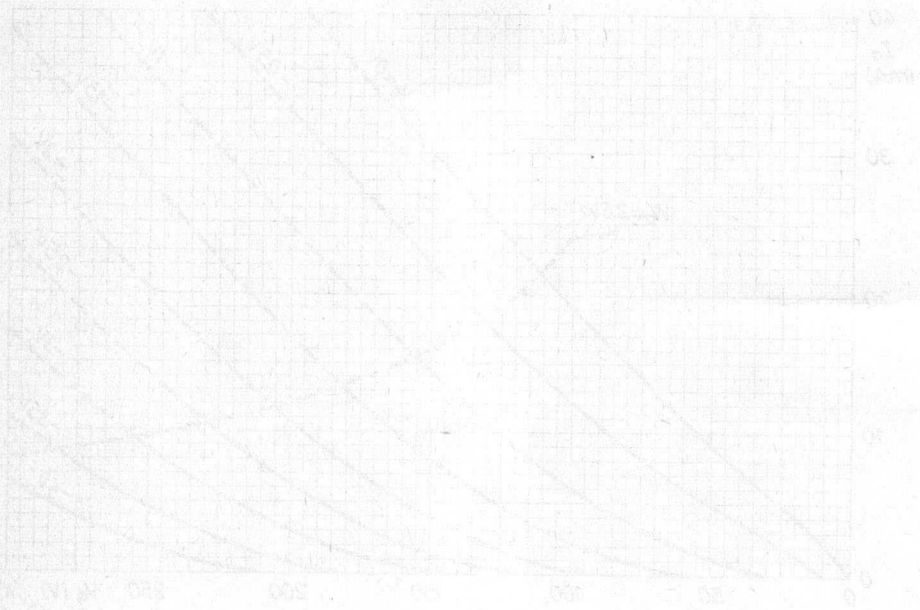

S.Q. TUBE

Special quality double triode designed for
 Cascode circuits
 H.F. or I.F. amplifiers
 Mixer or phase inverter stages
 Multivibrator and cathode follower in computers


QUICK REFERENCE DATA

Life	10 000 hours	
Low interface resistance		
Mechanical quality	Shock and vibration resistant	
Base	Noval. Gold plated pins	
Heating	Indirect A.C. or D.C.; parallel supply	
Heater voltage	V_f	6.3 V
Heater current	I_f	300 mA
Anode current	I_a	15 mA
Mutual conductance	S	12.5 mA/V
Equivalent noise resistance	R_{eq}	300 Ω
Noise factor (f = 200 MHz)	F	4.6 dB

DIMENSIONS AND CONNECTIONS

Dimensions in mm

Base: Noval

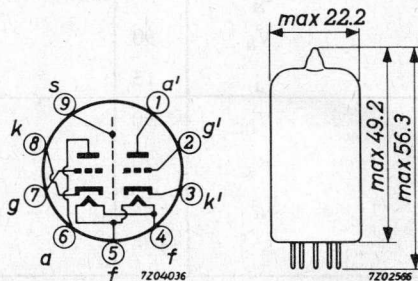

7Z2 7288

CHARACTERISTICS

Column I Nominal value or setting of the tube

II Range values for equipment design: Initial spread

III Range values for equipment design: End of life

		I	II	III	
Heater voltage	V_f	6.3			V
Heater current	I_f	300	285 - 315		mA
Anode supply voltage	V_{ba}	100			V
Grid supply voltage	$+V_{bg}$	9			V
Cathode resistor	R_k	680			Ω
Anode current	I_a	15	14.2 - 15.8	min. 13.5	mA
Mutual conductance	S	12.5	10.5 - 15	min. 9	mA/V
Amplification factor	μ	33			
<u>Equivalent noise resistance</u>	R_{eq}	300			Ω
Frequency = 45 MHz					
<u>Noise figure</u>	F	4.6			dB
Frequency = 200 MHz					
In cascode circuit adapted to minimum noise					
<u>Input resistance</u>	r_g	3			k Ω
Frequency = 100 MHz					
<u>Start of grid current</u>	V_g	0.75			V_{RMS}
<u>Negative grid current</u>	$-I_g$		max. 0.1	max. 1	μA
Anode voltage	V_a	90			V
Anode current	I_a	15			mA
Anode supply voltage	V_{ba}	90			V
Cathode resistor	R_k	120			Ω
Anode current	I_a	12			mA
Mutual conductance	S	11.5			mA/V

7Z2 7289

CHARACTERISTICS (continued)

		I	II	III	
<u>Cut-off voltage</u>	$-V_g$	6.5	5 - 8.5		V
Anode voltage	V_a	150			V
Anode current	I_a	0.1			mA
<hr/>					
<u>Difference in grid voltage</u> of two sections	$ V_g - V_g' $		max. 2	max. 2	V
Anode voltage	$V_a = V_a'$	150			V
Anode current	$I_a = I_a'$	0.1			mA
Anode supply voltage	V_{ba}	150			V
Negative grid voltage	$-V_g$	15			V
Anode current	I_a		max. 5		μA
<hr/>					
<u>In circuit fig.1 "pag.7"</u>					
Anode supply voltage	V_{ba}	150			V
Anode current (not permitted continuously)	I_a	33	28 - 38		mA
Anode supply voltage	V_{ba}	60			V
Anode current	I_a		max. 9		mA
<hr/>					
<u>Leakage current between cathode and heater</u>	I_{kf}		max. 6	max. 12	μA
Voltage between cathode and heater = 90 V, cath. neg. Voltage between cathode and heater = 120 V, cath. pos.					
<hr/>					
<u>Insulation resistance between two electrodes</u>	R_{ins}		min. 100	min. 20	$M\Omega$
Voltage between electrodes = 200 V					
<hr/>					
<u>Hum voltage</u>	V_g		max. 50		μV_{RMS}
Centre heater transformer earthed					
Grid resistor $R_g = 0.5 M\Omega$					

7Z2 7290

CAPACITANCES Both sections if applicable

		I	II	
Anode to cathode, heater and screen	$C_{a/kfs}$	1.75	1.55 - 1.95	pF
	$C_{a' / k' fs}$	1.65	1.45 - 1.85	pF
Anode to cathode and heater	$C_{a/kf}$	0.5	0.4 - 0.6	pF
	$C_{a' / k' f}$	0.4	0.3 - 0.5	pF
Grid to cathode, heater and screen	$C_{g/kfs}$	3.3	2.7 - 3.9	pF
Grid to cathode and heater	$C_{g/kf}$	3.3	2.7 - 3.9	pF
Anode to grid	C_{ag}	1.4	1.2 - 1.6	pF
Anode to cathode	C_{ak}	0.18	0.14 - 0.22	pF
Cathode to heater	C_{kf}	2.6		pF
	$C_{k' f}$	2.7		pF
Anode to screen	C_{as}	1.3	1.1 - 1.5	pF
Anode to grid, heater and screen	$C_{a/gfs}$	3.0	2.7 - 3.3	pF
	$C_{a' / g' fs}$	2.9	2.6 - 3.2	pF
Cathode to grid, heater and screen	$C_{k/gfs}$	6.0	5.1 - 6.9	pF
Anode to anode other section	$C_{aa'}$		max. 0.045	pF
Grid to grid other section	$C_{gg'}$		max. 0.005	pF
Anode to grid other section	$C_{ag'}$, $C_{a' g}$		max. 0.005	pF
Grid to cathode other section	$C_{gk'}$, $C_{g' k}$		max. 0.005	pF

SHOCK AND VIBRATION RESISTANCE

The following test conditions are applied to assess the mechanical quality of the tube. These conditions are not intended to be used as normal operating conditions.

Shock

The tube is subjected 5 times in each of 4 positions to an acceleration of 500 g supplied by an NRL shock machine with the hammer lifted over an angle of 30°.

Vibration

The tube is subjected during 32 hours in each of 3 positions to a vibration frequency of 50 Hz with an acceleration of 2.5 g.

LIFE

Production samples are tested to be within the end of life values (column III) during 10 000 hours under the following conditions:

Anode supply voltage	V_{ba}	100 V
Grid supply voltage	$+V_{bg}$	9 V
Cathode resistor	R_k	680 Ω
Grid resistor	R_g	47 k Ω
Voltage between cathode and heater (cath. neg.)	V_{kf}	60 V
Anode current	I_a	15 mA

LIMITING VALUES Design centre rating system

Anode voltage	V_{a_0}	max.	550 V
Anode voltage (Zero cathode current)	V_a	max.	400 V
Anode voltage	V_a	max.	220 V
Anode voltage (Max. anode dissipation 0.8 W)	V_a	max.	250 V
Anode dissipation	W_a	max.	1.5 W
Anode dissipation (Max. anode dissipation of section 1 plus section 2 = 2 W)	W_a	max.	1.8 W
Grid dissipation	W_g	max.	30 mW
Grid voltage	$-V_g$	max.	100 V
Grid peak voltage Max. pulse duration 200 μ sec Max. duty factor 0.1	$-V_{gp}$	max.	200 V
Cathode current	I_k	max.	20 mA
Cathode peak current Max. pulse duration 200 μ sec Max. duty factor 0.1	I_{kp}	max.	100 mA

LIMITING VALUES (continued)

Voltage between cathode and heater

Cathode positive	V_{kf}	max.	150 V
Cathode negative	V_{kf}	max.	100 V
Bulb temperature (Absolute max.)	t_{bulb}	max.	170 °C
Grid resistor (Anode current < 5 mA)	R_g	max.	1 MΩ

Heater voltage: The average heater voltage should be 6.3 V.

Variations of the heater voltage exceeding the range of 6.0 V to 6.6 V will shorten the tube life.

The tolerance of heater current (column II) should be taken into account.

OPERATING CHARACTERISTICSOutput tube class A

Anode voltage	V_a	220	V
Load resistance	$R_{a\sim}$	20	kΩ
Grid voltage	$-V_g$	6.5	V
Input voltage	V_i	0 1.5 4.5	V _{RMS}
Anode current	I_a	6.5	9.2 mA
Output power	W_o	0.05 0.5	W
Total distortion	d_{tot}		7 %

Output tube class B (two tubes)

Continuous single tone input signal

Anode voltage	V_a	200	V
Load resistance	$R_{aa\sim}$	22	kΩ
Grid voltage	$-V_g$	6	V
Input voltage	V_i	0 0.9 4.0	V _{RMS}
Anode current	I_a	2x5	2x9 mA
Output power	W_o	0.05 1.2	W
Total distortion	d_{tot}		3 %

7Z2 7292

OPERATING CHARACTERISTICS (continued)

Output tube class B (two tubes)

Speech and music inputsignal

Anode voltage	V_a	200	V	
Load resistance	$R_{a-a\sim}$	10	$k\Omega$	
Grid voltage	$-V_{g1}$	6	V	
Input voltage	V_i	0	0.9	4.0 V_{RMS}
Anode current	I_a	2x5	2x13.5 mA	
Output power	W_o	0.05	1.5 W	
Total distortion	d_{tot}		4 %	

Mixer

Anode supply voltage	V_{ba}	60	90	150 V
Anode resistor	R_a	0	1	3.9 $k\Omega$
Grid resistor	R_g	1	1	1 $M\Omega$
Oscillator voltage	V_{osc}	2	2.5	3 V_{RMS}
Anode current	I_a	4.7	7.7	11 mA
Conversion conductance	S_c	2.9	3.5	4.1 mA/V
Internal resistance	R_i	8.3	7	6.1 $k\Omega$









Fig. 1

7204429


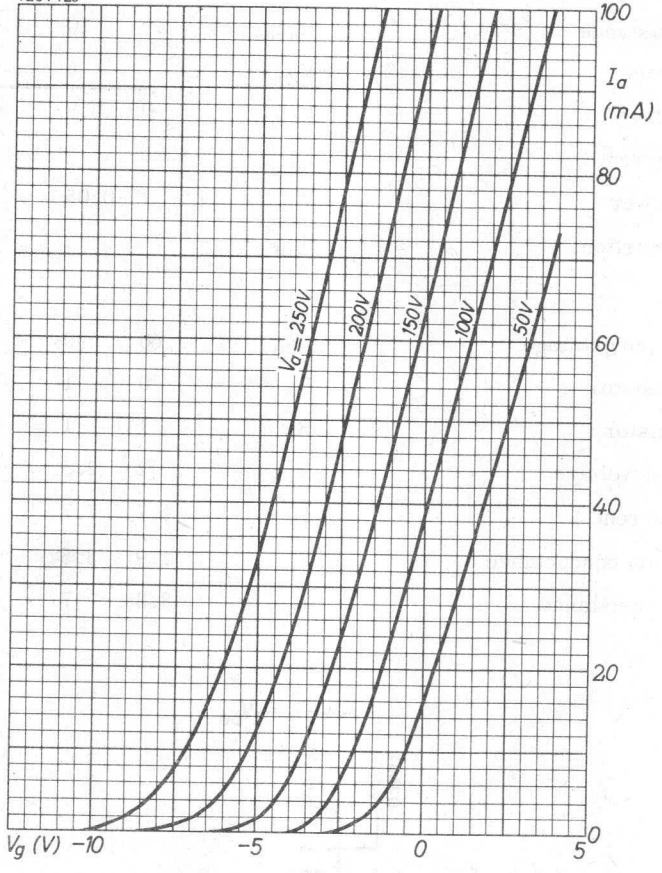
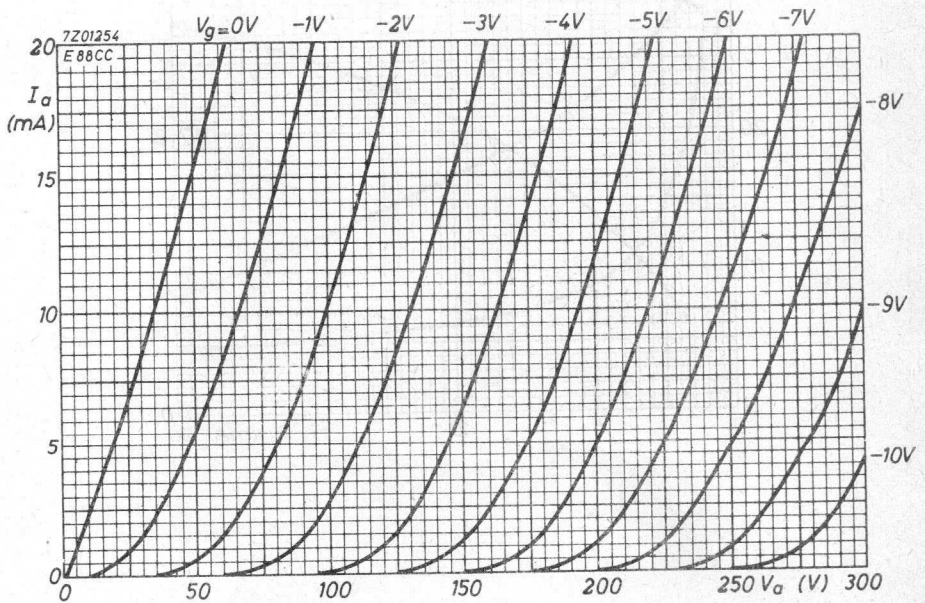


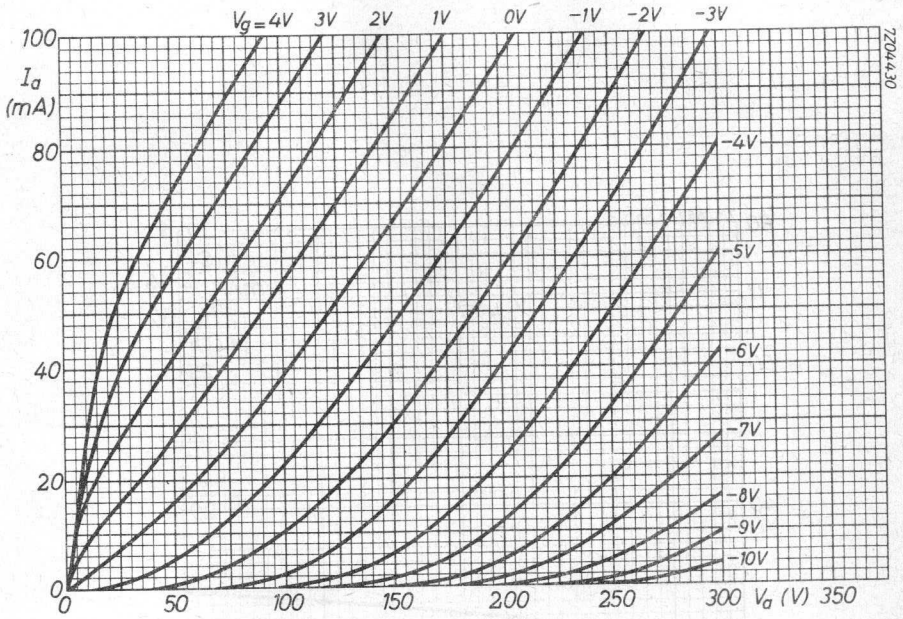

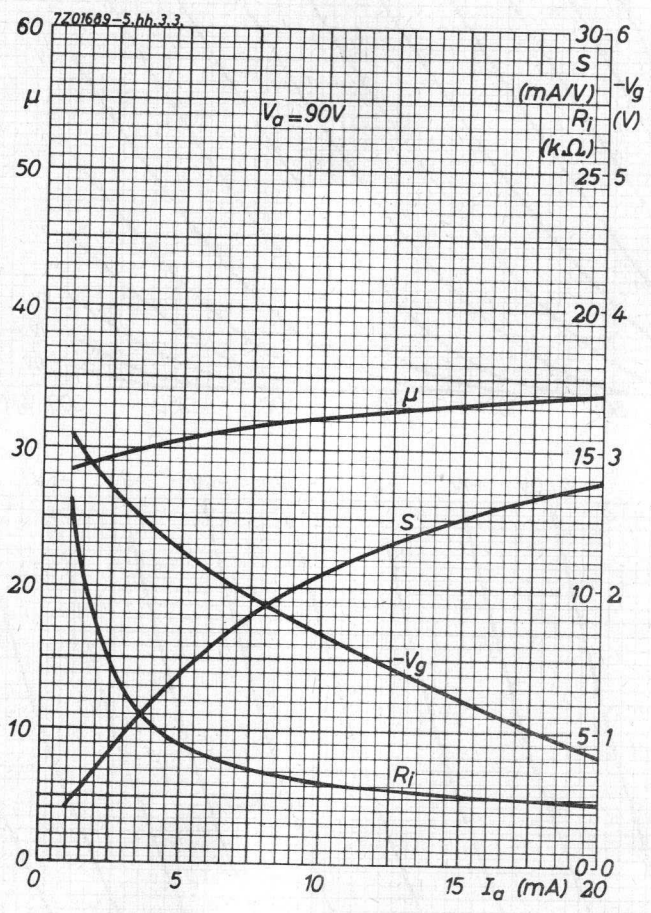


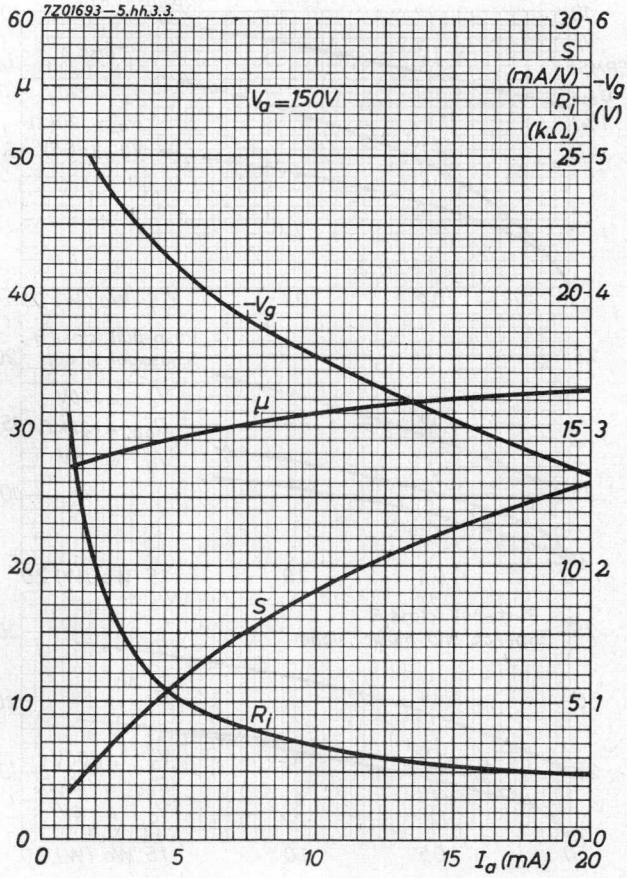


7204035-5.hh.3.3.

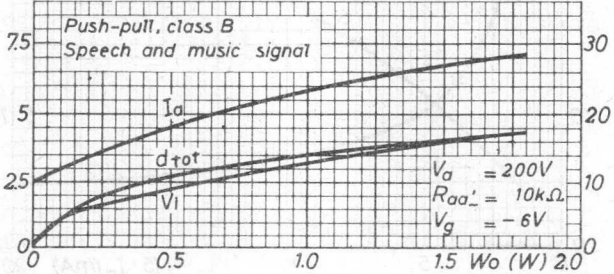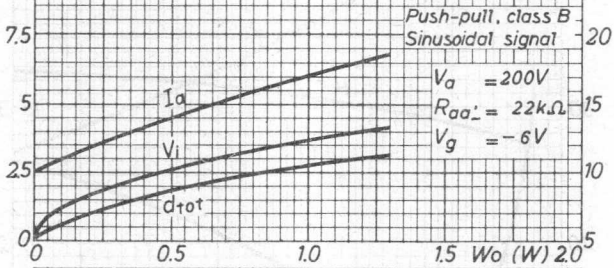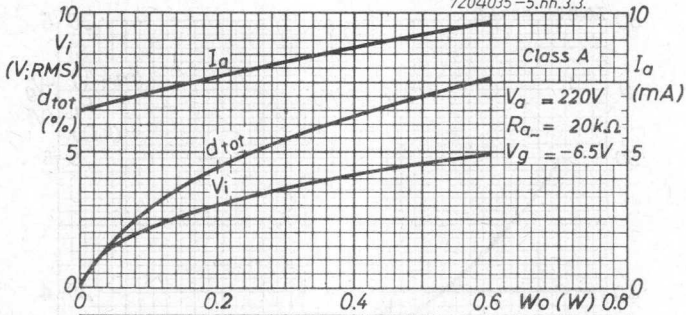

7204034-5.hh.3.3.

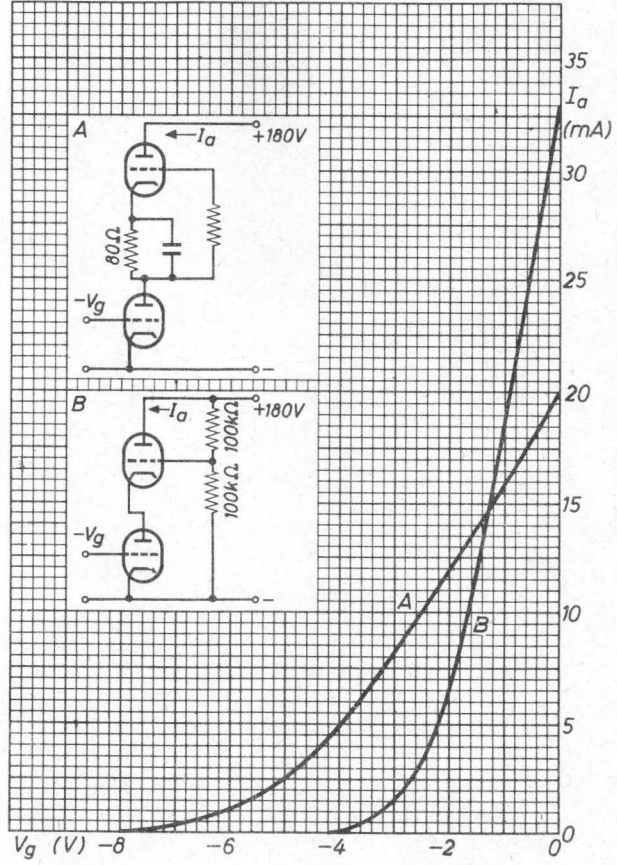

10881

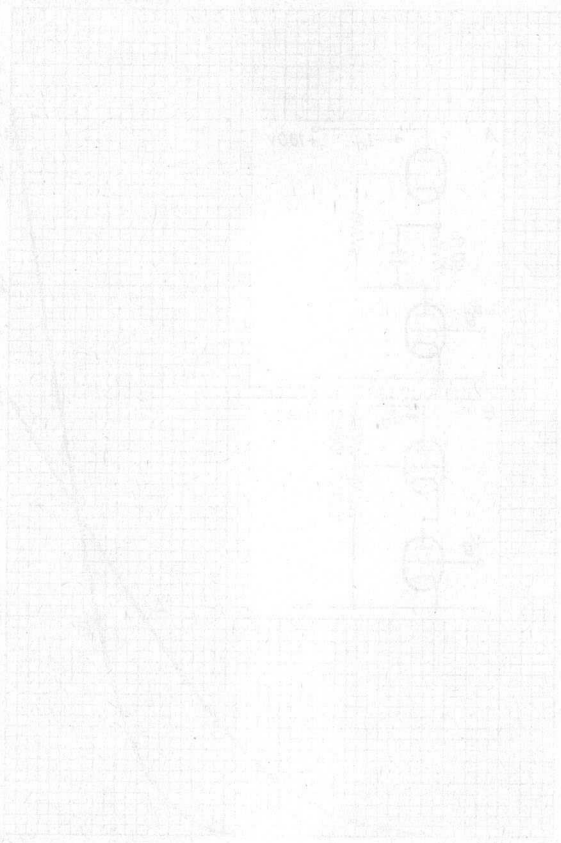

S.Q. TUBE


Special quality double triode designed for use in computer circuits.

QUICK REFERENCE DATA

Life expectancy	10 000 hours
Low interface resistance	
Base	Miniature, 7 pin
Heating	Direct A.C. or D.C. Series or parallel supply
Heater voltage	V_f 6.3 V
Heater current	I_f 400 mA

DIMENSIONS AND CONNECTIONS

Dimensions in mm

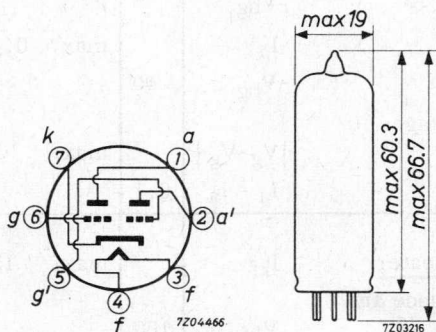

7Z2 6172

CHARACTERISTICS

Column I Nominal value or setting of the tube

II Range values for equipment design: Initial spread

III Range values for equipment design: End of life


		I	II	III	
Heater voltage	V_f	6.3			V
Heater current	I_f	400	380 - 420		mA
Anode voltage	V_a	100			V
Negative grid voltage	$-V_g$	2.1			V
Anode current	I_a	8.5	4.5 - 12.5		mA
Mutual conductance	S	6.0			mA/V
Amplification factor	μ	27			
Anode voltage	V_a	100			V
Cathode resistor	R_k	250			Ω
Mutual conductance	S	6.0	4.5 - 7.5	min. 3.0	mA/V
<u>Negative grid current</u>	$-I_{g1}$		max. 0.2	max. 1.0	μ A
Anode supply voltage	V_{ba}	150			V
Anode resistor	R_a	20			k Ω
Grid resistor	R_g	47			k Ω
Anode current	I_a	5.6	5.0 - 6.2	min. 4.5	mA
Grid supply voltage	V_{bg}	0			V
Anode current	I_a		max. 0.1	max. 0.1	mA
Grid supply voltage	$-V_{bg}$	10			V
Difference in grid voltage of two sections	$ V_g - V_{g'} $		max. 2	max. 2	V
Anode current	$I_a = I_{a'}$	0.1			V
<u>Leakage current between cathode and heater</u>	I_{kf}		max. 15	max. 30	μ A
Voltage between cathode and heater	V_{kf}	100			V
<u>Insulation between two electrodes</u>	R_{ins}		min. 100	min. 20	M Ω
Voltage between electrodes	V	300			V

CAPACITANCES Each system if applicable.

		I	II	
Anode to cathode and heater	$C_{a/kf}$	0.35	0.25 - 0.45	pF
	$C_{a' / k' f}$	0.4	0.3 - 0.5	pF
Grid to cathode and heater	$C_{g/kf}$	3.4	2.9 - 3.9	pF
Anode to grid	C_{ag}	2.5	2.0 - 3.0	pF
Grid to heater	C_{gf}		max. 0.15	pF
	$C_{g'f}$		max. 0.3	pF
Anode to anode other section	$C_{aa'}$		max. 1.4	pF
Grid to grid other section	$C_{gg'}$		max. 0.22	pF
Anode to grid other section	$C_{ag'}$		max. 0.35	pF
Grid to anode other section	$C_{ga'}$		max. 0.15	pF
Cathode to heater	C_{kf}	6.5		pF

LIFE

Production samples are tested to be within the end of life values (column III) under the following conditions during 10 000 hours:



$$I_a = 8 \text{ mA}$$

$$I_{a'} = 0 \text{ mA}$$

$$V_{kf} = 100 \text{ V (k pos)}$$


LIMITING VALUES (Absolute max. rating system)


Anode voltage	V_{a_0}	max.	600 V
	V_a	max.	300 V
Anode dissipation	W_a	max.	2.0 W
Grid voltage	$+V_g$	max.	0 V
	$-V_g$	max.	100 V
Grid peak voltage	$-V_{gp}$	max.	200 V
Grid current	I_g	max.	250 μ A
Grid, peak current max. pulse duration 2.5 msec	I_{gp}	max.	1 mA
Cathode current	I_k	max.	15 mA
Cathode peak current max. pulse duration 2 msec	I_{kp}	max.	75 mA
Voltage between cathode and heater	V_{kf}	max.	100 V
Grid resistor, automatic bias	R_g	max.	1 $M\Omega$
fixed bias	R_g	max.	0.5 $M\Omega$
Bulb temperature	t_{bulb}	max.	170 $^{\circ}$ C

Heater voltage: The average heater should be 6.3 V.

Variations of the heater voltage exceeding the range of 6.0 V to 6.6 V will shorten the tube life.

The tolerance of heater current (column II) should be taken into account.

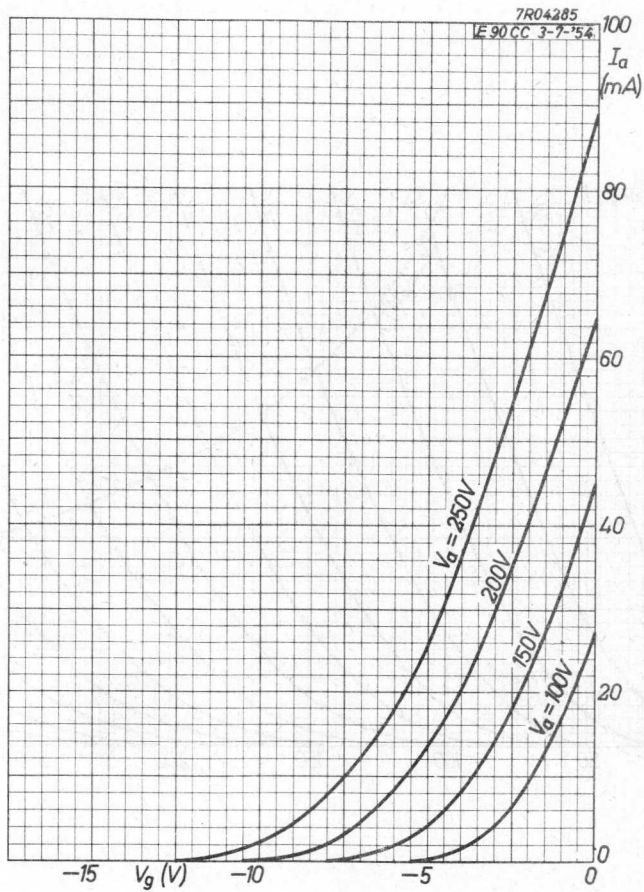

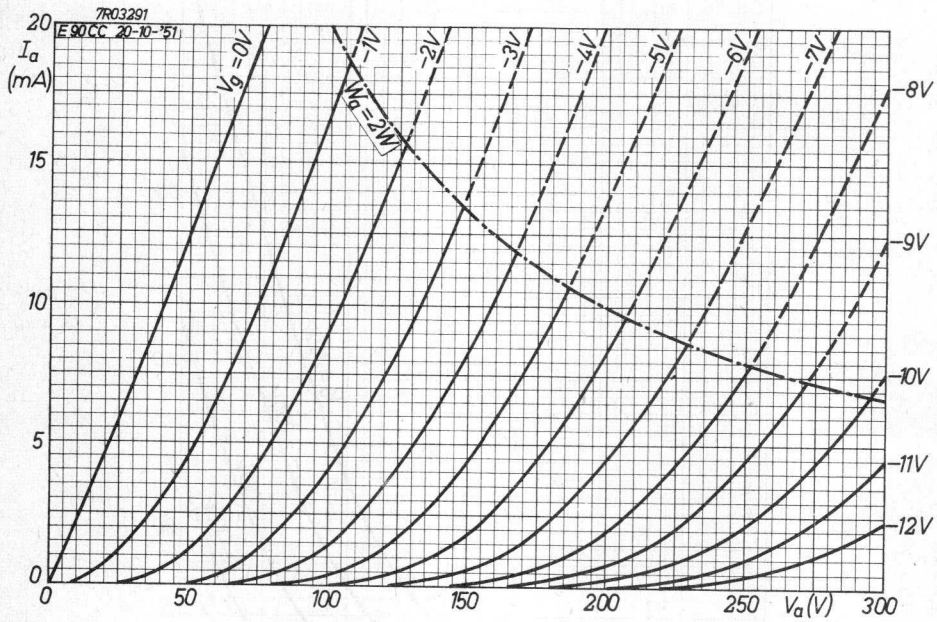

S.Q. TUBE

Special quality tube designed for use as wide band amplifier, cathode follower, series regulator tube for stabilised d.c. supply and output tube.



QUICK REFERENCE DATA

Life test	10 000 hours	
Mechanical quality	Shock and vibration resistant	
Base	Octal	
Heating	Indirect A.C. or D.C.; parallel supply	
Heater voltage	V_f	6.3 V
Heater current	I_f	1.7 A
Anode current	I_a	100 mA
Mutual conductance	S	27.5 mA/V
Output power, one tube	W_o	11.5 W
two tubes, class AB	W_o	60 W

DIMENSIONS AND CONNECTIONS

Dimensions in mm

Base: Octal

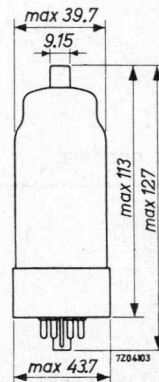

7Z2 7296

CHARACTERISTICS

Column I Nominal value or setting of the tube

II Range values for equipment design: Initial spread

III Range values for equipment design: End of life

		I	II	III	
Heater voltage	V_f	6.3			V
Heater current	I_f	1.7	1.62 - 1.78		A
Anode voltage	V_a	250			V
Grid No.2 voltage	V_{g_2}	150			V
Grid No.1 voltage	$-V_{g_1}$	15.5			V
Anode current	I_a	100			mA
Grid No.2 current	I_{g_2}	4			mA
Mutual conductance	S	27.5			mA/V
Amplification factor	$\mu_{g_2g_1}$	6.5			
Internal resistance	R_i	10			k Ω
Anode supply voltage	V_{ba}	275			V
Grid No.2 supply voltage	V_{bg_2}	180			V
Positive grid No.1 supply voltage	V_{bg_1}	15.7			V
Cathode resistor	R_k	300			Ω
Anode current	I_a	100	85 - 115	decrease max.40%	mA
Grid No.2 current	I_{g_2}	4	max. 6		mA
Mutual conductance	S	27.5	22.5 - 32.5	decrease max.30%	mA/V
Negative grid No.1 current	$-I_{g_1}$		max. 0.5	max. 1	μ A
<u>Cut off voltage</u>					
Anode voltage	V_a	250			V
Grid No.2 voltage	V_{g_2}	150			V
Anode current	I_a	1			mA
Negative grid No.1 voltage	$-V_{g_1}$		max. 30		V

7Z2 7297

CHARACTERISTICS (continued)

Insulation resistance

between one electrode and all other electrodes measured with $V = 400$ V

	II	III	
R_{isol}	min. 100	min. 20	$M\Omega$

CAPACITANCES Without external shield

Grid No.1 to grid No.3, grid No.2, cathode and heater

	I	II	
C_{g_1/g_3g_2kf}	35		pF

Anode to grid No.3, grid No.2, cathode and heater

C_a/g_3g_2kf	17		pF
----------------	----	--	----

Anode to grid No.1

C_{ag_1}		max. 2	pF
------------	--	--------	----

SHOCK AND VIBRATION RESISTANCE

The following test conditions are applied to assess the mechanical quality of the tube. These conditions are not intended to be used as normal operating conditions.

Shock

The tube is subjected 5 times in each of 4 positions to an acceleration of 500 g supplied by an NRL shock machine with the hammer lifted over an angle of 30° .

Vibration

The tube is subjected during 32 hours in each of 3 positions to a vibration frequency of 50 Hz with an acceleration of 2.5 g.

LIFE

Production samples are tested to be within the end of life values (column III) under the following conditions during 10 000 hours.

Anode supply voltage	V_{ba}	275 V
Grid No.2 supply voltage	V_{bg_2}	180 V
Grid No.1 supply voltage	$+V_{bg_1}$	15.7 V
Cathode resistor	R_k	300 Ω
Grid No.1 resistor	R_{g_1}	47 $k\Omega$
Voltage between cathode and heater cathode positive	V_{kf} (k pos)	100 V
		7Z2 7678

LIMITING VALUES (Absolute max. rating system)

Anode voltage	V_{a0}	max. 2000 V
	V_a	max. 900 V
Anode and grid No.2 voltage (triode connection)	V_{a+g2}	max. 250 V
Anode peak voltage	$+V_{ap}$	max. 8000 V
Pulse duration: 18% of a cycle		
Anode peak voltage	$-V_{ap}$	max. 2000 V
Anode dissipation	W_a	max. 27.5 W
Anode plus grid No.2 dissipation (triode connection)	W_{a+g2}	max. 27.5 W
Grid No.2 voltage	V_{g20}	max. 550 V
	V_{g2}	max. 250 V
Grid No.2 dissipation	W_{g2}	max. 5 W
Grid No.1 voltage	$-V_{g1}$	max. 150 V
	$+V_{g1}$	max. 15 V
Grid No.1 dissipation	W_{g1}	max. 0.1 W
Grid No.1 resistor with fixed bias	R_{g1}	max. 0.5 M Ω
with automatic bias	R_{g1}	max. 1.0 M Ω
Cathode current	I_k	max. 300 mA
Cathode peak current	I_{kp}	max. 1.5 A
Pulse duration max. 4 ms		
Average value max. 150 mA		
Cathode peak current	I_{kp}	max. 4.6 A
Pulse duration max. 1.5 μ s		
Average value max. 14 mA		
Voltage between cathode and heater		
Cathode positive	V_{kf} (k pos)	max. 200 V
Cathode negative	V_{kf} (k neg)	max. 100 V
Bulb temperature	t_{bulb}	max. 225 $^{\circ}$ C

LIMITING VALUES (continued)

Heater voltage: The average heater voltage should be 6.3 V.

Variations of the heater voltage exceeding the range of 6.0 V to 6.6 V will shorten the tube life. The tolerance of the heater current (column II) should be taken into account.


OPERATING CHARACTERISTICSOutput tube class A



Anode voltage	V_a	250	V
Grid No.2 voltage	V_{g_2}	150	V
Grid No.1 voltage	$-V_{g_1}$	15.5	V
Load resistance	$R_{a\sim}$	2.7	$k\Omega$
Input voltage	V_i	3.82	V_{RMS}
Anode current	I_a	100	mA
Grid No.2 current	I_{g_2}	18	mA
Output power	W_o	11.5	W
Total distortion	d_{tot}	10	%

Output tube class AB (2 tubes)


Anode voltage	V_a	300	V
Grid No.2 voltage	V_{g_2}	150	V
Grid No.1 voltage	$-V_{g_1}$	17	V
Load resistance	$R_{aa\sim}$	1.6	$k\Omega$
Input voltage	V_i	0 0.24 9.0	V_{RMS}
Anode current	I_a	2x80 - 2x182	mA
Grid No.2 current	I_{g_2}	2x2.5 - 2x22	mA
Output power	W_o	0 0.05 60	W
Total distortion	d_{tot}	- - 5	%

7204X07-5acj12

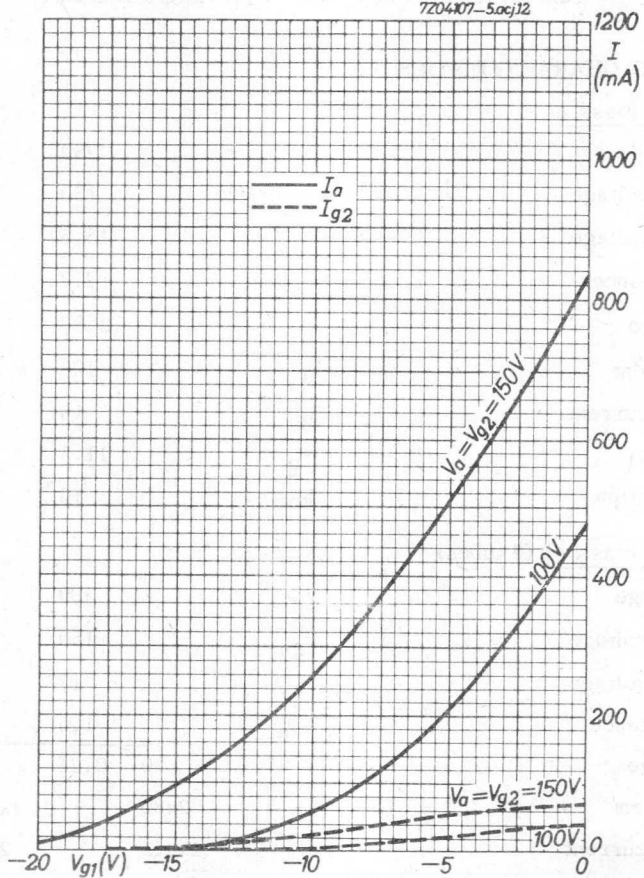


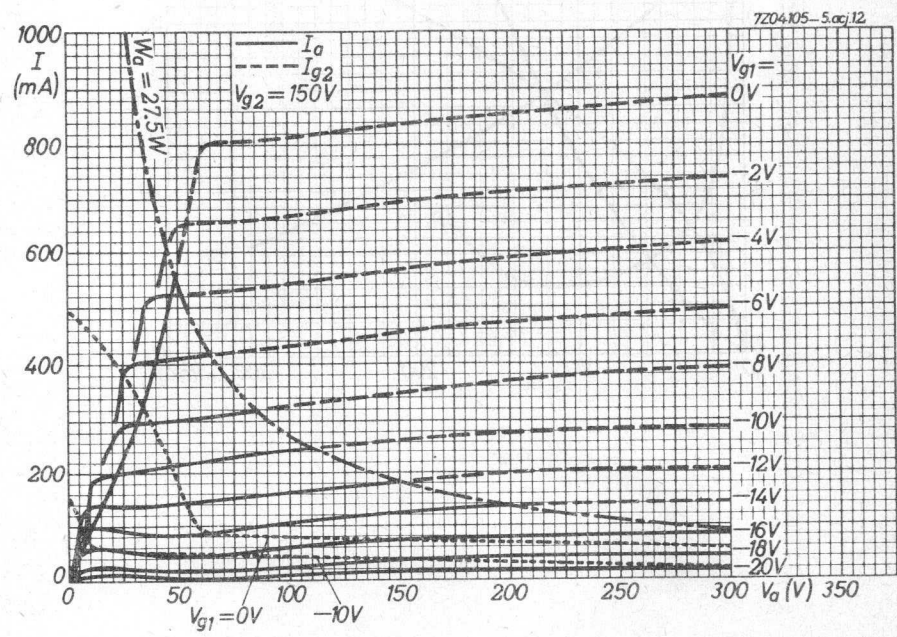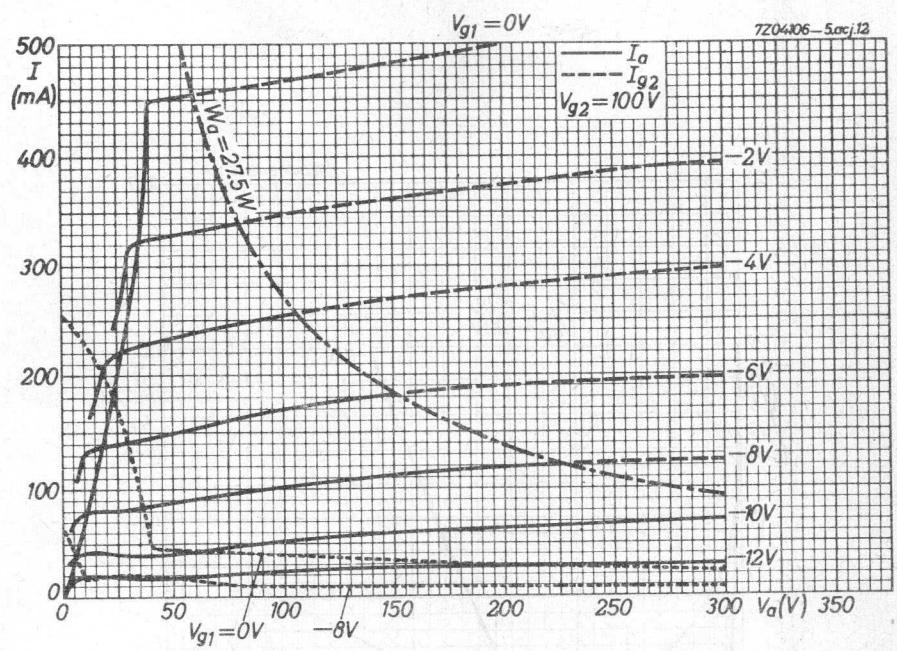


7Z0408-5.acj.12

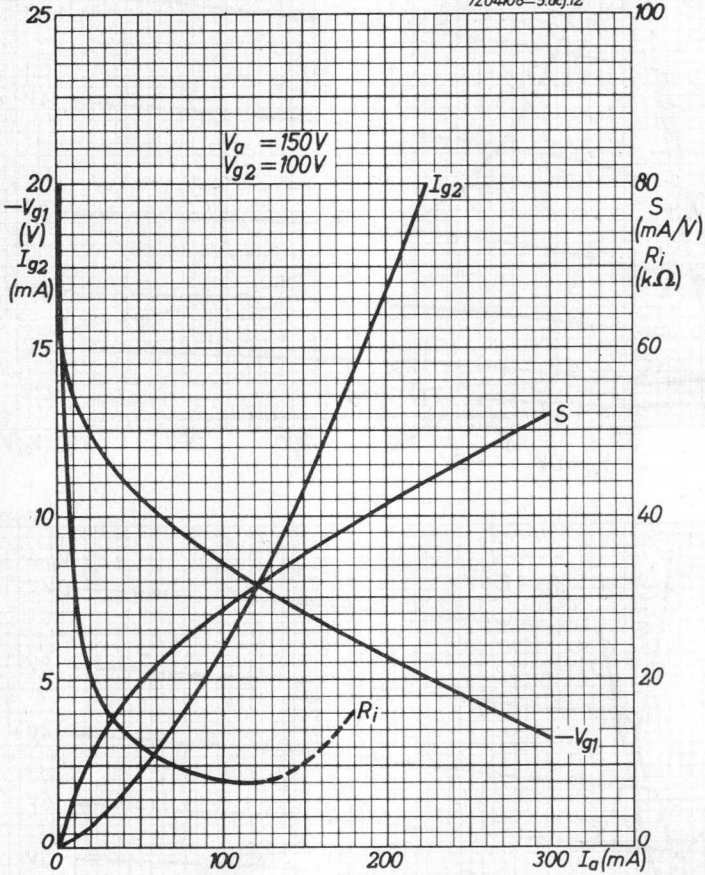

720409-5.0c12

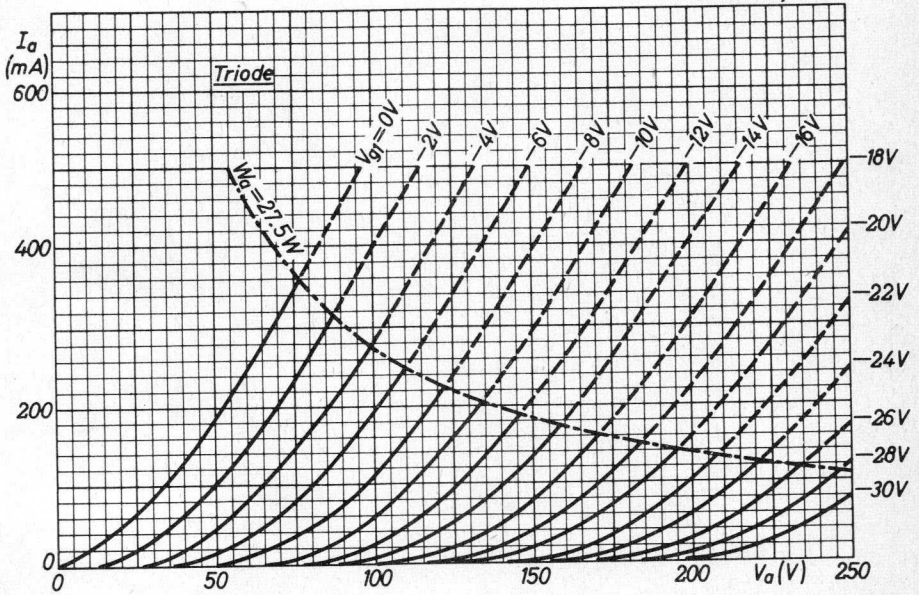

1001

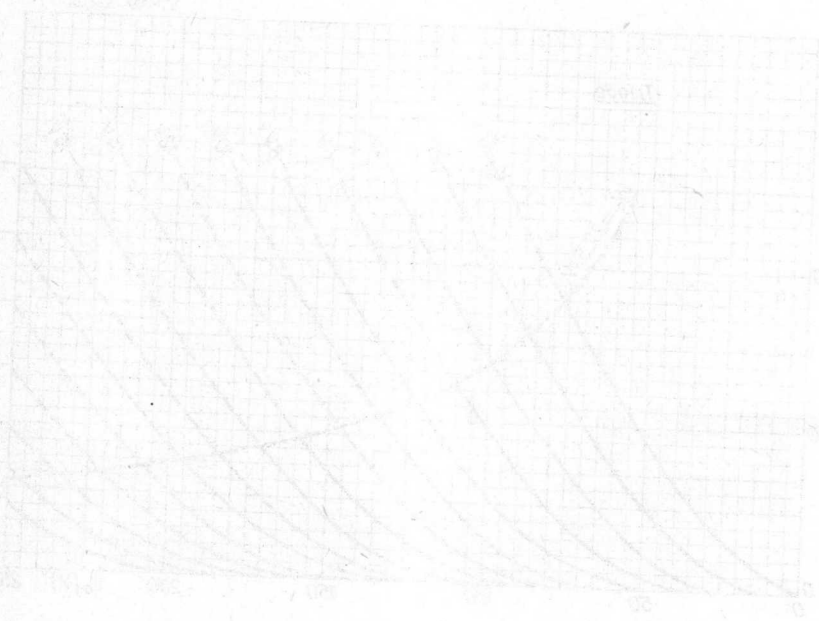

1001

S.Q. TUBE

Special quality double triode designed for use in computer circuits.


QUICK REFERENCE DATA

Life test	10 000 hours	
Low interface resistance		
Base	Noval	
Heating	Indirect	
Heater voltage	V_f	6.3 or 12.6 V
Heater current	I_f	400 or 200 mA

DIMENSIONS AND CONNECTIONS

Dimensions in mm

Base: Noval

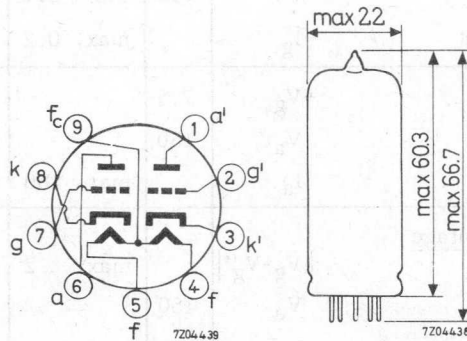

722 7299

CHARACTERISTICS

Column I Nominal value or setting of the tube

II Range values for equipment design: Initial spread

III Range values for equipment design: End of life

		I	II	III	
Heater voltage (pin 9 and 4 and 5)	V_f	6.3			V
Heater current	I_f	400	380 - 420		mA
Heater voltage (pin 4 and 5)	V_f	12.6			V
Heater current	I_f	200			mA
Anode voltage	V_a	150			V
Grid voltage	$-V_g$	1.85			V
Anode current	I_a	8.5			mA
Mutual conductance	S	6.4			mA/V
Amplification factor	μ	46			
Internal resistance	R_i	7.2			$k\Omega$
Anode voltage	V_a	150			V
Cathode resistor	R_k	220			Ω
Anode current	I_a	8.5	6.3 - 10.7	min. 5.0	mA
Mutual conductance	S	6.4	5.3 - 8.1	min. 4.0	mA/V
Negative grid current	$-I_g$		max. 0.2	max. 1.0	μA
<u>Cut off voltage</u>	$-V_g$	7.5			V
Anode voltage	V_a	150			V
Anode current	I_a		max. 150	max. 150	μA
<u>Difference in grid voltage</u> of 2 sections	$ V_g - V_g' $		max. 2	max. 2	V
Anode voltage	V_a	150			V
Anode current	I_a	0.15			mA

CHARACTERISTICS (continued)

		I	II	III	
Anode voltage	V_a	100			V
Grid voltage	$-V_g$	0.8			V
Anode current	I_a	8.5			mA
Mutual conductance	S	7.8			mA/V
Amplification factor	μ	50			
Internal resistance	R_i	6.4			k Ω
Anode voltage	V_a	100			V
Grid supply voltage	$+V_{bg}$	100			V
Grid resistor	R_g	0.5			M Ω
Anode current	I_a	17.8	13.6 - 22.0	min. 9.5	mA
<u>Leakage current between cathode and heater</u>	I_{kf}		max. 15	max. 30	μ A
Voltage between cathode and heater $V_{kf} = 200$ V					
Series resistor = 1 M Ω					
<u>Insulation resistance between two electrodes</u>			min. 100	min. 20	M Ω
Voltage between electrodes V = 275 V					

CAPACITANCES Without external screen

Each system if applicable

		I	II	
Anode to cathode and heater	C_a/kf	0.5	0.3 - 0.7	pF
Anode to cathode and heater	$C_{a'}/k'f$	0.45	0.25 - 0.65	pF
Grid to cathode and heater	C_g/kf	3.5	3.0 - 4.0	pF
Anode to grid	C_{ag}	2.2	1.8 - 2.6	pF
Anode to grid	$C_{a'g'}$	2.3	1.9 - 2.7	pF
Cathode to heater	C_{kf}	3.5		pF
Anode to anode other section	$C_{aa'}$		max. 1.3	pF
Grid to grid other section	$C_{gg'}$		max. 0.06	pF

7Z2 7301

LIFE

Production samples are tested to be within the end of life values (column III) under the following conditions during 10 000 hours.

Anode supply voltage	V_{ba}	150 V
Grid supply voltage	V_{bg}	150 V
Anode resistor	R_a	2.6 k Ω
Grid resistor	R_g	1.5 M Ω ($I_g = 100 \mu A$)
Voltage between cathode and heater (k pos)	V_{kf}	200 V

LIMITING VALUES (Absolute max. rating system)

Anode voltage	V_{a0}	max. 600 V
	V_a	max. 275 V
Anode dissipation	W_a	max. 2.0 W
Grid, voltage	$-V_g$	max. 100 V
Grid, peak voltage	$-V_{gp}$	max. 200 V
Max. pulse duration = 10 μs		
Max. duty factor = 0.01		
Grid voltage	$+V_g$	max. 1 V
Grid current	I_g	max. 2 mA
Grid, peak current	I_{gp}	max. 50 mA
Max. pulse duration = 10 μs		
Max. duty factor = 0.01		
Cathode current	I_k	max. 20 mA
Cathode, peak current	I_{kp}	max. 200 mA
Max. pulse duration = 10 μs		
Max. duty factor = 0.01		

LIMITING VALUES (continued)


Voltage between cathode and heater,


Cathode positive (k pos.)	V_{kf}	max. 200 V
Cathode negative (k neg.)	V_{kf}	max. 100 V
Grid resistor with fixed bias	R_g	max. 0.5 M Ω
with automatic bias	R_g	max. 1.0 M Ω
Bulb temperature	t_{bulb}	max. 170 °C


Heater voltage: The average heater voltage should be 6.3 V.

Variations of the heater voltage exceeding the range of 6.0 V to 6.6 V will shorten the tube life.


The tolerance of the heater current (column II) should be taken into account.

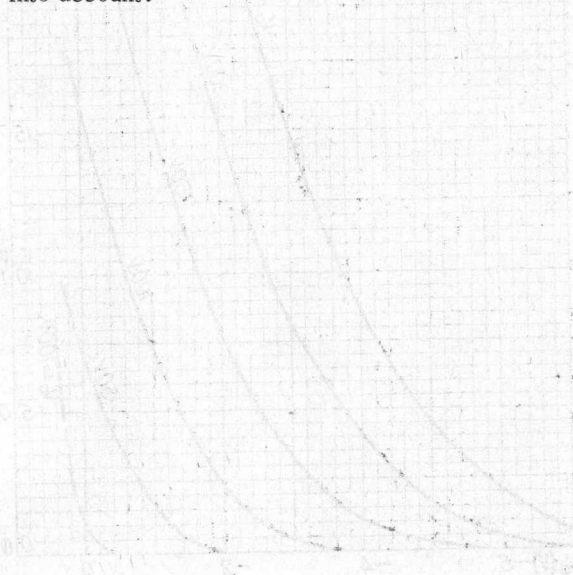

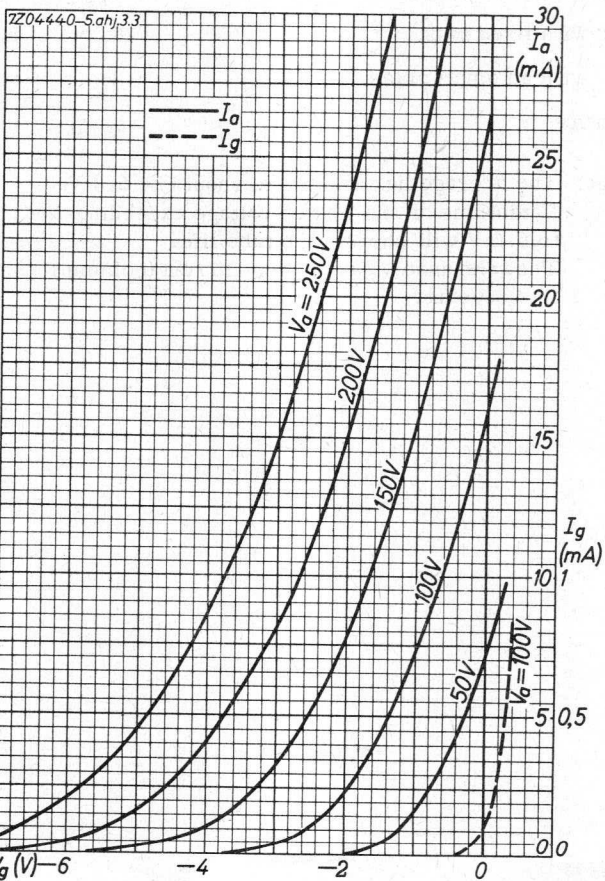

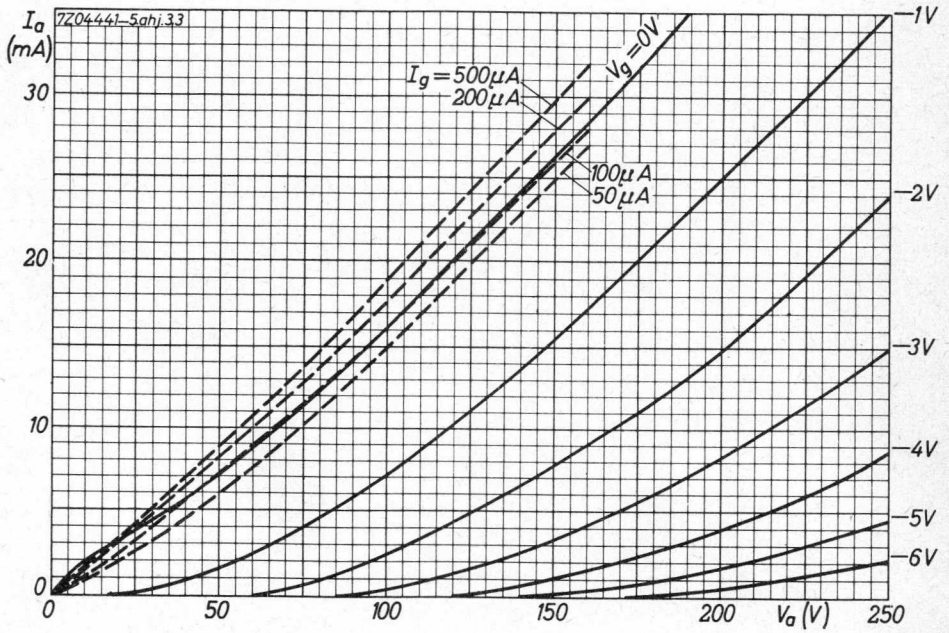

30513

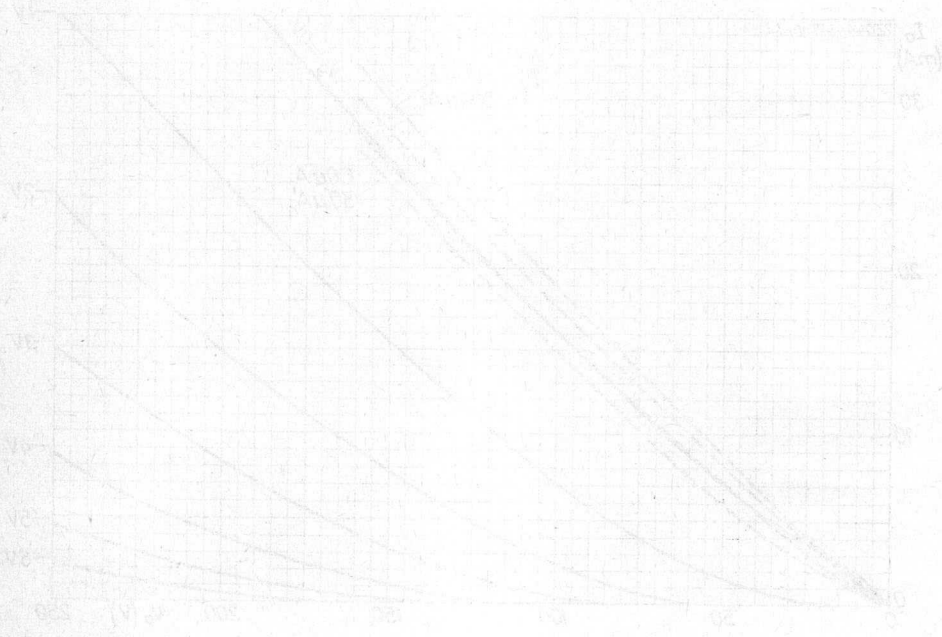

S.Q. TUBE

Special quality pentode designed for use as wide band amplifier.



QUICK REFERENCE DATA

Life test	10 000 hours	
Low interface resistance		
Mechanical quality	Shock and vibration resistant	
Base	Noval. Gold plated pins	
Heating	Indirect A.C. or D.C.; parallel supply	
Heater voltage	V_f	6.3 V
Heater current	I_f	300 mA
Anode current	I_a	13 mA
Mutual conductance	S	16.5 mA/V
Equivalent noise resistance	R_{eq}	330 Ω
Hum voltage	V_{g1} max.	100 μV

DIMENSIONS AND CONNECTIONS

Dimensions in mm

Base: Noval



722 7304

CHARACTERISTICS

Column I Nominal value or setting of the tube

II Range values for equipment design: Initial spread

III Range values for equipment design: End of life

		I	II	III	
Heater voltage	V_f	6.3			V
Heater current	I_f	300	285- 315		mA
Anode supply voltage	V_{ba}	190			V
Grid No.3 voltage	V_{g3}	0			V
Grid No.2 supply voltage	V_{bg2}	160			V
Grid No.1 supply voltage	V_{bg1}	9			V
Cathode resistor	R_k	630			Ω
Anode current	I_a	13	12.2-13.8	min. 11.5	mA
Grid No.2 current	I_{g2}	3.3	2.9- 3.7		mA
Mutual conductance	S	16.5	14.2-18.8	min. 11	mA/V
Amplification factor grid No.2 to grid No.1	μ_{g2g1}	50			
Internal resistance	R_i	90	min. 45		k Ω
Equivalent noise resistance	R_{eq}	330	max. 650		Ω
Negative grid No.1 current	$-I_{g1}$		max. 0.5	max. 1.0	μ A
<u>Equivalent grid hum voltage</u>	V_{g1}		max. 100		μ V _{RMS}
Grid resistor $R_{g1} = 0.5 M\Omega$ Centre tap of heater trans- former grounded					
<u>Distortion</u>	d_2	1.6			%
Load resistor $R_a = 1 k\Omega$ Input voltage $V_i = 100 mV_{RMS}$					
Cathode heating time		12	max. 18		sec

CHARACTERISTICS (continued)

		I	II	
Anode supply voltage	V_{ba}	180		V
Grid No.3 voltage	V_{g3}	0		V
Grid No.2 supply voltage	V_{bg2}	150		V
Cathode resistor	R_k	100		Ω
Anode current	I_a	11.5		mA
Grid No.2 current	I_{g2}	2.9		mA
Mutual conductance	S	15.5		mA/V
<u>Cut-off voltage</u>	$-V_{g1}$		max. 4.5	V
Anode voltage	V_a	180		V
Grid No.2 voltage	V_{g2}	150		V
Grid No.3 voltage	V_{g3}	0		V
Anode current	I_a	0.8		mA
<u>Start of grid No.1 current</u>	$-V_{g1}$		max. 0.5	V
Grid No.1 current $I_{g1} = 0.3 \mu A$				
<u>Input resistance</u>	r_{g1}	2000		Ω
Frequency = 100 MHz				
<u>Phase angle of the slope</u>		9		$^\circ$
Frequency = 50 MHz				
Pin 1 connected to pin 3				
<u>Leakage current between cathode and heater</u>	I_{kf}		max. 15	μA
Voltage between cathode and heater $V_{kf} = 60 V$				
<u>Insulation resistance between two electrodes</u>			min. 20	$M\Omega$

CHARACTERISTICS AS TRIODE

(g_2 connected to anode)

		I	II	
Anode supply voltage	V_{ba}	160		V
Grid No.3 voltage	V_{g3}	0		V
Grid No.1 voltage	$+V_{bg1}$	9		V
Cathode resistor	R_k	620		Ω
Anode current	I_a	16.5		mA
Mutual conductance	S	21		mA/V
Amplification factor	μ	50		
Internal resistance	R_i	2.4		k Ω
Equivalent noise resistance	R_{eq}	225		Ω

CAPACITANCES . With external shield

Anode to grid No.3, grid No.2, cathode and heater	C_{a/g_3g_2kf}	3	2.5 - 3.5	pF ¹⁾
Grid No.1 to grid No.3, grid No.2, cathode and heater				
($I_k = 0$ mA) :	C_{g1/g_3g_2kf}	7.5	6.6 - 8.4	pF ¹⁾
($I_k = 16.3$ mA, $f = 100$ MHz) :	C_{g1/g_3g_2kf}	11.1		pF ¹⁾
Anode to grid No.1	C_{ag1}	0.018	max.0.03	pF
Anode to cathode	C_{ak}		max. 0.1	pF
Grid No.1 to heater	C_{g1f}		max. 0.1	pF

SHOCK AND VIBRATION RESISTANCE

The following test conditions are applied to assess the mechanical quality of the tube. These conditions are not intended to be used as normal operating conditions.

Shock

The tube is subjected 5 times in each of 4 positions to an acceleration of 500 g supplied by an NRL shock machine with the hammer lifted over an angle of 30°.

Vibration

The tube is subjected during 32 hours in each of 3 positions to a vibration frequency of 50 Hz with an acceleration of 2.5 g.

¹⁾ Pin No.6 left floating

LIFE

Production samples are tested to be within the end of life values (column III) under the following conditions during 10 000 hours.

Anode supply voltage	V_{ba}	190 V
Grid No.3 voltage	V_{g3}	0 V
Grid No.2 supply voltage	V_{bg2}	160 V
Grid No.1 supply voltage	$+V_{bg1}$	9 V
Cathode resistor	R_k	630 Ω

LIMITING VALUES (Absolute max. rating system)

Anode voltage	V_{a0}	max.	400 V
	V_a	max.	210 V
Anode dissipation	W_a	max.	3 W
Grid No.2 voltage	V_{g20}	max.	400 V
	V_{g2}	max.	175 V
Grid No.2 dissipation	W_{g2}	max.	0.9 W
Cathode current	I_k	max.	25 mA
Grid No.1 voltage	$+V_{g1}$	max.	0 V
	$-V_{g1}$	max.	.50 V
Grid No.1 peak voltage	$-V_{g1p}$	max.	100 V
Grid resistor, fixed bias	R_{g1}	max.	0.25 M Ω
	automatic bias	R_{g1}	max.
Voltage between cathode and heater	V_{kf}	max.	60 V
Bulb temperature	t_{bulb}	max.	155 $^{\circ}\text{C}$


Heater voltage: The average heater voltage should be 6.3 V.



Variations of the heater voltage exceeding the range of 6.0 V to 6.6 V will shorten the tube life.


The tolerance of heater current (column II) should be taken into account.

7204257

E 180 F 14-12-'57

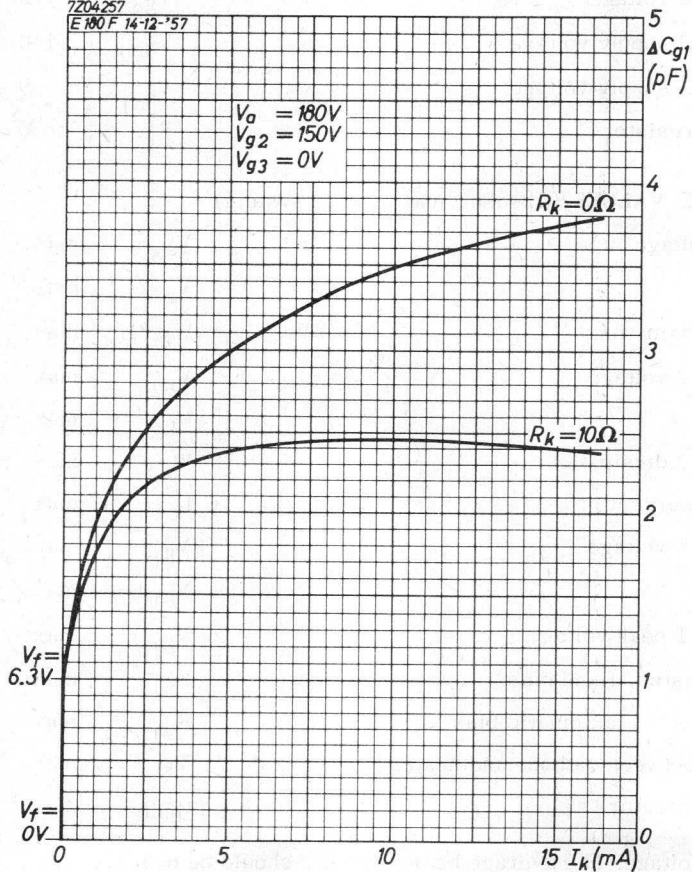

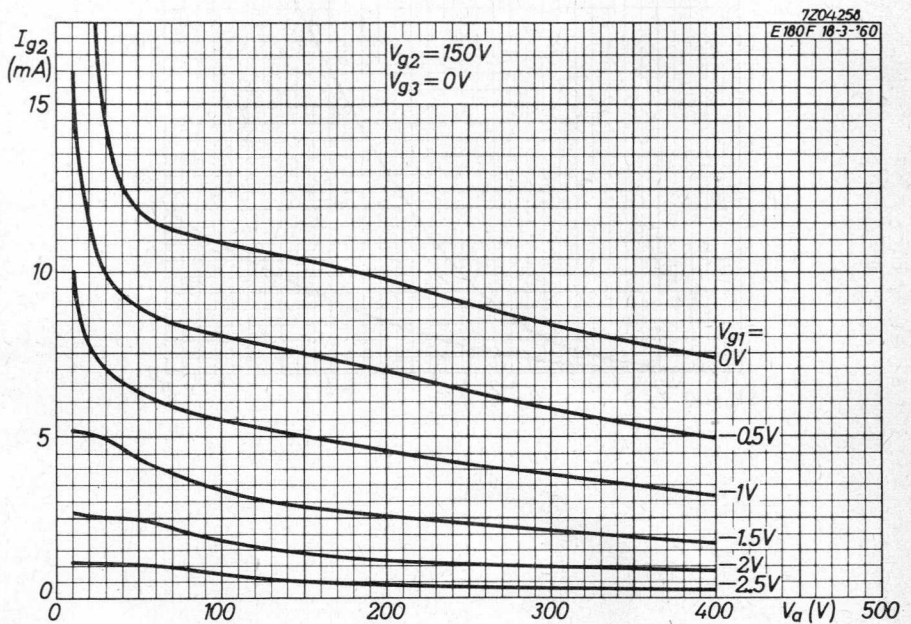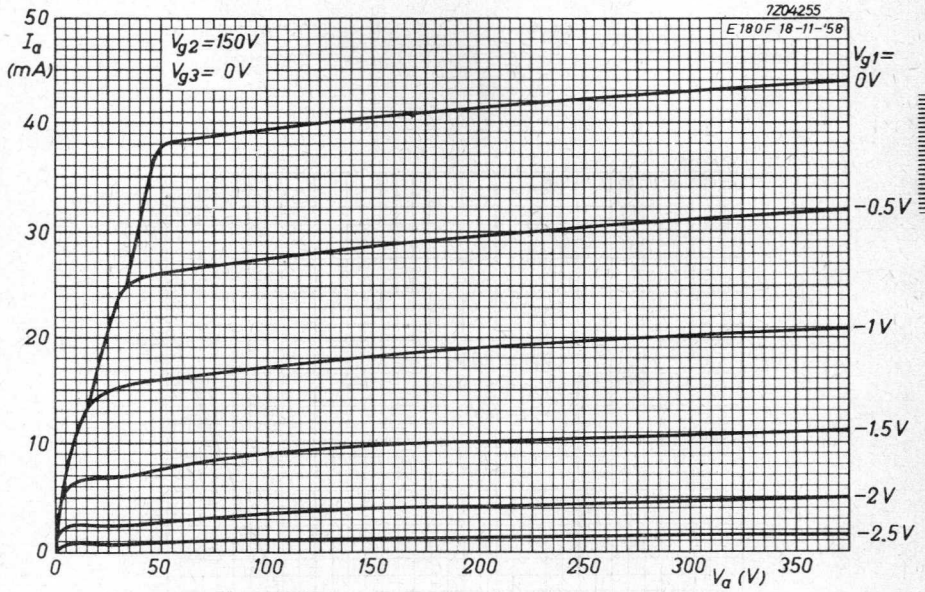

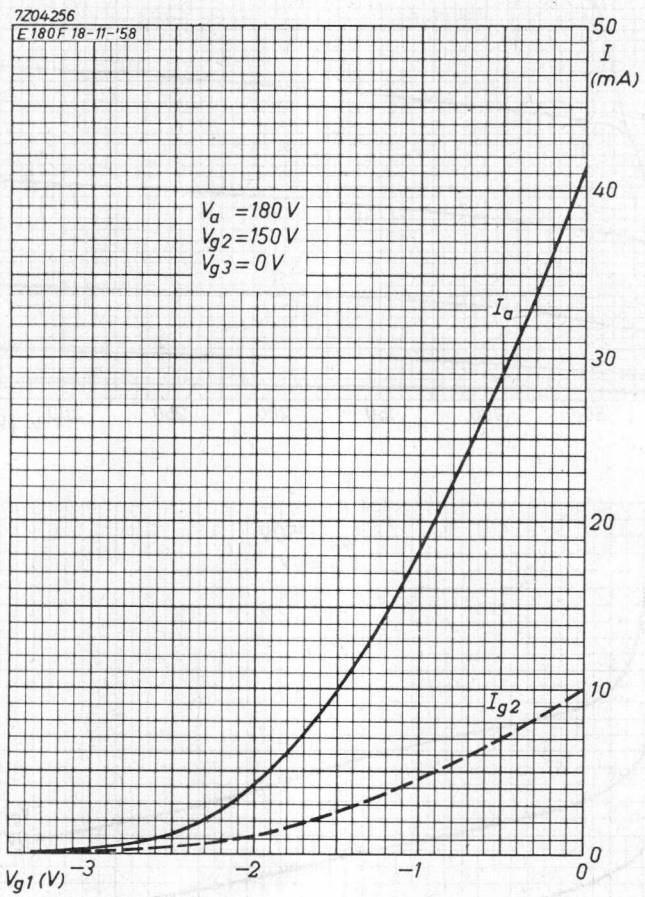

S.Q. TUBE

Special quality double triode designed for use in computer circuits.


QUICK REFERENCE DATA

Life test	10 000 hours	
Low interface resistance		
Base	Noval	
Heating	Indirect A.C. or D.C.; Parallel supply	
Heater voltage	V_f	6.3 or 12.6 V
Heater current	I_f	640 or 320 mA
Anode current	I_a	36 mA
Mutual conductance	S	15 mA/V

DIMENSIONS AND CONNECTIONS

Dimensions in mm

Base: Noval

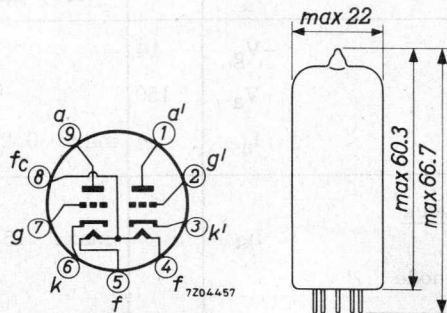

7Z2 7310

CHARACTERISTICS

Column I Nominal value or setting of the tube

II Range values for equipment design: Initial spread

III Range values for equipment design: End of life

		I	II	III	
Heater voltage (pin 8 and 4+5)	V_f	6.3			V
Heater current	I_f	640	605- 675		mA
Heater voltage (pin 4 and 5)	V_f	12.6			V
Heater current	I_f	320			mA
Anode voltage	V_a	120			V
Grid voltage	$-V_g$	2			V
Anode current	I_a	36	26- 45		mA
Mutual conductance	S	15			mA/V
Amplification factor	μ	24			
Negative grid current	$-I_g$		max. 0.2	max. 1.0	μ A
Anode voltage	V_a	120			V
Cathode resistor	R_k	55			Ω
Mutual conductance	S	15	11.2-18.8	min. 8	mA/V
Anode voltage	V_a	90			V
Grid current	I_g	250			μ A
Anode current	I_a		41- 62	min. 24	mA
<u>Cut-off voltage</u>	$-V_g$	14			V
Anode voltage	V_a	150			V
Anode current	I_a		max. 0.2		mA
<u>Leakage current between cathode and heater</u>	I_{kf}		max. 15	max. 30	μ A
Voltage between cathode and heater = 200 V					
<u>Insulation resistance between two electrodes</u>			min. 100	min. 20	M Ω

CAPACITANCES . Each system if applicable

		I	II	
Anode to cathode and heater	$C_{a/kf}$	1.1	0.75-1.45	pF
	$C_{a' / k' f}$	1.0	0.65-1.35	pF
Grid to cathode and heater	$C_{g/kf}$	6.0	5.3- 6.7	pF
Anode to grid	C_{ag}	4.0	3.4- 4.6	pF
	$C_{a' g'}$	4.1	3.4- 4.8	pF
Cathode to heater	C_{kf}	4.0		pF
Anode to anode other section	$C_{aa'}$	0.6	max. 0.8	pF
Grid to grid other section	$C_{gg'}$		max. 0.15	pF
Anode to grid other section	$C_{ag'}$		max. 0.1	pF

LIFE

Production samples are tested to be within the end of life values (column III) during 10 000 hours under the following conditions.

Anode supply voltage	V_{ba}	150 V
Anode resistor	R_a	1.5 k Ω
Grid supply voltage	V_{bg}	150 V
Grid resistor	R_g	62 k Ω
Voltage between cathode and heater (cath. neg.)	V_{kf}	120 V

LIMITING VALUES (Absolute max. rating system)


Anode voltage	V_{a0}	max. 600 V
	V_a	max. 300 V
Anode dissipation	W_a	max. 4.5 W
Anode dissipation (both sections)	$W_{a+a'}$	max. 8.0 W
Grid voltage	$-V_g$	max. 100 V
	$+V_g$	max. 1 V



LIMITING VALUES (continued)


Grid voltage, peak	+V _{gp}	max.	30 V
	-V _{gp}	max.	200 V
Pulse duration max. 10 μs			
Duty factor max. 0.01			
Grid current	I _g	max.	8 mA
Grid peak current	I _{gp}	max.	200 mA
Pulse duration max. 10 μs			
Duty factor max. 0.01			
Cathode current	I _k	max.	60 mA
Cathode peak current	I _{kp}	max.	400 mA
Pulse duration max. 10 μs			
Duty factor max. 0.01			
Voltage between cathode and heater d.c. component	V _{kf}	max.	200 V
	V _{kf}	max.	120 V
Bulb temperature	t _{bulb}	max.	160 °C
Grid resistor with automatic bias	R _g	max.	1 MΩ
Grid resistor with fixed bias	R _g	max.	0.5 MΩ


Heater voltage: The average heater voltage should be 6.3/12.6 V. Variations of the heater voltage exceeding the range of 6.0/12.0 V to 6.6/13.2 V will shorten the tube life. The tolerance of heater current (column II) should be taken into account.

7Z04454-5ahb3.3

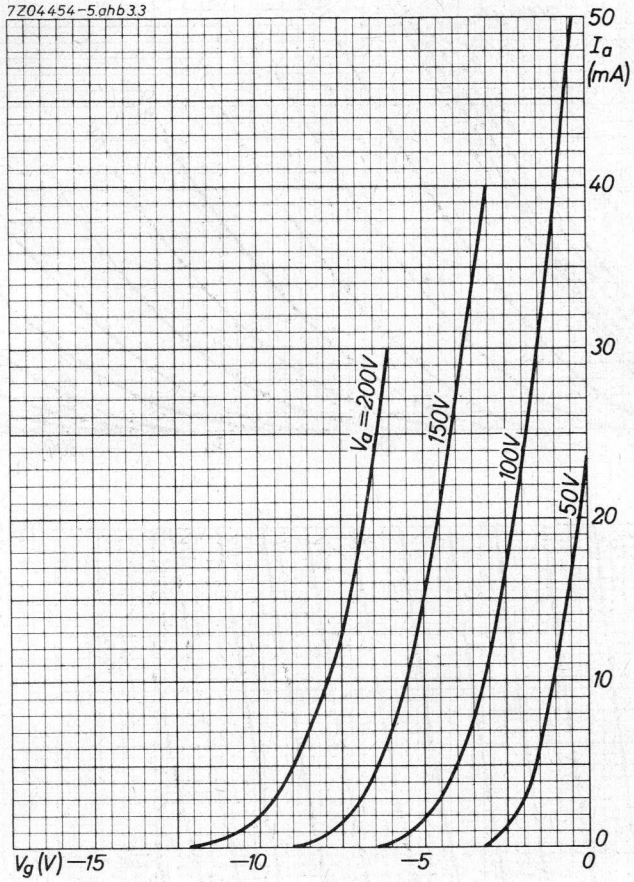

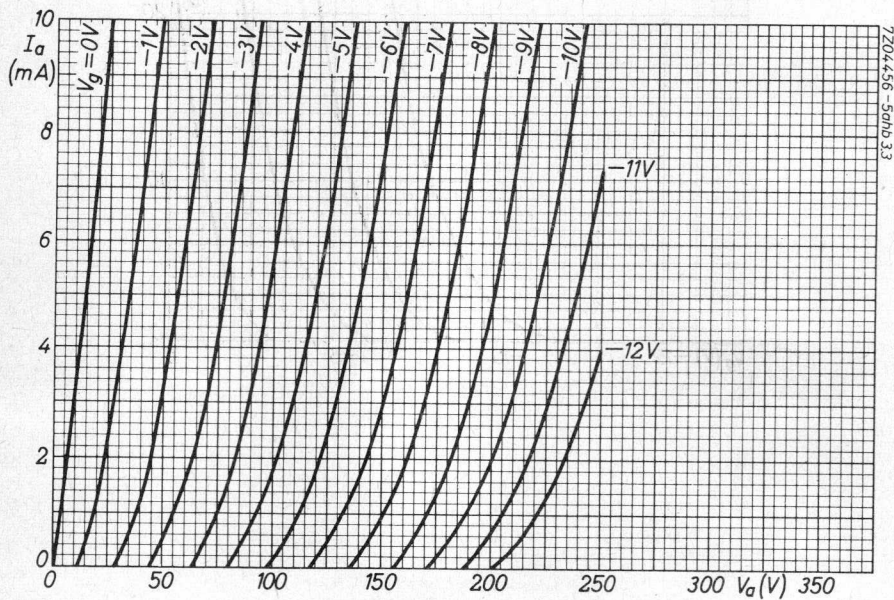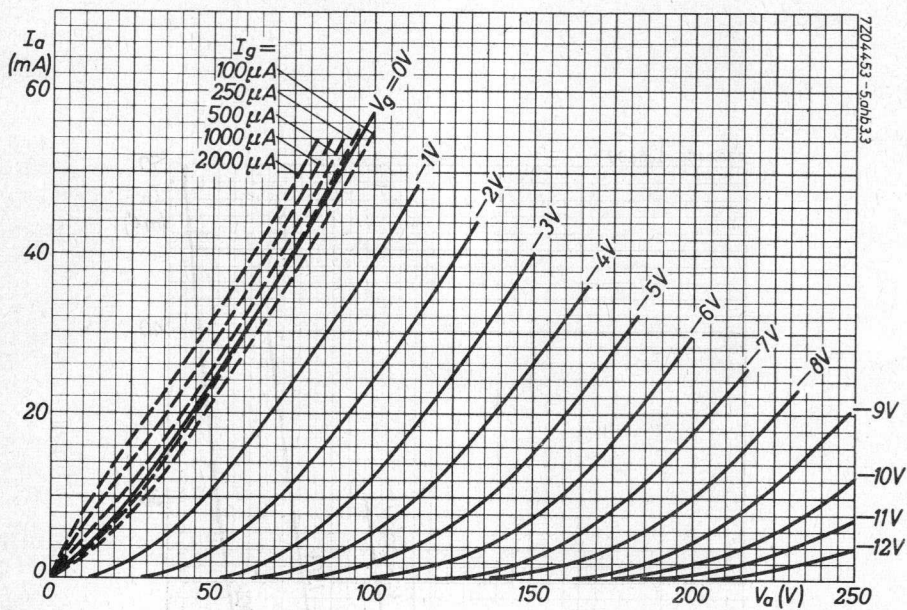

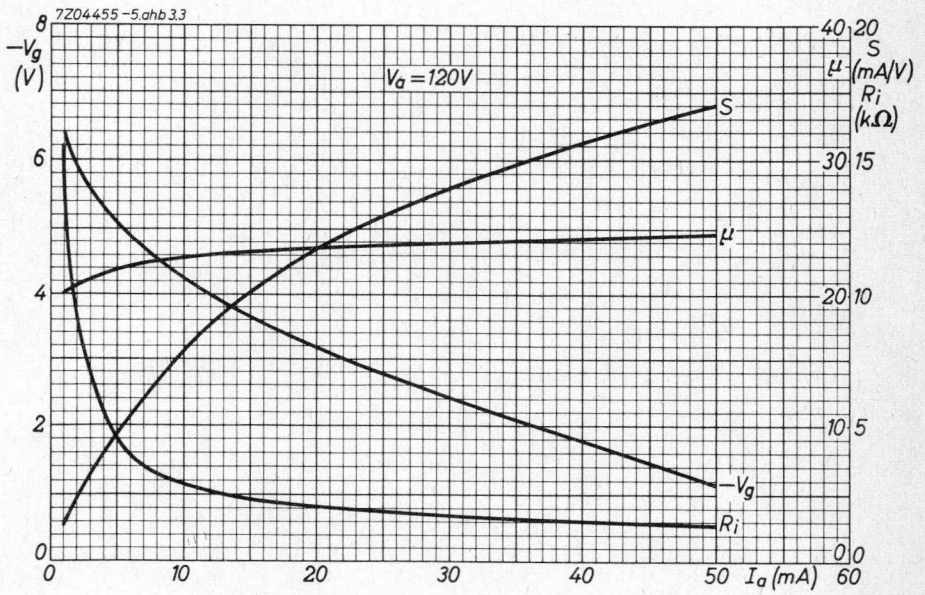

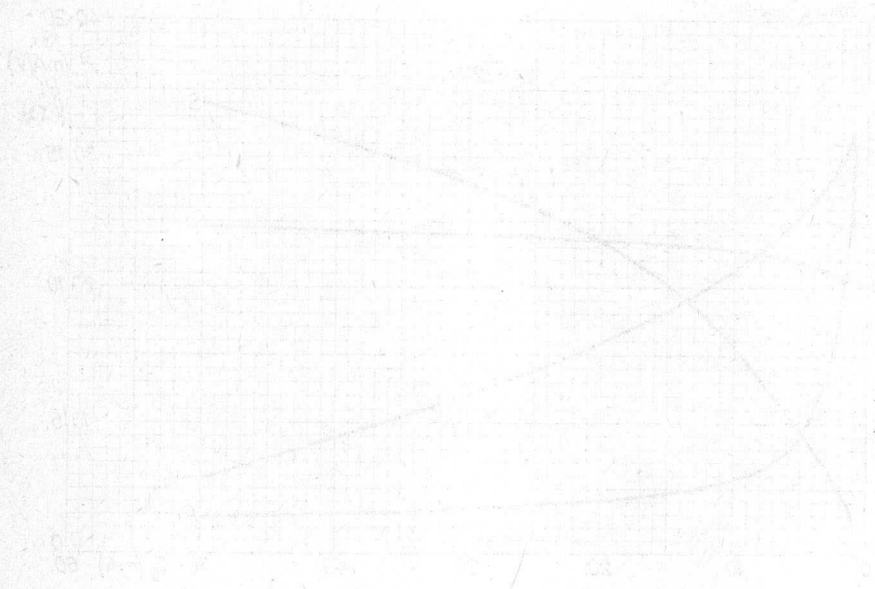

S.Q. TUBE

Special quality pentode designed for use as broad band amplifier.



QUICK REFERENCE DATA

Life test	10 000 hours	
Mechanical quality	Shock and vibration resistant	
Low microphony level		
Base	Noval	
Heating	Indirect a.c. or d.c.; parallel supply	
Heater voltage	V_f	6.3 V
Heater current	I_f	320 mA
Anode current	I_a	13 mA
Mutual conductance	S	16.5 mA/V
Equivalent noise resistance	R_{eq}	330 Ω
Hum voltage	V_{g1}	<100 μ V

DIMENSIONS AND CONNECTIONS

Dimensions in mm

Base: Noval



7Z2 6008

CHARACTERISTICS

Column I Nominal value or setting of the tube

II Range values for equipment design: Initial spread

III Range values for equipment design: End of life

		I	II	III	
Heater voltage	V_f	6.3			V
Heater current	I_f	320	300 - 340		mA
Anode supply voltage	V_{ba}	190			V
Grid No.3 voltage	V_{g_3}	0			V
Grid No.2 supply voltage	V_{bg_2}	160			V
Grid No.1 supply voltage	$+V_{bg_1}$	9			V
Cathode resistor	R_k	630			Ω
Anode current	I_a	13	12.2-13.8	min. 11.5	mA
Grid No.2 current	I_{g_2}	3.3	2.9 - 3.7		mA
Mutual conductance	S	16.5	14.2-18.6	min. 11	mA/V
Amplification factor grid No.2 to grid No.1	$\mu_{g_2g_1}$	53			
Internal resistance	R_i	100			k Ω
<u>Equivalent noise resistance</u> frequency 45 MHz	R_{eq}	330			Ω
<u>Negative grid No.1 current</u>	$-I_{g_1}$		max. 0.2	max. 0.5	μA
Anode supply voltage	V_{ba}	180			V
Grid No.3 voltage	V_{g_3}	0			V
Grid No.2 supply voltage	V_{bg_2}	150			V
Cathode resistor	R_k	100			Ω
Anode current	I_a	11.5			mA
Grid No.2 current	I_{g_2}	2.9			mA
Mutual conductance	S	15.5			mA/V

CHARACTERISTICS (continued)

	I	II	III	
<u>Cut-off voltage</u>	$-V_{g1}$	4.5		V
Anode voltage	V_a	180		V
Grid No.3 voltage	V_{g3}	0		V
Grid No.2 voltage	V_{g2}	150		V
Anode current	I_a	max.0.8		mA
<u>Leakage current between cathode and heater</u>	I_{kf}	max. 10	max.20	μA
Voltage between cathode and heater $V_{kf} = 100$ V				
<u>Insulation resistance between two electrodes</u>	R_{ins}	min. 100	min. 50	$M\Omega$
Voltage between electrodes = 100 V				
<u>Hum voltage</u>	V_{g1}	max. 100		μV
Grid No.1 resistor $R_{g1} = 0.5$ $M\Omega$				
Centre tapping of heater transformer grounded				
Cathode resistor by-passed				
<u>Vibrational noise output</u>				
With vibration frequency = 50-2000 Hz	V_{g1}	max. 500		mV_{RMS}
With vibration frequency = 50 Hz	V_{g1}	max. 200		mV_{RMS}
Anode supply voltage $V_{b_a} = 216$ V				
Anode resistor $R_a = 2$ $k\Omega$				
Grid No.2 supply voltage $V_{bg_2} = 160$ V				
Grid No.3 voltage $V_{g_3} = 0$ V				
Cathode resistor $R_k = 630$ Ω (not by-passed)				
Grid No.1 supply voltage $+V_{bg_1} = 9$ V				
Acceleration (peak value) = 10 g				

CAPACITANCES . With external shield

Anode to grid No.3, grid No.2
cathode, heater and screen

	I	II	
C_{a/g_3g_2kfs}	3.45		pF
C_{g_1/g_3g_2kfs}	7.6		pF
C_{ag_1}		max.0.03	pF

Grid No.1 to grid No.3, grid No.2
cathode, heater and screen

Anode to grid No.1

SHOCK AND VIBRATION RESISTANCE

The following test conditions are applied to assess the mechanical quality of the tube. These conditions are not intended to be used as normal operating conditions.

Shock

The tube is subjected 5 times in each of 4 positions to an acceleration of 500 g supplied by an NRL shock machine with the hammer lifted over an angle of 30°.

Vibration

The tube is subjected during 32 hours in each of 3 positions to a vibration frequency of 50 Hz with an acceleration of 2.5 g.

LIFE

Production samples are tested to be within the end of life values (column III) under the following conditions during 10 000 hours.

Anode supply voltage	V_{b_a}	190	V
Grid No.3 voltage	V_{g_3}	0	V
Grid No.2 voltage	V_{g_2}	160	V
Grid No.1 supply voltage	$+V_{b_{g_1}}$	9	V
Cathode resistor	R_k	630	Ω
Voltage between cathode and heater (cathode negative)	V_{k_f}	70	V

LIMITING VALUES (Absolute max. rating system)


Anode voltage	V_{a_0}	max.	400	V
	V_a	max.	210	V
Anode dissipation	W_a	max.	3	W
Grid No.2 dissipation	W_{g_2}	max.	0.7	W
Grid No.2 voltage	$V_{g_{20}}$	max.	400	V
	V_{g_2}	max.	175	V
Grid No.1 voltage				
positive	$+V_{g_1}$	max.	0	V
negative	$-V_{g_1}$	max.	50	V
negative peak	$-V_{g_{1p}}$	max.	100	V
Grid No.1 resistor				
fixed bias	R_{g_1}	max.	0.25	M Ω
automatic bias	R_{g_1}	max.	0.5	M Ω
Cathode current	I_k	max.	25	mA
Voltage between cathode and heater	V_{kf}	max.	60	V
Bulb temperature	t_{bulb}	max.	165	$^{\circ}\text{C}$


Heater voltage: The average heater voltage should be 6.3 V.

Variation of the heater voltage exceeding the range of 6.0 V to 6.6 V will shorten the tube life.

The tolerance of heater current (column II) should be taken into account.

7Z04052-5, ehf. 6.

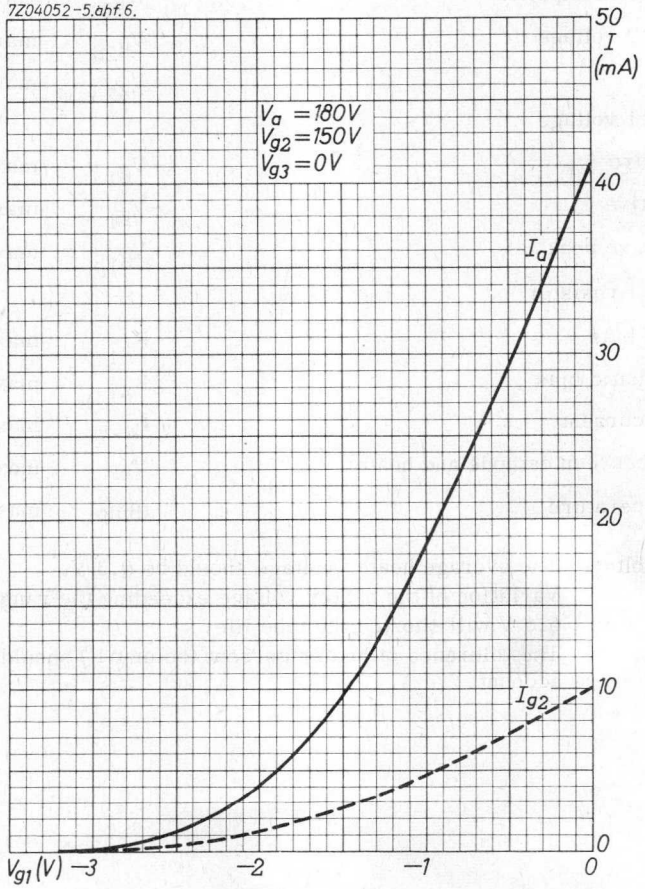

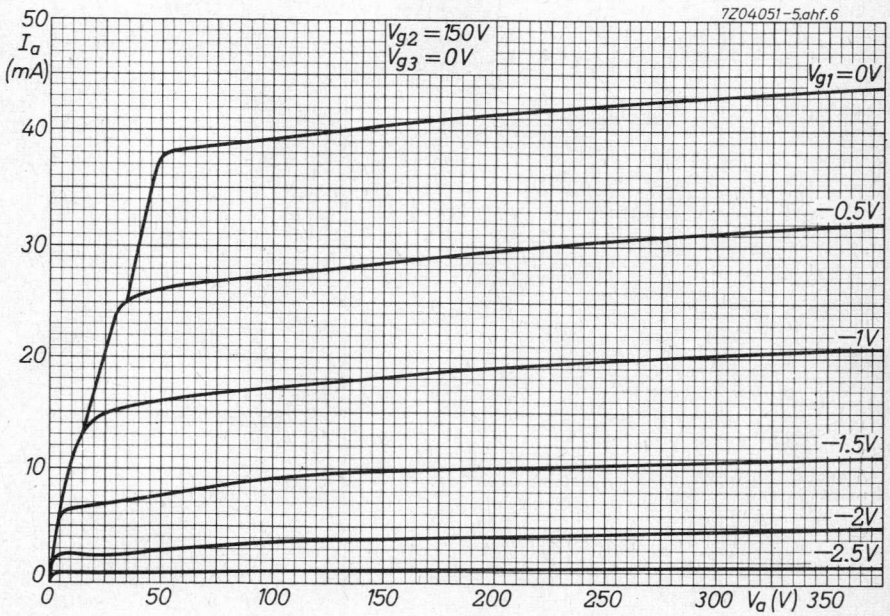

1911



BRITISH

S.Q. TUBE

Special quality double triode designed for use as cascode amplifier, cathode follower etc. in R.F. and A.F. circuits.


QUICK REFERENCE DATA

Life test	10 000 hours
Low interface resistance	
Mechanical quality	Shock and vibration resistant
Base	Noval. Gold plated pins
Heating	Indirect A.C. or D.C.; parallel supply
Heater voltage	V_f 6.3 V
Heater current	I_f 335 mA
Anode current	I_a 15 mA
Mutual conductance	S 12.5 mA/V
Equivalent noise resistance	R_{eq} 250 Ω
Noise factor ($f = 200$ MHz)	F 4.6 dB
Hum voltage	V_g max. 50 μV_{RMS}

DIMENSIONS AND CONNECTIONS

Dimensions in mm

Base: Noval

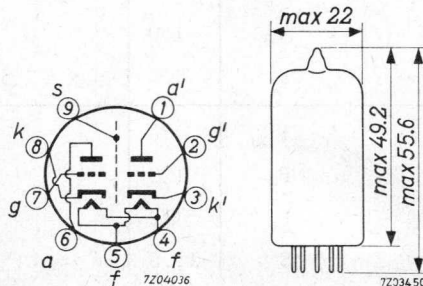

7Z2 7317

CHARACTERISTICS

Column I Nominal value or setting of the tube

II Range values for equipment design: Initial spread

III Range values for equipment design: End of life

		I	II	III	
Heater voltage	V_f	6.3			V
Heater current	I_f	335	318 - 352		mA
Anode supply voltage	V_{ba}	100			V
Grid supply voltage	$+V_{bg}$	9			V
Cathode resistor	R_k	680			Ω
Anode current	I_a	15	14.2-15.8	min. 13.5	mA
Mutual conductance	S	12.5	10.5-14.5	min. 9	mA/V
Amplification factor	μ	33			
Negative grid current	$-I_g$		max. 0.1	max. 1.0	μA
<u>Equivalent noise resistance</u>	R_{eq}	250			Ω
Frequency $f = 45$ MHz					
<u>Noise factor in cascode circuit,</u> adapted to minimum noise	F	4.6			dB
Frequency $f = 200$ MHz					
<u>Input resistance</u>	r_g	3			k Ω
Frequency $f = 100$ MHz					
<u>Cut off voltage</u>	$-V_{g1}$	15			V
Anode voltage	V_a	150			V
Anode current	I_a		max. 5		mA
Anode supply voltage	V_{ba}	90			V
Cathode resistor	R_k	120			Ω
Anode current	I_a	12			mA
Mutual conductance	S	11.5			mA/V

CHARACTERISTICS (continued)

	I	II	III	
<u>Leakage current between cathode and heater</u> Voltage between cathode and heater $V_{kf} = 60$ V (k neg) or = 120 V (k pos)	I_{kf}	max. 6	max. 12	μA
<u>Insulation resistance between two electrodes</u> Voltage between electrodes $V = 200$ V	R	min. 100	min. 20	$M\Omega$
<u>Hum voltage</u> Grid resistor $R_{g1} = 0.5$ $M\Omega$	V_g	max. 50		μV_{RMS}
<u>Vibrational noise output</u> Anode supply voltage $V_{ba} = 100$ V Anode resistor $R_a = 2$ $k\Omega$ Grid supply voltage $+V_{bg} = 9$ V Cathode resistor $R_k = 680$ Ω (by passed) Vibration frequency $f = 10-50$ Hz Acceleration = 2.5 g	V_g	max. 100		mV
<u>Vibrational noise output</u> Anode supply voltage $V_{ba} = 270$ V Anode resistor $R_a = 18$ $k\Omega$ Grid resistor $R_g = 1$ $M\Omega$ Cathode resistor $R_k = 180$ Ω By pass capacitor $C_k = 50$ μF Vibration frequency $f = 50-5000$ Hz Acceleration = 0.5 g	V_g	max. 140		mV

CAPACITANCES Both sections if not otherwise indicated.

		I	II	
Anode to cathode, heater and screen	$C_{a/kfs}$	1.75	1.55 - 1.95	pF
	$C_{a' / k' fs}$	1.65	1.45 - 1.85	pF
Anode to cathode and heater	$C_{a/kf}$	0.5	0.4 - 0.6	pF
	$C_{a' / k' f}$	0.4	0.3 - 0.5	pF
Grid to cathode, heater and screen	$C_{g/kfs}$	3.3	2.7 - 3.9	pF
Grid to cathode and heater	$C_{g/kf}$	3.3	2.7 - 3.9	pF
Anode to grid	C_{ag}	1.4	1.2 - 1.6	pF
Anode to cathode	C_{ak}	0.18	0.14 - 0.22	pF
Cathode to heater	C_{kf}	2.6		pF
	$C_{k' f}$	2.7		pF
Anode to screen	C_{as}	1.3	1.1 - 1.5	pF
Anode to grid, heater and screen	$C_{a/gfs}$	3.0	2.7 - 3.3	pF
	$C_{a' / gfs}$	2.9	2.6 - 3.2	pF
Cathode to grid, heater and screen	$C_{k/gfs}$	6.0	5.1 - 6.9	pF
Anode to anode other section	$C_{aa'}$	0.025	max.0.045	pF
Grid to grid other section	$C_{gg'}$		max.0.005	pF
Anode to grid other section	$C_{ag'}$		max.0.005	pF
Grid to anode other section	$C_{ga'}$		max.0.005	pF
Grid to cathode other section	$C_{gk'}$		max.0.005	pF
Cathode to grid other section	$C_{kg'}$		max.0.005	pF

SHOCK AND VIBRATION RESISTANCE

The following test conditions are applied to assess the mechanical quality of the tube. These conditions are not intended to be used as normal operating conditions.

Shock

The tube is subjected 5 times in each of 4 positions to an acceleration of 500 g supplied by an NRL shock machine with the hammer lifted over an angle of 30°.

Vibration

The tube is subjected during 32 hours in each of 3 positions to a vibration frequency of 50 Hz with an acceleration of 2.5 g.

7Z2 7320

LIFE

Production samples are tested to be within the end of life values (column III) under the following conditions during 10 000 hours.

Anode supply voltage	V_{ba}	100 V
Grid supply voltage	$+V_{bg}$	9 V
Cathode resistor	R_k	680 Ω
Grid resistor	R_g	47 k Ω
Cathode to heater voltage (k neg)	V_{kf}	60 V

LIMITING VALUES (Absolute max. rating system)

Anode voltage	V_{aO}	max. 550 V
	V_a	max. 250 V
Anode voltage (Zero anode current)	$V_a(I_a = 0)$	max. 400 V
Anode dissipation	W_a	max. 1.65 W
Both sections	$\left\{ \begin{array}{l} W_a \\ W_{a+a'} \end{array} \right.$	max. 2.0 W
		max. 2.2 W
Grid dissipation	W_g	max. 30 mW
Grid voltage	$-V_g$	max. 110 V
Grid peak voltage	$-V_{gp}$	max. 200 V
Pulse duration max. 200 μ s		
Duty factor max. 0.1		
Cathode current	I_k	max. 22 mA
Cathode peak current	I_{kp}	max. 110 mA
Pulse duration max. 200 μ s		
Duty factor max. 0.1		
Voltage between cathode and heater		
cathode positive	$V_{kf}(k \text{ pos})$	max. 150 V
cathode negative	$V_{kf}(k \text{ neg})$	max. 100 V
Bulb temperature	t_{bulb}	max. 165 $^{\circ}$ C
Grid resistor with fixed bias	R_g	max. 0.5 M Ω
	R_g	max. 1.0 M Ω

7Z2 7321

LIMITING VALUES (continued)

Heater voltage: The average heater voltage should be 6.3 V.

Variations of the heater voltage exceeding the range of 6.0 V to 6.6 V will shorten the tube life.

The tolerance of heater current (column II) should be taken into account.

OPERATING CHARACTERISTICS

Additive mixer

Anode supply voltage	V_{ba}	60	90	150	V
Anode resistor	R_a	0	1	3.9	$k\Omega$
Grid resistor	R_g	1	1	1	$M\Omega$
Grid oscillator voltage	V_{osc}	2	2.5	3	V_{RMS}
Anode current	I_a	4.7	7.7	11	mA
Conversion conductance	S_c	2.9	3.5	4.1	mA/V
Internal resistance	R_i	8.3	7	6.1	$k\Omega$

Output tube class A

Anode voltage	V_a		220		V
Load resistance	$R_{a\sim}$		20		$k\Omega$
Negative grid voltage	$-V_g$		6.5		V
Input voltage	V_i	0	1.5	4.5	V_{RMS}
Anode current	I_a	6.5	-	9.2	mA
Output power	W_o	-	0.05	0.5	W
Total distortion	d_{tot}			7	%


Output tube class B (two units). Constant sinusoidal input voltage (single tone).

Anode voltage	V_a		200		V
Load resistance	$R_{aa\sim}$		22		$k\Omega$
Negative grid voltage	$-V_g$		6		V
Input voltage	V_i	0	0.9	4.0	V_{RMS}
Anode current	I_a	2x5	-	2x9	mA
Output power	W_o	-	0.05	1.2	W
Total distortion	d_{tot}	-	-	3	%


OPERATING CHARACTERISTICS (continued)

Output tube class B (two units). Speech and music input voltage


Anode voltage	V_a	200	V
Load resistance	$R_{aa\sim}$	10	$k\Omega$
Negative grid voltage	$-V_g$	6	V
Input voltage	V_i	0 0.9	4.0 V_{RMS}
Anode current	I_a	2x5 -	2x13.5 mA
Output power	W_o	- 0.05	1.5 W
Total distortion	d_{tot}	- -	4 %

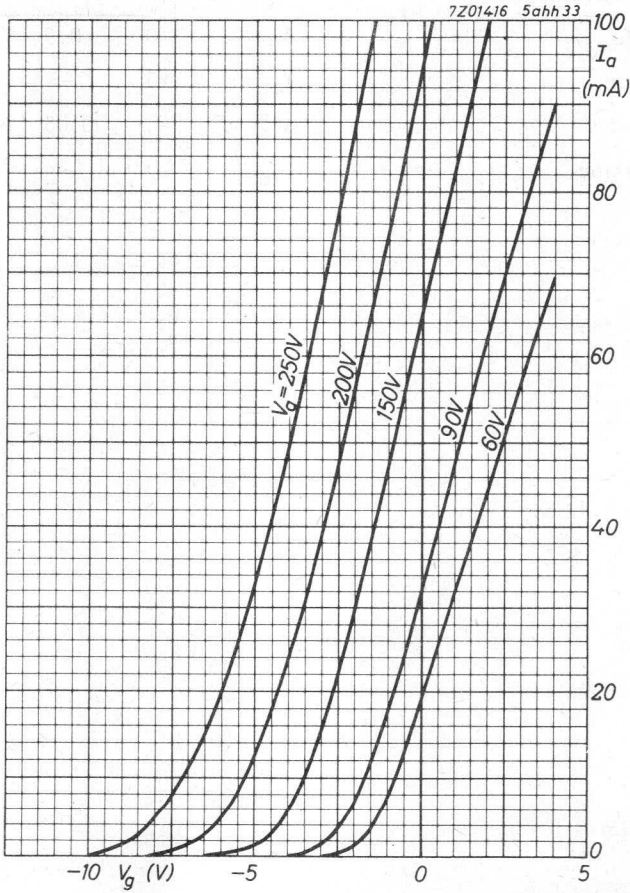


7Z01415 5ahh33

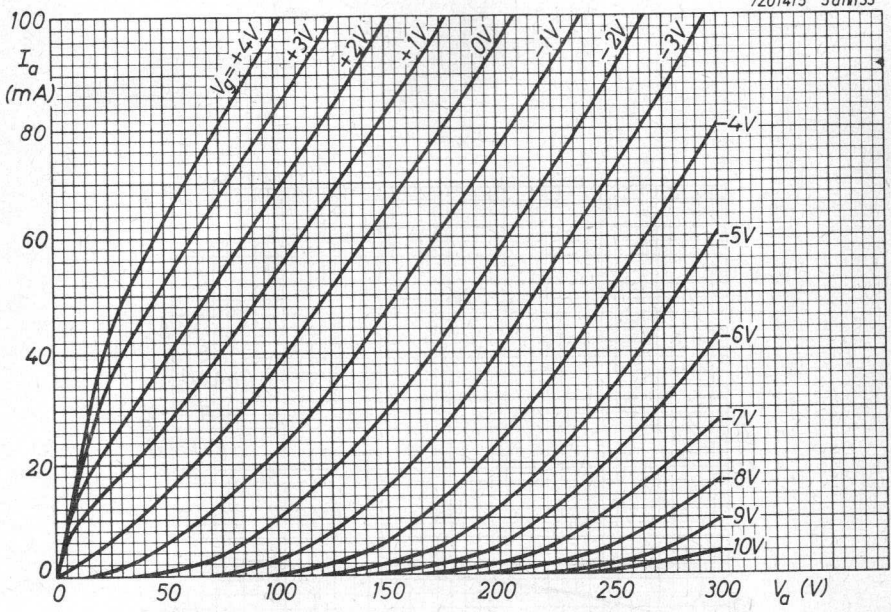





7Z01417 5ahh33

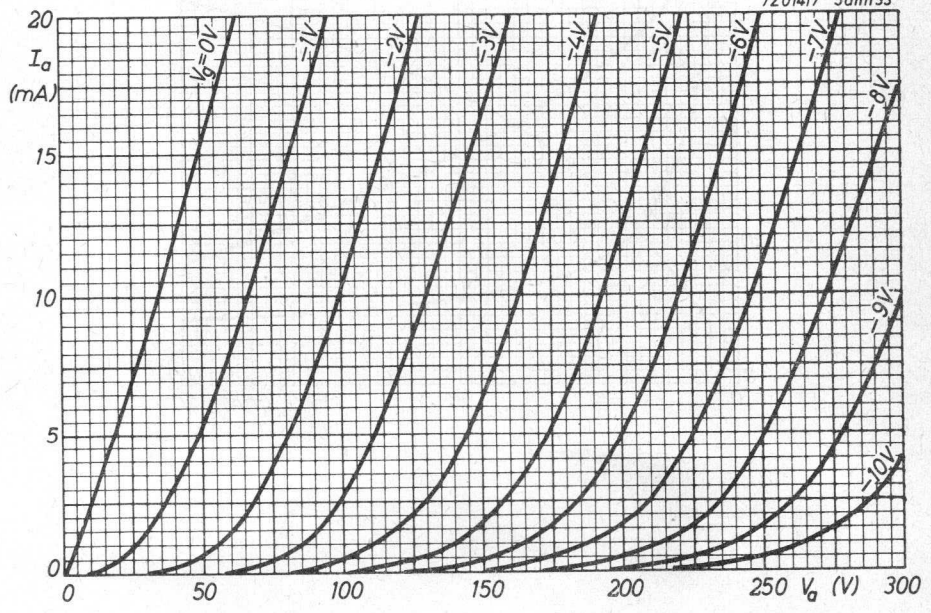


7Z01419 5ahh33 6


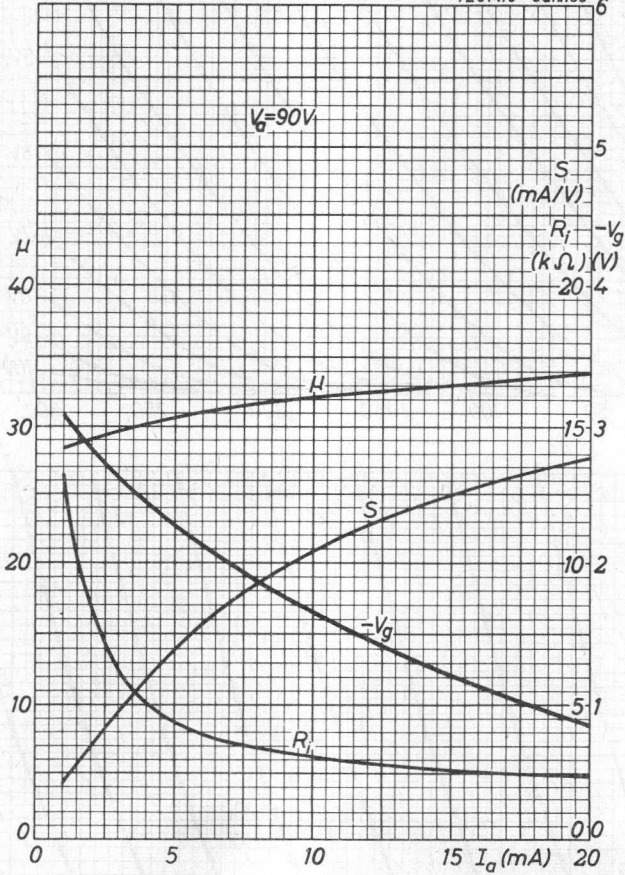


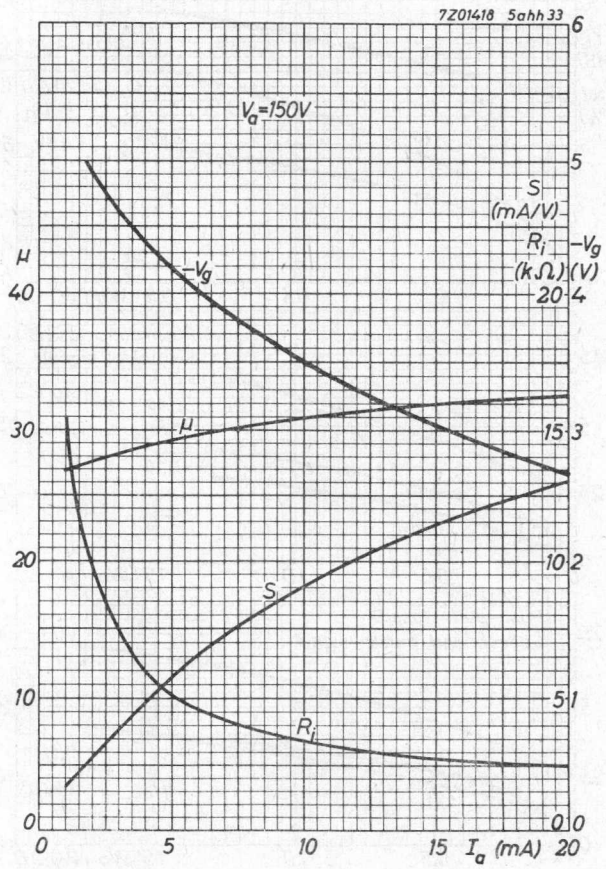

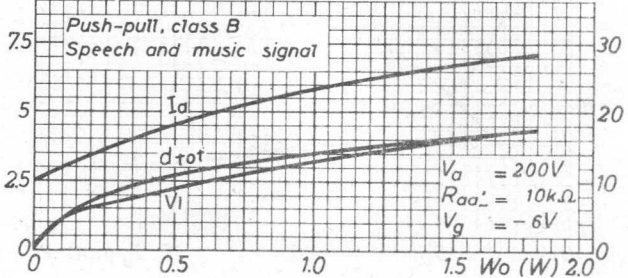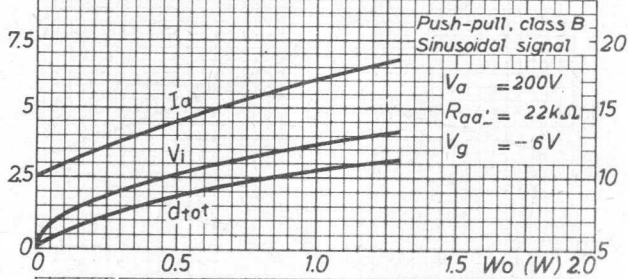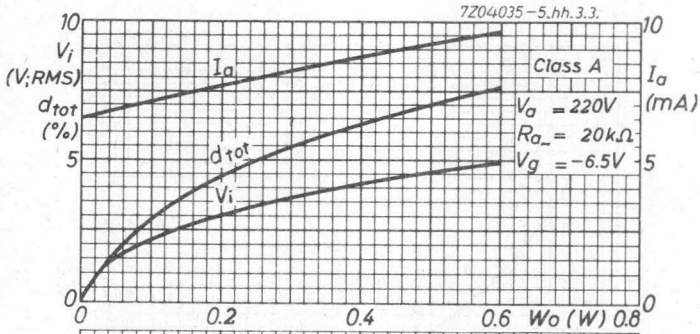

7204034-5.hh.3.3

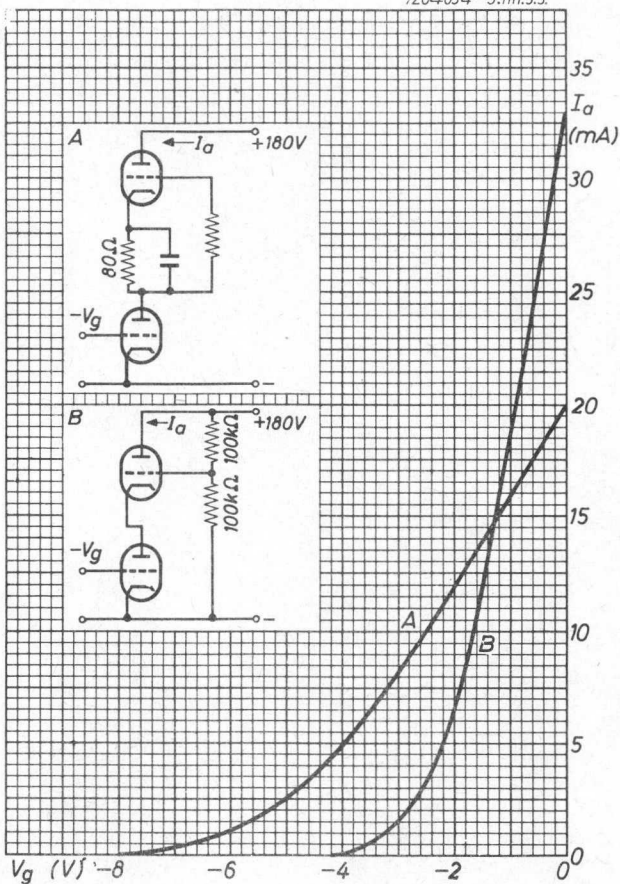

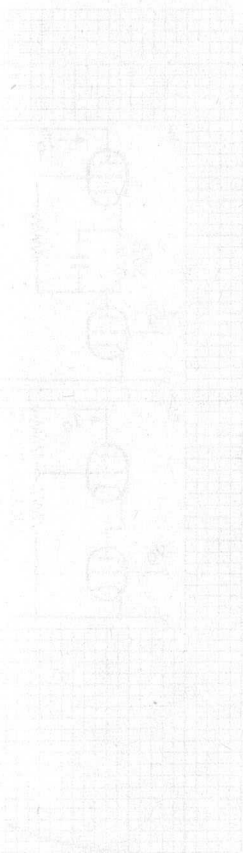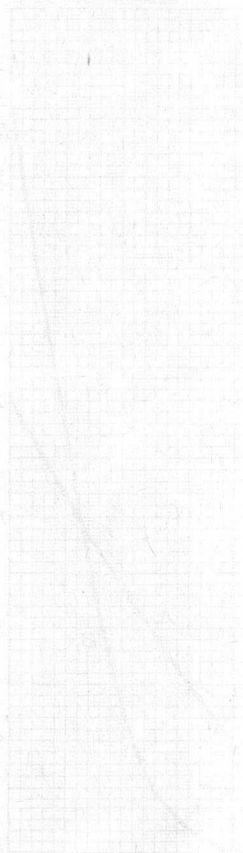

S.Q. TUBE

Special quality tube designed for use as wide band amplifier, power output tube and series regulator tube.


QUICK REFERENCE DATA

Life test	10 000 hours	
Low interface resistance		
Mechanical quality	Shock and vibration resistant	
Base	Octal	
Heating	Indirect A.C. or D.C.; Parallel supply	
Heater voltage	V_f	6.3 V
Heater current	I_f	1.2 A
Anode current	I_a	100 mA
Mutual conductance	S	14 mA/V
Output power. Class B (two tubes)	W_o	30 W


DIMENSIONS AND CONNECTIONS

Dimensions in mm

Base: Octal



7204462

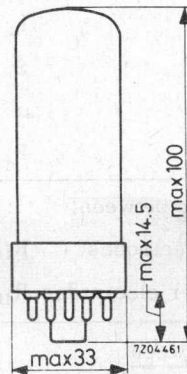

7Z2 6242

CHARACTERISTICS

Column I Nominal value or setting of the tube

II Range values for equipment design: Initial spread

III Range values for equipment design: End of life

		I	II	III	
Heater voltage	V_f	6.3			V
Heater current	I_f	1.2	1.12-1.28		A
Anode voltage	V_a	100			V
Grid No.2 voltage	V_{g2}	100			V
Cathode resistor	R_k	75			Ω
Anode current	I_a	100	85- 118	min. 65	mA
Grid No.2 current	I_{g2}	5.2	4.0- 6.5		mA
Mutual conductance	S	14	11.5-16.5	min. 9.5	mA/V
Amplification factor	μ_{g2g1}	5.6			
Internal resistance	R_i	5.0			k Ω
<u>Cut off voltage</u>	$-V_{g1}$	35			V
Anode current	I_a	0.1			mA
<u>Negative grid current</u>	$-I_{g1}$		max. 1	max. 2	μ A
<u>As triode. (Grid No.2 connected to anode)</u>					
Anode voltage	V_a	100			V
Cathode resistor	R_k	85			Ω
Anode current	I_a	100			mA
Mutual conductance	S	14			mA/V
Amplification factor	μ	5.2			
Internal resistance	R_i	0.35			k Ω
<u>Insulation resistance between;</u>					
Anode and other electrodes	R_{ins}		min. 100		M Ω
Grid No.1 and other electrodes	R_{ins}		min. 100		M Ω
<u>Leakage current between cathode and heater</u>	I_{kf}		max. 20		μ A

CAPACITANCES

Anode to grid No.2, grid No.3,
cathode and heater

	I	II	
C_{a/g_2g_3kf}	9	8 - 10	pF

Grid No.1 to grid No.2, grid No.3,
cathode and heater

C_{g_1/g_2g_3kf}	18	16.5-19.5	pF
--------------------	----	-----------	----

Anode to grid No.1

C_{ag_1}		max. 1.2	pF
------------	--	----------	----

SHOCK AND VIBRATION RESISTANCE

The following test conditions are applied to assess the mechanical quality of the tube. These conditions are not intended to be used as normal operating conditions.

Shock

The tube is subjected 5 times in each of 4 positions to an acceleration of 500 g supplied by an NRL shock machine with the hammer lifted over an angle of 30°.

Vibration

The tube is subjected during 32 hours in each of 3 positions to a vibration frequency of 50 Hz with an acceleration of 2.5 g.

LIFE

Production samples are tested to be within the end of life values (column III) during 10 000 hours

LIMITING VALUES (Absolute max. rating system)

Anode voltage	V_{a_0}	max.	650	V
	V_a	max.	400	V
Anode dissipation	W_a	max.	15	W
Anode + grid No.2 dissipation	W_{a+g_2}	max.	16	W
Grid No.2 voltage	$V_{g_2_0}$	max.	650	V
	V_{g_2}	max.	300	V
Grid No.2 dissipation	W_{g_2}	max.	5.5	W
Grid No.1 resistor	R_{g_1}	max.	0.5	MΩ
Cathode current	I_k	max.	220	mA
$T_{av} = 10$ ms				

7Z2 7325

LIMITING VALUES (continued)

Cathode peak current	I_{kp}	max. 1.2 A
Voltage between cathode and heater		
cathode positive	$V_{kf}(k\text{ pos})$	max. 250 V
cathode negative	$V_{kf}(k\text{ neg})$	max. 200 V
Bulb temperature	t_{bulb}	max. 220 °C

Heater voltage: The average heater value should be 6.3 V.

Variation of the heater voltage exceeding the range of 6.0 V to 6.6 V will shorten the tube life.


The tolerance of heater current should be taken into account.

OPERATING CHARACTERISTICS


Output tube. Class B (two tubes). Excitation up to maximum output is continuously permitted.

Anode voltage	V_a	250	V
Grid No.2 voltage	V_{g2}	170	V
Grid No.1 voltage	$-V_{g1}$	34	V
Load resistor	R_{aa}	3	kΩ
Grid No.2 resistor	R_{g2}	2x0.5	kΩ ¹⁾
Input voltage	V_i	0	22 VRMS
Anode current	I_a	2x12	2x94 mA
Grid No.2 current	I_{g2}	2x1	2x28 mA
Output power	W_o	0	30 W
Total distortion	d_{tot}	-	6 %


¹⁾ To avoid overloading of grid No.2 this resistor should not be by-passed.


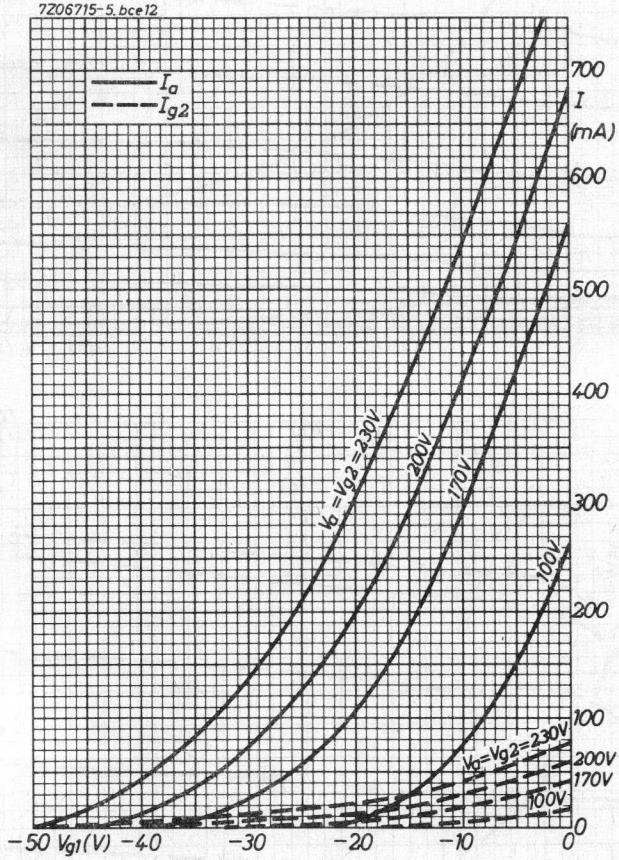


7204753-5.bce12


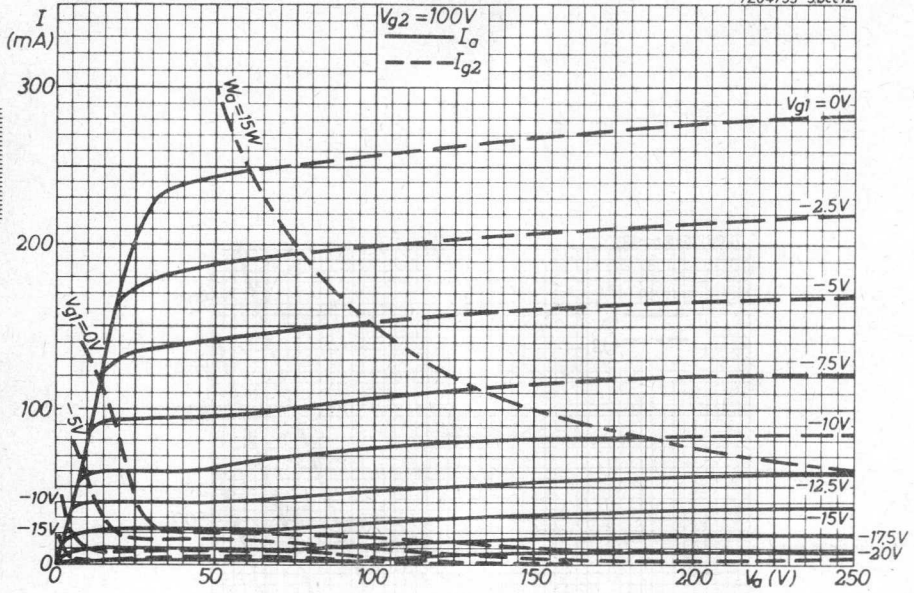


7204754-5.bce12

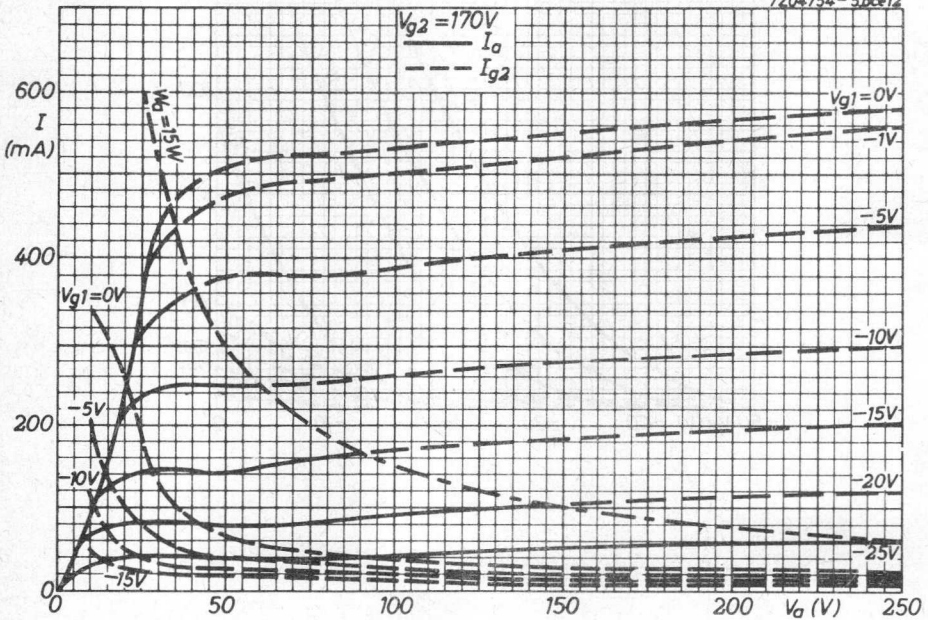


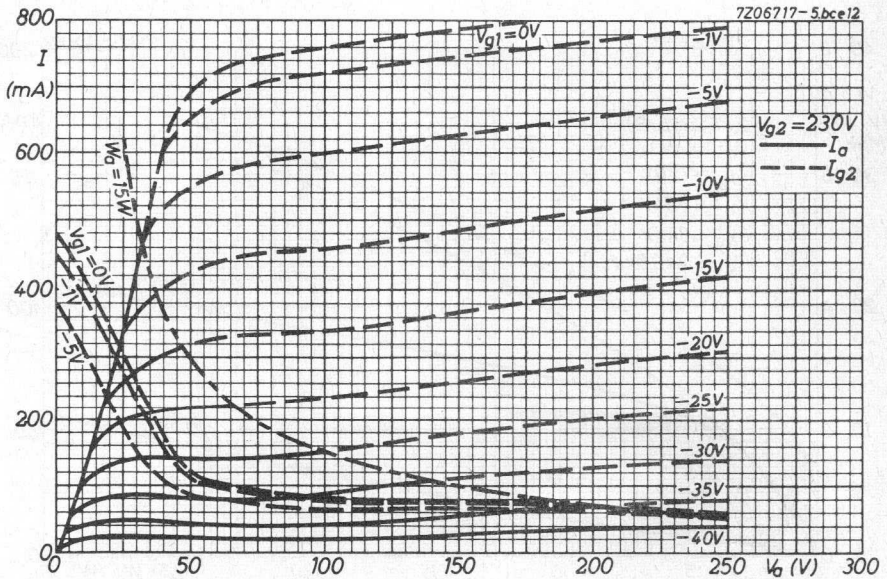
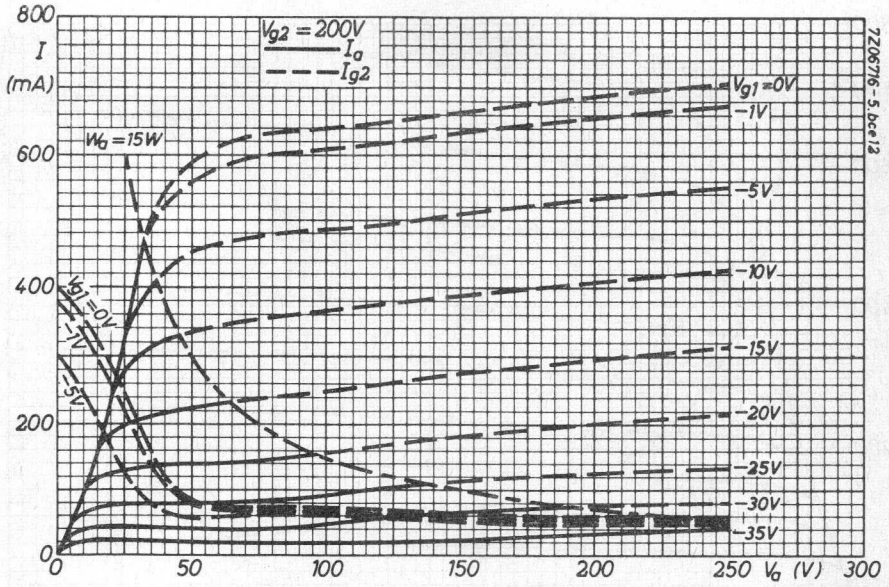


E235L

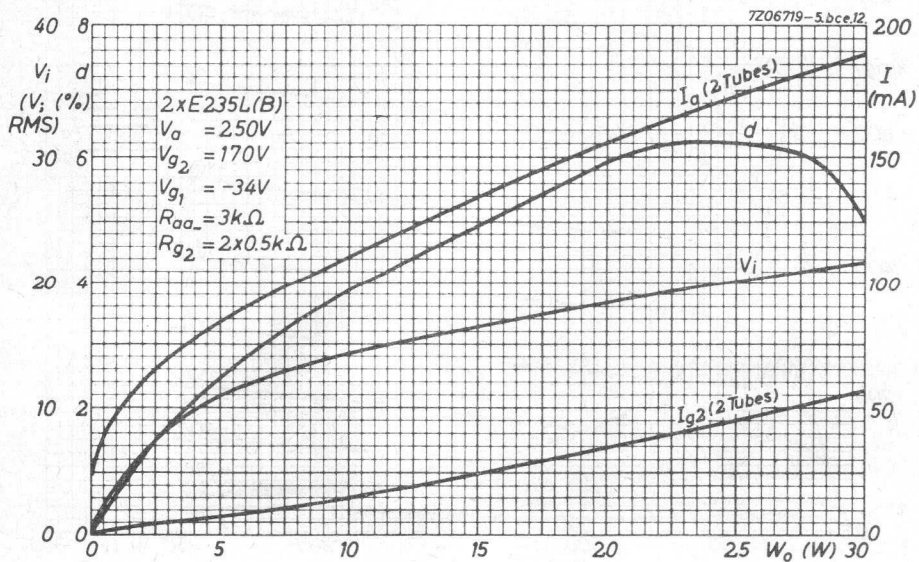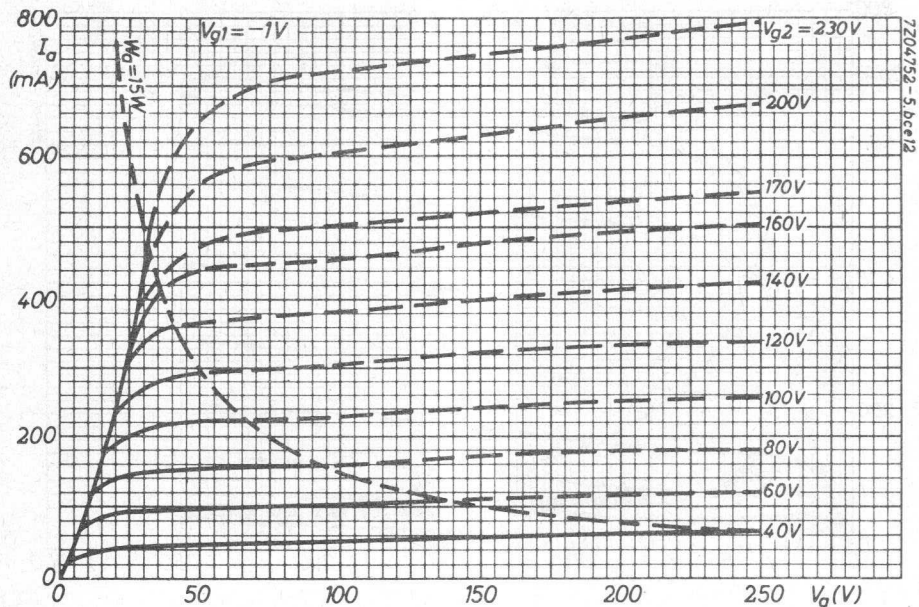

7Z04-757-5bce.12

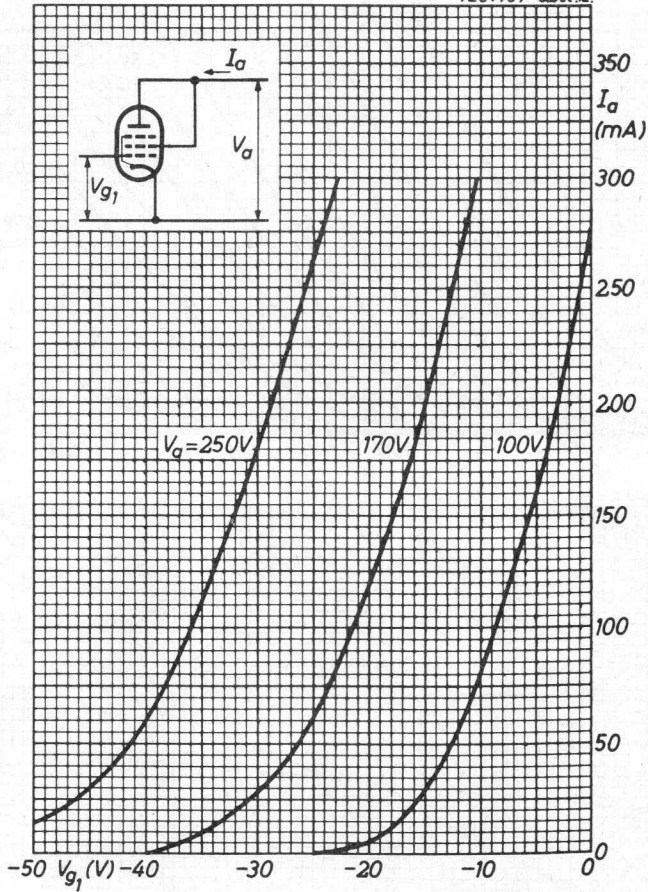

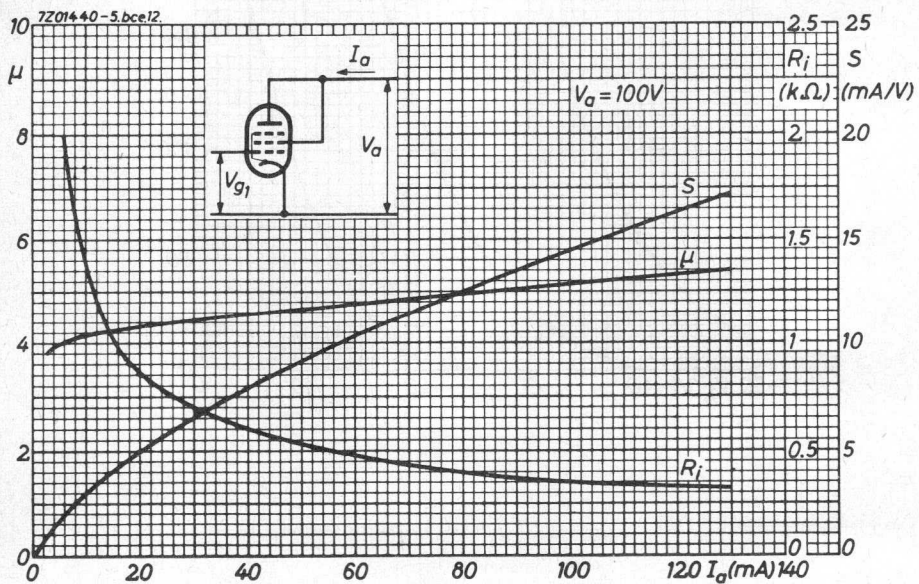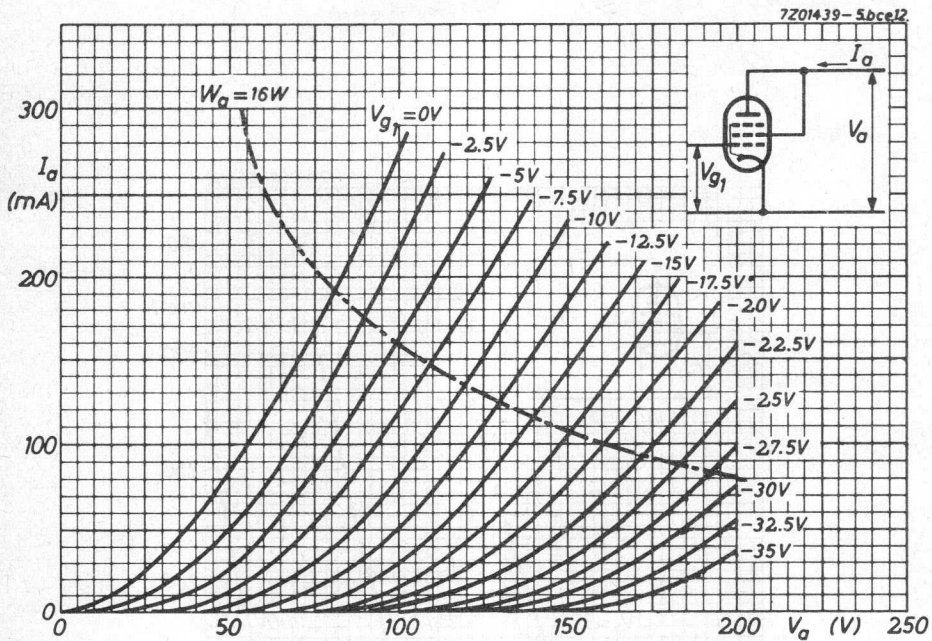

S.Q. TUBE



Special quality output pentode designed for use as line output tube, power output tube, wide band amplifier and series regulator tube.

QUICK REFERENCE DATA		
Life test	10 000 hours	
Low interface resistance		
Mechanical quality	Shock and vibration resistant	
Base	Octal	
Heating	Indirect A.C. or D.C.; parallel supply	
Heater voltage	V_f	6.3 V
Heater current	I_f	1.2 A
Anode current	I_a	100 mA
Mutual conductance	S	14 mA/V
Output power. Class B (2 tubes)	W_o	30 W

DIMENSIONS AND CONNECTIONS

Dimensions in mm

Base: Octal

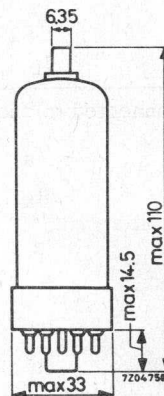

7Z2 6246

CHARACTERISTICS

Column I Nominal value or setting of the tube

II Range values for equipment design: Initial spread

III Range values for equipment design: End of life

		I	II	III	
Heater voltage	V_f	6.3			V
Heater current	I_f	1.2	1.12 - 1.28		A
Anode voltage	V_a	100			V
Grid No.2 voltage	V_{g_2}	100			V
Cathode resistor	R_k	75			Ω
Anode current	I_a	100	85 - 118	min. 65	mA
Grid No.2 current	I_{g_2}	5.2	4.0 - 6.5		mA
Mutual conductance	S	14	11.5 - 16.5	min. 9.5	mA/V
Amplification factor	$\mu_{g_2g_1}$	5.6			
Internal resistance	R_i	5.0			k Ω
<u>Cut-off voltage</u>	$-V_{g_1}$	35			V
Anode current	I_a	0.1			mA
<u>Negative grid No.1 current</u>	$-I_{g_1}$		max. 1	max. 2	μ A
<u>Cut-off voltage</u>	$-V_{g_1}$		max. 120		V
Anode voltage	V_a	7			kV _p
Grid No.2 voltage	V_{g_2}	190			V
Cathode current	I_k	60			μ A
<u>As triode (grid No.2 connected to anode)</u>					
Anode voltage	V_a	100			V
Cathode resistor	R_k	85			Ω
Anode current	I_a	100			mA
Mutual conductance	S	14			mA/V
Amplification factor	μ	5.2			
Internal resistance	R_i	350			Ω

CHARACTERISTICS (continued)Insulation resistance between:

Anode and other electrodes

	II	
R_{ins}	min. 100	$M\Omega$
R_{ins}	min. 100	$M\Omega$
I_{kf}	max. 20	μA

Grid No. 1 and other electrodes

Leakage current between cathode and heater**CAPACITANCES**Anode to grid No. 2, grid No. 3,
cathode and heater

	I	II		
C_{a/g_2g_3kf}	10	9 -	11	pF
C_{g_1/g_2g_3kf}	19	17.5 - 20.5		pF
C_{ag_1}		max.	1.1	pF

Grid No. 1 to grid No. 2, grid No. 3,
cathode and heater

Anode to grid No. 1

SHOCK AND VIBRATION RESISTANCE

The following test conditions are applied to assess the mechanical quality of the tube. These conditions are not intended to be used as normal operating conditions.

Shock

The tube is subjected 5 times in each 4 positions to an acceleration of 500 g supplied by an NRL shock machine with the hammer lifted over an angle of 30°.

Vibration

The tube is subjected during 32 hours in each of 3 positions to a vibration frequency of 50 Hz with an acceleration of 2.5 g.

LIFE

Production samples are tested to be within the end of life values (column III) during 10 000 hours.

LIMITING VALUES (Absolute max. rating system)

Anode voltage	V_{a_0}	max.	650 V
	V_a	max.	400 V
Anode peak voltage	$+V_{a_p}$	max.	7 kV
	$-V_{a_p}$	max.	1.5 kV
Pulse duration = max. 18 μ sec			
Duty factor = max. 0.22			
Anode dissipation	W_a	max.	15 W
Anode + grid No.2 dissipation	W_{a+g_2}	max.	16 W
Grid No.2 voltage	$V_{g_{20}}$	max.	650 V
	V_{g_2}	max.	300 V
Grid No.2 dissipation	W_{g_2}	max.	5.5 W
Grid No.2 dissipation during heating up of EHT diode	W_{g_2}	max.	7.0 W
Grid No.1 peak voltage	$-V_{g_{1p}}$	max.	1 kV
Pulse duration = max. 18 μ sec			
Duty factor = max. 0.22			
Grid No.1 resistor	R_{g_1}	max.	0.5 M Ω
Grid No.1 resistor in line output circuits	R_{g_1}	max.	2.2 M Ω
Cathode current	I_k	max.	220 mA
Cathode peak current	I_{k_p}	max.	1.2 A
Averaging time = max. 10 msec			
Voltage between cathode and heater			
Cathode positive	V_{kf} (k pos)	max.	250 V
Cathode negative	V_{kf} (k neg)	max.	200 V
Bulb temperature	t_{bulb}	max.	220 $^{\circ}$ C

Heater voltage: The average heater value should be 6.3 V.

Variation of the heater voltage exceeding the range of 6.0 V to 6.6 V will shorten the tube life.

The tolerance of heater current should be taken into account.


OPERATING CHARACTERISTICS

Output tube class B (2 tubes) Excitation to maximum output is continuously permitted.


Anode voltage	V_a	250	V
Grid No. 2 voltage	V_{g_2}	170	V
Grid No. 1 voltage	$-V_{g_1}$	34	V
Load resistance	$R_{aa \sim}$	3	$k\Omega$
Grid No. 2 resistor	R_{g_2}	2×0.5	$k\Omega$ ¹⁾
Input voltage	V_i	0 22	V_{RMS}
Anode current	I_a	2x12 2x94	mA
Grid No. 2 current	I_{g_2}	2x1 2x28	mA
Output power	W_o	0 30	W
Total distortion	d_{tot}		6 %

¹⁾ To avoid overloading of grid No. 2 this resistor should not be by-passed.


7206715-5, bce12


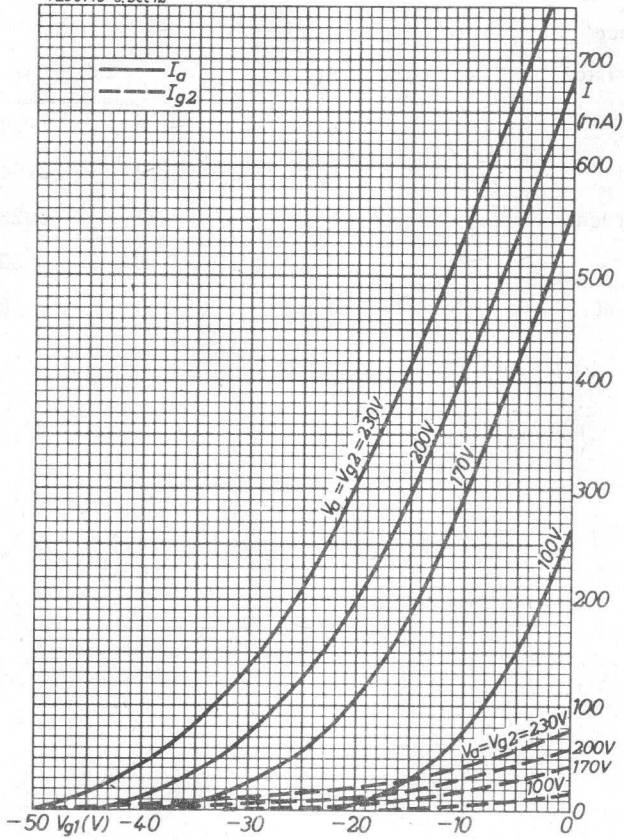



7204753-5bce12

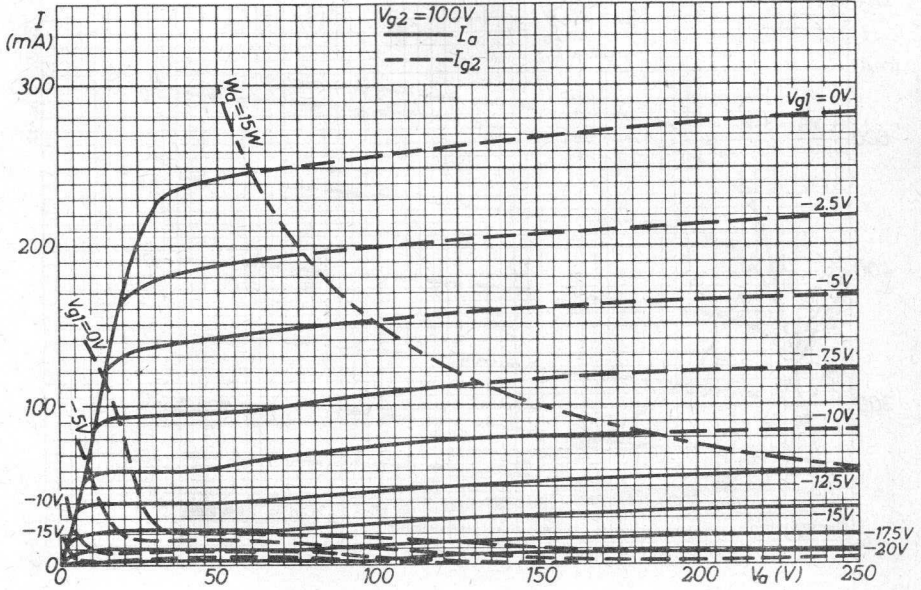


7204754-5bce12


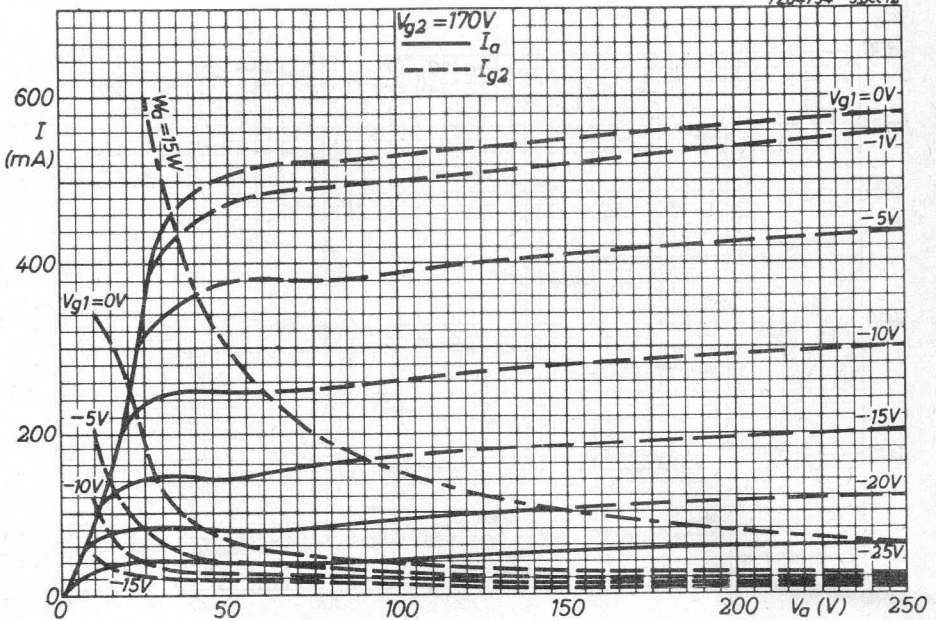


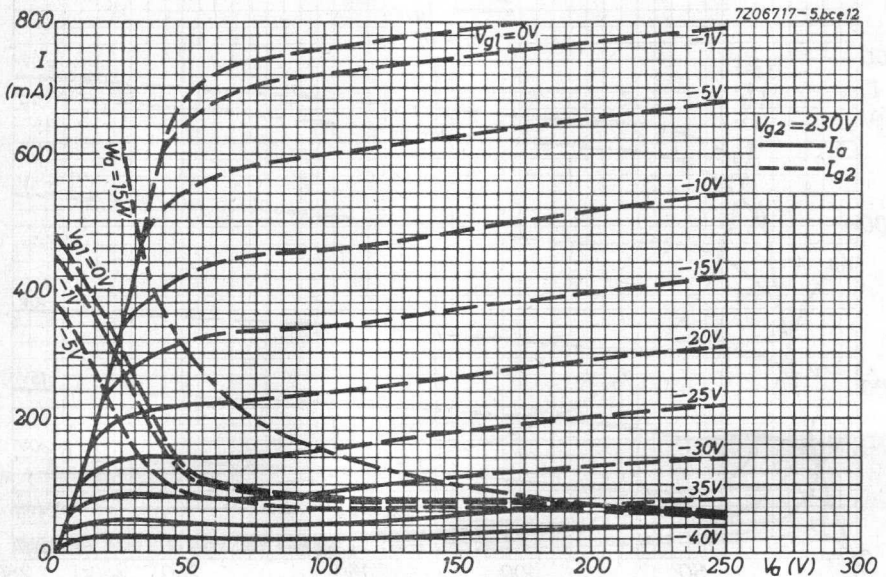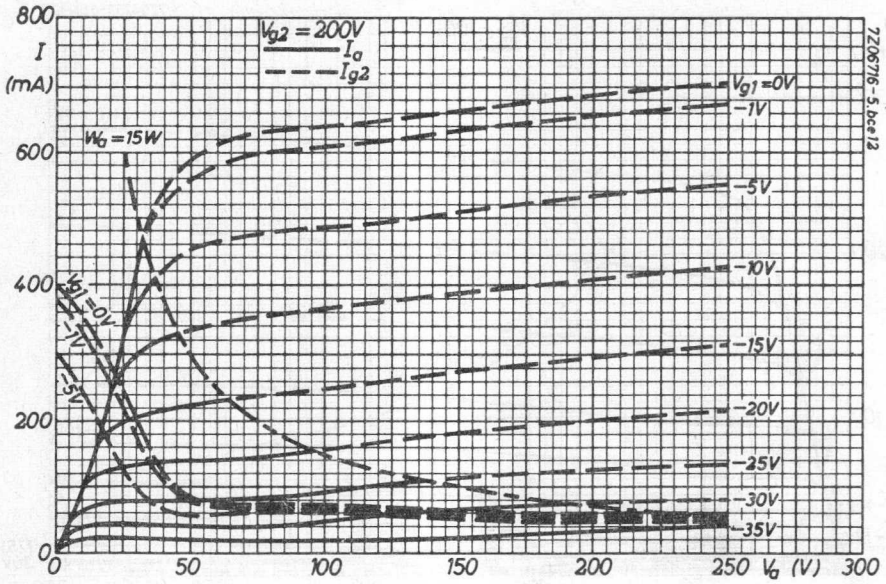


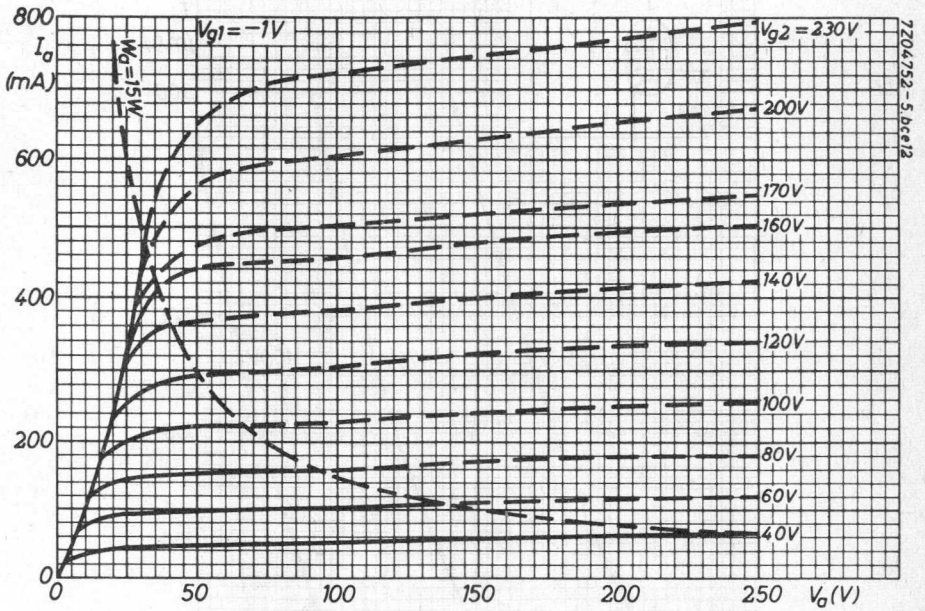

7204-757-5.bce.12

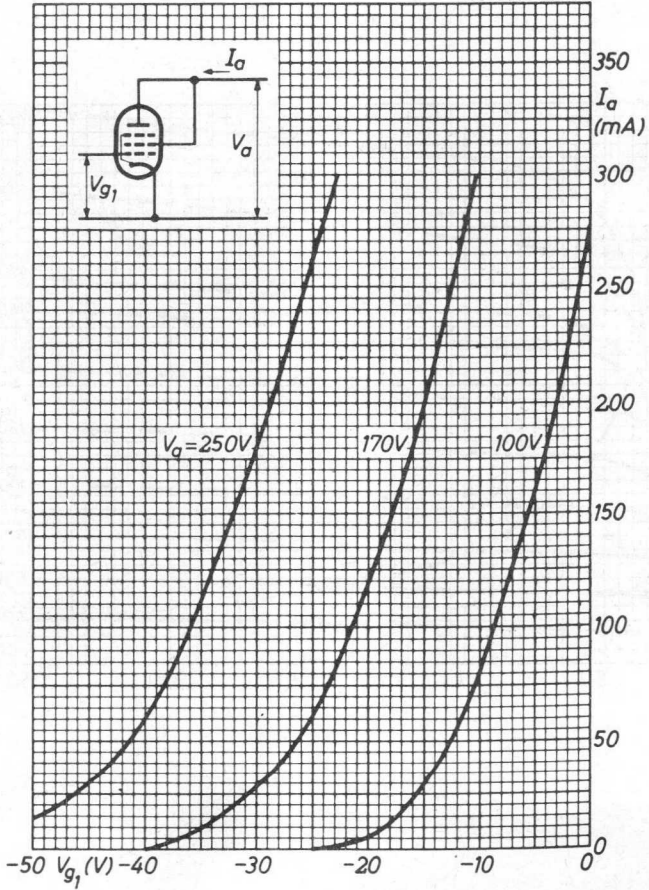

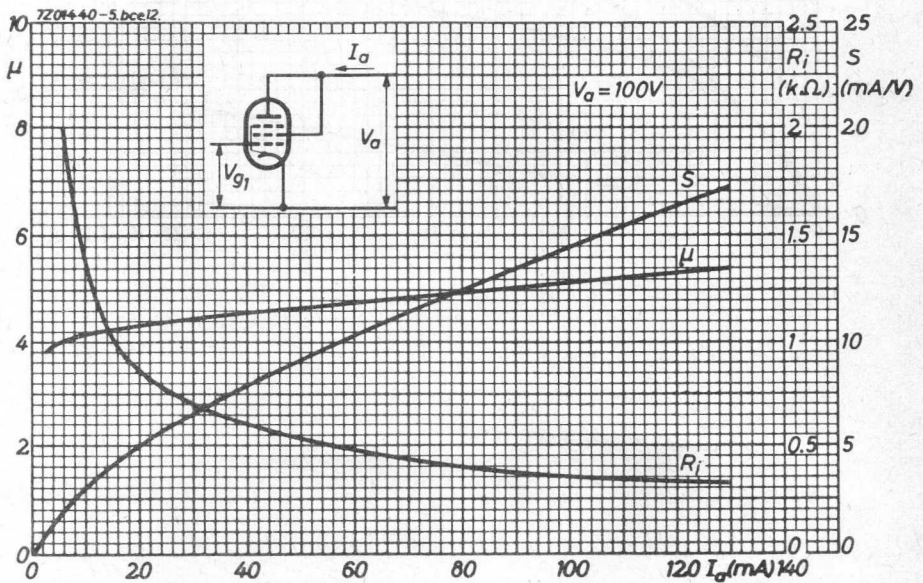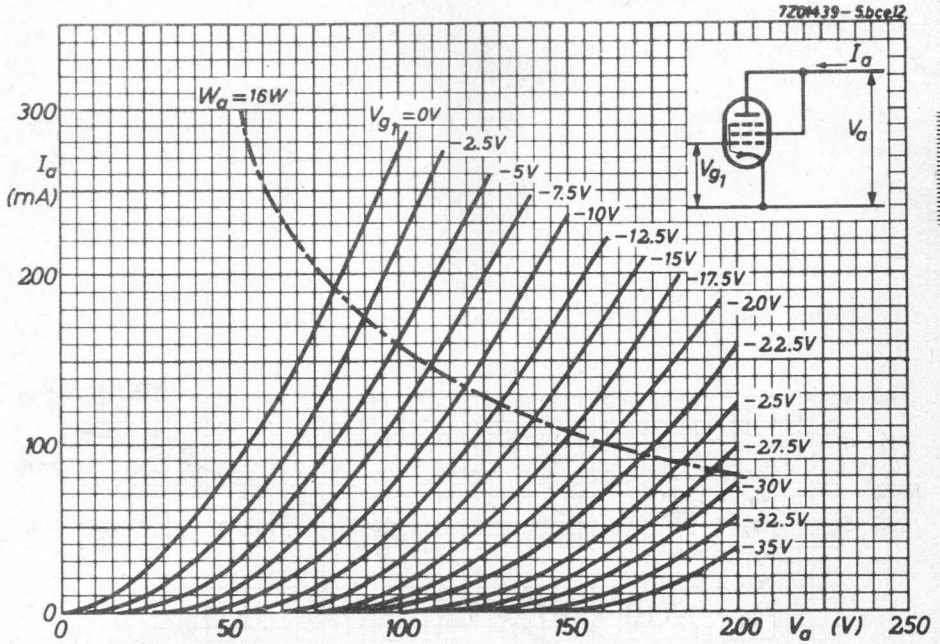

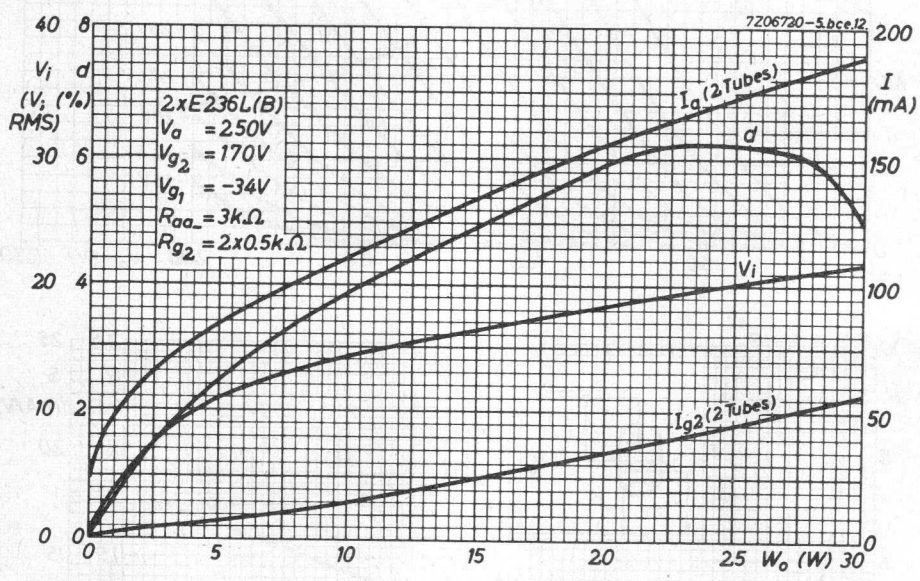

S.Q. TUBE

Special quality pentode designed for use as wide band amplifier.



QUICK REFERENCE DATA

Life test	10 000 hours	
Low interface resistance		
Mechanical quality	Shock and vibration resistant	
Base	Noval. Gold plated pins	
Heating	Indirect A.C. or D.C.; Parallel supply	
Heater voltage	V_f	6.3 V
Heater current	I_f	315 mA
Anode current	I_a	20 mA
Transconductance	S	26 mA/V
Equivalent noise resistance	R_{eq}	220 Ω

DIMENSIONS AND CONNECTIONS

Dimensions in mm

Base: Noval



7Z2 6251

CHARACTERISTICS

Column I Nominal value or setting of the tube

II Range values for equipment design: Initial spread

III Range values for equipment design: End of life

		I	II	III	
Heater voltage	V_f	6.3			V
Heater current	I_f	315	299- 331		mA
Anode supply voltage	V_{ba}	190			V
Grid No.2 supply voltage	V_{bg_2}	160			V
Grid No.3 voltage	V_{g_3}	0			V
Grid No.1 supply voltage	$+V_{bg_1}$	8			V
Cathode resistor	R_k	370			Ω
Anode current	I_a	20	18.8-21.2	min. 17	mA
Grid No.2 current	I_{g_2}	6	5.3- 6.7		mA
Mutual conductance	S	26	22- 30	min. 17.5	mA/V
Internal resistance	R_i	100			k Ω
Amplification factor	$\mu_{g_2g_1}$	60			
Negative grid current	$-I_{g_1}$		max. 0.3	max. 1.0	μA
Equivalent noise resistance	R_{eq}	220			Ω
Input resistance	r_{g_1}	1.4			k Ω
Pin 1 connected to pin 3					
Frequency 100 MHz					
S/C		2.2			mA/V/pF
$S/2\pi(C_g + C_a + 5 \text{ pF})$		180			MHz
Anode supply voltage	V_{ba}	180			V
Grid No.2 supply voltage	V_{bg_2}	150			V
Grid No.3 voltage	V_{g_3}	0			V
Cathode resistor	R_k	80			Ω
Anode current	I_a	17			mA
Grid No.2 current	I_{g_2}	5.1			mA
Mutual conductance	S	24.5			mA/V

7Z2 7330

CHARACTERISTICS (continued)

As triode (grid No.2 connected to anode,
grid No.3 connected to cathode)

		I	
Anode supply voltage	V_a	160	V
Grid No.1 supply voltage	$+V_{bg_1}$	8	V
Cathode resistor	R_k	400	Ω
Anode current	I_a	24	mA
Mutual conductance	S	33	mA/V
Internal resistance	R_i	1.8	k Ω
Amplification factor	μ	60	
Equivalent noise resistance	R_{eq}	100	Ω

CAPACITANCES

		Without external shield		With external shield		
		I	II	I	II	
Grid No.1 to grid No.2, grid No.3, cathode, heater and screen	C_{g_1/g_2g_3kfs}	9.3	8.3-10.3	9.4	8.4-10.4	pF
Anode to grid No.2, grid No.3, cathode, heater and screen	C_{a/g_2g_3kfs}	2.6	2.3- 2.9	3.6	3.2- 4.0	pF
Anode to grid No.1	C_{ag_1}		max. 35		max. 30	mpF
Grid No.1 to grid No.2, grid No.3, cathode, heater and screen	C_{g_1/g_2g_3kfs}	15.5		15.6		pF
Cathode current	$I_k = 26$ mA					

SHOCK AND VIBRATION RESISTANCE

The following test conditions are applied to assess the mechanical quality of the tube. These conditions are not intended to be used as normal operating conditions.

Shock

The tube is subjected 5 times in each of 4 positions to an acceleration of 500 g supplied by an NRL shock machine with the hammer lifted over an angle of 30°.

Vibration


The tube is subjected during 32 hours in each of 3 positions to a vibration frequency of 50 Hz with an acceleration of 2.5 g.


7Z2 7331

OPERATING CHARACTERISTICS


Anode supply voltage	V_{ba}	190	190	190	190	190	V
Grid No.3 voltage	V_{g_3}	0	0	0	0	0	V
Grid No.2 supply voltage	V_{bg_2}	160	160	160	160	120	V
Grid No.1 supply voltage	$+V_{bg_1}$	8	8	8	9	8	V
Cathode resistor	R_k	370	500	780	630	730	Ω
Anode current	I_a	20	15	10	13.5	10	mA
Grid No.2 current	I_{g_2}	6	4.5	3	4	2.8	mA
Mutual conductance	S	26	23	19	22	20	mA/V
Internal resistance	R_i	100	120	155	130	155	$k\Omega$
Amplification factor	$\mu_{g_2g_1}$	60	58	56	58	56	
Equivalent noise resistance	R_{eq}	220	230	250	240	220	Ω
<u>Input resistance</u>	r_{g_1}	1.4	1.5	1.7	1.6	1.6	$k\Omega$
Pin No.1 connected to pin No.3							
Frequency = 100 MHz							
<u>Capacitance</u> grid No.1 to grid No.2, grid No.3, cathode, heater and screen (no external shield)							
	C_{g_1/g_2g_3kfs}	15.5	15	14.3	14.8	14.8	pF
	$S/2\pi(C_g + C_a + 5 \text{ pF})$	180	162	138	156	142	MHz
	S/C	2.2	1.9	1.6	1.85	1.7	mA/V/pF


7201721/5bhj6

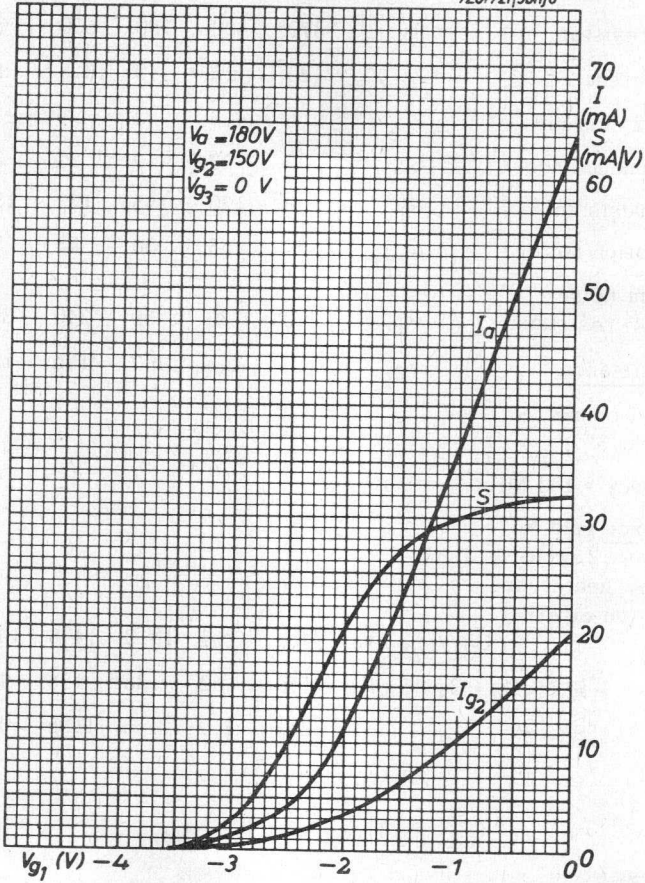

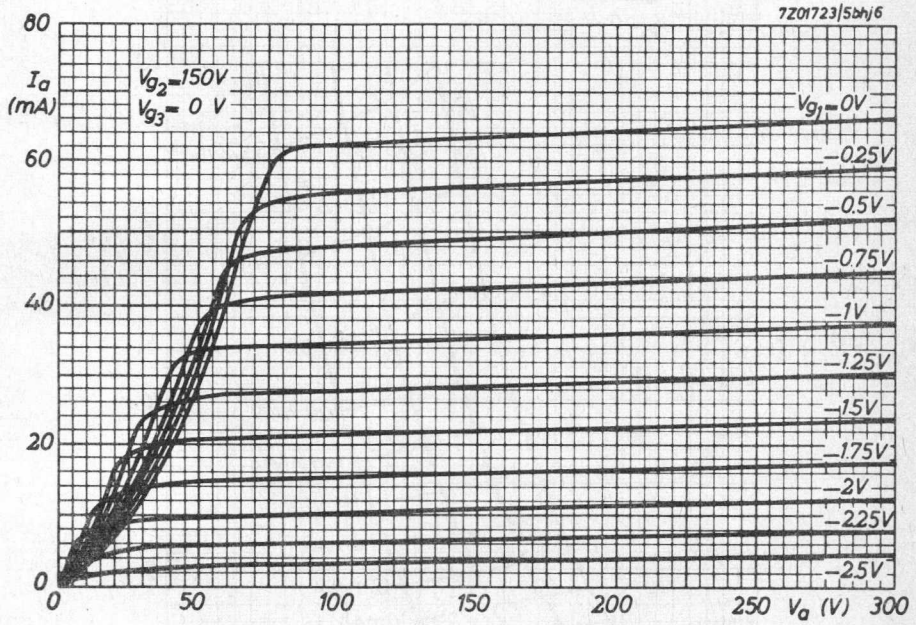



720722/5bny6

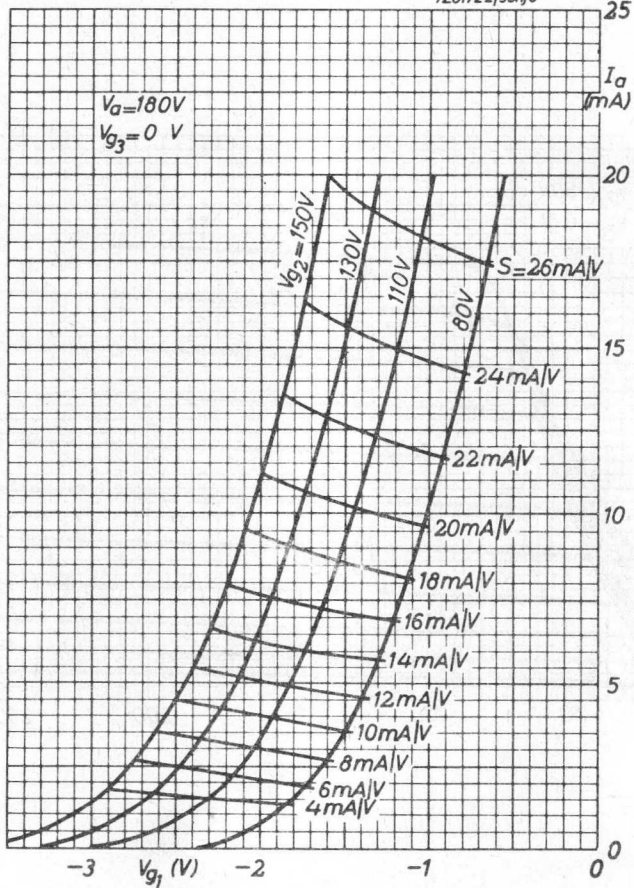

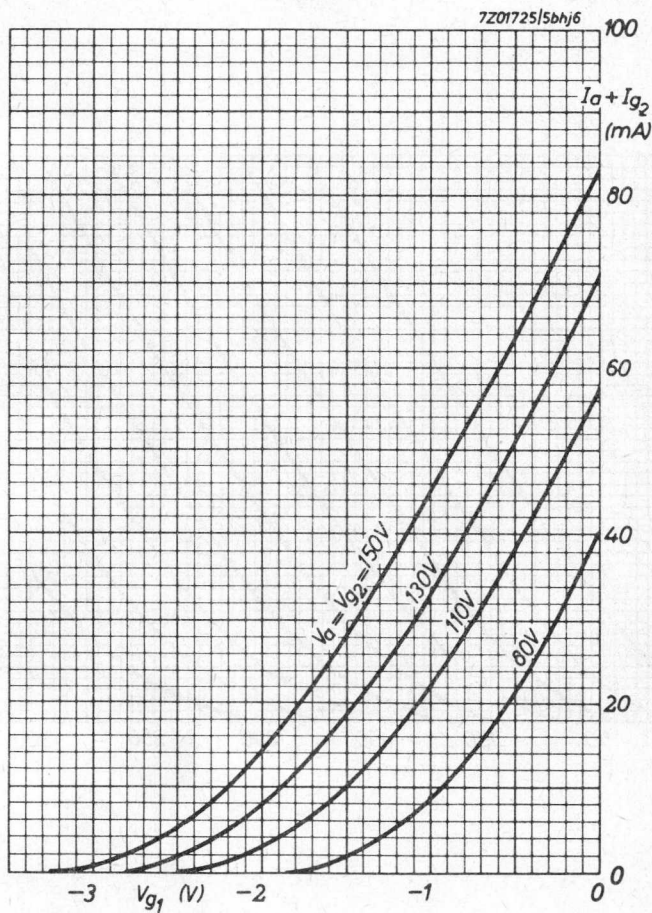


7Z01724/5bhj6

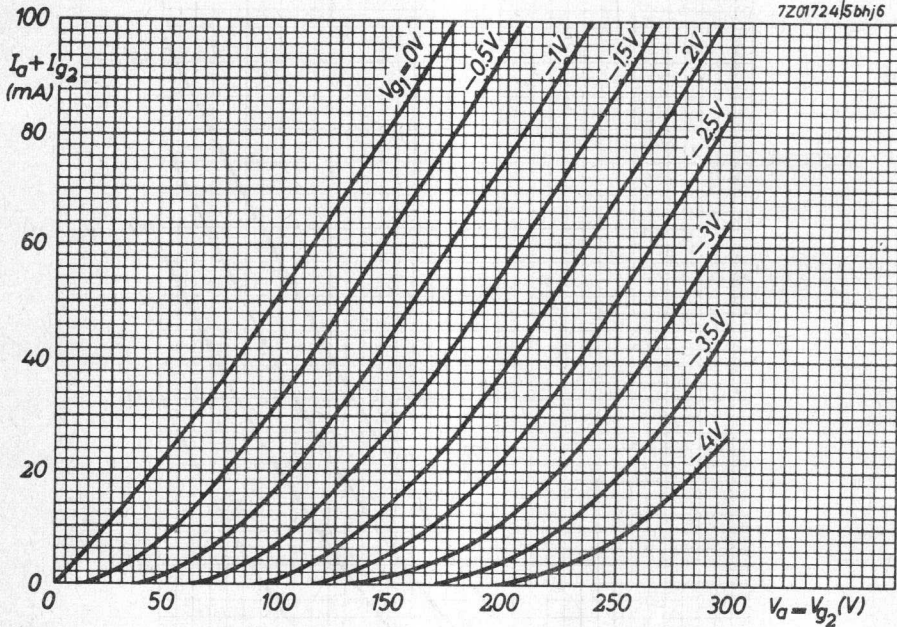

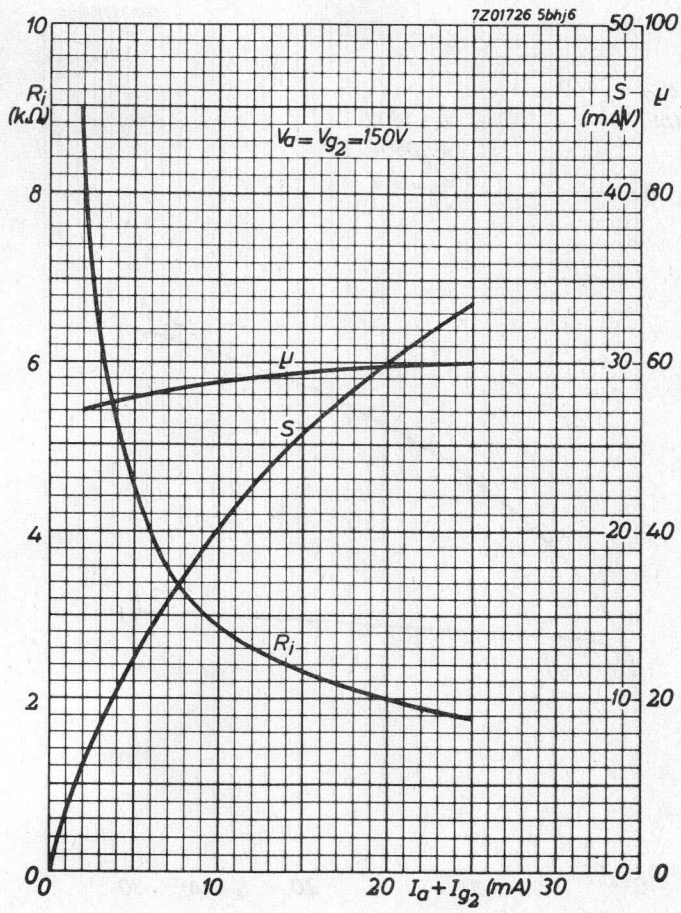

7Z01727/5bhj6

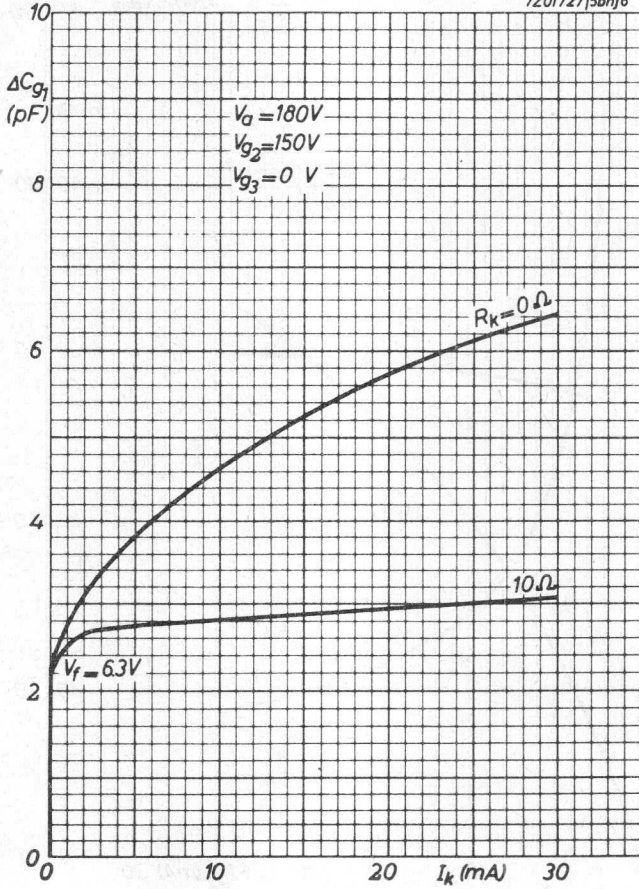

S.Q. TUBE

Special quality pentode designed for use as wide band amplifier for frequencies up to 250 MHz


QUICK REFERENCE DATA

Life test	10 000 hours	
Low interface resistance		
Mechanical quality	Shock and vibration resistant	
Base	Noval. Gold plated pins	
Heating	Indirect A. C. or D. C.; parallel supply	
Heater voltage	V_f	6.3 V
Heater current	I_f	350 mA
Anode current	I_a	35 mA
Mutual conductance	S	26 mA/V
Equivalent noise resistance	R_{eq}	200 Ω
Noise factor at 100 MHz	F	7 dB

DIMENSIONS AND CONNECTIONS

Dimensions in mm

Base: Noval

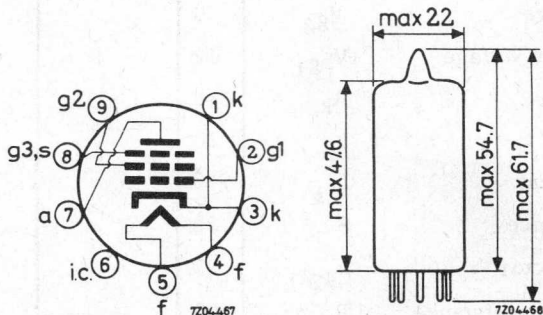

7Z2 6262

CHARACTERISTICS

Column I Nominal value or setting of the tube

II Range values for equipment design: Initial spread

III Range values for equipment design: End of life

		I	II	III	
Heater voltage	V_f	6.3			V
Heater current	I_f	350			mA
Anode supply voltage	V_{ba}	125			V
Grid No. 2 supply voltage	V_{bg_2}	125			V
Grid No. 3 voltage	V_{g_3}	0			mA/V
Grid No. 1 supply voltage	$+V_{bg_1}$	12			V
Cathode resistor	R_k	300			Ω
Anode current	I_a	35	33 - 37	min. 31	mA
Grid No. 2 current	I_{g_2}	11	9.9 - 12.1		mA
Mutual conductance	S	26	22 - 30	min. 17.5	mA/V
Amplification factor	$\mu_{g_2g_1}$	27			
Equivalent noise resistance	R_{eq}	200			Ω
Noise factor at 100 MHz	F	7			dB
Adapted to minimum noise					
Negative grid current	$-I_{g_1}$		max. 0.3	max. 1.0	μA
Anode supply voltage	V_{ba}	135			V
Grid No. 2 supply voltage	V_{bg_2}	125			V
Grid No. 3 voltage	V_{g_3}	0			V
Grid No. 1 supply voltage	$+V_{bg_1}$	12			V
Cathode resistor	R_k	360			Ω
Anode current	I_a	30			mA
Grid No. 2 current	I_{g_2}	9.5			mA
Mutual conductance	S	25			mA/V
Amplification factor	$\mu_{g_2g_1}$	27			
Equivalent noise resistance	R_{eq}	200			Ω

7Z2 7333

CHARACTERISTICS (continued)

As triode (grid No. 2 connected to anode)
(grid No. 3 connected to cathode)

		I	II	
Anode supply voltage	V_{ba}	125		V
Grid No. 3 supply voltage	V_{bg_3}	0		V
Grid No. 1 supply voltage	$+V_{bg_1}$	12		V
Cathode resistor	R_k	350		Ω
Anode current	I_a	40		mA
Mutual conductance	S	32		mA/V
Amplification factor	μ	25.5		
Internal resistance	R_i	800		Ω
Equivalent noise resistance	R_{eq}	100		Ω
<u>Leakage current between cathode and heater</u>	I_{kf}		max. 5	μA
Voltage between cathode and heater $V_{kf} = 100$ V				

Insulation resistance

Anode to other electrodes ($V = 300$ V)	R		min. 100	$M\Omega$
Grid No. 1 to other electrodes ($V = 50$ V)	R		min. 100	$M\Omega$

CAPACITANCES

		I	II	
Grid No. 1 to grid No. 2, grid No. 3 cathode, heater and screen	C_{g_1/g_2g_3kfs}	10		pF
Grid No. 1 to grid No. 2, grid No. 3 cathode, heater and screen	C_{g_1/g_2g_3kfs}	16		pF
Cathode current $I_k = 46$ mA				
Anode to grid No. 2, grid No. 3 cathode, heater and screen	C_{a/g_2g_3kfs}	2.6		pF
Anode to grid No. 1	C_{ag_1}		max. 50	mpF
Anode to cathode	C_{ak}		max. 50	mpF
Cathode to heater	C_{kf}	4.7		pF
Grid No. 1 to heater	C_{g_1f}		max. 50	mpF
Anode to heater	C_{af}		max. 100	mpF
			7Z2	7334

SHOCK AND VIBRATION RESISTANCE

The following test conditions are applied to assess the mechanical quality of the tube. These conditions are not intended to be used as normal operating conditions.

Shock

The tube is subjected 5 times in each of 4 positions to an acceleration of 500 g supplied by an NRL shock machine with the hammer lifted over an angle of 30°.

Vibration

The tube is subjected during 32 hours in each of 3 positions to a vibration frequency of 50 Hz with an acceleration of 2.5 g.

LIFE

Production samples are tested to be within the end of life values (column III) during 10 000 hours.

LIMITING VALUES (Absolute max. rating system)


Anode voltage	V_{a_0}	max.	400 V
	V_a	max.	200 V
Anode dissipation	W_a	max.	4.2 W
Grid No. 2 voltage	$V_{g_{20}}$	max.	400 V
	V_{g_2}	max.	150 V
Grid No. 2 dissipation ¹⁾	W_{g_2}	max.	1.4 W
Grid voltage	$-V_g$	max.	50 V
Grid resistor, automatic bias	R_{g_1}	max.	0.5 MΩ
Cathode current	I_k	max.	50 mA
Voltage between cathode and heater	V_{kf}	max.	100 V
Bulb temperature	t_{bulb}	max.	180 °C

Heater voltage: The average heater voltage should be 6.3 V.


Variations of the heater voltage exceeding the range of 6.0 V to 6.6 V will shorten the tube life.

The tolerance of heater current should be taken into account.


¹⁾ Grid No. 2 dissipation: Care should be taken not to exceed the limiting value during switching in of positive voltages. If the cathode resistor is shunted by more than 10 μF a grid No. 1 series resistor of minimum 1 kΩ should be applied.

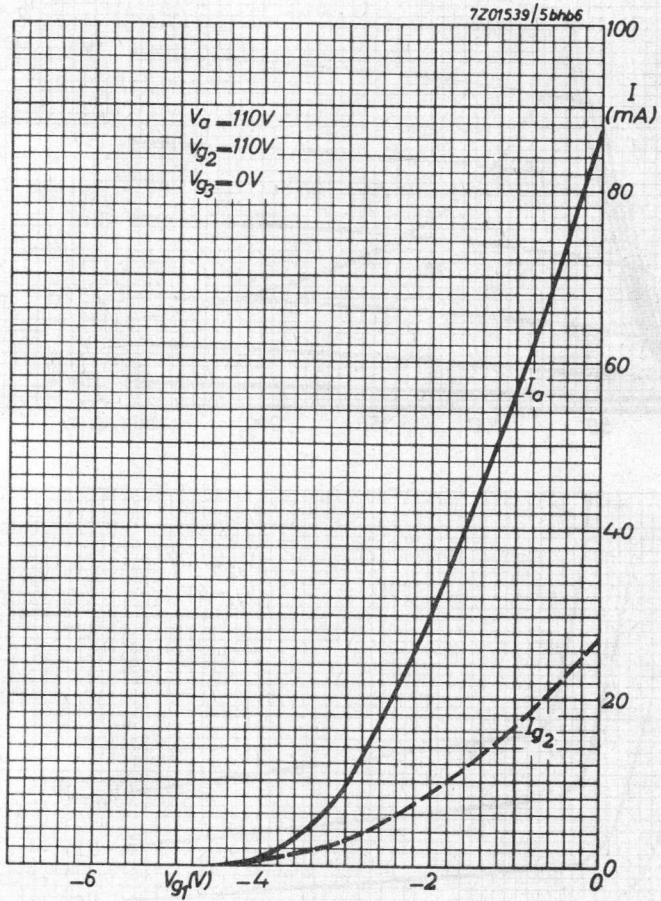


7201537/5bhb6

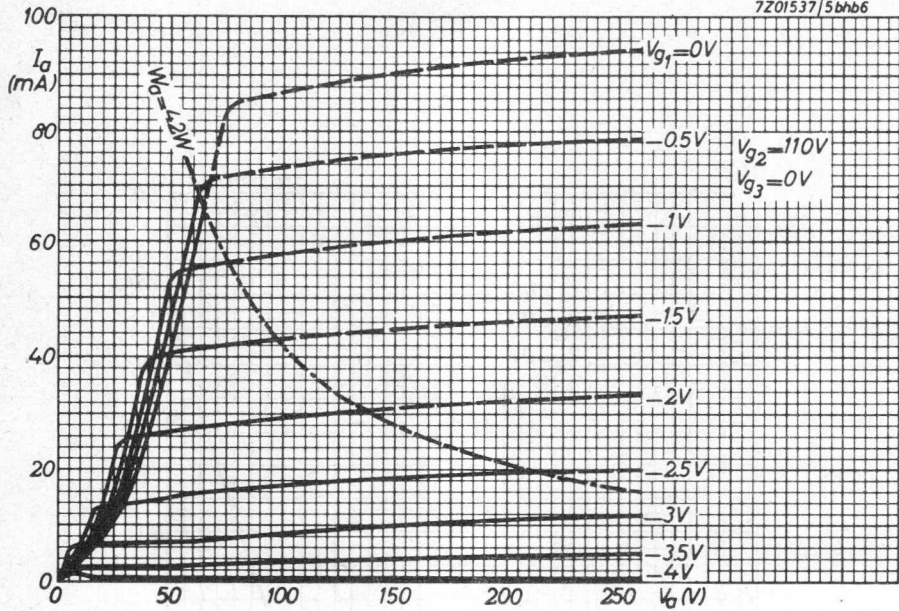

7201538/5bhb6

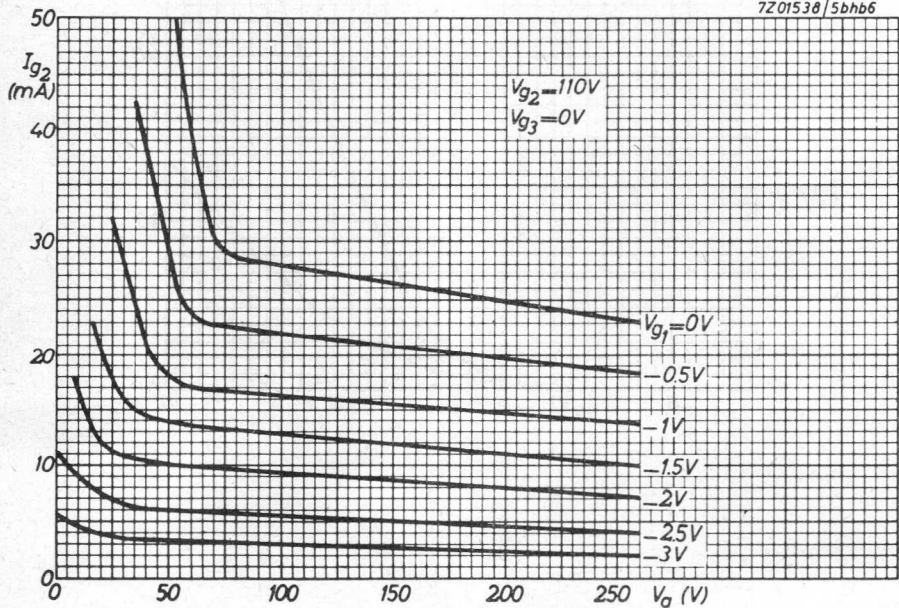


720154-2/5bhb6

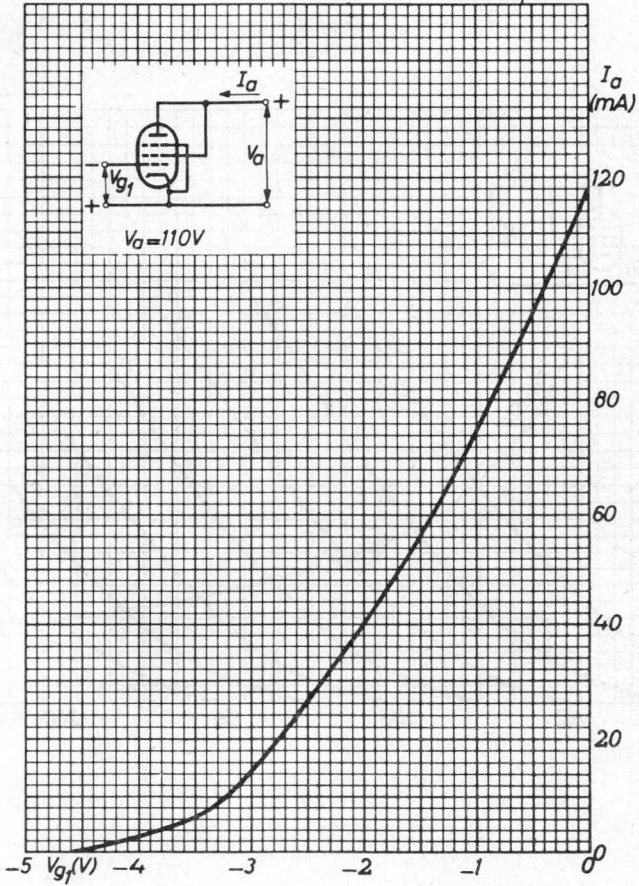




E282F

7Z01540/5bhb6

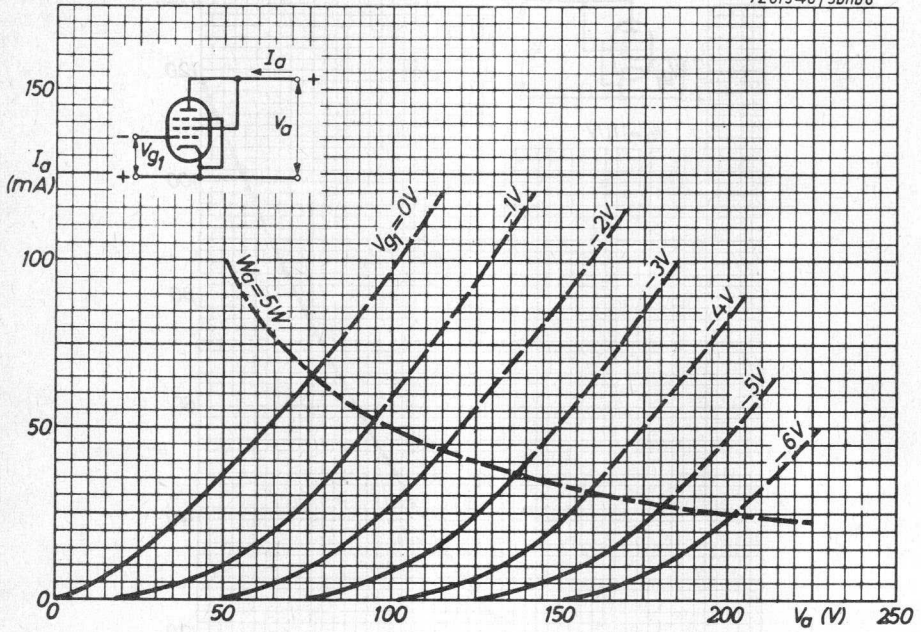

7201541/56hbb6

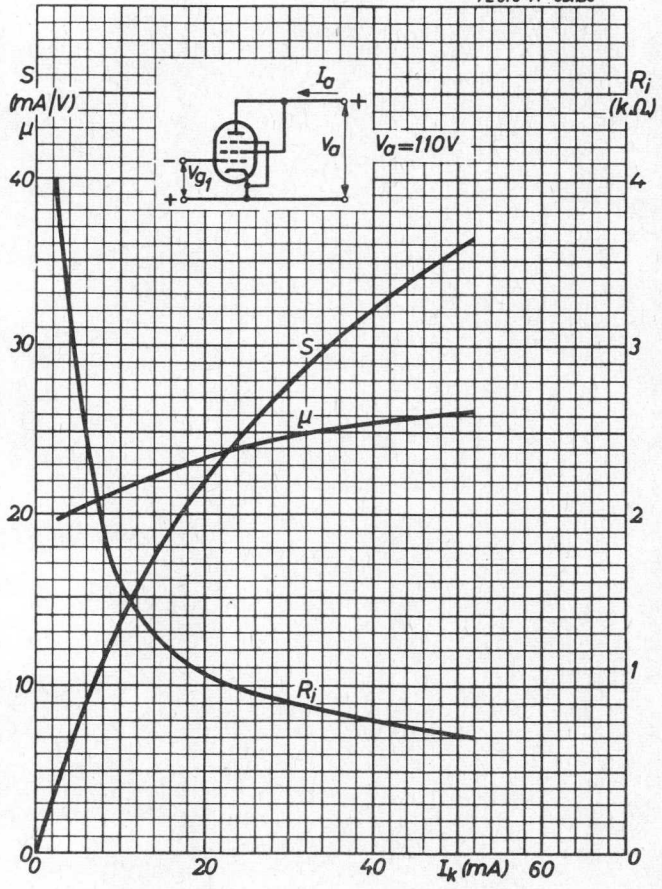

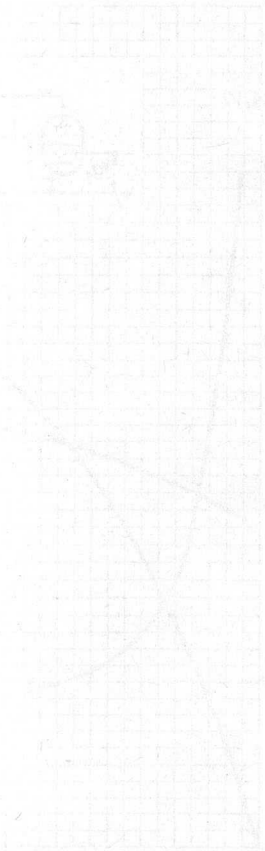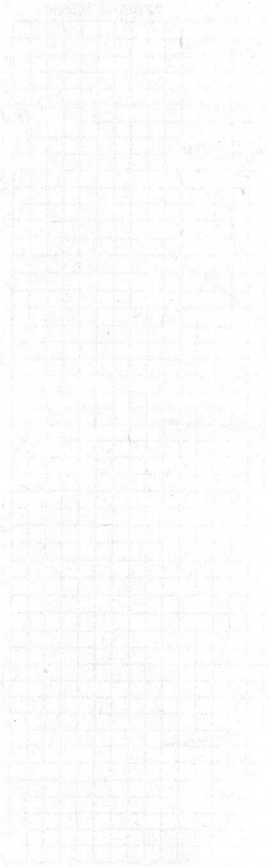

S.Q. TUBE



Special quality double triode designed for use as A. F. amplifier.

QUICK REFERENCE DATA		
Life test	10 000 hours	
Low interface resistance		
Mechanical quality	Shock and vibration resistant	
Base	Noval	
Heating	Indirect	
	A. C. or D. C.; parallel supply	
Heater voltage	V_f	6.3 V
Heater current	I_f	330 mA
Anode current	I_a	1.25 mA
Mutual conductance	S	1.6 mA/V
Amplification factor	μ	100
Hum voltage Section 1	V_g max.	5 μ V _{RMS}
Section 2	V_g max.	15 μ V _{RMS}

DIMENSIONS AND CONNECTIONS

Dimensions in mm

Base: Noval



7Z2 7680

CHARACTERISTICS

Column I Nominal value or setting of the tube

II Range values for equipment design: Initial spread

III Range values for equipment design: End of life

		I	II	III	
Heater voltage	V_f	6.3			V
Heater current	I_f	330	313 - 347		mA
Anode voltage	V_a	250			V
Cathode resistor	R_k	1.6			k Ω
Anode current	I_a	1.25	1.1 - 1.4	min. 0.8	mA
Mutual conductance	S	1.6	1.3 - 1.95	min. 1.05	mA/V
Amplification factor	μ	100			
Internal resistance	R_i	62.5			k Ω
<u>Negative grid current</u>	$-I_g$		max. 0.2	max. 0.5	μ A
Anode voltage	V_a	100			V
Cathode resistor	R_k	2			k Ω
Anode current	I_a	0.5			mA
Mutual conductance	S	1.25			mA/V
Amplification factor	μ	100			
Internal resistance	R_i	80			k Ω
<u>Cut-off voltage</u>	$-V_g$		max. 4		V
Anode voltage	V_a	250			V
Anode current	I_a	20			μ A
<u>Grid current starting voltage</u>	$-V_g$		max. 1		V
Grid current $+I_g = 0.3 \mu$ A					
<u>Leakage current between cathode and heater</u>	I_{kf}		max. 5		μ A
Voltage between cathode and heater $V_{kf} = 100$ V					

CHARACTERISTICS (continued)Insulation resistance between electrodes

Anode to all other electrodes

R min. 300 M Ω

(Voltage between electrodes 300 V)

Grid to all other electrodes

R min. 300 M Ω

(Voltage between electrodes 100 V)

Hum voltage Section 1 V_g max. 5 μ V_{RMS}

Section 2

 $V_{g'}$ max. 15 μ V_{RMS}Anode supply voltage $V_{ba} = 250$ VAnode resistor $R_a = 100$ k Ω Grid resistor $R_g = 1$ M Ω Vibrational noise V_g max. 10 mVAnode voltage $V_a = 250$ VGrid voltage $-V_g = 2$ VAnode resistor $R_a = 5$ k Ω Frequency $f = 25$ Hz

Acceleration = 2.5 g

Microphony

The sensitivity of the amplifier circuit for 50 mW should not exceed 0.5 mV.

CAPACITANCES Each system if applicable

Grid to cathode heater and screen

 $C_{g/kfs}$ 2.0 pF

Anode to cathode and screen

 $C_{a/kfs}$ 2.0 pF

Anode to grid

 C_{ag} 1.2 pF

Grid to heater

 C_{gf} max. 0.01 pF $C_{g'f}$ max. 0.02 pF

Grid to grid other section

 $C_{gg'}$ max. 0.01 pF

Anode to anode other section

 $C_{aa'}$ max. 0.1 pF

Anode to grid other section

 $C_{ag'}$ max. 0.06 pF $C_{a'g}$ max. 0.01 pF

7Z2 7336

OPERATING CHARACTERISTICS

A.F. amplifier Fig.1 see page 8

Anode supply voltage	V_{ba}	200	250	300	350	400	V
Anode resistor	R_a	47	47	47	47	47	k Ω
Cathode resistor	R_k	1500	1200	1000	820	680	Ω
Grid resistor next stage	R_o	150	150	150	150	150	k Ω
Anode current	I_a	0.86	1.18	1.55	1.98	2.45	mA
Output voltage at $+I_g = 0.3 \mu A$	V_o	18	23	26	33	37	V _{RMS}
Voltage gain	V_o/V_i	34	37.5	40	42.5	44	
Total distortion 1)	d_{tot}	8.5	7.0	5.0	4.4	3.6	%
<hr/>							
Anode voltage	V_{ba}	200	250	300	350	400	V
Anode resistor	R_a	100	100	100	100	100	k Ω
Cathode resistor	R_k	1800	1500	1200	1000	820	Ω
Grid resistor next stage	R_o	330	330	330	330	330	k Ω
Anode current	I_a	0.65	0.86	1.11	1.40	1.72	mA
Output voltage at $+I_g = 0.3 \mu A$	V_o	20	26	30	36	38	V _{RMS}
Voltage gain	V_o/V_i	50	54.5	57	61	63	
Total distortion 1)	d_{tot}	4.8	3.9	2.7	2.2	1.7	%
<hr/>							
Anode supply voltage	V_{ba}	200	250	300	350	400	V
Anode resistor	R_a	220	220	220	220	220	k Ω
Cathode resistor	R_k	3300	2700	2200	1500	1200	Ω
Grid resistor next stage	R_o	680	680	680	680	680	k Ω
Anode current	I_a	0.36	0.48	0.63	0.85	1.02	mA
Output voltage at $+I_g = 0.3 \mu A$	V_o	24	28	36	37	38	V _{RMS}
Voltage gain	V_o/V_i	56	66.5	72	75.5	76.5	
Total distortion 1)	d_{tot}	4.6	3.4	2.6	1.6	1.1	%

1) The distortion is about proportional to the output voltage.

OPERATING CHARACTERISTICS (continued)

A.F. amplifier		Fig. 2 see page 9					Input source resistance = 100 Ω					
Anode supply voltage	V_{ba}	200	250	300	350	400	V					
Anode resistor	R_a	47	47	47	47	47	$k\Omega$					
Grid resistor next stage	R_o	150	150	150	150	150	$k\Omega$					
Anode current	I_a	1.02	1.45	2.02	2.50	3.10	mA					
Output voltage	V_o	18	23	26	33	37	V_{RMS}					
Voltage gain	V_o/V_i	37	39	41	44	45						
Total distortion ¹⁾	d_{tot}	5.6	4.2	2.9	2.7	2.5	%					
<hr/>												
Anode supply voltage	V_{ba}	200	250	300	350	400	V					
Anode resistor	R_a	100	100	100	100	100	$k\Omega$					
Grid resistor next stage	R_o	330	330	330	330	330	$k\Omega$					
Anode current	I_a	0.7	1.00	1.29	1.62	1.95	mA					
Output voltage	V_o	20	26	30	36	38	V_{RMS}					
Voltage gain	V_o/V_i	50	51	54	56	58						
Total distortion ¹⁾	d_{tot}	3.9	2.6	2.0	1.8	1.6	%					
<hr/>												
Anode supply voltage	V_{ba}	200	250	300	350	400	V					
Anode resistor	R_a	220	220	220	220	220	$k\Omega$					
Grid resistor next stage	R_o	680	680	680	680	680	$k\Omega$					
Anode current	I_a	0.39	0.56	0.74	0.88	1.09	mA					
Output voltage	V_o	24	28	36	37	38	V_{RMS}					
Voltage gain	V_o/V_i	58	62	66	67	68						
Total distortion ¹⁾	d_{tot}	4.6	2.7	2.2	1.7	1.4	%					

¹⁾ The distortion is about proportional to the output voltage.

OPERATING CHARACTERISTICS (continued)

A.F. amplifier Fig.3 see page 9 Input source resistance = 330 k Ω

Anode supply voltage	V_{ba}	100	150	200	250	300	350	400	V
Anode resistor	R_a	47	47	47	47	47	47	47	k Ω
Grid resistor next stage	R_o	150	150	150	150	150	150	150	k Ω
Anode current	I_a	0.35	0.84	1.40	1.95	2.52	3.19	3.80	mA
Voltage gain	V_o/V_i	25	33	34	36	38	40	41	
Total distortion at:									
$V_o = 2$ V	d_{tot}	1.7	2.5	2.4	2.3	2.2	2.2	2.1	%
$V_o = 4$ V	d_{tot}	2.1	4.6	4.7	4.6	4.5	4.2	4.2	%
$V_o = 6$ V	d_{tot}	6.0	5.2	5.6	5.6	5.5	5.5	5.4	%

Anode supply voltage	V_{ba}	100	150	200	250	300	350	400	V
Anode resistor	R_a	100	100	100	100	100	100	100	k Ω
Grid resistor next stage	R_o	330	330	330	330	330	330	330	k Ω
Anode current	I_a	0.24	0.56	0.88	1.23	1.58	1.92	2.29	mA
Voltage gain	V_o/V_i	34	43	46	48	50	51	52	
Total distortion at:									
$V_o = 2$ V	d_{tot}	1.6	1.9	1.9	1.8	1.8	1.8	1.7	%
$V_o = 4$ V	d_{tot}	2.3	3.0	3.8	3.8	3.6	3.6	3.5	%
$V_o = 6$ V	d_{tot}	2.5	4.7	5.1	5.1	5.0	4.9	4.8	%

Anode supply voltage	V_{ba}	100	150	200	250	300	350	400	V
Anode resistor	R_a	220	220	220	220	220	220	220	k Ω
Grid resistor next stage	R_o	680	680	680	680	680	680	680	k Ω
Anode current	I_a	0.14	0.32	0.49	0.67	0.85	1.05	1.23	mA
Voltage gain	V_o/V_i	42	51	54	57	58	59	60	
Total distortion at:									
$V_o = 2$ V	d_{tot}	1.6	1.7	1.7	1.6	1.6	1.6	1.6	%
$V_o = 4$ V	d_{tot}	2.5	3.0	3.0	2.9	2.9	2.8	2.7	%
$V_o = 6$ V	d_{tot}	3.2	4.4	4.4	4.4	4.4	4.3	4.2	%

7Z2 7337

OPERATING CHARACTERISTICS (continued)

Phase inverter Fig. 4 see page 9

Anode supply voltage	V_{ba}	250	350	V		
Anode voltage	V_a	65	90	V		
Cathode resistor	R_k	68	82	$k\Omega$		
Anode resistor	R_a, R_a'	100	150	$k\Omega$		
Anode current	$I_a + I_a'$	1.0	1.2	mA		
Voltage gain	V_o/V_i	25		27		
Output voltage ($+I_g = 0.3 \mu A$)	V_o	7	20	10	35	V_{RMS}
Total distortion ¹⁾	d_{tot}	0.6	1.8	0.5	1.8	%

V_a should be adjusted to the specified value of $I_a + I_a'$

Phase inverter Fig. 5 see page 9

Anode supply voltage	V_{ba}	250	350	V		
Cathode resistor	R_k	1200	820	Ω		
Anode current	$I_a + I_a'$	1.08	1.7	mA		
Voltage gain	V_o/V_i	58		62		
Output voltage ($+I_g = 0.3 \mu A$)	V_o	7.0	35	9	45	V_{RMS}
Total distortion ¹⁾	d_{tot}	1.1	5.5	0.7	3.5	%

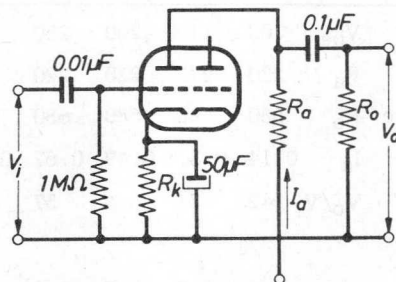


Fig. 1

¹⁾ The distortion is about proportional to the output voltage.

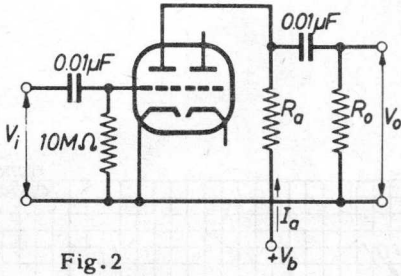


Fig. 2

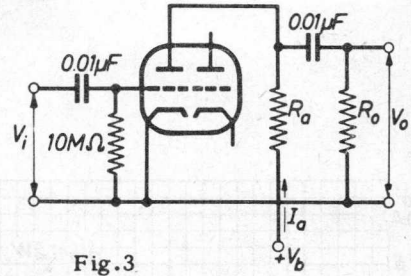


Fig. 3

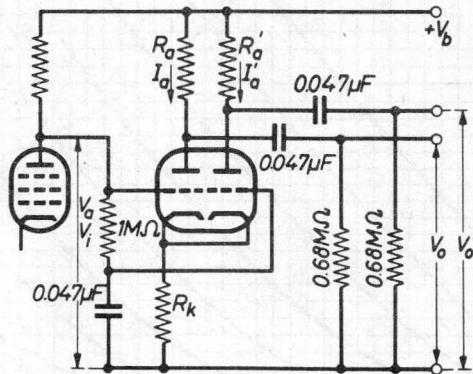


Fig. 4




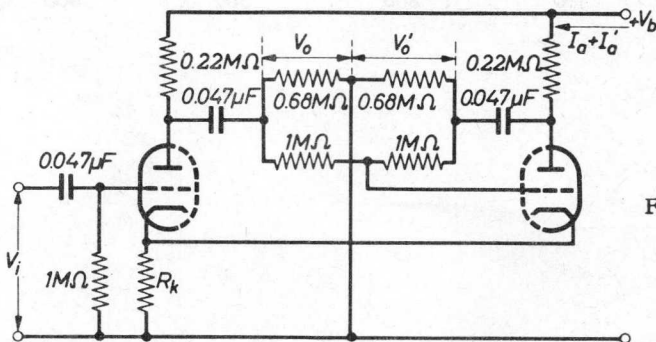


Fig. 5

7201168
E283CC

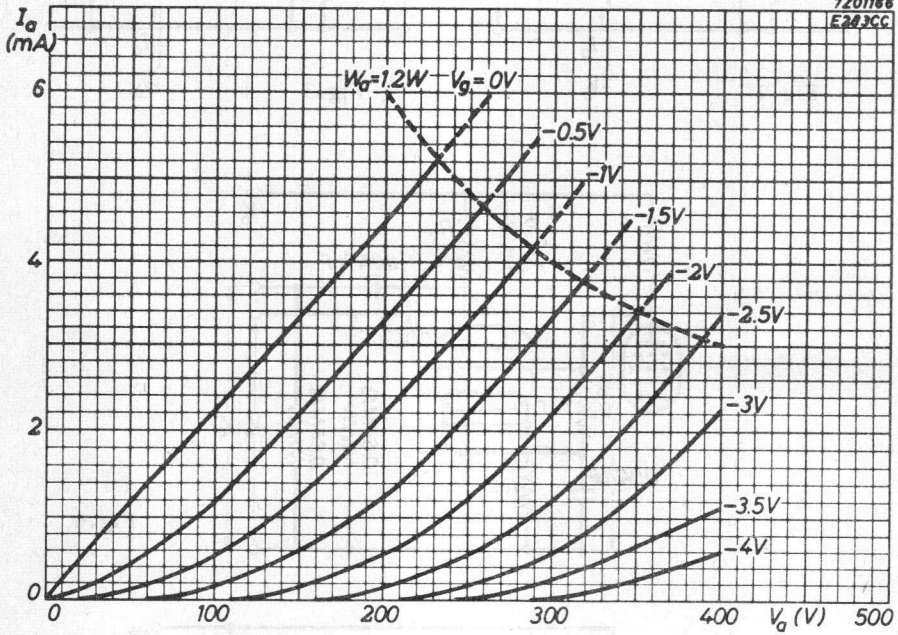

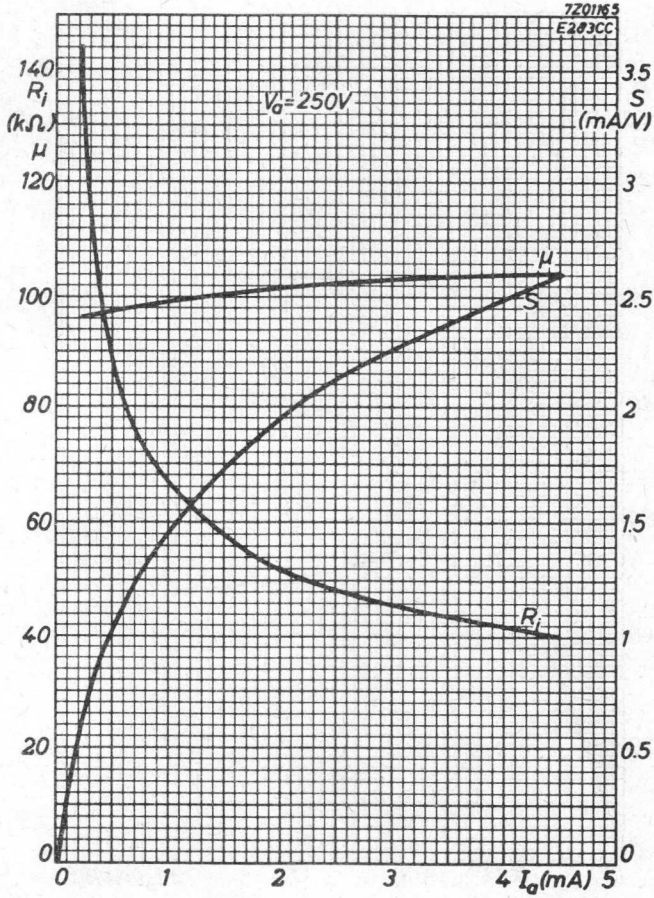

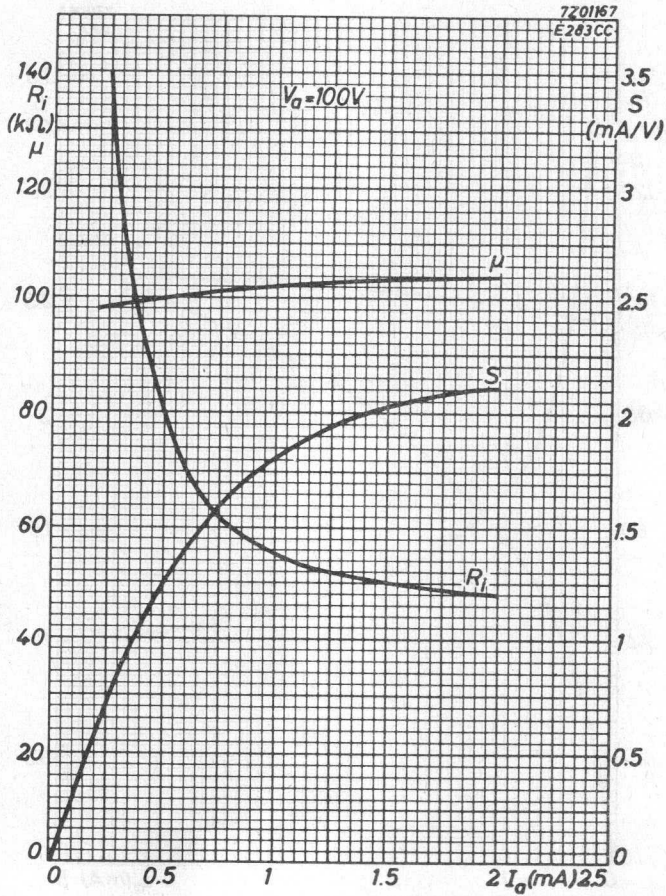

S.Q. TUBE


Special quality double triode designed for use in cascode circuits and as R.F. or I.F. amplifier.

QUICK REFERENCE DATA	
Life test	10 000 hours
Low interface resistance	
Mechanical quality	Shock and vibration resistant
Base	Noval. Gold plated pins
Heating	Indirect A.C. or D.C.; parallel supply
Heater voltage	V_f 6.3 V
Heater current	I_f 475 mA
Anode current	I_a 30 mA
Mutual conductance	S 20 mA/V
Equivalent noise resistance (R.F.)	R_{eq} 200 Ω
Noise figure	F 5.7 dB

DIMENSIONS AND CONNECTIONS

Dimensions in mm

Base: Noval

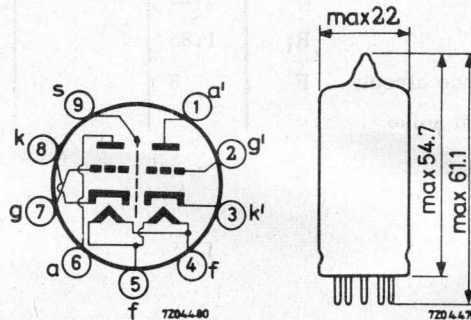

7Z2 6269

CHARACTERISTICS

Column I Nominal value or setting of the tube

II Range values for equipment design: Initial spread

III Range values for equipment design: End of life

		I	II	III	
Heater voltage	V_f	6.3			V
Heater current	I_f	475	450 - 500		mA
Anode supply voltage	V_{ba}	100			V
Grid supply voltage	$+V_{bg}$	9			V
Cathode resistor	R_k	350			Ω
Anode current	I_a	30	28 32	min. 26.5	mA
Mutual conductance	S	20	17 - 22.5	min. 14.5	mA/V
Amplification factor	μ	25			
Internal resistance	R_i	1.25			k Ω
Equivalent noise resistance	R_{eq}	200			Ω
Noise figure in cascode circuit Adapted to minimum noise	F	5.7			dB
Negative grid current	$-I_g$		max. 0.2	max. 1	μ A
Anode supply voltage	V_{ba}	60			V
Cathode resistor	R_k	80			Ω
Anode current	I_a	1.5			mA
Mutual conductance	S	15.5			mA/V
Amplification factor	μ	25			
Internal resistance	R_i	1.85			k Ω
Noise figure in cascode circuit Adapted to minimum noise	F	5			dB

CAPACITANCES Each system if applicable

Grid to cathode heater and screen	$C_{g/kfs}$	4.7	pF
Anode to cathode heater and screen	$C_{a/kfs}$	1.9	pF
	$C_{a'/k'fs}$	1.8	pF
Anode to grid	C_{ag}	1.8	pF
Cathode to grid heater and screen	$C_{k/gfs}$	7.8	pF
Anode to grid heater and screen	$C_{a/gfs}$	3.5	pF
	$C_{a'/gfs}$	3.4	pF
Anode to cathode	C_{ak}	0.25	pF
Anode to anode other section	$C_{aa'}$	max. 0.05	pF
Grid to grid other section	$C_{gg'}$	max. 0.005	pF

SHOCK AND VIBRATION RESISTANCE

The following test conditions are applied to assess the mechanical quality of the tube. These conditions are not intended to be used as normal operating conditions.

Shock

The tube is subjected 5 times in each of 4 positions to an acceleration of 500 g supplied by an NRL shock machine with the hammer lifted over an angle of 30°.

Vibration

The tube is subjected during 32 hours in each of 3 positions to a vibration frequency of 50 Hz with an acceleration of 2.5 g.

LIFE

Production samples are tested during 10 000 hours.


LIMITING VALUES (Absolute max. rating system)

Anode voltage	V_{a0}	max. 400 V
	V_a	max. 250 V
Anode dissipation	W_a	max. 3 W
Grid voltage	$-V_g$	max. 50 V
Grid peak voltage	$-V_{gp}$	max. 150 V
Max. pulse duration		10 μ sec
Max. duty factor		0.01
Grid resistor with automatic bias	R_g	max. 1 $M\Omega$
Cathode current	I_k	max. 40 mA
Cathode peak current	I_{kp}	max. 400 mA
Max. pulse duration		10 μ sec
Max. duty factor		0.01
Voltage between cathode and heater	V_{kf}	max. 150 V
Bulb temperature	t_{bulb}	max. 190 $^{\circ}C$


Heater voltage: The average heater voltage should be 6.3 V.


Variations of the heater voltage exceeding the range of 6.0 V to 6.6 V will shorten the tube life.


The tolerance of heater current (column II) should be taken into account.

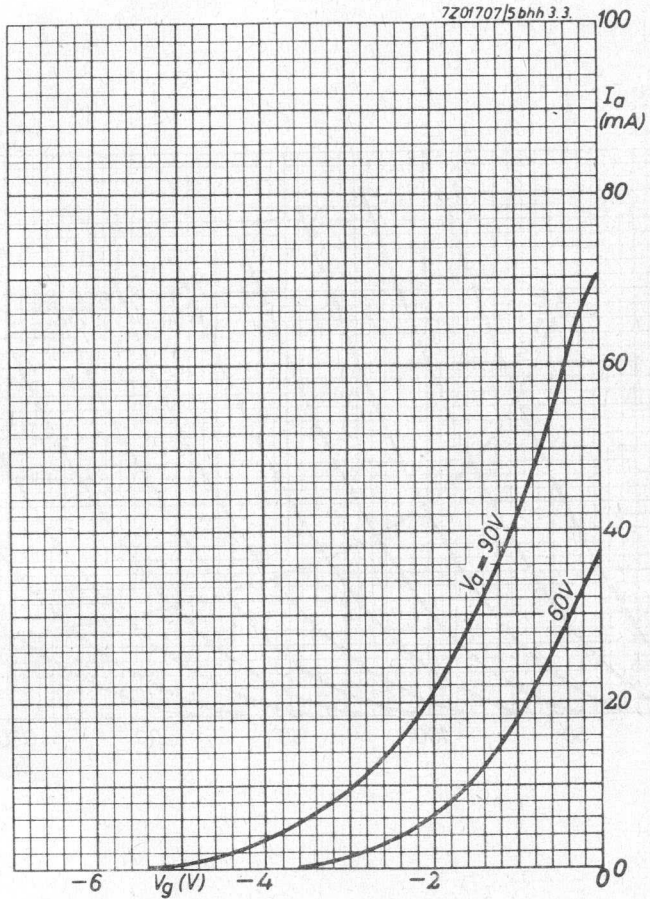

7201708/5bhh3.3

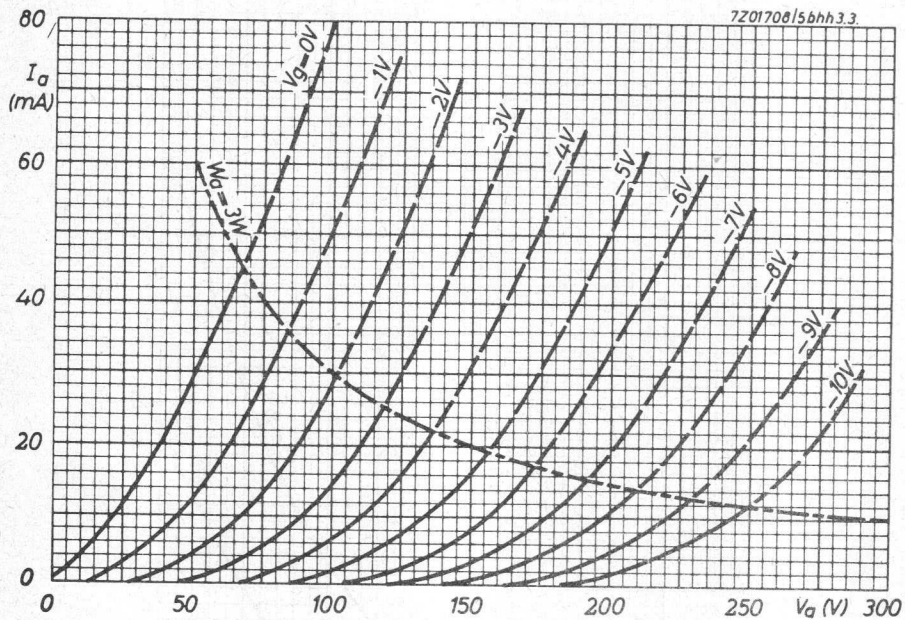

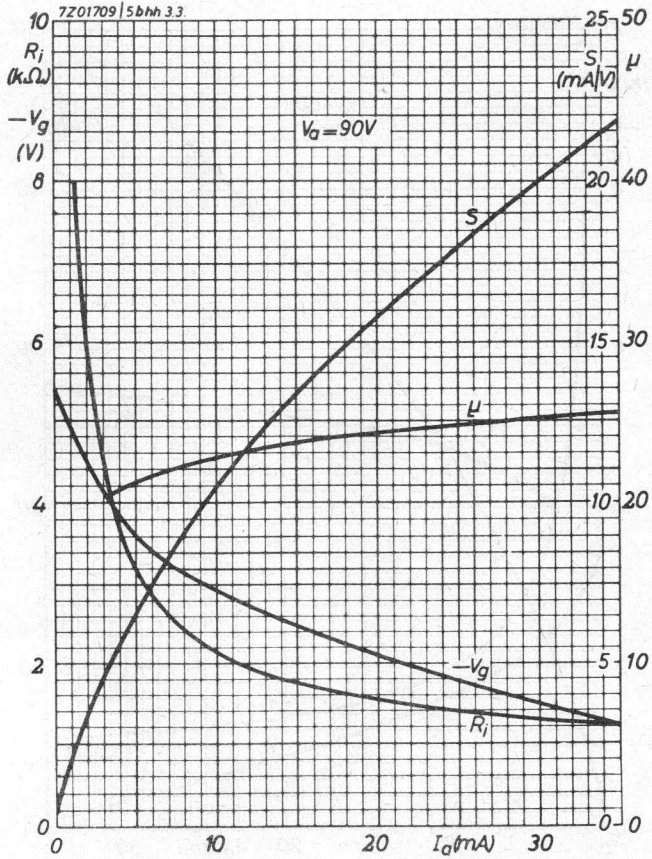

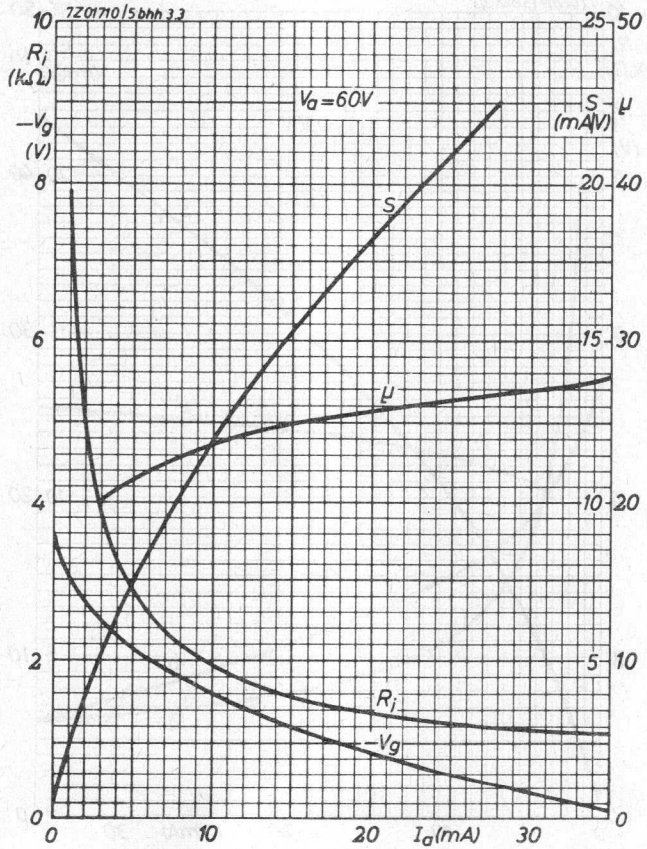

S.Q. TUBE


Special quality pentode designed for use as wide band amplifier.

QUICK REFERENCE DATA	
Life test	10 000 hours
Low interface resistance	
Mechanical quality	Shock and vibration resistant
Base	Noval. Gold plated pins
Heating	Indirect A.C. or D.C.; Parallel supply
Heater voltage	V_f 6.3 V
Heater current	I_f 340 mA
Anode current	I_a 35 mA
Mutual conductance	S 50 mA/V
Equivalent noise resistance	R_{eq} 110 Ω
Quality factor	$\frac{S}{2\pi(C_{g1} + C_a + 5)}$ 250 MHz

DIMENSIONS AND CONNECTIONS

Dimensions in mm

Base: Noval

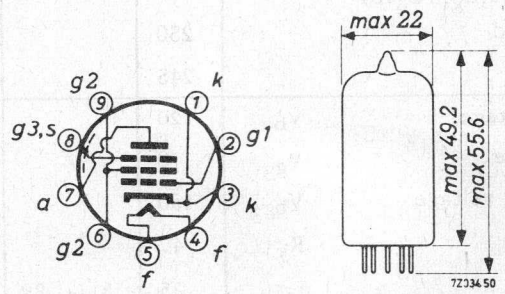

722 7342

CHARACTERISTICS

Column I Nominal value or setting of the tube

II Range values for equipment design: Initial spread

III Range values for equipment design: End of life

		I	II	III	
Heater voltage	V_f	6.3			V
Heater current	I_f	340	320 - 360		mA
Anode supply voltage	V_{ba}	135			V
Grid No.3 voltage	V_{g3}	0			V
Grid No.2 supply voltage	V_{bg2}	165			V
Grid No.1 supply voltage	$+V_{bg1}$	12.5			V
Cathode resistor	R_k	360			Ω
Anode current	I_a	35	(negligible spread)		mA
Grid No.2 current	I_{g2}	5.0	4.4 - 5.6		mA
Mutual conductance	S	50	42 - 58	min. 35	mA/V
Internal resistance	R_i	42			k Ω
Amplification factor of grid No.2 to grid No.1	μ_{g2g1}	57			
Negative grid current	$-I_{g1}$		max. 0.1	max. 0.2	μA
Equivalent noise resistance Frequency = 45 MHz	R_{eq}	110			Ω
Input resistance Frequency = 100 MHz	r_{g1}	415			Ω
Quality factor $\frac{S}{2\pi(C_{g1}+C_a+5)}$					
a) without shield		250			MHz
b) with shield		245			MHz
Anode supply voltage	V_{ba}	120			V
Grid No.3 voltage	V_{g3}	0			V
Grid No 2 supply voltage	V_{bg3}	150			V
Cathode resistor	R_k	47			Ω
Anode current	I_a	35	31 - 39		mA

7Z2 7343

CHARACTERISTICS (continued)

		II	III	
<u>Hum voltage</u>	V_{g1}	max. 150		μV
Grid No.1 resistor $R_{g1} = 0.5 M\Omega$				
Midtap heater transformer grounded				
Cathode resistor decoupled				
<u>Leakage current between cathode and heater</u>	I_{kf}	max. 10	max. 20	μA
Voltage between cathode and heater $V_{kf} = 100 V$				
<u>Insulation resistance between anode and other electrodes</u>	R	min. 100	min. 40	$M\Omega$
Measured with $V = 250 V$				

CAPACITANCES

		Without external shield		With external shield		
		I	II	I	II	
Anode to grid No.3, grid No.2, cathode, heater and screen	$C_{a/g3g2kfs}$	3.5	3.2-3.8	4.1	3.9-4.3	pF
Grid No.1 to grid No.3, grid No.2, cathode, heater and screen						
($I_k = 0 mA$)	$C_{g1/g3g2kfs}$	14.5	13- 16	14.5	13- 16	pF
($I_k = 40 mA; f = 100 Mc/s$)	$C_{g1/g3g3kfs}$	24	22- 26	24	22- 26	pF
Anode to grid No.1	C_{ag1}		max. 36		max. 32	mpF
Anode to cathode	C_{ak}	60	53- 67	33	26- 40	mpF
Anode to heater	C_{af}	31	26- 36	20	12- 28	mpF
Grid No.1 to heater	C_{g1f}	60	40- 80	55	35- 75	mpF
Cathode to heater	C_{kf}			5.2	4.2-6.2	pF

SHOCK AND VIBRATION RESISTANCE

The following test conditions are applied to assess the mechanical quality of the tube. These conditions are not intended to be used as normal operating conditions.

Shock

The tube is subjected 5 times in each of 4 positions to an acceleration of 500 g supplied by an NRL shock machine with the hammer lifted over an angle of 30°.

Vibration

The tube is subjected during 32 hours in each of 3 positions to a vibration frequency of 50 Hz with an acceleration of 2.5 g.

LIFE

Production samples are tested to be within the end of life values (column III) under the following conditions during 10 000 hours.

Anode supply voltage	V_{ba}	165 V
Anode resistor	R_a	820 Ω
Grid No.3 voltage	V_{g3}	0 V
Grid No.2 supply voltage	V_{bg2}	165 V
Grid No.1 supply voltage	$+V_{bg1}$	12.5 V
Cathode resistor	R_k	360 Ω
Anode current	I_a	35 mA
Voltage between cathode and heater	V_{kf}	100 V

LIMITING VALUES (Absolute max. rating system)

Anode voltage	V_{a0}	max. 400 V
	V_a	max. 250 V
Anode dissipation	W_a	max. 5 W
Grid No.2 voltage	V_{g20}	max. 400 V
	V_{g2}	max. 200 V
Grid No.2 dissipation	W_{g2}	max. 1 W ¹⁾
Grid No.1 voltage	$-V_{g1}$	max. 25 V
Grid No.1 peak voltage	$-V_{g1p}$	max. 50 V
	$+V_{g1p}$	max. 50 V
Grid No.1 dissipation	W_{g1}	max. 10 mW

Maximum averaging time = 1 s

1) Care should be taken not to exceed the rated W_{g2} value due to switching of positive supply voltages.

LIMITING VALUES (Absolute max. rating system) (continued)

Grid No.1 resistor

With fixed bias

 R_{g1} max. 0.2 M Ω With automatic bias $R_k = 47 \Omega$ R_{g1} max. 0.6 M Ω $R_k = 360 \Omega$ R_{g1} max. 3.5 M Ω

Cathode current

 I_k max. 50 mA

Cathode current

 I_k max. 65 mA

(Life expectancy 1000 hours)

Voltage between cathode and heater

 V_{kf} max. 100 V

Bulb temperature

 t_{bulb} max. 200 °C

Bulb temperature

 t_{bulb} max. 220 °C

(Life expectancy 1000 hours)

Heater voltage: The average heater voltage should be 6.3 V.

Variations of the heater voltage exceeding the range of 6.0 V to 6.6 V will shorten the tube life.

The tolerance of heater current (column II) should be taken into account.

OPERATING CHARACTERISTICSOutput tube class A

Anode supply voltage

 V_{ba} 155 V

Grid No.3 voltage

 V_{g3} 0 V

Grid No.2 supply voltage

 V_{bg2} 165 V

Grid No.1 supply voltage

 $+V_{bg1}$ 12.5 V

Cathode resistor

 R_k 360 Ω

Cathode capacitor

 C_k 1000 μF

Anode resistor

 $R_{a\sim}$ 560 Ω

Anode current

 I_a 35 mA

Anode current, peak to peak

 I_{ap} 40 mA


Total distortion



 d_{tot} 7.5 %

E810F

7200927
E810F


$V_a = 120V$
 $V_{g3} = 0V$

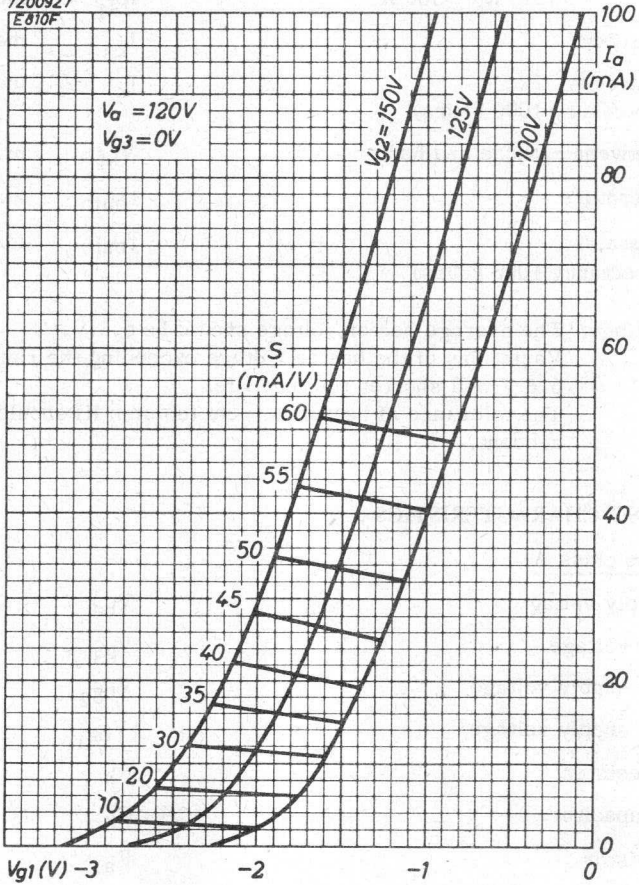


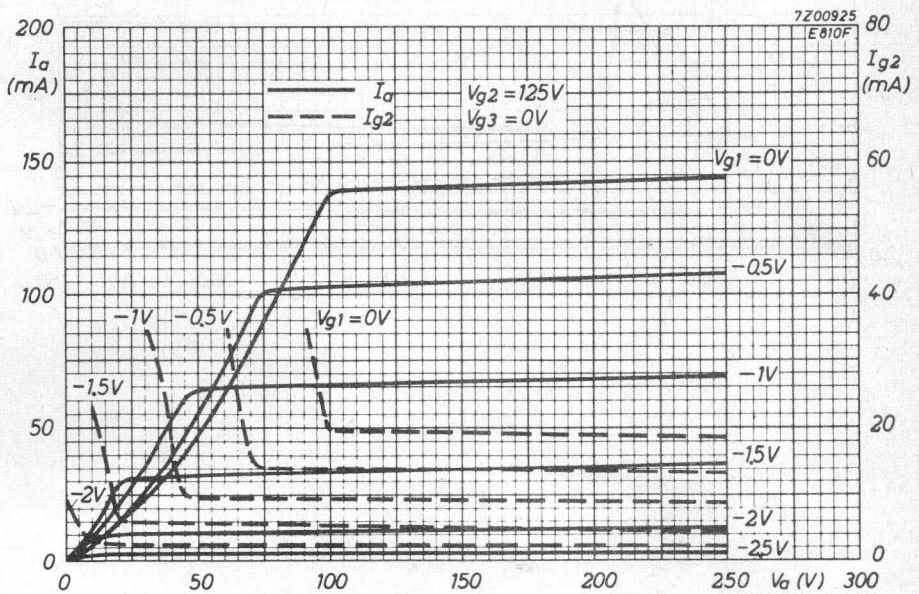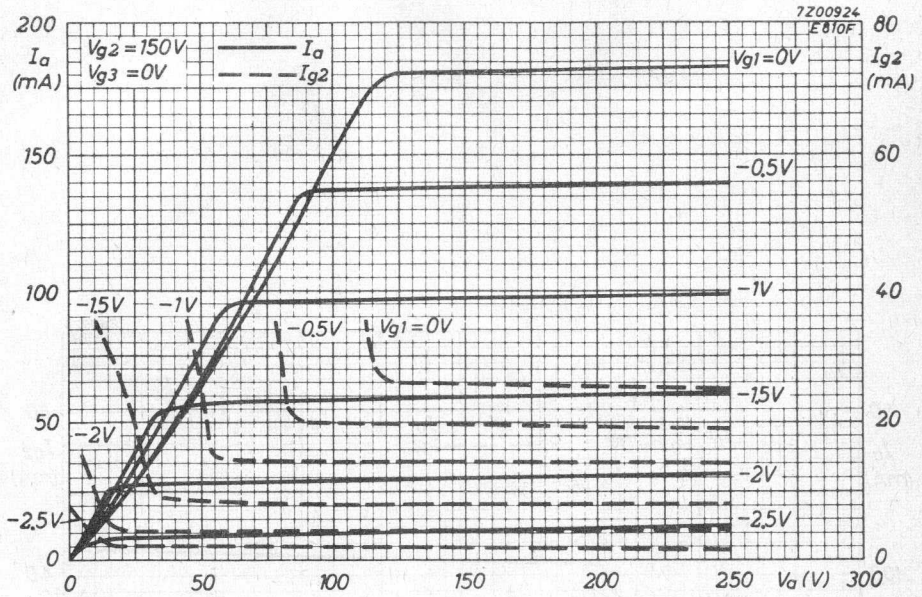


E810F

7200926
E810F

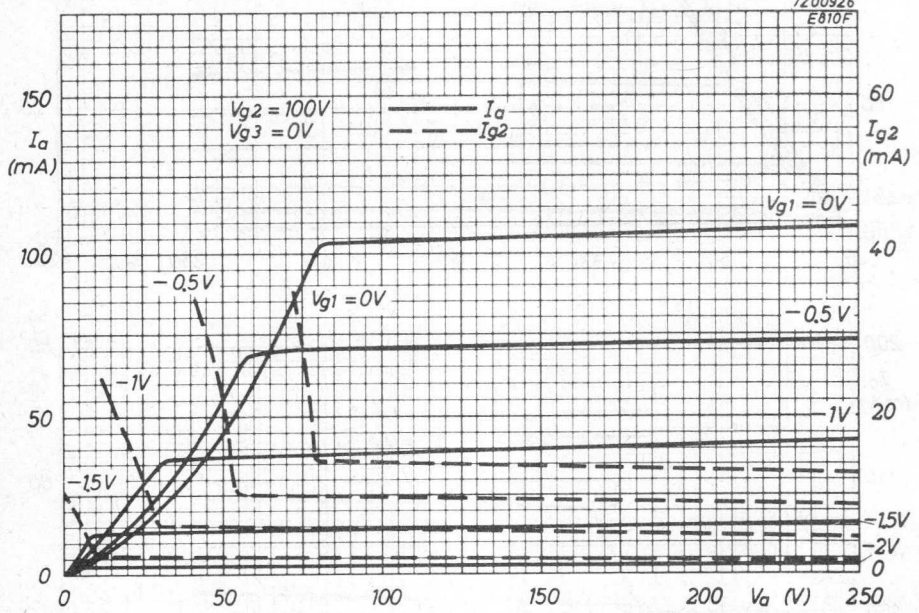

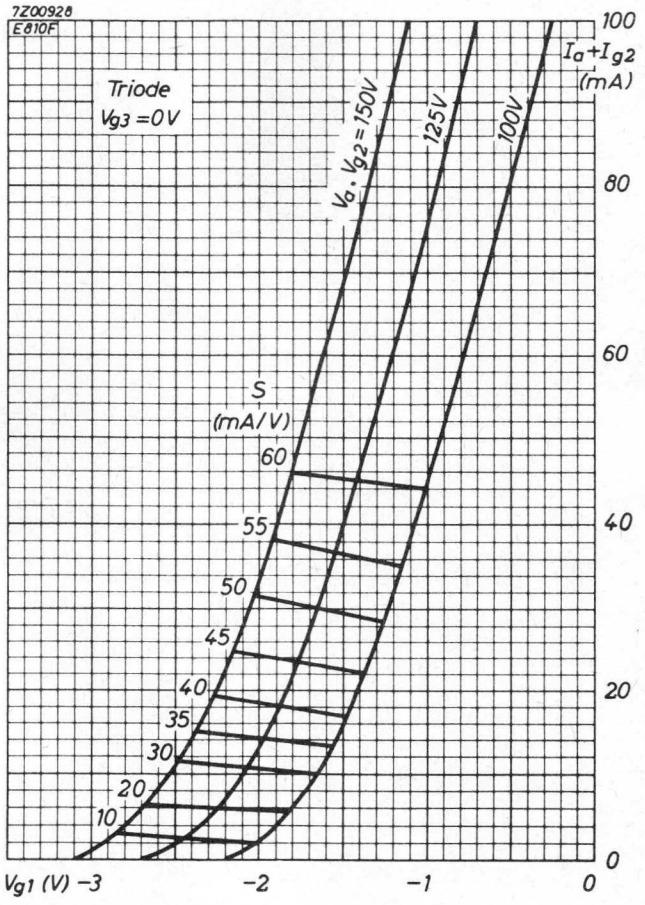

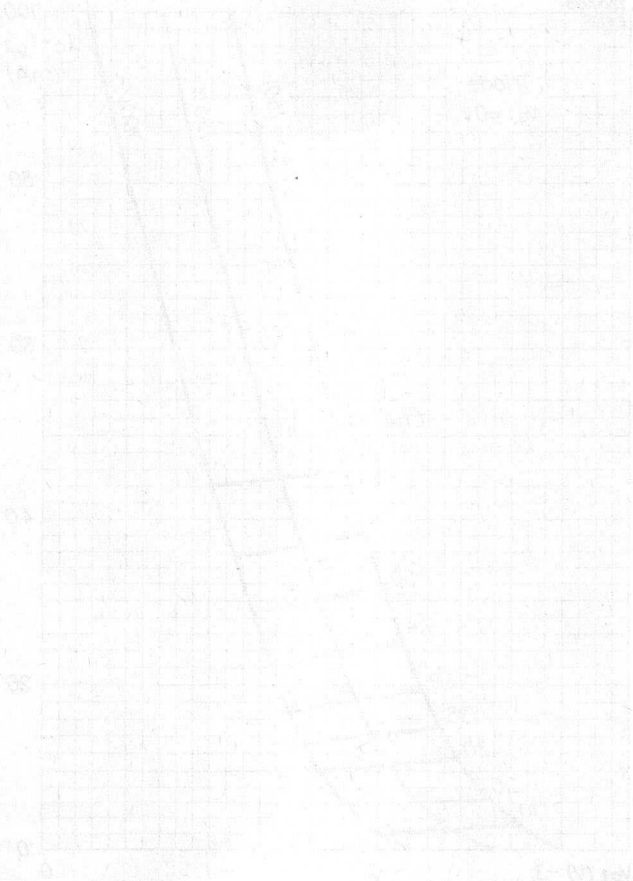

S.Q. TUBE


Triode designed for use as grounded grid U.H.F. amplifier for frequencies up to 500 MHz.

QUICK REFERENCE DATA	
Life test	500 hours
Base	Noval. Gold plated pins
Heating	Indirect A.C. or D.C.; parallel supply
Heater voltage	V_f 6.3 V
Heater current	I_f 430 mA
Mutual conductance	S 12 mA/V

DIMENSIONS AND CONNECTIONS

Dimensions in mm

Base: Noval

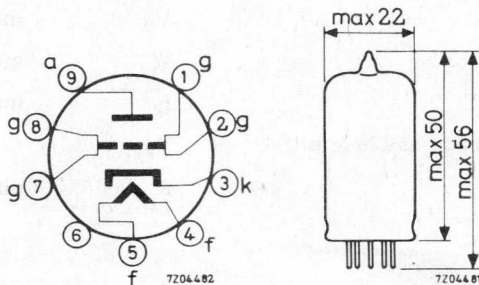

722 7346

CHARACTERISTICS

Anode voltage	V_a	250 V
Grid voltage	$-V_g$	1.5 V
Anode current	I_a	15 mA
Mutual conductance	S	12 mA/V
Amplification factor	μ	80

CAPACITANCES


Grid and pin No.6 to cathode and heater	$C_{gp6/kf}$	5.1 pF
Grid, heater and pin No.6 to cathode	$C_{gfp6/k}$	9.3 pF
Anode to cathode	C_{ak}	max. 0.075 pF
Anode to cathode and heater	C_a/kf	max. 0.08 pF
Anode to grid and pin No.6	$C_a/gp6$	3.4 pF
Anode to grid, heater and pin No.6	$C_a/gfp6$	3.4 pF
Cathode to heater	C_{kf}	max. 8 pF

LIFE



Production samples are tested during 500 hours.

LIMITING VALUES (Design centre rating system)

Anode voltage	V_{a0}	max. 550 V
	V_a	max. 300 V
Anode dissipation	W_a	max. 4 W
Cathode current	I_k	max. 15 mA
Voltage between cathode and heater	V_{kf}	max. 100 V
Grid resistor	R_g	max. 0.3 M Ω

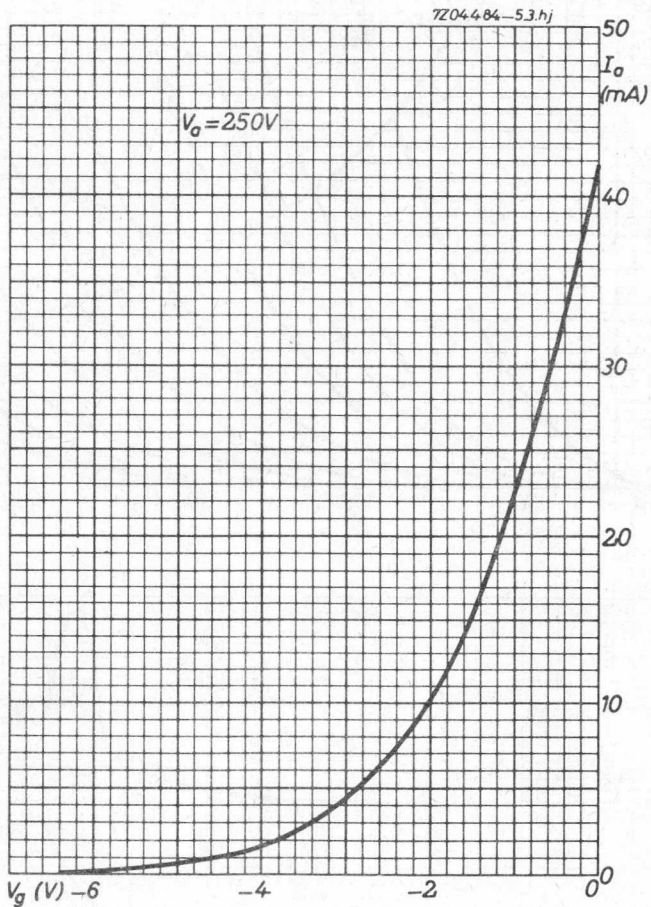

7Z04483-5.3.hj

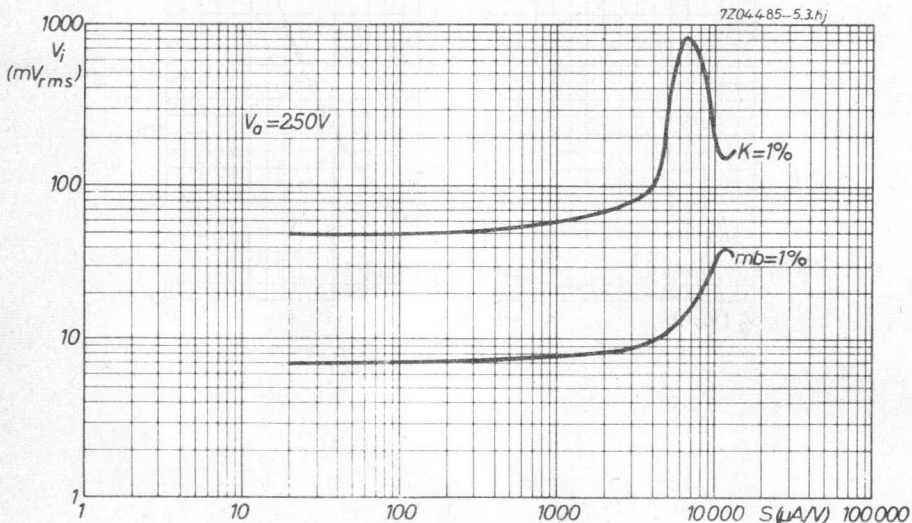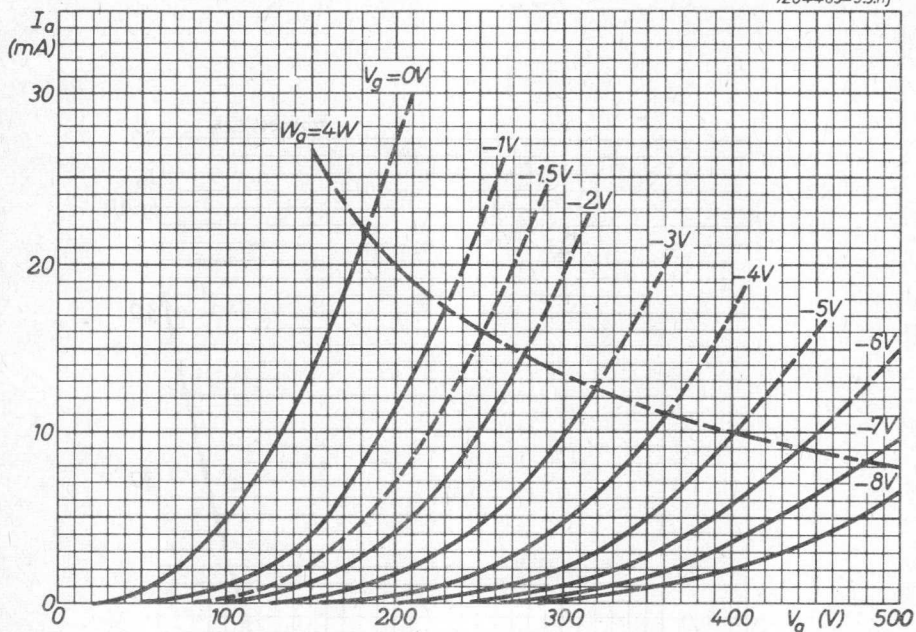

S.Q. TUBE



U.H.F. oscillator triode for frequencies up to 750 MHz.

QUICK REFERENCE DATA		
Base	Noval. Gold plated pins	
Heating	Indirect A.C. or D.C.; parallel supply	
Heater voltage	V_f	6.3 V
Heater current	I_f	175 mA
Anode current	I_a	30 mA
Mutual conductance	S	5.5 mA/V

DIMENSIONS AND CONNECTIONS

Dimensions in mm

Base: Noval



CAPACITANCES

Grid to all except anode	$C_{g(a)}$	1.8 pF
Anode to all except grid	$C_{a(g)}$	0.7 pF
Anode to grid	C_{ag}	1.6 pF
Grid to heater	C_{gf}	max. 0.25 pF
Cathode to heater	C_{kf}	2.3 pF

CHARACTERISTICS

Heater voltage	V_f	6.3	V
Heater current	I_f	175	mA
Anode voltage	V_a	120	150 V
Grid voltage	$-V_g$	2	2 V
Anode current	I_a	20	30 mA
Mutual conductance	S	4	5.5 mA/V
Amplification factor	μ	16	16

7Z2 7440

OPERATING CHARACTERISTICS AND LIMITING VALUES

Operation as U.H.F. oscillator

A) Heater supply voltage	V_f	6.3	V
Series resistor in heater circuit	R	3	Ω
Wave length	λ	40 — 80	cm
Anode voltage	V_a	220 — 275	V
Anode current	I_a	18.6 — 17.2	mA
Grid current	$+I_g$	1.5 — 2.8	mA
Output power	W_o	0.6 — 2.1	W

LIMITING VALUES Design centre rating system

Anode voltage	V_{a_o}	max. 550	V
Anode voltage	V_a	max. 275	V
Anode dissipation	W_a	max. 3.5	W
Cathode current	I_k	max. 20	mA
Grid current	I_g	max. 7.5	mA
Negative grid voltage	$-V_g$	max. 100	V
Voltage between cathode and heater	V_{kf}	max. 100	V
Grid resistor	R_g	max. 1	$M\Omega$

B) Heater supply voltage	V_f	6.3	V
Series resistor in heater circuit	R	3	Ω
Wave length	λ	40 — 80	cm
Anode voltage	V_a	290 — 300	V
Anode current	I_a	19.6 — 18.6	mA
Grid current	$+I_g$	0.4 — 1.5	mA
Output power	W_o	0.7 — 2.2	W

With these operating conditions the following limiting values should be strictly adhered to

LIMITING VALUES Design centre rating system unless otherwise specified.


Anode voltage	V_{a_0}	max.	550	V
Anode voltage (stabilized $\pm 1\%$)	V_a	max.	300	V
Anode dissipation (Abs.max.)	W_a	max.	5	W
Cathode current	I_k	max.	20	mA
Grid current	I_g	max.	7.5	mA
Negative grid voltage	$-V_g$	max.	100	V
Voltage between cathode and heater	V_{kf}	max.	100	V
Grid resistor	R_g	max.	1	$M\Omega$


C) Heater voltage	V_f	6.3		V
Wave length	λ	40	80	cm
Anode voltage	V_a	220	300	V
Anode current	I_a	27.7	26.3	mA
Grid current	I_g	2.3	4	mA
Output power	W_o	1.1	3.8	W


LIMITING VALUES Design centre rating system unless otherwise specified.


Anode voltage	V_{a_0}	max.	550	V
Anode voltage (stabilized $\pm 1\%$)	V_a	max.	300	V
Anode dissipation (Abs.max.)	W_a	max.	5	W
Cathode current (Abs.max.)	I_k	max.	30	mA
Grid current	$+I_g$	max.	7.5	mA
Grid voltage	$-V_g$	max.	100	V
Voltage between cathode and heater	V_{kf}	max.	100	V
Grid resistor	R_g	max.	1	$M\Omega$


Heater voltage: The average heater voltage should be 6.3 V
 Variation of the heater voltage should not exceed the range
 the range of 6.3 V $\pm 3\%$.


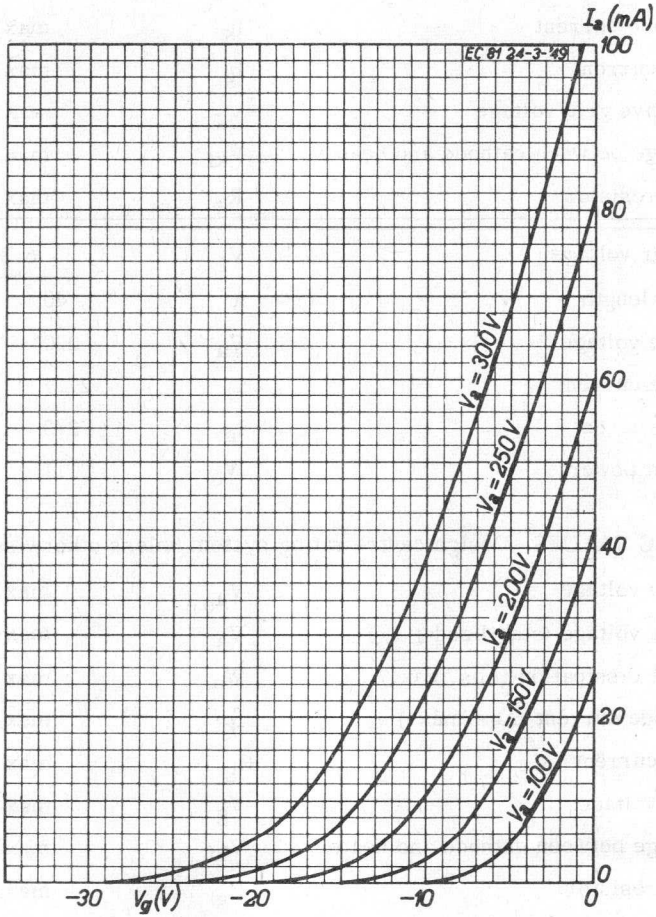



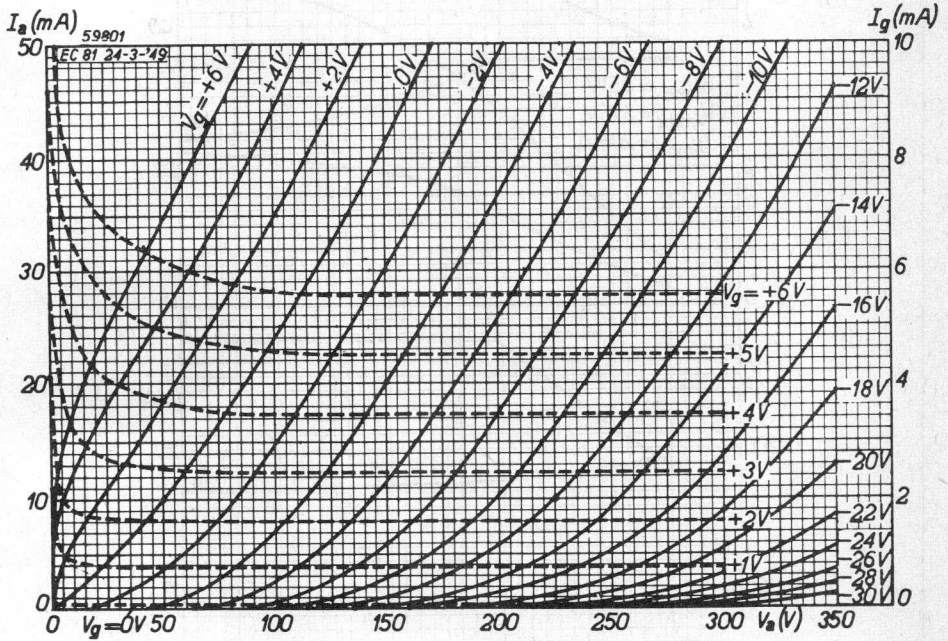


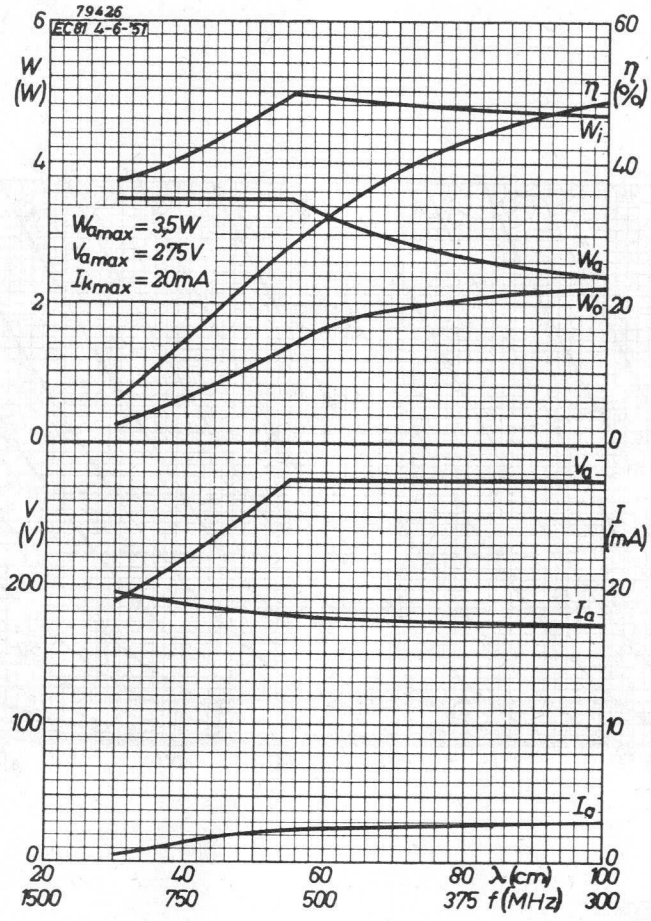

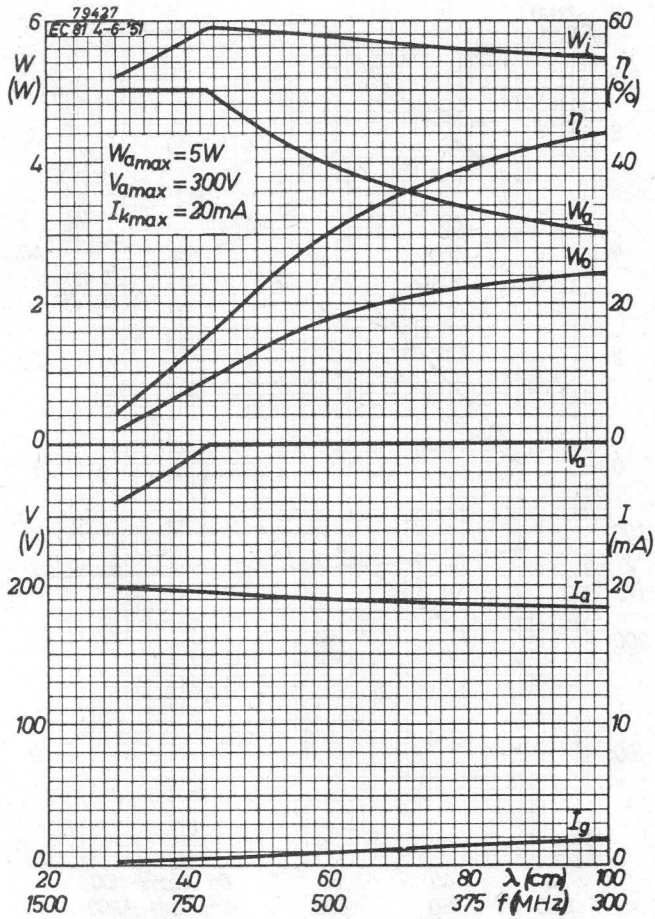

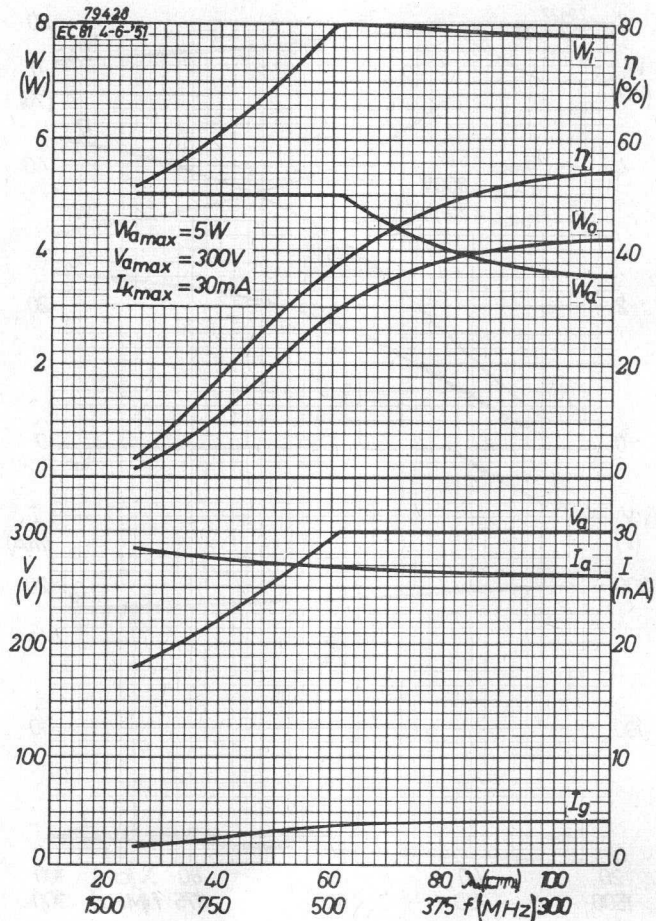

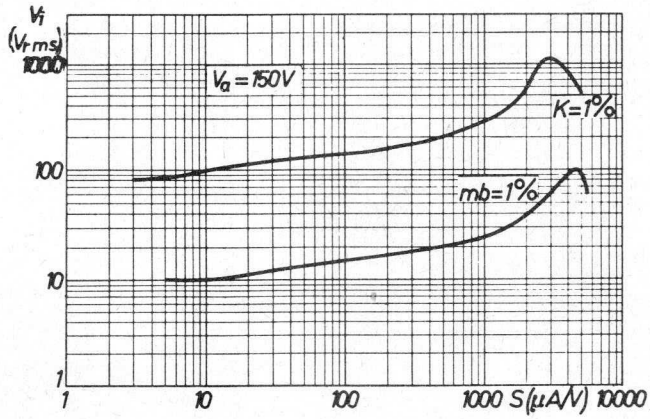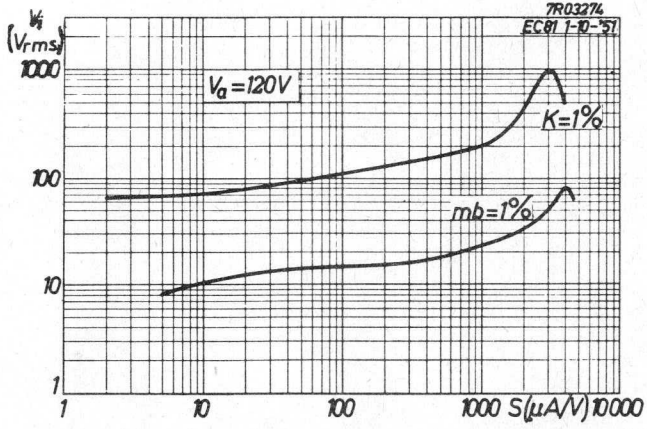

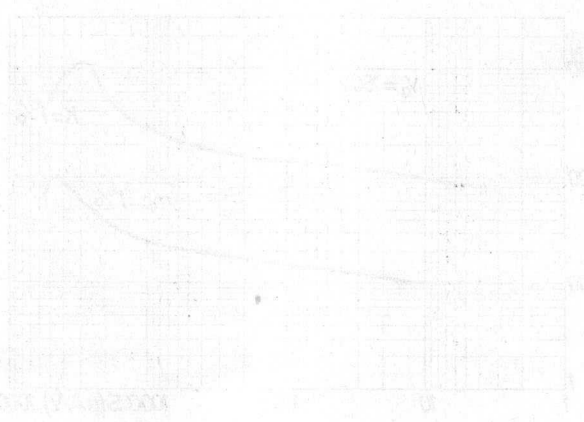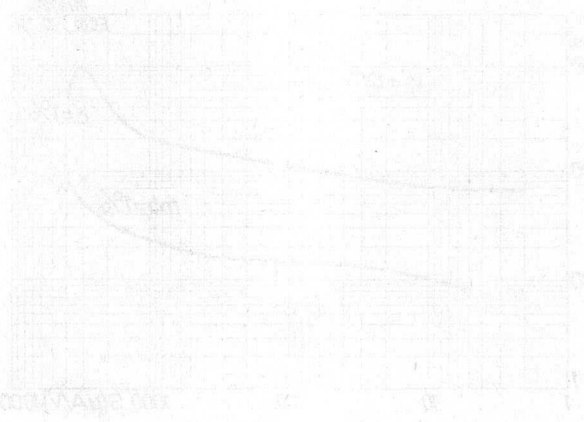

S.Q. TUBE



Triode designed for use as R.F. power amplifier or oscillator for frequencies up to 150 MHz.

QUICK REFERENCE DATA	
Life test	500 hours
Base	Miniature
Heating	Indirect A.C. or D.C.
Heater voltage	V_f 6.3 V
Heater current	I_f 150 mA
Output power $f = 50$ MHz	W_o 3.6 W
$f = 100$ MHz	W_o 3.3 W

DIMENSIONS AND CONNECTIONS

Dimensions in mm

Base: Miniature



7Z2 7355

CHARACTERISTICS

Heater voltage	V_f	6.3	V
Heater current	I_f	150	mA
Anode voltage	V_a	100	250 V
Grid voltage	$-V_g$	0	8.5 V
Anode current	I_a	11.8	10.5 mA
Mutual conductance	S	3.25	2.2 mA/V
Amplification factor	μ	21.5	17
Internal resistance	R_i	6.6	7.7 $k\Omega$

CAPACITANCES

		Without shield	With shield
Anode to grid	C_{ag}	1.4	1.3 pF
Grid to cathode and heater	$C_{a/kf}$	1.5	1.7 pF
Anode to cathode and heater	$C_{g/kf}$	1.2	2.6 pF

LIMITING VALUES (Design centre rating system)

Anode voltage	V_{a0}	max.	550 V
	V_a	max.	300 V
Anode dissipation	W_a	max.	3.5 W
Cathode current:			
(as R.F. oscillator or amplifier)	I_k	max.	30 mA
(as R.F. doubler or trebler)	I_k	max.	20 mA
Grid voltage	$-V_g$	max.	100 V
Grid current	$+I_g$	max.	5.0 mA
Grid resistor	R_g	max.	250 $k\Omega$
Voltage between cathode and heater	V_{kf}	max.	150 V
Bulb temperature	t_{bulb}	max.	180 $^{\circ}C$


OPERATING CHARACTERISTICS

As R.F. amplifier or oscillator


Class C telegraphy or F.M.


Frequency	f	50	100	MHz
Anode voltage	V_a	300	300	V
Grid voltage	$-V_g$	27	27	V
Anode current	I_a	16.2	17.1	mA
Grid current	$+I_g$	3.8	2.9	mA
Output power	W_o	3.6	3.3	W
Efficiency	η	67	55	%


7Z04673-5.3.ij

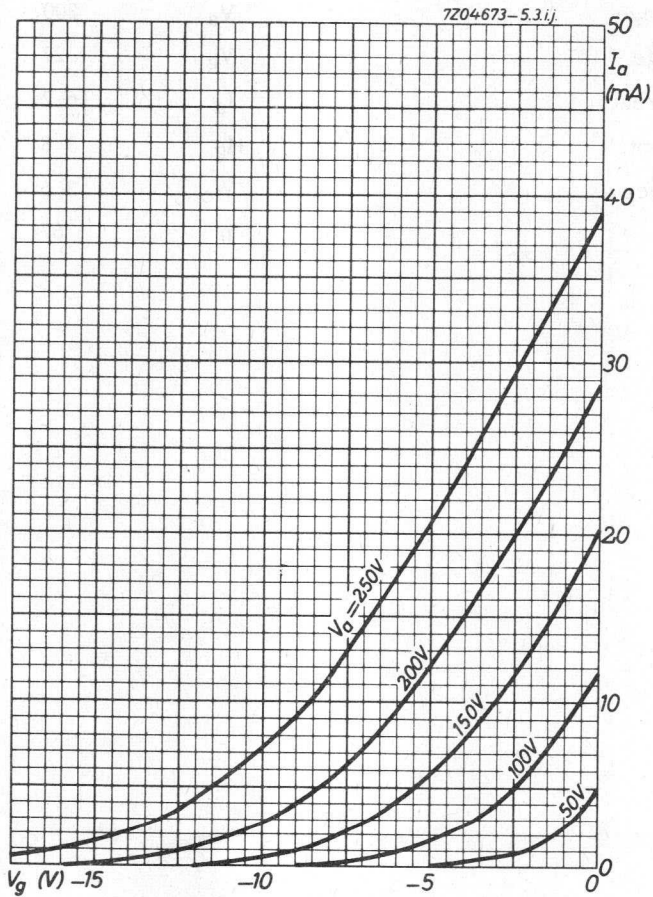


7Z04-670-5.3ij

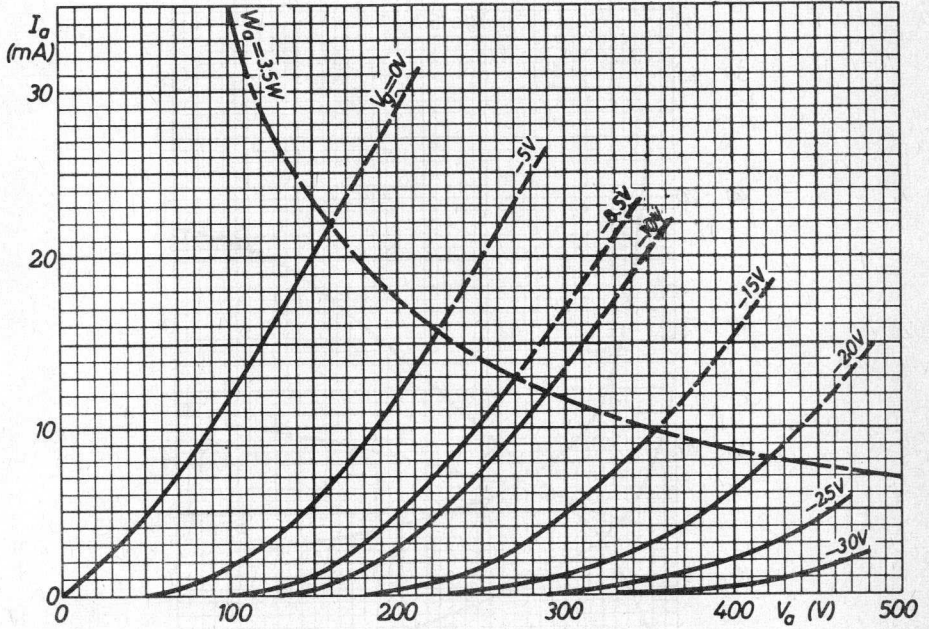

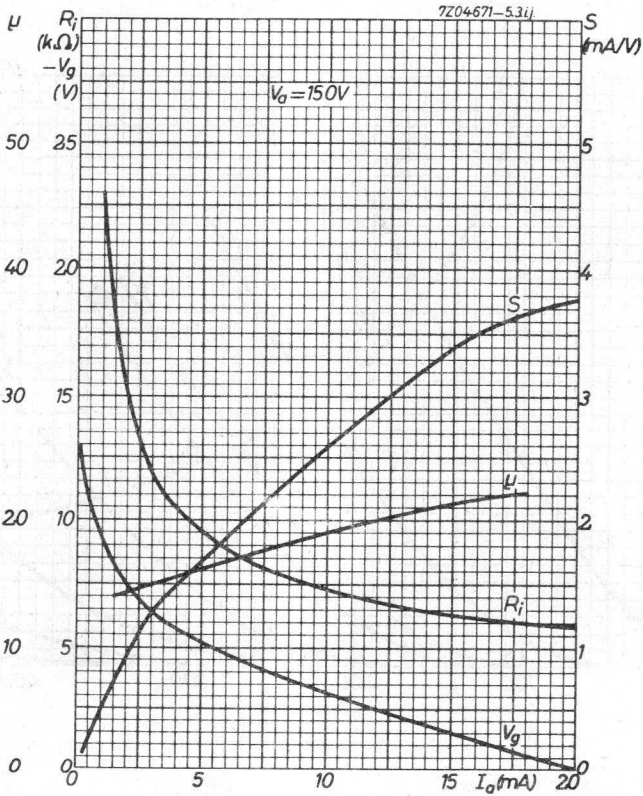

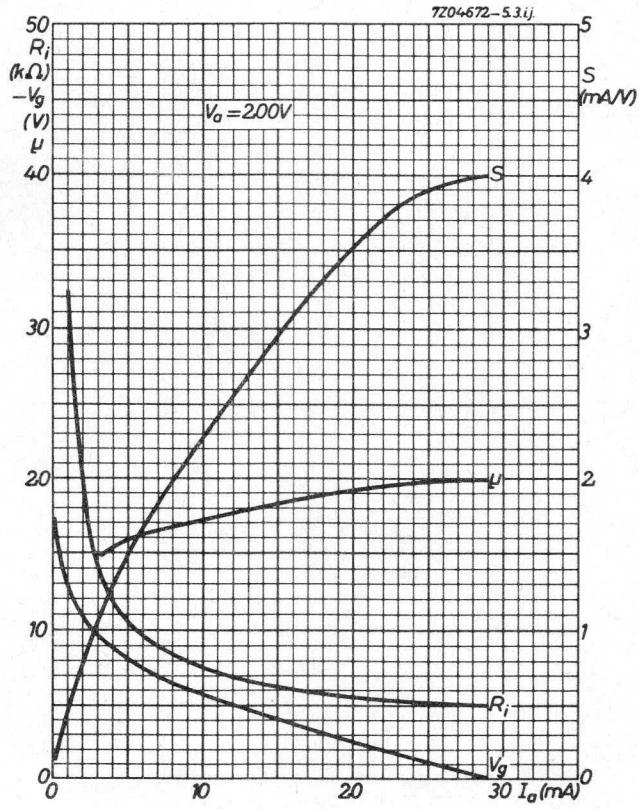

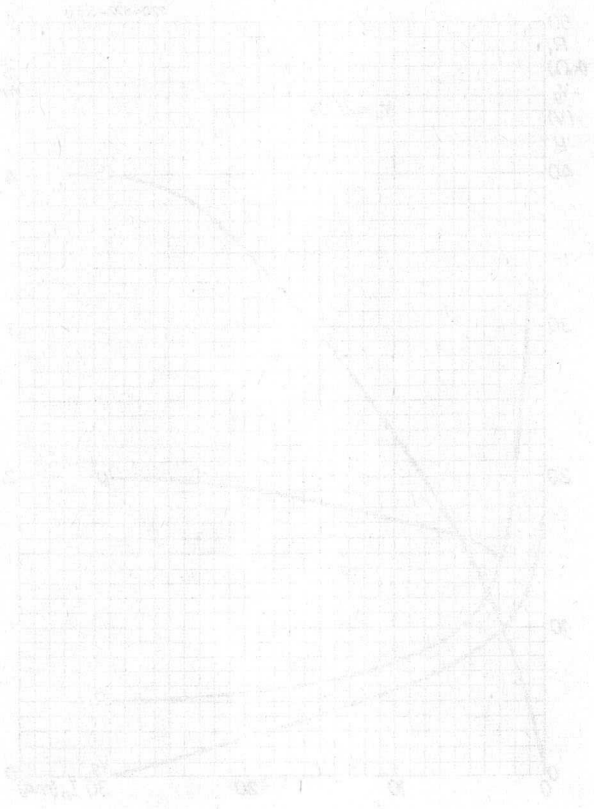

S.Q. TUBE

Triode designed for use as grounded grid U.H.F. amplifier for frequencies up to 250 MHz.


QUICK REFERENCE DATA

Life test	500 hours	
Base	Miniature 7 pin	
Heating	Indirect A.C. or D.C. Series or parallel supply	
Heater voltage	V_f	6.3 V
Heater current	I_f	300 mA
Mutual conductance	S	8.5 mA/V

DIMENSIONS AND CONNECTIONS

Dimensions in mm

Base: Miniature 7 pin

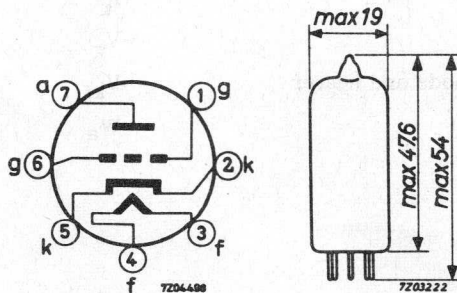

7Z2 7568

CHARACTERISTICS

Anode voltage	V_a	250 V
Grid voltage	$-V_g$	1.5 V
Cathode resistor	R_k	150 Ω
Anode current	I_a	10 mA
Mutual conductance	S	8.5 mA/V
Amplification factor	μ	100
Internal resistance	R_i	12 $k\Omega$
Equivalent noise resistance	R_{eq}	400 Ω

CAPACITANCES


Grid to cathode and heater	$C_{g/kf}$	8.5 pF
Anode to cathode and heater	$C_{a/kf}$	max. 0.2 pF
Anode to grid	C_{ag}	2.5 pF

LIFE

Production samples are tested during 500 hours.


LIMITING VALUES (Absolute max. rating system)

Anode voltage	V_{a0}	max. 550 V
	V_a	max. 250 V
Cathode current	I_k	max. 15 mA
Grid voltage	$-V_g$	max. 100 V
Voltage between cathode and heater	V_{kf}	max. 150 V
Anode dissipation	W_a	max. 2.5 W

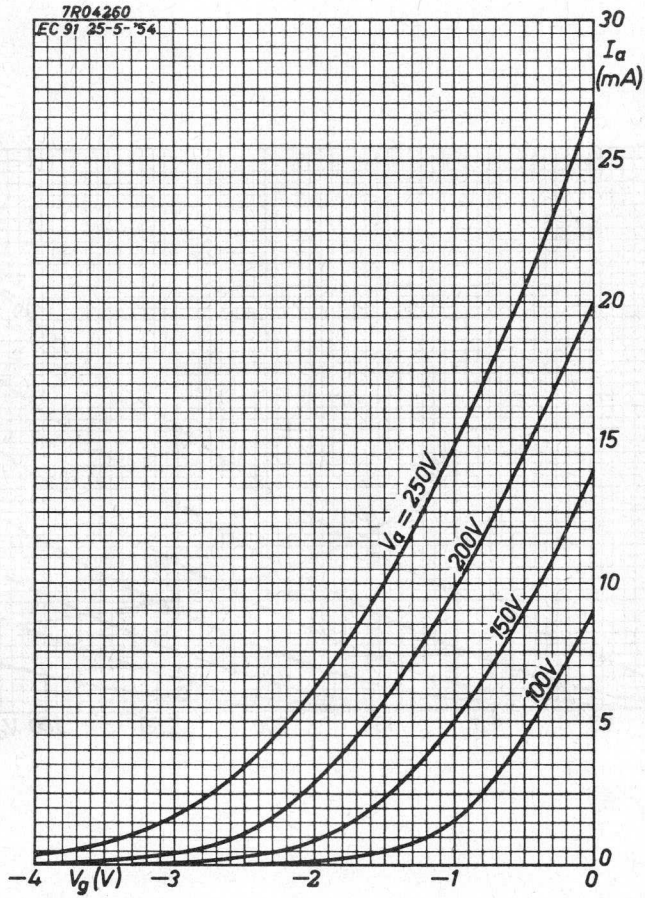

7R04261

EC 91 25-5-54

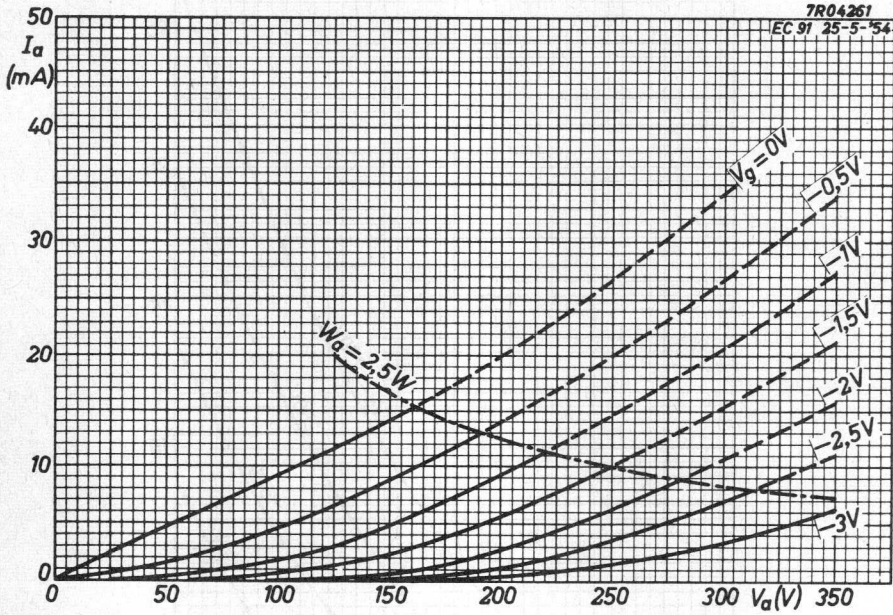

S.Q. TUBE

Special quality triode, designed for use as amplifier in measuring probes.


QUICK REFERENCE DATA

Life test	1000 hours	
Envelope	Subminiature	
Low interface resistance		
Mechanical quality	Shock and vibration resistant	
Heating	Indirect	
	A. C. or D. C. ; parallel supply	
Heater voltage	V_f	6.3 V
Heater current	I_f	185 mA
Equivalent grid noise voltage	V_n max.	1 mV
Anode current	I_a	14 mA
Mutual conductance	S	14.5 mA/V

DIMENSIONS AND CONNECTIONS

Dimensions in mm

Envelope: Subminiature

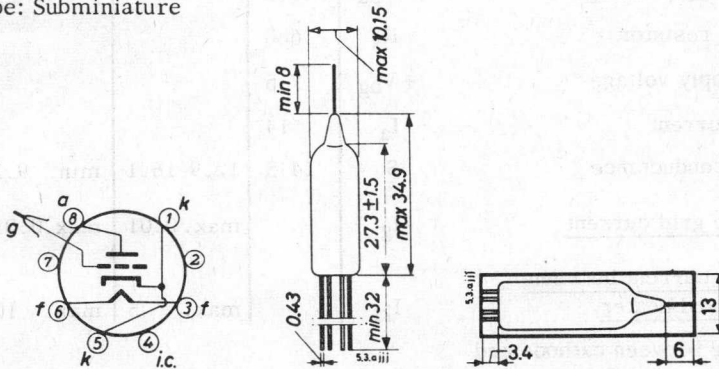

Leads should not be soldered nearer than 5 mm to the seal.

Leads should not be bent nearer than 2 mm to the seal.

Method of shielding. See fig. 1.

7Z2 6104

CHARACTERISTICS

Column I Nominal value or setting of the tube

II Range values for equipment design: Initial spread

III Range values for equipment design: End of life

		I	II	III	
Heater voltage	V_f	6.3			V
Heater current	I_f	185	175- 195		mA
Anode voltage	V_a	80			V
Grid voltage	$-V_g$	2			V
Anode current	I_a	14			mA
Mutual conductance	S	14.5			mA/V
Amplification factor	μ	27.5			
Input resistance	r_g	300			Ω
Frequency = 250 MHz					
Input resonance frequency	f	400			MHz
Anode supply voltage	V_{ba}	82			V
Cathode resistor	R_k	143			Ω
Anode current	I_a	14.0	11.2-16.8	min. 8.2	mA
Mutual conductance	S	14.5			mA/V
Anode supply voltage	V_{ba}	90			V
Cathode resistor	R_k	680			Ω
Grid supply voltage	$+V_{bg}$	7.5			V
Anode current	I_a	14			mA
Mutual conductance	S	14.5	12.9-16.1	min. 9.2	mA/V
<u>Negative grid current</u>	$-I_g$		max. 0.01	max. 0.01	μA
<u>Leakage current between cathode and heater</u>	I_{kf}		max. 5	max. 10	μA

Voltage between cathode and heater = 55 V. Cath. positive.

CHARACTERISTICS (continued)

Equivalent grid microphony voltage

Peak acceleration = 4 g
 Frequency = 50 Hz

	I	II	
V_g		max. 1.0	mV _{RMS}

Equivalent grid hum voltage

Grid resistor = 0.5 MΩ
 Cathode resistor = 100 Ω
 Heater centre grounded

V_g		max. 1.0	mV _{RMS}
-------	--	----------	-------------------

CAPACITANCES

Grid to cathode

C_{gk}	3.5	2.9 - 4.1	pF
----------	-----	-----------	----

Anode to grid

C_{ag}	1.7	1.4 - 2.0	pF
----------	-----	-----------	----

Grid to heater

C_{gf}	33	23 - 43	mpF
----------	----	---------	-----

Anode to cathode

C_{ak}	450	325 - 575	mpF
----------	-----	-----------	-----

Anode to heater

C_{af}	270	185 - 355	mpF
----------	-----	-----------	-----

SHOCK AND VIBRATION RESISTANCE

The following test conditions are applied to assess the mechanical quality of the tube. These conditions are not intended to be used as normal operating conditions.

Shock

The tube is subjected 5 times in each of 4 positions to an acceleration of 500 g supplied by an NRL shock machine with the hammer lifted over an angle of 30°.

Vibration

The tube is subjected during 32 hours in each of 3 positions to a vibration frequency of 50 Hz with an acceleration of 2.5 g.

LIFE

Production samples are tested to be within the end of life values during 1000 hours.

LIMITING VALUES (Absolute max. rating system)

Anode voltage	V_{a0}	max.	275 V
	V_a	max.	110 V
Anode dissipation	W_a	max.	1.5 W
Grid voltage	$-V_g$	max.	55 V
Cathode current	I_k	max.	22 mA
Voltage between cathode and heater	V_{kf}	max.	55 V
Bulb temperature	t_{bulb}	max.	170 °C


Grid resistor: The grid resistance should be restricted to a value such that no limiting values are exceeded at $-I_g = 0.01 \mu A$.

The D.C. feed back factor of the operating circuit may be taken into account.


The R_g value will also be limited by the required current stability and the permissible hum level.

Heater voltage: The average heater voltage should be 6.3 V.

Variations of the heater voltage exceeding the range of 6.0 V to 6.6 V will shorten the tube life.

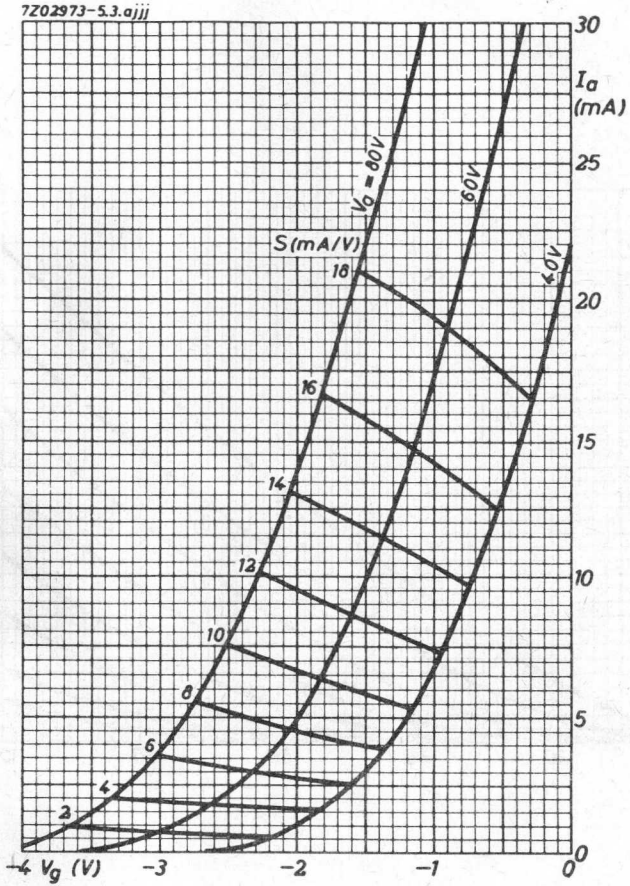

7202974-53ajjj

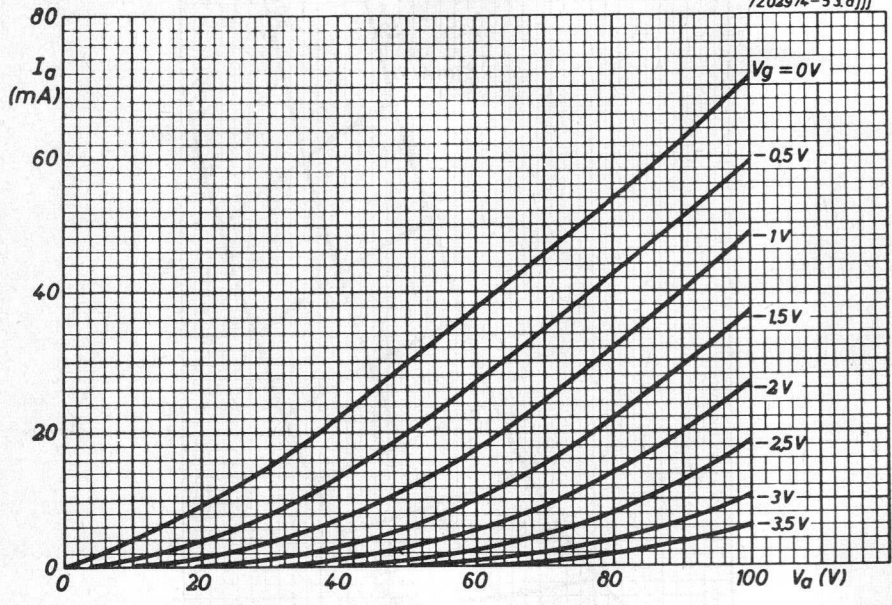

S.Q. TUBE


Special quality U.H.F. triode designed for use as R.F. amplifier and oscillator (max. frequency 1000 MHz).

QUICK REFERENCE DATA	
Life test	10 000 hours
Low interface resistance	
Mechanical quality	Shock and vibration resistant
Base	Noval
Heating	Indirect A.C. or D.C.; parallel supply
Heater voltage	V_f 6.3 V
Heater current	I_f 280 mA
Anode current	I_a 25 mA
Mutual conductance	S 28 mA/V

DIMENSIONS AND CONNECTIONS

Dimensions in mm

Base: Noval

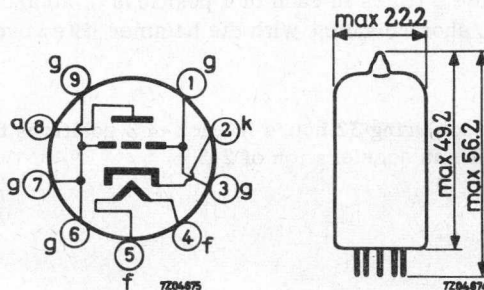

7Z2 7361

CHARACTERISTICS

Anode supply voltage	V_{ba}	200 V
Anode resistor	R_a	2.4 k Ω
Cathode resistor	R_k	47 Ω
Anode current	I_a	25 mA
Mutual conductance	S	28 mA/V
Amplification factor	μ	60

CAPACITANCES

Without shield

Anode to cathode and heater	$C_{a/kf}$	0.1 pF
Grid to cathode and heater	$C_{g/kf}$	7 pF
Anode to grid	C_{ag}	1.4 pF

With external shield

Anode to cathode and heater	$C_{a/kf}$	0.09 pF
Grid and screen to cathode and heater	$C_{gs/kf}$	7.5 pF
Anode to grid and shield	$C_{a/gS}$	1.9 pF

SHOCK AND VIBRATION RESISTANCE

The following test conditions are applied to assess the mechanical quality of the tube. These conditions are not intended to be used as normal operating conditions.

Shock

The tube is subjected 5 times in each of 4 positions to an acceleration of 500 g supplied by an NRL shock machine with the hammer lifted over an angle of 30°.

Vibration


The tube is subjected during 32 hours in each of 3 positions to a vibration frequency of 50 Hz with an acceleration of 2.5 g.

LIMITING VALUES (Absolute max. rating system)

Anode voltage	V_{a0}	max. 400 V
	V_a	max. 200 V
Anode dissipation	W_a	max. 4.5 W
Grid voltage	$-V_g$	max. 20 V
Cathode current	I_k	max. 35 mA
Grid resistor	R_g	max. 500 k Ω
Voltage between cathode and heater	V_{kf}	max. 100 V

Heater voltage: The average heater voltage should be 6.3 V.

Variations of the heater voltage exceeding the range of 6.0 V to 6.6 V will shorten the tube life.



1950-1951

1950-1951

1950-1951

1950-1951

1950-1951

1950-1951

1950-1951

1950-1951

1950-1951

1950-1951

1950-1951

1950-1951

S.Q. TUBE



Special quality double triode with neutralisation screen, designed for use as V.H.F. amplifier (max. freq. 300 MHz) in a cascode circuit without external neutralisation, e.g. aerial amplifier for band III and frequency multiplier.

QUICK REFERENCE DATA				
Life test	10 000 hours			
Low interface resistance				
Mechanical quality	Shock and vibration resistant			
Base	10 pin miniature with gold plated pins			
Heating	Indirect A.C. or D.C.; parallel supply			
Heater voltage	V_f	6.3 V		
Heater current	I_f	335 mA		
	Input section		Output section	
Anode voltage	90	90	90	90 V
Anode current	15	27	15	27 mA
Mutual conductance	13	17.5	17	22 mA/V

DIMENSIONS AND CONNECTIONS

Dimensions in mm

Base: 10 pin miniature



7Z2 7363

CHARACTERISTICS

Heater voltage	V_f	6.3		V
Heater current	I_f	335		mA
<u>Input section (unit a', g', k')</u>				
Anode voltage	$V_{a'}$	90	90	V
Neutralization screen voltage	$V_{Sn'}$	0	0	V
Grid voltage	$-V_{g'}$	2.1	1.4	V
Anode current	$I_{a'}$	15	27	mA
Mutual conductance	S	13	17.5	mA/V
Amplification factor	μ	27	27	
Equivalent noise resistance	R_{eq}	250	200	Ω
<u>Output section (unit a, g, k)</u>				
Anode voltage	V_a	90	90	V
Grid voltage	$-V_g$	2.0	1.4	V
Anode current	I_a	15	27	mA
Mutual conductance	S	17	22	mA/V
Amplification factor	μ	28	28	
Equivalent noise resistance	R_{eq}	200	150	Ω

<u>Insulation resistance between electrodes</u>	R_{ins}	Initial	min.	100	$M\Omega$
		End of life	min.	20	$M\Omega$

Leakage current between cathode and heater

Voltage between cathode and heater $V = 150$ V

Cathode positive	I_{kf}	Initial	max.	15	μA
		End of life	max.	20	μA

Voltage between cathode and heater $V = 50$ V

Cathode negative	I_{kf}	Initial	max.	15	μA
		End of life	max.	20	μA

CAPACITANCESInput system (unit a', g', k')

Grid to cathode, filament and neutralisation screen	$C_{g'/k'f'sn'}$	5.1 pF
Anode to cathode, filament and neutralisation screen	$C_{a'/k'f'sn'}$	5.0 pF
Grid to neutralisation screen	$C_{g'sn'}$	1.4 pF
Anode to grid	$C_{a'g'}$	0.45 pF
Anode to neutralisation screen	$C_{a'sn'}$	3.4 pF

Output system (unit a, g, k)

Cathode to grid and filament	$C_{k/gf}$	6.5 pF
Anode to grid and filament	$C_{a/gf}$	3.2 pF
Anode to cathode	C_{ak}	180 mpF
Anode to grid	C_{ag}	1.5 pF

SHOCK AND VIBRATION RESISTANCE

The following test conditions are applied to assess the mechanical quality of the tube. These conditions are not intended to be used as normal operating conditions.

Shock

The tube is subjected 5 times in each of 4 positions to an acceleration of 500 g supplied by an NRL shock machine with the hammer lifted over an angle of 30°.

Vibration

The tube is subjected during 32 hours in each of 3 positions to a vibration frequency of 50 Hz with an acceleration of 2.5 g.

LIFE

Production samples are tested under the following conditions during 10000 hours: (each unit)

Heater voltage	V_f	6.3 V
Anode supply voltage	V_{ba}	110 V
Grid supply voltage	V_{bg}	17 V
Cathode resistor	R_k	680 Ω 7Z2 7365

LIMITING VALUES (Absolute max. rating system)

(Each unit)


Anode voltage	V_{a0}	max. 450 V
	V_a	max. 250 V
Anode dissipation	W_a	max. 2.7 W
Grid voltage	$-V_g$	max. 50 V
Grid peak voltage	$-V_{gp}$	max. 150 V
Duty factor max. 1%		
Pulse duration max. 10 μ s		
Cathode current	I_k	max. 40 mA
Cathode peak current	I_{kp}	max. 400 mA
Duty factor max. 10%		
Pulse duration max. 200 μ s		
Grid resistor	R_g	max. 1 M Ω
Automatic bias		
Voltage between cathode and heater		
Cathode positive	$V_{kf}(k+)$	max. 150 V
Cathode negative	$V_{kf}(k-)$	max. 50 V
Bulb temperature		max. 225 $^{\circ}$ C

OPERATING CHARACTERISTICS


Cascode circuit, Frequency 200 MHz

Supply voltage	V_b	200	200 V
Cathode resistor	R_k	1200	680 Ω
Anode current	I_a	15.5	26.5 mA
Input resistance	r_g	910	670 Ω
Input capacitance	C_i	11	12 pF
Noise figure	F	2.5	2.5 kT _o

Adapted to minimum noise

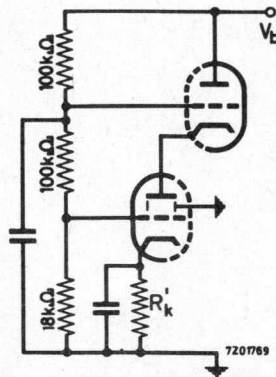

7Z2 7366



Symbol	Value	Unit
V_{cc}	5.0	V
V_{ce}	1.0	V
V_{be}	0.7	V
V_{bc}	0.3	V
V_{cb}	0.3	V
V_{eb}	0.7	V
V_{ec}	1.0	V
V_{bc}	0.3	V

CHARACTERISTICS

Graphs of V_{ce} vs. I_{ce} and V_{ce} vs. I_{cb}

Output voltage

Output current


Input voltage

Input current

Power dissipation

Frequency response

Temperature stability

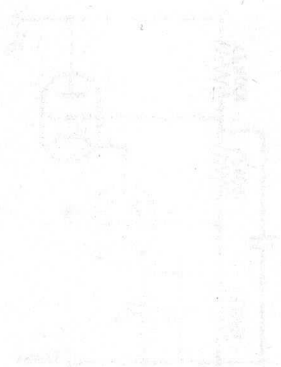

S.Q. TUBE

Special quality double triode designed for use as A.F. amplifier, oscillator and multivibrator.



QUICK REFERENCE DATA

Life test	1000 hours
Low interface resistance	
Mechanical quality	Shock and vibration resistant
Base	Noval
Heating	Indirect A.C. or D.C.; Parallel supply
Heater voltage	V_f 6.3 or 12.6 V
Heater current	I_f 300 or 150 mA
Anode current	I_a 1.2 mA
Mutual conductance	S 1.6 mA/V
Amplification factor	μ 100

DIMENSIONS AND CONNECTIONS

Dimensions in mm

Base: Noval



7Z2 7367

CHARACTERISTICS . Each system if applicable.

Column I Nominal value or setting of the tube

II Range values for equipment design: Initial spread

III Range values for equipment design: End of life

		I	II	III	
Heater voltage	V_f	6.3			V
Heater current	I_f	300	276- 324		mA
Anode voltage	V_a	250			V
Grid voltage	$-V_g$	2			V
Anode current	I_a	1.2	0.75-1.75		mA
Mutual conductance	S	1.6	1.25-2.05	min. 1.12	mA/V
Amplification factor	μ	100			
Internal resistance	R_i	62.5			k Ω
Difference in anode current of both systems	$ I_a - I_a' $		max. 0.6		mA
Negative grid current	$-I_g$		max. 0.5	max. 0.5	μ A
Vibrational noise output (units connected parallel)	V_o		max. 25		mVRMS
Anode supply voltage $V_{ba} = 250$ V					
Grid voltage $-V_g = 2$ V					
Frequency $f = 25$ Hz					
Acceleration 2.5 g					
Anode resistor $R_a = 2$ k Ω					
Amplification					
Anode supply voltage	V_{ba}	100			V
Grid voltage	V_g	0			V
Anode resistor	R_a	0.5			M Ω
Grid resistor	R_g	10			M Ω
Input voltage	V_i	0.2			V _{RMS}
Output voltage	V_o		min. 8.4		V _{RMS}

7Z2 7368

CHARACTERISTICS (continued)

		I	II	III	
Anode voltage	V_a	100			V
Grid voltage	$-V_g$	1			V
Anode current	I_a	0.5			mA
Mutual conductance	S	1.25			mA/V
Amplification factor	μ	100			
Internal resistance	R_i	80			k Ω
<hr/>					
<u>Insulation resistance between electrodes</u>	R_{ins}		min. 100	min. 50	M Ω
Voltage between electrodes $V = 100$ V					
<hr/>					
<u>Leakage current between cathode and heater</u>	I_{kf}		max. 10	max. 20	μ A
Voltage between cathode and heater $V_{kf} = 100$ V					

CAPACITANCES. Without external screen.
Each system if applicable.

Anode to grid, cathode and heater	$C_{a/gkf}$	3.9 pF
Anode to cathode and heater	$C_{a/kf}$	0.4 pF
	$C_{a'/k'f}$	0.3 pF
Grid to anode, cathode and heater	$C_{g/akf}$	3.7 pF
Grid to cathode and heater	$C_{g/kf}$	1.6 pF
Anode to grid	C_{ag}	1.7 pF

SHOCK AND VIBRATION RESISTANCE

The following test conditions are applied to assess the mechanical quality of the tube. These conditions are not intended to be used as normal operating conditions.

Shock

The tube is subjected 5 times in each of 4 positions to an acceleration of 500 g supplied by an NRL shock machine with the hammer lifted over an angle of 30°.

7Z2 7369

SHOCK AND VIBRATION RESISTANCE (continued)**Vibration**

The tube is subjected during 32 hours in each of 3 positions to a vibration frequency of 50 Hz with an acceleration of 2.5 g.


LIFE

Production samples are tested to be within the end of life values (column III)

LIMITING VALUES (Absolute max. rating system)


Anode voltage	V_a	max.	330	V
Anode dissipation	W_a	max.	1.1	W
Cathode current	I_k	max.	20	mA
Grid resistor with fixed bias	R_g	max.	1	$M\Omega$
Voltage between cathode and heater	V_{kf}	max.	100	V
Bulb temperature	t_{bulb}	max.	165	$^{\circ}C$


7204-677-ab.24.g19

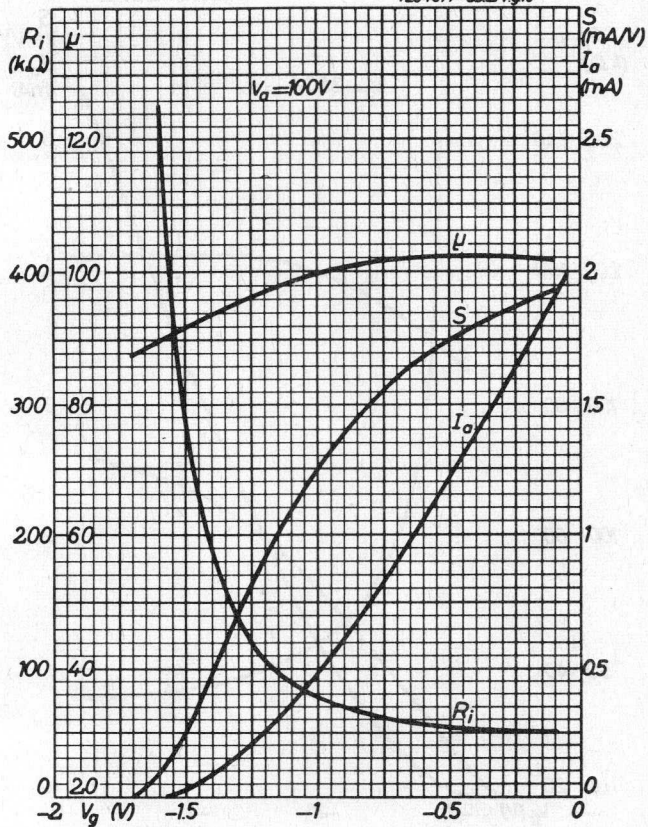


12AX7S

7204678-ob.24.g.19

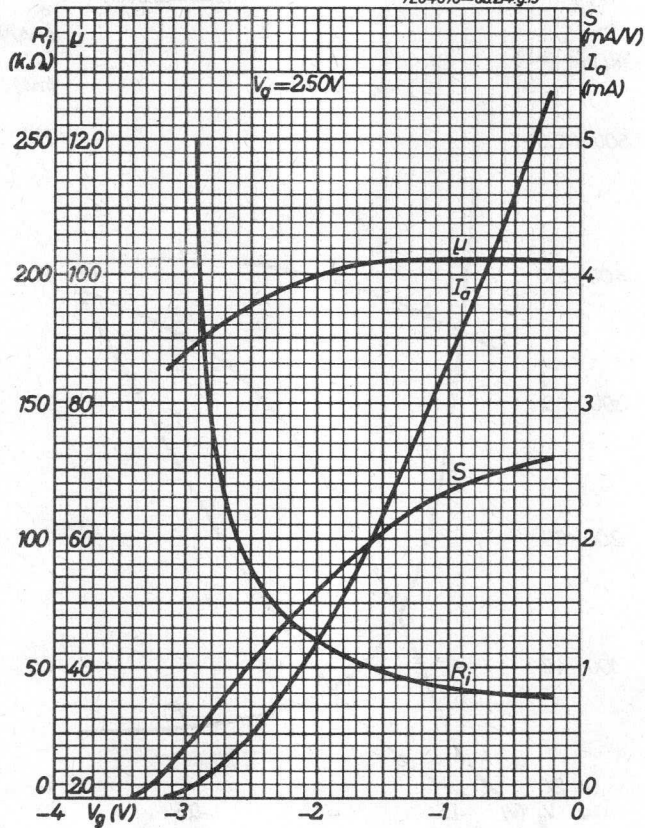

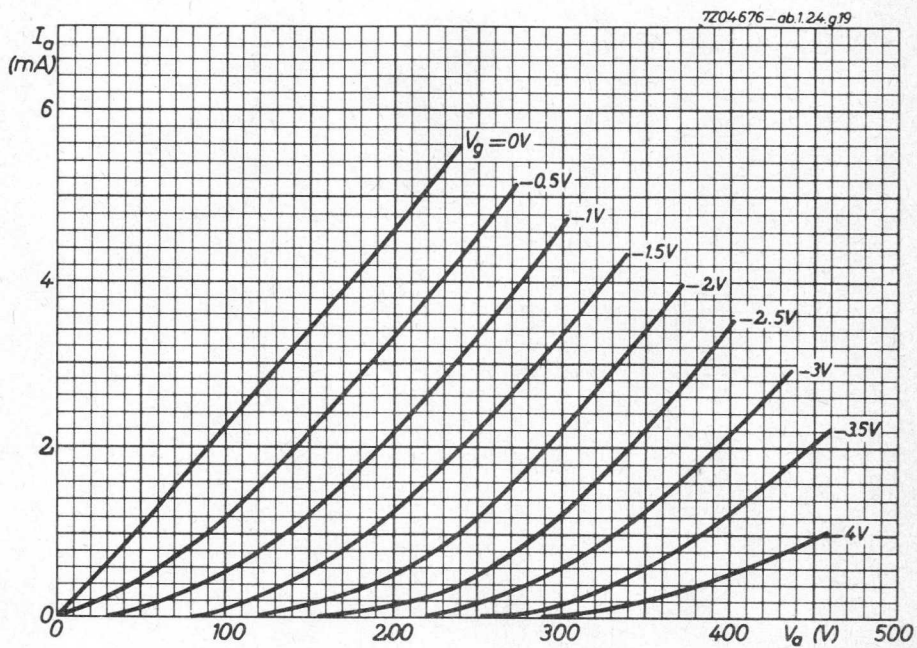

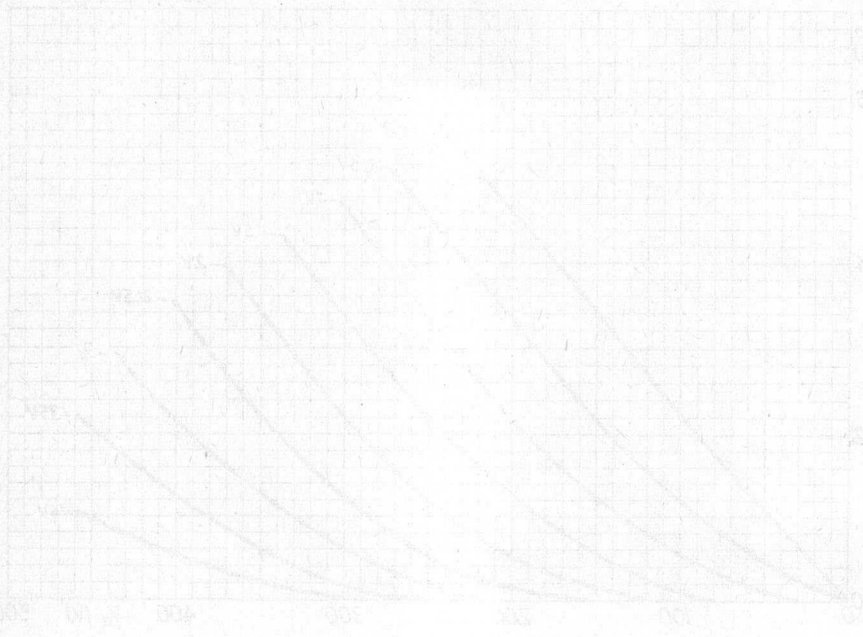

S.Q. DUAL CONTROL PENTODE

Special quality dual control pentode designed for use as amplifier and mixer.



QUICK REFERENCE DATA

Life test	1000 hours	
Mechanical quality	Shock and vibration resistant	
Base	Subminiature	
Heating	Indirect	
	A. C. or D. C.; Parallel supply	
Heater voltage	V_f	6.3 V
Heater current	I_f	150 mA
Mutual conductance anode to grid No. 1	S_{ag1}	3.2 mA/V
Mutual conductance anode to grid No. 3	S_{ag3}	0.5 mA/V

DIMENSIONS AND CONNECTIONS

Base: Subminiature

Dimensions in mm



Connections should not be soldered nearer than 5 mm to the seal.

Leads should not be bent nearer than 1.5 mm to the seal.

7Z2 5412

CHARACTERISTICS

Column I Nominal value or setting of the tube

II Range values for equipment design: Initial spread

III Range values for equipment design: End of life

		I	II	III	
Heater voltage	V_f	6.3			V
Heater current	I_f	150	140 - 160		mA
Anode voltage	V_a	100			V
Grid No.2 voltage	V_{g2}	100			V
Grid No.3 voltage	V_{g3}	0			V
Cathode resistor	R_k	150			Ω
Anode current	I_a	5.3	3.7 - 6.9		mA
Grid No.2 current	I_{g2}	4.0	2.8 - 5.4		mA
Mutual conductance;					
anode to grid No.1	S_{ag1}	3.2	2.7 - 4.0	ΔS : max. 20 %	mA/V
anode to grid No.3	S_{ag3}	0.5			mA/V
Internal resistance	R_i	110			k Ω
<u>Negative grid No.1 current</u>	$-I_{g1}$		max. 0.3	max. 1.0	μA
Grid No.1 resistor $R_{g1} = 1 M\Omega$					
Anode voltage	V_a	100			V
Grid No.2 voltage	V_{g2}	100			V
Grid No.3 voltage	V_{g3}	-1			V
Cathode resistor	R_k	150			Ω
Anode current	I_a	4.0			mA
Grid No.2 current	I_{g2}	5.8			mA
Mutual conductance;					
anode to grid No.1	S_{ag1}	1.95			mA/V
anode to grid No.3	S_{ag3}		0.5 - 1.8		mA/V
Internal resistance	R_i	50			k Ω

CHARACTERISTICS (continued)

		I	II	III	
<u>Grid No.1 cut-off voltage</u>	$-V_{g1}$		max. 7.5		V
Anode voltage	V_a	100			V
Grid No.2 voltage	V_{g2}	100			V
Anode current	I_a	100			μA
<u>Grid No.3 cut-off voltage</u>	$-V_{g3}$		max. 8.0		V
Anode voltage	V_a	100			V
Grid No.2 voltage	V_{g2}	100			V
Anode current	I_a	100			μA
<u>Leakage current between cathode and heater</u>	I_{kf}		max. 5	max. 10	μA
Voltage between cathode and heater $V_{kf} = 100$ V					
<u>Insulation resistance between two electrodes</u>	R_{ins}		min. 100	min. 50	$M\Omega$
Voltage between electrodes = 100 V					
<u>Vibrational noise output</u>	V_o		max. 40		mV
Anode supply voltage	V_{ba}	100			V
Anode resistor	R_a	10			$k\Omega$
Grid No.2 voltage	V_{g2}	100			V
Grid No.3 voltage	V_{g3}	0			V
Cathode by pass capacitor $C = 1000 \mu F$					
Cathode resistor $R_k = 150 \Omega$					
Vibration frequency 40 Hz					
Acceleration 15 g					

CAPACITANCES With external shield

		I	II	
Grid No.1 to grid No.2, grid No.3, cathode and heater	$C_{g1/g2g3}$ kf	4.0	3.5 - 4.5	pF
Grid No.3 to grid No.1, grid No.2, cathode and heater	$C_{g3/g2g1}$ kf	4.0	3.5 - 4.5	pF
Anode to grid No.2, grid No.3, cathode and heater	$C_{a/g2g3}$ kf	3.4	2.9 - 3.9	pF
Anode to grid No.1	C_{ag1}		max.0.02	pF
Anode to grid No.3	C_{ag3}		max. 1.1	pF
Grid No.1 to grid No.3	C_{g1g3}		max.0.15	pF

SHOCK AND VIBRATION RESISTANCE

The following test conditions are applied to assess the mechanical quality of the tube. These conditions are not intended to be used as normal operating conditions.

Shock

The tube is subjected 5 times in each of 4 positions to an acceleration of 500 g supplied by an NRL shock machine with the hammer lifted over an angle of 30°.

Vibration

The tube is subjected during 32 hours in each of 3 positions to a vibration frequency of 25 Hz with an acceleration of 2.5 g.

LIFE

Production samples are tested to be within the end of life values (column III) during 1000 hours.


LIMITING VALUES (Absolute max. rating system)


Anode voltage	V_{a_0}	max.	330 V
Anode voltage	V_a	max.	165 V
Anode dissipation	W_a	max.	1.1 W
Grid No. 3 voltage	V_{g_3}	max.	30 V
Grid No. 3 negative voltage	$-V_{g_3}$	max.	55 V
Grid No. 2 voltage	V_{g_2}	max.	155 V
Grid No. 2 dissipation	W_{g_2}	max.	0.7 W
Grid No. 1 voltage	V_{g_1}	max.	0 V
Grid No. 1 negative voltage	$-V_{g_1}$	max.	55 V
Grid No. 1 resistor	R_{g_1}	max.	1.2 M Ω
Cathode current	I_k	max.	16 mA
Voltage between cathode and heater;			
D.C. component	V_{kf}	max.	200 V
peak value	V_{kfp}	max.	200 V
Bulb temperature	t_{bulb}	max.	220 °C


Heater voltage: The average heater voltage should be 6.3 V.

Variations of the heater voltage exceeding the range of 6.0 V to 6.6 V will shorten the tube life.

The tolerance of heater current (column II) should be taken into account.

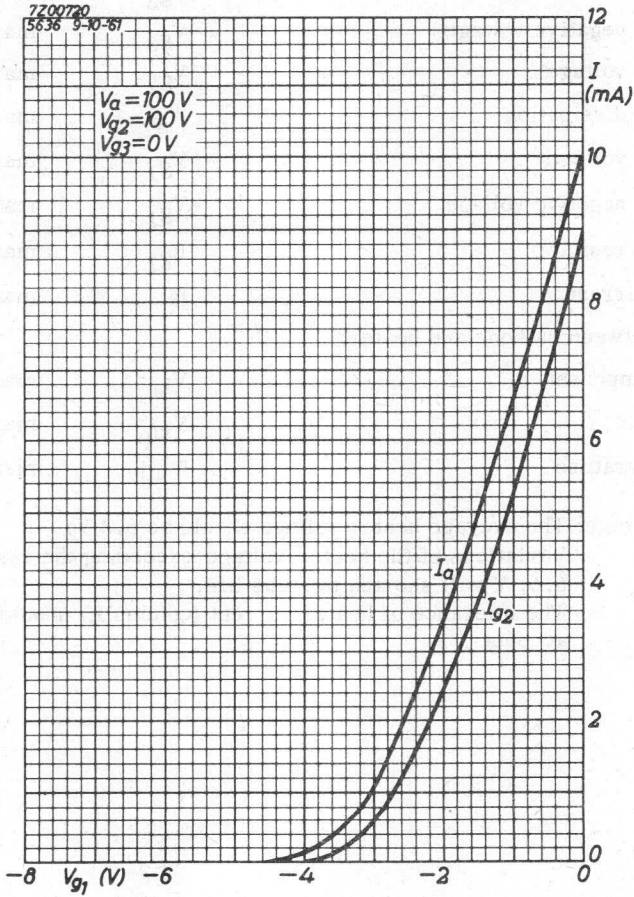

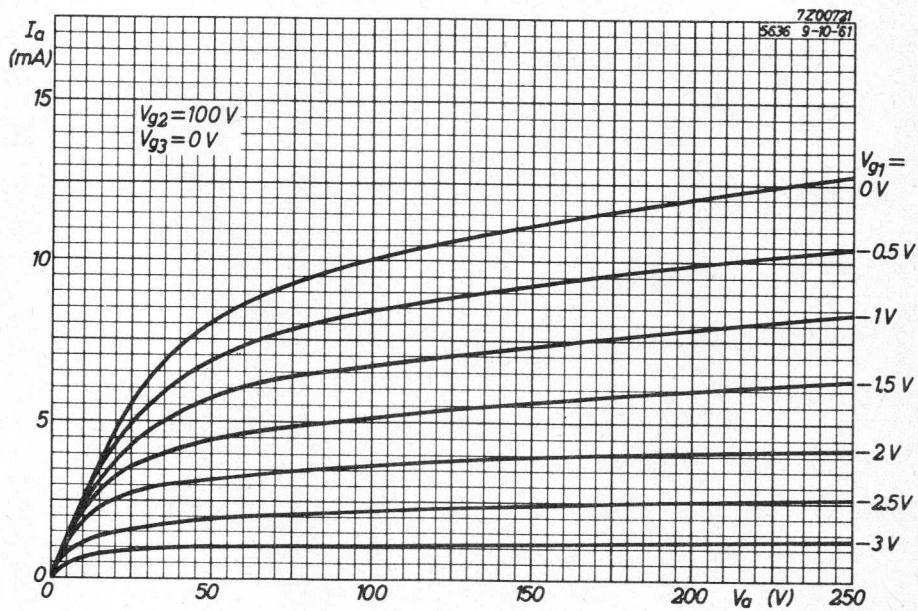

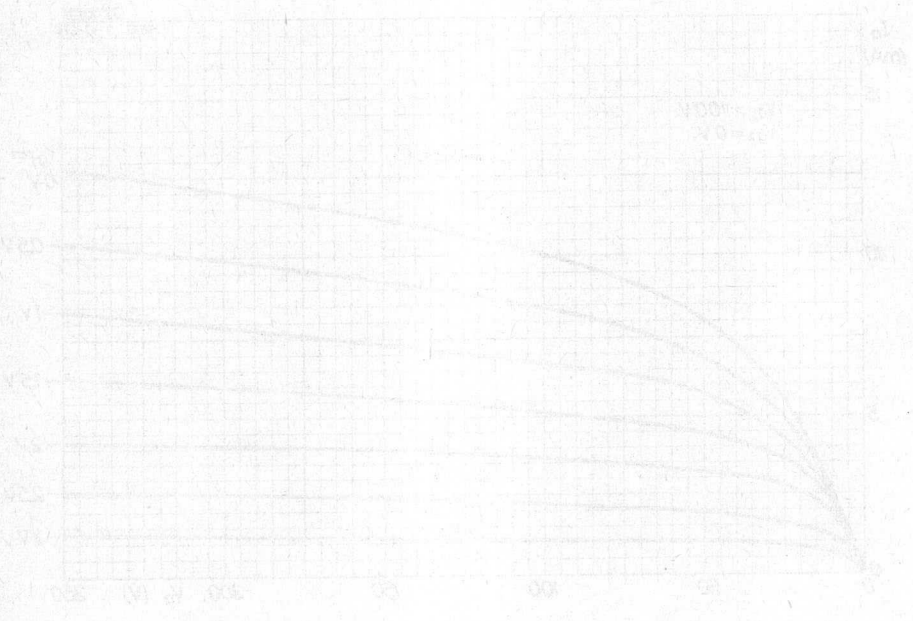

S.Q. OUTPUT PENTODE

Special quality pentode designed for use as output tube and video amplifier.



QUICK REFERENCE DATA

Life test	1000 hours	
Mechanical quality	Shock and vibration resistant	
Base	Subminiature	
Heating	Indirect	
	A.C. or D.C., parallel supply	
Heater voltage	V_f	6.3 V
Heater current	I_f	450 mA
Mutual conductance	S	9 mA/V
Anode current	I_a	21 mA

DIMENSIONS AND CONNECTIONS

Base: Subminiature

Dimensions in mm

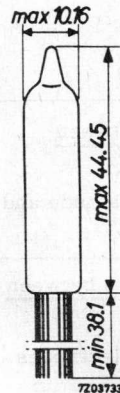

Connections should not be soldered nearer than 5 mm to the seal.
Leads should not be bent nearer than 1.5 mm to the seal.

7Z2 5417

CHARACTERISTICS

Column I Nominal value or setting of the tube

II Range values for equipment design: Initial spread

III Range values for equipment design: End of life value

		I	II	III	
Heater voltage	V_f	6.3			V
Heater current	I_f	450	420-480		mA
Anode voltage	V_a	150			V
Grid No.2 voltage	V_{g_2}	100			V
Cathode resistor	R_k	100			Ω
Anode current	I_a	21	14-28		mA
Grid No.2 current	I_{g_2}	4.0	2-6		mA
Mutual conductance	S	9.0	7.5-10.5	ΔS : max. 20%	mA/V
Internal resistance	R_i	50			k Ω
<u>Negative grid No.1 current</u>	$-I_{g_1}$		max. 1.0	max. 2.0	μA
Grid No.1 resistor $R_{g_1} = 1 M\Omega$					
<u>Grid No.1 cut-off voltage</u>	$-V_{g_1}$	14			
Anode voltage	V_a	150			V
Grid No.2 voltage	V_{g_2}	100			V
Anode current	I_a		max. 75		μA
<u>Leakage current between cathode and heater</u>	I_{kf}		max. 15	max. 60	μA
Voltage between cathode and heater $V_{kf} = 100 V$					
<u>Insulation resistance between two electrodes</u>	R_{ins}		min. 100	min. 50	M Ω
Voltage between electrodes $V = 100 V$					

CHARACTERISTICS (continued)

	I	II	III	
<u>Vibrational noise output</u>	V_o	max. 100		mV_{eff}
Anode supply voltage	V_{ba}	150		V
Anode resistor	R_a	2		$k\Omega$
Grid No. 2 voltage	V_{g2}	100		V
Cathode resistor	R_k	100		Ω
Cathode by pass capacitor $C_k = 1000 \mu F$				
Grid No. 1 resistor $R_{g1} = 0.1 M\Omega$				
Vibration frequency = 40 Hz				
Acceleration = 15 g				

CAPACITANCES With external shield, inside diameter 10.3 mm

	I	II	
Grid No. 1 to grid No. 2, grid No. 3, cathode and heater	$C_{g1/g2}$	9	8-10 pF
Anode to grid No. 2, grid No. 3, cathode and heater	$C_{a/g2}$	8	7-9 pF
Anode to grid No. 1	C_{ag1}		max. 0.13 pF

SHOCK AND VIBRATION RESISTANCE

The following test conditions are applied to assess the mechanical quality of the tube. These conditions are not intended to be used as normal operating conditions.

Shock

The tube is subjected 5 times in each of 4 positions to an acceleration of 500 g supplied by an NRL shock machine with the hammer lifted over an angle of 30° .

Vibration

The tube is subjected during 32 hours in each of 3 positions to a vibration frequency of 50 Hz with an acceleration of 2.5 g.

LIFE

Production samples are tested to be within the end of life values (column III) during 1,000 hours.

7Z2 7376

LIMITING VALUES (Absolute max. rating system)


Anode voltage	V_{a0}	max. 330 V
Anode voltage	V_a	max. 165 V
Anode dissipation	W_a	max. 4 W
Grid No.2 voltage	V_{g2}	max. 155 V
Grid No.2 dissipation	W_{g2}	max. 1 W
Grid No.1 voltage	V_{g1}	max. 0 V
Grid No.1 negative voltage	$-V_{g1}$	max. 55 V
Grid No.1 resistor with fixed bias	R_{g1}	max. 100 k Ω
with automatic bias	R_{g1}	max. 500 k Ω
Cathode current	I_k	max. 40 mA
Voltage between cathode and heater, d.c. component	V_{kf}	max. 200 V
peak value	V_{kfp}	max. 200 V
Bulb temperature	t_{bulb}	max. 220 $^{\circ}\text{C}$

Heater voltage: The average heater voltage should be 6.3 V


Variations of the heater voltage exceeding the range of 6.0 to 6.6 V will shorten the tube life.

OPERATING CHARACTERISTICSOutput tube class A

Anode voltage	V_a	150 V
Grid No.2 voltage	V_{g2}	100 V
Cathode resistor	R_k	100 Ω
Load resistance	$R_{a\sim}$	9 k Ω
Input voltage	V_i	2 V_{RMS}
Output power	W_o	1 W

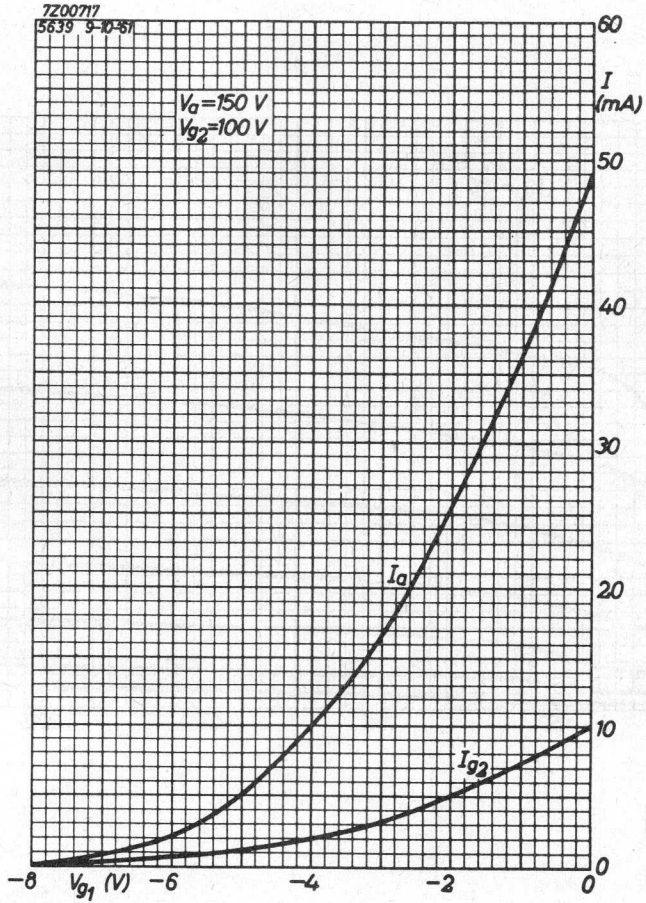

7Z0076
5639 9-10-57

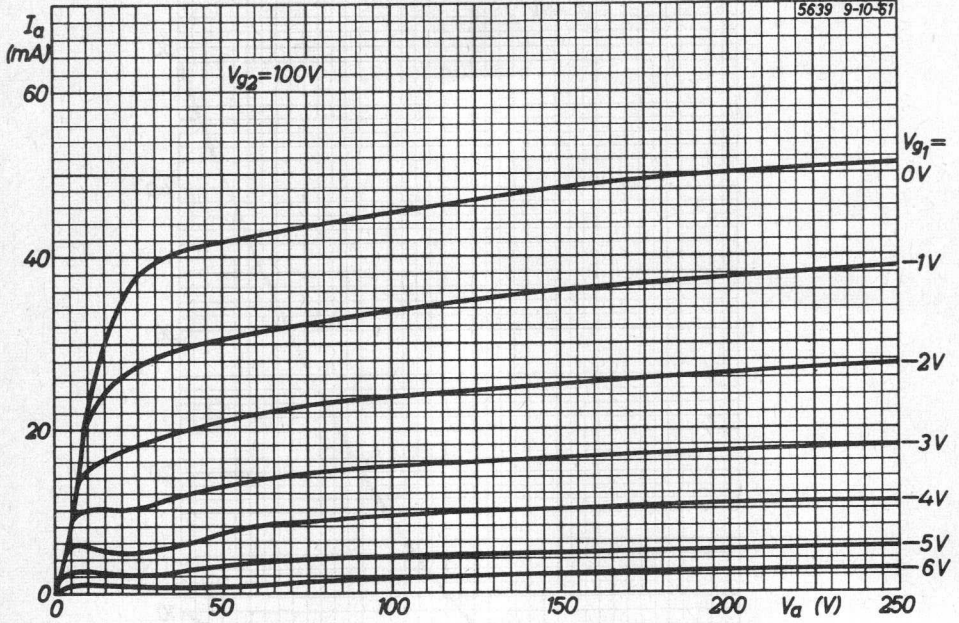

S.Q. TUBE


Single anode rectifier for use in the E.H.T. supply of oscilloscopes.

QUICK REFERENCE DATA	
Life test	500 hours
Heater voltage	V_f 1.25 V
Heater current	I_f 200 mA
Heating	Direct A.C. or D.C.
Peak inverse voltage	$V_{a\text{inv}p}$ 10 kV
Anode current	I_a 250 μA

DIMENSIONS AND CONNECTIONS

Dimensions in mm

Connections: Flying leads

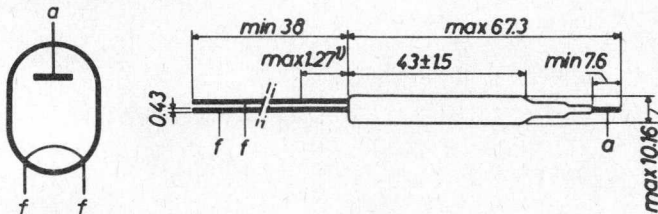

CAPACITANCES

Anode to filament

C_{af}

0.6 pF

¹⁾ Not tinned

7Z2 7378

LIMITING VALUES Design centre rating system

Anode peak inverse voltage	V_{ainvp}	max.	10 kV
Anode current	I_a	max.	250 μA
Anode peak current	I_{ap}	max.	5 mA
Pulse duration max.			10 μsec
Duty factor max.			0.15
Anode peak current	I_{ap}	max.	1.5 mA
Sine wave input			
Frequency min.			5 kHz

S.Q. TUBE

Special quality pentode designed for use as wide-band amplifier.



QUICK REFERENCE DATA

Life test	1000 hours	
Mechanical quality	Shock and vibration resistant	
Base	Miniature 7 pin	
Heating	Indirect A.C. or D.C.; parallel supply	
Heater voltage	V_f	6.3 V
Heater current	I_f	175 mA
Mutual conductance	S	5 mA/V
Sharp cut off		

DIMENSIONS AND CONNECTIONS

Dimensions in mm

Base: Miniature 7 pin



7Z2 7380

CHARACTERISTICS

Column I Nominal value or setting of the tube

II Range values for equipment design: Initial spread

		I	II	
Heater voltage	V_f	6.3		V
Heater current	I_f	175	160 - 190	mA
Anode voltage	V_a	120		V
Grid No.2 voltage	V_{g2}	120		V
Grid No.1 voltage	$-V_{g1}$	2		V
Anode current	I_a	7.5	5 - 11	mA
Grid No.2 current	I_{g2}	2.5	0.8 - 4.0	mA
Mutual conductance	S	5	3.8 - 6.2	mA/V
Internal resistance	R_i	0.34		$M\Omega$
Negative grid current	$-I_{g1}$		max. 0.1	μA
Anode supply voltage	V_{ba}	120		V
Grid No.2 voltage	V_{g2}	120		V
Anode resistor	R_a	0.1		$M\Omega$
Grid No.1 voltage	$-V_{g1}$	10		V
Anode current	I_a		max. 200	μA
<u>Grid No.1 cut off voltage</u>	$-V_{g1}$	8.5		V
Anode voltage	V_a	120		V
Grid No.2 voltage	V_{g2}	120		V
Anode current	I_a	10		μA
<u>Leakage current between cathode and heater</u>	I_{kf}		max. 10	μA
Voltage between cathode and heater $V_{kf} = 100$ V				
<u>Insulation resistance between two electrodes</u>	R		min. 100	$M\Omega$

CAPACITANCES. With external shield

Grid No.1 to grid No.2, grid No.3
cathode and heater

	I	II	
C_{g_1/g_2g_3kf}	4.0	3.4 - 4.6	pF
C_{a/g_2g_3kf}	2.85	2.45 - 3.25	pF
C_{ag_1}		max. 0.02	pF
$C_{g_1g_2}$	1.4		pF

Anode to grid No.2, grid No.3
cathode and heater

Anode to grid No.1

Grid No.1 to grid No.2

SHOCK AND VIBRATION RESISTANCE

The following test conditions are applied to assess the mechanical quality of the tube. These conditions are not intended to be used as normal operating conditions.

Shock

The tube is subjected 5 times in each of 4 positions to an acceleration of 500 g supplied by an NRL shock machine with the hammer lifted over an angle of 30°

Vibration

The tube is subjected during 32 hours in each of 3 positions to a vibration frequency of 50 Hz with an acceleration of 2.5 g.

LIFE

Production samples are tested to be within the end of life values (column III) during 1000 hours.

LIMITING VALUES (Absolute max. rating system)


Anode voltage	V_{a_0}	max.	600 V
	V_a	max.	200 V
Grid No.2 voltage	$V_{g_{20}}$	max.	600 V
	V_{g_2}	max.	155 V
Grid No.1 voltage	$-V_{g_1}$	max.	50 V
	$+V_{g_1}$	max.	0 V
Anode dissipation	W_a	max.	1.65 W
Grid No.2 dissipation	W_{g_2}	max.	0.55 W
Cathode current	I_k	max.	20 mA
Grid No.1 current	I_{g_1}	max.	1 mA
Grid No.1 resistor	R_{g_1}	max.	0.1 M Ω
Voltage between cathode and heater	V_{kf}	max.	135 V
Bulb temperature	t_{bulb}	max.	165 °C ¹⁾


Heater voltage: The average heater voltage should be 6.3 V.

Variations of the heater voltage exceeding the range of 5.7 V to 7.0 V will shorten the tube life.

The tolerance of heater current (column II) should be taken into account.

¹⁾ Tube life and reliability of performance will be enhanced by operation at lower temperatures.

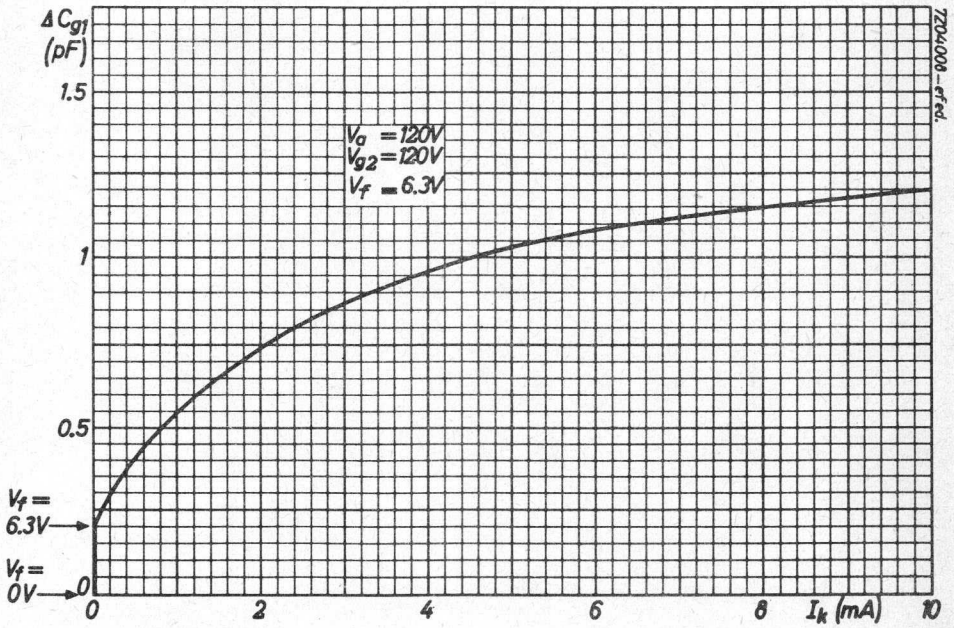

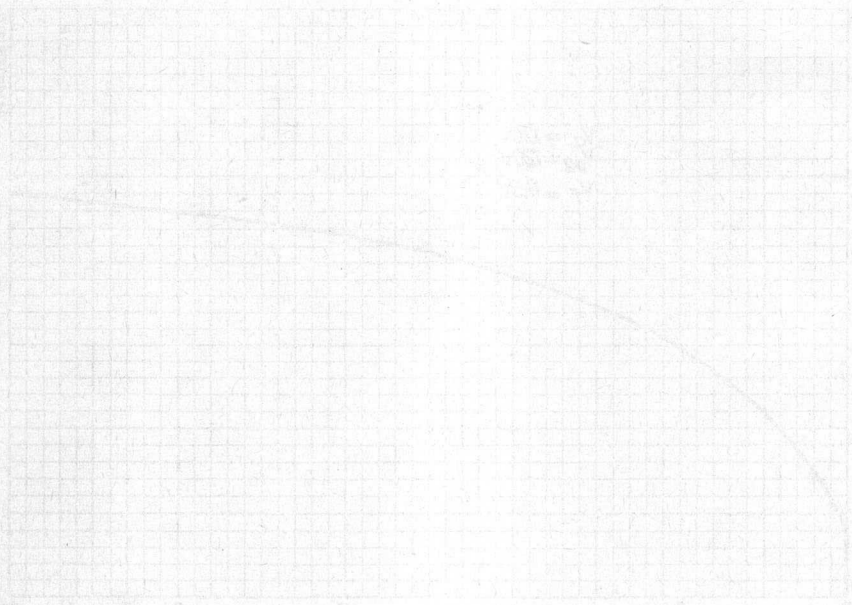

10
9
8
7
6
5
4
3
2
1
0

S.Q. TRIODE

Special quality triode designed for use as R.F. amplifier, oscillator (max. frequency 1000 MHz), and AF amplifier.

QUICK REFERENCE DATA



Life test	500 hours	
Mechanical quality	Shock and vibration resistant	
Base	Subminiature	
Heating	Indirect	
	A.C. or D.C., Parallel supply	
Heater voltage	V_f	6.3 V
Heater current	I_f	150 mA
Anode current	I_a	13 mA
Mutual conductance	S	6.5 mA/V

DIMENSIONS AND CONNECTIONS

Base : Subminiature

Dimensions in mm

Socket: B1 506 81



Connections should not be soldered nearer than 5 mm to the seal.

Leads should not be bent nearer than 1.5 mm to the seal.

On request the tube can also be delivered with shortened leads of 4.7-5.4 mm.

7Z2 7384

CHARACTERISTICS

Column I Nominal value or setting of the tube

II Range values for equipment design: Initial spread

III Range values for equipment design: End of life

		I	II	III	
Heater voltage	V_f	6.3			V
Heater current	I_f	150	138 - 162		mA
Anode voltage	V_a	100			V
Cathode resistor	R_k	150			Ω
Anode current	I_a	8.5	6 - 11		mA
Mutual conductance	S	5.8	4.8 - 6.8	$\Delta S: \text{max. } 20\%$	mA/V
Internal resistance	R_i	4.65			k Ω
Amplification factor	μ	27	23 - 31		-
Anode voltage	V_a	100			V
Negative grid voltage	$-V_g$		max. 7		V
Anode current	I_a	100			μA
<u>Cut off voltage</u>	$-V_g$	7			V
Anode voltage	V_a	100			V
Anode current	I_a	10			μA
Anode voltage	V_a	150			V
Cathode resistor	R_k	180			Ω
Anode current	I_a	13			mA
Mutual conductance	S	6.5			mA/V
Internal resistance	R_i	4.15			k Ω
Amplification factor	μ	27			-
Negative grid current ($R_k = 380\Omega$)	$-I_g$		max. 0.4	max. 0.6	μA
<u>Cut off voltage</u>	$-V_g$	11			V
Anode voltage	V_a	150			V
Anode current	I_a	10			μA

7Z2 7385

CHARACTERISTICS (continued)

	I	II	III	
<u>Leakage current between cathode and heater</u>			max. 10	μA
Voltage between cathode and heater = 100 V				
<u>Insulation between two electrodes</u>	R_{ins}		min. 50	$\text{M}\Omega$

CAPACITANCES

		With external shield		Without shield		
		I		I	II	
Anode to cathode and heater	$C_{a/kf}$	2.4		0.7	0.5 - 0.9	pF
Grid to cathode and heater	$C_{g/kf}$	2.4		2.2	1.6 - 2.8	pF
Anode to grid	C_{ag}	1.3		1.45	1.1 - 1.8	pF

SHOCK AND VIBRATION RESISTANCE

The following test conditions are applied to assess the mechanical quality of the tube. These conditions are not intended to be used as normal operating conditions.

Shock

The tube is subjected 5 times in each of 4 positions to an acceleration of 500 g supplied by an NRL shock machine with the hammer lifted over an angle of 30° .

Vibration

The tube is subjected during 32 hours in each of 3 positions to a vibration frequency of 50 Hz with an acceleration of 2.5 g.

LIFE

Production samples are tested to be within the end of life values (column III) under the following conditions during 500 hours:

Anode voltage	V_a	=	100 V
Cathode resistor	R_k	=	150 Ω
Grid resistor	R_g	=	1 $\text{M}\Omega$
Voltage between cathode and heater (cath. neg.)	V_{kf}	=	200 V

LIMITING VALUES (Absolute max. rating system)

Anode voltage	V_a	max.	165 V
Grid voltage	$-V_g$	max.	55 V
Anode dissipation	W_a	max.	3.3 W
Anode current	I_a	max.	22 mA
Grid current	I_g	max.	5.5 mA
Grid resistor	R_g	max.	1.2 M Ω
Voltage between cathode and heater	V_{kf}	max.	200 V
Bulb temperature ¹⁾	t_{bulb}	max.	250 °C

Heater voltage: The average heater voltage should be 6.3 V.

Variations of the heater voltage exceeding the range of 6.0 V to 6.6 V will shorten the tube life.

The tolerance of heater current (column II) should be taken into account.

OPERATING CHARACTERISTICSAs R.F. amplifier

Anode voltage	V_a	100	150 V
Cathode resistor	R_k	150	180 Ω
Anode current	I_a	8.5	13 mA
Mutual conductance	S	5.8	6.5 mA/V

As oscillator

Anode voltage	V_a	150	V
Anode current	I_a	20	mA
Output power	W_o	0.9	W
Frequency	f	500	MHz

¹⁾ In the interest of optimum life performance it is recommended to reduce the bulb temperature by fixing the bulb directly to the chassis with a metal clamp.
(ZE1100)

OPERATING CHARACTERISTICS (continued)

As A.F. amplifier Fig. 1

Anode supply voltage	V_b	100	200	100	200	100	200	V
Anode resistor	R_a	47	47	100	100	270	270	k Ω
Grid resistor	R_g	270	270	270	270	270	270	k Ω
Grid resistor next stage	$R_{g'}$	100	100	270	270	470	470	k Ω
Cathode resistor	R_k	1.0	0.82	2.2	1.8	8.2	5.6	k Ω
Input voltage	V_i	0.5	1.0	0.5	1.0	0.5	1.0	V_{RMS}
Voltage gain	V_o/V_i	16.4	19.0	16.4	18.6	14.8	16.2	-
Total distortion	d_{tot}	3.9	4.0	3.0	3.2	2.8	3.2	%







Fig. 1

7203739-egah

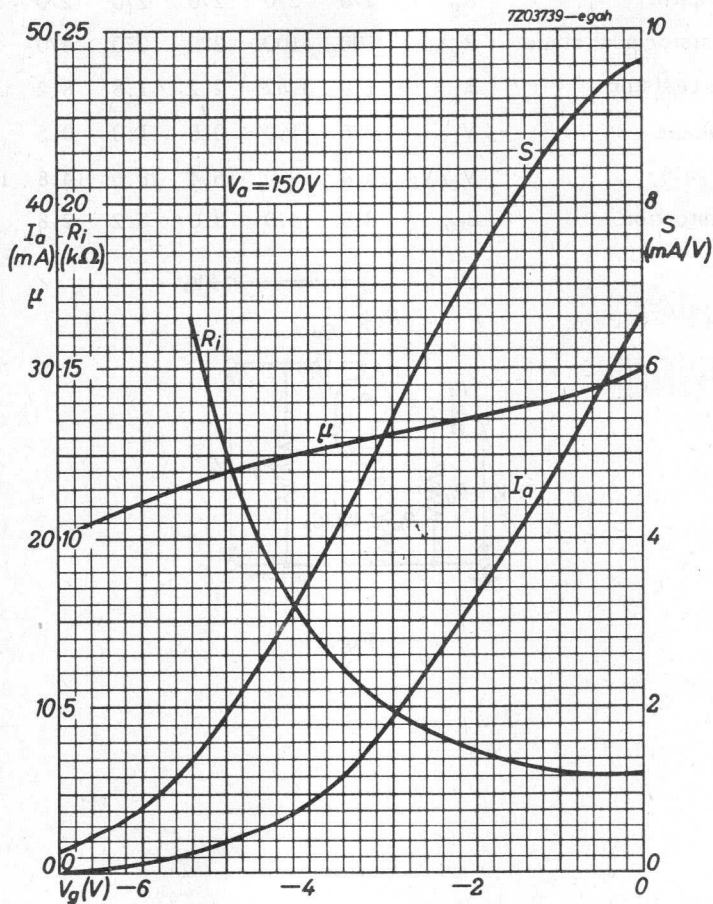

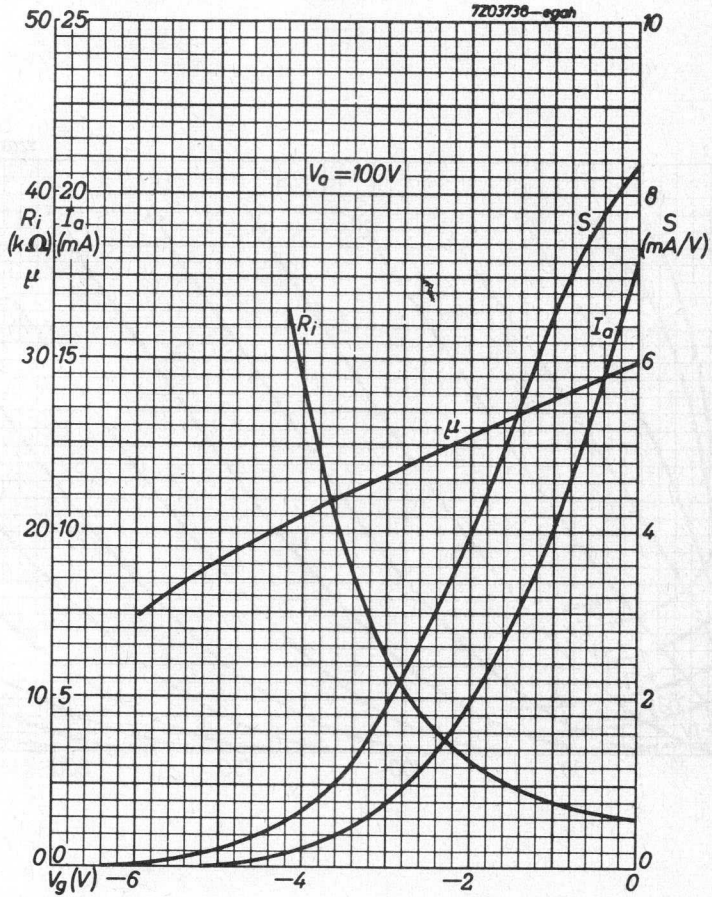

7Z03737-egah

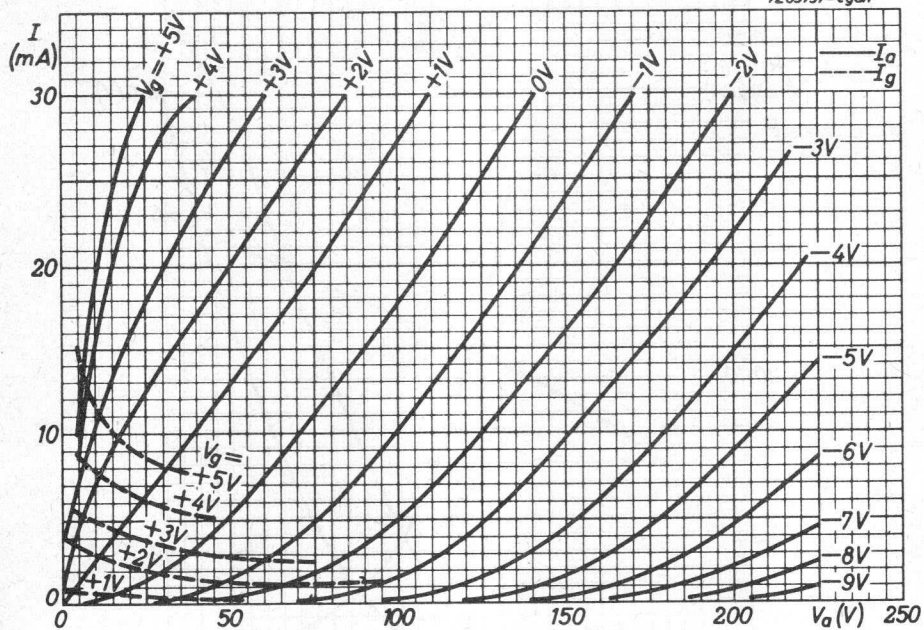

S.Q. TUBE

Special quality triode designed for use as A.F. amplifier



QUICK REFERENCE DATA

Life test	1000 hours	
Mechanical quality	Shock and vibration resistant	
Base	Subminiature	
Heating	Indirect A.C. or D.C.; parallel supply	
Heater voltage	V_f	6.3 V
Heater current	I_f	150 mA
Mutual conductance	S	2.3 mA/V
Amplification factor	μ	70

DIMENSIONS AND CONNECTIONS

Dimensions in mm

Base: Subminiature



Leads should not be soldered nearer than 5 mm to the seal.
Leads should not be bent nearer than 2 mm to the seal.

7Z2 6063

CHARACTERISTICS

Column I Nominal value or setting of the tube

II Range values for equipment design: Initial spread

III Range values for equipment design: End of life

		I	II	III	
Heater voltage	V_f	6.3			V
Heater current	I_f	150	140 - 160		mA
Anode supply voltage	V_{ba}	100			V
Cathode resistor	R_k	1500			Ω
Anode current	I_a	0.73	0.5 - 0.9		mA
Mutual conductance	S	1.7	1.4 - 2.0	min. 1.1	mA/V
Internal resistance	R_i	41			k Ω
Amplification factor	μ	70	60 - 80		
<u>Cut-off voltage</u>	$-V_g$	2.5			V
Anode current	I_a		max. 50		μ A
Grid voltage	$-V_g$	1.8			V
Anode current	I_a		min. 5		μ A
<u>Negative grid current</u>	$-I_g$		max. 0.3	max. 0.6	μ A
Anode supply voltage					
$V_{ba} = 150$ V					
Cathode resistor $R_k = 2700$ Ω					
Anode supply voltage	V_{ba}	150			V
Cathode resistor	R_k	680			Ω
Anode current	I_a	1.85			mA
Mutual conductance	S	2.3			mA/V
Amplification factor	μ	70			
Internal resistance	R_i	30.5			k Ω
<u>Leakage current between cathode and heater</u>	I_{kf}		max. 5		μ A
Voltage between cathode and heater $V_{kf} = 100$ V					

CHARACTERISTICS (continued)Insulation resistance
between electrodes

	I	II	III	
R_{ins}		min. 100	min. 25	M Ω
<hr/>				
V_o		max. 25		mV

Voltage between electrodes
= 100 V

Vibrational noise output

Anode supply voltage $V_{ba} = 100$ V

Anode resistor $R_a = 10$ k Ω

Cathode by-pass capacitor $C_k = 1000$ pF

Vibration frequency = 40 Hz

Acceleration = 15 g

CAPACITANCES

Anode to cathode and heater

	I	II	
$C_{a/kf}$	0.6	0.4 - 0.8	pF
$C_{g/kf}$	1.7	1.2 - 2.2	pF
C_{ag}	0.8	0.6 - 1.0	pF

Grid to cathode and heater

Anode to grid

SHOCK AND VIBRATION RESISTANCE

The following test conditions are applied to assess the mechanical quality of the tube. These conditions are not intended to be used as normal operating conditions.

Shock

The tube is subjected 5 times in each of 4 positions to an acceleration of 500 g supplied by an NRL shock machine with the hammer lifted over an angle of 30°.

Vibration

The tube is subjected during 32 hours in each of 3 positions to a vibration frequency of 50 Hz with an acceleration of 2.5 g.

LIFE

Production samples are tested to be within the end of life values (column III) under the following conditions during 1000 hours.

Anode supply voltage	V_{ba}	150 V
Cathode resistor	R_k	680 Ω
Grid resistor	R_g	1 M Ω
Voltage between cathode and heater (k pos)	V_{kf}	200 V

LIMITING VALUES (Absolute max. rating system)

Anode voltage	V_{a0}	max. 330 V
	V_a	max. 165 V
Grid voltage	$-V_g$	max. 55 V
	$+V_g$	max. 0 V
Anode dissipation	W_a	max. 0.55 W
Anode current	I_a	max. 3.3 mA
Peak voltage between cathode and heater	V_{kfp}	max. 200 V
Bulb temperature	t_{bulb}	max. 220 $^{\circ}\text{C}$
Heater voltage	V_f	min. 6.0 V
		max. 6.6 V


OPERATING CHARACTERISTICS


Anode supply voltage	V_{ba}	100	100	100	100	100	100	V
Cathode resistor	R_k	2.7	2.7	5.6	6.8	10	10	k Ω
Anode resistor	R_a	0.1	0.1	0.27	0.27	0.47	0.47	M Ω
Grid resistor	R_g	1.0	1.0	1.0	1.0	1.0	1.0	M Ω
Grid resistor next stage	R_g'	0.27	0.47	0.47	1.0	0.47	1.0	M Ω
Voltage gain	V_o/V_i	37	39	41	42	40	43	
Total distortion	d_{tot}	2.4	2.1	2.1	1.8	2.4	1.7	%

OPERATING CHARACTERISTICS

Anode supply voltage	V_{ba}	200	200	200	200	200	200	V
Cathode resistor	R_k	1.5	1.8	3.3	3.9	5.6	6.8	k Ω
Anode resistor	R_a	0.1	0.1	0.27	0.27	0.47	0.47	M Ω
Grid resistor	R_g	1.0	1.0	1.0	1.0	1.0	1.0	M Ω
Grid resistor next stage	$R_{g'}$	0.27	0.47	0.47	1.0	0.47	1.0	M Ω
Voltage gain	V_o/V_i	44	46	49	50	48	50	
Total distortion	d_{tot}	0.7	0.7	0.9	0.7	0.9	0.7	%

7204026-egai.

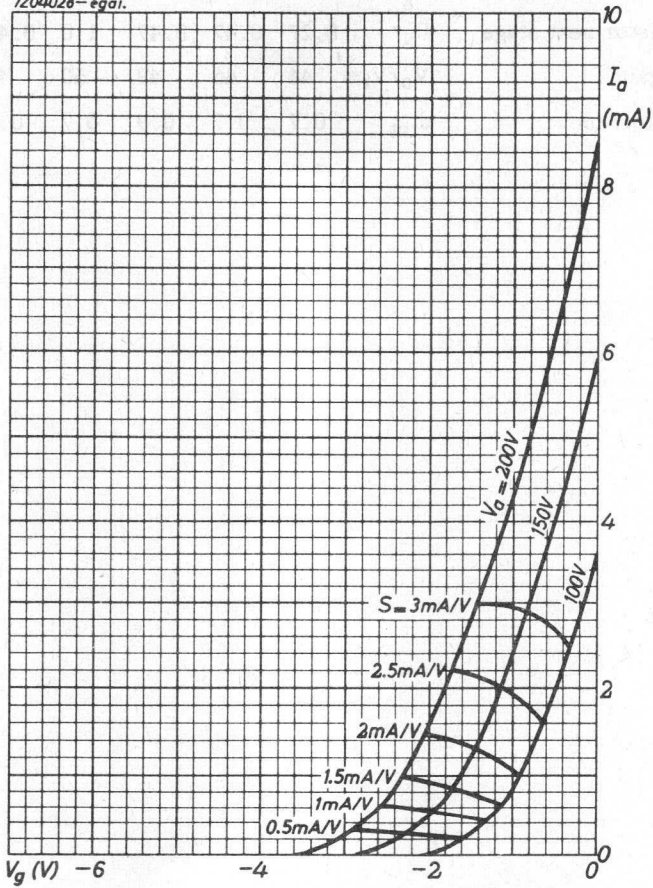

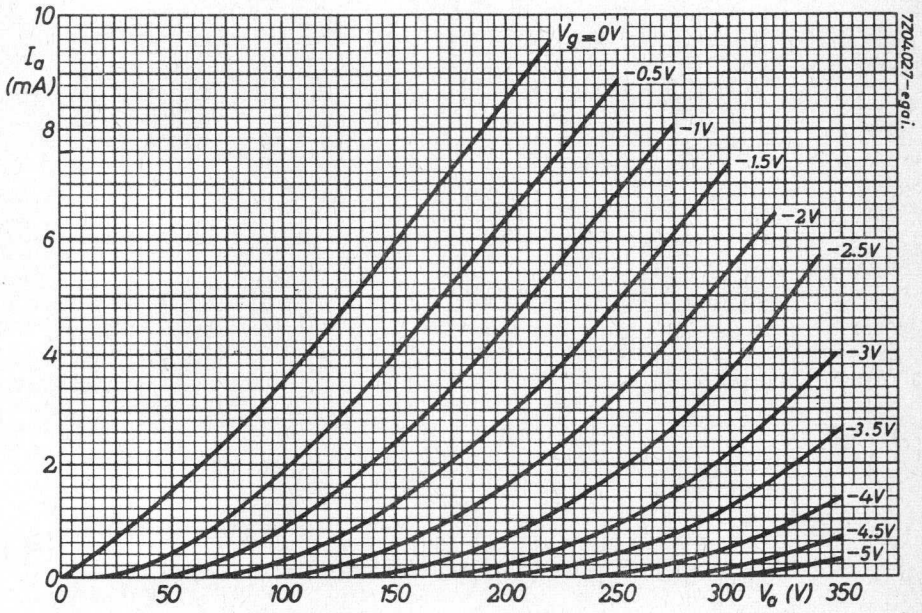



S.Q. TUBE

Special quality pentode designed for use as R.F. amplifier.



QUICK REFERENCE DATA

Life test	1000 hours	
Mechanical quality	Shock and vibration resistant	
Base	Miniature 7 pin	
Heating	Indirect	
	A.C. or D.C.; parallel supply	
Heater voltage	V_f	6.3 V
Heater current	I_f	175 mA
Sharp cut-off		
Double control		

DIMENSIONS AND CONNECTIONS

Dimensions in mm

Base: Miniature 7 pin



722 6304

CHARACTERISTICS

Column I Nominal value or setting of the tube

II Range values for equipment design: Initial spread

III Range values for equipment design: End of life

		I	II	III	
Heater voltage	V_f	6.3			V
Heater current	I_f	175	160 - 190		mA
Anode voltage	V_a	120			V
Grid No.2 voltage	V_{g2}	120			V
Grid No.3 voltage	V_{g3}	0			V
Grid No.1 voltage	$-V_{g1}$	2			V
Anode current	I_a	5.2	2.5 - 9,0		mA
Grid No.2 current	I_{g2}	3.5	max.5.5		mA
Mutual conductance, grid No.1	S_{g1}	3.2	2.5 - 4.5	ΔS max.20%	mA/V
Mutual conductance, grid No.3	S_{g3}	0.47			mA/V
Internal resistance	R_i	150			k Ω
Negative grid No.1 current	$-I_{g1}$		max.0.1	max.0.2	μA
Anode voltage	V_a	120			V
Grid No.2 voltage	V_{g2}	120			V
Grid No.3 voltage	$-V_{g3}$	3			V
Grid No.1 voltage	$-V_{g1}$	2			V
Anode current	I_a	3.6			mA
Grid No.2 current	I_{g2}	4.8			mA
Mutual conductance, grid No.1	S_{g1}	1.85			mA/V
Mutual conductance, grid No.3	S_{g3}	0.7			mA/V
Anode voltage	V_a	120			V
Grid No.2 voltage	V_{g2}	120			V
Grid No.3 voltage	$-V_{g3}$	5			V
Grid No.1 voltage	$-V_{g1}$	2			V
Mutual conductance, grid No.3	S_{g3}	1.2	0.7 - 1.7		mA/V

7Z2 7392

CHARACTERISTICS (continued)

		I	II	III	
<u>Cut-off voltage</u>	$-V_{g1}$	8			V
Anode voltage	V_a	120			V
Grid No.2 voltage	V_{g2}	120			V
Grid No.3 voltage	V_{g3}	0			V
Anode current	I_a		max. 50		μA
<u>Cut-off voltage</u>	$-V_{g1}$	6			V
Anode voltage	V_a	120			V
Grid No.2 voltage	V_{g2}	120			V
Grid No.3 voltage	V_{g3}	0			V
Anode current	I_a		min. 5		μA
<u>Cut-off voltage</u>	$-V_{g1}$	3			V
	$-V_{g3}$	5.5			V
Anode voltage	V_a	120			V
Grid No.2 voltage	V_{g2}	120			V
Anode current	I_a		min. 5		μA
<u>Cut-off voltage</u>	$-V_{g1}$	3			V
	$-V_{g3}$	10			V
Anode voltage	V_a	120			V
Grid No.2 voltage	V_{g2}	120			V
Anode current	I_a		max. 50		μA
<u>Cut-off voltage</u>	$-V_{g1}$	2			V
	$-V_{g2}$	15			V
Anode voltage	V_a	120			V
Grid No.2 voltage	V_{g2}	120			V
Anode current	I_a	10			μA
<u>Leakage current between cathode and heater</u>	I_{kf}		max. 10	max. 10	μA
Voltage between cathode and heater $V_{kf} = 100$ V					
Cathode negative					

7Z2 7393


LIFE


Production samples are tested to be within the end of life values (column III) during 1000 hours.

LIMITING VALUES (Absolute max. rating system)


Anode voltage	V_a	max.	200	V
Grid No.2 voltage	V_{g_2}	max.	155	V
Grid No.3 voltage	V_{g_3}	max.	30	V
Anode dissipation	W_a	max.	1.85	W
Grid No.2 dissipation	W_{g_2}	max.	0.85	W
Cathode current	I_k	max.	20	mA
Voltage between cathode and heater	V_{kf}	max.	100	V
Grid resistor with fixed bias	R_{g_1}	max.	1	$M\Omega$
Bulb temperature	t_{bulb}	max.	165	$^{\circ}C$


7Z04704 - e.g.be

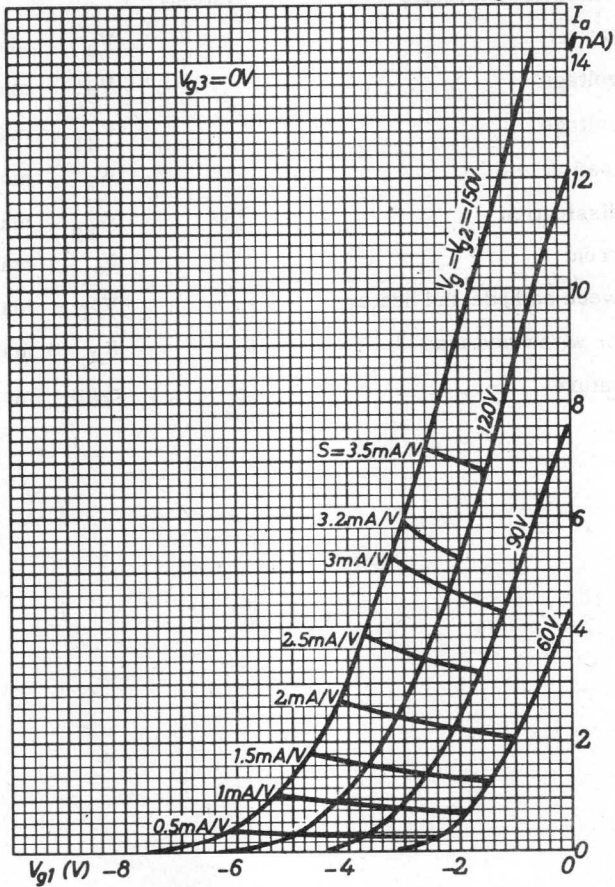

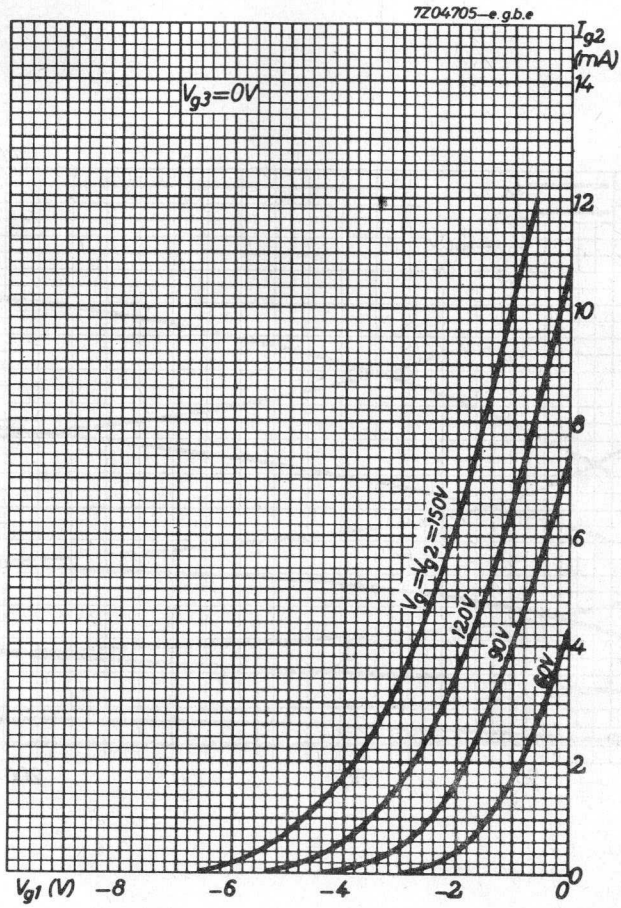


7204-706-e.g.b.e

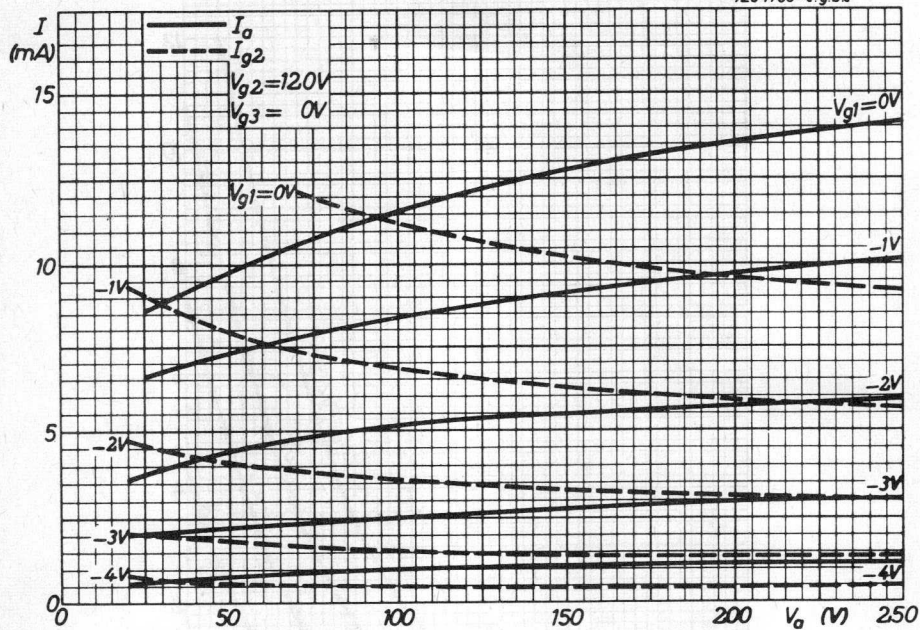

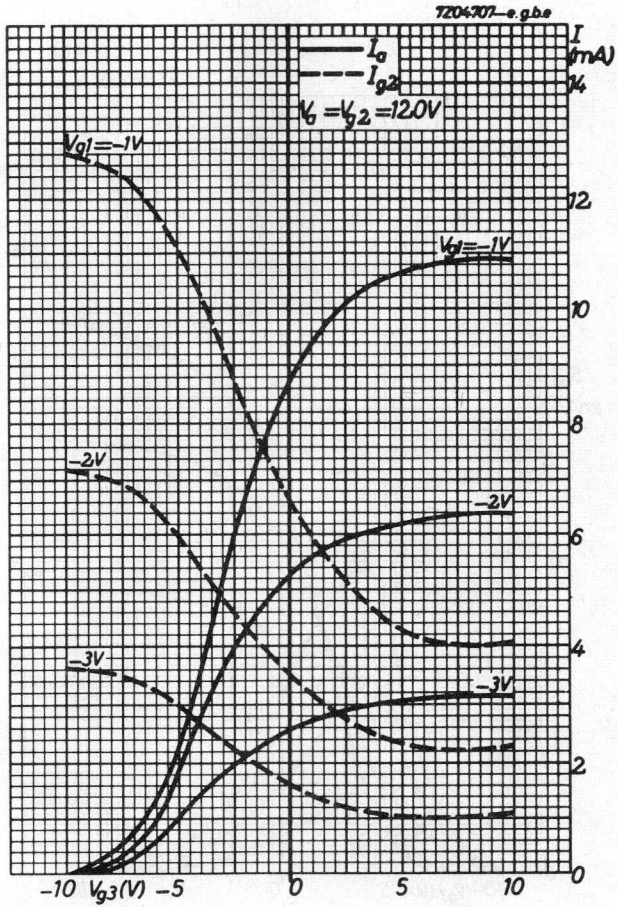

7204.700-e.g.b.e

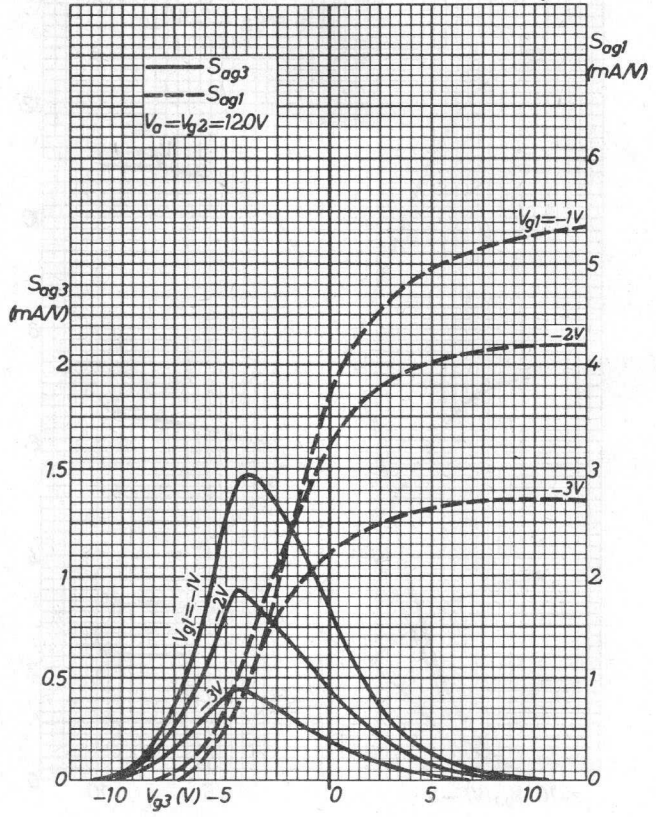

S.Q. DOUBLE DIODE

Special quality double diode designed for use as detector or low-current power rectifier.



QUICK REFERENCE DATA

Life test	1000 hours	
Mechanical quality	Shock and vibration resistant	
Base	Miniature 7 pin	
Heating	Indirect	
	A.C. or D.C.	
	Series or parallel supply	
Heater voltage	V_f	6.3 V
Heater current	I_f	300 mA
Diode current	I_d	10 mA
Inverse peak voltage	V_{invp}	360 V

DIMENSIONS AND CONNECTIONS

Base: Miniature 7 pin

Dimensions in mm



7Z2 7396

CHARACTERISTICS (both systems if applicable)

Column I Nominal value or setting of the tube

II Range values for equipment design: Initial spread

		I	II	
Heater voltage	V_f	6.3		V
Heater current	I_f	300	275 - 325	mA
<u>Diode current</u>	I_d		min. 40	mA
Diode voltage	V_d	10		V
<u>Diode current</u>	I_{do}		2 - 20	μ A
Diode voltage	V_d	0		V
Series resistor	R	40		k Ω
<u>Difference in diode current</u>	$ I_d - I_d' $		max. 5	μ A
Diode voltage	V_d	0		V
Series resistor	R	40		k Ω
<u>Leakage current between cathode and heater</u>	I_{kf}		max. 10	μ A
Voltage between cathode and heater $V_{kf} = 100$ V				
<u>Insulation resistance between two electrodes</u>	R_{ins}		min. 100	M Ω
Voltage between electrodes = 300 V				
<u>Resonant frequency</u>		700		MHz
CAPACITANCES				
Diode to cathode heater and screen	C_d/kfs	3.2	2.4 - 4	pF
Cathode to diode heater and screen	C_k/dfs	3.9	3.1 - 4.7	pF
Diode No.1 to diode No.2	C_{d1d2}		max.0.026	pF

SHOCK AND VIBRATION RESISTANCE

The following test conditions are applied to assess the mechanical quality of the tube. These conditions are not intended to be used as normal operating conditions.

7Z2 7397

Shock

The tube is subjected 5 times in each of 4 positions to an acceleration of 700 g supplied by an NRL shock machine with the hammer lifted over an angle of 45°.

Vibration

The tube is subjected during 32 hours in each of 3 positions to a vibration frequency of 50 Hz with an acceleration of 2.5 g.

LIFE

Production samples are tested during 1000 hours.

LIMITING VALUES (Absolute max. rating system) (Per system if applicable)

Inverse peak voltage	V_{invp}	max.	360 V
Diode current	I_d	max.	10 mA
Diode peak current	I_{dp}	max.	60 mA
Peak voltage between cathode and heater	V_{kfp}	max.	360 V
Bulb temperature	t_{bulb}	max.	165 °C

Heater voltage: The average heater voltage should be 6.3 V.

Variations of the heater voltage exceeding the range of 5.7 V to 7.0 V will shorten the tube life.


OPERATING CHARACTERISTICSAs full wave power rectifier


A.C. supply voltage	V_{tr}	2 x 165	V_{RMS}
Capacitance	C	8	μF
Series resistor per diode	R_s	300	Ω
Load resistor	R_l	11	$k\Omega$
D.C. current	I_o	min. 16	mA


As half wave rectifier (per system)

A.C. supply voltage	V_{tr}	117	V_{RMS}
Capacitance	C	8	μF
Series resistor	R_s	300	Ω
D.C. current	I_o	9	mA

7Z2 7398

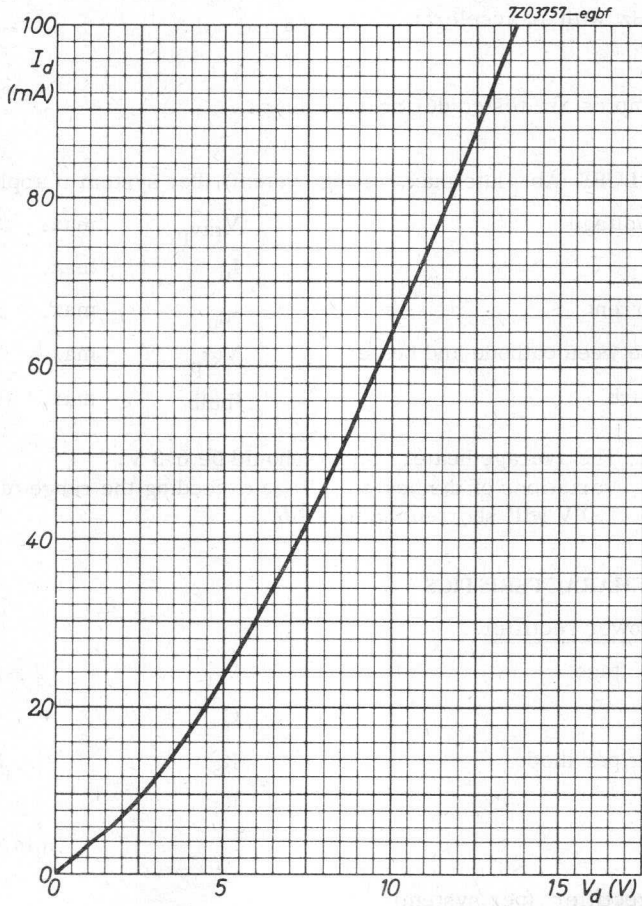

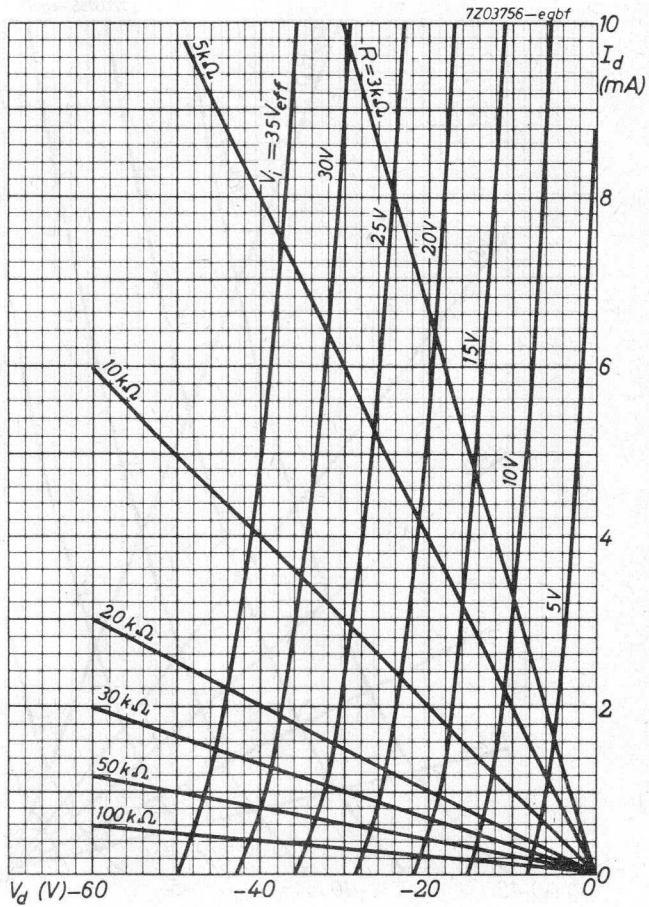

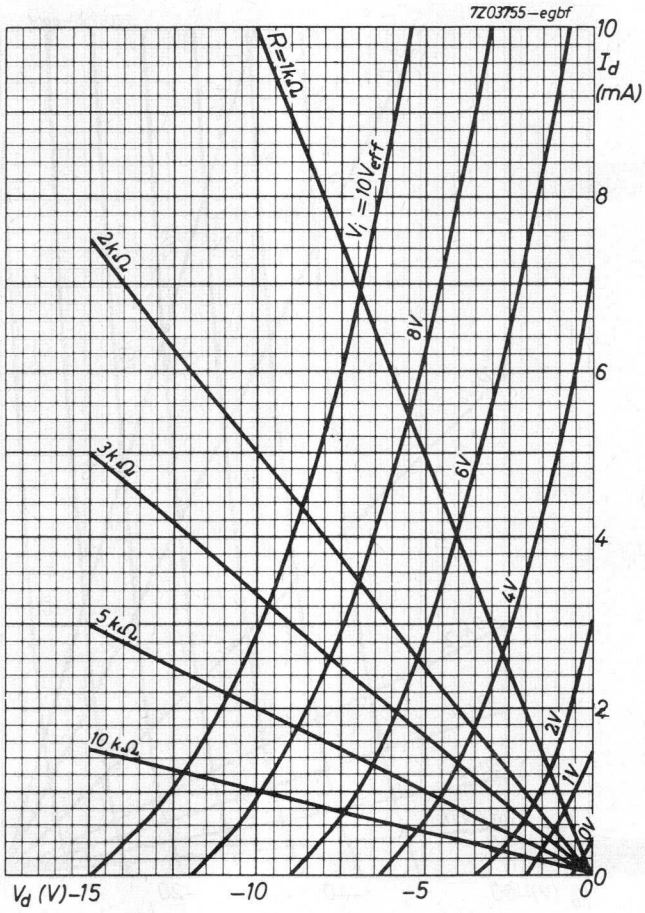

S.Q. TUBE

Special quality pentode designed for use A.F. and R.F. amplifier (max. frequency 400 MHz)


QUICK REFERENCE DATA

Life test	1000 hours	
Mechanical quality	Shock and vibration resistant	
Base	Subminiature	
Heating	Indirect A. C. or D. C.; parallel supply	
Heater voltage	V_f	6.3 V
Heater current	I_f	150 mA
Mutual conductance	S	5 mA/V
Anode current	I_a	7.5 mA

DIMENSIONS AND CONNECTIONS

Dimensions in mm

Base: Subminiature

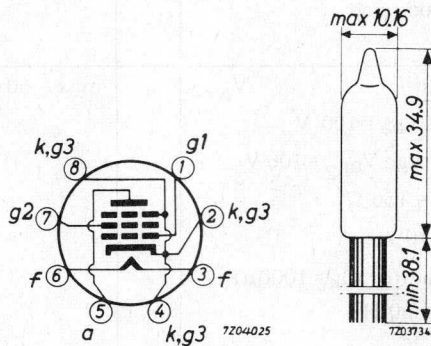

Leads should not be soldered nearer than 5 mm to the seal

Leads should not be bent nearer than 2 mm to the seal.

7Z2 7443

CHARACTERISTICS

Column I Nominal value or setting of the tube

II Range values for equipment design: Initial spread

III Range values for equipment design: End of life

		I	II	III	
Heater voltage	V_f	6.3			V
Heater current	I_f	150	140 - 160		mA
Anode supply voltage	V_{ba}	100			V
Grid No.2 supply voltage	V_{bg2}	100			V
Cathode resistor	R_k	150			Ω
Anode current	I_a	7.5	5.5 - 9.5		mA
Grid No.2 current	I_{g2}	2.4	1.5 - 3.3		mA
Mutual conductance	S	5	4.2 - 5.8	min. 3.5	mA/V
Internal resistance	R_i	260	min. 175		k Ω
Negative grid No.1 current	$-I_{g1}$		max. 0.3	max. 0.8	μ A
<u>Cut-off voltage</u>	$-V_{g1}$	9			V
Anode voltage	V_a	100			V
Grid No.2 voltage	V_{g2}	100			V
Anode current	I_a	10	max. 50		μ A
<u>Leakage current between cathode and heater</u>	I_{kf}		max. 5	max. 10	μ A
Voltage between cathode and heater $V_{kf} = 100$ V					
<u>Vibrational noise output</u>	V_o		max. 60		mV _{RMS}
Anode supply voltage $V_{ba} = 100$ V					
Grid No.2 supply voltage $V_{bg2} = 100$ V					
Cathode resistor $R_k = 150 \Omega$					
Anode resistor $R_a = 10$ k Ω					
Cathode by-pass capacitor $C_k = 1000 \mu$ F					
Vibration frequency = 50 Hz					
Acceleration = 15 g					
Insulation resistance					
a to all at V = 300 V	R_{ins}		min. 100		M Ω
g ₁ to all at V = 100 V	R_{ins}		min. 100		M Ω

7Z2 7444

CAPACITANCES

		With external screen		Without external shield		
		I	II	I	II	
Anode to grid No.2, cathode, heater and screen	C_{a/g_2kfs}	3.4	2.9-3.9	1.9		pF
Grid No.1 to grid No.2, cathode, heater and screen	C_{g_1/g_2kfs}	4.2	3.5-4.9	4.0		pF
Anode to grid No.1	C_{ag_1}		max. 15		max. 30	mpF

SHOCK AND VIBRATION RESISTANCE

The following test conditions are applied to assess the mechanical quality of the tube. These conditions are not intended to be used as normal operating conditions.

Shock

The tube is subjected 5 times in each of 4 positions to an acceleration of 500 g supplied by an NRL shock machine with the hammer lifted over an angle of 30°.

Vibration

The tube is subjected during 32 hours in each of 3 positions to a vibration frequency of 50 Hz with an acceleration of 2.5 g.

LIFE

Production samples are tested to be within the end of life values (column III) under the following conditions during 1000 hours.

Anode supply voltage	V_{ba}	100 V
Grid No.2 supply voltage	V_{bg_2}	100 V
Cathode resistor	R_k	150 Ω

LIMITING VALUES (Absolute max. rating system)

Anode voltage	V_{a_0}	max. 330 V
	V_a	max. 165 V
Grid No.2 voltage	$V_{g_2_0}$	max. 330 V
	V_{g_2}	max. 155 V
Anode dissipation	W_a	max. 1.1 W
Grid No.2 dissipation	W_{g_2}	max. 0.55 W

7Z2 7445

LIMITING VALUES (continued)

Cathode current	I_k	max. 16.5 mA
Grid No.1 voltage	$-V_{g1}$	max. 55 V
Voltage between cathode and heater	V_{kf}	max. 200 V
Grid No.1 resistor	R_{g1}	max. 1.1 M Ω
Bulb temperature	t_{bulb}	max. 220 $^{\circ}C$

OPERATING CHARACTERISTICS Fig. 1

Supply voltage	V	100	150	100	150	100	150	V
Anode resistor	R_a	100	100	270	270	470	470	k Ω
Grid No.2 resistor	R_{g2}	0.22	0.27	0.68	0.82	1.2	1.5	k Ω
Grid No.1 resistor	R_{g1}	0.27	0.27	0.47	0.47	1.0	1.0	M Ω
Total distortion ($V_i = 0.1 V_{RMS}$)	d_{tot}	2.8	1.5	2.5	2.4	2.3	3.0	%
Voltage gain ($V_i = 0.1 V_{RMS}$)	V_o/V_i	82	115	95	132	117	167	
Total distortion ($H_{g1} = 0.3 \mu A$)	d_{tot}	4.9	4.8	4.7	4.9	5.0	4.8	%
Voltage gain ($H_{g1} = 0.3 \mu A$)	V_o/V_i	77	109	91	128	114	159	
Input voltage ($H_{g1} = 0.3 \mu A$)	V_i	0.23	0.2	0.15	0.16	0.14	0.14	V_{RMS}



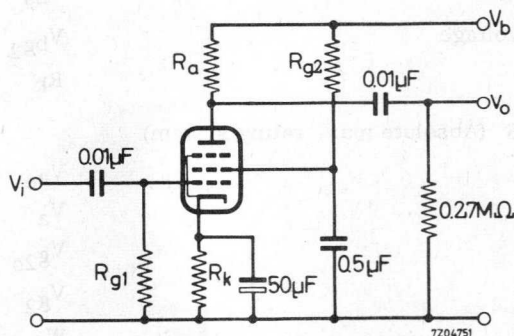


Fig. 1

7Z2 7446

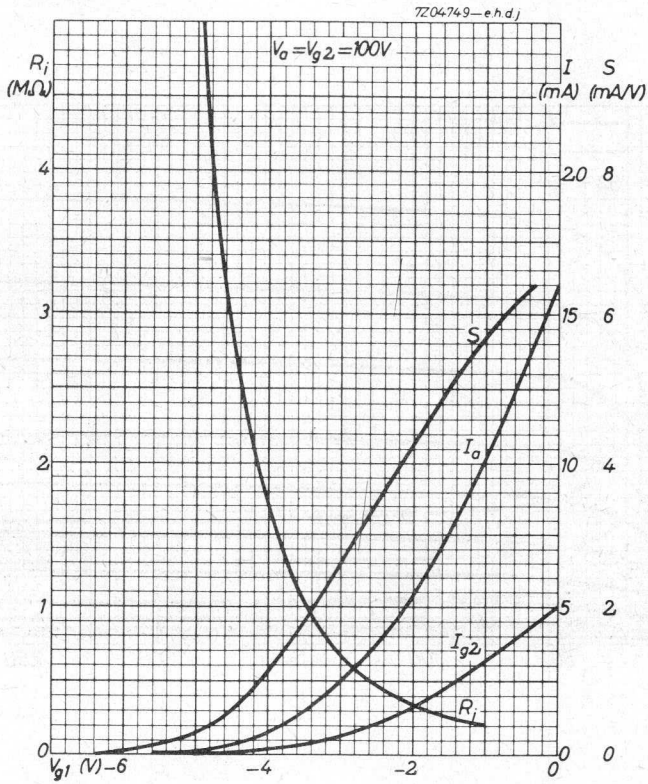

7204750-e.h.d.j

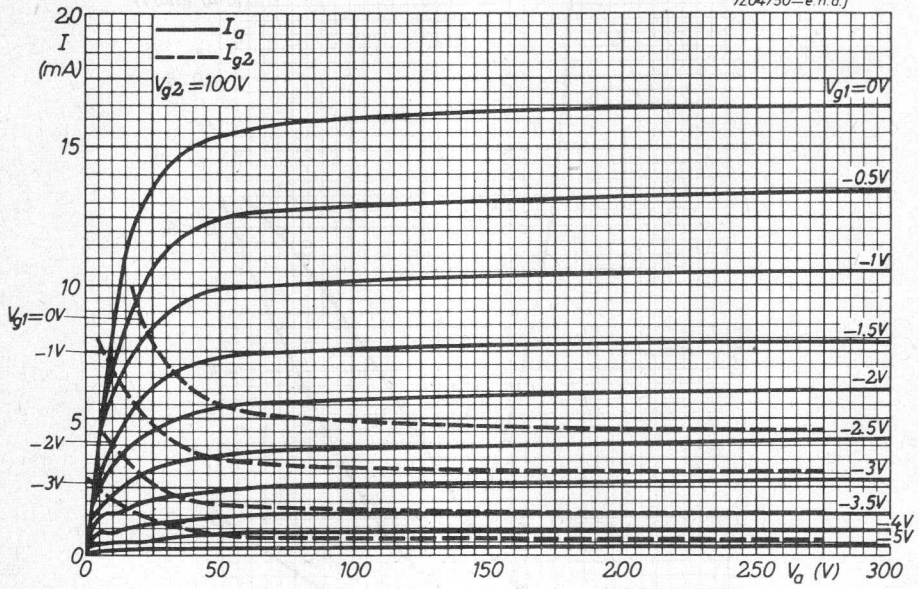

S.Q. TUBE

Special quality triode designed for use as grounded grid H.F. and I.F. wide band amplifier.


QUICK REFERENCE DATA

Life test	1000 hours	
Low interface resistance		
Mechanical quality	Shock and vibration resistant	
Base	Noval	
Heating	Indirect A.C. or D.C.; Parallel supply	
Heater voltage	V_f	6.3 V
Heater current	I_f	300 mA
Anode current	I_a	26 mA
Transconductance	S	24 mA/V

DIMENSIONS AND CONNECTIONS

Dimensions in mm

Base: Noval

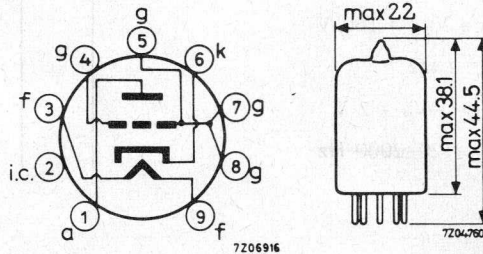

7Z2 7399

CHARACTERISTICS

Column I Nominal value or setting of the tube

II Range values for equipment design: Initial spread

		I	II	
Heater voltage	V_f	6.3		V
Heater current	I_f	300	280 - 320	mA
Anode supply voltage	V_a	150		V
Cathode resistor	R_k	60		Ω
Anode current	I_a	26	19 - 33	mA
Mutual conductance	S	24	19 - 29	mA/V
Amplification factor	μ	50		
Negative grid current	$-I_g$		max. 0.2	μ A
Cut-off voltage	$-V_g$	10		V
Anode current $I_a = \text{max. } 100 \mu\text{A}$				
<u>Leakage current between cathode and heater</u>	I_{kf}		max. 15	μ A
Voltage between cathode and heater $V_{kf}(\text{cath. pos.}) = 100 \text{ V}$				
<u>Insulation resistance between electrodes</u>	R_{ins}		min. 100	$M\Omega$
Voltage between electrodes = 300 V				
<u>Vibrational noise output</u>	V_o		max. 100	mV
Anode supply voltage $V_{ba} = 150 \text{ V}$				
Anode resistor $R_a = 2 \text{ k}\Omega$				
Negative grid voltage $-V_g = 2 \text{ V}$				
Vibration frequency = 20-2000 Hz				
Acceleration = 4 g				

CAPACITANCES

Anode to cathode and heater
 Cathode to grid and heater
 Anode to grid and heater

	I	II	
$C_{a/kf}$		max. 0.55	pF
$C_{k/gf}$	9.0	8 - 10	pF
$C_{a/gf}$	1.8	1.5 - 1.95	pF

SHOCK AND VIBRATION RESISTANCE

The following test conditions are applied to assess the mechanical quality of the tube. These conditions are not intended to be used as normal operating conditions.

Shock

The tube is subjected 5 times in each of 4 positions to an acceleration of 500 g supplied by an NRL shock machine with the hammer lifted over an angle of 30°.

Vibration

The tube is subjected during 32 hours in each of 3 positions to a vibration frequency of 50 Hz with an acceleration of 2.5 g.

LIFE

Production samples are tested during 1000 hours.

LIMITING VALUES Absolute maximum rating system

Anode voltage	V_{a0}	max. 400 V
	V_a	max. 200 V
Anode dissipation	W_a	max. 4.5 W
Grid voltage	$-V_g$	max. 50 V
Grid peak voltage	$-V_{gp}$	max. 100 V
Cathode current	I_k	max. 38 mA
Voltage between cathode and heater	V_{kf}	max. 60 V
Bulb temperature	t_{bulb}	max. 160 °C
Grid resistor: fixed bias	R_g	max. 0.15 MΩ
	R_g	max. 0.3 MΩ

Heater voltage: The average heater voltage should be 6.3 V.

Variations of the heater voltage exceeding the range of 6.0 to 6.6 V will shorten the tube life.

The tolerance of heater current (column II) should be taken into account.

7Z2 7401

S.Q. TUBE

Special quality pentode designed for use as controlled R.F. or I.F. amplifier (max. freq. 400 MHz).


QUICK REFERENCE DATA

Life test	1000 hours	
Mechanical quality	Shock and vibration resistant	
Base	Subminiature	
Heating	Indirect A.C. or D.C.; parallel supply	
Heater voltage	V_f	6.3 V
Heater current	I_f	150 mA
Anode current	I_a	7.2 mA
Mutual conductance	S	4.5 mA/V

DIMENSIONS AND CONNECTIONS

Dimensions in mm

Base: Subminiature

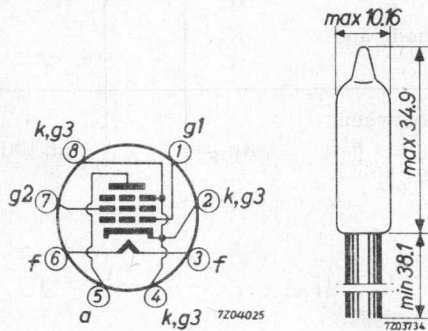

Leads should not be soldered nearer than 5 mm to the seal
Leads should not be bent nearer than 2 mm to the seal

7Z2 7402

CHARACTERISTICS

Column I Nominal value or setting of the tube

II Range values for equipment design: Initial spread

III Range values for equipment design: End of life

		I	II	III	
Heater voltage	V_f	6.3			V
Heater current	I_f	150	140-160		mA
Anode voltage	V_a	100			V
Grid No.2 voltage	V_{g2}	100			V
Cathode resistor	R_k	120			Ω
Anode current	I_a	7.2	5.2-9.2		mA
Grid No.2 current	I_{g2}	2.0	1.0-3.0		mA
Mutual conductance	S	4.5	3.8-5.2	ΔS max. 25%	mA/V
Internal resistance	R_i	260	min.175		k Ω
Negative grid No.1 current	$-I_{g1}$		max.0.3	max. 0.8	μA
Mutual conductance	S	25	1- 75		$\mu A/V$
Grid No.1 voltage	$-V_{g1}$	14			V
<u>Leakage current between cathode and heater</u>	I_{kf}		max. 5	max. 10	μA
Voltage between cathode and heater $V_{kf} = 100$ V					
Insulation resistance between electrodes	R_{ins}		min.100		M Ω

CHARACTERISTICS (continued)

		I	II	
<u>Vibrational noise output</u>	V_o		max. 60	mV_{RMS}
Anode supply voltage				
$V_{ba} = 100 \text{ V}$				
Grid No.2 supply voltage				
$V_{bg_2} = 100 \text{ V}$				
Cathode resistor $R_k = 120 \Omega$				
Anode resistor $R_a = 10 \text{ k}\Omega$				
Grid No.1 resistor $R_{g_1} = 1 \text{ M}\Omega$				
Cathode bypass capacitor				
$C_k = 1000 \mu\text{F}$				
Vibration frequency = 50 Hz				
Acceleration = 15 g				
CAPACITANCES With external shield				
Anode to grid No.2, cathode heater and screen	C_{a/g_2} kfs	3.4	2.9 - 3.9	pF
Grid No.1 to grid No.2, cathode heater and screen	C_{g_1/g_2} kfs	4.2	3.8 - 4.8	pF
Anode to grid No.1	C_{ag_1}		max. 15	mpF

SHOCK AND VIBRATION RESISTANCE

The following test conditions are applied to assess the mechanical quality of the tube. These conditions are not intended to be used as normal operating conditions.

Shock

The tube is subjected 5 times in each of 4 positions to an acceleration of 500 g supplied by an NRL shock machine with the hammer lifted over an angle of 30° .

Vibration

The tube is subjected during 32 hours in each of 3 positions to a vibration frequency of 50 Hz with an acceleration of 2.5 g.


LIFE


Production samples are tested to be within the end of life values (column III) under the following conditions during 1000 hours.

Anode voltage	V_a	100	V
Grid No.2 voltage	V_{g2}	100	V
Cathode resistor	R_k	120	Ω

LIMITING VALUES (Absolute max. rating system)

Anode voltage	V_a	max.	165	V
Grid No.2 voltage	V_{g2}	max.	155	V
Anode dissipation	W_a	max.	1.1	W
Grid No.2 dissipation	W_{g2}	max.	0.55	W
Cathode current	I_k	max.	16.5	mA
Voltage between cathode and heater	V_{kf}	max.	200	V
Grid No.1 resistor	R_{g1}	max.	1.2	$M\Omega$
Bulb temperature	t_{bulb}	max.	220	$^{\circ}C$

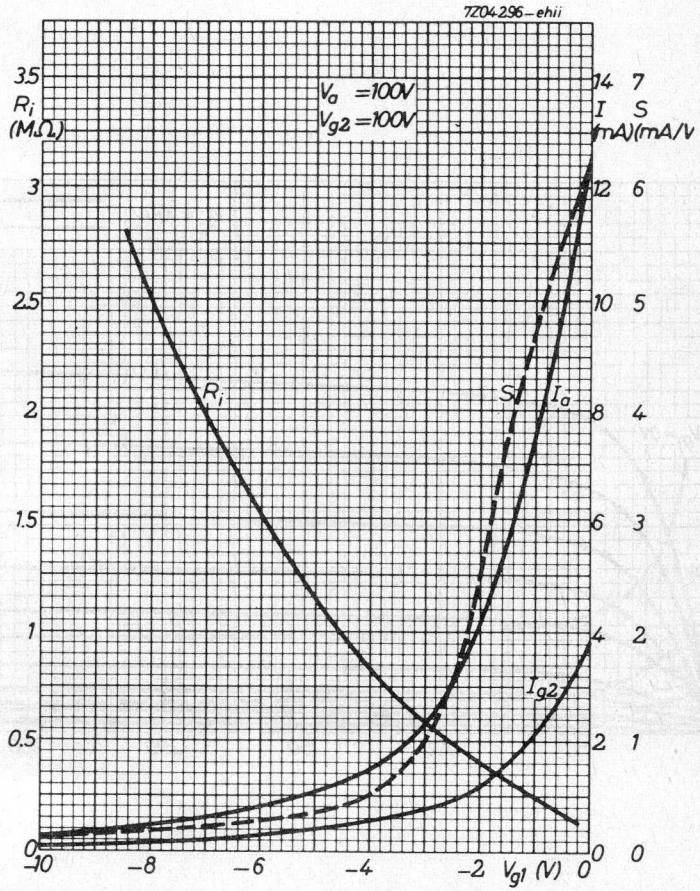

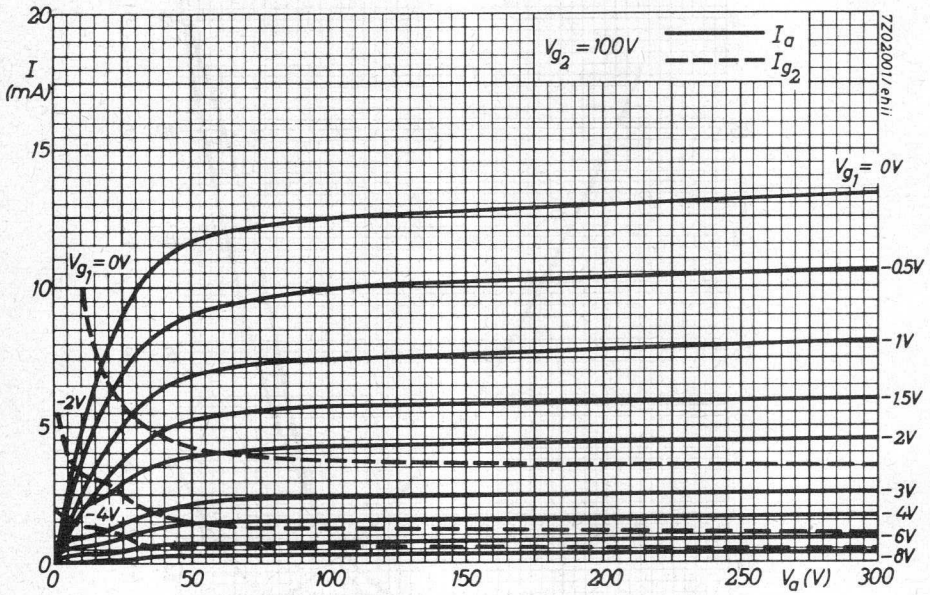

S.Q. TUBE



Special quality pentode designed for use as A. F. power output tube.

QUICK REFERENCE DATA		
Life test	1000 hours	
Mechanical quality	Shock and vibration resistant	
Base	Subminiature	
Heating	Indirect A. C. or D. C. ; parallel supply	
Heater voltage	V_f	6.3 V
Heater current	I_f	450 mA
Anode current	I_a	30 mA
Output power	W_0	1.0 W

DIMENSIONS AND CONNECTIONS

Dimensions in mm

Base: Subminiature

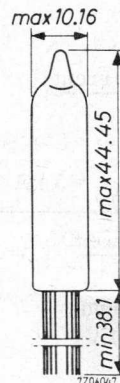

The leads should not be soldered nearer than 5 mm to the seal and should not be bent nearer than 1.5 mm to the seal.

7Z2 6074

CHARACTERISTICS

- Column I Nominal value or setting of the tube
 II Range values for equipment design: Initial spread
 III Range values for equipment design: End of life

		I	II	III	
Heater voltage	V_f	6.3			V
Heater current	I_f	450	420 - 480		mA
Anode voltage	V_a	100			V
Grid No. 2 voltage	V_{g2}	100			V
Grid No. 1 voltage	$-V_{g1}$	9			V
Anode current	I_a	30			mA
Grid No. 2 current	I_{g2}	2.2			mA
Mutual conductance	S	4.2			mA/V
Anode supply voltage	V_{ba}	109			V
Grid No. 2 supply voltage	V_{bg2}	109			V
Cathode resistor	R_k	270			Ω
Anode current	I_a	30	23 - 37		mA
Grid No. 2 current	I_{g2}	2.2	max. 4.0		mA
Mutual conductance	S	4.2	3.5 - 4.9		mA/V
Internal resistance	R_i	15	min. 10		$k\Omega$
<u>Negative grid No. 1 current</u>	$-I_{g1}$	1		2	μA
<u>Output power</u>	W_o	1.0	min. 0.75	ΔW_o : max. 25%	W
Load resistance $R_{a\sim} = 3 k\Omega$					
<u>Leakage current between cathode and heater</u>	I_{kf}		max. 15	max. 60	μA
Voltage between cathode and heater $V_{kf} = 100 V$					

CHARACTERISTICS (continued)Vibrational noise output

	II	
V_o	max. 100	mV _{RMS}

Anode supply voltage $V_{ba} = 110$ V

Grid No.2 supply voltage $V_{bg_2} = 110$ V

Cathode resistor $R_k = 270 \Omega$

Cathode by-pass capacitor $C_k = 1000$ pF

Anode resistor $R_a = 2$ k Ω

Vibration frequency = 50 Hz

Acceleration = 15 g

CAPACITANCES

Anode to grid No.2, cathode,
heater and screen

	I	II	
C_{a/g_2kfs}	7.2	6.5 - 8.5	pF
C_{g_1/g_2kfs}	6.5	5.5 - 7.5	pF
C_{ag_1}		max. 0.2	pF

Grid No.1 to grid No.2 cathode,
heater and screen

Anode to grid No.1

SHOCK AND VIBRATION RESISTANCE

The following test conditions are applied to assess the mechanical quality of the tube. These conditions are not intended to be used as normal operating conditions.

Shock

The tube is subjected 5 times in each of 4 positions to an acceleration of 500 g supplied by an NRL shock machine with the hammer lifted over an angle of 30°.

Vibration

The tube is subjected during 32 hours in each of 3 positions to a vibration frequency of 50 Hz with an acceleration of 2.5 g.


LIFE



Production samples are tested to be within the end of life values (column III) under the following conditions during 1000 hours

Anode supply voltage	V_{ba}	109	V
Grid No.2 supply voltage	V_{bg2}	109	V
Cathode resistor	R_k	270	Ω

LIMITING VALUES (Absolute max. rating system)

Anode voltage	V_{a0}	max.	330	V
	V_a	max.	165	V
Grid No.2 voltage	V_{g20}	max.	310	V
	V_{g2}	max.	155	V
Grid No.1 voltage	$-V_{g1}$	max.	55	V
Anode dissipation	W_a	max.	4	W
Grid No.2 dissipation	W_{g2}	max.	1	W
Cathode current	I_k	max.	50	mA
Peak voltage between cathode and heater	V_{kf}	max.	200	V
Grid No.1 resistor, fixed bias	R_{g1}	max.	0.1	$M\Omega$
		automatic bias	R_{g1}	max. 0.55 $M\Omega$
Bulb temperature	t_{bulb}	max.	220	$^{\circ}C$

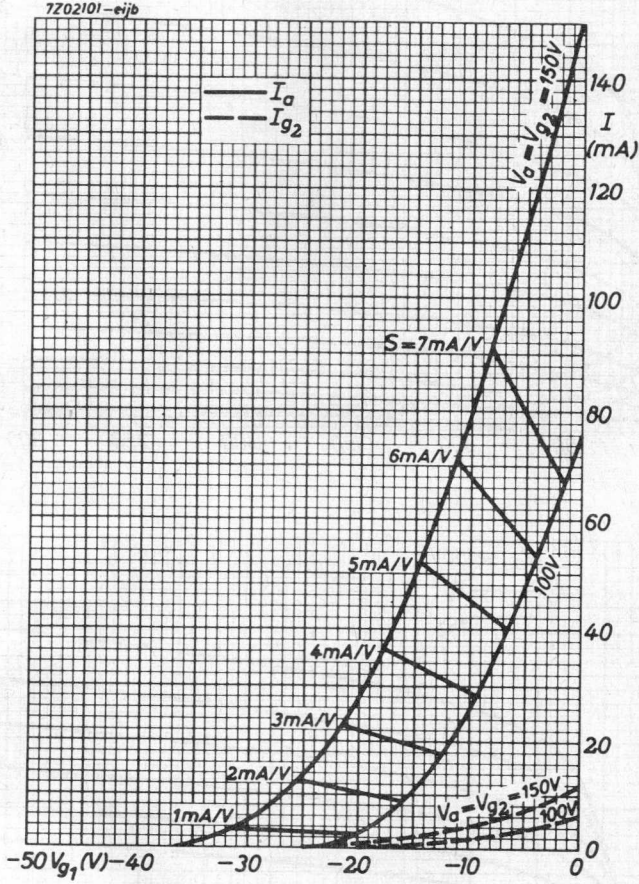

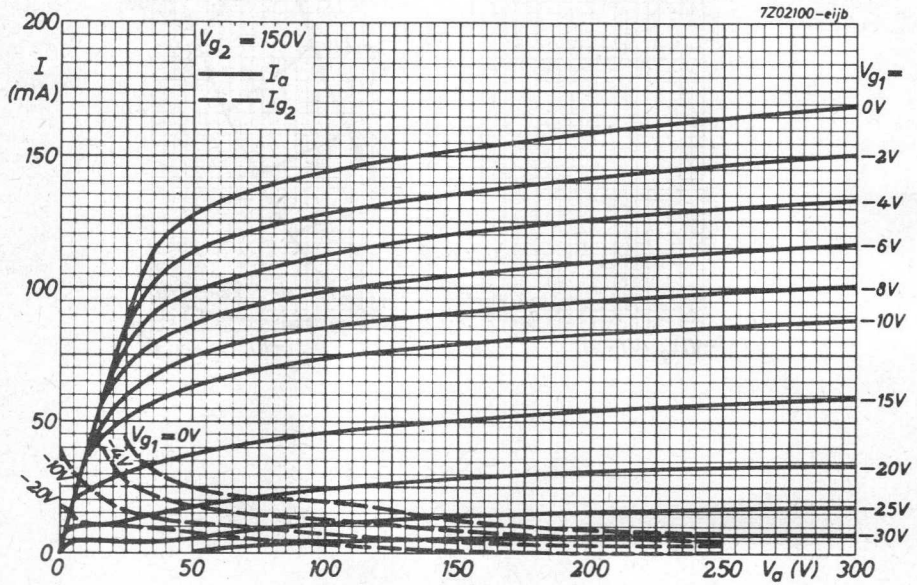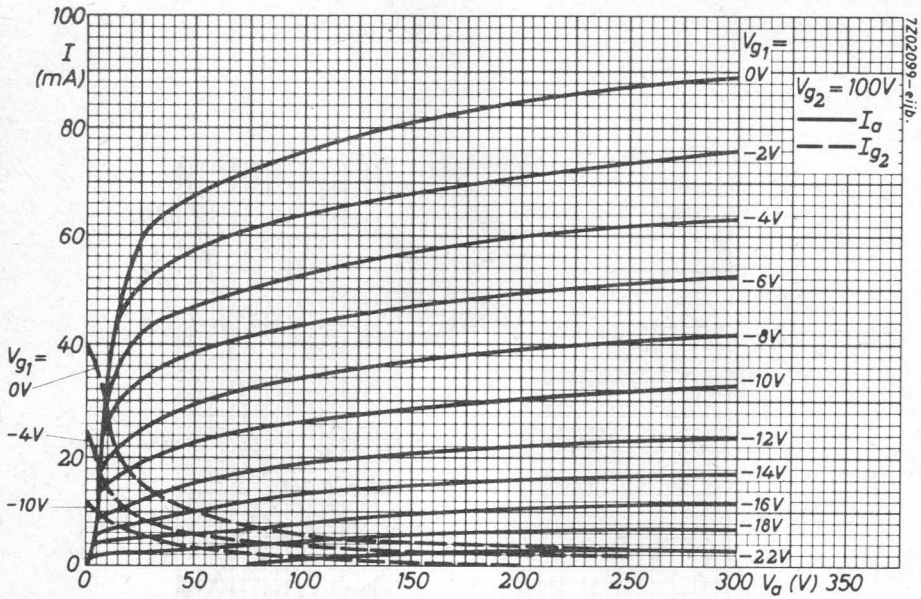

S.Q. TUBE


Special quality double triode designed for use as R. F. amplifier and oscillator.

QUICK REFERENCE DATA

Life test	1000 hours	
Mechanical quality	Shock and vibration resistant	
Base	Subminiature	
Heating	Indirect	
	A.C. or D.C.; parallel supply	
Heater voltage	V_f	6.3 V
Heater current	I_f	300 mA
Anode current	I_a	6.5 mA
Mutual conductance	S	5.4 mA/V

DIMENSIONS AND CONNECTIONS

Dimensions in mm

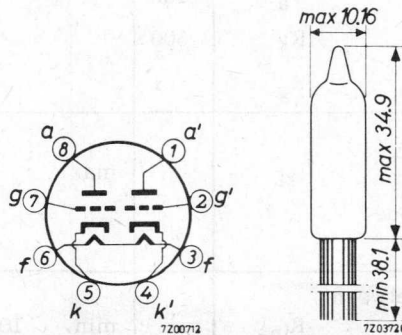

Connections should not be soldered nearer than 5 mm to the seal.

Leads should not be bent nearer than 1.5 mm to the seal.

722 5991

CHARACTERISTICS (both sections if applicable)

Column I Nominal value or setting of the tube

II Range values for equipment design: Initial spread

III Range values for equipment design: End of life

		I	II	III	
Heater voltage	V_f	6.3			V
Heater current	I_f	300	280 - 320		mA
Anode voltage	V_a	100			V
Cathode resistor	R_k	150			Ω
Anode current	I_a	6.5	4.5 - 8.5		mA
Difference in anode current of both systems	$ I_a - I_a' $		max. 1.6		mA
Mutual conductance	S	5.4	4.45 - 6.35	ΔS : max. 25 %	mA/V
Amplification factor	μ	35	30 - 40		
Internal resistance	R_i	6.5			k Ω
<u>Cut-off voltage</u>	$-V_g$		max. 6.5		V
Anode voltage	V_a	100			V
Anode current	I_a	100			μ A
<u>Negative grid current</u>	$-I_g$		max. 0.3	max. 1.0	μ A
Anode voltage	V_a	150			V
Cathode resistor	R_k	300			Ω
Grid resistor	R_g	1			M Ω
<u>Leakage current between cathode and heater</u>	I_{kf}		max. 5	max. 10	μ A
Voltage between cathode and heater $V_{kf} = 100$ V					
<u>Insulation resistance between two electrodes</u>	R_{ins}		min. 100	min. 50	M Ω
Voltage between electrodes = 100 V					

CHARACTERISTICS (continued)

		I	II	III	
<u>Vibrational noise output</u>	V_o		max. 35		mV _{RMS}
Anode supply voltage V_{ba}					
Anode resistor R_a					
Cathode resistor R_k					
Cathode by pass capacitor C					
Vibration frequency					
Acceleration					
CAPACITANCES					
Grid to cathode and heater	$C_{g/kf}$	2.4	1.8 - 3.0		pF
Anode to cathode and heater	$C_{a/kf}$	0.28	0.20 - 0.36		pF
	$C_{a'/k'f}$	0.32	0.22 - 0.42		pF
Anode to grid	C_{ag}	1.5	1.2 - 1.8		pF
Grid to grid other section	$C_{gg'}$		max. 0.013		pF
Anode to anode other section	$C_{aa'}$		max. 0.52		pF

SHOCK AND VIBRATION RESISTANCE

The following test conditions are applied to assess the mechanical quality of the tube. These conditions are not intended to be used as normal operating conditions.

Shock

The tube is subjected 5 times in each of 4 positions to an acceleration of 500 g supplied by an NRL shock machine with the hammer lifted over an angle of 30°.

Vibration

The tube is subjected during 32 hours in each of 3 positions to a vibration frequency of 50 Hz with an acceleration of 2.5 g.

LIFE

Production samples are tested to be within the end of life values (column III) under the following conditions during 1000 hours:

Anode voltage $V_a = 100$ V

Cathode resistor $R_k = 150$ Ω

Voltage between
cathode and heater $V_{kf} = 200$ V

7Z2 7410


LIMITING VALUES (Absolute max. rating system)

Anode voltage	V_{a0}	max.	330 V
Anode voltage	V_a	max.	165 V
Anode dissipation	W_a	max.	0.7 W
Anode current	I_a	max.	22 mA
Grid voltage	$-V_g$	max.	55 V
Grid current	I_g	max.	5.5 mA
Grid resistor	R_g	max.	1.1 M Ω
Voltage between cathode and heater d.c. or peak value	V_{kf}	max.	200 V
Bulb temperature	t_{bulb}	max.	220 °C


Heater voltage: The average heater voltage should be 6.3 V.

Variations of the heater voltage exceeding the range of 6.0 V to 6.6 V will shorten the tube life.

The tolerance of heater current (column II) should be taken into account.

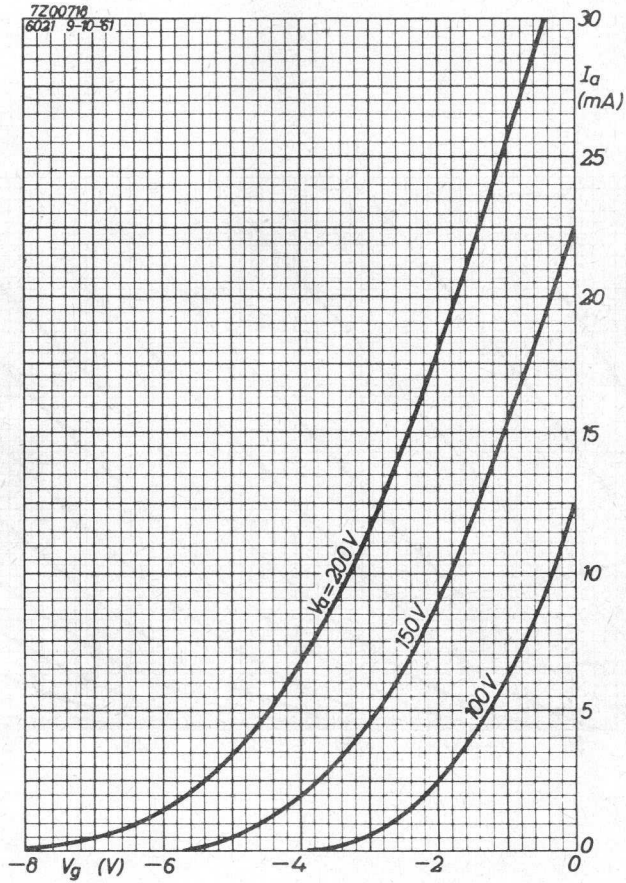

7200779
6021 9-10-67

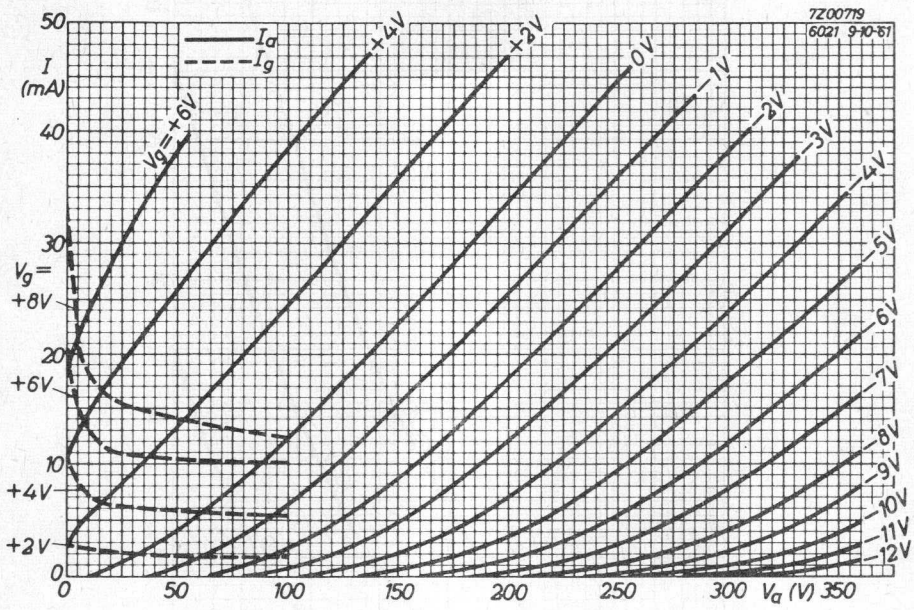

S.Q. TUBE



Special quality double triode designed for use as series regulator tube in d.c. power supplies, in servo application and as booster triode.

QUICK REFERENCE DATA	
Life test	500 hours
Mechanical quality	Shock and vibration resistant
Base	Octal
Heating	Indirect A.C. or D.C.; parallel supply
Heater voltage	V_f 6.3 V
Heater current	I_f 2.5 A
Anode current	I_a 100 mA (each section)
Mutual conductance	S 6.5 mA/V
Internal resistance	R_i 300 Ω

DIMENSIONS AND CONNECTIONS

Dimensions in mm

Base: Octal



7Z2 6309

CHARACTERISTICS

Each section if applicable

Column I Nominal value or setting of the tube

II Range values for equipment design: Initial spread

		I	II	
Heater voltage	V_f	6.3		V
Heater current	I_f	2.5	2.26 - 2.74	A
Anode voltage	V_a	100		V
Cathode resistor	R_k	300		Ω
Anode current	I_a	100		mA
Mutual conductance	S	6.5		mA/V
Amplification factor	μ	2		
Internal resistance	R_i	300		Ω
Anode supply voltage	V_{ba}	135		V
Cathode resistor	R_k	250		Ω
Anode current	I_a	125	100 - 150	mA
Mutual conductance	S	7.0	5.8 - 8.2	mA/V
Amplification factor	μ	2.0	1.4 - 2.6	
Internal resistance	R_i	280		Ω
Negative grid current (g connected to g')	$-I_g$		max. 4.0	μA

1) Max. duration 1 s

Operation with W_a and I_a at the absolute maximum limiting values.

CHARACTERISTICS (continued)Vibrational noise output V_o

I

II

max. 0.2

 V_{RMS}

Two sections in parallel

Anode supply voltage $V_{ba} = 135$ VGrid voltage $-V_g = 7$ VAnode resistor $R_a = 2$ k Ω

Vibration frequency = 25 Hz

Acceleration = 2.5 g

CAPACITANCES Each system if applicable

Anode to grid

 C_{ag}

8.6

pF

Anode to cathode and heater

 $C_{a/kf}$

2.5

pF

Grid to cathode and heater

 $C_{g/kf}$

5.5

pF

Cathode to heater

 C_{kf}

7

pF

Anode to anode other section

 $C_{aa'}$

2.2

pF

Grid to grid other section

 $C_{gg'}$

0.5

pF

SHOCK AND VIBRATION RESISTANCE

The following test conditions are applied to assess the mechanical quality of the tube. These conditions are not intended to be used as normal operating conditions.

Shock

The tube is subjected 5 times in each of 4 positions to an acceleration of 500 g supplied by an NRL shock machine with the hammer lifted over an angle of 30°.

Vibration

The tube is subjected during 32 hours in each of 3 positions to a vibration frequency of 25 Hz with an acceleration of 2.5 g.

LIFE

Production samples are tested during 500 hours.


LIMITING VALUES (Absolute max. rating system)


Anode voltage	V_{a_0}	max. 550 V
	V_a	max. 250 V
Anode inverse peak voltage	$V_{a\text{ inv}p}$	max. 3 kV
Duty factor max.		0.15
Pulse duration max.		10 μsec
Cathode current	I_k	max. 125 mA
Grid peak voltage	$-V_{gp}$	max. 2.3 kV
Duty factor max.		0.15
Pulse duration max.		10 μsec
Anode dissipation	W_a	max. 13 W
Voltage between cathode and heater, peak	V_{kfp}	max. 300 V
Grid resistor	Automatic bias	R_g max. 1.0 $M\Omega$
	Fixed bias	R_g max. 0.1 $M\Omega$ ¹⁾
Bulb temperature	t_{bulb}	max. 260 °C

¹⁾ With fixed bias the anode circuit should contain a protective resistance to provide a minimum drop of 15 V d.c. at the normal operating conditions. When two or more sections are used in parallel at dissipations approaching the rated maximum, separate anode and cathode resistors must be used to assist load sharing.

When combined fixed and automatic bias is used, the cathode bias portion should have a minimum value of 7.5 V d.c. at the normal operating conditions. R_g should then not exceed 0.1 $M\Omega$.

7Z2 7414

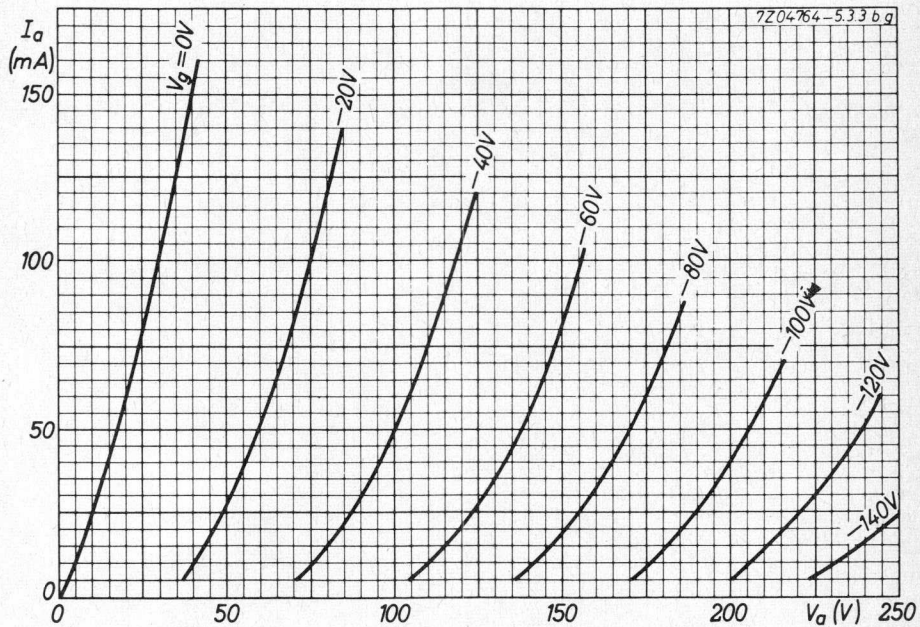

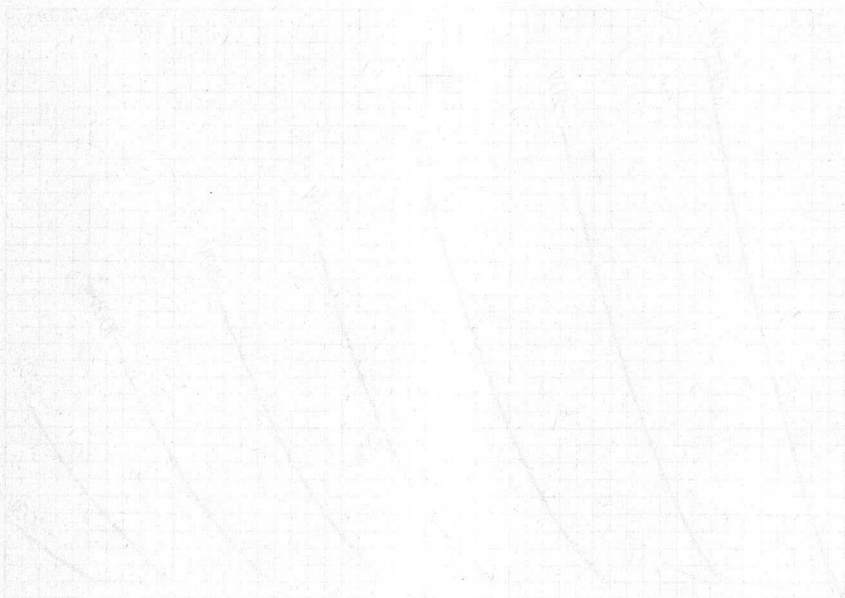

S.Q. TUBE


Special quality double triode designed for use as amplifier mixer and oscillator.

QUICK REFERENCE DATA

Life test	1000 hours	
Mechanical quality	Shock and vibration resistant	
Base	Subminiature	
Heating	Indirect A.C. or D.C. ; parallel supply	
Heater voltage	V_f	6.3 V
Heater current	I_f	300 mA
Anode current	I_a	8.5 mA
Mutual conductance	S	5 mA/V

DIMENSIONS AND CONNECTIONS

Dimensions in mm

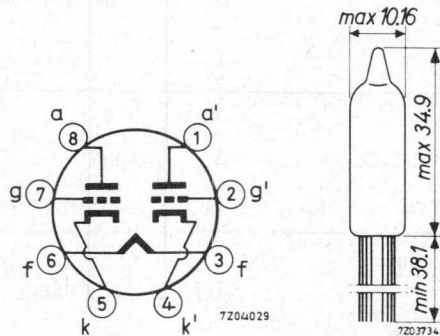

The leads should not be soldered nearer than 5 mm to the seal and should not be bent nearer than 1.5 mm to the seal.

722 6048

CHARACTERISTICS (Each system if applicable)

Column I Nominal values or setting of the tube

II Range values for equipment design: Initial spread

III Range values for equipment design: End of life

		I	II	III	
Heater voltage	V_f	6.3			V
Heater current	I_f	300	280 - 320		mA
Anode voltage	V_a	100			V
Grid voltage	$-V_g$	1.9			V
Anode current	I_a	8.5			mA
Mutual conductance	S	5			mA/V
Amplification factor	μ	20	17 - 23		
Internal resistance	R_i	4			k Ω
Anode voltage	V_a	100			V
Cathode resistor	R_k	220			Ω
Anode current	I_a	8.5	6.0 - 11		mA
Difference in anode current of two sections	$ I_a - I_a' $		max. 2		mA
Mutual conductance	S	5	4.1 - 5.9	min. 3.5	mA/V
<u>Negative grid current</u>	$-I_g$		max. 0.3	max. 1.0	μ A
<u>Cut-off voltage</u>	$-V_g$	9			V
Anode voltage	V_a	100			V
Anode current	I_a		max. 100		μ A
<u>Leakage current between cathode and heater</u>	I_{kf}		max. 5	max. 10	μ A

Voltage between cathode and heater $V_{kf} = 100$ V

CHARACTERISTICS (continued)Vibrational noise outputAnode supply voltage $V_{ba} = 100$ VCathode resistor $R_k = 220 \Omega$ Anode resistor $R_a = 10 \text{ k}\Omega$ Grid resistor $R_g = 0.1 \text{ M}\Omega$ Cathode by-pass capacitor $C_k = 1000 \mu\text{F}$

Vibration frequency = 50 Hz

Acceleration = 15 g

	I	II	
V_o		max. 50	mV _{RMS}
C_a/kf	0.28	0.2-0.36	pF
$C_a'/k'f$	0.32	0.22-0.42	pF
C_g/kf	1.9	1.4- 2.4	pF
C_{ag}	1.5	1.2- 1.8	pF
C_{gg}'		max. 13.0	mpF
C_{aa}'		max. 0.5	pF

CAPACITANCES

Anode to cathode and heater

Grid to cathode and heater

Anode to grid

Grid to grid other section

Anode to anode other section

SHOCK AND VIBRATION RESISTANCE

The following test conditions are applied to assess the mechanical quality of the tube. These conditions are not intended to be used as normal operating conditions.

Shock

The tube is subjected 5 times in each of 4 positions to an acceleration of 500 g supplied by an NRL shock machine with the hammer lifted over an angle of 30°.

Vibration

The tube is subjected during 32 hours in each of 3 positions to a vibration frequency of 50 Hz with an acceleration of 2.5 g.

LIFE

Production samples are tested to be within the end of life values (column III) under the following conditions during 1000 hours.

Anode voltage

 V_a 100 V


Cathode resistor


 R_k 220 Ω

7Z2 7416

LIMITING VALUES (Absolute max. rating system)

Anode voltage	V_{a0}	max. 330 V
	V_a	max. 165 V
Grid voltage	$+V_g$	max. 0 V
	$-V_g$	max. 55 V
Grid current	I_g	max. 5.5 mA
Anode dissipation	W_a	max. 1.1 W
Cathode current	I_k	max. 22 mA
Peak voltage between cathode and heater	V_{kfp}	max. 200 V
Grid resistor	R_g	max. 1 M Ω
Bulb temperature	t_{bulb}	max. 220 °C

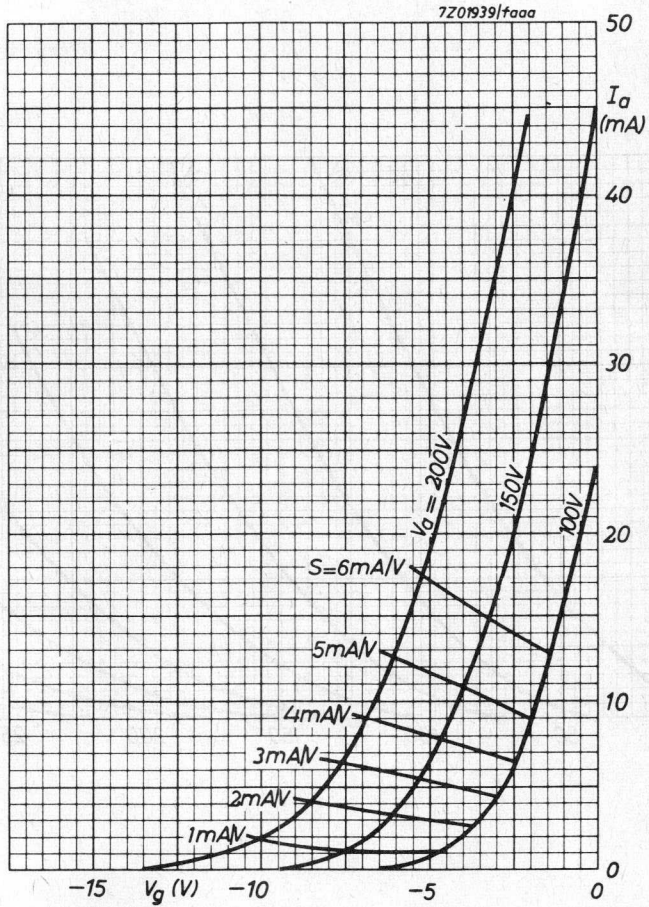

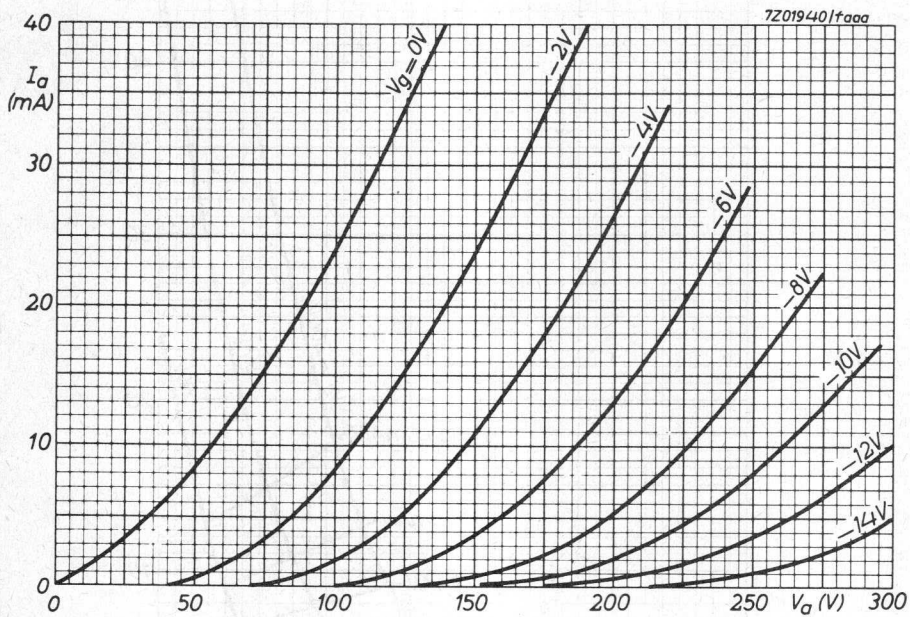

S.Q. TUBE

Special quality double triode designed for use as A.F. amplifier and multi-vibrator.



QUICK REFERENCE DATA

Life test	1000 hours	
Mechanical quality	Shock and vibration resistant	
Base	Subminiature	
Heating	Indirect A.C. or D.C.; parallel supply	
Heater voltage	V_f	6.3 V
Heater current	I_f	300 mA
Anode current	I_a	0.8 mA
Mutual conductance	S	1.8 mA/V

DIMENSIONS AND CONNECTIONS

Dimensions in mm

Base: Subminiature



The leads should not be soldered nearer than 5 mm to the seal and should not be bent nearer than 1.5 mm to the seal.

7Z2 6052

CHARACTERISTICS

Column I Nominal values or setting of the tube

II Range values for equipment design: Initial spread

III Range values for equipment design: End of life

		I	II	III	
Heater voltage	V_f	6.3			V
Heater current	I_f	300	280 - 320		mA
Anode voltage	V_a	100			V
Grid voltage	$-V_g$	1.2			V
Anode current	I_a	0.8			mA
Mutual conductance	S	1.8			mA/V
Amplification factor	μ	70			
Internal resistance	R_i	38.8			k Ω
Anode voltage	V_a	100			V
Cathode resistor	R_k	1500			Ω
Anode current	I_a	0.8	0.5 - 1.1		mA
Mutual conductance	S	1.8	1.5 - 2.1		mA/V
Amplification factor	μ	70	60 - 80		
<u>Cut off voltage</u>	$-V_g$	2.8			V
Anode voltage	V_a	100			V
Anode current	I_a		max. 50		μ A
<u>Leakage current between cathode and heater</u>	I_{kf}		max. 5	max. 10	μ A
Voltage between cathode and heater $V_{kf} = 100$ V					
<u>Negative grid current</u>	$-I_g$		max. 0.3	max. 0.9	μ A
Anode voltage	V_a	150			V
Cathode resistor	R_k	820			Ω

CHARACTERISTICS (continued)Vibrational noise outputAnode supply voltage $V_{ba} = 100$ VCathode resistor $R_k = 1500 \Omega$ Anode resistor $R_a = 10$ k Ω Grid resistor $R_g = 0.1$ M Ω Cathode bypass capacitor $C_k = 1000 \mu$ F

Vibration frequency 50 Hz

Acceleration 15 g

	I	II	
V_o		max. 25	mV _{RMS}
$C_{a/kf}$	0.23	0.16 - 0.30	pF
$C_{a'/k'f}$	0.28	0.21 - 0.35	pF
$C_{g/kf}$	1.7	1.3 - 2.1	pF
$C_{aa'}$		max. 0.8	pF
$C_{gg'}$		max. 14.0	mpF
C_{ag}	1.0	0.8 - 1.2	pF

CAPACITANCES

Anode to cathode and heater

Grid to cathode and heater

Anode to anode other section

Grid to grid other section

Anode to grid

SHOCK AND VIBRATION RESISTANCE

The following test conditions are applied to assess the mechanical quality of the tube. These conditions are not intended to be used as normal operating conditions.

Shock

The tube is subjected 5 times in each of 4 positions to an acceleration of 500 g supplied by an NRL shock machine with the hammer lifted over an angle of 30°.

Vibration

The tube is subjected during 32 hours in each of 3 positions to a vibration frequency of 50 Hz with an acceleration of 2.5 g.

LIFE

Production samples are tested to be within the end of life values (column III) under the following conditions during 1000 hours.

Anode supply voltage

 V_{ba} 100 V


Cathode resistor


 R_k 1500 Ω

7Z2 7419

LIMITING VALUES (Absolute max. rating system)

Anode voltage	V_{a0}	max.	330 V
	V_a	max.	165 V
Grid voltage	$+V_g$	max.	0 V
	$-V_g$	max.	55 V
Anode dissipation	W_a	max.	0.55 W
Anode current	I_a	max.	3.3 mA
Peak voltage between cathode and heater	V_{kfP}	max.	200 V
Grid resistor	R_g	max.	1 M Ω
Bulb temperature	t_{bulb}	max.	220 °C

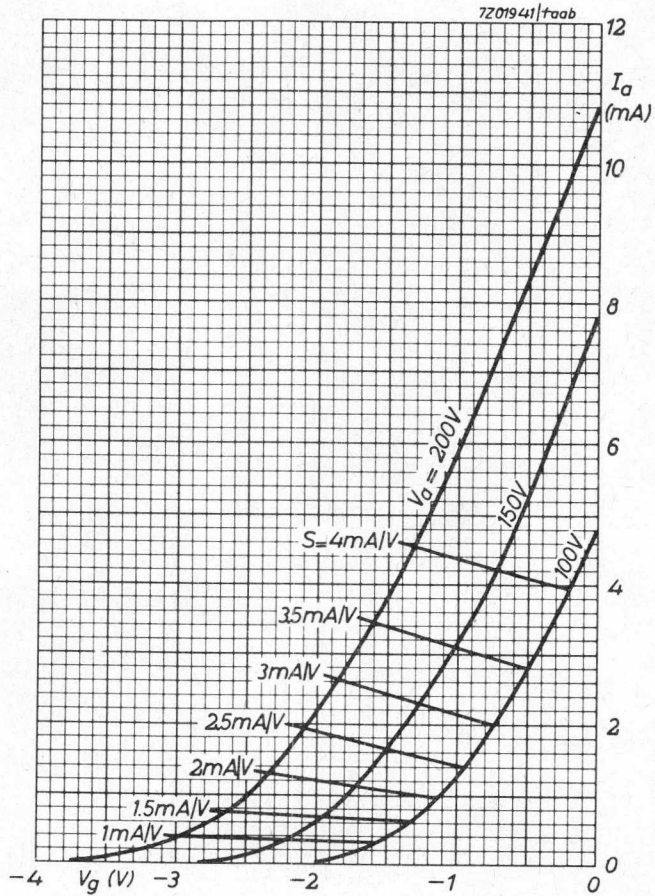

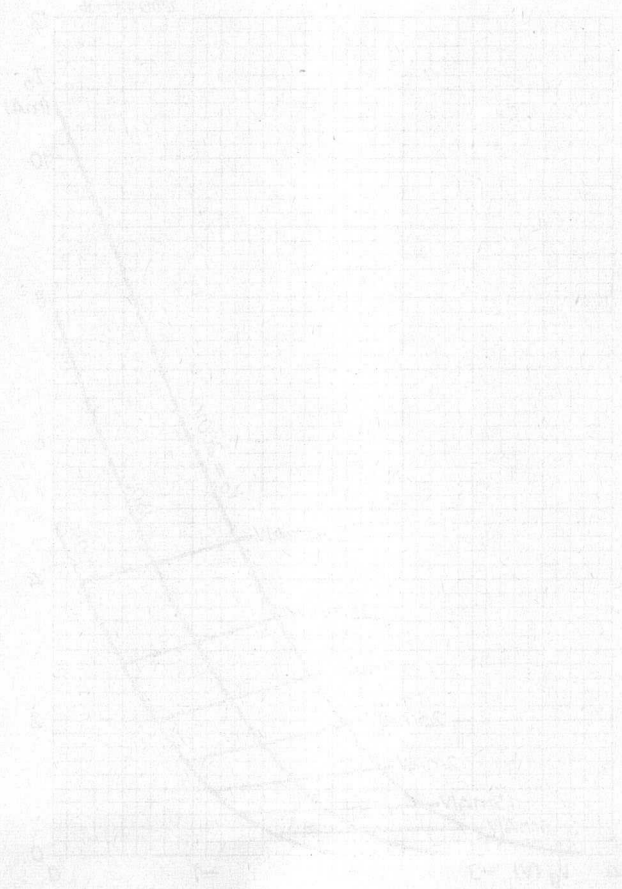

S.Q. TUBE

Special quality double triode designed for use as A.F. amplifier.



QUICK REFERENCE DATA

Life test	1000 hours	
Mechanical quality	Shock and vibration resistant	
Base	Noval	
Heating	Indirect	
	A.C. or D.C.; Parallel supply	
Heater voltage	V_f	6.3 or 12.6 V
Heater current	I_f	300 or 150 mA
Anode current	I_a	11.8 mA
Mutual conductance	S	3.2 mA/V

DIMENSIONS AND CONNECTIONS

Dimensions in mm

Base: Noval



722 6044

CHARACTERISTICS (Both sections if applicable)

Column I Nominal values or setting of the tube

II Range values for equipment design: Initial spread

III Range values for equipment design: End of life

		I	II	III	
Heater voltage (pin 9 and 4+5)	V_f	6.3			V
Heater current	I_f	300	276- 324		mA
Heater voltage (pin 4 and 5)	V_f	12.6			V
Heater current	I_f	150			mA
Anode voltage	V_a	100			V
Grid voltage	$-V_g$	0			V
Anode current	I_a	11.8			mA
Mutual conductance	S	3.2	2.5- 4.0		mA/V
Amplification factor	μ	19.5			
Internal resistance	R_i	6.25			k Ω
Anode voltage	V_a	250			V
Grid voltage	$-V_g$	8.5			V
Anode current	I_a	10.5	6.5-14.5		mA
Mutual conductance	S	2.2	1.8- 2.6	min. 1.5	mA/V
Amplification factor	μ	17	15.5-18.5		
Internal resistance	R_i	7.7			k Ω
<u>Negative grid current</u>	$-I_g$		max. 0.5	max. 0.5	μ A
<u>Cathode peak current</u>	I_{kp}		min. 400		mA
Anode voltage	V_a	250			V
Grid voltage	V_g	55			V
<u>Cut-off voltage</u>	$-V_g$	25			V
Anode voltage	V_a	250			V
Anode current	I_a		max. 20		μ A

CHARACTERISTICS (continued)

		I	II	III	
<u>Leakage current between cathode and heater</u>	I_{kf}		max. 5	max. 5	μA
Voltage between cathode and heater $V_{kf} = 100 V$					
<u>Vibrational noise output</u>	V_o		max. 100		mV_{RMS}
Anode voltage $V_a = 250 V$					
Grid voltage $-V_g = 8.5 V$					
Anode resistor $R_a = 2 k\Omega$					
Grid resistor $R_g = 0.1 M\Omega$					
Vibration frequency = 50 Hz					
Acceleration = 10 g					
CAPACITANCES					
Anode to cathode and heater	$C_{a/kf}$	0.5	0.3- 0.7		pF
	$C_{a'/k'f}$	0.4	0.2- 0.6		pF
Grid to cathode and heater	$C_{g/kf}$	1.6	1.25-1.95		pF
Anode to grid	C_{ag}	1.5	1.2- 1.8		pF

SHOCK AND VIBRATION RESISTANCE

The following test conditions are applied to assess the mechanical quality of the tube. These conditions are not intended to be used as normal operating conditions.

Shock

The tube is subjected 5 times in each of 4 positions to an acceleration of 500 g supplied by an NRL shock machine with the hammer lifted over an angle of 30°.

Vibration

The tube is subjected during 32 hours in each of 3 positions to a vibration frequency of 50 Hz with an acceleration of 2.5 g.


LIFE

Production samples are tested to be within the end of life values (column III) under the following conditions during 1000 hours.


Anode voltage	V_a	250	V
Grid voltage	$-V_g$	8.5	V

LIMITING VALUES (Absolute max. rating system)

Anode voltage	V_a	max.	330	V
Anode dissipation	W_a	max.	3	W
Cathode current	I_k	max.	22	mA
Grid resistor: fixed bias	R_{g1}	max.	0.5	$M\Omega$
	R_{g1}	max.	1.0	$M\Omega$
Voltage between cathode and heater	V_{kf}	max.	110	V
Bulb temperature	t_{bulb}	max.	165	$^{\circ}C$

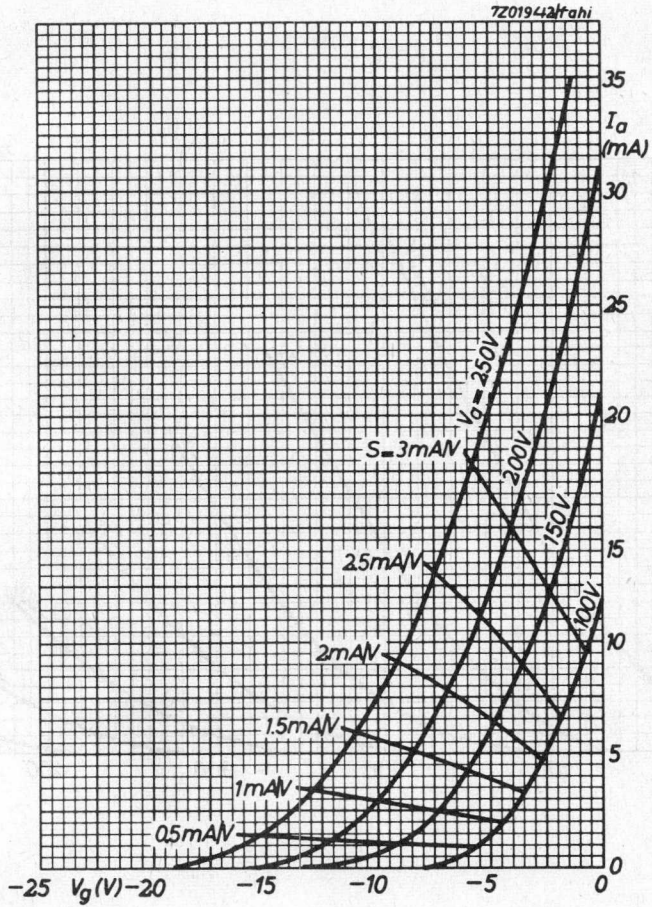

7Z01943 | fahi

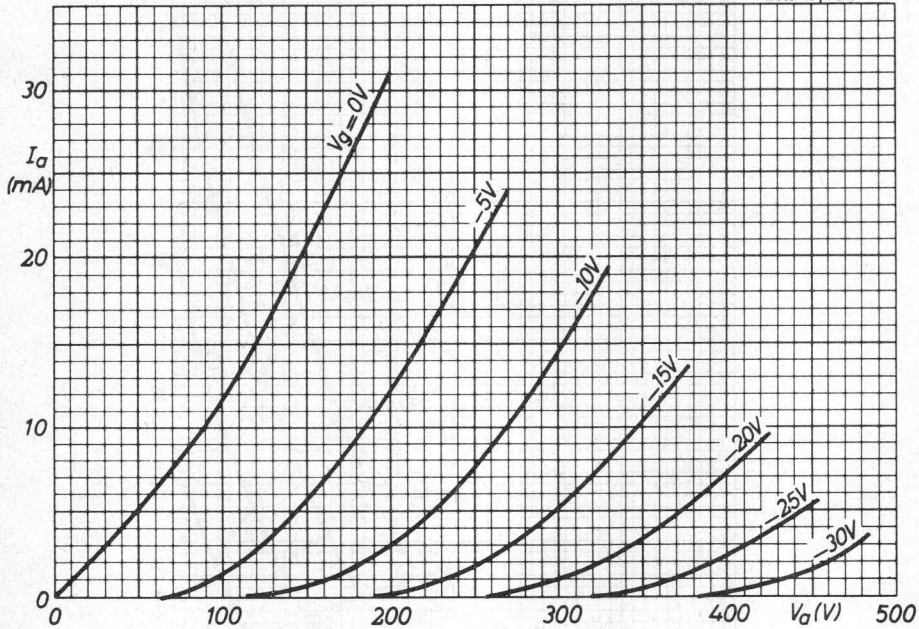

S.Q. TUBE

Special quality double triode designed for use as R.F. amplifier in grounded grid circuits, frequency changer (max. freq. 300 MHz) in mobile and industrial equipment with intermittent operation, and on-off control applications where operation under cut-off conditions is required.



QUICK REFERENCE DATA

Life test	500 hours
Low interface resistance	
Mechanical quality	Shock and vibration resistant
Base	Noval. Gold plated pins
Heating	Indirect A.C. or D.C. Parallel or series supply
Heater voltage	V_f 6.3 or 12.6 V
Heater current	I_f 300 or 150 mA
Anode current	I_a 10 mA
Mutual conductance	S 5.5 mA/V

DIMENSIONS AND CONNECTIONS

Dimensions in mm

Base: Noval



7Z2 7424

CHARACTERISTICS

Column I Nominal value or setting of the tube

II Range values for equipment design: Initial spread

III Range values for equipment design: End of life

		I	II	III	
Heater voltage (pin 9 and 4 + 5)	V_f	6.3			V
Heater current	I_f	300			mA
Heater voltage (pin 4 and 5)	V_f	12.6			V
Heater current	I_f	150	138 - 162		mA
Anode voltage	V_a	100			V
Cathode resistor	R_k	270			Ω
Anode current	I_a	3.3			mA
Mutual conductance	S	4.0			mA/V
Internal resistance	R_i	14.3			$k\Omega$
Amplification factor	μ	57			
<u>Cut-off voltage</u>	$-V_g$	5			V
Anode voltage	V_a	100			V
Anode current	I_a	10			μA
Anode voltage	V_a	250			V
Cathode resistor	R_k	200			Ω
Anode current	I_a	10	7 - 14		mA
Mutual conductance	S	5.5	4.5 - 6.5	min. 3.8	mA/V
Internal resistance	R_i	10.9			$k\Omega$
Amplification factor	μ	60	50 - 70		
Difference in anode current of two systems	$ I_a - I_a' $		max. 3.2		mA
<u>Negative grid current</u>	$-I_g$		max. 0.7	max. 0.7	μA
<u>Cut-off voltage</u>	$-V_g$	12			V
Anode voltage	V_a	250			V
Anode current	I_a	10			μA

7Z2 7425

CHARACTERISTICS (continued)

		I	II	III	
<u>Cut-off voltage</u>	$-V_g$	20			V
Anode supply voltage $V_a = 250$ V	V_a	250			V
Anode resistor $R_a = 0.1$ M Ω	R_a	0.1			M Ω
Anode current $I_a = \text{max. } 100$ μ A	I_a		max. 100		μ A
<u>Vibrational noise output</u>	V_o		max. 100		mVRMS
Anode supply voltage $V_{ba} = 200$ V					
Grid voltage $-V_g = 3$ V					
Anode resistor $R_a = 2$ k Ω					
(two sections in parallel)					
Vibration frequency 25 Hz					
Acceleration 2.5 g					
<u>Leakage current between cathode and heater</u>	I_{kf}		max. 10	max. 10	μ A
Voltage between cathode and heater $V_{kf} = 100$ V					
<u>Insulation resistance between grid and cathode ($V = 100$ V)</u>	R_{ins}		min. 100	min. 50	M Ω
anode and cathode ($V = 300$ V)	R_{ins}		min. 100	min. 50	M Ω

CAPACITANCES (Both sections if applicable)Without external shield

		I	II	
Anode to grid	C_{ag}	1.6	1.3 - 1.9	pF
Grid to cathode and heater	$C_{g/kf}$	2.5	2.0 - 3.0	pF
Anode to cathode and heater	$C_{a/kf}$	0.45	0.2 - 0.7	pF
	$C_{a'/k'f}$	0.38	0.16 - 0.60	pF
Cathode to heater	C_{kf}	2.8	2.1 - 3.5	pF
Anode to anode other section	$C_{aa'}$	0.24	0.15 - 0.33	pF
Cathode to grid and heater	$C_{k/gf}$	5.0		pF
Anode to grid and heater	$C_{a/gf}$	1.9		pF
	$C_{a'/g'f}$	1.8		pF
Anode to cathode	C_{ak}	0.2		pF
	$C_{a'k'}$	0.24		pF

7Z2 7426

CAPACITANCES (Both sections if applicable) (continued)With external shield connected to the applicable cathode

Anode to grid	C_{ag}	1.6 pF
Grid to cathode and heater	$C_{g/kf}$	2.5 pF
Anode to cathode and heater	$C_{a/kf}$	1.2 pF
	$C_{a'/k'f}$	1.3 pF
Cathode to heater	C_{kf}	2.8 pF

With external shield connected to the applicable grid

Cathode to grid and heater	$C_{k/gf}$	5.0 pF
Anode to grid and heater	$C_{a/gf}$	2.7 pF
Anode to cathode	C_{ak}	0.18 pF
	$C_{a'k'}$	0.2 pF

SHOCK AND VIBRATION RESISTANCE

The following test conditions are applied to assess the mechanical quality of the tube. These conditions are not intended to be used as normal operating conditions

Shock

The tube is subjected 5 times in each of 4 positions to an acceleration of 600 g supplied by an NRL shock machine with the hammer lifted over an angle of 42°

Vibration

The tube is subjected during 32 hours in each of 3 positions to a vibration frequency of 25 Hz with an acceleration of 2.5 g

LIFE

Production samples are tested to be within the end of life values (column III) under the following conditions during 500 hours

Anode supply voltage	V_{ba}	= 250 V
Cathode resistor	R_k	= 200 Ω

OPERATING CHARACTERISTICS


As A.F. amplifierResistance of voltage source = 200 Ω

Anode supply voltage	V_{ba}	90	90	90	90	90	90	V
Anode resistor	R_a	0.1	0.1	0.24	0.24	0.51	0.51	$M\Omega$
Cathode resistor	R_k	1600	1800	3800	4200	8000	9600	Ω
Grid resistor of next stage	$R_{g'}$	0.1	0.24	0.24	0.51	0.51	1.0	$M\Omega$
Output voltage ($d_{tot} = 5\%$)	V_o	5.3	7.8	7.2	9.4	8.3	10	V_{RMS}
Voltage gain ($V_o = 2 V_{RMS}$)	V_o/V_i	26	29	28	30	28	29	
Anode supply voltage	V_{ba}	180	180	180	180	180	180	V
Anode resistor	R_a	0.1	0.1	0.24	0.24	0.51	0.51	$M\Omega$
Cathode resistor	R_k	1100	1400	2800	3300	5600	6700	Ω
Grid resistor of next stage	$R_{g'}$	0.1	0.24	0.24	0.51	0.51	1.0	$M\Omega$
Output voltage ($d_{tot} = 5\%$)	V_o	12	17	16	20	18	23	V_{RMS}
Voltage gain ($V_o = 2 V_{RMS}$)	V_o/V_i	31	33	32	33	31	32	
Anode voltage	V_{ba}	300	300	300	300	300	300	V
Anode resistor	R_a	0.1	0.1	0.24	0.24	0.51	0.51	$M\Omega$
Cathode resistor	R_k	1000	1200	3300	2800	4900	6000	Ω
Grid resistor of next stage	$R_{g'}$	0.1	0.24	0.24	0.51	0.51	1.0	$M\Omega$
Output voltage ($d_{tot} = 5\%$)	V_o	22	30	28	35	31	38	V_{RMS}
Voltage gain ($V_o = 2 V_{RMS}$)	V_o/V_i	32	33	34	33	33	33	



OPERATING CHARACTERISTICS (continued)



Resistance of voltage source 100 k Ω


Anode supply voltage	V_{ba}	90	90	90	90	90	90 V
Anode resistor	R_a	0.1	0.1	0.24	0.24	0.51	0.51 M Ω
Cathode resistor	R_k	2000	2400	4700	5300	9300	11000 Ω
Grid resistor of next stage	$R_{g'}$	0.1	0.24	0.24	0.51	0.51	1.0 M Ω
Output voltage ($d_{tot} = 5\%$)	V_o	9.9	13	12	15	13	16 V _{RMS}
Voltage gain ($V_o = 2$ V _{RMS})	V_o/V_i	25	27	27	28	27	28
Anode supply voltage	V_{ba}	180	180	180	180	180	180 V
Anode resistor	R_a	0.1	0.1	0.24	0.24	0.51	0.51 M Ω
Cathode resistor	R_k	1200	1400	2900	3600	6000	7100 Ω
Grid resistor of next stage	$R_{g'}$	0.1	0.24	0.24	0.51	0.51	1.0 M Ω
Output voltage ($d_{tot} = 5\%$)	V_o	17	28	25	31	27	33 V _{RMS}
Voltage gain ($V_o = 2$ V _{RMS})	V_o/V_i	31	33	32	33	31	32
Anode supply voltage	V_{ba}	300	300	300	300	300	300 V
Anode resistor	R_a	0.1	0.1	0.24	0.24	0.51	0.51 M Ω
Cathode resistor	R_k	900	1200	2300	2900	5000	6400 Ω
Grid resistor of next stage	$R_{g'}$	0.1	0.24	0.24	0.51	0.51	1.0 M Ω
Output voltage ($d_{tot} = 5\%$)	V_o	35	47	42	52	45	55 V _{RMS}
Voltage gain ($V_o = 2$ V _{RMS})	V_o/V_i	33	33	34	34	33	34

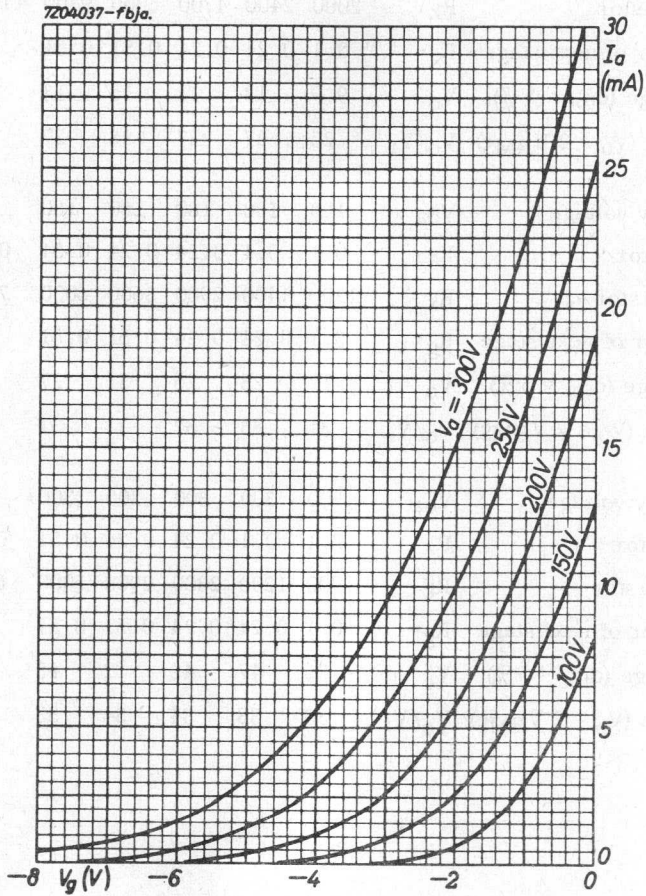

7Z04-038-fbjg.

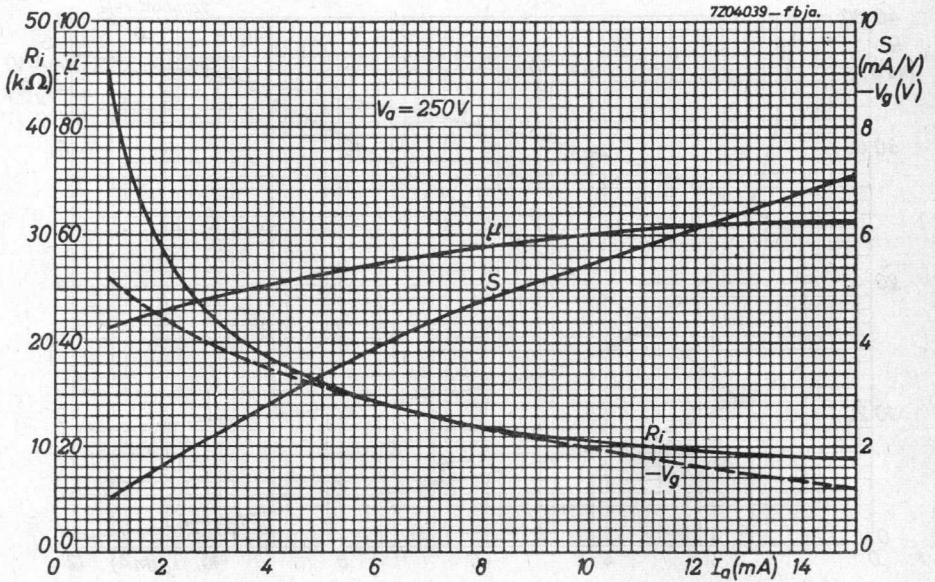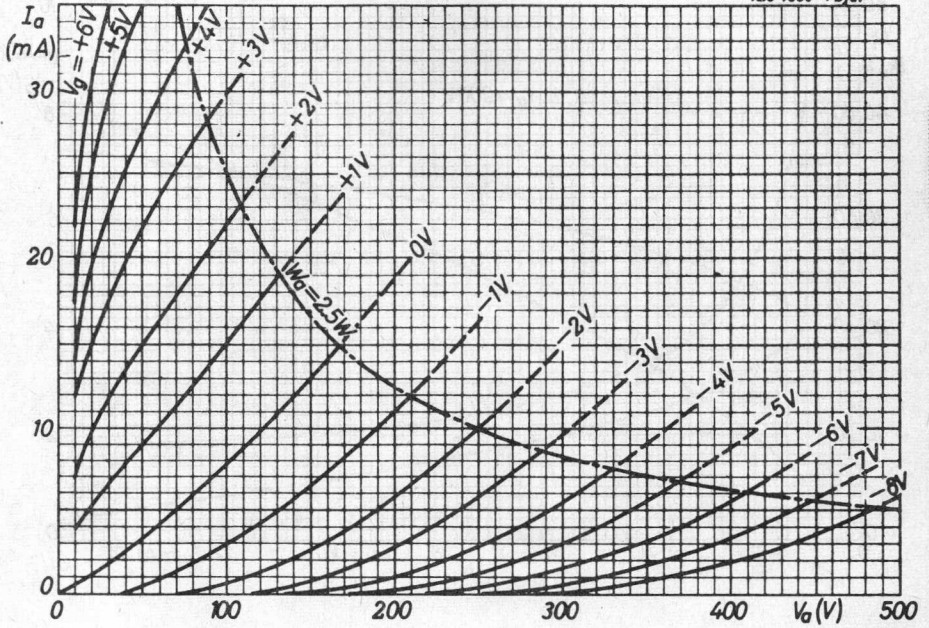

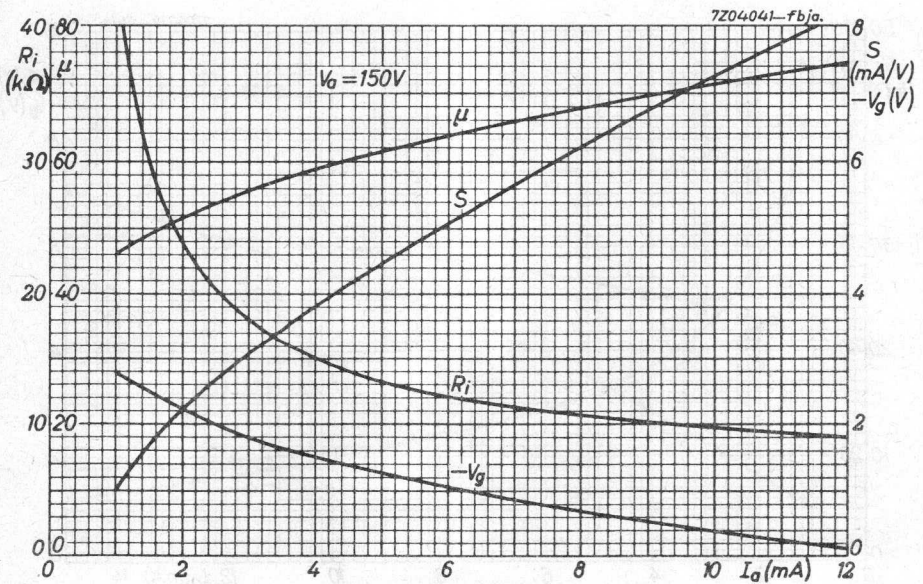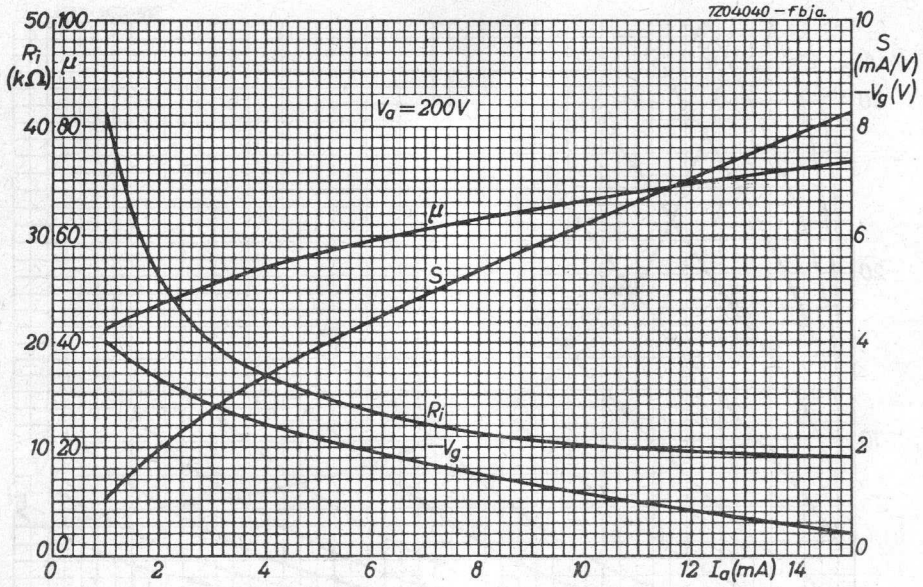

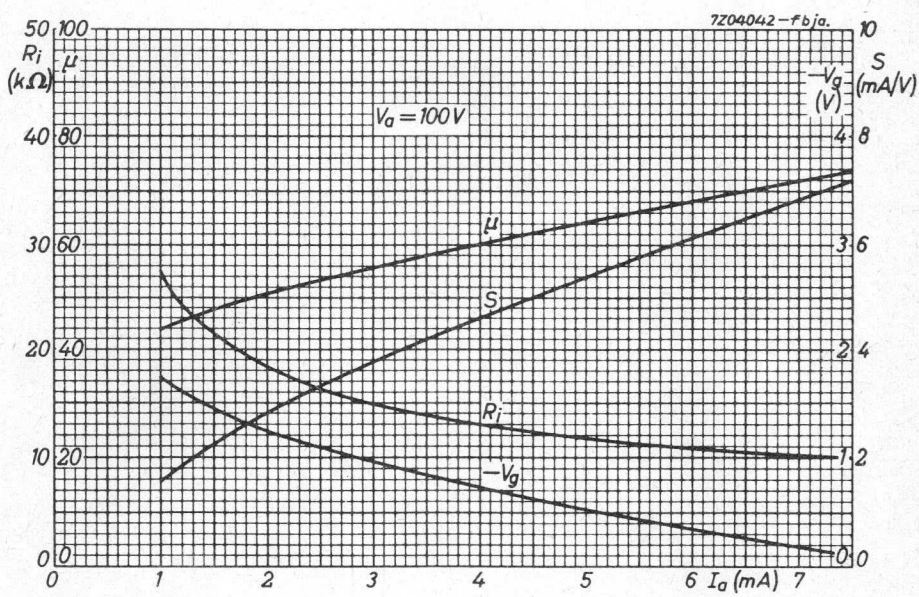

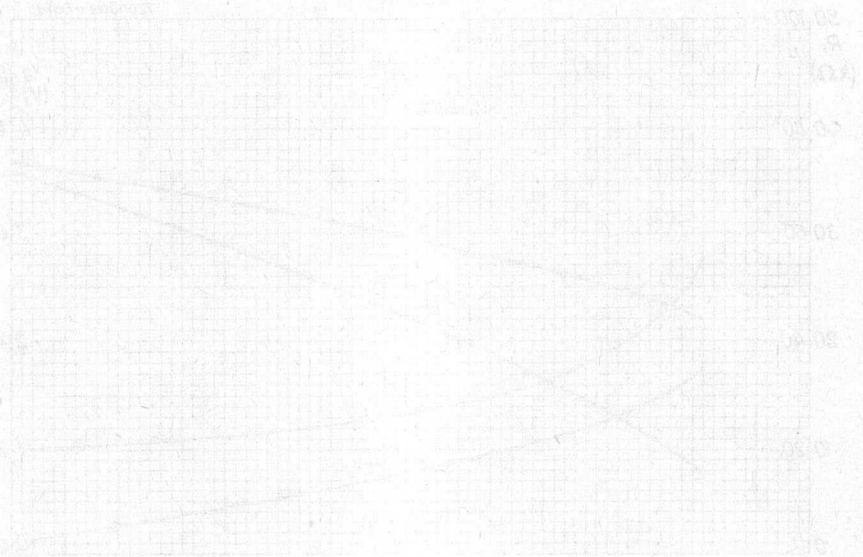


Figure 1

S.Q. TUBE

Pentode designed for use in telephone equipment.


QUICK REFERENCE DATA

Life test	10 000 hours
Low interface resistance	
Base	Noval
Heating	Indirect A.C. or D.C. Series or parallel supply
Heater voltage	V_f 18 V
Heater current	I_f 100 mA
Anode current	I_a 10 mA
Mutual conductance	S 9 mA/V

DIMENSIONS AND CONNECTIONS

Dimensions in mm

Base: Noval

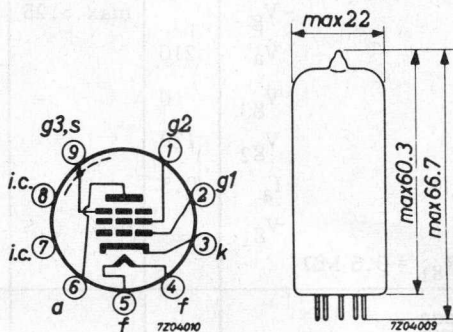

7Z2 6322

CHARACTERISTICS

Column I Nominal value or setting of the tube

II Range values for equipment design: Initial spread

III Range values for equipment design: End of life

		I	II	III	
Heater voltage	V_f	18			V
Heater current	I_f	100	95 - 105		mA
Anode voltage	V_a	210			V
Grid No.3 voltage	V_{g3}	0			V
Grid No.2 voltage	V_{g2}	120			V
Cathode resistor	R_k	165			Ω
Anode current	I_a	10	8.7 - 11.3	min. 7	mA
Grid No.2 current	I_{g2}	2.1	1.7 - 2.5	min. 1.25	mA
Mutual conductance	S	9	7.8 - 10.2	min. 6.4	mA/V
Internal resistance	R_i	0.5	min. 0.3		$M\Omega$
Amplification factor	μ_{g2g1}	38			
Equivalent noise resistance					
R. F.	R_{eq}	750	max. 1000		Ω
A. F. (0 - 10 kHz)	R_{eq}		max. 36		k Ω
Negative grid current	$-I_{g1}$		max. 0.5	max. 1.0	μA
<u>Cut-off voltage</u>	$-V_g$		max. 5.25		V
Anode voltage	V_a	210			V
Grid No.3 voltage	V_{g3}	0			V
Grid No.2 voltage	V_{g2}	120			V
Anode current	I_a	0.5			mA
<u>Hum voltage</u>	V_{g1}		max. 0.5		mV _{RMS}
Grid No.1 resistor $R_{g1} = 0.5 M\Omega$					
<u>Leakage current between cathode and heater</u>	I_{kf}		max. 20		μA
Voltage between cathode and heater $V_{kf} = 100 V$					

7Z2 7430

CAPACITANCES

		I	II	
Anode to grid No.2, grid No.3, cathode and heater	C_{a/g_2g_3kfs}	3.5	max. 4.1	pF
Grid No.1 to grid No.2, grid No.3, cathode, heater and screen	C_{g_1/g_2g_3kfs}	8.0	max. 8.7	pF
Anode to grid No.1	C_{ag_1}		max.0.015	pF
Grid No.1 to heater	C_{g_1f}		max. 0.15	pF
Cathode to heater	C_{kf}	4		pF
Grid No.1 to grid No.2, grid No.3, cathode, heater and screen	C_{g_1/g_2g_3kfs}	11.3		pF
Cathode current = 12.1 mA				
Radiation capacitance:				
Anode to surrounding box, inner diam. 52 mm, height 98 mm	C_{ra}		max.0.025	pF
Grid No.1 to surrounding box, inner diam. 52 mm, height 98 mm	C_{rg_1}		max.0.025	pF

LIFE

Production samples are tested to be within the end of life values (column III) during 10 000 hours.

LIMITING VALUES Design centre rating system

Anode voltage	V_{a_0}	max. 550	V
	V_a	max. 210	V
Anode dissipation	W_a	max. 2.1	W
Grid No.2 voltage	$V_{g_{2_0}}$	max. 550	V
	V_{g_2}	max. 210	V
Grid No.2 dissipation	W_{g_2}	max. 0.35	W
Cathode current	I_k	max. 16	mA
Grid No.1 resistor (automatic bias)	R_{g_1}	max. 1	M Ω
Voltage between cathode and heater	V_{kf}	max. 100	V
Bulb temperature	t_{bulb}	max. 170	$^{\circ}C$

7Z2 6324

LIMITING VALUES (continued)


Heater voltage: The average heater voltage should be 18 V.



Variations of the heater voltage exceeding the range of 17.1 to 18.9 V will shorten the tube life.


The tolerance of heater current (column II) should be taken into account.


OPERATING CHARACTERISTICSOutput tube class A


Anode voltage	V_a	120		210	V			
Grid No.3 voltage	V_{g_3}	0		0	V			
Grid No.2 supply voltage	V_{bg_2}	120		120	V			
Grid No.2 resistor	R_{g_2}	5.6		5.6	k Ω			
Cathode resistor	R_k	180		180	Ω			
Anode current	I_a	8.3		8.3	mA			
Grid No.2 current	I_{g_2}	1.7		1.7	mA			
Mutual conductance	S	8.2		8.2	mA/V			
Internal resistance	R_i	0.42		0.44	M Ω			
Load resistance	$R_{a\sim}$	10		20	k Ω			
Output power	W_o	340	400	50	660	870	50	mW
Input voltage	V_i	1.1	-	0.35	1.1	-	0.25	V _{RMS}
Total distortion	d_{tot}	10	-	-	10	-	-	%
Grid No.1 current	$+I_g$	-	0.3	-	-	0.3	-	μ A
Grid No.1 resistor	R_{g_1}	-	0.33	-	-	0.33	-	M Ω

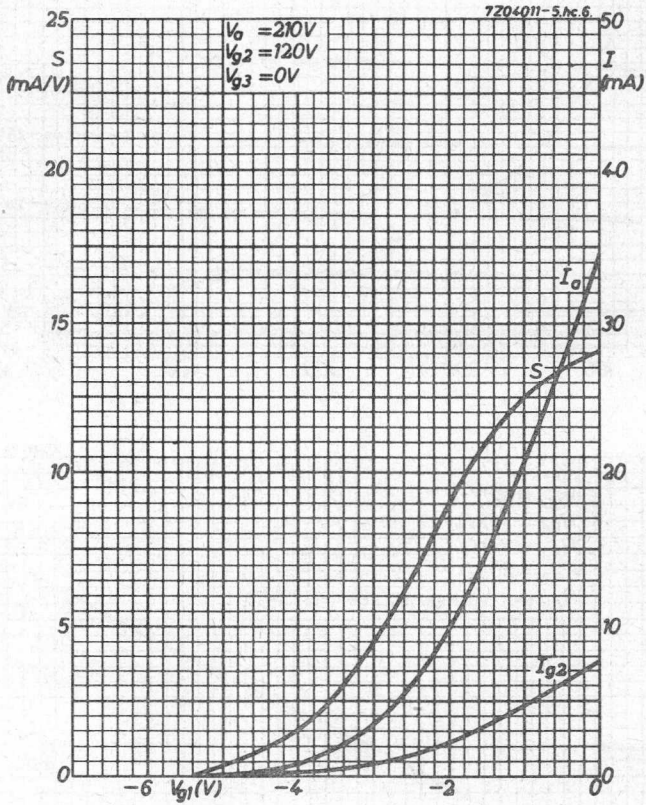


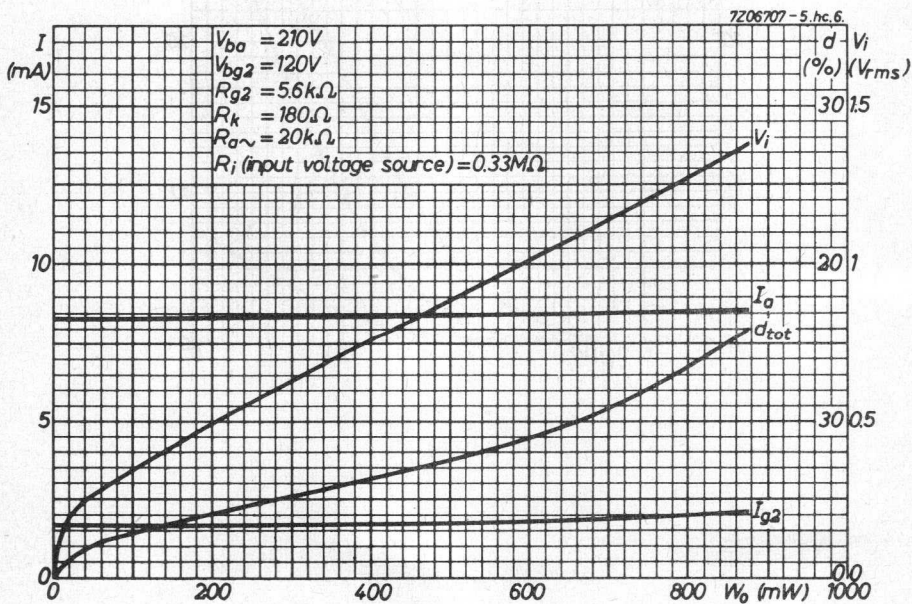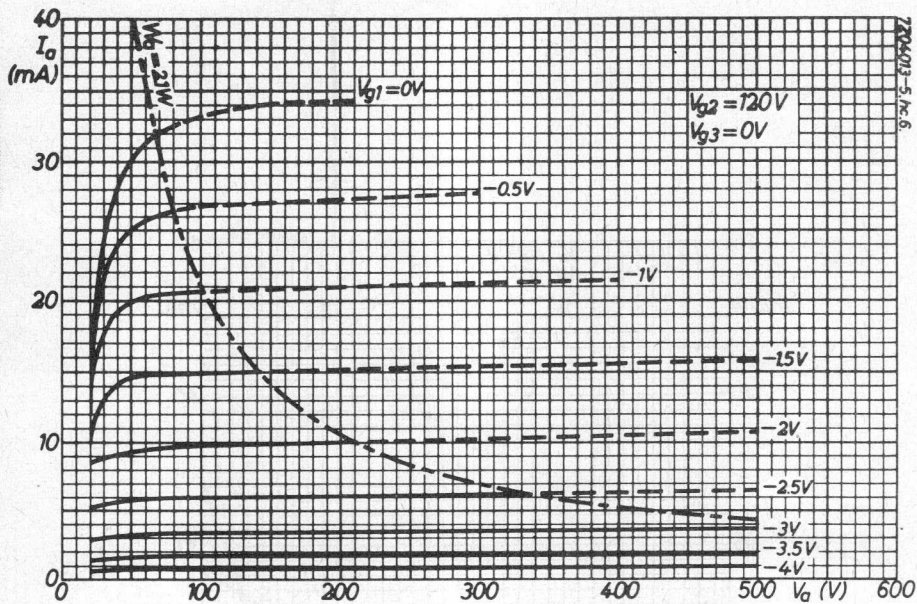


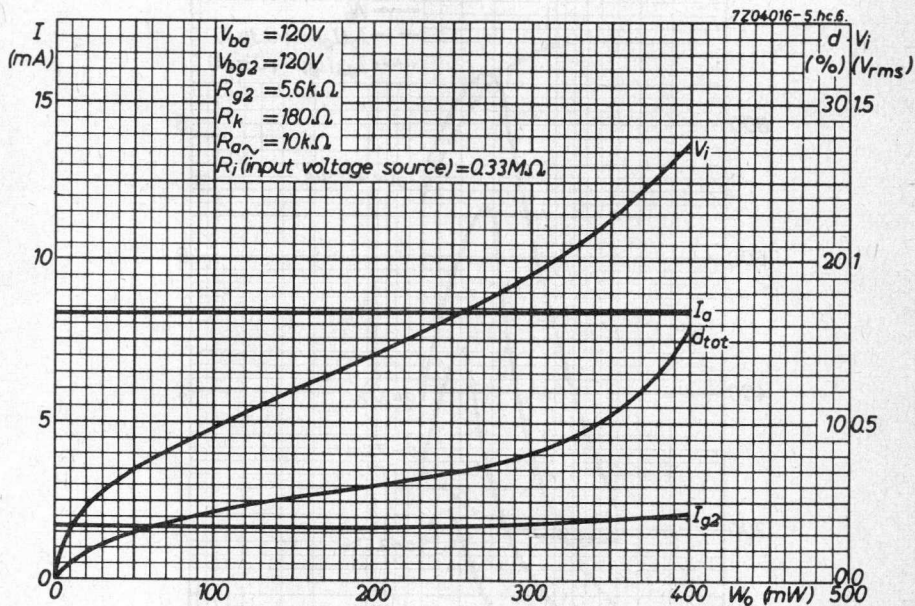


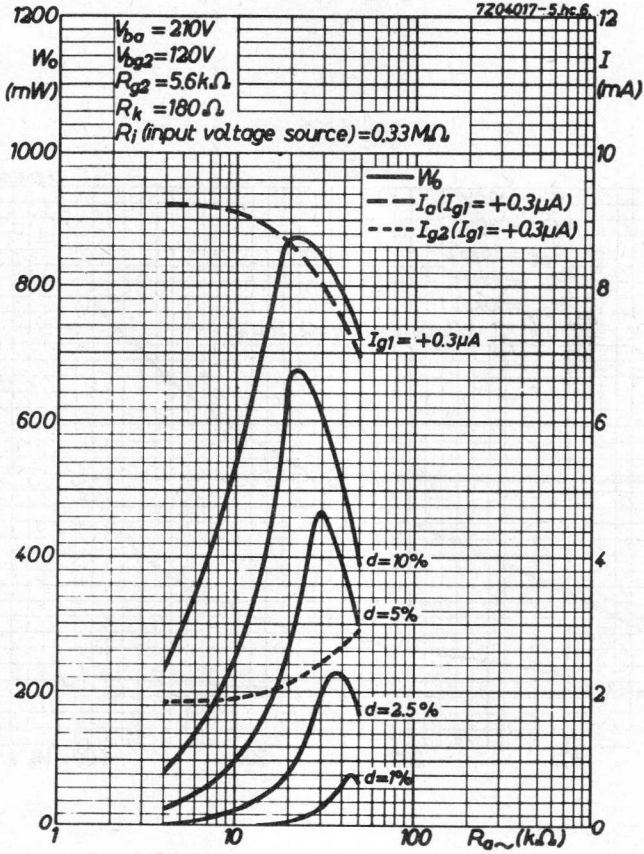

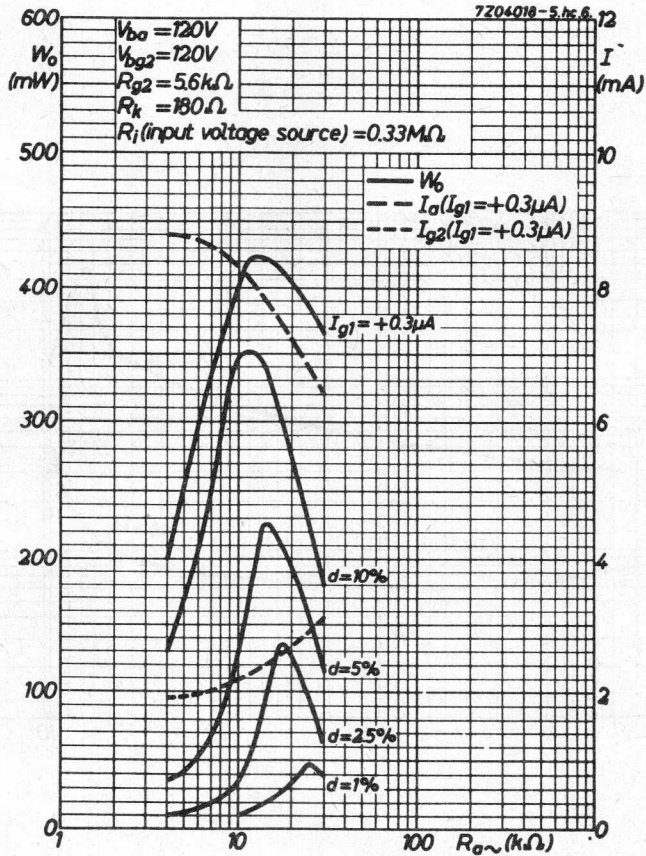

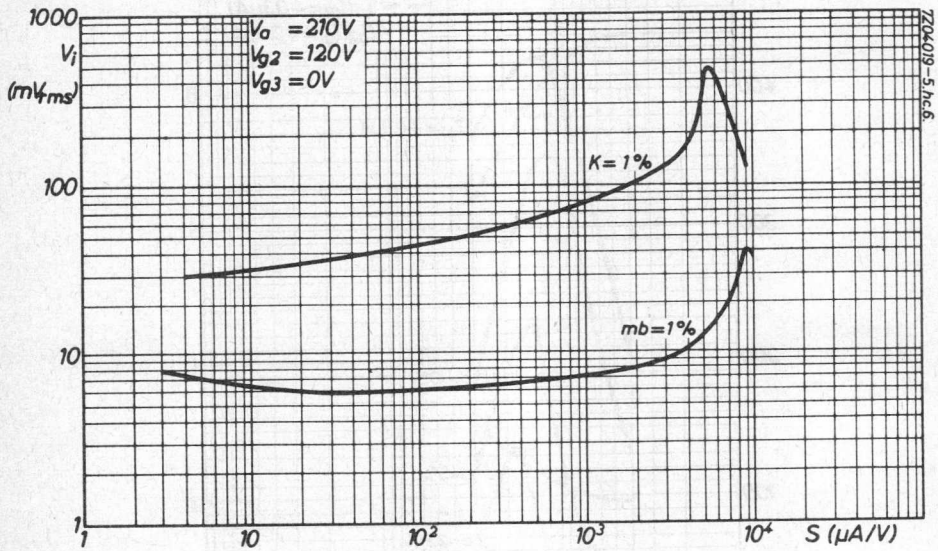

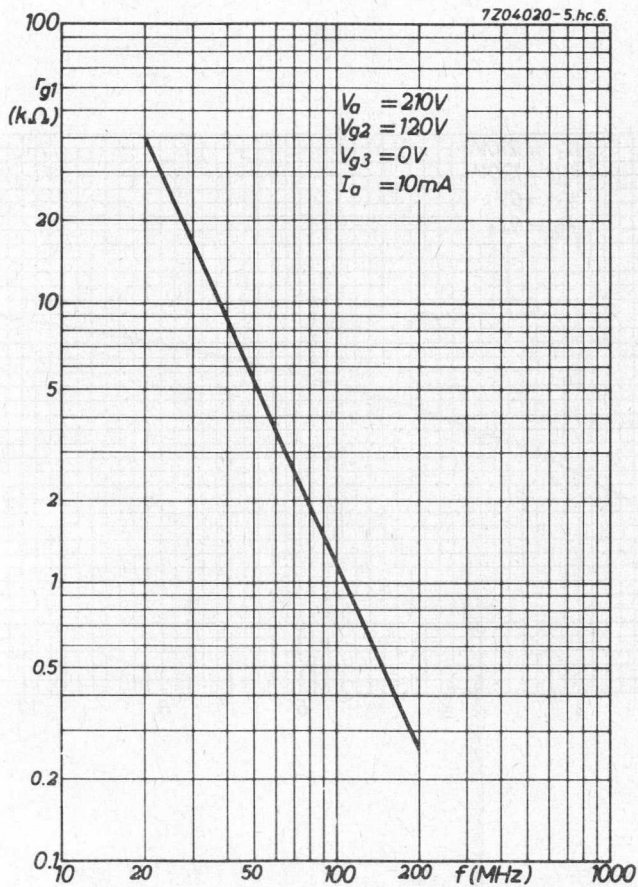

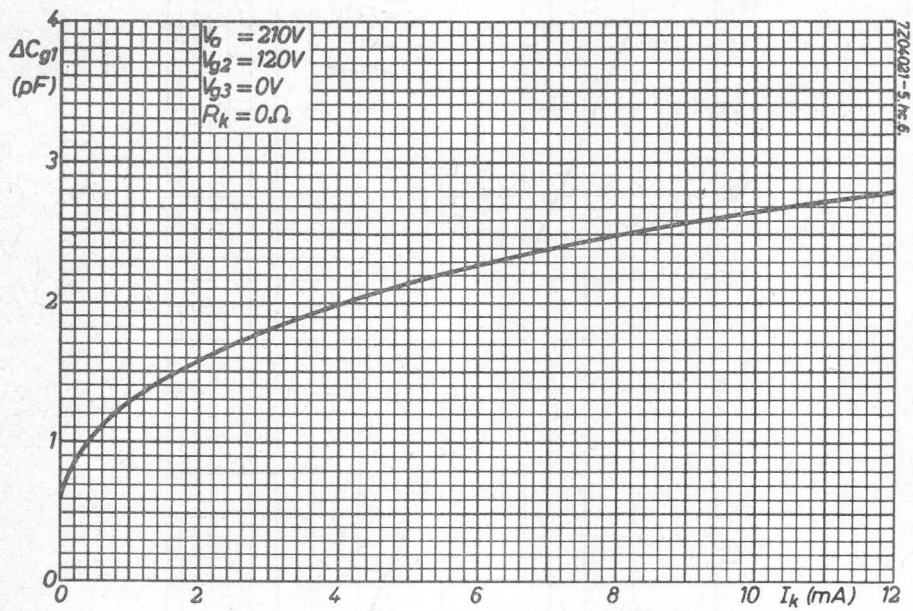

S.Q. TUBE

Output pentode designed for use in telephone equipment.



QUICK REFERENCE DATA

Life test	10 000 hours	
Base	Noval	
Heating	Indirect A.C. or D.C. Series or parallel supply	
Heater voltage	V_f	18 V
Heater current	I_f	130 mA
Anode current	I_a	20 mA
Output power, Class A	W_o	1 W

DIMENSIONS AND CONNECTIONS

Dimensions in mm

Base: Noval



7Z2 6326

CHARACTERISTICS

Column I Nominal value or setting of the tube

II Range values for equipment design: Initial spread

III Range values for equipment design: End of life

		I	II	III	
Heater voltage	V_f	18			V
Heater current	I_f	130	123 - 137		mA
Anode voltage	V_a	210			V
Grid No.3 voltage	V_{g3}	0			V
Grid No.2 voltage	V_{g2}	210			V
Cathode resistor	R_k	120			Ω
Anode current	I_a	20	17 - 23	min. 13.5	mA
Grid No.2 current	I_{g2}	5.3	4.1 - 6.5	min. 3.1	mA
Mutual conductance	S	11	9.5 - 12.5	min. 7.8	mA/V
Internal resistance	R_i	0.3	min. 0.2		$M\Omega$
Output power	W_o	1.0	min. 0.7		W
Load resistance $R_{a\sim} = 15 k\Omega$					
Total distortion $d_{tot} = 5\%$					
Total distortion at $W_o = 0.1 W$	d_{tot}	1.2	max. 2		%
Amplification factor	μ_{g2g1}	36			
Equivalent noise resistance (R.F.)	R_{eq}	1.2			$k\Omega$
<u>Negative grid current</u>	$-I_{g1}$		max. 0.5	max. 1.0	μA
<u>Cut-off voltage</u>	$-V_{g1}$		max. 8.5		V
Anode current	I_a	0.5			mA
<u>Hum voltage</u>	V_{g1}		max. 0.2		mV_{RMS}
$R_{g1} = 0.5 M\Omega$					
Heater centre earthed					
<u>Insulation resistance between two electrodes</u>	R_{ins}		min. 100		$M\Omega$

7Z2 7432

CHARACTERISTICS (continued)Leakage current between cathode and heaterVoltage between cathode and heater $V_{kf} = 120$ V

Cathode heating time

Cathode cooling time

	I	II	
I_{kf}		max. 24	μA
	16	max. 22	sec
	15	min. 7	sec
CAPACITANCES			
Anode to grid No.2, grid No.3, cathode, heater and screen	C_{a/g_2g_3kfs}	6.5	5.8 - 7.2 pF
Grid No.1 to grid No.2, grid No.3, cathode, heater and screen	C_{g_1/g_2g_3kfs}	11.2	10 - 12.4 pF
Grid No.1 to grid No.2, grid No.3, cathode, heater and screen	C_{g_1/g_2g_3kfs}	14.3	pF
Cathode current $I_k = 25$ mA			
Anode to grid No.1	C_{ag_1}		max.0.02 pF
Grid No.1 to heater	C_{g_1f}		max. 0.2 pF
Cathode to heater	C_{kf}	4.2	pF
Radiation capacitance: Anode to surrounding box, inner dia. 52 mm, height 98 mm	C_{ra}		max.0.06 pF
Radiation capacitance: Grid No.1 to surrounding box, inner dia. 52 mm, height 98 mm	C_{rg_1}		max.0.12 pF

LIFE

Production samples are tested to be within the end of life values (column III) during 10 000 hours.

LIMITING VALUES (Design centre rating system)

Anode voltage	V_{a0}	max. 550 V
	V_a	max. 210 V
Anode dissipation	W_a	max. 4.5 W
Grid No.2 voltage	V_{g20}	max. 550 V
	V_{g2}	max. 210 V
Grid No.2 dissipation	W_{g2}	max. 1.2 W
Cathode current	I_k	max. 30 mA
Voltage between cathode and heater	V_{kf}	max. 120 V
Bulb temperature	t_{bulb}	max. 170 °C
Grid resistor, automatic bias	R_{g1}	max. 0.5 MΩ
fixed bias	R_{g1}	max. 0.25 MΩ

OPERATING CHARACTERISTICSAs pre-amplifier


Anode voltage	V_a	210 V
Grid No.3 voltage	V_{g3}	0 V
Grid No.2 voltage	V_{g2}	210 V
Cathode resistor	R_k	180 Ω
Anode resistance	$R_{a\sim}$	20 kΩ
Anode current	I_a	15 mA
Grid No.2 current	I_{g2}	4 mA
Mutual conductance	S	10 mA/V
Internal resistance	R_i	0.4 MΩ
Voltage gain	g	5.15 Neper

OPERATING CHARACTERISTICS (continued)


As output tube class A

Anode voltage	V_a	210 V
Grid No.3 voltage	V_{g3}	0 V
Grid No.2 voltage	V_{g2}	210 V
Cathode resistor	R_k	120 Ω
Anode current	I_a	20 mA
Grid No.2 current	I_{g2}	5.3 mA
Mutual conductance	S	11 mA/V
Internal resistance	R_i	0.3 $M\Omega$
Anode resistance	$R_{a\sim}$	15 $k\Omega$
Input voltage	V_i	0.95 V_{RMS}
Output power	W_o	1 W
Total distortion	d_{tot}	5 %


7203996-5.h.a.12

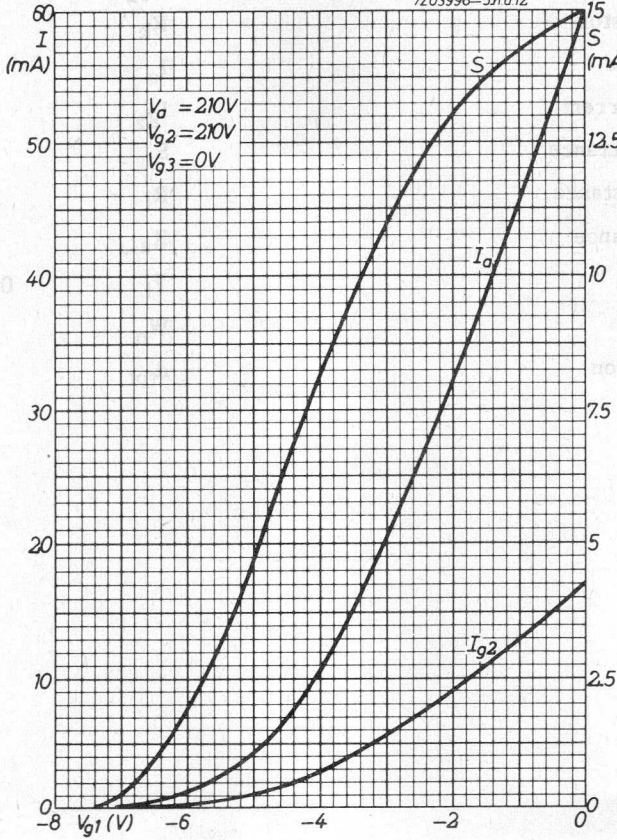


7Z03993-5.ha12

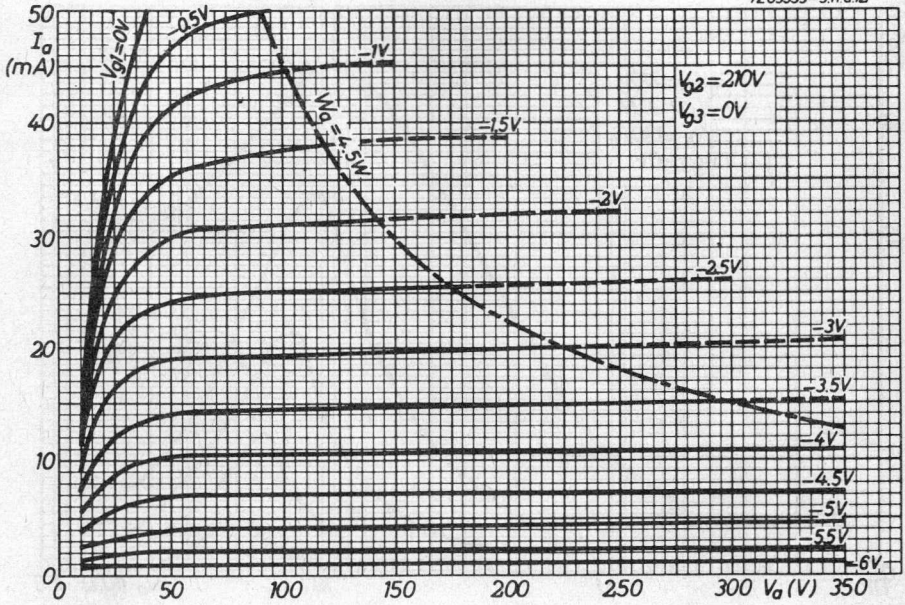


7Z03995-5.ha12

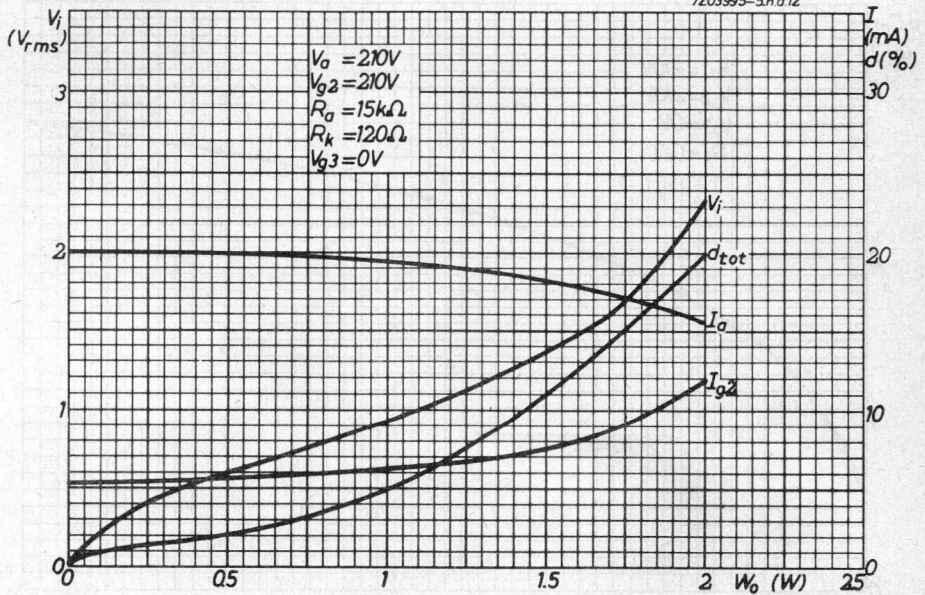

7203994-5.h.a.12

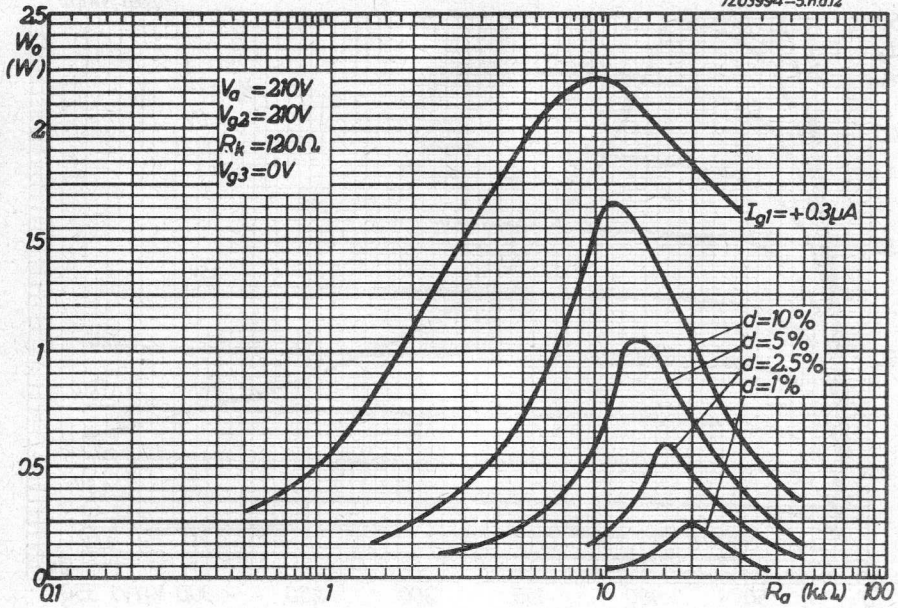


7203997-5.h.a.12

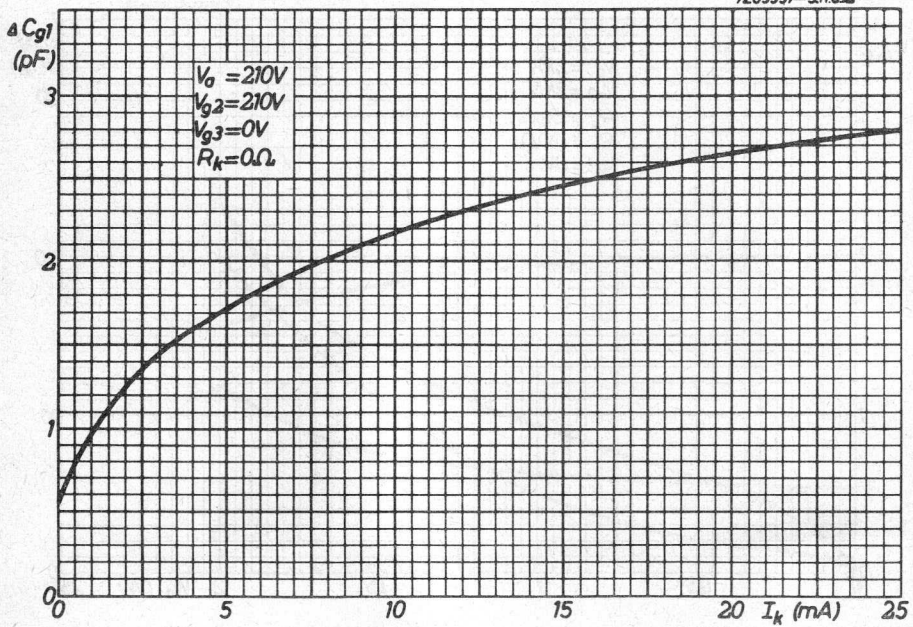

Miscellaneous Devices





Macellari, Devices



NOISE DIODE

Noise diode for use as a standard noise source for metric waves.

DIMENSIONS AND CONNECTIONS

Dimensions in mm

Base: Noval



HEATING

Direct by A.C. or D.C.

CAPACITANCE

Anode to filament	C_{af}	2.2 pF
-------------------	----------	--------

TYPICAL CHARACTERISTICS

Filament voltage	V_f	1.85 V
Filament current	I_f	2.5 A
Anode voltage	V_a	100 V
Anode current	I_a	15 mA

LIMITING VALUES (Absolute max. rating system)

Filament voltage	V_f	max.	2 V
Anode voltage	V_a	max.	150 V
Anode current	I_a	max.	20 mA
Anode dissipation	W_a	max.	3 W

7Z2 5401

REMARKS



The tube having a tungsten cathode, the emission and consequently the noise voltage at the anode resistor can be varied by adjusting the filament voltage. Care should be taken that the anode voltage is sufficiently high to maintain saturation at the entire control range of the filament voltage.


In order to realize small self-inductance of the electrode leads, both the extremities of the filament and the anode are each connected to three pins of the base (see fig. p.1).

The thermal inertia consequent upon the thickness of the filament is sufficient to prevent fluctuations in the saturation current when an A.C. supply is used. In this case the filament voltage should be very well stabilised.

As a result of the diode's high internal resistance the anode voltage need not be stabilised.

When a load resistor of 50Ω is employed, a noise factor of 20 (13 dB) can be measured without exceeding the maximum permissible anode current and anode dissipation. When the load resistor is enlarged, it is possible to measure higher noise factors.

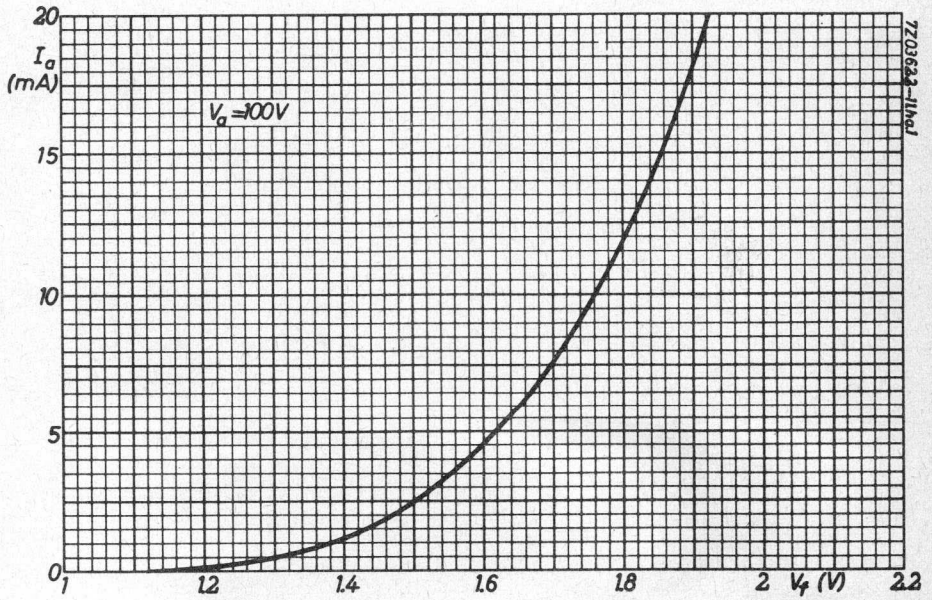
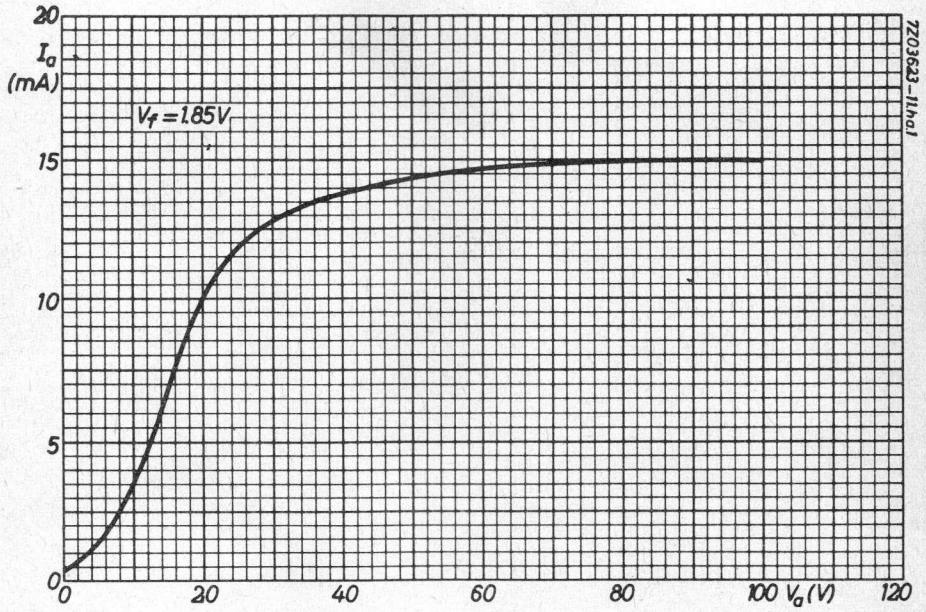




THERMOCOUPLES



Indirectly heated thermocouples in subminiature construction.

DIMENSIONS AND CONNECTIONS

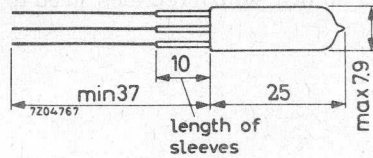

CHARACTERISTICS AND LIMITING VALUES (Absolute max. rating system)

		TH71	TH73	TH75	
Heater current	I_f	0 to 15	0 to 75	0 to 300	mA
Heater current ¹⁾	I_f	0 to 5	0 to 20	0 to 100	mA
Heater current at $E = 12$ mV	I_f	10	40	200	mA
Heater current ($T = \text{max. } 1$ m)	I_f	max. 20	100	350	mA
Heater resistance	R_f	68	7.0	1.2	Ω
Resistance of thermocouple	R_{TH}	6.0	3.5	3.5	Ω
Response time ²⁾	T	10	10	10	s
at heater current $I_f =$		10	40	200	mA
Heater to thermocouple voltage	V_f/TH	max. 100	100	100	V



¹⁾ In approximately this range V_0 is proportional to the square of I_f

²⁾ Time between the moment of switching on of I_f and the moment of reaching max. voltage (See page B).


REMARK


The electrical characteristics of the types TH71, TH73 and TH75 are identical to those of the types TH1, TH3, TH5 and TH91, TH93 and TH95 respectively and therefore can be used as replacement for these types.

GENERAL INFORMATION

The "hot" weld of the thermocouple consists of an iron constantan junction. The "cold" welds are iron to copper and constantan to copper junctions inside the vacuum envelope. The tube has copper leads. The measuring results are practically independent of the ambient temperature of the tube so that no corrections need to be made for the temperature of the "cold" weld.

Temperature (°C)	EMF (mV)	Resistance (Ω)
0	0.00	100
100	1.00	100
200	2.00	100
300	3.00	100
400	4.00	100
500	5.00	100
600	6.00	100
700	7.00	100
800	8.00	100
900	9.00	100
1000	10.00	100

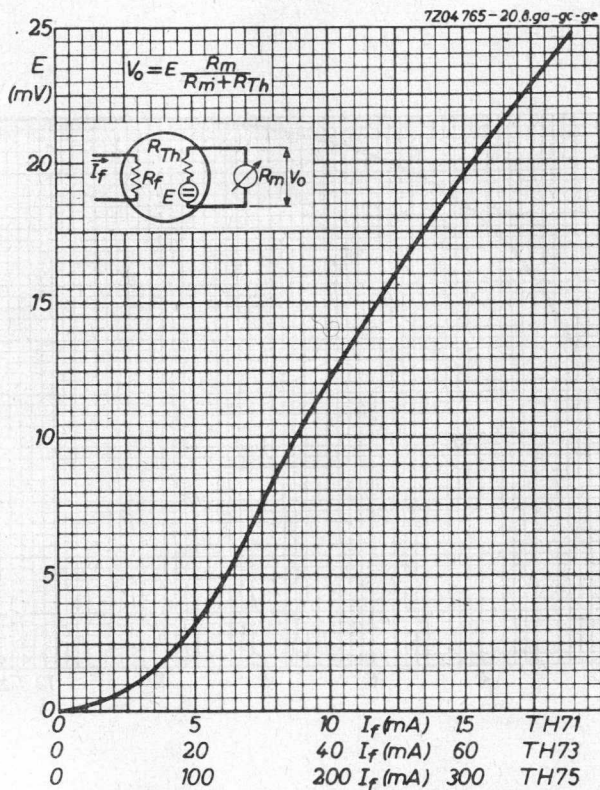

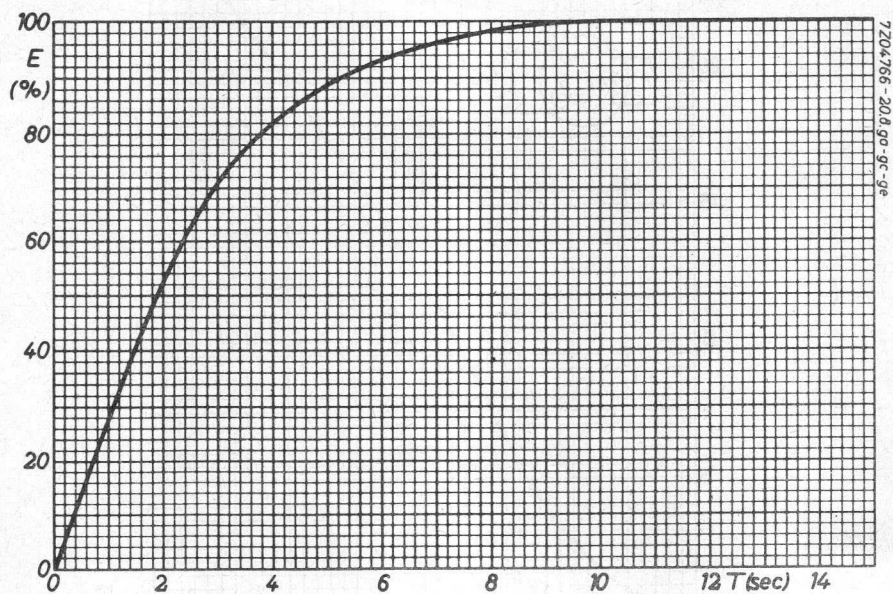

INDIRECTLY HEATED THERMOCOUPLES




CHARACTERISTICS AND LIMITING VALUES (Absolute max. rating system)

	TH91	TH92	TH93	TH94	TH95
Heater current range	I_f	0 to 30	0 to 75	0 to 150	0 to 300
Heater current range	1) I_f	0 to 10	0 to 20	0 to 50	0 to 100
Heater current for $E = 12 \text{ mV}$	I_f	20	40	100	200
Heater current	2) $I_f \text{ max.}$	40	100	200	350
Heater resistance	R_f	25	7.0	2.2	1.2
Thermocouple resistance	R_{th}	6.0	3.5	3.5	3.5
Heating time at $I_f =$	3)	10	10	10	10
Voltage between heater and thermocouple		10	40	100	200
	$V_f - T_{h \text{ max.}}$	100	100	100	100

Dimensions in mm

DIMENSIONS AND CONNECTIONS


Base: 7 pin miniature






- 1) In this range V_0 is proportional to the square of I_f
- 2) During max. 1 minute
- 3) Time between the moment of switching on of I_f and the moment of reaching max. voltage (see page B).

TH91 to TH95

7Z03560-20&ia-ie

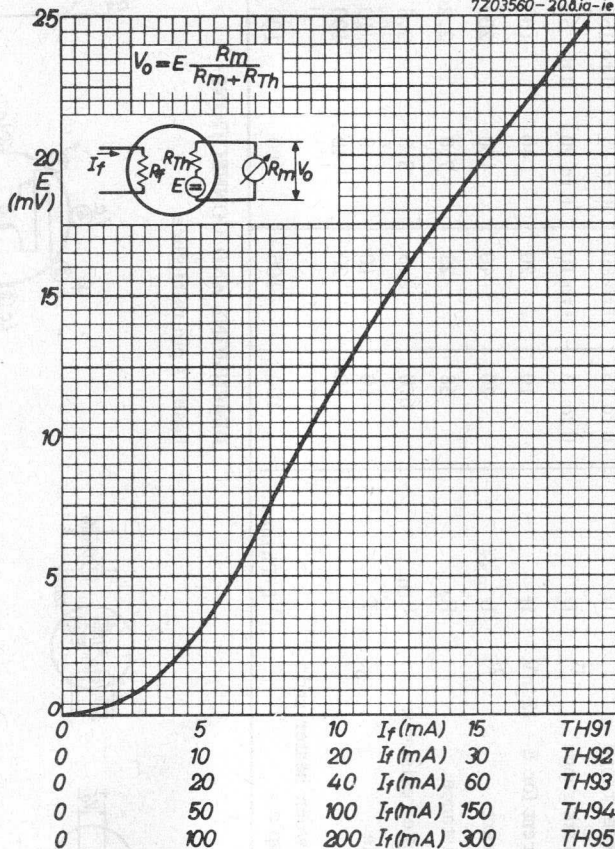

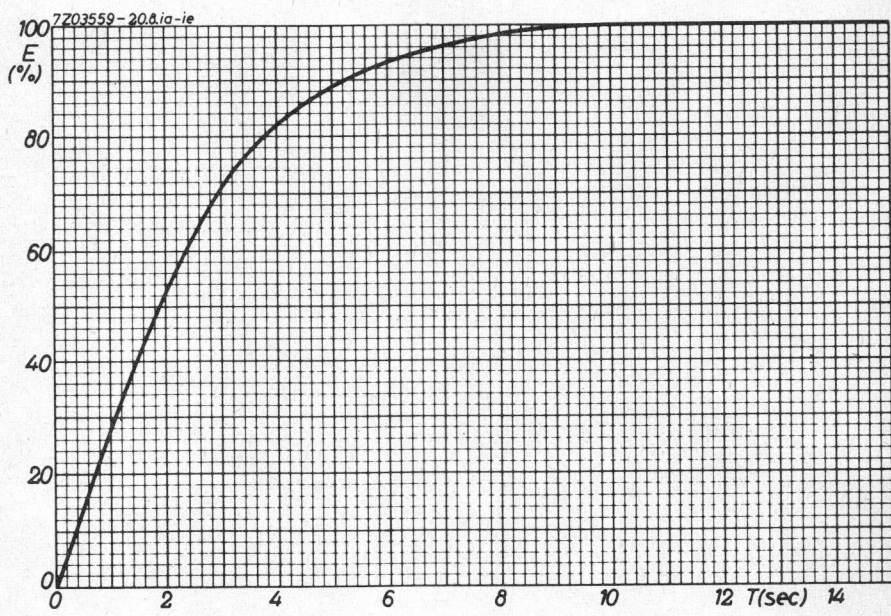

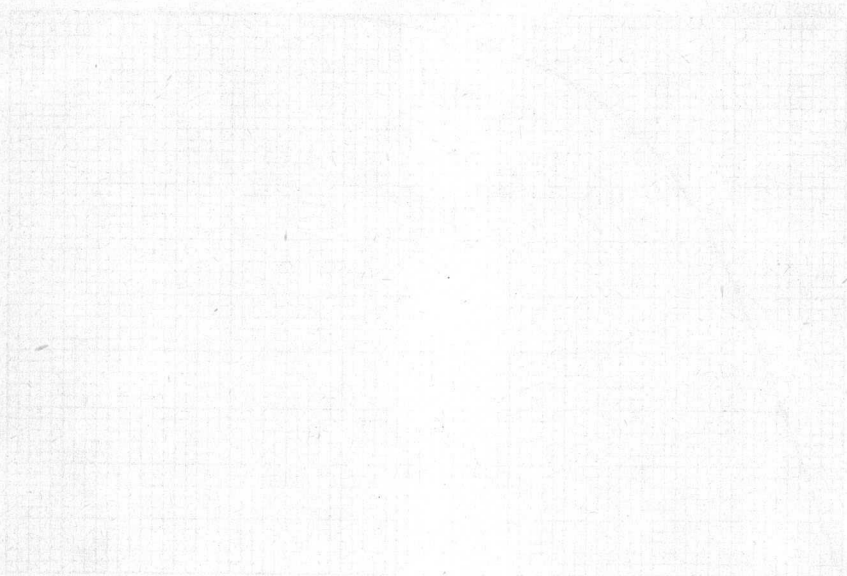

VIBRATING CAPACITOR

Vibrating membrane capacitor in evacuated envelope to be driven by a high-frequency electric field.

Application: D.C. to A.C. converter, e.g. in dosimeters, pH meters and electrometer equipment, where a very high input resistance is of paramount importance.

Equipment measuring currents of 500 electrons per second have been realised.

QUICK REFERENCE DATA

Contact potential	-50 to +50 mV
Short term drift of contact potential	< 100 μ V
Insulation	> 10 ¹⁵ Ω
Outline dimensions:	
overall length	65 mm
diameter	28 mm

MECHANICAL DATA



Base: Magnoval, gold plated pins

C_m = measuring capacitor

C_{dr} = driving capacitor


Operating position: any

Dimensions in mm

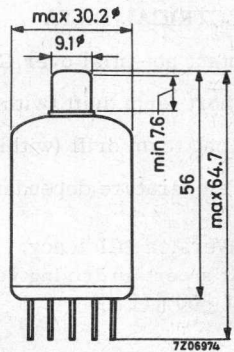

7Z2 7703

PRINCIPLE OF OPERATION

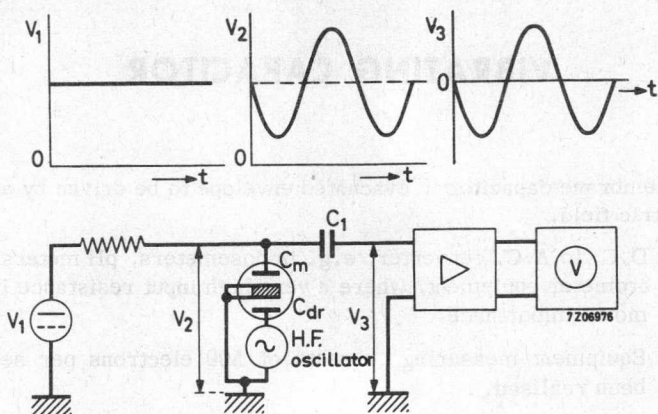

The D.C. voltage to be measured is connected to capacitor C_m . The earthed membrane vibrates in its own resonance frequency as a result of an H.F. electrical field between the electrodes of capacitor C_{dr} . So the D.C. voltage on capacitor C_m is modulated in the resonance frequency of the membrane. Capacitor C_1 insulates the D.C. source from the A.C. amplifier.

LIMITING VALUES (Absolute max. rating system)

D.C. voltage on C_m	max. 25 V
Conversion efficiency	
$\frac{\text{R.M.S. output voltage}}{\text{D.C. input voltage}}$	max. 40 % ¹⁾

ELECTRICAL DATA

Contact potential over C_m	-50 to +50 mV
Short term drift (within 1 day)	0.1 mV
Long term drift (within 1 month)	1 mV
Temperature dependance	20 $\mu\text{V}/^\circ\text{C}$

Conversion efficiency:

At a certain driving voltage the conversion efficiency will show a max. spread of $\pm 60\%$ (1:4)

¹⁾ Above 40 % it is possible that two capacitor plates will touch each other and will be damaged.

ELECTRICAL DATA (continued)

Driving voltage:

There can always be found a value of the H.F. driving voltage at which all capacitors have a conversion efficiency between 10% and 40%. ¹⁾

Insulation resistance between any two capacitor terminals	> 10 ¹⁵ Ω ²⁾
Resonance frequency of the membrane	5.3 to 6.3 kHz
Drift	1.5 %
Temperature dependance	± 1 Hz/°C
Capacitances of C _m and C _{dr}	35 pF
Temperature dependance between -10 and +60 °C	ΔC 1 pF

SHOCK AND VIBRATION RESISTANCE

The following test conditions are applied to assess the mechanical quality of the tube. These conditions are not intended to be used as normal operating conditions.

Shock

The tube is subjected 5 times in each of 4 positions to an acceleration of 500 g supplied by an NRL shock machine with the hammer lifted over an angle of 30°.

Vibration

The tube is subjected to a vibration of 15 to 1500 Hz with an acceleration of 2.5 g.

APPLICATION NOTES

The capacitive drive opens the possibility to use as driving signal for the membrane a high frequency signal amplitude-modulated with the resonance frequency of the vibrating membrane.

Since in that case there is a great difference between the frequency of the driving signal and the modulation frequency of the voltage to be measured, the stray influences of the driving signal can easily be kept away from the measuring amplifier. In addition, a high frequency drive simplifies design and execution of the driving oscillator

- 1) For instance in an apparatus realised with the circuit shown in Fig.2, it turned out that all capacitors have a conversion efficiency between 10 and 40% at a voltage over L₁ of 1 V_{RMS}.
- 2) Under standard atmospheric conditions as defined in I.E.C. publication 68-1, i.e. any combination of temperature, humidity and pressure within the following limits:

Temperature	+15 to +35 °C
Relative humidity	45 to 75 %
Air pressure	860 to 1060 mbar

7Z2 7705

EXAMPLE OF A DRIVING OSCILLATOR

Operating principle

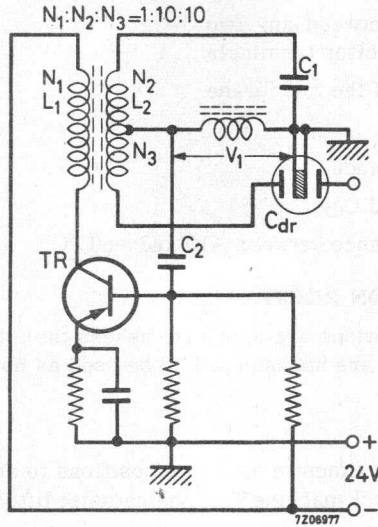


Fig.1

The driving capacitor (C_{dr}) is incorporated in an impedance bridge that determines the feedback to the amplifier transistor. Capacitance C_1 has been given a slightly larger value than that of capacitor C_{dr} in its quiescent state. Due to this the fed-back A.C. voltage V_1 has the proper phase and amplitude to cause the circuit to oscillate in a frequency that is mainly determined by the circuit $L_2 C_1 C_{dr}$.

The electric attractive force between the capacitor plates of C_{dr} makes the membrane move towards the fixed plate of C_{dr} as a result of which its capacitance increases, the transistor receives less feedback and the oscillator voltage decreases.

The phases and amplitudes of the electrical and the mechanical forces on the membrane and of the feedback factor are such that the membrane begins to vibrate in its resonance frequency, while the H.F. voltage is modulated in amplitude with this frequency.

Since it is very difficult to realize this circuit in such a way that a stable operation is ensured, it is advisable to add some components for automatical adjustment of the capacitance C_1 .

See the following circuit.

EXAMPLE OF A DRIVING OSCILLATOR (continued)

Practical circuit


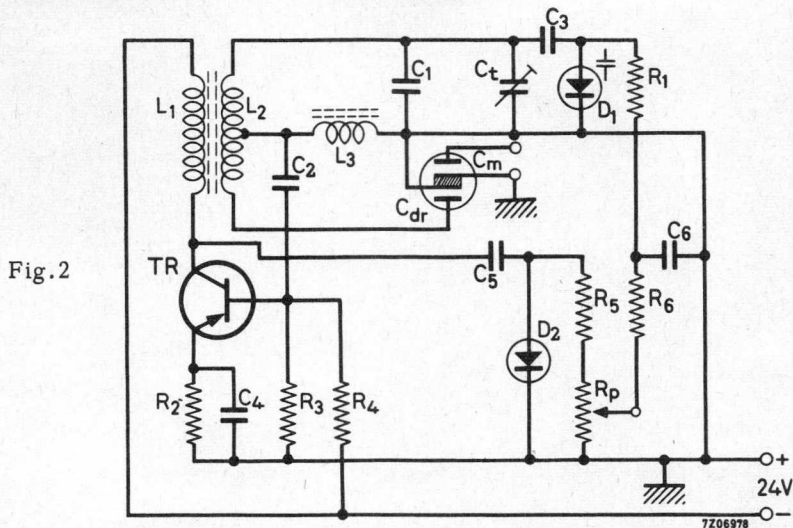


Fig. 2

$C_1 = 12 \text{ pF mica}$	$R_1 = 33 \text{ k}\Omega$	$L_1 = 2 \text{ }\mu\text{H}$
$C_2 = 1500 \text{ pF}$	$R_2 = 3.3 \text{ k}\Omega$	$L_2 = 1 \text{ mH}$
$C_3 = 10 \text{ pF mica}$	$R_3 = 4.7 \text{ k}\Omega$	$L_3 = \text{R.F. choke}$
$C_4 = 3900 \text{ pF}$	$R_4 = 1 \text{ k}\Omega$	$T_r = \text{AFZ12}$
$C_5 = 22 \text{ pF mica}$	$R_5 = 100 \text{ k}\Omega$	$D_1 = \text{BA102}$
$C_6 = 330 \text{ pF}$	$R_6 = 33 \text{ k}\Omega$	$D_2 = \text{AA119}$
$C_t = 25 \text{ pF max.}$	$R_p = 1 \text{ M}\Omega$	$C_{dr}C_m = \text{XL7900/00}$

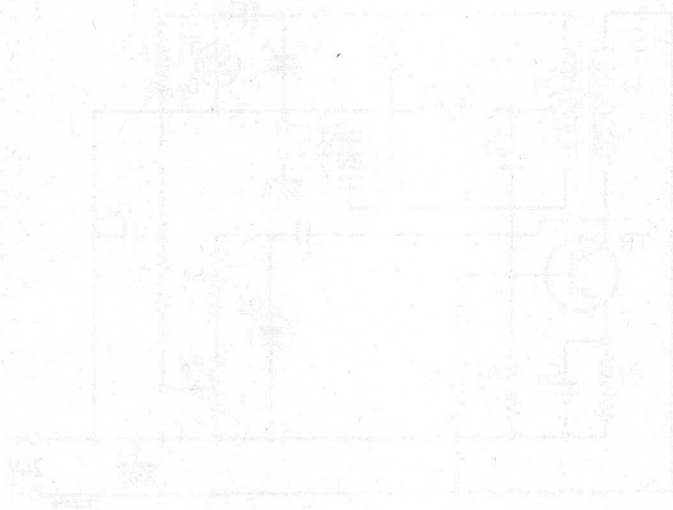

1. The circuit is a power supply circuit.
 2. The transformer is a step-down transformer.
 3. The primary winding is connected to the AC source.
 4. The secondary winding is connected to the load.
 5. The circuit includes a resistor, a capacitor, and a motor.
 6. The circuit is designed to provide a constant voltage to the load.
 7. The circuit is a simple and effective power supply circuit.
 8. The circuit is suitable for use in a variety of applications.
 9. The circuit is easy to construct and maintain.
 10. The circuit is a good example of a basic power supply circuit.

ELECTROMETER TUBE

Subminiature electrometer triode


QUICK REFERENCE DATA

Filament voltage	V_f	1.25 V
Anode voltage	V_a	9 V
Anode current	I_a	100 μ A
Grid current	$-I_g$	$< 12.5 \times 10^{-14}$ A

DIMENSIONS AND CONNECTIONS

Dimensions in mm

Base: Subminiature

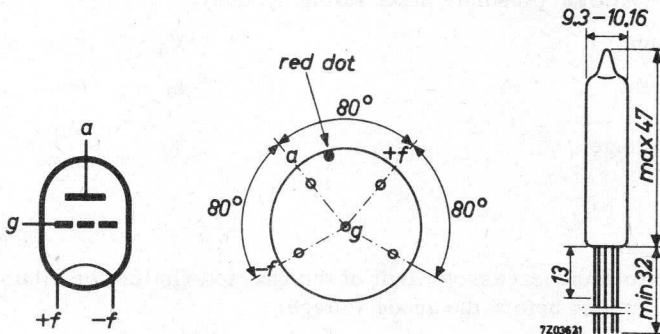

Directly soldered connections to the leads of this tube must be at least 13 mm from the seals and any bending of the leads must be at least 1.5 mm from the seals

7Z2 5376

HEATING: Direct by D.C.

Filament voltage	V_f	1.25 V
Filament current	I_f	13 mA

CHARACTERISTICS AND RANGE VALUES

Anode voltage	V_a	9	V
Grid voltage	V_g	-2.5	-2 to -3.75 V
Anode current	I_a	100	μA
Transconductance	S	80	70 to 90 $\mu A/V$
Amplification factor	μ	2.0	1.7 to 2.7
Grid current	$-I_g$	8.5×10^{-14}	$< 12.5 \times 10^{-14}$ A ¹⁾
Crossover point ²⁾	V_g	-1.3	< -1.6 V
Anode current at crossover point	I_a	-	> 160 μA

LIMITING VALUES (Absolute max. rating system)


Anode voltage	V_a	max.	25 V
Anode current	I_a	max.	250 μA
Filament voltage	V_f	max.	1.5 V
		min.	1.1 V


REMARKS

1. In order to avoid excessive drift of the characteristics the filament voltage must be applied before the anode voltage.
2. To avoid contamination of the glass, the tube should not be removed from its protective envelope until it is mounted into the equipment.

¹⁾ Valid only in darkness

²⁾ The "crossover point" is the point at which the direction of the grid current is reversed

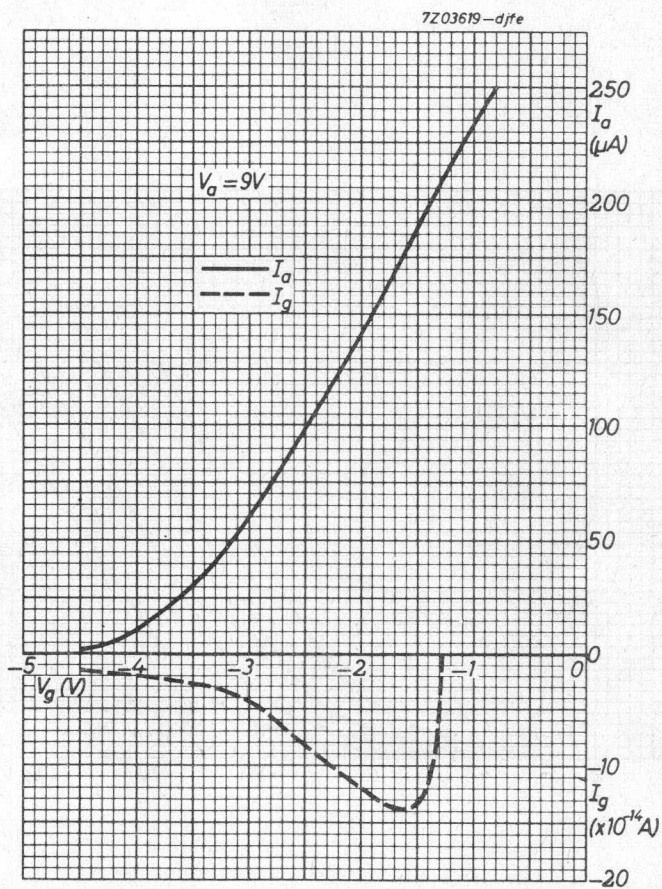

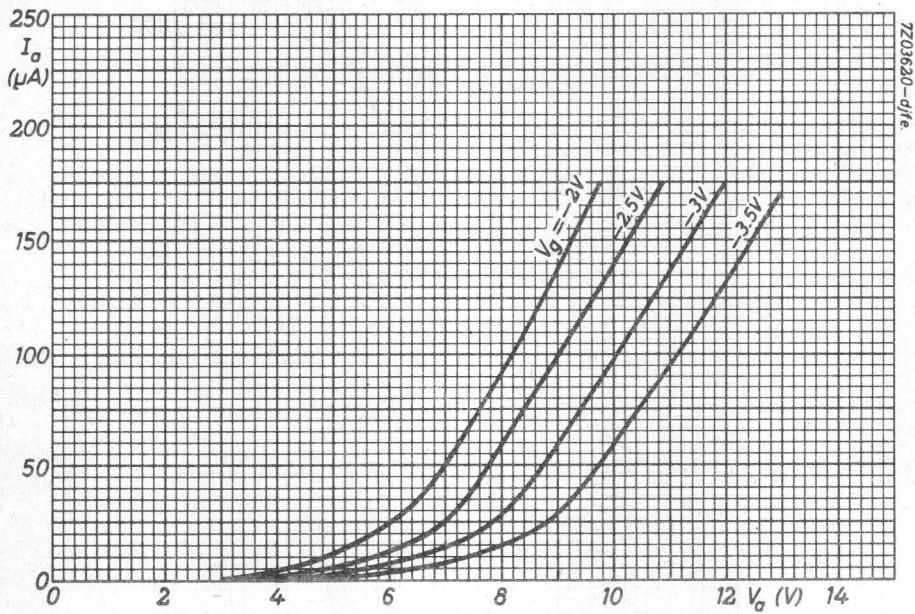

7203620-d/f/e

ELECTROMETER TUBE


Subminiature electrometer tetrode

QUICK REFERENCE DATA		
Filament voltage	V_f	1.25 V
Anode voltage	V_a	4.5 V
Grid No. 2 voltage	V_{g2}	-3.2 V
Anode current	I_a	20 μ A
Grid No. 2 current	I_{g2}	$< 6 \times 10^{-15}$ A

DIMENSIONS AND CONNECTIONS

Dimensions in mm

Base: Subminiature

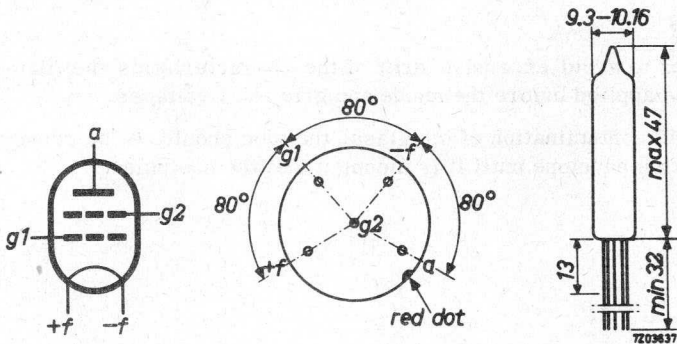

Directly soldered connections to the leads of this tube must be at least 13 mm from the seal and any bending of the leads must be at least 1.5 mm from the seal.

HEATING: Direct by D.C.

Filament voltage

 V_f 1.25 V

Filament current

 I_f 13 mA

7Z2 5378

CHARACTERISTICS AND RANGE VALUES

Anode voltage	V_a	4.5	V
Grid No.2 voltage	V_{g2}	-3.2	-2 to -4.5 V
Grid No.1 voltage	V_{g1}	3.0	2 to 4 V
Anode current	I_a	20	μA
Grid No.2 current	$-I_{g2}$	2.5×10^{-15}	$< 6 \times 10^{-15}$ A
Transconductance	S_{ag2}	17	10 to 24 $\mu A/V$
Grid No.1 current ¹⁾	I_{g1}	250	μA
Grid No.2 voltage at crossover point ²⁾	V_{g2}	-1.75	V

LIMITING VALUES (Absolute max. rating system)


Anode voltage	V_a	max.	10 V
Cathode current	I_k	max.	300 μA
Filament voltage	V_f	max.	1.5 V
		min.	1.1 V



REMARKS

1. In order to avoid excessive drift of the characteristics the filament voltage must be applied before the anode and grid No.1 voltages.
2. To avoid contamination of the glass, the tube should not be removed from its protective envelope until it is mounted into the equipment.

¹⁾ Only valid in darkness

²⁾ "Crossover point" is the point at which the direction of I_{g2} is reversed
At this point, V_{g2} is at least 0.5 V less negative than its value at $I_a = 20 \mu A$

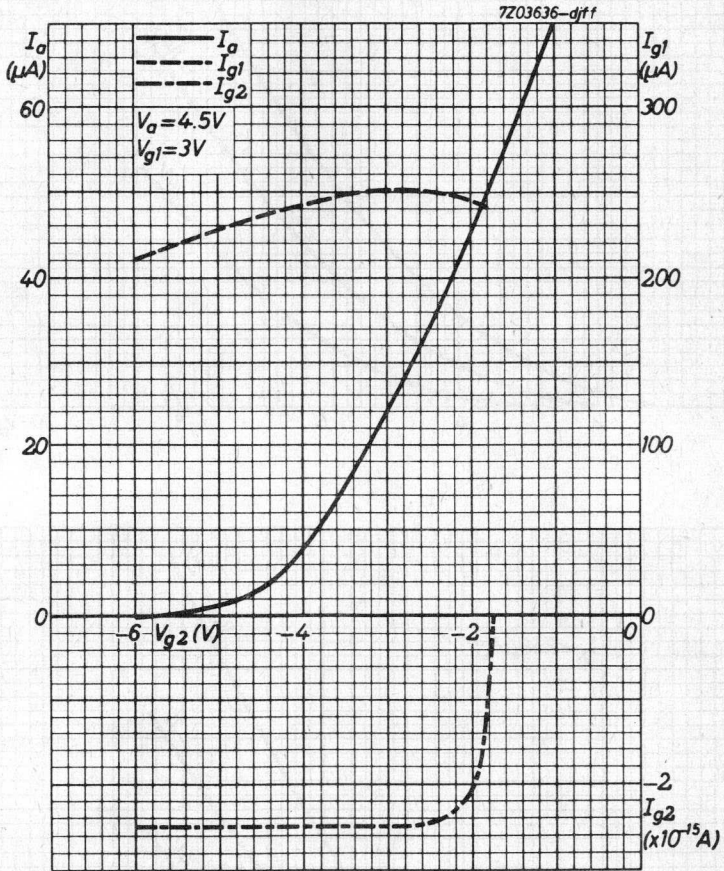

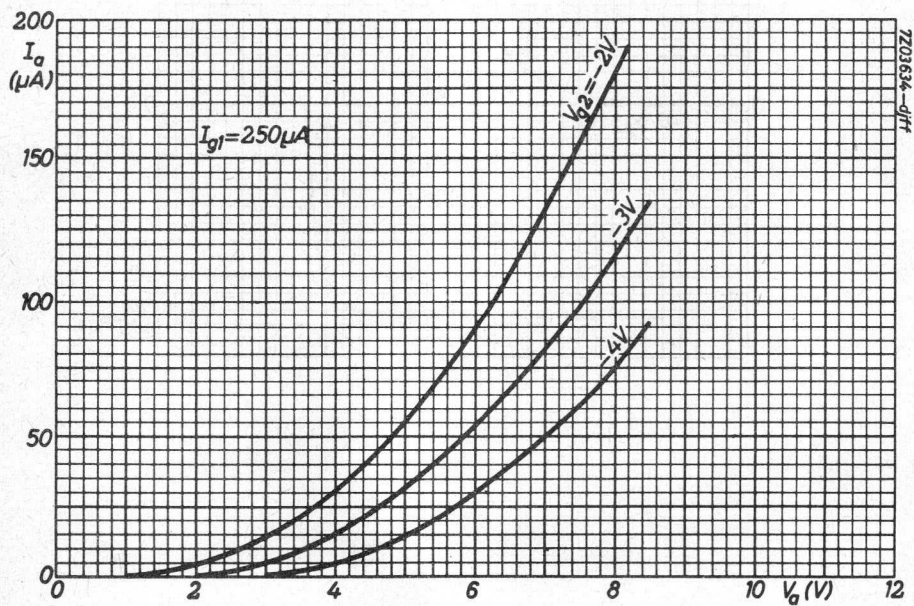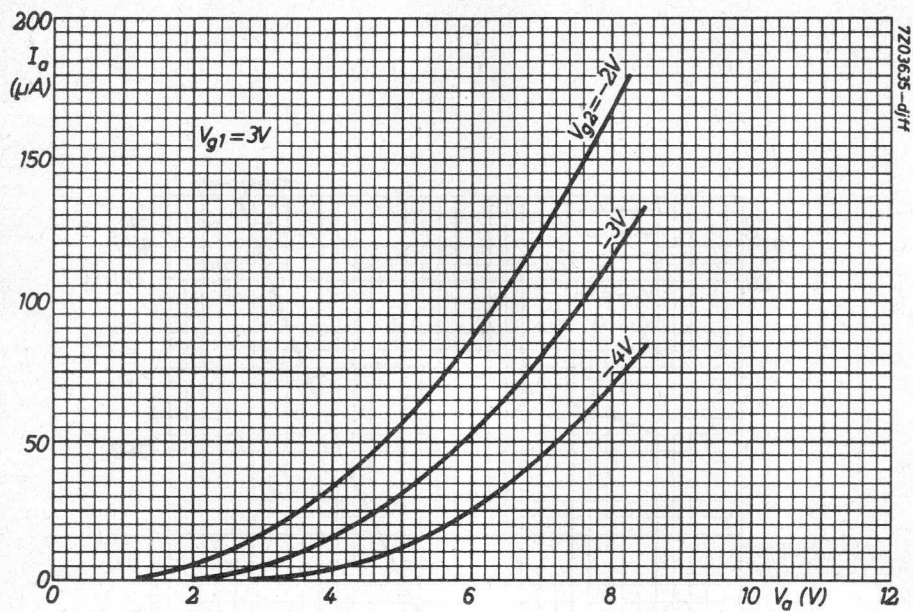

ELECTROMETER TUBE


Subminiature electrometerpentode

QUICK REFERENCE DATA		
Filament voltage	V_f	1.25 V
Anode voltage	V_a	10 V
Anode current	I_a	5.0 μ A
Grid No. 1 current	$-I_{g1}$	$< 8 \times 10^{-15}$ A

DIMENSIONS AND CONNECTIONS

Dimensions in mm

Base: Subminiature

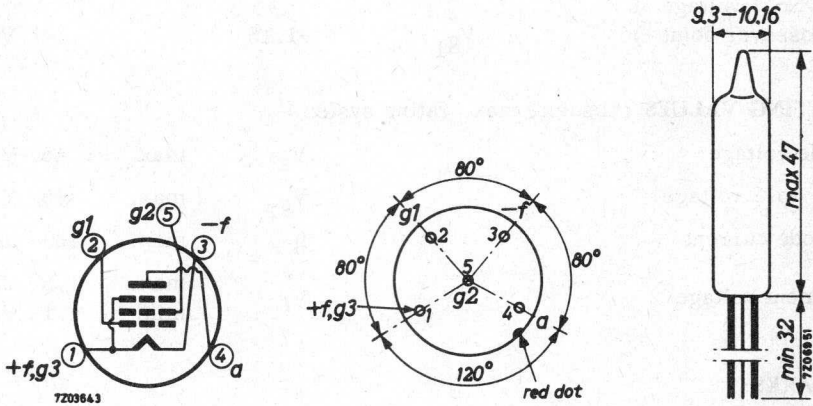

Directly soldered connections to the leads of this tube must be at least 13 mm from the seal and any bending of the leads must be at least 1.5 mm from the seal.

HEATING: Direct by D. C.

Filament voltage

V_f 1.25 V

Filament current

I_f 8.2 mA

722 7437

CAPACITANCES

Anode to all	C_a	4.0 pF
Grid No. 1 to all	C_{g1}	3.0 pF
Anode to grid No. 1	C_{ag1}	0.2 pF

CHARACTERISTICS AND RANGE VALUES

Anode voltage	V_a	10	V
Grid No. 2 voltage	V_{g2}	6.5	5.0 to 7.5 V
Grid No. 1 voltage	V_{g1}	-2.5	V
Anode current	I_a	5.0	μA
Grid No. 2 current	I_{g2}	2.2	1.5 to 3.0 μA
Grid No. 1 current 1)	$-I_{g1}$	3×10^{-15}	$< 8 \times 10^{-15}$ A
Transconductance	S	10.5	8.0 to 15 $\mu A/V$
Internal resistance	R_i	10.5	$M\Omega$
Amplification factor	μ_{ag1}	110	> 80
Grid No. 1 voltage at crossover point 2)	V_{g1}	-1.15	V 3)

LIMITING VALUES (Absolute max. rating system)

Anode voltage	V_a	max.	45 V
Grid No. 2 voltage	V_{g2}	max.	45 V
Cathode current	I_k	max.	180 μA
Filament voltage	V_f	max.	1.5 V
		min.	1.1 V

REMARKS


- In order to avoid excessive drift of the characteristics the filament voltage must be applied before the anode and grid No. 2 voltages.
- To avoid contamination of the glass, the tube should not be removed from its protective envelope until it is mounted into the equipment.


1) Valid only in darkness.


2) The crossover point is the value of V_{g1} at which the direction of I_{g1} is reversed.

3) Measured at $V_f = 1.25$ V, $V_a = 10$ V, $V_{g2} =$ the value at which $I_a = 5 \mu A$ when $V_{g1} = -2.5$ V.


7Z2 5381

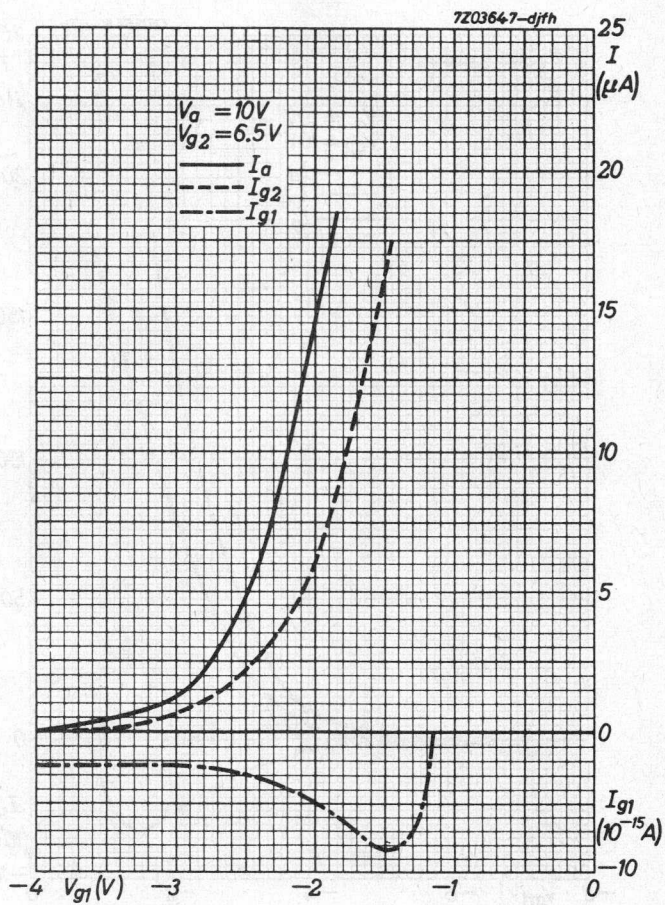

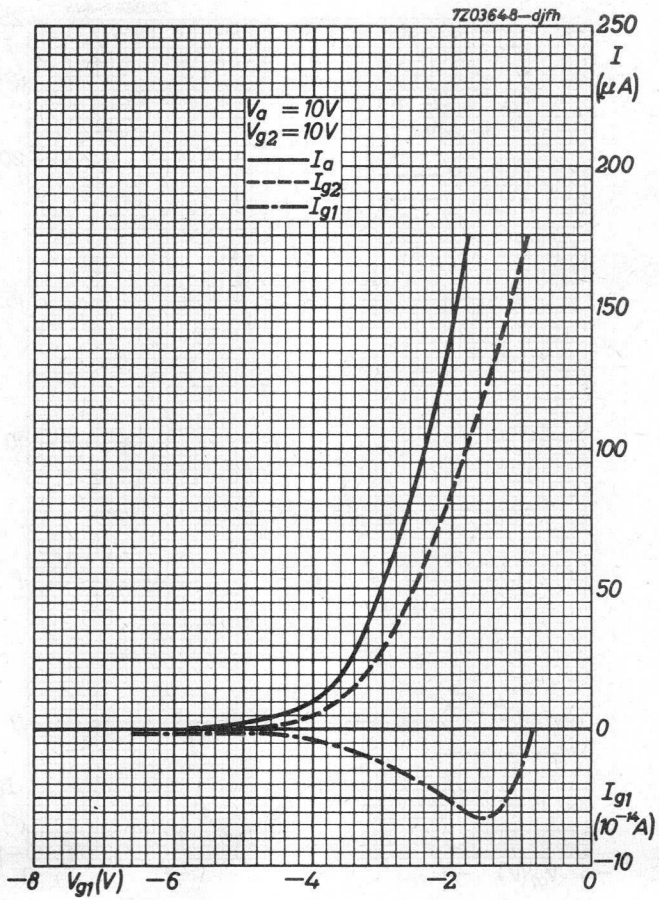


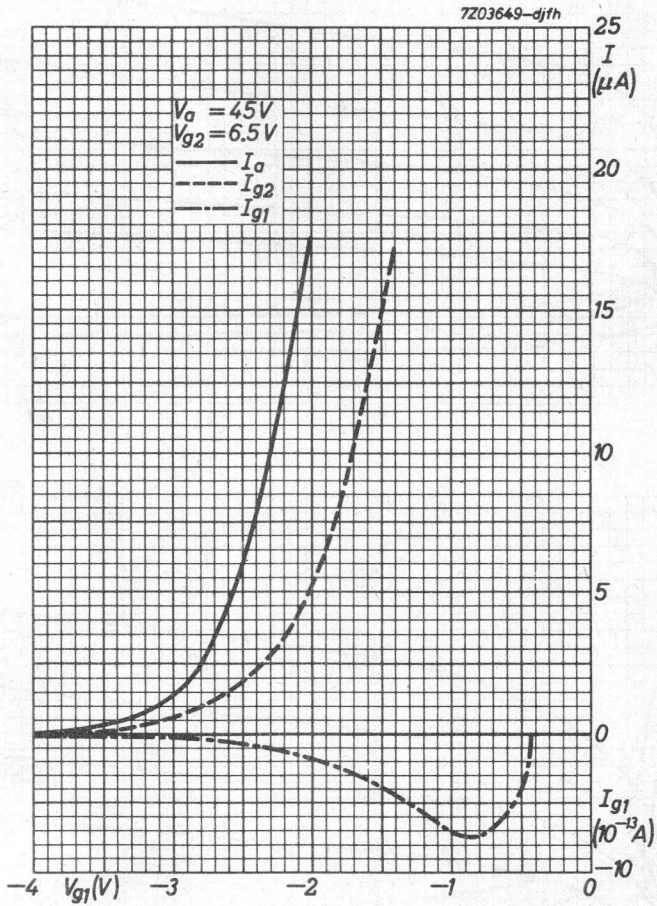


7Z03645-djfh

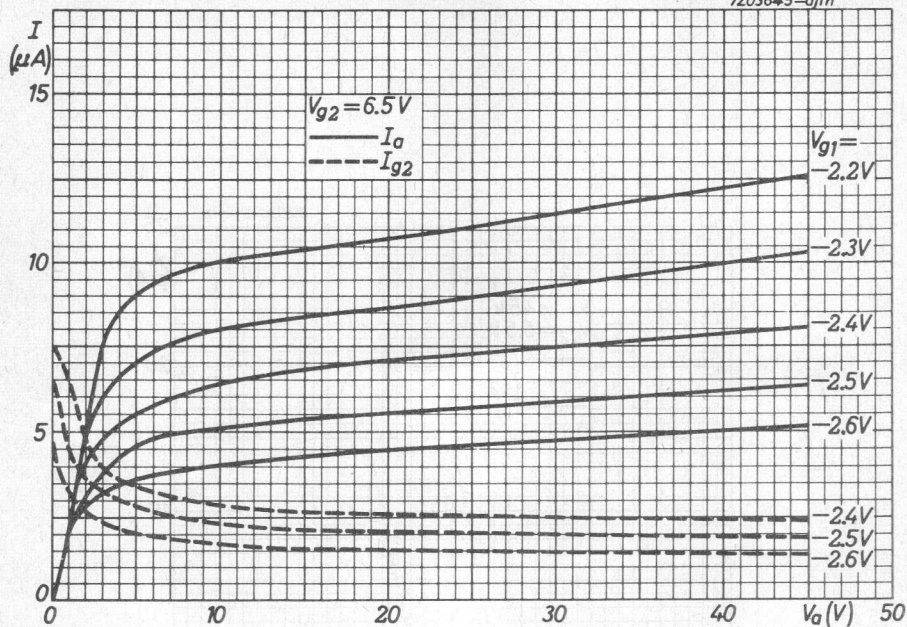


7Z03644-djfh

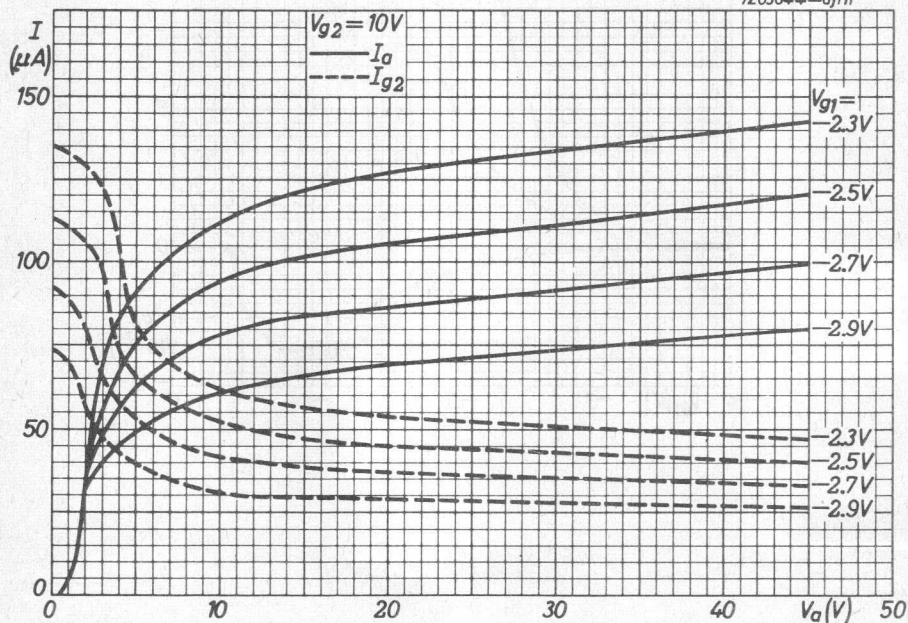

7203646-djfh

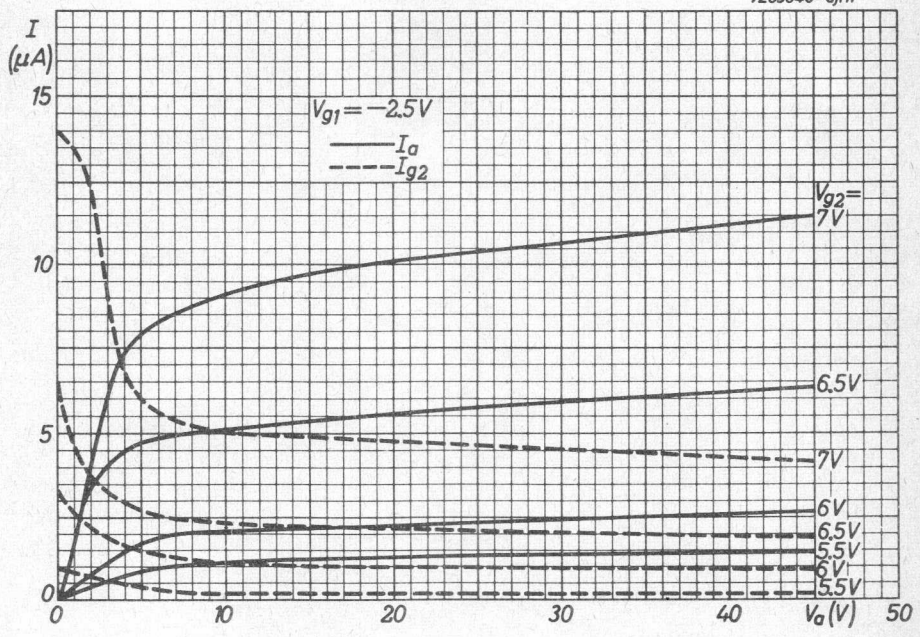



ELECTROMETER TUBE

Subminiature electrometer triode for linear and logarithmic use with a controlled logarithmic relationship between positive grid current and anode current.


QUICK REFERENCE DATA

Filament voltage	V_f	1.25 V
Anode voltage	V_a	9.0 V
Anode current	I_a	100 μ A
Grid current	$-I_g$	< 10 ⁻¹² A

DIMENSIONS AND CONNECTIONS

Dimensions in mm

Base: Subminiature

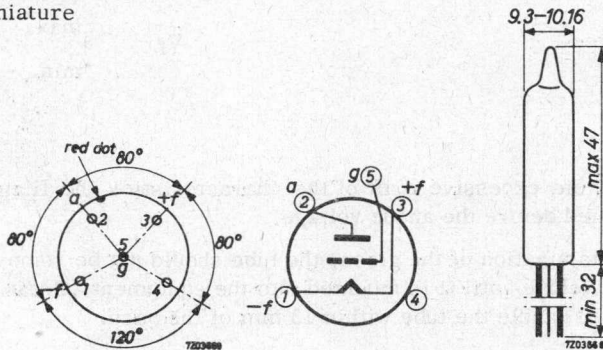

Directly soldered connections to the leads of this tube must be at least 13 mm from the seal and any bending of the leads must be at least 1.5 mm from the seals.

HEATING: direct by D.C.

Filament voltage	V_f	1.25 V
Filament current	I_f	14 mA

CAPACITANCES

Anode to all except grid	$C_{a(g)}$	0.8 pF
Grid to all except anode	$C_{g(a)}$	0.5 pF
Anode to grid	C_{ag}	2.0 pF

7Z2 5407

CHARACTERISTICS AND RANGE VALUES

Anode voltage	V_a	9.0	V
Grid voltage	V_g	-2.7	-2.0 to 3.75 V
Anode current	I_a	100	μA
Grid current	$-I_g$	1.6×10^{-13}	$< 10^{-12}$ A ¹⁾
Transconductance	S	80	60 to 90 $\mu\text{A}/\text{V}$
Amplification factor	μ	2.0	1.6 to 2.7
Grid voltage at crossover point ²⁾ ($I_a = 145 \mu\text{A}$)	V_g	-1.4	< 1.7 V

LIMITING VALUES (Absolute max. rating system)


Anode voltage	V_a	max.	25 V
Anode current	I_a	max.	250 μA
Filament voltage	V_f	max.	1.5 V
		min.	1.1 V


REMARKS

- In order to avoid excessive drift of the characteristics the filament voltage must be applied before the anode voltage.
- To avoid contamination of the glass, the tube should not be removed from its protective envelope until it is mounted into the equipment. Great care should be taken not to handle the tube within 13 mm of the base.
- Operation with logarithmic characteristic.
The tube has a controlled linear relationship between I_a and the logarithm of the positive I_g , which holds good over a range of I_g from 3×10^{-12} to 3×10^{-9} A. With $+I_g = 3 \times 10^{-9}$ A, V_a can be set to some value within the range from 3 to 6 V (nominal 4.4 V) such that I_a falls by $50 \mu\text{A}$ when $+I_g$ is reduced to 3×10^{-12} A. The initial value of I_a will be found in the range from 65 to $100 \mu\text{A}$.

¹⁾ Only valid in darkness.

²⁾ The crossover point is the point at which the direction of I_g is reversed.

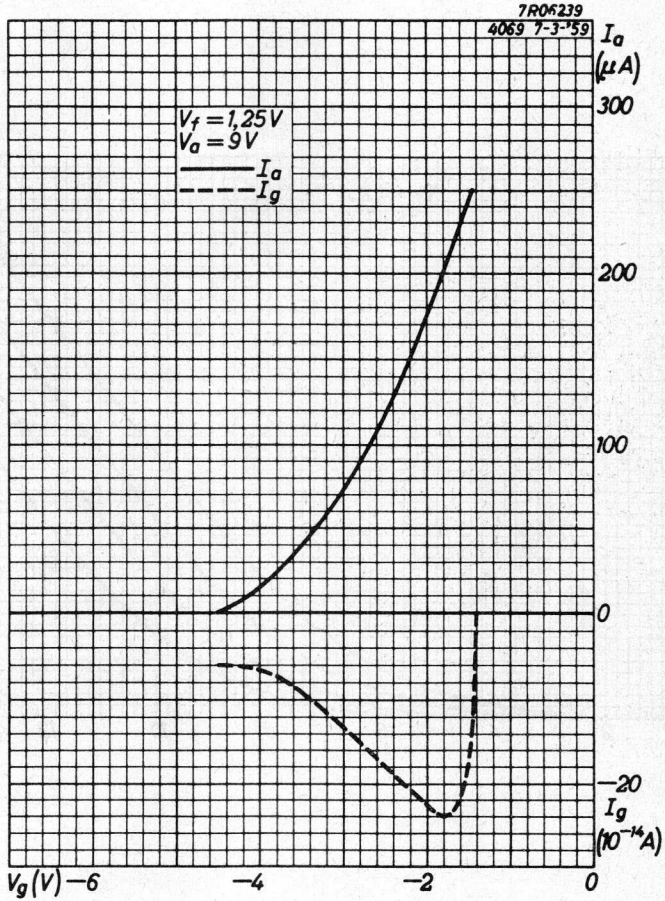

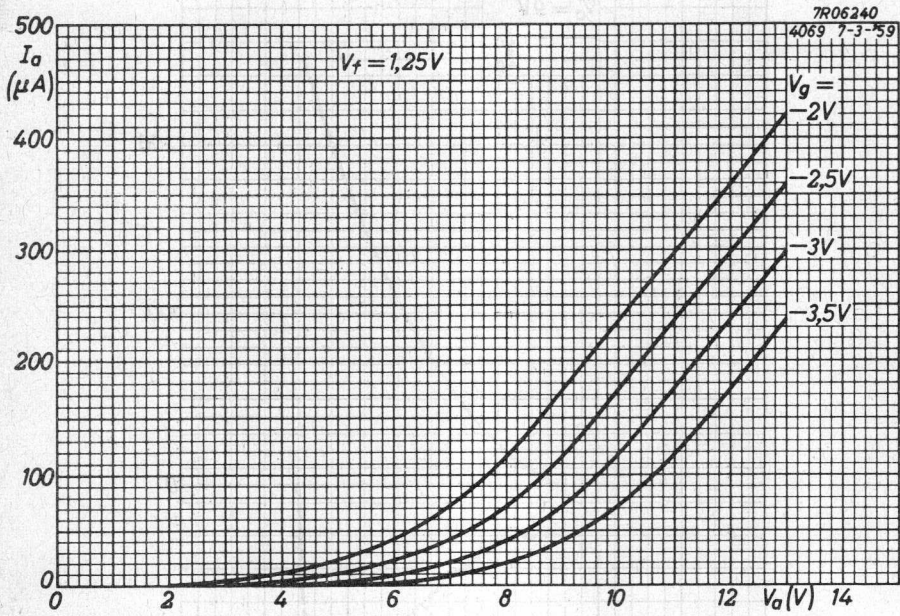

BIMETAL RELAY



Bimetal relay

QUICK REFERENCE DATA		
Heater current	I_R	85 to 115 mA
Timing		150 to 30 s

DIMENSIONS AND CONNECTIONS

Dimensions in mm

Base: A



HEATING

Heater current	I_R	85 to 115 mA
At $t_{amb} < 25\text{ }^\circ\text{C}$ the recommended min. value is 95 mA		
Resistance of the heating element R	R	370 Ω

OPERATING CHARACTERISTICS at $t_{amb} = 25\text{ }^\circ\text{C}$

For dependency of temperature see page B

Heater current	I_R	85	95	115 mA
Timing		max. 150	55 to 85	min. 30 s

7Z2 5394

LIMITING VALUES (Absolute max. rating system)


Heater current	I_r	max.	125 mA
Ambient temperature	t_{amb}	max.	+60 °C
Current	t_{amb}	min.	-10 °C


Maximum current

	When switching on	When switching off
Mains voltage		
220 V $\overline{=}$	1.5 A	250 mA
220 V \sim	1.5 A	250 mA
380 V \sim	0.7 A	75 mA

ACCESSORIES

Socket type 40465

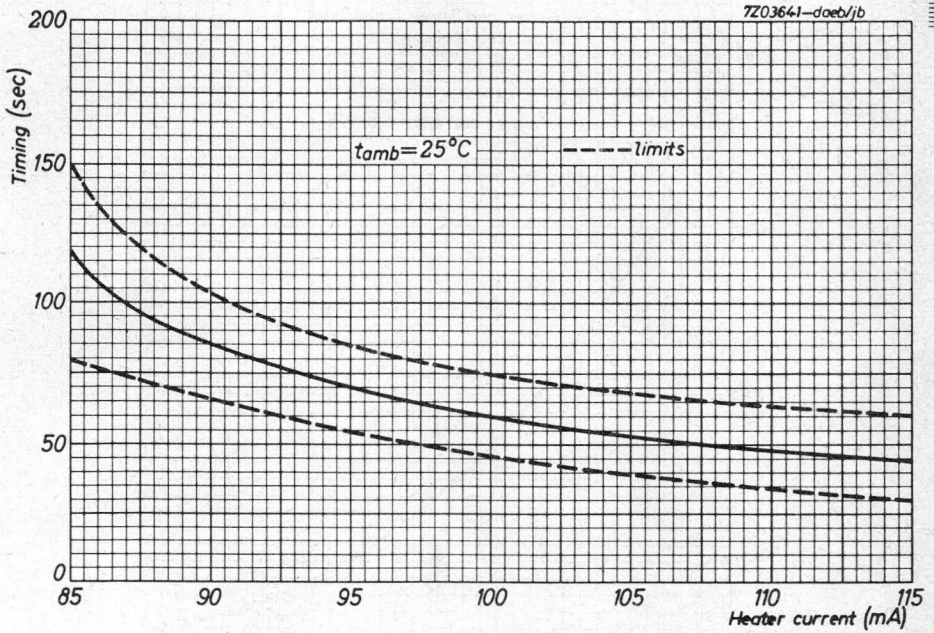

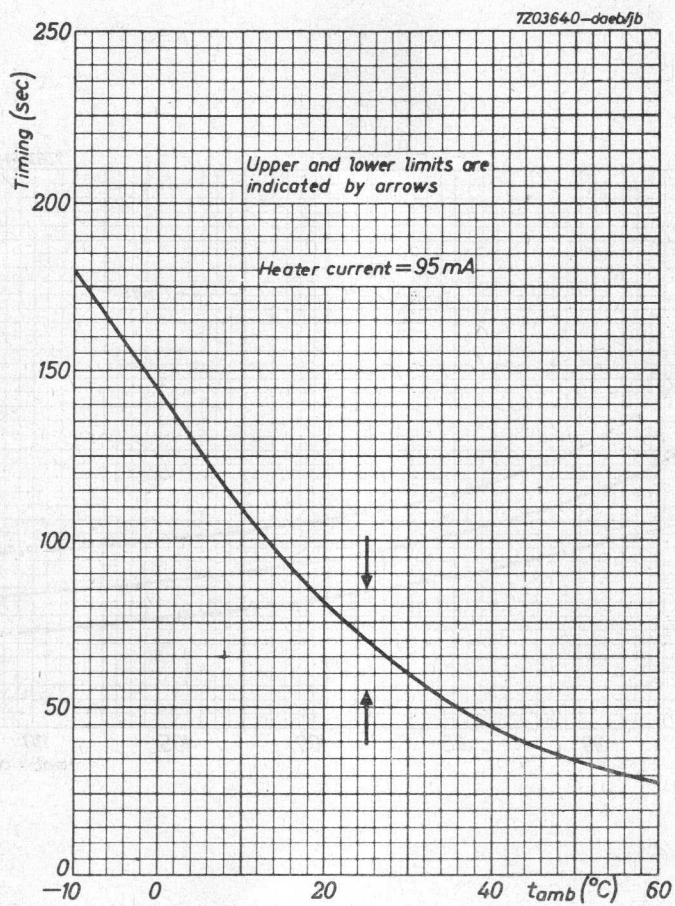

SURGE ARRESTORS

EXPLANATION OF PUBLISHED DATA

1. Starting voltage (Ignition voltage; V_{ign})

The specified minimum and maximum starting voltage values indicate the voltage limits below which no ignition will take place and above which all tubes will ignite.

2. Extinguishing voltage (V_{ext})

At voltages equal to or lower than the voltage specified, the discharge is extinguished.

3. Line voltage (V_{line})

Surge arresters can be used for the protection of lines, the maximum operating voltage of which does not exceed the value specified. It is clear that surge arresters can also be used for the protection of lines and apparatus to which under normal conditions no voltage is applied.

4. Surge current (I_{surge})

The values specified for the maximum temporary current and the appartaining period of time should be regarded as design values and are a measure for the ability to discharge large quantities of electrical energy during a brief period.

Heavy discharges (within the time specified) resulting in currents that are about equal to the maximum surge current can be drawn off several times.

Moderate discharges can take place many times before the surge arrester will fail. Failure will generally be due to too large deviations from the published starting and extinguishing voltages.

If there is a great change of heavy continuous discharges, it is recommended to insert a series resistor, e.g. a voltage dependent resistor. In doing so the surge arrester will be protected against too large energies, whilst a voltage dependent resistor (exponent at least 4 to 5) will ensure extinguishing when discharge has taken place, also in the case of power lines.

5. Fuse in series

In the case of discharges of long duration e.g. as a result of direct contact between low and high-tension lines, care should be taken that the lines to be protected are disconnected, since otherwise damage will be caused to the surge arrester. A series-connected fuse may serve this purpose. The value published applies to a normal fuse type.

6. Capacitive discharge


Like the surge current value the value (expressed in watt seconds) given under this heading is a measure for the power of the surge arrester. For this value it also holds that energies equal to the value published can be drawn off a few times, and that energies that are several times smaller can be drawn off many times before the surge arrester will be unserviceable.

RARE GAS CARTRIDGES


Type	4349	4369	4370	4371	4372	4373	4378	4379	4380	4383	4390	4397
Starting voltage	V	130- 180	80- 120	150- 200	280- 350	150- 200	80- 120	280- 350	280- 350	280- 350	700- 910	400- 500
	Min. extinguishing voltage	V	110	60	110	250	110	60	130	250	130	200
Surge current, max.	A	5	10	10	5	2.5	10	10	2.5	5	25	5
	sec	3	3	3	3	1	3	3	1	3	3	1
Fuse in series	max. A	6	10	10	6	6	10	10	6	6	25	6
Capacitive discharge	Ws	10	10	10	10	10	10	10	10	10	500	10
Max. line voltage	V ₋	70	70	36	70	200	70	50	200	50	175	150
	V _~	75	75	50	75	180	75	180	180	180	300	230
Dimensions, see fig.	No.	I	IV	IV	II	IV	III	IV	II	II	V	IV

7Z2 5399


I

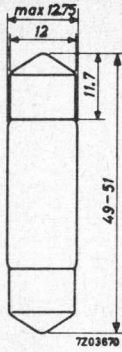


II





III

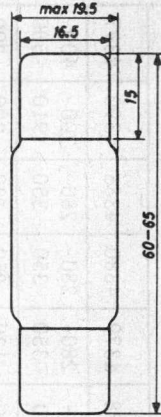

IV

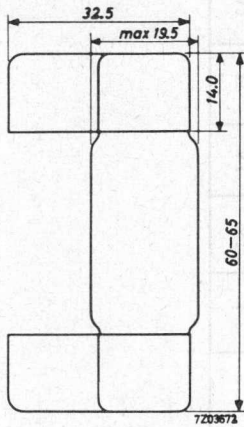

V

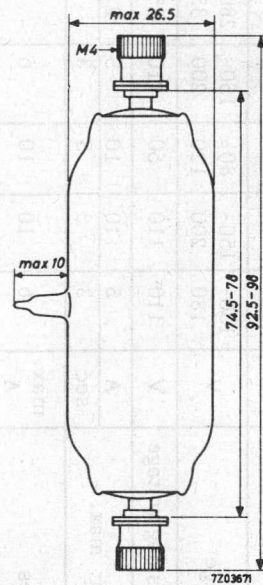

CURRENT REGULATORS

Type	I (A)	V (V)	Current tolerances from tube to tube			Max. dimensions in mm		
			V (V)	I _{min}	I _{max}	l ¹⁾	l	dia.
329	1.15	10-30	20	1.08 A	1.22 A	119	101	34
340	5.9	3-10	7	5.5 A	6.3 A	156	-	53
1904	0.1	30-80	60	96 mA	104 mA	100 ²⁾ 110 ³⁾	- 92 ³⁾	39
1905	1	2-6	4	960 mA	1.04 A	100	-	35
1908	0.8	5-15	5	740 mA	820 mA	107	89	35
			7	760 mA	860 mA			
			15	770 mA	860 mA			
1909 1909 A	0.635	5-45	30	605 mA	665 mA	123	105	56
1910	1.4	5-15	5	1.3 A	-	110	92	35
			8.5	1.35 A	1.5 A			
			15	1.35 A	1.5 A			
1913	2	4-12	8	1.92 A	2.08 A	129	-	41
1918-01	0.1	4-10	7	97 mA	108 mA	67	-	21.5
1923	0.43	15-45	30	410 mA	450 mA	98	-	39
1926 ⁴⁾	0.18	8-26	16	168 mA	192 mA	101	-	33
1927	0.18	40-120	80	172 mA	188 mA	138	120	40.5
1928	0.18	80-240	160	172 mA	188 mA	147	129	40.5
1941	0.3	80-200	140	289 mA	311 mA	162 ⁵⁾ 154 ⁶⁾	144 ⁵⁾ -	53
1945 ⁴⁾	0.275	80-120	100	263 mA	283 mA	115	-	38

1) Length without pins

2) Swan

3) 3-p

4) Resistance tube

5) A

6) Edison

CURRENT REGULATORS

329	1904 1908 1909 1910	1909A	1927 1928 1941
Base Socket	3-p 40465	3-p 40465	3-p 40465
3-p 40465	3-p 40465	3-p 40465	A 40465
1926 1945	340 1905 1913 1923 1941	1918-01	1904
Base	P	EDISON	EDISON MIGNON
			S.B.C.

722 5404

INDEX OF TYPENUMBERS

Type No.	Section	Type No.	Section	Type No.	Section
C3m	SQ	E288CC	SQ	1928	MD
D3a	SQ	E810F	SQ	1941	MD
DL68	SQ	EC80	SQ	1945	MD
DM160	SQ	EC81	SQ	4065	MD
E1T	SQ	EC90	SQ	4066	MD
E55L	SQ	EC91	SQ	4068	MD
E80CC	SQ	EC1000	SQ	4069	MD
E80CF	SQ	EC8010	SQ	4152/02	MD
E80F	SQ	ECC2000	SQ	4349 to	
E80L	SQ	K81A	MD	4397	MD
E81L	SQ	TH71	MD	5636	SQ
E82CC	SQ	TH73	MD	5639	SQ
E83CC	SQ	TH75	MD	5642	SQ
E83F	SQ	TH91 to		5654	SQ
E84L	SQ	TH95	MD	5718	SQ
E86C	SQ	XL7900/00	MD	5719	SQ
E88C	SQ	12AX7S	SQ	5725	SQ
E88CC	SQ	329	MD	5726	SQ
E90CC	SQ	340	MD	5840	SQ
E130L	SQ	1904	MD	5842	SQ
E180CC	SQ	1905	MD	5899	SQ
E180F	SQ	1908	MD	5902	SQ
E182CC	SQ	1909	MD	6021	SQ
E186F	SQ	1909A	MD	6080	SQ
E188CC	SQ	1910	MD	6111	SQ
E235L	SQ	1913	MD	6112	SQ
E236L	SQ	1918-01	MD	6189	SQ
E280F	SQ	1923	MD	6201	SQ
E282F	SQ	1926	MD	18042	SQ
E283CC	SQ	1927	MD	18045	SQ

SQ = Special Quality Tubes

MD = Miscellaneous Devices

7Z2 7758

Special Quality Tubes

Miscellaneous Devices

MD	1938	30	1938	30	1938
MD	1941	30	1941	30	1941
MD	1943	30	1943	30	1943
MD	4100	30	4100	30	4100
MD	4108	30	4108	30	4108
MD	4109	30	4109	30	4109
MD	4132/103	30	4132/103	30	4132/103
MD	4149/104	30	4149/104	30	4149/104
MD	4177	MD	4177	MD	4177
30	5030	MD	5030	MD	5030
30	5032	MD	5032	MD	5032
30	5033	MD	5033	MD	5033
30	5034	MD	5034	MD	5034
30	5118	MD	5118	MD	5118
30	5119	MD	5119	MD	5119
30	5122	30	5122	30	5122
30	5126	MD	5126	MD	5126
30	5130	MD	5130	MD	5130
30	5145	MD	5145	MD	5145
30	5198	MD	5198	MD	5198
30	5203	MD	5203	MD	5203
30	5031	MD	5031	MD	5031
30	5130	MD	5130	MD	5130
30	5111	MD	5111	MD	5111
30	5113	MD	5113	MD	5113
30	5128	MD	5128	MD	5128
30	5133	MD	5133	MD	5133
30	1803	MD	1803	MD	1803
30	1805	MD	1805	MD	1805
30	1810	MD	1810	MD	1810
30	1937	MD	1937	MD	1937

