

THE Westinghouse
ELECTRONIC TUBE
Easy Guide

PHOTOTUBES

KENOTRONS

PIOTRONS

PHANOTRONS

IGNITRONS

THYRATRONS



WESTINGHOUSE ELECTRIC & MANUFACTURING CO.

Lamp Division

BLOOMFIELD



NEW JERSEY

HOW TO USE THE EASY GUIDE

Electronic Tubes are grouped by functional classification as follows:


- Phototubes**—Light Sensitive Tubes
- Kenotrons**—High Voltage Vacuum Rectifiers
- Pliotrons**—Modulators, Amplifiers, Oscillators
- Phanotrons**—Gas or Mercury Vapor Rectifiers
- Ignitrons**—Ignitor Controlled Rectifiers
- Thyratrons**—Grid Controlled Rectifiers

and a Miscellaneous Group which includes **Protector, Regulator and Pressure Indicator Tubes**. Technical and ordering data for each tube is given in the section covering that class of tubes. To find the tube class in which a given tube type number is listed, consult the index below. Then refer to that particular classification for Price Information and summary of tube data. The data sheet number shown in the index indicates the sheet which gives complete technical information. These sheets may be obtained from your Westinghouse Electric & Mfg. Co. district office.

INDEX — DATA INFORMATION

Type Number	Class	Data Sheet	Type Number	Class	Data Sheet
SR-50, SR-53	Phototube	86-055	WL-762	Misc. Pirani	86-980
SK-60, SK-63	Phototube	86-059	WL-767	Phototube	86-080
WL-195	Pliotron	86-110	WL-773	Phototube	86-080
WL-196	Pliotron	86-111	WL-775	Phototube	86-080
WL-203-A	Pliotron	86-115	WL-787	Pliotron-Demonstrator	86-160
WL-204-A	Pliotron	86-116	WL-788	Misc. Regulator	86-970
WL-207	Pliotron	86-119	WL-789	Phototube	86-080
WL-211	Pliotron	86-122	WL-802	Pliotron	86-165
WL-414	Thyratron	86-405	WL-803	Pliotron	86-166
WL-456	Kenotron	86-305	WL-805	Pliotron	86-168
WL-460	Pliotron	86-130	WL-806	Pliotron	86-169
WL-463	Pliotron	86-133	WL-807	Pliotron	86-170
WL-468	Pliotron	86-138	WL-809	Pliotron	86-172
WL-471	Pliotron	86-141	WL-810	Pliotron	86-173
WL-473	Pliotron	86-143	WL-811	Pliotron	86-174
RH-507	Pliotron	86-150	WL-812	Pliotron	86-175
WL-531	Kenotron	86-310	WL-813	Pliotron	86-176
WL-579-B	Kenotron	86-315	WL-814	Pliotron	86-177
RO-585	Kenotron	86-320	WL-815	Pliotron	86-178
WL-608	Kenotron	86-325	WL-828	Pliotron	86-185
KU-610	Thyratron	86-410	WL-833-A	Pliotron	86-188
WL-612	Kenotron	86-329	WL-837	Pliotron	86-190
WL-613	Kenotron	86-330	WL-838	Pliotron	86-191
WL-616	Kenotron	86-333	WL-845	Pliotron	86-195
KU-618	Thyratron	86-415	WL-849	Pliotron	86-199
KU-627	Thyratron	86-420	WL-851	Pliotron	86-201
KU-628	Thyratron	86-421	WL-857-B	Phanotron	86-360
WL-629	Thyratron	86-422	WL-860	Pliotron	86-205
WL-631	Thyratron	86-424	WL-861	Pliotron	86-206
WL-632-A	Thyratron	86-425	WL-866-A/866	Phanotron	86-365
KU-636	Thyratron	86-429	WL-869-B	Phanotron	86-368
KX-642	Misc. Protector	86-960	WL-872-A/872	Phanotron	86-371
WL-651/656	Ignitron	86-460	WL-880	Pliotron	86-210
WL-652/657	Ignitron	86-461	WL-881	Phanotron	86-380
WL-653-B	Ignitron	86-462	WL-889	Pliotron	86-215
WL-655/658	Ignitron	86-464	WL-889-R	Pliotron	86-216
WL-660	Kenotron	86-338	WL-891	Pliotron	86-218
WL-670	Phanotron	86-355	WL-891-R	Pliotron	86-219
WL-672	Thyratron	86-433	WL-892	Pliotron	86-220
KU-676	Thyratron	86-437	WL-892-R	Pliotron	86-221
WL-677	Thyratron	86-438	WL-893	Pliotron	86-222
WL-679	Ignitron	86-474	WL-893-R	Pliotron	86-223
WL-681/686	Ignitron	86-476	WL-895	Pliotron	86-225
WL-710, WL-711, WL-712	Misc. Regulator	86-970	WL-895-R	Pliotron	86-226
WL-734, WL-735	Phototube	86-070	WL-896	Misc. Regulator	86-970
			WL-899-A	Pliotron	86-230
			WL-2050	Thyratron	86-448

PHOTOTUBES — Light Sensitive Tubes

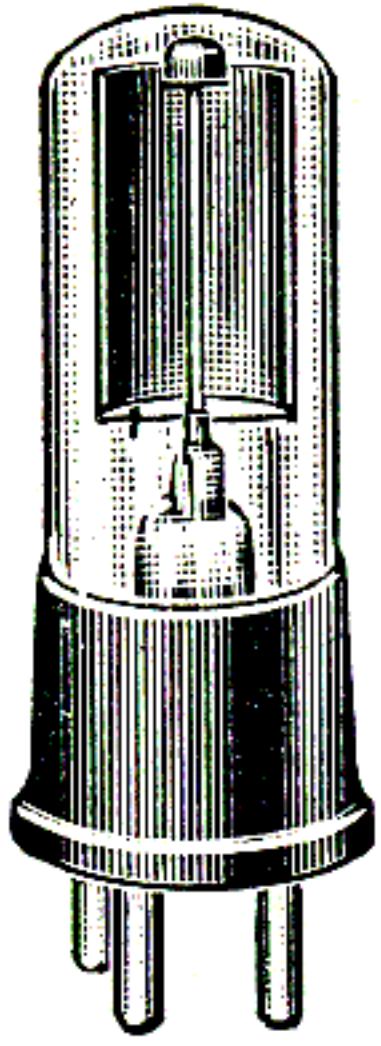

SR50, SR53

PHOTOTUBES are electronic devices which permit the passage of electrons from cathode to anode when the cathode is exposed to visible light, ultra-violet or infra-red. They are suited to the control of lighting. Used for starting, stopping, or controlling mechanical operations. Phototubes are an essential part of apparatus used for counting such objects as cartons,


sheets of paper, steel ingots, vehicles or pedestrians, matching colors, keeping printing presses in registry, rejecting packages which are not labeled or are incorrectly labeled, opening doors, detect and record the density of smoke, control of temperature of furnaces, detect the difference between flame and solids heated in the flame.

Type Number	DISCOUNTS		Warranty Class	Shipping Weight Lbs.	Price	Spectral Range, Au.	Vacuum or Gas	Cathode Surface	Sensitivity Micro-amperes per lumen	Anode Volts, Max.	Max. Length Inches	Max. Diameter Inches
	Min. Quan.	Schedule										
SR-50	12	L 31	F	1/2	\$5.00	4000 10000	Vac.	Sl	15	500	4.50	1.45
SR-53	12	L 31	F	1/2	7.50	4000 10000	Vac.	Sl	25	500	4.50	1.45
SK-60	12	L 31	F	1/2	5.00	4000 10000	Gas	Sl	60	90	4.50	1.45
SK-63	12	L 31	F	1/2	7.50	4000 10000	Gas	Sl	125	90	4.50	1.45
WL-734	25	L 31	F	1/2	2.60	4000 10000	Vac.	Sl	15	500	3.94	1.16
WL-735	25	L 31	F	1/2	2.60	4000 10000	Gas	Sl	60	90	3.94	1.16
WL-767	6	L 31	F	3	50.00	2000 3150	Vac.	Zirconium	...	500	8.0	3.19
WL-773	6	L 31	F	3	50.00	2000 3675	Vac.	Thorium	...	500	8.0	3.19
WL-775	6	L 31	F	3	50.00	2000 3000	Vac.	Tantalum	...	500	8.0	3.19
WL-789	6	L 31	F	3	75.00	Below 2100	Vac.	Platinum	...	500	8.0	3.50

KENOTRONS — High Voltage Vacuum Rectifiers

KENOTRONS, High Voltage Vacuum Rectifiers, are specially designed to provide high voltage direct current for X-ray, electro-static testing and electro-


static precipitation. Westinghouse offers a group of top quality Kenotrons to meet the requirements of these and other applications.

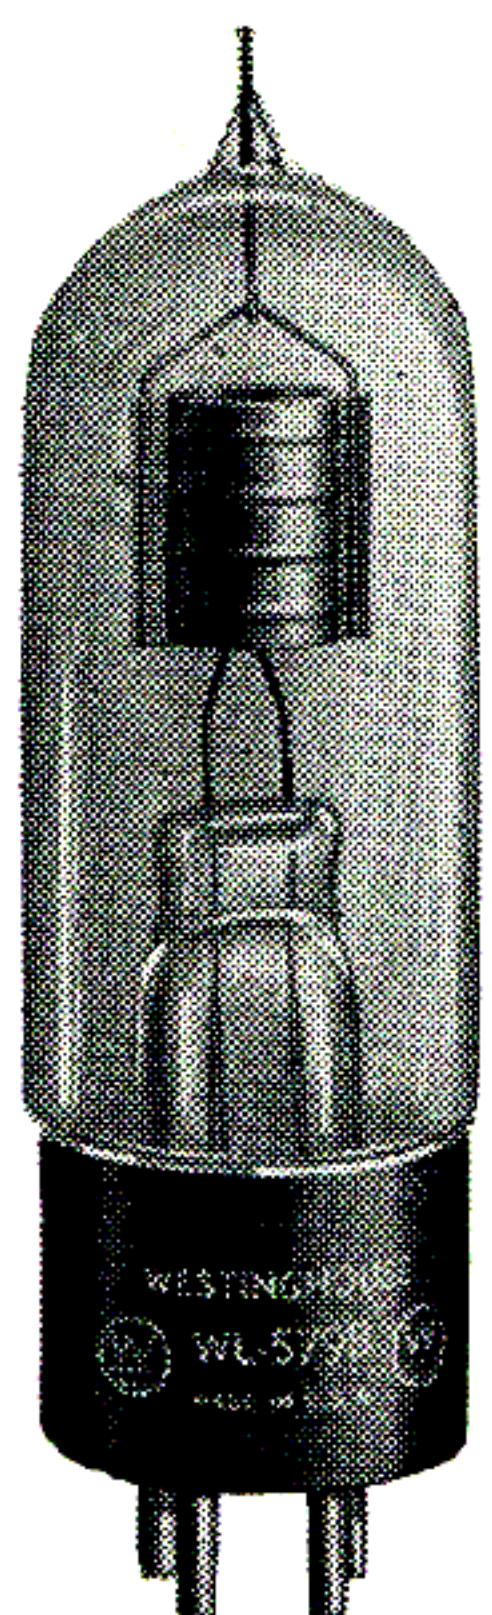

WL-579-B

Type Number	DISCOUNTS		Warranty Class	Shipping Weight Lbs.	Price	FILAMENT		ANODE			Type of Cooling	Max. Length Inches	Max. Diam. Inches
	Min. Quan.	Schedule				Volts	Amps.	Volts, Peak Inverse	Amps. Peak	Amps. Ave.			
WL-456	Any	Net	C	6	\$95.00	11.0	20	140000	0.50	0.06	Air	18.75	5.06
WL-531	Any	Net	E	6	125.00	11.5	20	50000	0.75	0.29	Forced Air	9.5	3.75
WL-579-B	12	L 31	F	1 1/2	9.50	2.5	6	20000	0.27	0.025	Air	7.38	2.13
RO-585	12	L 31	F	1 1/2	12.00	5.0	1.1	1500	0.04	0.003	Air	4.38	1.56
WL-608	2	L 32	C	5	120.00	10.0	10	60000	0.20	0.06	Oil	14.75	5.13
WL-612	Any	Net	A	23 1/2	195.00	10.0	50	150000	0.75	0.24	Air	25.16	6.13
WL-613	2	L 32	C	5 1/2	150.00	11.0	10	140000	0.20	0.06	Air	19	5.06
WL-616	Any	Net	C	9 1/2	140.00	20.0	24.5	150000	1.00	0.25	Air	25.25	6.06
WL-660	2	L 32	C	23	200.00	10.0	10	230000	0.10	0.03	Air	32.88	6.06

PLIOTRONS—Modulators, Amplifiers, Oscillators

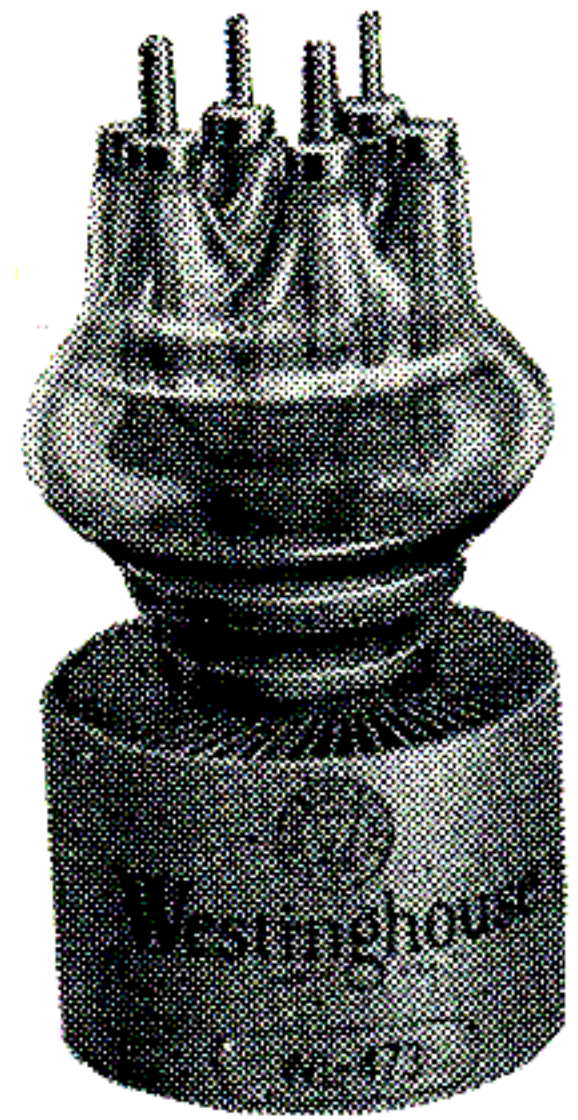


WL-473


PLIOTRONS are high vacuum Electronic tubes having a great variety of applications which may be listed under three main headings: Amplification, Modulation and Oscillation. Because of the wide range of conditions, Pliotrons are made in many sizes and with different characteristics. They are designed for countless purposes, ranging from radio broadcasting to tin reflow application of induction heating.

Following are some of the principal applications for Pliotrons:


- Induction Heating.
- Dielectric Heating.
- Diathermy.
- Amplification of Voltage and Current of both Radio and Audio Frequency in Radio and Industrial Circuits.

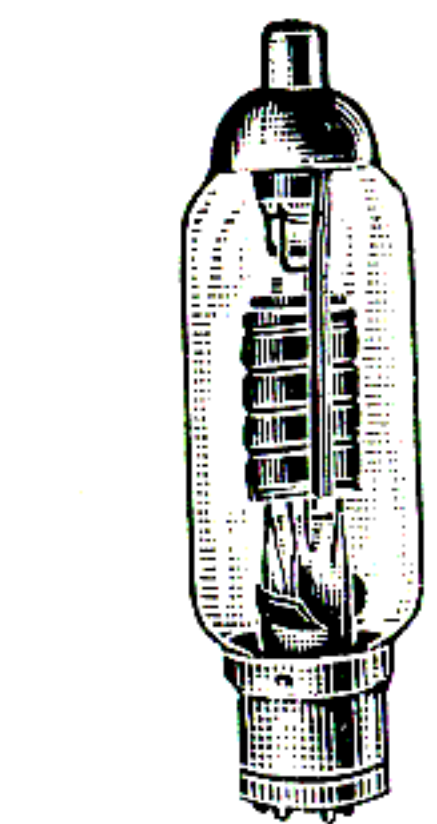


WL-468

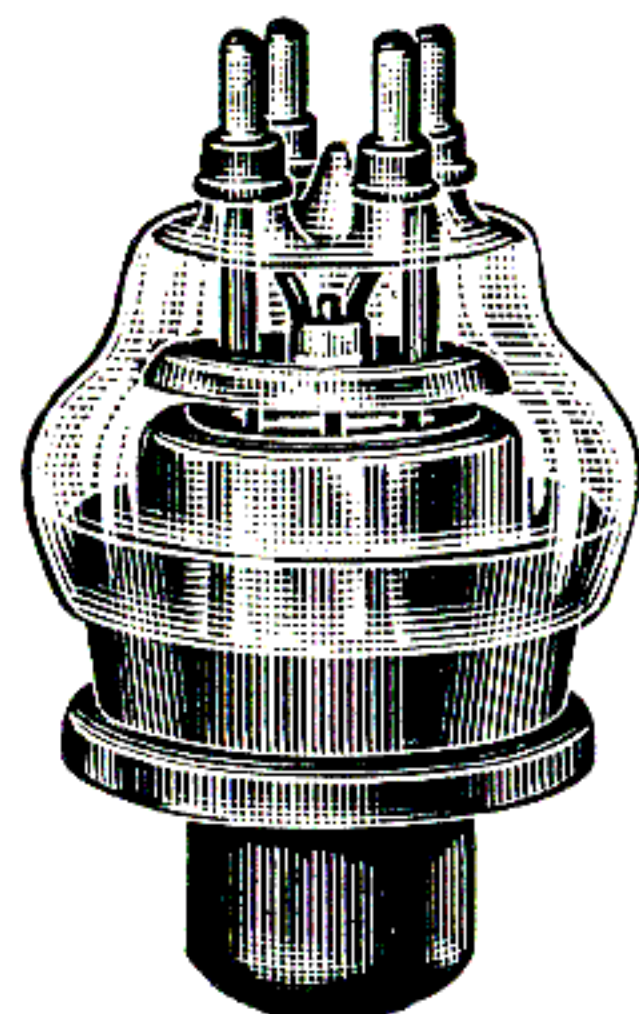

WL-880

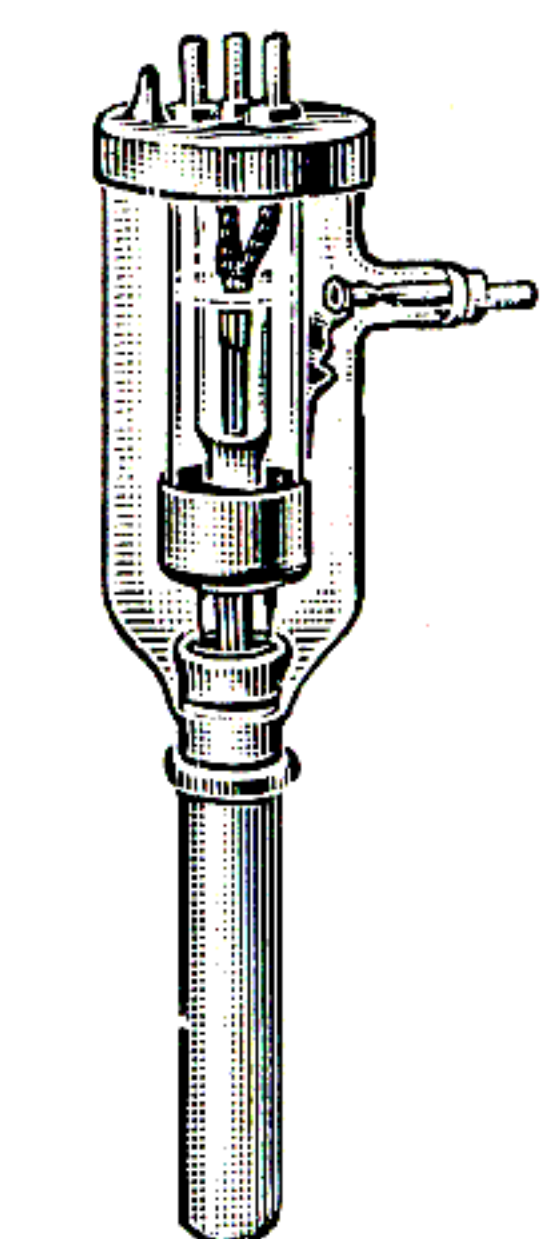

WL-891

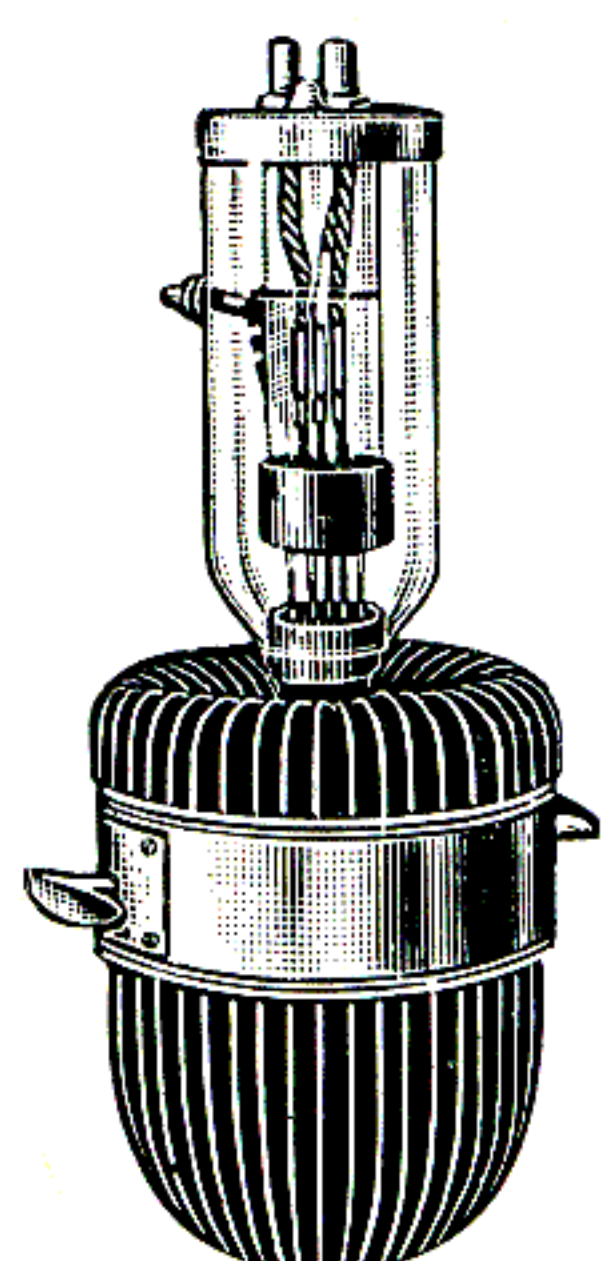

WL-892R

Type Number	DISCOUNTS		Warranty Class	Shipping Weight Lbs.	Price	FILAMENT		PLATE				Ampl. Factor	Max. MC for 100% Input	Max. Length Inches	Max. Diam. Inches
	Min. Quan.	Schedule				Volts	Amps.	D-C Volts	D-C Ma.	Diss. Watts	Output Watts				
WL-195	4	L 32	C	4	\$26.00	10.0	3.25	3000	150	125	325	12	15	8.75	4.25R
WL-196	4	L 32	C	4	26.00	10.0	3.25	3000	150	125	325	35	15	8.75	4.25R
WL-203-A	Any	Net	E	1 1/2	10.00	10.0	3.25	1250	175	100	120	25	15	7.88	2.31
WL-204-A	Any	Net	E	5	85.00	11.0	3.85	2500	275	250	450	23	3	14.38	4.06
WL-207	Any	Net	E	8	220.00	22.0	52.00	15000	2000	10000	20000	20	1.6	20.25	6.50R
WL-211	Any	Net	E	1 1/2	10.00	10.0	3.25	1250	175	100	130	12	15	7.88	2.31
WL-460	4	L 32	C	2	26.00	10.0	3.85	3000	200	150	450	18	30	11.00	2.5R
WL-463	4	L 32	C	2	37.00	11.0	5.0	2500	275	200	550	22	30	11.25	2.5R
WL-468	4	L 32	C	2	24.75	10.0	3.85	2500	200	150	400	18	6	10.88	3.06
WL-473	Any	Net	E	8 1/2	125.00	6.0	60.0	3000	1400	2500	3250	22	60	7.25	3.63
RH-507	12	L 31	F	1 1/2	24.50	2.0	0.06	9	0.006	0.8	5.00	1.56
*WL-787	Any	Net	F	2	15.00	6.0	1.6	100	100	2	10.00	2.63
WL-802	Any	Net	F	1	3.50	6.3	0.9	600	60	30	5.75	2.06
WL-803	Any	Net	E	2	25.00	10.0	5.0	2000	175	125	225	20	9.38	2.56
WL-805	Any	Net	E	1 1/2	10.00	10.0	3.25	1500	210	125	215	50	30	8.50	2.31
WL-806	Any	Net	E	2 1/2	22.00	5.0	9.5	3300	300	225	780	12.6	30	10.00	3.82
WL-807	Any	Net	F	1	2.25	6.3	0.9	750	100	30	50	60	5.75	2.06
WL-809	Any	Net	F	1	2.50	6.3	2.5	1000	100	30	75	50	60	6.56	2.43
WL-810	Any	Net	E	2 1/2	13.50	10.0	4.5	2250	275	150	475	36	30	9.06	2.25R
WL-811	Any	Net	F	1 1/2	3.50	6.3	4.0	1500	150	55	170	160	60	6.56	2.43
WL-812	Any	Net	F	1 1/2	3.50	6.3	4.0	1500	150	55	170	29	60	6.56	2.43
WL-813	Any	Net	E	2 1/2	22.00	10.0	5.0	2000	180	100	260	30	7.5	2.56
WL-814	Any	Net	E	1 1/2	15.50	10.0	3.25	1500	150	65	160	30	7.75	2.06
WL-815	Any	Net	F	1	4.50	6.3	1.6	500	150	25	56	150	4.56	2.38
WL-828	Any	Net	E	1 1/2	17.50	10.0	3.25	1500	180	80	200	30	7.75	2.06
WL-833-A	Any	Net	E	3	76.50	10.0	10.0	4000	500	450	1600	35	30	8.82	4.6
WL-837	Any	Net	F	1	2.80	12.6	0.7	500	80	12	22	20	5.88	2.06
WL-838	Any	Net	E	1 1/2	9.00	10.0	3.25	1250	175	100	130	54	30	7.88	2.31
WL-845	Any	Net	E	1 1/2	10.00	10.0	3.25	1250	120	100	115	5.3	6	7.88	2.31
WL-849	Any	Net	E	5 1/2	120.00	11.0	5.0	2500	350	400	510	19	3	14.38	4.06
WL-851	Any	Net	E	7 1/2	160.00	11.0	15.5	2500	1000	750	1750	20.5	3	17.63	6.13
WL-860	Any	Net	E	4	21.50	10.0	3.25	3000	150	100	200	30	8.75	4.25R
WL-861	Any	Net	E	17	155.00	11.0	10.0	3500	350	400	800	20	17.22	6.63R
WL-880	Any	Net	E	21	350.00	12.6	320.0	10500	6000	20000	45000	20	25	11.50	7.00
WL-889	Any	Net	E	9	175.00	11.0	125.0	8500	2000	5000	11000	21	50	10.63	3.63
WL-889-R	Any	Net	E	52	325.00	11	125	8500	2000	5000	11000	21	25	11.75	11.00
§WL-891	Any	Net	E	8	285.00	22	60	12000	2000	6000	12000	8	1.6	20.63	6.5R
§WL-891-R	Any	Net	E	94	410.00	22	60	10000	2000	4000	11000	8	1.6	22.00	6.5R
§WL-892	Any	Net	E	8	190.00	22	60	15000	2000	10000	20000	50	1.6	20.63	6.5R
§WL-892-R	Any	Net	E	94	410.00	22	60	12500	2000	4000	14000	50	1.6	22.00	6.5R
†WL-893	Any	Net	E	27	450.00	20	183	20000	4000	20000	50000	36	5	26.75	6.38R
†WL-893-R	Any	Net	E	455	800.00	20	183	20000	4000	20000	50000	36	5	28.50	16.75
‡WL-895	Any	Net	E	85	950.00	19*	138*	17000	9000	40000	100000	37	6	23.44	4.65R
‡WL-895-R	Any	Net	E	465	1250.00	19*	138*	17000	9000	20000	90000	37	6	24.50	16.75
WL-899-A	Any	Net	E	125	750.00	14.5	180	18000	5000	30000	35000	27	5	40.00	6.13

* Demonstration Pliotron.

§ Two filament strands in series with large post at neutral junction; operate in series or two phase.

† Six filament strands connected each post to floating neutral, 61 amperes per strand.


‡ Three filament strands connected from black posts to neutral center post.

R—Indicates Air-Cooled Radiator in column headed Type Number and clearance radius in column headed Diameter.

PHANOTRONS — Gas or Mercury Vapor Rectifiers

PHANOTRONS, Gas or Mercury Vapor Rectifiers, can supply moderate amounts of Direct Current at Voltages up to 20,000 volts for general power applications, plate

supply for Amplifiers and Oscillators, etc. The Westinghouse list of Phanotrons includes tubes of ratings to meet all needs.

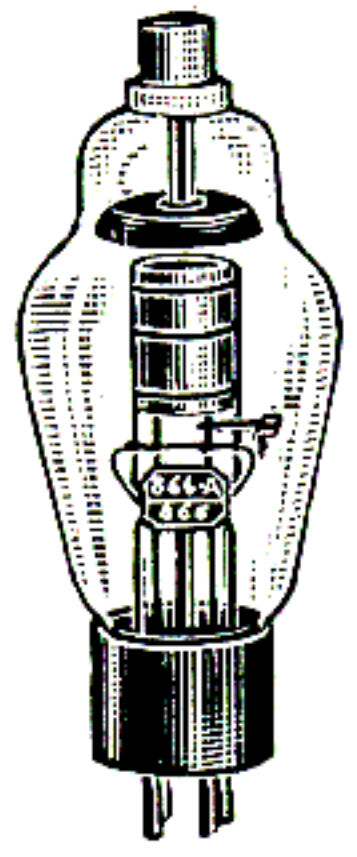


WL866A/866

Type Number	DISCOUNTS		Warranty Class	Shipping Weight	Price	FILAMENT		ANODE			Type of Cooling	Max. Length Inches	Max. Diam. Inches
	Min. Quan.	Schedule				Volts	Amps.	Volts, Peak Inverse	Amps. Peak	Amps. Ave.			
WL-670-A	12	L 31	A	1 1/2	\$15.00	2.5	24	1000	9.5	6.0	Air	8	2.06
WL-857-B	Any	Net	E	7 1/2	160.00	5	30	22000	40	10.0	Air	19.88	7.13
WL-866-A/866	Any	Net	F	3/4	1.50	2.5	5	10000	1	0.25	Air	6.63	2.44
WL-869-B	Any	Net	E	5	100.00	5	18	20000	10	2.5	Air	14.37	5.06
WL-872-A/872	Any	Net	F	1	7.50	5	7.5	10000	5	1.25	Air	8.5	2.31
WL-881	Any	Net	E	5	100.00	5	9.5	15000	15	5	Air	14.50	5.06

IGNITRONS — Ignitor Controlled Rectifiers


IGNITRONS, Ignitor - Controlled Rectifiers, are metal shell tubes capable of supplying large impulses of closely controlled alternating current or continuous direct current. Tube passes current only in one direction.

Westinghouse line of Ignitrons comprises tubes capable of outputs for welding of 300 KVA to 2400 KVA, and rectified current capacity up to 200 Amperes continuous per tube at 600 volts.

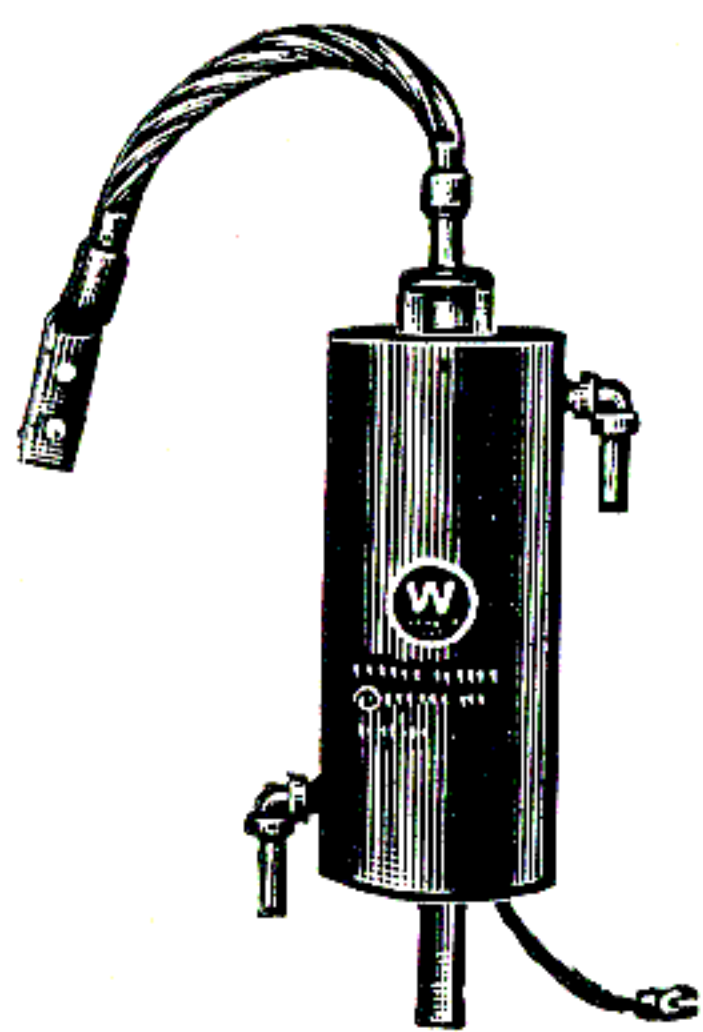

WL-651/656

Type Number	DISCOUNTS		Warranty Class	Shipping Weight Lbs.	Price	Supply Volts RMS	OUTPUT AND CURRENT				Type of Cooling	Size or Service	Length + Lead Inches	Max. Diam. Inches
	Min. Quan.	Schedule					Max. KVA	At Ave. Amps.	KVA At	Max. Ave. Amps.				
WL-651/656	Any	Net	B	14 1/2	\$75.00	200-600	1200	75.6	400	140	Water	C	12 +15	4.25
WL-652/657	Any	Net	B	9	51.00	200-600	600	30.2	200	56.0	Water	B	14.75+12	2.75
WL-653-B	Any	Net	D	36	220.00	2400	2400	135	1150	207	Water	Rect.	21.4 +8.75	5.75
WL-654/659	Any	Net	B	3 1/4	50.00	REPLACEMENT ONLY				REPLACEMENT ONLY				
WL-655/658	Any	Net	B	32	165.00	200-600	2400	192	800	355	Water	D	21 +15.38	5.63
WL-679	Any	Net	D	20	120.00	2400	1200	75	600	113	Water	Rect.	17.95+9.38	4.06
WL-681/686	Any	Net	B	2 1/4	30.00	200-600	300	12.1	100	22.4	Clamp	A	8.38+7.38	2.13
WL-682	Any	Net	B	3	33.00	REPLACEMENT ONLY				REPLACEMENT ONLY				

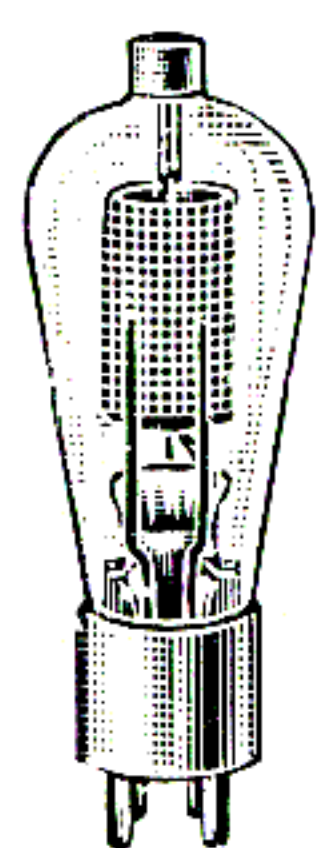

KU-627

THYRATRONS — Grid Controlled Rectifiers

THYRATRONS, Grid-Controlled Rectifiers, are used to close circuits and start and stop operations instantly,

silently, and without moving parts. Westinghouse supplies a group of Thyratrons covering all applications.

Type Number	DISCOUNTS		Warranty Class	Shipping Weight Lbs.	Price	FILAMENT		ANODE			Gas	Control	Max. Length Inches	Max. Diam.* Inches
	Min. Quan.	Schedule				Volts	Amps.	Volts, Peak Inverse	Amps. Peak	Amps. Ave.				
WL-414	Any	Net	B	9	\$70.00	5.0	20.0	2000	100.0	12.5	Hg	Neg.	15.25	3.12
KU-610	12	L 31	F	1	17.50	2.5	6.5	500	0.4	0.1	Inert	Pos.	6.5	2.44
KU-618	12	L 31	F	1	9.50	Cold	Cath.	800	0.1	0.015	Inert	Pos.	5.75	2.18
KU-627	12	L 31	B	1	11.00	2.5	6.0	2500	2.5	0.64	Hg.	Neg.	7.0	2.44
KU-628	12	L 31	B	1 3/4	22.00	5.0	11.5	2500	8.0	2.0	Hg.	Neg.	9.00	3.18
WL-629	12	L 31	F	1/2	4.50	2.5	2.6	350	0.2	0.04	Inert	Neg.	4.25	1.56
WL-631	Any	Net	B	1 1/2	13.50	5.0	4.5	1000	15.0	2.5	Hg.	Neg.	7.25	3.00
WL-632-A	Any	Net	B	1 3/4	16.00	5.0	6.0	1500	30.0	2.5	Hg.	Neg.	8.69	1.75R
KU-636	12	L 31	A	1 1/2	15.00	2.5	7.0	350	0.4	0.1	Inert	Neg.	7.0	2.44
WL-672	12	L 31	B	1 3/4	19.00	5.0	6.0	1500	30.0	2.5	Hg.	Neg.	8.38	2.31
KU-676	6	L 32	B	2	34.00	5.0	9.5	2500	40.0	6.4	Hg.	Neg.	11.75	3.81
WL-677	6	L 32	B	2	34.00	5.0	9.5	10000	15.0	4.0	Hg.	Neg.	11.75	3.81
WL-2050	Any	Net	F	1/2	1.35	6.3	0.6	1300	0.5	0.1	Inert	Neg.	4.13	1.56

* R indicates clearance radius in column headed "Diameter".

MISCELLANEOUS GROUP

This group of tubes includes Protector Tubes, Current Regulator Tubes, Low Pressure Measuring Tubes.

Protector tubes are normally used in protecting supervisory control lines from high voltage surges which might endanger the insulation of instruments, transformers, etc.

Current Regulator Tubes are used to maintain constant current in a circuit with fluctuating voltage. They are ordinarily used in connection with instrumentation circuits.

Low Pressure Measuring Tubes are used for continuous indication of degree of vacuum in low pressure systems.

PROTECTOR											
Type Number	DISCOUNTS		Warranty Class	Shipping Weight Lbs.	Price	VOLTS RMS		CURRENT		Max. Length	Max. Diameter
	Min. Quan.	Schedule				Break-down	Max. Operating	Max. 2 Sec.	Max. 10 Min.		
KX-642	12	L 31	F	1/2	\$10.00	300-500	230	50 Amp.	7 Amp.	4.75	2.19

REGULATOR											
Type Number	DISCOUNTS		Warranty Class	Shipping Weight Lbs.	Price	Voltage Range Filament Volts	CURRENT			Length Max.	Diameter Max.
	Min. Quan.	Schedule					Normal	Change per Volt	Total		
WL-710	Any	Net	F	1/2	\$3.00	20-30	250 Ma.	1.4 Ma.	10 Ma.	2.50	1.19
WL-711	Any	Net	F	1/2	3.00	7-11	500 Ma.	4 Ma.	12 Ma.	2.50	1.19
WL-712	Any	Net	F	1/2	3.00	19-25	500 Ma.	3.8 Ma.	19 Ma.	2.50	1.19
WL-788	Any	Net	F	1/2	3.00	8-18	250 Ma.	1.7 Ma.	10 Ma.	2.50	1.19
WL-896	Any	Net	F	1/2	3.00	4-9	250 Ma.	2 Ma.	8 Ma.	2.50	1.19

PRESSURE INDICATOR											
WL-762	12	L 31	F	1	15.00	10 -13	0.3 Ampere			7.88	1.56

INTERCHANGEABILITY CHART

This chart shows all tubes which are completely interchangeable with Westinghouse Tubes. Competitive tubes are arranged in numerical order.

Tubes listed in this section are completely interchangeable.

Competitive Tube	Class	Westinghouse Equal	Competitive Tube	Class	Westinghouse Equal
CEID	Phototube	WL-735	295A	Pliotron	WL-203A
CEIVD	Phototube	WL-734	303	Pliotron	WL-203A
NU-1	Phototube	WL-735	304A	Pliotron	WL-204A
KC-4	Kenotron	WL-616	F-307A	Pliotron	WL-207
G-9	Phototube	WL-735	311	Pliotron	WL-211
V-9	Phototube	WL-734	311T	Pliotron	WL-211
PJ-22	Phototube	WL-734	WE-322A	Pliotron	WL-803
PJ-23	Phototube	WL-735	F-353A	Phanotron	WL-872A/872
FB-50	Regulator	WL-896	369A2	Phanotron	WL-869B
FG-57	Thyratron	WL-631	369B3	Phanotron	WL-869B
RK-57	Pliotron	WL-805	376A	Pliotron	WL-469
59-A	Phototube	WL-735	GL-414	Thyratron	WL-414
59-AV	Phototube	WL-734	GL-415	Ignitron	WL-681/686
HY-61/807	Pliotron	WL-807	509	Pliotron	WL-889
F-204A	Pliotron	WL-204A	GL-509	Pliotron	WL-889
204A	Pliotron	WL-204A	GL-509R	Pliotron	WL-889R
GL-204A	Pliotron	WL-204A	WL-630 & 630A	Pliotron	WL-2050
207	Pliotron	WL-207	KU-634	Pliotron	WL-677
GL-207	Pliotron	WL-207	GL-802	Pliotron	WL-802
211	Pliotron	WL-211	GL-803	Pliotron	WL-803
GL-211	Pliotron	WL-211	GL-805	Pliotron	WL-805
FG-235A	Ignitron	WL-651/656	GL-806	Pliotron	WL-806
FG-238B	Ignitron	WL-653B	RCA-806	Pliotron	WL-806
FG-258A	Ignitron	WL-655/658	GL-807	Pliotron	WL-807
FG-258B	Ignitron	WL-655/658	RCA-807	Pliotron	WL-807
FG-259B	Ignitron	WL-679	GL-809	Pliotron	WL-809
FG-271	Ignitron	WL-652/657	GL-810	Pliotron	WL-810

INTERCHANGEABILITY CHART (cont.)

Competitive Tube	Class	Westinghouse Equal	Competitive Tube	Class	Westinghouse Equal
GL-811	Pliotron	WL-811	GL-869B	Phanotron	WL-869B
GL-812	Pliotron	WL-812	872	Phanotron	WL-872A/872
GL-813	Pliotron	WL-813	GL-872	Phanotron	WL-872A/872
GL-814	Pliotron	WL-814	872A	Phanotron	WL-872A/872
GL-815	Pliotron	WL-815	GL-872A	Phanotron	WL-872A/872
GL-828	Pliotron	WL-828	872A/872	Phanotron	WL-872A/872
833	Pliotron	WL-833A	GL-872A/872	Phanotron	WL-872A/872
GL-833A	Pliotron	WL-833A	GL-880	Pliotron	WL-880
GL-837	Pliotron	WL-837	GL-889	Pliotron	WL-889
GL-838	Pliotron	WL-838	GL-889R	Pliotron	WL-889R
845	Pliotron	WL-845	F-891	Pliotron	WL-891
GL-845	Pliotron	WL-845	GL-891	Pliotron	WL-891
849	Pliotron	WL-849	F-891R	Pliotron	WL-891R
F-849	Pliotron	WL-849	GL-891R	Pliotron	WL-891R
GL-849	Pliotron	WL-849	GL-892	Pliotron	WL-892
GL-851	Pliotron	WL-851	GL-892R	Pliotron	WL-892R
857A	Phanotron	WL-857B	GL-893	Pliotron	WL-893
857B	Phanotron	WL-857B	905	Pliotron	WL-805
GL-857B	Phanotron	WL-857B	938	Pliotron	WL-838
GL-860	Pliotron	WL-860	945	Pliotron	WL-845
RCA-860	Pliotron	WL-860	949	Pliotron	WL-849
861	Pliotron	WL-861	951	Pliotron	WL-851
GL-861	Pliotron	WL-861	952	Pliotron	WL-195
RCA-861	Pliotron	WL-861	966	Phanotron	WL-866A/866
866	Phanotron	WL-866A/866	966A	Phanotron	WL-866A/866
866A	Phanotron	WL-866A/866	972A	Phanotron	WL-872A/872
866A/866	Phanotron	WL-866A/866	2050	Thyratron	WL-2050
GL-866A/866	Phanotron	WL-866A/866	GL-2050	Thyratron	WL-2050
868	Phototube	WL-735	2051	Thyratron	WL-2050
GL-868 (PJ-23)	Phototube	WL-735	GL-2051	Thyratron	WL-2050
869A	Phanotron	WL-869B	3119	Pliotron	WL-860
GL-869A	Phanotron	WL-869B	3124A	Pliotron	WL-861
869B	Phanotron	WL-869B			

Tubes listed in this section are interchangeable except as noted.

Competitive Tube	Westinghouse Equal with noted differences	
HV-12	WL-468	WL-468—1 $\frac{3}{8}$ " longer, $\frac{5}{8}$ " greater diameter. Usually interchangeable in diathermy applications.
HV-18	WL-460	Interchangeable for diathermy applications.
RK-25/25B	WL-802	WL-802— $\frac{1}{4}$ " shorter. Usually interchangeable.
HV-27	WL-468	WL-468—1 $\frac{3}{8}$ " longer, $\frac{5}{8}$ " greater diameter. Interchangeable in diathermy applications.
RK-28	WL-803	WL-803— $\frac{1}{8}$ " shorter, $\frac{1}{4}$ " greater diameter.
HY-30	WL-809	WL-809— $\frac{9}{16}$ " longer, $\frac{3}{8}$ " greater diameter.
RK-44	WL-837	WL-837— $\frac{1}{8}$ " shorter.
RK-47	WL-814	WL-814—1" shorter.
FG-95	WL-632A	Completely interchangeable except WL-632A is $\frac{3}{4}$ " longer and is not interchangeable in Unionmelt equipment.
T-200	WL-460	WL-460—1 $\frac{1}{2}$ " longer, $\frac{3}{4}$ " greater diameter. Interchangeable in diathermy applications.
EE-200	WL-460	WL-460—2 $\frac{1}{4}$ " longer, $\frac{3}{16}$ " greater diameter. Interchangeable in diathermy applications.
HF-200	WL-460	WL-460— $\frac{3}{4}$ " longer. Interchangeable in diathermy applications.
GL-203	WL-203A	WL-203A— $\frac{1}{8}$ " longer.
HD-203A	WL-468	Interchangeable in diathermy applications.
266B	WL-857B	Cathode base only difference.
WE-319A	WL-872A/872	Fully interchangeable except for quadrature operation.
T-814	WL-468	WL-468—1 $\frac{3}{8}$ " longer, $\frac{5}{8}$ " greater diameter. Interchangeable in diathermy applications.
T-822	WL-468	WL-468—1 $\frac{3}{8}$ " longer, $\frac{5}{8}$ " greater diameter. Interchangeable in diathermy applications.
F-891	WL-891	WL-891— $\frac{3}{4}$ " longer, $\frac{7}{16}$ " greater diameter.
F-891R	WL-891R	WL-891R— $\frac{15}{16}$ " greater diameter.
F-892	WL-892	WL-892— $\frac{3}{4}$ " longer, $\frac{7}{16}$ " greater diameter.
F-892R	WL-892R	WL-892R— $\frac{15}{16}$ " longer, $\frac{3}{16}$ " greater diameter.

WESTINGHOUSE ELECTRONIC TUBES

WARRANTY POLICY

*Warranty Classes

All Westinghouse Electronic tubes listed are sold with a minimum life warranty, as outlined in following paragraphs, which, in effect, assures the user a limited periodic replacement cost of tubes. Some of the tubes listed have not been given pro-rata life warranty because service hazards are small or the price will not bear the expense of administering such pro-rata warranty, which would include serial numbering, shipping records, and life performance records by the customer. Assurance is given that the quality of design, workmanship and material is the equal of those tubes for which pro-rata life warranties are given. Consideration will be given to claims for adjustment if abnormally short average operating life is obtained in properly designed equipment. Various classes of warranties are given because of the many different conditions which exist in applications of electronic tubes.

Class A Warranty

1. The tube is warranted to be free of defects in design, material and workmanship and no other warranty may be implied. If such defects appear within one year after the tube is placed in service (or before 3000 hours of service, whichever occurs first) and "Return Tube Procedure" has been followed, a pro-rata adjustment will be made, based on the difference between the elapsed life in months at failure and twelve months, provided that the tube has not been used at an average rate greater than 3000 hours per year. A fraction of a month consisting of sixteen days or more, will be considered a full month of life, while a period of fifteen days or less will be deducted from the tube life.

2. If used at a greater rate than 3000 hours per year, the pro-rata adjustment will be based upon the difference between the elapsed life in hours at failure and 3000 hours.

3. The life of the tube (when used at an average rate of 3000 hours per year or less) is the elapsed time in months from the time the tube is first placed in service until failure. Once a tube has been installed in regular service, its life will be considered continuous, even though it be removed and used as a spare.

4. No adjustment will be made if the tube life exceeds either 3000 hours or one year. This warranty expires eighteen months after shipment by the Westinghouse Company.

Class B Warranty

1. The tube is warranted to be free from defects in design, material and workmanship and no other warranty may be implied. If such defects appear within one year after the tube is placed in service and "Return Tube Procedure" has been followed, a pro-rata adjustment will be made, based upon the difference between the elapsed life in months at failure and one year. A fraction of a month, consisting of sixteen days or more, will be considered a full month of life. A period of fifteen days or less, will be deducted from the tube life.

2. The life of the tube is the elapsed time in months from the date the tube is first placed in service until failure. Once a tube has been installed in regular service its life will be considered continuous.

3. No adjustment will be made if the tube life exceeds one year. This warranty expires eighteen months after shipment by the Westinghouse Company.

Class C Warranty

1. The tube is warranted to be free of defects in design, material and workmanship and no other warranty may be implied. If such defects appear within one year after the tube is placed in service (or before 1000 hours of service, whichever occurs first) and "Return Tube Procedure" has been followed, a pro-rata adjustment will be made, based on the difference between the elapsed life in months at failure and twelve months, provided that the tube has not been used at an average rate greater than 1000 hours per year. A fraction of a month of sixteen days or more, will be considered a full month of tube life, while fifteen days or less will be deducted from the tube life.

2. If used at a rate greater than 1000 hours per year, the pro-rata adjustment will be based upon the difference between the elapsed life in hours at failure and 1000 hours.

3. The life of the tube (when used at an average rate of 1000 hours per year or less) is the elapsed time in months from the date the tube is first placed in service until failure. Once a tube has been installed in regular service, its life will be considered continuous even though it be removed and used as a spare.

4. No adjustment will be made if the tube life exceeds either 1000 hours or one year. This warranty expires fifteen months after shipment by the Westinghouse Company.

Class D Warranty

1. Tubes listed under Class D Warranty are only for rectifier service.

2. The tube is warranted to be free from defects in design, material and workmanship and no other warranty may be implied. If such defects appear within three years after the tube is placed in service and "Return

Tube Procedure" has been followed, a pro-rata adjustment will be made, based upon the difference between the elapsed life in months at failure and three years. A fraction of a month, consisting of sixteen days or more, will be considered a full month of life. A period of fifteen days or less, will be deducted from the tube life.

3. The life of the tube is the elapsed time in months from the date the tube is first placed in service until failure. Once a tube has been installed in regular service its life will be considered continuous.

4. No adjustment will be made if the tube life exceeds three years. This warranty expires 60 months after shipment by the Westinghouse Company.

5. The equipment manufacturer must assume all responsibility for the circuits used to control the tubes and for applying the tubes within their design limitations.

6. Tubes sold under this guarantee use stainless steel to minimize corrosion. This guarantee, however, does not cover corrosion or sludging of the tube envelope or water jacket and the equipment manufacturer must assume full responsibility for investigation of water conditions on each application and furnish adequate corrosion preventative equipment, such as heat exchangers, wherever necessary.

*Class E Warranty

The tube is warranted to be free from defects in design, material and workmanship, and no other warranty may be implied. If such defects appear, the tube will be subject to full adjustment for failures within 50 hours service or proportional adjustment for the difference between elapsed life and 1000 hours for failures up to 1000 hours service, provided service has been within published tube ratings and "Return Tube Procedure" has been followed. No adjustment will be made if the tube life exceeds either 1000 hours or one year.

For users the warranty period extends for 12 months after receipt of tube while for dealers and equipment manufacturers the warranty period extends 18 months after receipt.

*Class F Warranty

The tube is warranted to be free from defects in design, material and workmanship, and no other warranty may be implied. If such defects appear within one month after the tube is placed in service and "Return Tube Procedure" has been followed, full credit will be allowed. No adjustment will be made if tube life exceeds one month. This warranty expires 12 months after shipment by the Westinghouse Company.

Return Tube Procedure

1. **Permission and Shipping Instructions** for returning any tube must be secured from the nearest sales office or representative before return of tube for inspection or credit consideration.

2. **Service Report Form** supplied by the Company must be completely filled out by the user and returned with the tube in order to obtain credit consideration.

3. Since evidence of improper handling or abuse automatically voids guarantees, all tubes should be used in properly designed and protected equipments and in conformity with published recommendations and ratings. Tubes which are so used, but which may fail by reason of manufacturing defect in design, material or workmanship within the warranty period, should be returned as promptly as possible.

4. For the purchaser's protection it is important that all tubes be mechanically inspected and electrically tested upon receipt. This enables customer to file with the carrier a concealed damage claim, if such is in order, within the carrier's specified time limit; and enables the Company to render assistance to the customer, if desired, in the prosecution of any justified carrier claim.

License Notice

The sale of these tubes conveys no license for use in connection with public service communication, sound or picture recording or reproduction of sound or pictures from records for motion picture audience purposes where an admission fee is charged. Furthermore, the sale of these tubes conveys no license, either expressed or implied, under any patents owned by the Westinghouse Electric & Manufacturing Company, its owned or controlled companies, or under which it is licensed, other than patents covering the tubes themselves.

Conditions

The Company shall not be liable for loss, damage, detention or delay resulting from causes beyond its reasonable control or caused by fire, strike, civil or military authority, priority requests of the United States Government or any department, branch or representative thereof, insurrection or riot, embargoes, car shortages, wrecks or delays in transportation, or inability to obtain necessary labor, materials, or manufacturing facilities due to such causes; nor, in any event, for consequential damages.

*Denotes change from previous issue.

WESTINGHOUSE ELECTRIC & MANUFACTURING CO.

LAMP DIVISION

BLOOMFIELD, NEW JERSEY