

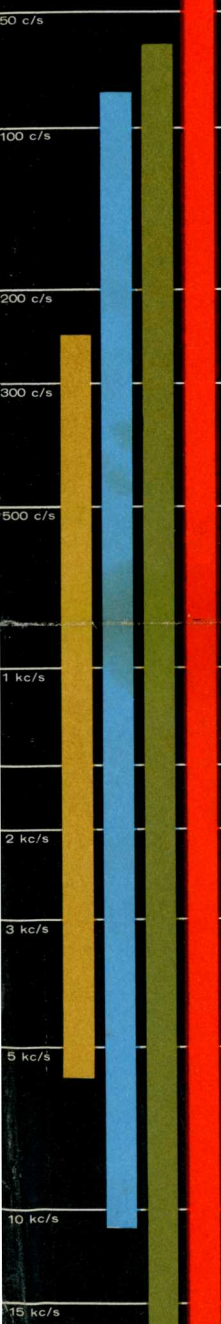


# LOUDSPEAKERS


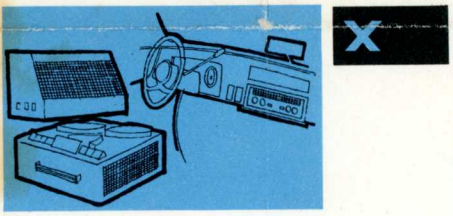


AD 2209SZ AD 2400 Z AD 3414 Z



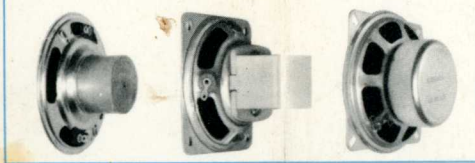


AD 3464 X  
AD 3574 X

AD 3514 X  
AD 3714 X  
AD 3814 X

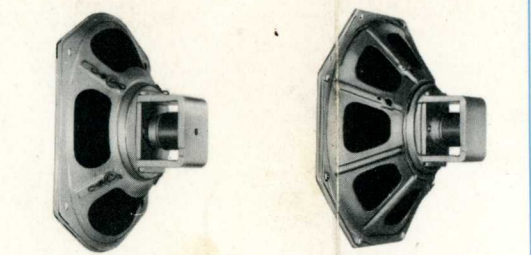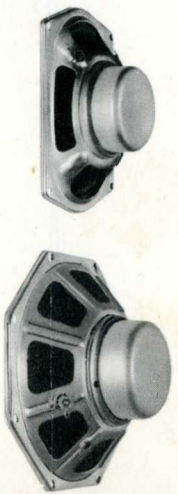

AD 3460 M/06 AD 3500 M/06  
AD 3690 M/06 AD 3700 M/06  
AD 3800 M/06

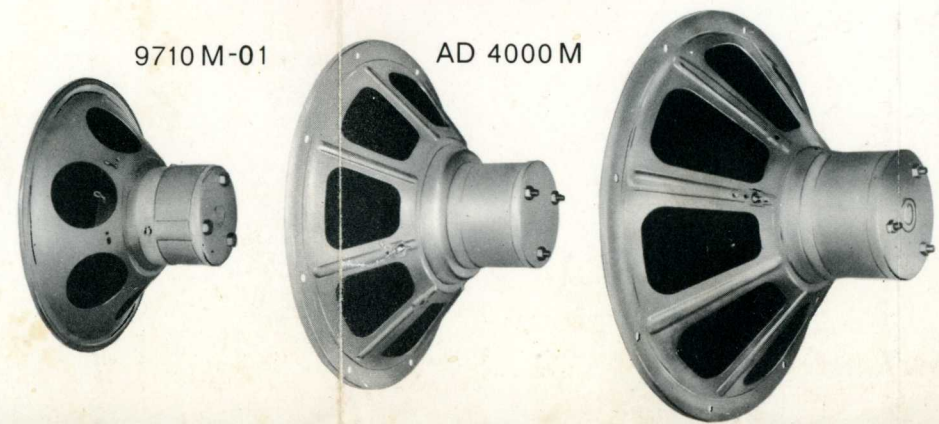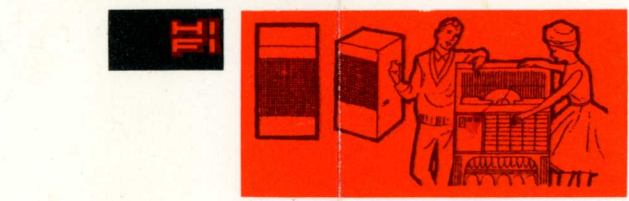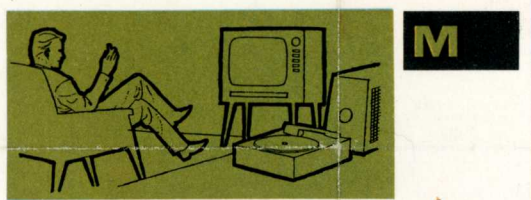

9710 M-01 AD 4000 M

AD 4200 M  
AD 5200 M

diam.	voice coil impedance	max. handling capacity	reson. freq.	frequency range	flux density	total magnetic flux	magnetic energy in air gap	total weight	dimensions			
									ohm	watt	c/s	c/s
2 1/4	AD 2209 SZ	8	0,5	420	400 - 5000	7100	11500	-	55	23	58	-
3	AD 1300 -06	3	2	230	200 - 18000	6800	9500	19,7	130	43	80	92
	AD 2300 CZ-06	150	2	275	240 - 7000	8500	15800	41,2	230	55	80	92
	AD 1400 -06	3	3	165	140 - 16500	6800	9500	19,7	160	50	105	119
4	AD 2400 -06	3	3	170	140 - 16500	8500	15800	41,2	260	62	105	119
	ADZ 2400 Z-06	3	3	205	160 - 5500	8500	15800	41,2	260	62	105	119
	AD 3414 Z	3	3	165	170 - 7000	12000	22300	82	400	42	105	119
5	AD 1500 -06	3	3	130	100 - 14000	6800	9500	19,7	150	53	121	119
	AD 2500 X-06	3	6	130	100 - 11000	8500	15800	41,2	250	64	121	119
	AD 3500 M-06	5	3	124	95 - 19000	9500	28000	82	400	71	121	119
7	AD 3514 X	5	6	130	100 - 11000	9500	28200	82	445	55	121	119
	AD 1700 -06	3	3	90	75 - 14000	6800	9500	19,7	190	62	155	156
	AD 2700 X-06	5	6	110	80 - 11000	8500	15200	39,4	290	73	155	156
8	AD 3700 M-06	5	3	85	70 - 18000	9500	28000	82	440	81	155	156
	AD 3714 X	5	6	110	80 - 11000	9500	28000	82	475	65	155	156
	AD 3700 AM-06	800	3	85	70 - 18000	9500	28000	82	440	81	155	156
	AD 2800 M-06	5	6	72	60 - 18000	8500	15200	39,4	370	83	192	194
	AD 3800 M-06	5	6	72	60 - 18000	9500	28000	82	520	91	192	194
	AD 3814 X	5	6	95	70 - 10000	9500	28200	82	535	75	192	194
8 1/2	AD 4800 M	5	6	60	55 - 18000	13000	58300	302	1500	120	192	194
	9710M-01	7	10	50	40 - 19000	8000	97600	308	1800	116	216	226
	AD 4000 M	7	10	50	45 - 18000	8000	98000	308	1770	130	262	244
10	AD 4201 M	5	10	45	40 - 18000	9500	42600	161	850	125	315	294
	AD 4200 M	7	20	45	35 - 17000	8000	98000	308	1800	148	315	294
	AD 5200 M	7	20	45	35 - 17000	11000	134000	582	3500	157	315	294
4 x 6	AD 2460 X-06	5	6	130	110 - 11000	8500	15200	39,4	290	63	155 x 103	177,5 x 92
	AD 3460 M-06	5	3	124	105 - 18000	9500	28000	82	440	71	155 x 103	177,5 x 92
	AD 3464 X	5	6	130	110 - 11000	9500	28000	82	480	55	155 x 103	177,5 x 92
5 x 7	AD 3574 X	5	3	110	100 - 8000	9500	28000	82	520	66	183 x 133	110 x 110
	AD 3690 M-06	5	6	77	65 - 18000	9500	28000	82	525	91	234 x 161	167 x 117,5

