

INDICATOR TUBE

Long-life cold-cathode seven-digit indicator tube for side-viewing.

QUICK REFERENCE DATA

Numeral height	approx.	14	mm
Numerals		0 1 2 3 4 5 6	
Supply voltage	V_{ba}	min.	170 V
Anode current	I_a		2,5 mA

GENERAL

The numerals are 14 mm high and appear on the same base line allowing in-line read out.

PRINCIPLE OF OPERATION


By applying a suitable voltage between the anode and one of the cathodes the corresponding numeral will be covered by a red neon glow.

CHARACTERISTICS, OPERATING CONDITIONS AND LIMITING VALUES

These are essentially the same as of type ZM1010.

DIMENSIONS AND CONNECTIONS

Dimensions in mm

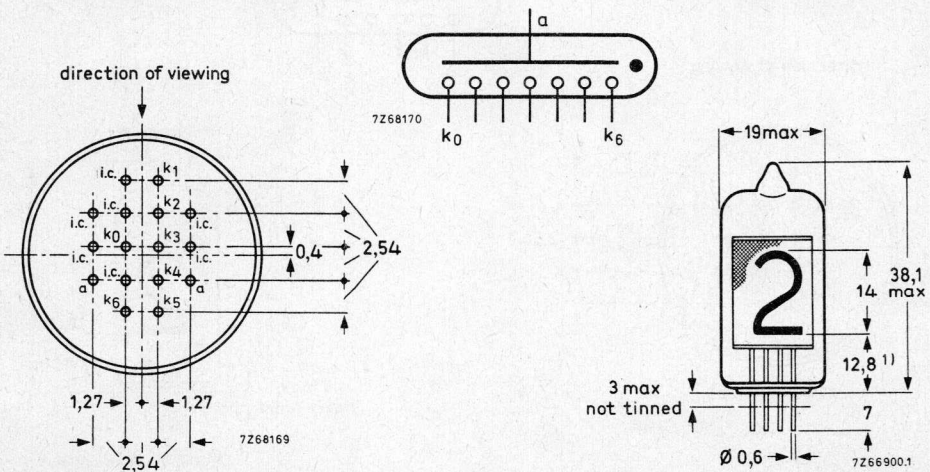

1) Standard deviation 0,13 mm.