



7448

DISPLAY STORAGE TUBE

7448

DIRECT-VIEW TYPE
3.8"-DIAMETER DISPLAYWRITING GUN:
ELECTROSTATIC DEFLECTION
ELECTROSTATIC FOCUSVIEWING GUN:
NO DEFLECTION
NO FOCUS

DATA			
General:	Writing Section	Viewing Section	
Heater, for Unipotential Cathode:			
Voltage (AC or DC)	6.3	6.3	volts
Current	0.6	0.6	amp
Minimum Cathode Heating Time before other electrode voltages are applied.			
	-	30	sec
Direct Interelectrode Capacitances (Approx.): ^o			
Grid No. 1 to all other tube electrodes	6.5	11	μlf
Cathode to all other tube electrodes	5.5	8	μlf
Backplate to all other tube electrodes	-	116	μlf
Deflecting electrode DJ ₁ to deflecting electrode DJ ₂ . . .	1.9	-	μlf
Deflecting electrode DJ ₃ to deflecting electrode DJ ₄ . . .	2	-	μlf
DJ ₁ to all other tube electrodes.	6	-	μlf
DJ ₂ to all other tube electrodes.	7	-	μlf
DJ ₃ to all other tube electrodes.	5.5	-	μlf
DJ ₄ to all other tube electrodes.	4.8	-	μlf
Focusing Method	Electrostatic	None	
Deflection Method	Electrostatic	None	
Deflecting-Electrode Arrangement.	See Dimensional Outline	-	
Phosphor (For Curves, see front of this Section).			
	-	P20, Aluminized	
Fluorescence.	-	Yellow-Green	
Phosphorescence	-	Yellow-Green	
Minimum Useful Viewing Diameter ^v			3.8"
Maximum Overall Length.			13.64"
Seated Length			12.50" \pm 0.39"
Greatest Bulb Diameter.			5.25" \pm 0.06"
Maximum Tube Radius			2.69"
Bulb Terminals:			
Caps (Three).	Recessed Small Ball (JEDEC No. J1-22)		
Cap	Recessed Small Cavity (JEDEC No. J1-21)		
Temperature Range:			
Operating	-55° to +85° C		
Storage	-65° to +100° C		
Operating Position.	Any		
Weight (Approx.).	2-3/4 lbs		
Base.	Medium-Shell Diheptal 14-Pin (JEDEC Group 5, No. B14-38)		




7448

DISPLAY STORAGE TUBE

BOTTOM VIEW

- Pin 1—Heater of Writing Gun
 Pin 2—Grid No.1 of Writing Gun
 Pin 3—Grid No.3 of Writing Gun
 Pin 4—Deflecting Electrode DJ₃ of Writing Gun
 Pin 5—Deflecting Electrode DJ₄ of Writing Gun
 Pin 6—Grid No.2 of Viewing Gun, Grid No.2 and Grid No.4 of Writing Gun
 Pin 7—Grid No.1 of Viewing Gun
 Pin 8—Grid No.3 of Viewing Gun
 Pin 9—Heater of Viewing Gun
 Pin 10—Heater and Cathode of Viewing Gun
 Pin 11—Deflecting Electrode DJ₁ of Writing Gun
 Pin 12—Deflecting Electrode DJ₂ of Writing Gun

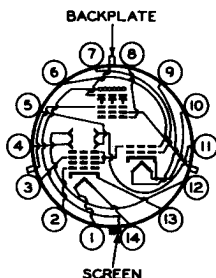

- Pin 13—Cathode of Writing Gun
 Pin 14—Heater of Writing Gun
 Recessed Ball Cap:
Over Pin
 3—Grid No.5 of Viewing Gun
Over Pin
 12—Grid No.4 of Viewing Gun
On Side of Tube Opposite Base
Key—Backplate
 Recessed Cavity Cap:
Over Base
Key—Screen

Maximum and Minimum Ratings, Absolute-Maximum Values:

For altitudes up to 10,000 feet

	Writing Section		Viewing Section	
SCREEN VOLTAGE.	-		11000 max.**	volts
BACKPLATE VOLTAGE (Peak).	-		20 max.**	volts
	<i>Equivalent Values</i>		<i>Equivalent Values</i>	
GRID-No.5 VOLTAGE	-	-	300 max.**	volts
GRID-No.4 VOLTAGE	2950 max.** [▲]	200 max.**	300 max.**	volts
GRID-No.3 VOLTAGE	1200 max.*	-1550 max.**	{ 200 max.** 10 min.** }	volts
PEAK VOLTAGE BETWEEN GRID No.3 AND GRIDS No.2 & No.4.	-	2950 max.	-	volts



7448

7448

DISPLAY STORAGE TUBE

	Writing Section		Viewing Section		
GRID-No. 2 VOLT-AGE	2950 max. [▲]	200 max. ^{**}	2950 max. [▲]	200 max. ^{**}	volts
CATHODE VOLT-AGE	-	-2750 max. ^{**}	-	-	volts
GRID-No. 1 VOLT-AGE:					
Negative-bias value . . .	200 max. [*]		200 max. ^{**}		volts
Positive-bias value . . .	0 max. [*]		0 max. ^{**}		volts
Positive-peak value . . .	2 max. [*]		0 max. ^{**}		volts
PEAK VOLTAGE BETWEEN GRIDS No. 2 & No. 4 AND ANY DE-FLECTING ELECTRODE . .	500 max.		-		volts
PEAK HEATER-CATHODE VOLTAGE:					
Heater negative with respect to cathode . .	125 max. [*]		-		volts
Heater positive with respect to cathode . .	125 max. [*]		-		volts

VIEWING SECTION**

Operating Values and Typical Performance Characteristics:

To prevent possible damage to the tube, allow the viewing-gun beam current to reach normal operating value before turning on the writing-gun beam current, and keep the viewing-gun beam on till the writing beam is turned off

Screen Voltage.	10000	10000	volts
Backplate Voltage (DC).	2	2	volts
Grid-No. 5 Voltage	210	150	volts
Grid-No. 4 Voltage [#]	50 to 150	30 to 90	volts
Grid-No. 3 Voltage [#]	10 to 50	10 to 40	volts
Grid-No. 2 Voltage [#]	150	125	volts
Grid-No. 1 Voltage [#]	0 to -80	0 to -60	volts
Maximum Screen Current.	0.75	0.5	ma
Maximum Backplate Current (Peak).	2	1.5	ma
Maximum Grid-No. 5 Current	3	2.5	ma
Maximum Grid-No. 4 Current	3	2.5	ma
Maximum Grid-No. 3 Current	5	4	ma



DISPLAY STORAGE TUBE

Maximum Grid-No.2 Current [■]	3	2.5	ma
Maximum Cathode Current.	8	6.5	ma
Number of Half-Tone Steps [□]	5	5	
Viewing Duration ^{▲▲}	20	40	sec
Maximum Erasing-Uniformity Factor ^{□□}	0.45	0.4	
Resolution [•]	50	50	lines/in.
Brightness ^{••}	2750	1500	fl

WRITING SECTION[®]

Range Values for Equipment Design:*

For any grids-No.2 & No.4 voltage ($E_{C_{2+4}}$) between
1500 and 2750 volts[▲]

Grid-No.3 Voltage for focus.	17.5% to 37.5% of $E_{C_{2+4}}$		volts
Maximum Grid-No.1 Voltage for cutoff of undeflected focused spot	-4.6% of $E_{C_{2+4}}$		volts
Maximum Grid-No.3 Current.	-15 to +10		μ a
Maximum Cathode Current.	See Curve		
Deflection Factors:			
DJ ₁ & DJ ₂	36 to 48	v dc/in./kv of $E_{C_{2+4}}$	
DJ ₃ & DJ ₄	35 to 47	v dc/in./kv of $E_{C_{2+4}}$	
Focused Beam Position.	##		
Writing Speed ^{††}	300000		in./sec

Examples of Use of Design Ranges:*

For grids-No.2 & No.4 voltage ($E_{C_{2+4}}$) [▲]	2000		volts
Grid-No.3 Voltage for focus.	350 to 750		volts
Maximum Grid-No.1 Voltage for cutoff of undeflected focused spot.	-92		volts
Deflection Factors:			
DJ ₁ & DJ ₂	72 to 96		volts
DJ ₃ & DJ ₄	70 to 94		volts

Equivalent Values of Writing-Gun Voltages Referred to Cathode of Viewing Gun:

Cathode Voltage.	-1850	-1875	volts
Grid-No.3 Voltage for focus.	-1100 to -1500	-1125 to -1525	volts
Grids-No.2 & No.4 Voltage [▲]	+150	+125	volts

VIEWING SECTION and WRITING SECTION

Circuit Values:

Grid-No.1-Circuit Resistance (Either gun).	1 max.	megohm
Resistance in Any Deflecting-Electrode Circuit [■]	0.1 max.	megohm
Series Current-Limiting Resistor (Unbypassed) In Grid-No.5 (Viewing-Section) Circuit	0.01 min.	megohm



7448

7448

DISPLAY STORAGE TUBE

Backplate-Circuit Resistance. 0.005 max. megohm

Series Current-Limiting Resistance in

Screen Circuit. 1 min. megohm

○ Without external shield.

♥ Minimum useful viewing area may be eccentric with respect to the tube face.

** Voltages are shown with respect to cathode of Viewing Gun.

* Voltages are shown with respect to cathode of Writing Gun.

▲ Grids No.2 and No.4 of Writing Gun are connected together and to grid No.2 of Viewing Gun within the tube.

Adjusted for brightest, most uniform pattern.

■ With writing beam cut off. Since grid No.2 of the Viewing Gun and grids No.2 and No.4 of the Writing Gun are connected together within the tube, the maximum total current collected by these electrodes is essentially equal to the sum of the maximum grid-No.2 current of the Viewing Gun and the maximum cathode current of the Writing Gun (See Writing-Gun-Current-Characteristic Curve).

□ Observed with an RCA-2F21 Monoscope display.

▲▲ Expressed in terms of the time required for the brightness of the unwritten background to rise from just zero brightness (viewing-beam cutoff) to 10 per cent of saturated brightness.

□□ Determined as follows: With no erasing pulse, overscan the storage surface with writing beam to obtain maximum pattern brightness. Then cut off writing beam. Apply rectangular erasing pulses having an amplitude of between 8 to 10 volts and adjust duty cycle to obtain complete erasure in approximately 10 seconds. Measure time (t_1) from start of erasing to the instant at which any area within the minimum useful viewing diameter is reduced to background-brightness level, and time (t_2) from start of erasing to the instant at which the entire area within the minimum useful viewing-diameter area is reduced to background-brightness level. The erasing-uniformity factor is defined as $(t_2 - t_1)/t_2$.

● Measured by shrinking-raster method at a display brightness of 50 per cent of saturated brightness and with grids No.2 & No.4 of Writing Gun at about +2000 volts with respect to cathode of Writing Gun.

●● Measured with entire storage grid written to produce saturated brightness and with screen at indicated voltage.

● The cathode of the Writing Gun is operated at about -2000 volts with respect to the cathode of the Viewing Gun which is usually operated at ground potential.

** The center of the undeflected focused beam will fall within a circle having a 10-mm radius and having its center on the Writing-Gun axis (See Dimensional Outline) under the following conditions: grids No.2 & No.4 of Writing Gun at +2000 volts with respect to cathode of Writing Gun, grid No.3 of Writing Gun at voltage to give focus, grid No.1 of Writing Gun at voltage which will permit storage of a charge just sufficient to give a barely perceptible spot on screen, Viewing Section operating under normal conditions, and tube shielded against extraneous fields.

†† Measured under conditions of writing from just zero brightness (viewing-beam cutoff) to maximum brightness with grid No.1 of Writing Gun at -10 volts with respect to cathode of Writing Gun, and grids No.2 & No.4 of Writing Gun at +2000 volts with respect to cathode of Writing Gun.

■ It is recommended that the deflecting-electrode-circuit resistances be approximately equal.

OPERATING CONSIDERATIONS

Shielding. Magnetic shielding must be provided to prevent external fields from interfering with the required accurate control of the low-velocity viewing beam. A cylindrical shield of properly annealed high-permeability material about 1/16-inch thick is usually satisfactory.



7448

DISPLAY STORAGE TUBE

Terminal Connections. The base pins of the 7448 fit the Diheptal 14-contact socket. The *Recessed Small Ball caps* and the *Recessed Small Cavity cap* require standard flexible-lead connectors.

The high voltages at which the 7448 is operated may be very dangerous. Great care should be taken in the design of apparatus to prevent the operator from coming in contact with the high voltages. Safety precautions include the enclosing of high-potential terminals and the use of interlocking switches to break the primary circuit of the power supply when access to the equipment is desired.

In the use of high-voltage tubes, it should always be remembered that high voltages may appear at normally low-potential points in the circuit as a result of capacitor breakdown or incorrect circuit connections. Therefore, before any part of the circuit is touched, the power-supply switch should be turned off, and both terminals of any capacitors grounded.

To prevent possible damage to the tube, allow the Viewing-Gun beam current to reach normal operating value before turning on the Writing-Gun beam current, and keep the viewing beam on till the writing beam is turned off.


Failure of scanning while the writing beam is turned on may permanently damage the storage grid. Therefore, provision should be made to cut off automatically the writing-beam current in case of a scanning failure. The writing-beam current can be cut off by an electronic switch which applies -200 volts bias to grid No.1 of the Writing Gun. This switch should be actuated by a portion of the scanning voltages applied to both sets of deflecting electrodes.



7448

7448

DISPLAY STORAGE TUBE

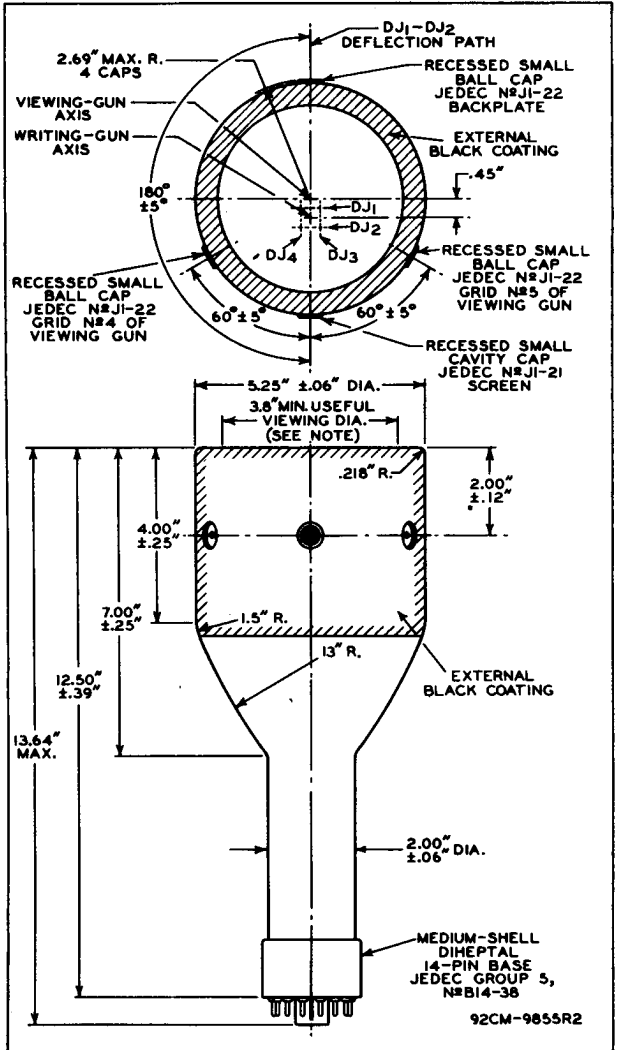

7448



7448

DISPLAY STORAGE TUBE

NOTE: MINIMUM USEFUL VIEWING AREA MAY BE ECCENTRIC WITH RESPECT TO THE TUBE FACE. THE MINIMUM USEFUL VIEWING AREA WILL HAVE DIAMETER OF 3.8".

CENTER LINE OF BULB WILL NOT DEVIATE MORE THAN 2° IN ANY DIRECTION FROM PERPENDICULAR ERECTED AT CENTER OF BOTTOM OF BASE.

DEFLECTING ELECTRODES DJ_1 AND DJ_2 ARE NEARER THE SCREEN; DEFLECTING ELECTRODES DJ_3 AND DJ_4 ARE NEARER THE BASE. WITH DJ_1 POSITIVE WITH RESPECT TO DJ_2 , THE SPOT WILL BE DEFLECTED TOWARD PIN 8; LIKewise, WITH DJ_3 POSITIVE WITH RESPECT TO DJ_4 , THE SPOT WILL BE DEFLECTED TOWARD PIN 4.


THE ANGLE BETWEEN THE DEFLECTION PATH PRODUCED BY DJ_1 AND DJ_2 MAY VARY FROM THE PLANE THROUGH THE TUBE AXIS AND THE BASE KEY BY ANGULAR TOLERANCE (MEASURED ABOUT THE TUBE AXIS) OF $\pm 10^{\circ}$. THE ANGLE BETWEEN THE DEFLECTION PATH PRODUCED BY DJ_1 AND DJ_2 MAY VARY FROM THE PLANE THROUGH THE TUBE AXIS AND THE SCREEN CAP BY ANGULAR TOLERANCE (MEASURED ABOUT THE TUBE AXIS) OF $\pm 10^{\circ}$. ANGLE BETWEEN $DJ_1 - DJ_2$ DEFLECTION PATH AND $DJ_3 - DJ_4$ DEFLECTION PATH IS $90^{\circ} \pm 3^{\circ}$.



7448


7448

TYPICAL CHARACTERISTICS

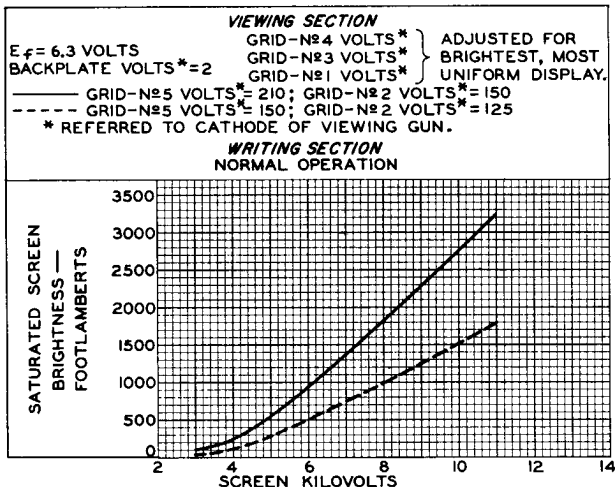

92CS-9858

TYPICAL STORAGE-GRID CHARACTERISTIC

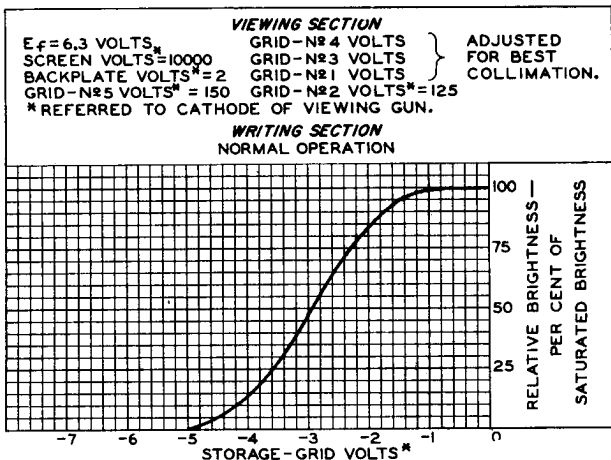


92CS-9861

7448



7448

TYPICAL ERASURE CHARACTERISTIC

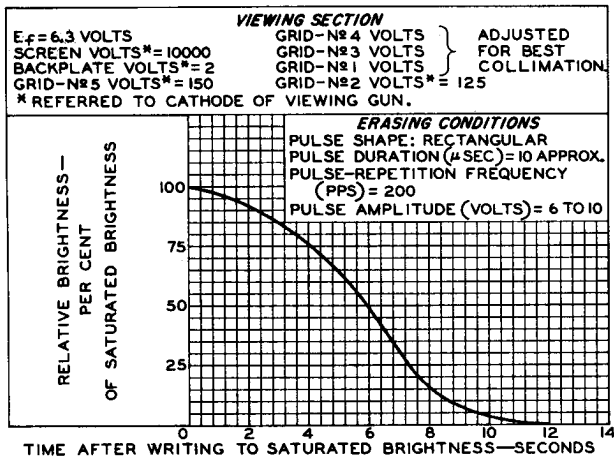

92CS-9860

WRITING-GUN-CURRENT CHARACTERISTIC

