

Mullard SCREENED TETRODE

DASI

TENTATIVE DATA

Filament $V_f = 2.0 \text{ V}$
 $I_f = 0.06 \text{ A}$

Capacities $C_{ag1} = 0.07 \mu\text{MF}$
 $C_{g1} = 5.7 \mu\text{MF}$
 $C_a = 3.4 \mu\text{MF}$


Operating Conditions

V_a	120	120	V
V_{g2}	45	60	V
$-V_g$	2.0	2.7	V
I_a	0.8	1.5	mA
S	0.43	0.58	mA/V
R_i	0.65	0.5	$M\Omega$

Limiting Values

$V_a \text{ max}$	120	V
$V_{g2} \text{ max}$	60	V
$R_{g1} \text{ max}$	2.0	$M\Omega$

Arrangement of electrodes and base connections.

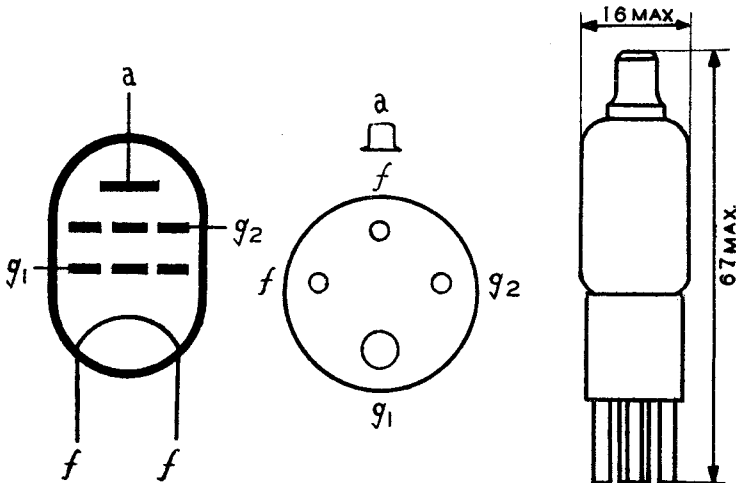

DASI

DAS1

Mullard SCREENED TETRODE

