

EDISWAN
13E1
BEAM TETRODE

Indirectly heated—for D.C. Control Applications

GENERAL

This Low Impedance Beam Tetrode is intended for general D.C. Control applications and has a centre tapped heater. It is suitable for Triode connection and has a maximum anode dissipation of 90 watts.

RATING

Heater Voltage (volts)	V _h	26.0	13.0
Heater Current (amps)	I _h	1.3	2.6
Maximum Anode Voltage (volts)	V _{a(max)}	800	1500† ←
Maximum Screen Voltage (volts)	V _{g2(max)}	300	
Maximum Control Grid Voltage (volts)	V _{g1(max)}	-100	
Maximum Anode Dissipation (watts)	P _{a(max)}	90	
Maximum Screen Dissipation (watts)	P _{g2(max)}	10	
Maximum Anode plus Screen Dissipation (Triode Connection) (watts)	P _{a + g2(max)}	95	←
Maximum Control Grid Dissipation (watts)	P _{g1(max)}	1	←
Maximum Cathode Current (mA)	I _{k(max)}	800	5000† ←
Maximum Heater/Cathode Voltage (volts D.C.) (Heater—ve)	V _{h-k(max)}	300	
Mutual Conductance (Triode Connection) (mA/V)	g _m	35*	
Amplification Factor (Triode Connection)	μ _t	4.5*	
Anode Resistance (δv _a /δI _a) Triode Connection) (ohms)	r _{a(t)}	130*	
* V _a =150 volts I _a =500mA.			

All maximum ratings are absolute values not design centres.
† Series pulse rating. For peak currents greater than 2 amps, ←
the product of the peak current and pulse duration in amp-microseconds should not exceed 10. The valve should not operate for longer than 5μs in any 100 μs period.

Indicates a change ←

EDISWAN
13E1 JEDEC Type 7972
BEAM TETRODE

Indirectly heated—for D.C. Control Applications

INTER-ELECTRODE CAPACITANCES (pF)

Control Grid/Earth	c _{in}	56
Anode/Earth	c _{out}	20.4
Anode/Control grid	c _{a-g1}	1.3

DIMENSIONS

Maximum Overall Length	(mm)	140.0 ←
Maximum Diameter	(mm)	65.0 ←
Maximum Seated Height	(mm)	128.0 ←
Approximate Nett Weight	(ozs)	6.0
Approximate Packed Weight	(ozs)	30.0


MOUNTING POSITION—Vertical

BULB—Clear

BASE—B7A

BASING—7GF

Viewed from free end of pins.



VALVEHOLDER—Ediswan Clix Cat. No. VH117/701

CONNECTIONS

Pin 1	Heater	h
Pin 2	Heater Centre Tap	h tap
Pin 3	Control Grid	g1
Pin 4	Cathode	k
Pin 5	Screen Grid	g2
Pin 6	Anode	a
Pin 7	Heater	h


Indicates a change ←

EDISWAN
13E1

BEAM TETRODE

Indirectly heated—for D.C. Control Applications

AVERAGE CHARACTERISTIC CURVES: I_a/V_{g1}
TRIODE CONNECTED
Curves taken with short duration pulse

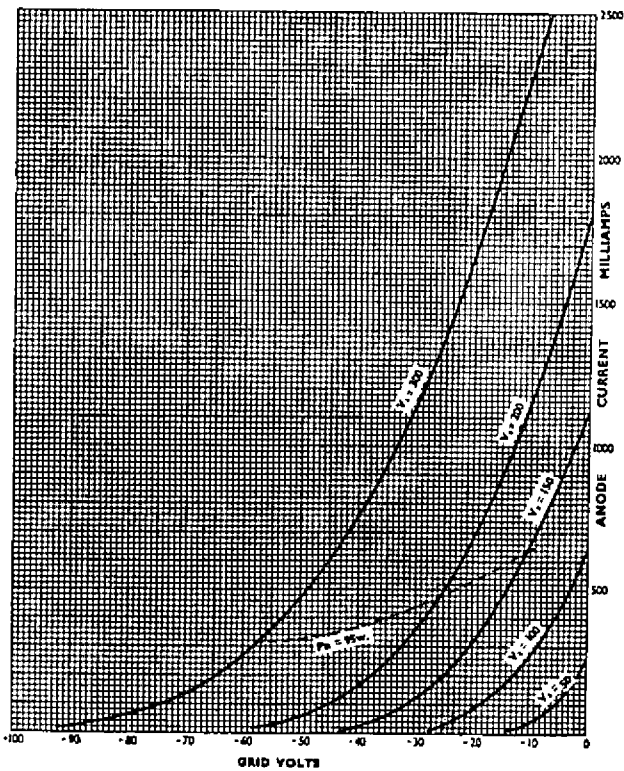


13E1 13E1

EDISWAN
13E1

BEAM TETRODE

Indirectly heated—for D.C. Control Applications

AVERAGE CHARACTERISTIC CURVES: I_a/V_a
 $V_{g2}=100V$
Curves taken with short duration pulse

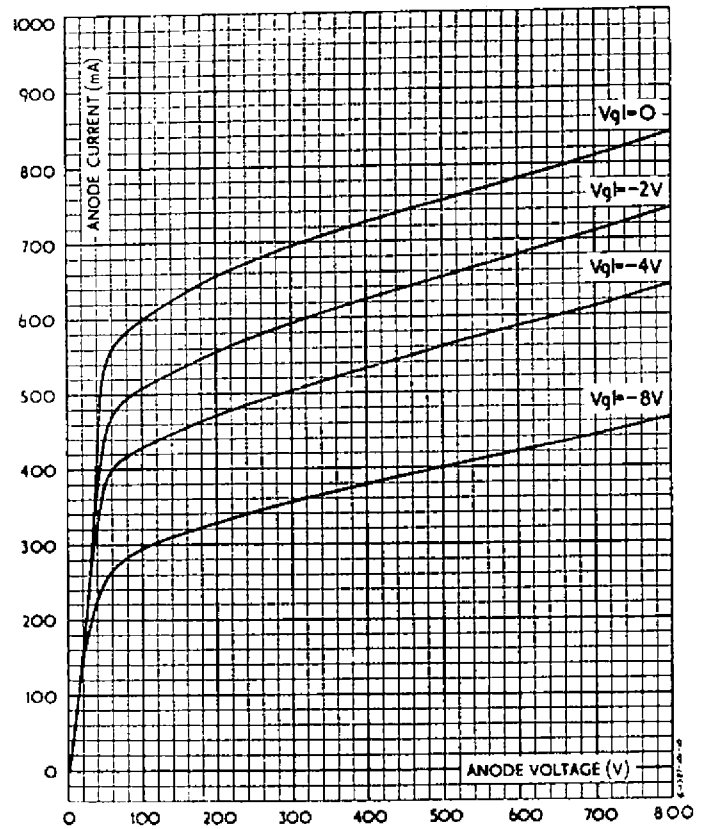


**EDISWAN
13E1
BEAM TETRODE**

Indirectly heated—for D.C. Control Applications

AVERAGE CHARACTERISTIC CURVES: I_a/V_{g1}
 $V_a=600V$

Curves taken with short duration pulse

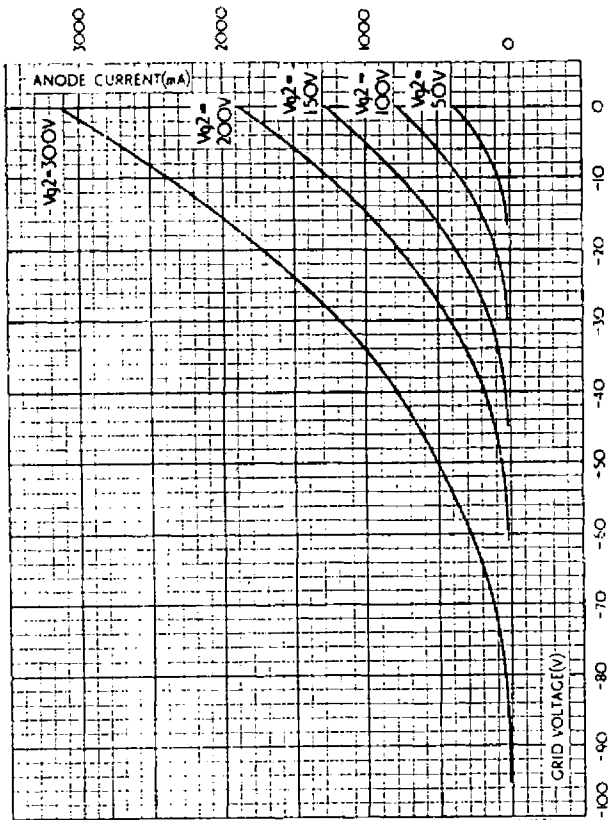


**EDISWAN
13E1
BEAM TETRODE**

Indirectly heated—for D.C. Control Applications

AVERAGE CHARACTERISTIC CURVES: I_{g2}/V_{g1}
 $V_a=600V$

Curves taken with short duration pulse

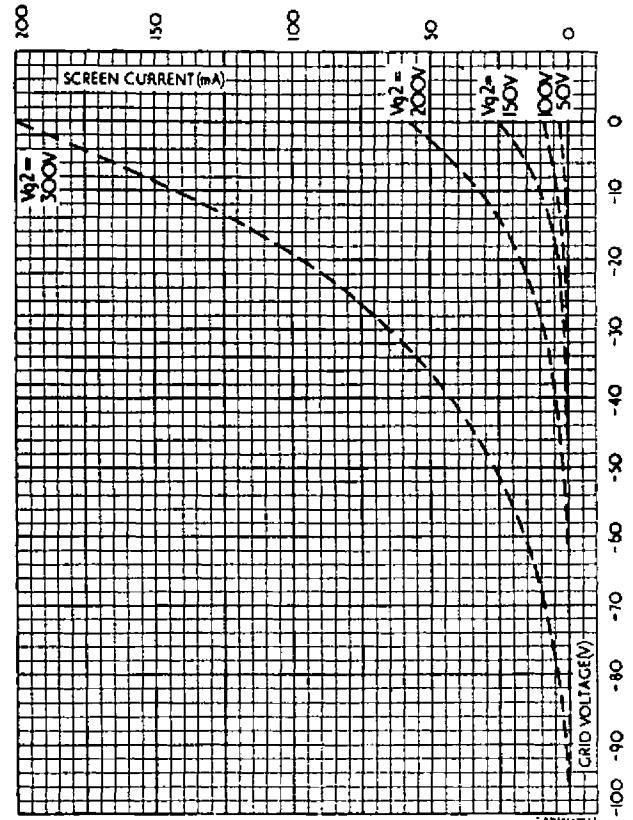

EDISWAN

13E1

BEAM TETRODE


Indirectly heated—for D.C. Control Applications

AVERAGE CHARACTERISTIC CURVES: I_{g2}/V_a

$V_{g2} = 100V$

Curves taken with short duration pulse

13E1

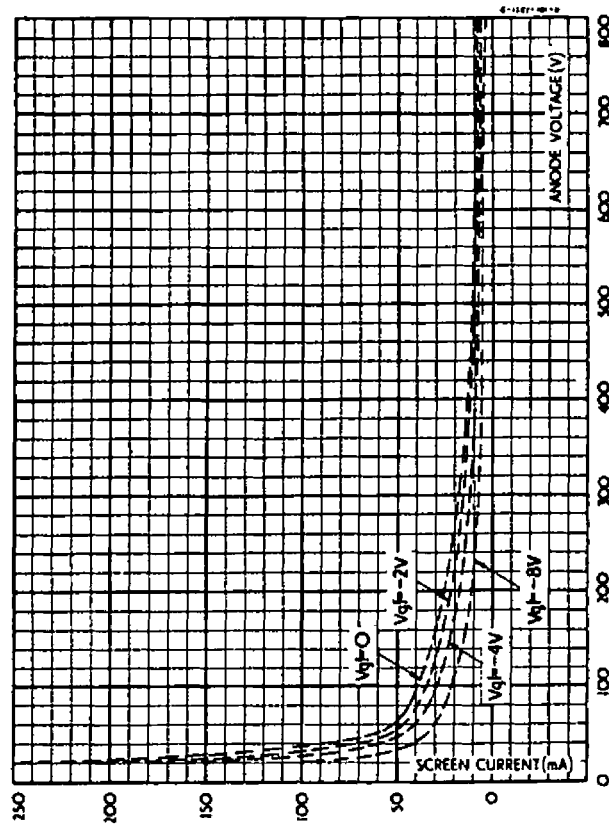

July 1958

INDUSTRIAL
VALVE & CRT DIVISION

Issue 1/7

SIEMENS EDISON SWAN LIMITED