





T.			U_f	I_f	Cl.	f	U_a	U_{g2}	U_{g3}	U_{g1}	I_a	I_{g2}	I_{g1}	$U_{g1 \approx}$	P_{dr}	P_o	P_a	
			V	V		MHz	V	V	V	V	mA	mA	mA	V	W	W	W	
P 120-2	BB	1	10	5	C-Tgr C-Tif; A-Mod C-Tif; G ₁ -Mod C-Tif; G ₃ -Mod B-Tif B(≈); Modul stat. max.	30	2000	400	45	90	170	75	12	190	2	245		
						30	1500	400	45	80	135	50	10	155	1,5	145		
						30	2000	400	45	90	80	10	8	100	1	60		
						30	2000	1)	55	80	80	10	10	150	1,2	60		
						30	2000	400	45	40	75	15	1	50	1	50		
							2000	400	45	35	(10 ÷ 155) × 2	(10 ÷ 50) × 2	10 × 2	100 × 2	0,75 × 2	420	125	
							2000	500	100	-200	200	S = 5 mA/V; $\mu_{(g2/g1)} = 10$; $P_{g2} = 35$ W; $P_{g1} = 5$ W; f = 75 MHz						

$U_{g2} = 2000$ V - (30 kΩ × I_{g2})



C_{g1}	C_a	$C_{g1/a}$
pF	pF	pF
16	17	0,015

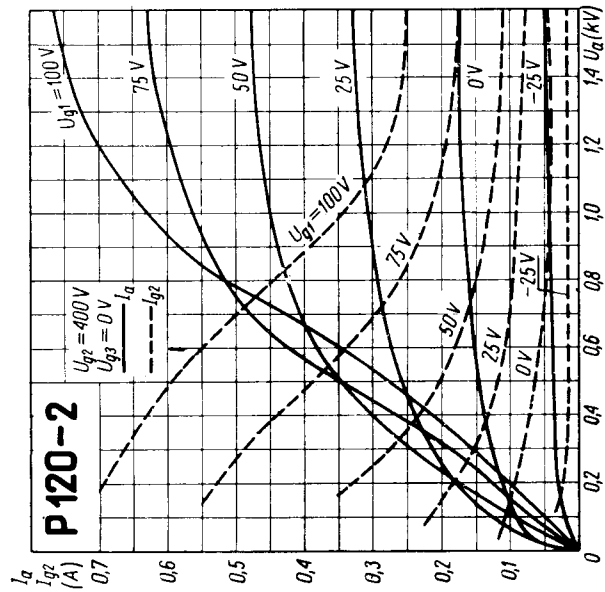